

**FCC 15.407 U-NII
(Permissive Change)
5GHz Test Report**


for

LG Electronics Inc.

**222, LG-ro, Jinwi-myeon Pyeongtaek-Si, Gyeonggi-Do,
17709 Republic of Korea**

Product Name : Notebook Computer
**Model Name : (1)16Z90T (2)16ZB90T
(3)16ZD90T (4)16ZG90T**
Brand : LG
FCC ID : BEJNT-16Z90T

**Prepared by: : AUDIX Technology Corporation,
EMC Department**



The test report is based on a single evaluation of one sample of the above-mentioned products. It does not imply an assessment of the whole production and does not permit the use of the test lab logo.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

TABLE OF CONTENTS

Description	Page
TEST REPORT.....	4
1. REVISION RECORD OF TEST REPORT	5
2. SUMMARY OF TEST RESULTS	6
3. GENERAL INFORMATION	7
3.1. Description of Application	7
3.2. Description of EUT	8
3.3. Reference Test Guidance.....	9
3.4. Information for Permissive Change.....	9
3.5. Antenna Information	10
3.6. EUT Specifications Assessed in Current Report	11
3.7. Description of Key Components	13
3.8. Test Configuration.....	15
3.9. Output Power Setting	30
3.10. Tested Supporting System List.....	32
3.11. Setup Configuration.....	32
3.12. Operating Condition of EUT	33
3.13. Description of Test Facility	33
3.14. Measurement Uncertainty	34
4. MEASUREMENT EQUIPMENTLIST.....	35
4.1. Conducted Emission Measurement	35
4.2. Radiated Emission Measurement	35
4.3. RF Conducted Measurement	36
5. CONDUCTED EMISSION.....	37
5.1. Block Diagram of Test Setup	37
5.2. Conducted Emission Limit	37
5.3. Test Procedure	37
5.4. Test Results	37
6. RADIATED EMISSION	38
6.1. Block Diagram of Test Setup	38
6.2. Radiated Emission Limits.....	39
6.3. Test Procedure	42
6.4. Measurement Result Explanation.....	44
6.5. Test Results	44
7. EMISSION/OCCUPIED BANDWIDTH.....	45
7.1. Block Diagram of Test Setup	45
7.2. Specification Limits.....	45
7.3. Test Procedure	45
7.4. Test Results	46
8. MAXIMUM OUTPUT POWER	47
8.1. Block Diagram of Test Setup	47
8.2. Specification Limits.....	47
8.3. Test Procedure	48
8.4. Test Results	48
9. POWER SPECTRAL DENSITY	49



Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301

Fax: +886 2 26099303

9.1. Block Diagram of Test Setup	49
9.2. Specification Limits.....	49
9.3. Test Procedure	49
9.4. Test Results	49
10. FREQUENCY STABILITY	50
10.1. Block Diagram of Test Setup	50
10.2. Specification Limits.....	50
10.3. Test Procedure	50
10.4. Test Results	50
11. DEVIATION TO TEST SPECIFICATIONS	51

APPENDIX A TEST DATA AND PLOTS

APPENDIX B TEST PHOTOGRAPHS

TEST REPORT (Permissive Change)

Applicant : LG Electronics Inc.
Manufacturer : LG Electronics Inc.
Factory : LG Electronics Nanjing New Technology Co., Ltd.
EUT Description
(1) Product : Notebook Computer
(2) Model : (1)16Z90T (2)16ZB90T (3)16ZD90T (4)16ZG90T
(3) Brand : LG
(4) Power Supply : DC 20V, 3.25A

Applicable Standards:

Title 47 FCC CFR Part 15 Subpart E

Audix Technology Corp. tested the equipment mentioned in accordance with the requirements set forth in the above standards. Test results indicate that the equipment tested is capable of demonstrating compliance with the requirements as documented within this report.

Audix Technology Corp. does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens and samples.

Date of Report: 2024. 12. 25

Reviewed by:



(Sabrina Wang/Administrator)

Approved by:



(Johnny Hsueh/Section Manager)



Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

1. REVISION RECORD OF TEST REPORT

Edition No	Issued Date	Revision Summary	Report Number
0	2024. 12. 25	Original Report	EM-F240605

2. SUMMARY OF TEST RESULTS

Rule	Description	Results
15.207	Conducted Emission	PASS
15.205/15.209	Undesirable Emissions Limits: Radiated Band Edge and Radiated Spurious Emission	PASS
15.407(a)(5)/15.407(e)	Emission/Occupied Bandwidth	PASS
15.407(a)	Maximum Output Power	PASS
15.407(b)	Conducted Band Edges	N/A
15.407(a)	Power Spectral Density	PASS
15.407	Frequency Stability	PASS
15.407(h)(2)	Dynamic Frequency Selection(DFS)	PASS, Please refer to test report No. EM-F240553
15.203	Antenna Requirement	Compliance
Note: The uncertainties value is not used in determining the result.		

3. GENERAL INFORMATION

3.1. Description of Application

Applicant	LG Electronics Inc. 222, LG-ro, Jinwi-myeon Pyeongtaek-Si, Gyeonggi-Do, 17709 Republic of Korea
Manufacturer	LG Electronics Inc. 222, LG-ro, Jinwi-myeon Pyeongtaek-Si, Gyeonggi-Do, 17709 Republic of Korea
Factory	LG Electronics Nanjing New Technology Co., Ltd. No.346, Yaoxin Road, Economic & Technical Development Zone, Nanjing, China.
Product	Notebook Computer
Model	(1)16Z90T (2)16ZB90T (3)16ZD90T (4)16ZG90T The difference between all models is different in the sales customers and color difference.
Brand	LG

3.2. Description of EUT

Test Model	16Z90T			
Serial Number	N/A			
Power Rating	DC 20V, 3.25A			
Software Version	XY (X, Y can be 0 to 9 for different SW version not influence RF parameter)			
RF Features	WLAN:802.11 a/b/g/n/ac/ax/be Bluetooth: BT and BLE (BT5.4)			
Transmit Type	2.4 GHz Bands			
	802.11b	1T1R		
	802.11g	1T1R		
	802.11n-HT20/40	2T2R		
	802.11ax-HE20/40	2T2R		
	802.11be-EHT20/40	2T2R		
	BT/BLE	1T1R		
	U-NII Bands			
	802.11a	1T1R		
	802.11n-HT20/40	2T2R		
	802.11ac-VHT20/40/80/160	2T2R		
	802.11ax-HE20/40/80/160	2T2R		
	802.11be-EHT20/40/80/160	2T2R		
	WLAN 6E Bands			
	802.11ax-HE20/40/80/160	2T2R		
	802.11be-EHT20/40/80/160/320	2T2R		
The MIMO is uncorrelated and supported SDM (Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).				
Device Category	☐ Outdoor Access Point ☐ Fixed point-to-point Access Point ☐ Indoor Access Point ☒ Mobile and Portable client device			
Sample Status	Trial sample			
Test Sample	Sample No.	Test Item	Firmware	
	01	AC Conduction, RSE, RF Conducted	N/A	
	03	AC Conduction, RSE	N/A	
Date of Receipt	2024. 10. 22			
Date of Test	2024. 10. 04 ~ 12.23			

Interface Ports of EUT	• One HDMI Port • Two USB Type C Ports • One Earphone Port • Two USB 3.0 Ports • One SD Card Slot
Accessories Supplied	• AC Adapter • USB C Cable • LAN Gender

Note: Pursuant ISO 17025:2017 section 7.8.2, Audix Technology Corp. does not assume responsibility for all EUT's information including RF features, transmit type, antenna information...etc are provided by customer.

3.3. Reference Test Guidance

KDB 789033 D02 General UNII Test Procedures New Rules v02r01
KDB 662911 D01 Multiple Transmitter Output v02r01
KDB 291074 D02 EMC Measurement v01
ANSI C63.10:2013

3.4. Information for Permissive Change

- The EUT is an addition version with original FCC ID: BEJNT-16Z90T is as following.
 - (a) To add UNII Band 2A/2C frequency by firmware.
- The differences between this application and original's ID as clarify in following list.

Item	Original	Permissive Change
Frequency	2402-2480MHz 2412-2472MHz 5180-5240MHz 5745-5825MHz 5845-5885MHz	2402-2480MHz 2412-2472MHz 5180-5240MHz 5250MHz 5260-5320MHz 5500-5720MHz 5745-5825MHz 5845-5885MHz

- Due to above different item, there have some test item should be re-tested (see section 2), the test data are recorded in this report.

3.5. Antenna Information

No.	Antenna Part Number	Manufacture	Antenna Type	Frequency (MHz)	Max Gain(dBi)	
					Main	AUX
1.	WA-P-LELE-04-070	INPAQ	Mono-Pole	2400~2500	2.1	2.5
				5150~5350	1.5	0.8
				5470~5725	0.9	1.1
				5725~5850	1.8	1.5
				5850~5900	1.8	1.7
				5925~6425	1.7	1.9
				6425~6525	0.9	1.4
				6525~6875	1.5	2.0
				6875~7125	1.4	1.8
According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then						
Directional gain = 10 log[(10 ^{G1/10} + 10 ^{G2/10} + ... + 10 ^{GN/10})/N _{ANT}] dBi						
Note 1. 2.4G: Directional gain =						
2400~2500MHz: Directional gain = 10 log[(10 ^{2.1/10} + 10 ^{2.5/10})/2]= 2.30dBi						
Note 2. 5G: Directional gain =						
5150 ~ 5350MHz: = 10 log[(10 ^{1.5/10} + 10 ^{0.8/10})/2]= 1.16dBi						
5850~5900MHz: = 10 log[(10 ^{1.8/10} + 10 ^{1.7/10})/2]= 1.75dB						
Note 3. UNII Band (WLAN 6G):						
5925~6425MHz: Directional gain = 10 log[(10 ^{1.7/10} + 10 ^{1.9/10})/2]= 1.80dBi						
6425~6525MHz: Directional gain = 10 log[(10 ^{0.9/10} + 10 ^{1.4/10})/2]= 1.16dBi						
6525~6875MHz: Directional gain = 10 log[(10 ^{1.5/10} + 10 ^{2.0/10})/2]= 1.76dBi						
6875~7125MHz: Directional gain = 10 log[(10 ^{1.4/10} + 10 ^{1.8/10})/2]= 1.60dBi						

No.	Antenna Part Number	Manufacture	Antenna Type	Frequency (MHz)	Max Gain(dBi)	
					Main	AUX
2.	L1LRF017-CS-H	LUXSHARE-ICT	Mono-Pole	2400~2500	5.2	5.3
				5150~5350	3.0	5.8
				5470~5725	4.1	5.0
				5725~5850	2.7	4.5
				5850~5925	3.8	4.5
				5925~6425	4.9	4.3
				6425~6525	1.6	3.0
				6525~6825	1.8	3.0
				6825~7125	2.8	2.2
According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then Directional gain = $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{ANT}]$ dBi Note 1. 2.4G: Directional gain = 2400~2500MHz: Directional gain = $10 \log[(10^{5.2/10} + 10^{5.3/10})/2]$ = 5.25dBi Note 2. 5G: Directional gain = 5150~5350MHz: = $10 \log[(10^{3.1/10} + 10^{5.8/10})/2]$ = 4.62dBi 5850~5925MHz: = $10 \log[(10^{3.8/10} + 10^{4.5/10})/2]$ = 4.16dBi Note 3. UNII Band (WLAN 6G): 5925~6425MHz: Directional gain = $10 \log[(10^{4.9/10} + 10^{4.3/10})/2]$ = 4.61dBi 6425~6525MHz: Directional gain = $10 \log[(10^{1.6/10} + 10^{3.0/10})/2]$ = 2.36dBi 6525~6825MHz: Directional gain = $10 \log[(10^{1.8/10} + 10^{3.0/10})/2]$ = 2.44dBi 6875~7125MHz: Directional gain = $10 \log[(10^{2.8/10} + 10^{2.2/10})/2]$ = 2.51dBi						

3.6. EUT Specifications Assessed in Current Report

Mode	U-NII Band	Fundamental Range (MHz)	Channel Number
802.11a	2A	5260-5320	4
	2C	5500-5720	12
802.11n-HT20 802.11ac-VHT20 802.11ax-HE20 802.11be-EHT20	2A	5260-5320	4
802.11n-HT40 802.11ac-VHT40 802.11ax-HE40 802.11be-EHT40	2C	5500-5720	12
	2A	5270-5310	2
802.11ac-VHT80 802.11ax-HE80 802.11be-EHT80	2C	5510-5710	6
	2A	5290	1
802.11ac-VHT160 802.11ax-HE160 802.11be-EHT160	2C	5530-5690	3
	2A	5250	1
	2C	5570	1
Remark: U-NII Band 2A and 2C (DFS Function, Slave/no In service monitor, no Ad-Hoc mode)			

Mode	Modulation	Data Rate (Mbps)
802.11a	OFDM (BPSK/QPSK/16QAM/64QAM)	Up to 54
802.11n-HT20	OFDM (BPSK/QPSK/16QAM/64QAM)	Up to 144.4
802.11n-HT40		Up to 300
802.11ac-VHT20	OFDM (BPSK/QPSK/16QAM/64QAM/256QAM)	Up to 173.3
802.11ac-VHT40		Up to 400
802.11ac-VHT80		Up to 866.7
802.11ac-VHT160		Up to 1733.3
802.11ax-HE20	OFDMA (BPSK/ QPSK/ 16QAM/ 64QAM/ 256QAM/1024QAM)	Up to 287
802.11ax-HE40		Up to 574
802.11ax-HE80		Up to 1201
802.11ax-HE160		Up to 2402
802.11be-EHT20	OFDMA (BPSK/ QPSK/ 16QAM/ 64QAM/ 256QAM/1024QAM/4096QAM)	Up to 344
802.11be-EHT40		Up to 688
802.11be-EHT80		Up to 1441
802.11be-EHT160		Up to 2882

Channel List						
802.11a/802.11n-HT20/802.11ac-VHT20/802.11ax-HE20/802.11be-EHT20						
UNII Band	Channel Number	Frequency (MHz)	UNII Band	Channel Number	Frequency (MHz)	
2A	52	5260	2C	100	5500	
	56	5280		104	5520	
	60	5300		108	5540	
	64	5320		112	5560	
		116		5580		
		120		5600		
		124		5620		
		128		5640		
		132		5660		
		136		5680		
		140		5700		
		144		5720		

Channel List					
802.11n-HT40/802.11ac-VHT40/802.11ax-HE40/802.11be-EHT40					
UNII Band	Channel Number	Frequency (MHz)	UNII Band	Channel Number	Frequency (MHz)
2A	54	5270	2C	102	5510
	62	5310		110	5550
		118		5590	
		126		5630	
		134		5670	
		142		5710	

Channel List					
802.11ac-VHT80/802.11ax-HE80/802.11be-EHT80					
UNII Band	Channel Number	Frequency (MHz)	UNII Band	Channel Number	Frequency (MHz)
2A	58	5290	2C	106	5530
				122	5610
				138	5690

Channel List					
802.11ac-VHT160/802.11ax-HE160/802.11be-EHT160					
UNII Band	Channel Number	Frequency (MHz)	UNII Band	Channel Number	Frequency (MHz)
2A	50	5250	2C	114	5570

Note: Test modes are presented at section 3.7.

3.7. Description of Key Components

3.7.1. For the All Component Lists

Item	Supplier	Model / Type	Character
System	Microsoft	Win10 Home / Pro	---
		Win11 Home / Pro	---
Main Board	LG	MTL MAIN B/D PCB	Manufacturer: #1 Hannstar Board Tech (Jiang Yin) Corp., Ltd. #2 Elec&Eltek Company (MCO) Limited.
SUB Board	LG	16Z90T SUB B/D	Manufacturer: #1 Hannstar Board Tech (Jiang Yin) Corp., Ltd. #2 Elec&Eltek Company (MCO) Limited.
CPU (Socket: BGA2049)	Intel	Ultra 7 255H	2.0 GHz
	Intel	Ultra 5 225H	1.7 GHz
16" LCD Panel	LG Display	LP160WQ1 (SP)(B2)	Resolution: 2560 x 1600, 60Hz (with Touch) & w/o Touch
	LG Display	LP160WQ2 (SP)(B1)	Resolution: 2560 x 1600, 144Hz (w/o Touch)
	CSOT	MNG007DA6-3	Resolution: 2560 x 1600, 60Hz (w/o Touch)
Storage (SSD)	SAMSUNG	---	256GB / 512GB / 1TB
	SK hynix	---	256GB / 512GB / 1TB
	Phison	---	256GB / 512GB / 1TB
Memory (RAM)	SAMSUNG	---	16GB / 32GB LPDDR5x (On Board)
	SK hynix	---	16GB / 32GB LPDDR5x (On Board)
Battery Pack	LG	LB3122MM	77Wh, DC 15.52V, 4963mAh
WLAN Combo Card	Intel	BE201D2W	WLAN and BT, 2x2 PCIe M.2 1216-soldered down module FCC ID: PD9BE201D2 IC: 1000M-BE201D2
WLAN Combo Antenna	LG (INPAQ)	WA-P-LELE-04-070	PCB, Mono-pole Type (Black, Gray) For with Touch LCD Panel
	LG (LUXSHARE)	L1LRF017-CS-H	PCB, Mono-pole Type (Black, Gray) For without Touch LCD Panel
Keyboard	TIC	KT0120B8	---
	Lite On	SN8D01B	---
Touch Pad	LITE-ON	SP8001 (SG-A0630-00A)	---
	ELAN	SD081A-36H0	---
Web Camera	Chicony	CKFOF1721005290LH	----
Finger Print	ELAN	F1207A-H0001A	(White)
		F1207A-H0002A	(Black)

Item	Supplier	Model / Type	Character
LAN Gender (Type C to LAN)	SUZHOU MEC ELECTRONICS	80-5946-111	(White) 10/100 Megabit Ethernet
		80-5946-101	(Black) 10/100 Megabit Ethernet
	ARIN TECH CO. LTD	GD-08MF-36-WH-LP10	(White) 10/100 Megabit Ethernet
		GD-08MF-36-BK-LP11	(Black) 10/100 Megabit Ethernet
	HUIZHOU DEHONG TECHNOLOGY CO.,LTD.	370-50713	(White) 10/100 Megabit Ethernet
		370-50714	(Black) 10/100 Megabit Ethernet
	Type C to LAN: Shielded, Undetached, 0.12m		
	ARIN TECH CO. LTD	GD-08MF-50-WH-LP12	(White) 10/100/1000 Megabit Ethernet
		GD-08MF-50-BK-LP13	(Black) 10/100/1000 Megabit Ethernet
	Type C to LAN: Shielded, Undetached, 0.12m		
AC Adapter	LG (PI ELECTRONICS)	LP65WFC20P-NJ	(B = Black),(W = White) I/P: AC 100-240V, 1.6A, 50-60Hz O/P:DC 5V,3A(15W) or DC 9V, 3A(27W)or DC 15V,3A (45W) or DC 20V,3.25A (65W) US Type,Wall-Mounted: (2C)
	#1 Type C Cable(3A) #2 Type C Cable (5A)		

Remark: For more detailed features description, please refer to the manufacturer's specifications or the user manual.

3.7.2. The EUT collocates with following worst components, which are used to establish a basic configuration of system during test:


Mode		1
Main Board	LG, MTL MAIN B/D PCB	V
SUB Board	LG, 16Z90T SUB B/D	V
CPU	Intel, Ultra 5 225H, 1.7 GHz	V
16" LCD Panel	LG Display, LP160WQ1 (SP)(B2)	V
Storage (SSD) #1	SAMSUNG, 256GB	V
Storage (SSD) #2	SK hynix, 1TB	V
Memory (RAM)	SAMSUNG, 16GB	V
Battery Pack	LG, LB3122MM, 77Wh	V
Keyboard	TIC, KT0120B8	V
Touch Pad	LITE-ON, SP8001 (SG-A0630-00A)	V
Web Camera	Chicony, CKFOF1721005290LH	V
Finger Print	ELAN, F1207A-H0001A	V
WLAN Combo Card	Intel, BE201D2W	V
WLAN Combo Antenna	LG (INPAQ), WA-P-LELE-04-070	V #1
	LG (LUXSHARE), L1LRF017-CS-H	V #2
Type C	AC Adapter	LG (PI ELECTRONICS), LP65WFC20P-NJ
	Link to LAN Gender	ARIN (10/100/1000Mbps)


3.8. Test Configuration


Mode		TX _{on} (ms)	TX _{on+off} (ms)	Duty Cycle (x)	Duty Cycle Factor [10log(1/x)] (dB)
802.11a		2.078	2.118	0.981	N/A
802.11n-HT20		3.970	4.000	0.993	N/A
802.11n-HT40		3.970	4.000	0.993	N/A
802.11ac-VHT20		3.950	3.990	0.990	N/A
802.11ac-VHT40		3.950	3.980	0.992	N/A
802.11ac-VHT80		3.960	4.000	0.990	N/A
802.11ac-VHT160		2.770	2.810	0.986	N/A
802.11ax-HE20		3.980	4.020	0.990	N/A
802.11ax-HE40		3.970	4.000	0.993	N/A
802.11ax-HE80		3.980	4.010	0.993	N/A
802.11ax-HE160		2.420	2.460	0.984	N/A
802.11be-EHT20		3.990	4.050	0.985	N/A
802.11be-EHT40		3.970	4.000	0.993	N/A
802.11be-EHT80		3.960	4.000	0.990	N/A
802.11be-EHT160		3.970	4.000	0.993	N/A
Mode	RU Tone	TX _{on} (ms)	TX _{on+off} (ms)	Duty Cycle (x)	Duty Cycle Factor [10log(1/x)] (dB)
802.11ax-HE20	26	5.460	5.660	0.965	0.155
	52	5.470	5.670	0.965	0.155
	106	5.470	5.670	0.965	0.155
802.11ax-HE40	242	5.460	5.640	0.968	0.141
802.11ax-HE80	484	5.450	5.640	0.966	0.150
802.11ax-HE160	996	5.460	5.650	0.966	0.150
802.11be-EHT20	26	5.460	5.660	0.965	0.155
	52	5.470	5.670	0.965	0.155
	106	5.470	5.670	0.965	0.155
802.11be-EHT40	242	5.470	5.660	0.966	0.150
802.11be-EHT80	484	5.440	5.640	0.965	0.155
802.11be-EHT160	996	5.440	5.640	0.965	0.155

Note: When duty cycle is less than 98% (0.98) that duty cycle factor 10log(1/x) is needed to add in conducted test items measured in average detector.




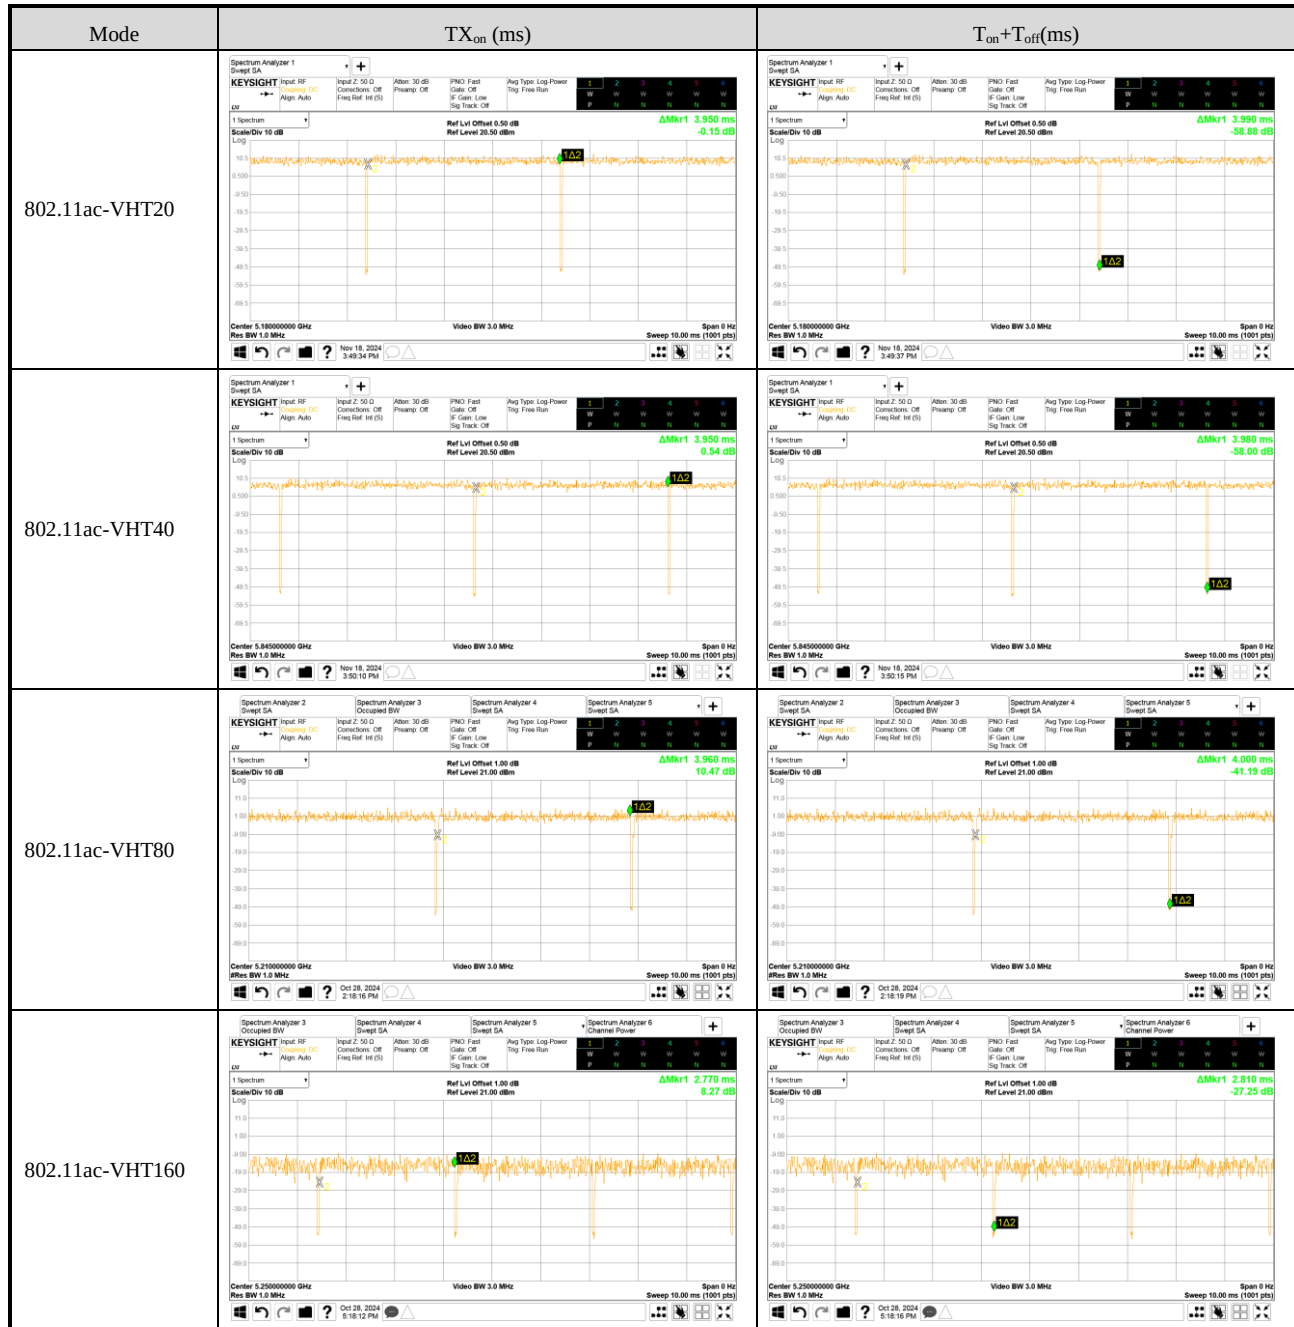

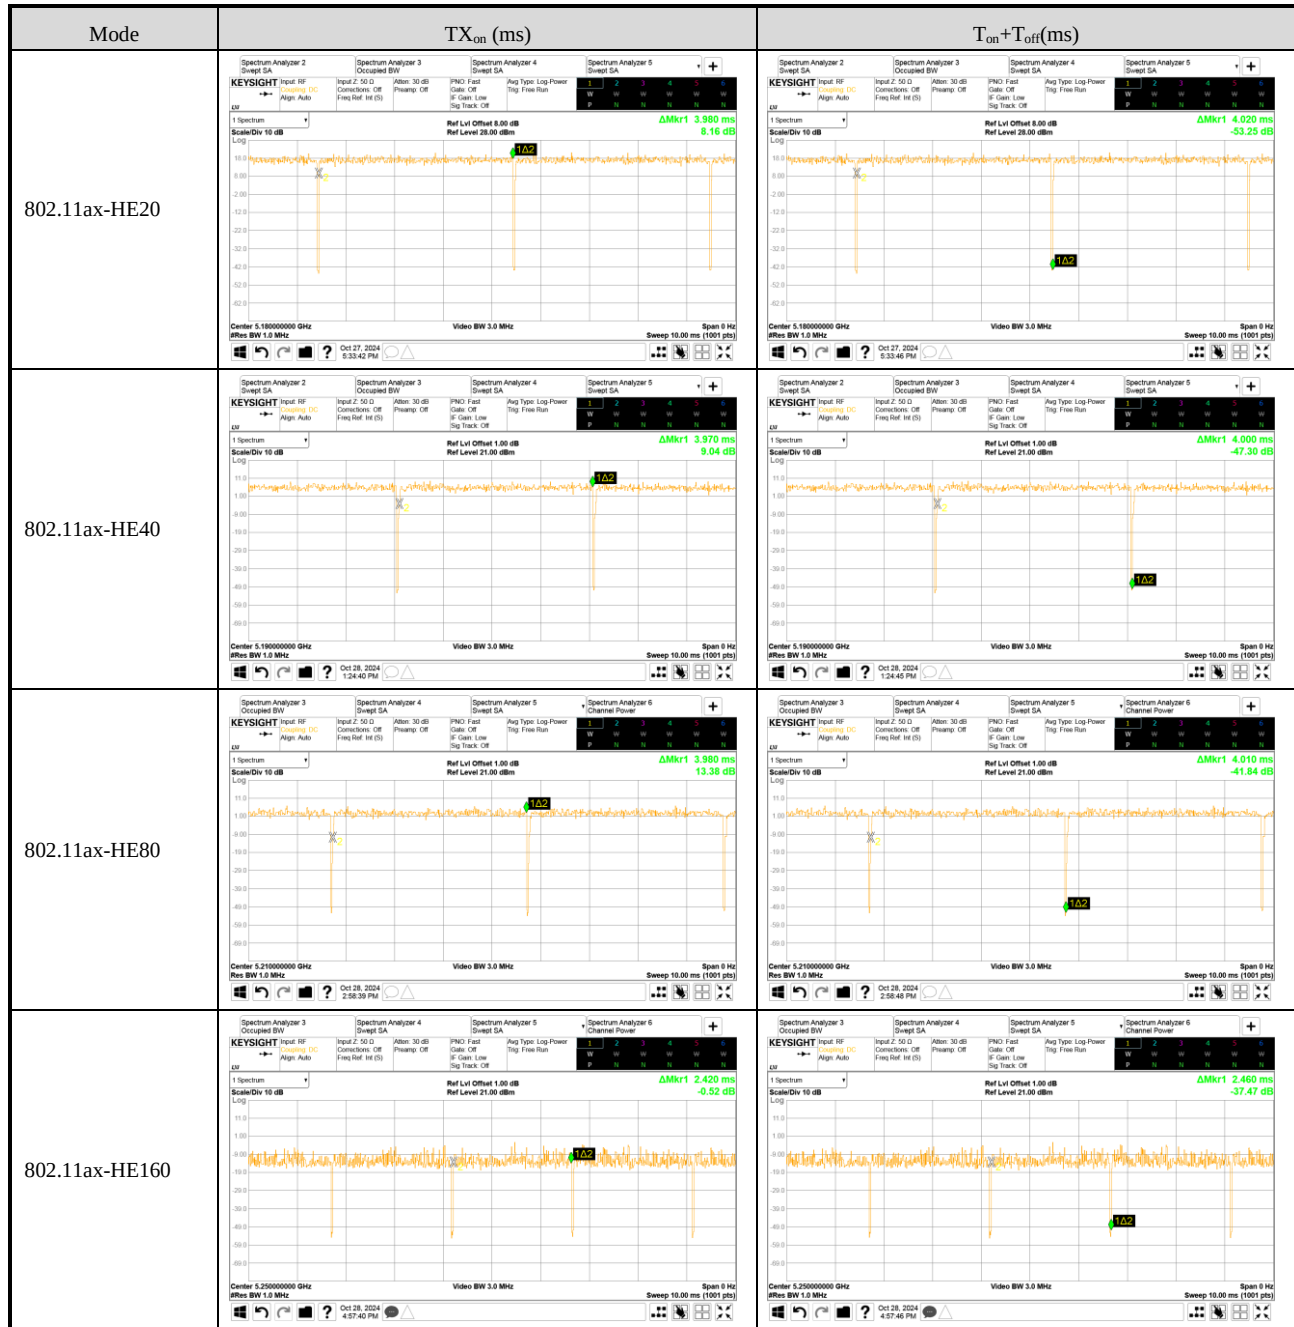

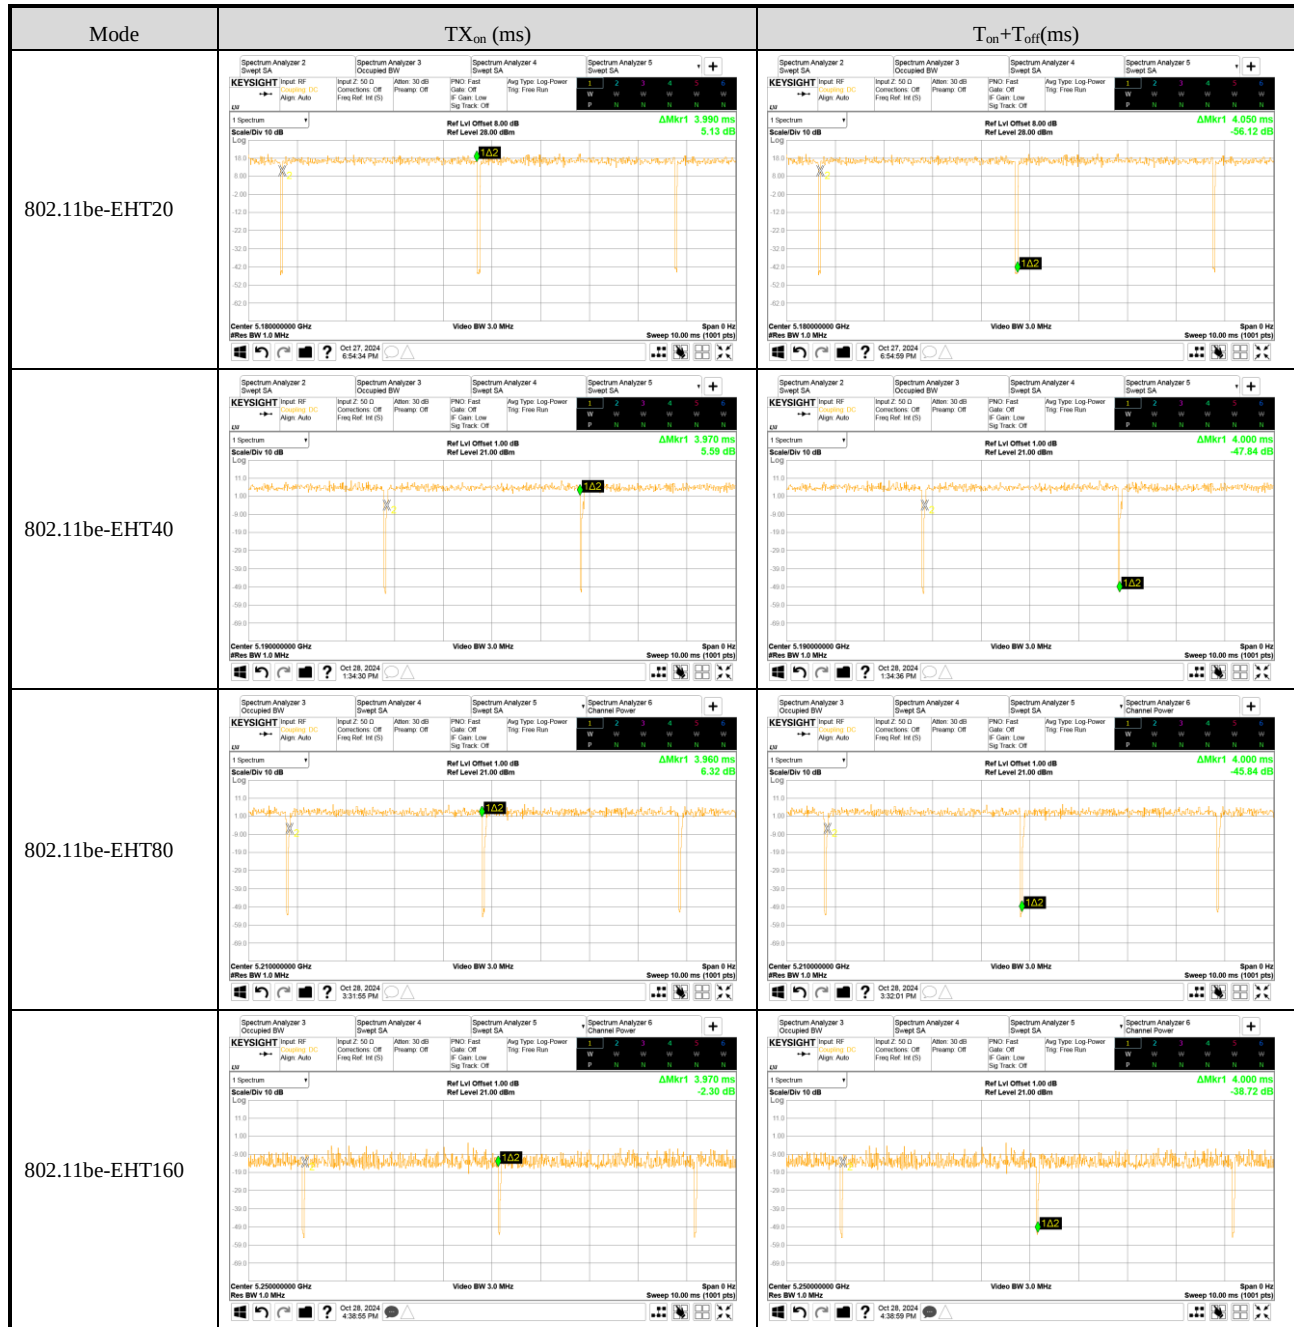



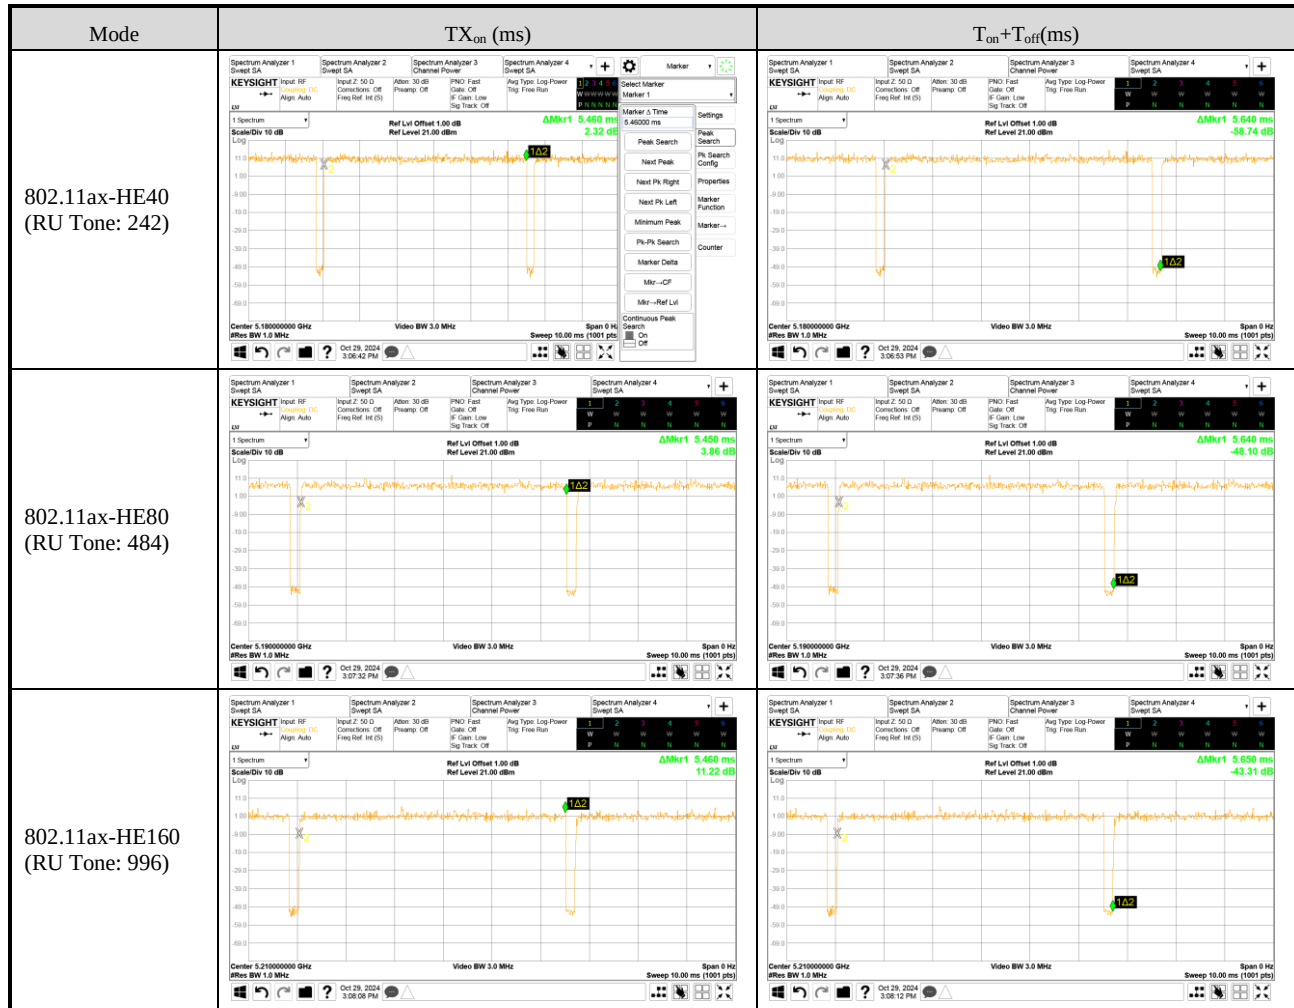



Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303



AC Conduction	
Mode	Antenna
Normal operation	INPAQ
Normal operation	LUXSHARE-ICT

Item	Antenna	Mode	Data Rate	Test Channel
Radiated Test Case	INPAQ	802.11n-HT40	EHT0	134
	LUXSHARE-ICT	802.11n-HT40	EHT0	134

Item	Antenna	Mode	Data Rate	RU Config	Test Channel
Radiated Test Case	Radiated Band Edge Note1	INPAQ	802.11a	6 Mbps	64/100/140/144
			802.11n-HT20	MCS8	64/100/140/144
			802.11n-HT40	MCS8	62/102/134/142
			802.11ac-VHT80	MCS0	58/106/122/138
			802.11ac-VHT160	MCS0	50/114
			802.11ax-HE20	HE0	64/100/140/144
			802.11ax-HE40	HE0	62/102/134/142
			802.11ax-HE80	HE0	58/106/122/138
			802.11ax-HE160	HE0	50/114
			802.11be-EHT20	EHT0	64/100/140/144
			802.11be-EHT40	EHT0	62/102/134/142
			802.11be-EHT80	EHT0	58/106/122/138
			802.11be-EHT160	EHT0	50/114
			802.11ax-HE20	HE0	26/0
				HE0	52/37
				HE0	106/53
			802.11ax-HE20	HE0	26/8
				HE0	52/40
				HE0	106/54
			802.11ax-HE40	HE0	242/61
				HE0	242/62
			802.11ax-HE80	HE0	484/65
				HE0	484/66
			802.11ax-HE160	HE0	996/67
				HE0	996/S67
			802.11be-EHT20	EHT0	26/0
				EHT0	52/37
				EHT0	106/53
			802.11be-EHT20	EHT0	26/8
				EHT0	52/40
				EHT0	106/54
			802.11be-EHT40	EHT0	242/61
				EHT0	242/62
			802.11be-EHT80	EHT0	484/65
				EHT0	484/66
			802.11be-EHT160	EHT0	996/67
				EHT0	996/S67

Item		Antenna	Mode	Data Rate	RU Config	Test Channel
Radiated Test Case	Radiated Band Edge Note1	LUXSHARE-ICT	802.11a	6 Mbps	---	64/100/140/144
			802.11n-HT20	MCS8	---	64/100/140/144
			802.11n-HT40	MCS8	---	62/102/134/142
			802.11ac-VHT80	MCS0	---	58/106/122/138
			802.11ac-VHT160	MCS0	---	50/114
			802.11ax-HE20	HE0	---	64/100/140/144
			802.11ax-HE40	HE0	---	62/102/134/142
			802.11ax-HE80	HE0	---	58/106/122/138
			802.11ax-HE160	HE0	---	50/114
			802.11be-EHT20	EHT0	---	64/100/140/144
			802.11be-EHT40	EHT0	---	62/102/134/142
			802.11be-EHT80	EHT0	---	58/106/122/138
			802.11be-EHT160	EHT0	---	50/114
			802.11ax-HE20	HE0	26/0	100
				HE0	52/37	100
				HE0	106/53	100
				HE0	26/8	64/140
				HE0	52/40	64/140
				HE0	106/54	64/140
			802.11ax-HE40	HE0	242/61	102
				HE0	242/62	62/134
			802.11ax-HE80	HE0	484/65	106
				HE0	484/66	58/122
			802.11ax-HE160	HE0	996/67	50/114
				HE0	996/S67	50/114
			802.11be-EHT20	EHT0	26/0	100
				EHT0	52/37	100
				EHT0	106/53	100
				EHT0	26/8	64/140
				EHT0	52/40	64/140
				EHT0	106/54	64/140
			802.11be-EHT40	EHT0	242/61	102
				EHT0	242/62	62/134
			802.11be-EHT80	EHT0	484/65	106
				EHT0	484/66	58/122
			802.11be-EHT160	EHT0	996/67	50/114
				EHT0	996/S67	50/114

Item		Antenna	Mode	Data Rate	RU Config	Test Channel
Radiated Test Case	Radiated Spurious Emission Note1 & 2	INPAQ	802.11a	6 Mbps	---	140/144
			802.11n-HT20	MCS8	---	140/144
			802.11n-HT40	MCS8	---	134/142
			802.11ac-VHT80	MCS0	---	106/138
			802.11ac-VHT160	MCS0	---	50/114
			802.11ax-HE20	HE0	---	140/144
			802.11ax-HE40	HE0	---	134/142
			802.11ax-HE80	HE0	---	106/138
			802.11ax-HE160	HE0	---	50/114
			802.11be-EHT20	EHT0	---	140/144
			802.11be-EHT40	EHT0	---	134/142
			802.11be-EHT80	EHT0	---	106/138
			802.11be-EHT160	EHT0	---	50/114
		LUXSHARE-ICT	802.11a	6 Mbps	---	140/144
			802.11n-HT20	MCS8	---	140/144
			802.11n-HT40	MCS8	---	134/142
			802.11ac-VHT80	MCS0	---	106/138
			802.11ac-VHT160	MCS0	---	50/114
			802.11ax-HE20	HE0	---	140/144
			802.11ax-HE40	HE0	---	134/142
			802.11ax-HE80	HE0	---	106/138
			802.11ax-HE160	HE0	---	50/114
			802.11be-EHT20	EHT0	---	140/144
			802.11be-EHT40	EHT0	---	134/142
			802.11be-EHT80	EHT0	---	106/138
			802.11be-EHT160	EHT0	---	50/114

Item		Mode	Data Rate	RU Config	Test Channel
Conducted Test Case	Emission/Occupied Bandwidth	802.11a	6 Mbps	---	52/60/64/100/116/140/144
		802.11n-HT20	MCS8	---	52/60/64/100/116/140/144
		802.11n-HT40	MCS8	---	54/62/102/110/134/142
		802.11ac-VHT20	MCS8	---	52/60/64/100/116/140/144
		802.11ac-VHT40	MCS8	---	54/62/102/110/134/142
		802.11ac-VHT80	MCS0	---	58/106/122/138
		802.11ac-VHT160	MCS0	---	50/114
		802.11ax-HE20	HE0	---	52/60/64/100/116/140/144
		802.11ax-HE40	HE0	---	54/62/102/110/134/142
		802.11ax-HE80	HE0	---	58/106/122/138
		802.11ax-HE160	HE0	---	50/114
		802.11be-EHT20	EHT0	---	52/60/64/100/116/140/144
		802.11be-EHT40	EHT0	---	54/62/102/110/134/142
		802.11be-EHT80	EHT0	---	58/106/122/138
		802.11be-EHT160	EHT0	---	50/114
		802.11ax-HE20	HE0	26/0	100
				52/37	100
				106/53	100
			HE0	26/8	140
				52/40	140
				106/54	140
		802.11ax-HE40	HE0	242/61	102
			HE0	242/62	134
		802.11ax-HE80	HE0	484/65	106
			HE0	484/66	122
		802.11ax-HE160	HE0	996/67	50/114
			HE0	996/S67	50/114
		802.11be-EHT20	EHT0	26/0	100
				52/37	100
				106/53	100
			EHT0	26/8	140
				52/40	140
				106/54	140
		802.11be-EHT40	EHT0	242/61	102
			EHT0	242/62	134
		802.11be-EHT80	EHT0	484/65	106
			EHT0	484/66	122
		802.11be-EHT160	EHT0	996/67	50/114
			EHT0	996/S67	50/114

Item		Mode	Data Rate	RU Config	Test Channel
Conducted Test Case	Maximum output power	802.11a	6 Mbps	---	52/60/64/100/116/140/144
		802.11n-HT20	MCS8	---	52/60/64/100/116/140/144
		802.11n-HT40	MCS8	---	54/62/102/110/134/142
		802.11ac-VHT20	MCS8	---	52/60/64/100/116/140/144
		802.11ac-VHT40	MCS8	---	54/62/102/110/134/142
		802.11ac-VHT80	MCS0	---	58/106/122/138
		802.11ac-VHT160	MCS0	---	50/114
		802.11ax-HE20	HE0	---	52/60/64/100/116/140/144
		802.11ax-HE40	HE0	---	54/62/102/110/134/142
		802.11ax-HE80	HE0	---	58/106/122/138
		802.11ax-HE160	HE0	---	50/114
		802.11be-EHT20	EHT0	---	52/60/64/100/116/140/144
		802.11be-EHT40	EHT0	---	54/62/102/110/134/142
		802.11be-EHT80	EHT0	---	58/106/122/138
		802.11be-EHT160	EHT0	---	50/114
		802.11ax-HE20	HE0	26/0	100
				52/37	100
				106/53	100
			HE0	26/8	140
				52/40	140
				106/54	140
		802.11ax-HE40	HE0	242/61	102
			HE0	242/62	134
		802.11ax-HE80	HE0	484/65	106
			HE0	484/66	122
		802.11ax-HE160	HE0	996/67	50/114
			HE0	996/S67	50/114
		802.11be-EHT20	EHT0	26/0	100
				52/37	100
				106/53	100
			EHT0	26/8	140
				52/40	140
				106/54	140
		802.11be-EHT40	EHT0	242/61	102
			EHT0	242/62	134
		802.11be-EHT80	EHT0	484/65	106
			EHT0	484/66	122
		802.11be-EHT160	EHT0	996/67	50/114
			EHT0	996/S67	50/114

Item	Mode	Data Rate	RU Config	Test Channel
Conducted Test Case	802.11a	6 Mbps	---	52/60/64/100/116/140/144
	802.11n-HT20	MCS8	---	52/60/64/100/116/140/144
	802.11n-HT40	MCS8	---	54/62/102/110/134/142
	802.11ac-VHT80	MCS0	---	58/106/122/138
	802.11ac-VHT160	MCS0	---	50/114
	802.11ax-HE20	HE0	---	52/60/64/100/116/140/144
	802.11ax-HE40	HE0	---	54/62/102/110/134/142
	802.11ax-HE80	HE0	---	58/106/122/138
	802.11ax-HE160	HE0	---	50/114
	802.11be-EHT20	EHT0	---	52/60/64/100/116/140/144
	802.11be-EHT40	EHT0	---	54/62/102/110/134/142
	802.11be-EHT80	EHT0	---	58/106/122/138
	802.11be-EHT160	EHT0	---	50/114
	802.11ax-HE20	HE0	26/0	100
			52/37	100
			106/53	100
		HE0	26/8	64/140
			52/40	64/140
			106/54	64/140
	802.11ax-HE40	HE0	242/61	102
		HE0	242/62	62/134
	802.11ax-HE80	HE0	484/65	106
		HE0	484/66	58/122
	802.11ax-HE160	HE0	996/67	50/114
		HE0	996/S67	50/114
	802.11be-EHT20	EHT0	26/0	100
			52/37	100
			106/53	100
		EHT0	26/8	64/140
			52/40	64/140
			106/54	64/140
	802.11be-EHT40	EHT0	242/61	102
		EHT0	242/62	62/134
	802.11be-EHT80	EHT0	484/65	106
		EHT0	484/66	58/122
	802.11be-EHT160	EHT0	996/67	50/114
		EHT0	996/S67	50/114

Note 1: ☐ Mobile Device ☒ Portable Device and 3 axis were assessed. The worst scenario for Radiated Spurious Emission as follow: ☒ Lie ☐ Side ☐ Stand

Note 2: Low, mid, and high channels were measured, only the worst channel of each modulation was presented in this report.

Note 3: The modulation and bandwidth are similar for 802.11n mode for HT20/HT40 and 802.11ac mode for VHT20/VHT40, therefore investigated worst case to representative mode in the test report.

Note 4: The data rates were selected based on preliminary testing that identified rate as the worst case for output power.

3.9. Output Power Setting

Mode	U-NII Band	Centre Frequency (MHz)	Power Setting	
			AUX	Main
802.11a	2A	5260	18.000	18.000
		5300	18.000	18.000
		5320	18.000	18.000
	2C	5500	18.000	18.000
		5580	18.000	18.000
		5700	18.000	18.000
		5720	18.000	18.000

U-NII Band	Centre Frequency (MHz)	Mode							
		802.11n-HT20		802.11ac-VHT20		802.11ax-HE20		802.11be-EHT20	
		Power Setting		Power Setting		Power Setting		Power Setting	
		AUX	Main	AUX	Main	AUX	Main	AUX	Main
2A	5260	17.500	17.500	17.500	17.500	17.500	17.500	17.500	17.500
	5300	17.500	17.500	17.500	17.500	17.500	17.500	17.500	17.500
	5320	17.500	17.500	17.500	17.500	17.500	17.500	17.500	17.500
2C	5500	17.500	17.500	17.500	17.500	17.500	17.500	17.500	17.500
	5580	17.500	17.500	17.500	17.500	17.500	17.500	17.500	17.500
	5700	17.500	17.500	17.500	17.500	17.500	17.500	17.500	17.500
	5720	18.000	18.000	18.000	18.000	18.000	18.000	18.000	18.000

U-NII Band	Centre Frequency (MHz)	Mode							
		802.11n-HT40		802.11ac-VHT40		802.11ax-HE40		802.11be-EHT40	
		Power Setting		Power Setting		Power Setting		Power Setting	
		AUX	Main	AUX	Main	AUX	Main	AUX	Main
2A	5270	17.500	17.500	17.500	17.500	17.500	17.500	17.500	17.500
	5310	17.000	17.000	17.000	17.000	17.000	17.000	17.000	17.000
2C	5510	18.000	18.000	18.000	18.000	18.000	18.000	18.000	18.000
	5550	17.500	17.500	17.500	17.500	17.500	17.500	17.500	17.500
	5670	18.000	18.000	18.000	18.000	18.000	18.000	18.000	18.000
	5710	18.000	18.000	18.000	18.000	18.000	18.000	18.000	18.000

U-NII Band	Centre Frequency (MHz)	Mode					
		802.11ac-VHT80		802.11ax-HE80		802.11be-EHT80	
		Power Setting		Power Setting		Power Setting	
		AUX	Main	AUX	Main	AUX	Main
2A	5290	17.250	17.250	17.250	17.250	17.250	17.250
2C	5530	18.000	18.000	18.000	18.000	18.000	18.000
	5610	18.000	18.000	18.000	18.000	18.000	18.000
	5690	18.000	18.000	18.000	18.000	18.000	18.000

U-NII Band	Centre Frequency (MHz)	Mode					
		802.11ac-VHT160		802.11ax-HE160		802.11be-EHT160	
		Power Setting		Power Setting		Power Setting	
		AUX	Main	AUX	Main	AUX	Main
2A	5250	15.500	15.500	15.500	15.500	15.500	15.500
2C	5570	16.500	16.500	16.500	16.500	16.500	16.500

U-NII Band	Centre Frequency (MHz)	RU Configuration	Mode			
			802.11ax-HE20		802.11be-EHT20	
			Power Setting		Power Setting	
			AUX	Main	AUX	Main
2A	5320	26/8	9.750	9.750	9.750	9.750
		52/40	12.500	12.500	12.500	12.500
		106/54	15.500	15.500	15.000	15.000
2C	5500	26/0	9.750	9.750	9.750	9.750
		52/37	12.500	12.500	12.500	12.500
		106/53	15.500	15.500	15.000	15.000
	5700	26/8	9.750	9.750	9.750	9.750
		52/40	12.500	12.500	12.500	12.500
		106/54	15.500	15.500	15.000	15.000

U-NII Band	Centre Frequency (MHz)	RU Configuration	Mode			
			802.11ax-HE40		802.11be-EHT40	
			Power Setting		Power Setting	
			AUX	Main	AUX	Main
2A	5310	242/62	16.500	16.500	16.500	16.500
2C	5510	242/61	17.500	17.500	17.500	17.500
	5670	242/62	17.500	17.500	17.500	17.500

U-NII Band	Centre Frequency (MHz)	RU Configuration	Mode			
			802.11ax-HE80		802.11be-EHT80	
			Power Setting		Power Setting	
			AUX	Main	AUX	Main
2A	5290	484/66	17.000	17.000	17.000	17.000
2C	5530	484/65	18.000	18.000	18.000	18.000
	5610	484/66	18.000	18.000	18.000	18.000

U-NII Band	Centre Frequency (MHz)	RU Configuration	Mode			
			802.11ax-HE160		802.11be-EHT160	
			Power Setting		Power Setting	
			AUX	Main	AUX	Main
2A	5250	996/67	16.000	16.000	16.000	16.000
		996/S67	15.500	15.500	15.500	15.500
2C	5570	996/67	17.750	17.750	17.750	17.750
		996/S67	17.500	17.500	17.500	17.500

3.10. Tested Supporting System List

3.10.1. Support Peripheral Unit


No.	Product	Brand	Model No.	Serial No.	Approval
1.	LCD Monitor	DELL	U2718Qb	CN-0M5R5F-QDC 00-99P-04CL	N/A
2.	USB Mouse	Lenovo	SM-8823	8SSM50L24506AV LC99H049R	N/A
3.	Earphone	APPLE	N/A	N/A	N/A
Partner System					
4.	WiFi Router	ASUS	RT-BE96U	RBIG6G200822ZT7	FCC ID: MSQ-RTBE6G00

3.10.2. Cable Lists


No.	Cable Description Of The Above Support Units
1.	HDMI Cable: Shielded, Detachable, 1.8m AC Power Cord: Unshielded, Detachable, 1.8m
2.	USB Cable: Unshielded, Undetachable, 1.8 m
3.	Earphone Cable: Unshielded, Undetachable, 1.2m
4.	AC adapter: M/N: ADD011, DC Power Cable: Unshielded, Detachable, 1.8m, Bonded two ferrite cores AC Power Cord: Unshielded, Detachable, 1.1m LAN cable: Unshielded, Detachable, 3.0m
5.	LAN cable: Unshielded, Detachable, 1.8m

3.11. Setup Configuration

3.11.1. EUT Configuration for Power Line & Radiated Emission

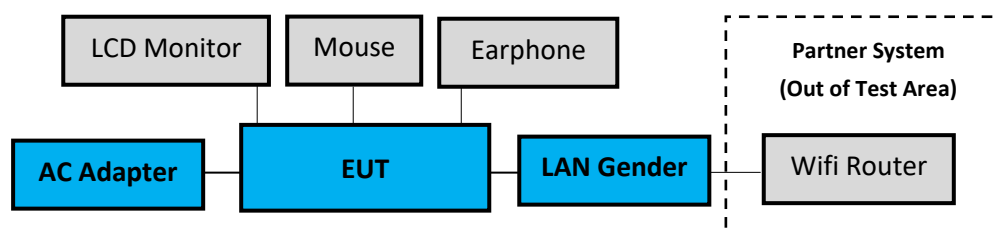

3.11.2. EUT Configuration for RF Conducted Test Items



3.12. Operating Condition of EUT

Test program “DRTU” is used for enabling EUT WLAN function under continues transmitting and choosing data rate/ channel.

[ANT AUX port (A Button in DRTU) and ANT Main port (B Button in DRTU)].

3.13. Description of Test Facility

Name of Test Firm	Audix Technology Corporation / EMC Department No. 491, Zhongfu Rd., Linkou Dist., New Taipei City 244, Taiwan Tel: +886-2-26092133 Fax: +886-2-26099303 Website : www.audixtech.com Contact e-mail: attemc_report@audixtech.com
Accreditations	The laboratory is accredited by following organizations under ISO/IEC 17025:2017 (1) NVLAP(USA) NVLAP Lab Code 200077-0 (2) TAF(Taiwan) No. 1724
Test Facilities	FCC OET Designation Number under APEC MRA by NCC is : TW1724 ISED CAB Identifier Number under APEC TEL MRA by NCC is TW1724 (1) No.8 Shielded Room (2) No.1 3m Semi Anechoic Chamber

3.14.Measurement Uncertainty

The measurement uncertainty levels have been estimated as specified in ETSI TR 100 028-2001

Test Items/Facilities			Frequency Range	Uncertainty
Conduction Test	☐	No. 7 Shielded Room	9kHz-150kHz	±3.6dB
			150kHz-30MHz	±3.3dB
	☒	No. 8 Shielded Room	9kHz-150kHz	±3.7dB
			150kHz-30MHz	±3.4dB
Radiation Test	☒	No.1 3m Semi Anechoic Chamber	30MHz-200MHz, 3m, Horizontal	±3.8dB
			200MHz-1000MHz, 3m, Horizontal	±4.2dB
			30MHz-200MHz, 3m, Vertical	±4.7dB
			200MHz-1000MHz, 3m, Vertical	±4.8dB
			1GHz-6GHz, 3m	±4.8dB
			6GHz-18GHz, 3m	±4.3dB
	☐	No.3 3m Semi Anechoic Chamber	30MHz-200MHz, 3m, Horizontal	±3.9dB
			200MHz-1000MHz, 3m, Horizontal	±4.2dB
			30MHz-200MHz, 3m, Vertical	±4.7dB
			200MHz-1000MHz, 3m, Vertical	±4.8dB
			1GHz-6GHz, 3m	±4.5dB
			6GHz-18GHz, 3m	±4.0dB
	☐	No.4 3m Semi Anechoic Chamber	30MHz-200MHz, 3m, Horizontal	±3.9dB
			200MHz-1000MHz, 3m, Horizontal	±4.3dB
			30MHz-200MHz, 3m, Vertical	±4.8dB
			200MHz-1000MHz, 3m, Vertical	±4.9dB
			1GHz-6GHz, 3m	±4.2dB
			6GHz-18GHz, 3m	±3.8dB
	☐	No.5 3m Semi Anechoic Chamber	30MHz-200MHz, 3m, Horizontal	±3.9dB
			200MHz-1000MHz, 3m, Horizontal	±4.1dB
			30MHz-200MHz, 3m, Vertical	±4.8dB
			200MHz-1000MHz, 3m, Vertical	±4.7dB
			1GHz-6GHz, 3m	±4.8dB
			6GHz-18GHz, 3m	±4.6dB
		Radiated emissions (18GHz-40GHz)		18GHz-40GHz, 3m

Remark : Uncertainty = $ku_c(y)$

Test Items	Uncertainty
Bandwidth	±0.48%
Maximum output power	±0.42dB
Power spectral density	±0.5dB

4. MEASUREMENT EQUIPMENT LIST

4.1. Conducted Emission Measurement

Item	Type	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Interval
1.	Test Receiver	R&S	ESR3	101774	2024.01.09	1 Year
2.	A.M.N.	R&S	ENV432	101567	2024.06.07	1 Year
3.	FOUR-LINE V-NETWORK	R&S	ENV432	101567	2024.06.07	1 Year
4.	Pulse Limiter	R&S	ESH3-Z2	100354	2023.12.09	1 Year
5.	Digital Thermo-Hygro Meter	iMax	HTC-1	No.8 S/R	2024.04.11	1 Year
6.	Coaxial Cable	Yeida	RG/58AU	CE-08	2024.09.04	1 Year
7.	Test Software	Audix	e3	V9 18621a	N.C.R.	N.C.R.

4.2. Radiated Emission Measurement

Item	Type	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Interval
1.	Spectrum Analyzer	Agilent	N9010A-526	MY53400071	2024.08.12	1 Year
2.	Spectrum Analyzer	Keysight	N9010B-544	MY55460198	2024.03.21	1 Year
3.	Test Receiver	R&S	ESCS30	100338	2024.06.18	1 Year
4.	Amplifier	EMCI	EMC9145	980751	2024.07.09	1 Year
5.	Amplifier	HP	8447D	2944A06305	2023.12.20	1 Year
6.	Microwave Preamplifier	Agilent	8449B	3008A02678	2024.02.20	1 Year
7.	Microwave Amplifier	Keysight	83051A	MY56480113	2024.09.11	1 Year
8.	Loop antenna	Electro-Metrics	EMCI-LPA600	287	2024.07.31	1 Year
9.	Bilog Antenna	TESEQ	CBL6112D	33821	2024.02.17	1 Year
10.	Double-Ridged Waveguide Horn	EMCO	3115	9112-3775	2024.04.30	1 Year
11.	Horn Antenna	COM-POWER	AH-840	101092	2024.01.12	1 Year
12.	5G Notch Filter	Microwave Circuits	N0452502	459775	2024.04.10	1 Year
13.	5G Notch Filter	Microwave Circuits	N0555983	504921	2024.04.10	1 Year
14.	5G Notch Filter	Microwave Circuits	N0257881	459776	2024.04.10	1 Year
15.	Coaxial Cable	MIYAZAKI	5D2W	RE-11	2024.01.05	1 Year
16.	Coaxial Cable	HUBER+SUHNER	RG223/U	RE-33	2024.03.01	1 Year
17.	Coaxial Cable	HUBER+SUHNER	SUCOFLEX 106	RE-14	2024.01.05	1 Year
18.	Coaxial Cable	HUBER+SUHNER	SUCOFLEX 102	RE-30	2024.08.20	1 Year
19.	Digital Thermo-Hygro Meter	iMax	HTC-1	No.1 3m A/C	2024.04.11	1 Year
20.	Test Software	Audix	e3	V9 18621a	N.C.R.	N.C.R.

4.3. RF Conducted Measurement

Item	Type	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Interval
1.	Spectrum Analyzer	Keysight	N9010B	MY59071380	2024.03.29	1 Year
2.	Power Meter	Anritsu	ML2495A	2127005	2023.11.21	1 Year
3.	Power Meter	Anritsu	ML2495A	2127004	2023.11.30	1 Year
4.	Power Sensor	Anritsu	MA2411B	1911360	2023.11.29	1 Year
5.	Power Sensor	Anritsu	MA2411B	1911356	2023.11.21	1 Year
6.	Digital Thermo-Hygro Meter	iMax	HTC-1	RF-03	2024.04.11	1 Year


5. CONDUCTED EMISSION

5.1. Block Diagram of Test Setup

5.1.1. Block Diagram of EUT

Indicated as section 3.10

5.1.2. Shielded Room Setup Diagram

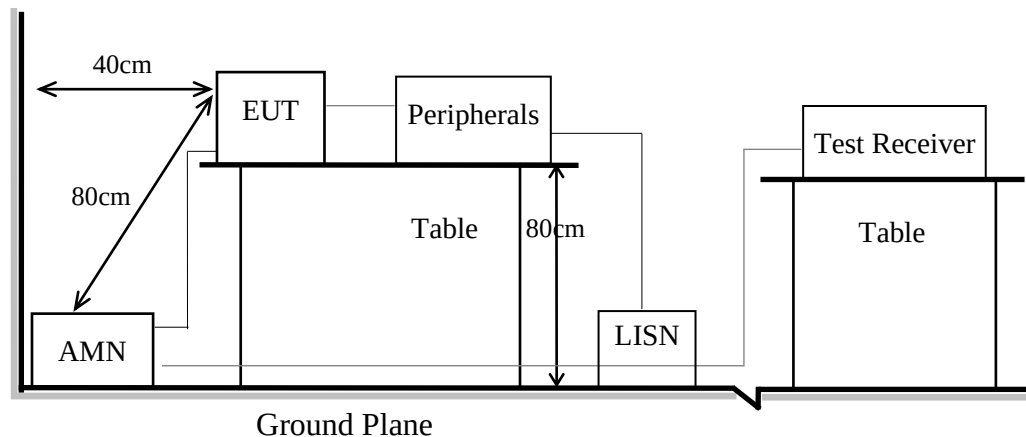

5.2. Conducted Emission Limit

Frequency	Conducted Limit	
	Quasi-Peak Level	Average Level
150kHz ~ 500kHz	66 ~ 56 dB μ V	56 ~ 46 dB μ V
500kHz ~ 5MHz	56 dB μ V	46 dB μ V
5MHz ~ 30MHz	60 dB μ V	50 dB μ V

Remark1.: If the average limit is met when using a Quasi-Peak detector, the measurement using the average detector is not required.

2.: The lower limit applies to the band edges.

5.3. Test Procedure

- 5.3.1. To set up the EUT as indicated in ANSI C63.10. The EUT was placed on the table which has 80 cm height to the ground and 40 cm distance to the conducting wall.
- 5.3.2. Power supplier of the EUT was connected to the AC mains through an Artificial Mains Network (A.M.N.).
- 5.3.3. The AC power supplies to all peripheral devices must be provided through line impedance stabilization network (L.I.S.N.)
- 5.3.4. Checking frequency range from 150kHz to 30 MHz and record the emission which does not have 20 dB below limit.

5.4. Test Results

Please refer to Appendix A.


6. RADIATED EMISSION

6.1. Block Diagram of Test Setup


6.1.1. Block Diagram of EUT

Indicated as section 3.10


6.1.2. Setup Diagram for 9kHz-30MHz

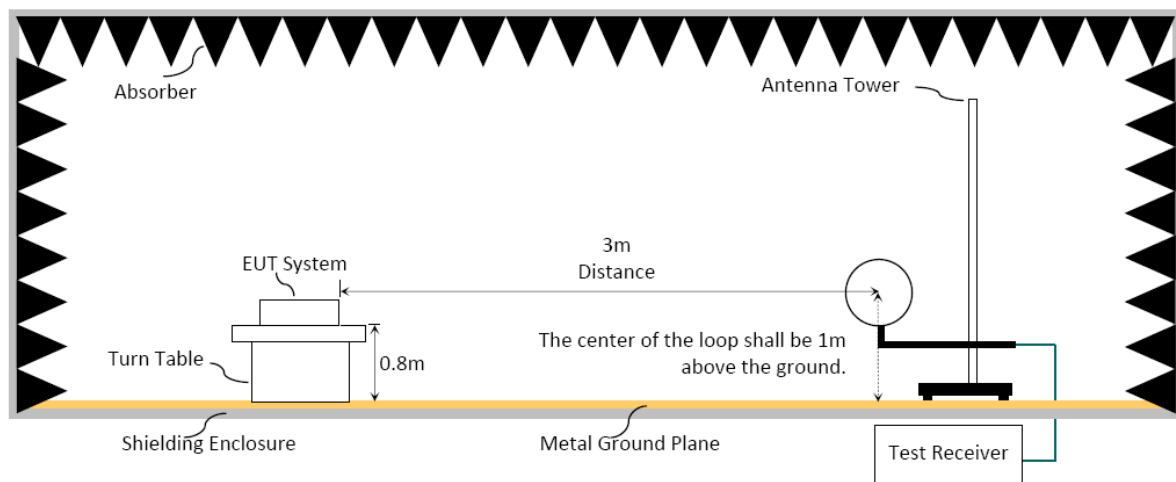

6.1.3. Setup Diagram for 30-1000MHz

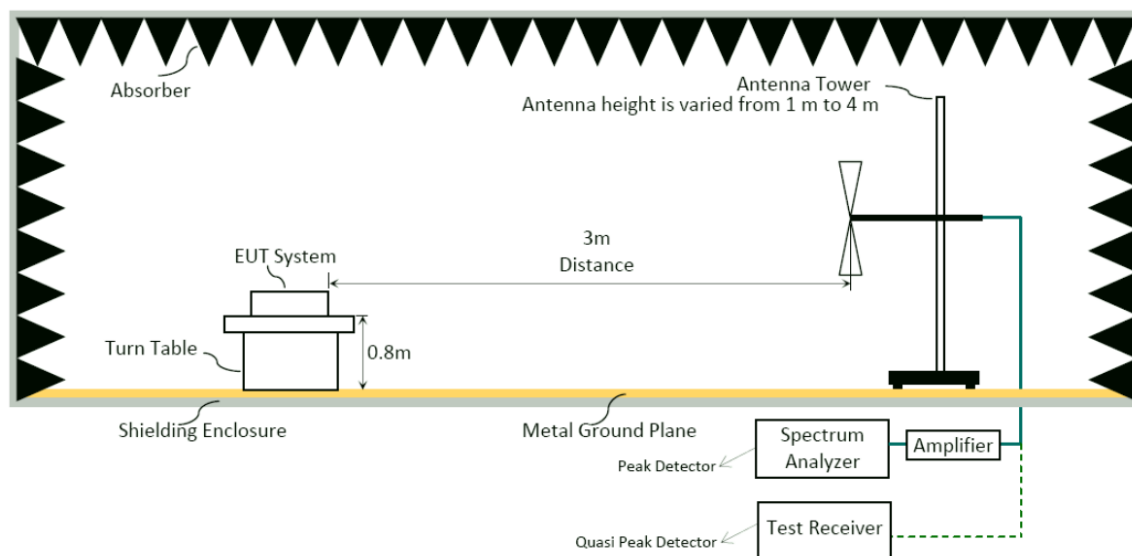

6.1.4. Setup Diagram for above 1GHz

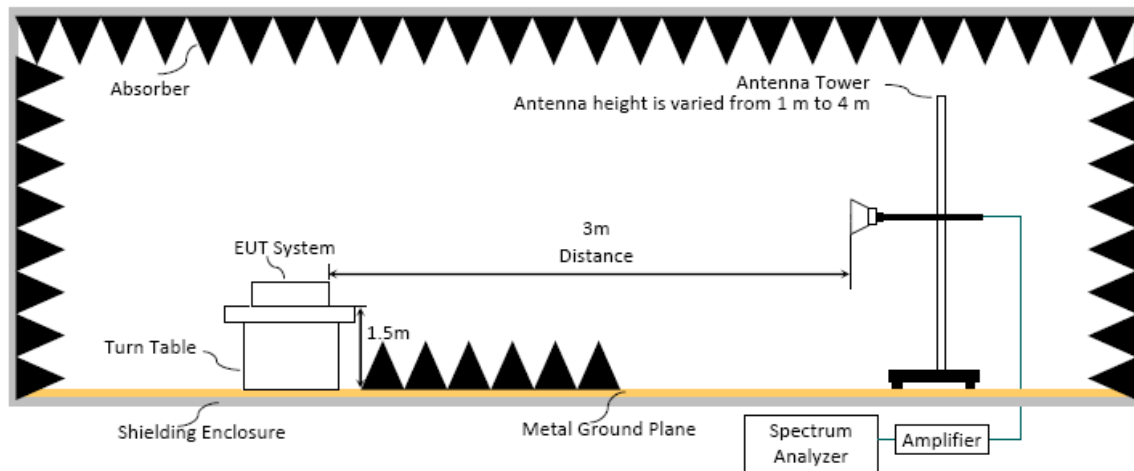

6.2. Radiated Emission Limits

Radiated emissions fall in restricted bands, as defined in Section 15.205 must be in compliance with the radiated emission limits specified in 15.209 as below.

6.2.1. General Limit

Frequency (MHz)	Distance(m)	Limits	
		dB μ V/m	μ V/m
0.009 - 0.490	300	67.6-20 log f(kHz)	2400/f kHz
0.490 - 1.705	30	87.6-20 log f(kHz)	24000/f kHz
1.705 - 30	30	29.5	30
30 - 88	3	40.0	100
88- 216	3	43.5	150
216- 960	3	46.0	200
Above 960	3	54.0	500
Above 1000	3	74.0 dB μ V/m (Peak) 54.0 dB μ V/m (Average)	

Remark : (1) dB μ V/m = 20 log (μ V/m)

(2) The tighter limit applies to the edge between two frequency bands.

(3) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

(4) Fundamental and emission fall within operation band are exempted from this section.


(5) Pursuant to ANSI C63.10: 6.6.4.3, if the maximized peak measured value complies with the average limit, then it is unnecessary to perform an average measurement.

6.2.2. Limit for non-restricted frequency above 1 GHz


Frequency Band (MHz)	E.I.R.P. Limit	Field Strength Limit at 3 m
5150 to 5250	-27 dBm	68.2 dB μ V/m
5250 to 5350		68.2 dB μ V/m
5470 to 5725		68.2 dB μ V/m

Note: Field Strength at 3 m = E.I.R.P. + 95.2 dB

Frequency Band (MHz)	Field Strength Limit at 3 m	
5725 to 5850	☒	15.407(b)(4)(i) All emissions shall be limited to a level of 68.2 dB μ V/m at 75 MHz or more above or below the band edge increasing linearly to 105.2 dB μ V/m at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 110.8 dB μ V/m at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 122.2 dB μ V/m at the band edge.
	☐	15.407(b)(4)(ii) ,compliance with the emission limits in § 15.247(d) Shall be at least 30dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power,. Attenuation below the general limits specified in §15.209(a) is not required. In addition,radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c))

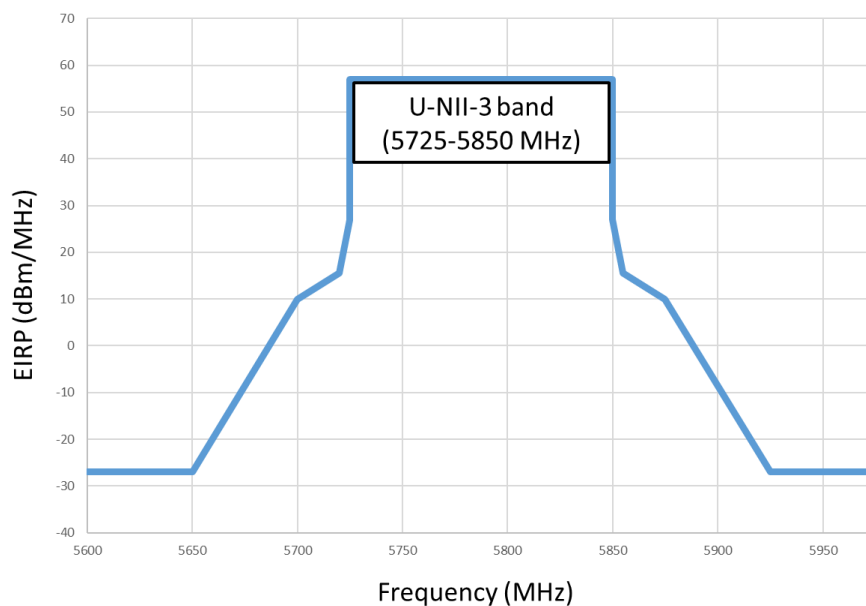

Frequency Band (MHz)	Field Strength Limit at 3 m	
5850 to 5895	☐	15.407(b)(5)(i) For an indoor access point or subordinate device, all emissions at or above 5.895 GHz shall not exceed an e.i.r.p. of 15 dBm/MHz and shall decrease linearly to an e.i.r.p. of -7 dBm/MHz at or above 5.925 GHz.
	☒	15.407(b)(5)(ii) , For a client device, all emissions at or above 5.895 GHz shall not exceed an e.i.r.p. of -5 dBm/MHz and shall decrease linearly to an e.i.r.p. of -27 dBm/MHz at or above 5.925 GHz.
	☒	15.407(b)(5)(iii) , For a client device or indoor access point or subordinate device, all emissions below 5.725 GHz shall not exceed an e.i.r.p. of -27 dBm/MHz at 5.65 GHz increasing linearly to 10 dBm/MHz at 5.7 GHz, and from 5.7 GHz increasing linearly to a level of 15.6 dBm/MHz at 5.72 GHz, and from 5.72 GHz increasing linearly to a level of 27 dBm/MHz at 5.725 GHz.

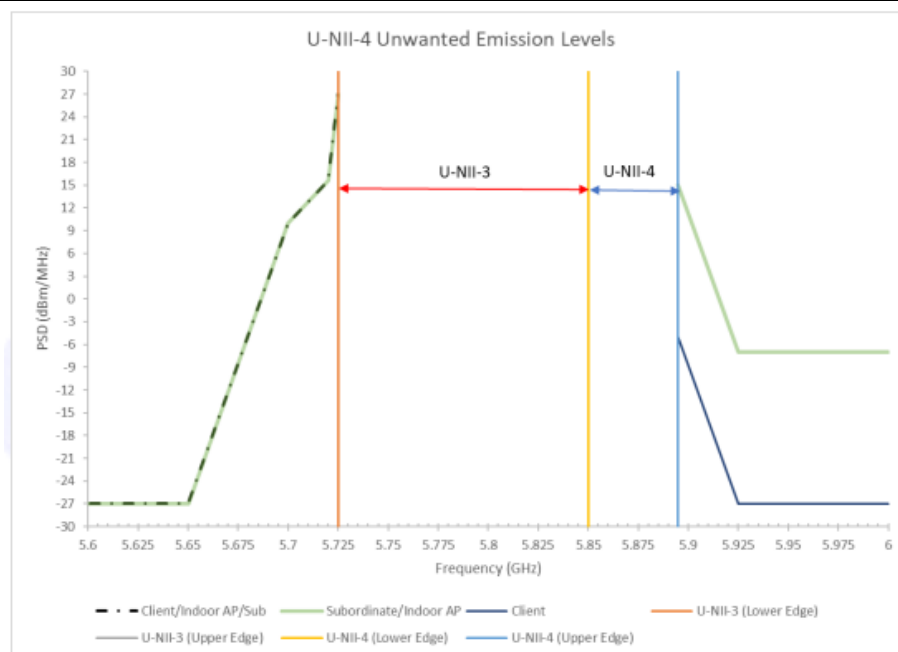

6.3. Test Procedure

Frequency Range 9kHz~30MHz:

The EUT setup on the turntable which has 0.8 m height to the ground. The turn table rotated 360 degrees and antenna fixed to 1 m to find the maximum emission level. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10-2013 regulation.

(1) RBW = 9kHz with peak and average detector.

(2) Detector: average and peak (9kHz-490kHz)

Q.P. (490kHz-30MHz)

Frequency Range 30MHz ~ 40GHz:

The EUT setup on the turn table which has 80cm (for 30-1000MHz) and 1.5m (for above 1GHz) height to the ground. The turn table rotated 360 degrees and antenna varied from 1 m to 4 m to find the maximum emission level. Both horizontal and vertical polarization are required. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10-2013 regulation.

Frequency below 1GHz:

Spectrum Analyzer is used for pre-testing with following setting:

(1) RBW = 120kHz

(2) VBW $\geq 3 \times$ RBW.

(3) Detector = Peak.

(4) Sweep time = auto.

(5) Trace mode = max hold.

(6) Allow sweeps to continue until the trace stabilizes.

Note 1: When peak-detected value is lower than limit that the measurement using the Q.P. detector is not required, otherwise using Q.P. for final measurement.

Note 2: When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds.

Frequency above 1GHz to 10th harmonic(up to 40 GHz):

Peak Detector:

(1) RBW = 1MHz

(2) VBW $\geq 3 \times$ RBW.

(3) Detector = Peak.

(4) Sweep time = auto.

(5) Trace mode = max hold.

(6) Allow sweeps to continue until the trace stabilizes.

Note: When peak-detected value is lower than limit that the measurement using the average detector is not required, otherwise using average detector for final measurement.

Average Detector:☒ **Option 1:**

(1) RBW = 1MHz

(2) VBW $\geq 1/T$. (Duty Cycle < 98%, when duty cycle presented in section 3.7)

Mode	RU Tone	VBW Setting
802.11ax-HE20	26	200Hz
	52	200Hz
	106	200Hz
802.11ax-HE40	242	200Hz
802.11ax-HE80	484	200Hz
802.11ax-HE160	996	200Hz
802.11be-EHT20	26	200Hz
	52	200Hz
	106	200Hz
802.11be-EHT40	242	200Hz
802.11be-EHT80	484	200Hz
802.11be-EHT160	996	200Hz

(3) VBW = set $VBW \leq RBW / 100$, but not less than 10Hz (Duty Cycle $\geq 98\%$, when duty cycle presented in section 3.7)

Mode	VBW Setting
802.11a	10Hz
802.11n-HT20	10Hz
802.11n-HT40	10Hz
802.11ac-VHT20	10Hz
802.11ac-VHT40	10Hz
802.11ac-VHT80	10Hz
802.11ac-VHT160	10Hz
802.11ax-HE20	10Hz
802.11ax-HE40	10Hz
802.11ax-HE80	10Hz
802.11ax-HE160	10Hz
802.11be-EHT20	10Hz
802.11be-EHT40	10Hz
802.11be-EHT80	10Hz
802.11be-EHT160	10Hz

(4) Detector = Peak.

(5) Sweep time = auto.

(6) Trace mode = max hold.

(7) Allow sweeps to continue until the trace stabilizes.

☐ **Option 2:**Average Emission Level(dB μ V/m) = Peak Emission Level(dB μ V/m) + DCCF(dB).

6.4. Measurement Result Explanation


- Peak Emission Level(dB μ V/m)=Antenna Factor(dB/m) + Cable Loss (dB)– Preamp Gain (dB)+ Reading(dB μ V).
- Average Emission Level(dB μ V/m)= Antenna Factor(dB/m) + Cable Loss (dB)– Preamp Gain (dB)+ Reading(dB μ V).
- ☐ Average Emission Level(dB μ V/m)= Peak Emission Level(dB μ V/m)+ DCCF(dB)
Duty Cycle Correction Factor (DCCF)(dB)= 20log(TX_{on}/TX_{on+off}) presented in section 3.7.
- ☐ ERP(dBm)= Peak Emission Level(dB μ V/m) -95.2dB-2.14dB

6.5. Test Results

Please refer to Appendix A.

7. EMISSION/OCCUPIED BANDWIDTH

7.1. Block Diagram of Test Setup

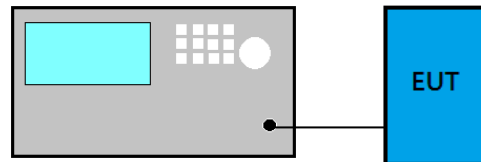

7.2. Specification Limits

Frequency Band (MHz)	Limit
5150 to 5250	Reference only
5250 to 5350	
5470 to 5725	
5725 to 5895	$\geq 500\text{kHz}$

7.3. Test Procedure

Following measurement procedure is reference to KDB 789033 D02 General UNII Test Procedures New Rules v02r01:

For Emission Bandwidth

- Applicable to all bands except to 5725 MHz- 5895 MHz

- (1) Set RBW = 1% of the emission bandwidth
- (2) Set VBW > RBW
- (3) Detector = Peak
- (4) Trace mode = max hold
- (5) Setting channel bandwidth function x dB to -26 dB to record the final bandwidth.

- Minimum Emission Bandwidth for the band 5725 MHz –5895 MHz.

- (1) Set RBW = 100 kHz.
- (2) Set the video bandwidth (VBW) $\geq 3 \times \text{RBW}$.
- (3) Detector = Peak.
- (4) Trace mode = max hold.
- (5) Sweep = auto couple.
- (6) Allow the trace to stabilize.
- (7) Setting channel bandwidth function x dB to -6 dB to record the final bandwidth.

For 99% Occupied Bandwidth


- (1) Set Span range 1.5~5 times the OBW
- (2) Set RBW close to 1% to 5% of OBW.
- (3) Set $VBW \geq 3 \times RBW$.
- (4) Detector = Peak.
- (5) Trace mode = Max hold
- (6) Sweep = Auto couple.
- (7) Allow the trace to stabilize.

7.4. Test Results


Please refer to Appendix A

8. MAXIMUM OUTPUT POWER

8.1. Block Diagram of Test Setup

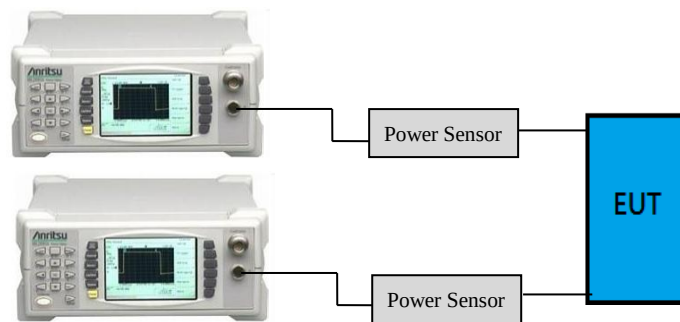

- For 802.11ac-VHT80/160, 802.11ax-HE80/160, 802.11be-EHT80/160 modes only

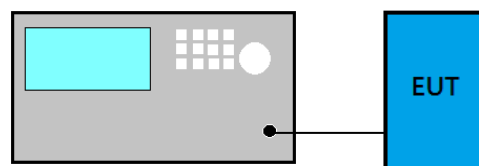

8.2. Specification Limits

Frequency Band (MHz)	Category	Limit
5150 to 5250	Outdoor Access Point	1 W(30 dBm)/ Max e.i.r.p. ≤ 125 mW(21 dBm) at any elevation angle above 30 degrees as measured from the horizon
	Fixed point-to-point Access Point	1 W(30 dBm)
	Indoor Access Point	1 W(30 dBm)
	Mobile and Portable client device	250 mW(24 dBm)
5250 to 5350	N/A	250 mW or $11 \text{ dBm} + 10 \log B$ ^{Note1}
5470 to 5725		250 mW or $11 \text{ dBm} + 10 \log B$ ^{Note1}
5725 to 5850	N/A	1 W(30 dBm)
5850 to 5895	indoor access point	4 W (36 dBm) (e.i.r.p.)
	client devices	1 W (30 dBm) (e.i.r.p.)
	subordinate device	4 W (36 dBm) (e.i.r.p.)

Note 1: B is the 26 dB emission bandwidth, which presented in section 7 and appendix A.1.

8.3. Test Procedure

Following measurement procedure is reference to KDB 789033 D02 General UNII Test Procedures New Rules v02r01:

■ **Method AVGPM (Measurement using an RF average power meter):**

EUT is connected to power sensor and record the maximum average output power and duty cycle factor is added when duty cycle presented in section 3.7 is < 98%.

■ **Method AVGSA-2 (Spectrum channel power) for 802.11ac-VHT80/160, 802.11ax-HE80/160 modes only**


- (1) Set span to at least 1.5 times the OBW
- (2) Set RBW = 1 MHz
- (3) Set the video bandwidth (VBW) ≥ 3 MHz.
- (4) Detector = RMS.
- (5) Trace mode = trace average at least 100 traces
- (6) Sweep = auto couple.
- (7) Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function with band limits set equal to the OBW band edges.
- (8) Duty cycle factor is added when duty cycle presented in section 3.7 is < 98%.

8.4. Test Results

Please refer to Appendix A

9. POWER SPECTRAL DENSITY

9.1. Block Diagram of Test Setup

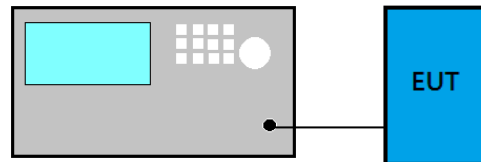

9.2. Specification Limits

Frequency Band (MHz)	Category	Limit
5150 to 5250	Outdoor Access Point	17dBm/MHz
	Fixed point-to-point Access Point	
	Indoor Access Point	
	Mobile and Portable client device	11 dBm/MHz
5250 to 5350	N/A	11 dBm/MHz
5470 to 5725		11 dBm/MHz
5725 to 5850		30 dBm/500kHz
5850 to 5895	indoor access point	20dBm/MHz(e.i.r.p.)
	client devices	14dBm/MHz(e.i.r.p.)
	subordinate device	20dBm/MHz(e.i.r.p.)

9.3. Test Procedure

Following measurement procedure is reference to KDB 789033 D02 General UNII Test Procedures New Rules v02r01:

■ Method AVGSA-2


- (1) Set span to encompass the EBW (or 99% OBW) of the signal.
- (2) Set RBW = 1 MHz (Applicable to all bands except to 5725 MHz- 5850 MHz)/
Set RBW=100 KHz(when EUT operate at 5725 MHz- 5850 MHz)
- (3) Set the video bandwidth (VBW) ≥ 3 RBW.
- (4) Detector = RMS.
- (5) Trace mode = trace average at least 100 traces
- (6) Sweep = auto couple.
- (7) Use peak search function to find out the maximum power density.
- (8) Duty cycle factor is added when duty cycle presented in section 3.7 is $< 98\%$.
- (9) Offset BWCF (7dB) when EUT operate at 5725 MHz – 5850 MHz.

9.4. Test Results

Please refer to Appendix A

10. FREQUENCY STABILITY

10.1. Block Diagram of Test Setup

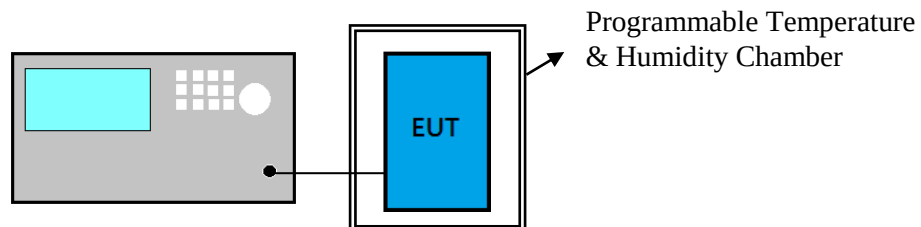

10.2. Specification Limits

NONE

10.3. Test Procedure

- (1) Frequency: Test frequency.
- (2) Span: enough to cover the complete power envelope
- (3) RBW: 1MHz(modulation ON) ; 10KHz(CW)
- (4) VBW: 1MHz(modulation ON) ; 10KHz(CW)
- (5) Detector Mode: Positive Peak
- (6) Indication mode: Max hold
- (7) Find the peak frequency and take calculate by the formula:
(Measurement Value-declaration frequency)/ declaration frequency)

10.4. Test Results

Please refer to Appendix A



11.DEVIATION TO TEST SPECIFICATIONS

【NONE】



Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

APPENDIX A

TEST DATA AND PLOTS

(Model: 16Z90T)



Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

APPENDIX B

TEST PHOTOGRAPHS

(Model: 16Z90T)