

Specific Absorption Rate (SAR) Test Report
for
Mitsubishi Wireless (MCTC)
on the
TDMA/AMPS Cellular Phone
Model: T300

Test Report: 20129251
Date of Report: May 25, 2000



NVLAP Laboratory Code 200201-0
Accredited for testing to FCC Parts 15

Tested by:	Xi-Ming Yang	
Reviewed by:	David Chernomordik	

All services undertaken are subject to the following general policy: Reports are submitted for exclusive use of the client to whom they are addressed. Their significance is subject to the adequacy and representative character of the samples and to the comprehensiveness of the tests, examinations or surveys made. This report shall not be reproduced except in full, without written consent of Intertek Testing Services, NA Inc. This report must not be used to claim product endorsement by NVLAP, NIST nor any other agency of the U.S. Government.

Table of Contents

1	Job Description	3
1.1	Client Information	3
1.2	Equipment under test (EUT)	3
1.3	Test plan reference.....	4
1.4	System test configuration.....	4
1.4.1	System block diagram & Support equipment.....	4
1.4.2	Test Position.....	5
1.4.3	Test Condition	5
1.5	Modifications required for compliance.....	6
1.6	Additions, deviations and exclusions from standards	6
2	SAR Evaluation.....	7
2.1	SAR Limits.....	7
2.2	Configuration Photographs	8
2.3	System Verification	17
2.4	Evaluation Procedures	17
2.5	Test Results	18
3.0	Equipment	22
3.1	Equipment List	22
3.2	Brain Tissue Simulating Liquid.....	23
3.3	E-Field Probe Calibration.....	23
3.4	Measurement Uncertainty	24
3.5	Measurement Traceability	24
4.0	Warning Label Information - USA.....	25
5.0	References.....	26
	APPENDIX A - SAR Evaluation Data.....	27
	APPENDIX B - E-Field Probe Calibration Data.....	57

1 JOB DESCRIPTION**1.1 Client Information**

The EUT has been tested at the request of

Company: Mitsubishi Wireless (MCTC)

Name of contact: Kelley McKown

US Telephone: 858-535-8836

US Fax: 858-535-8801

1.2 Equipment under test (EUT)**Product Descriptions:**

Equipment	AMPS/TDMA Cellular Radio Telephone		
Trade Name	Mitsubishi	Model No.	T300
FCC ID	XXXT300	S/N No.	Not Labeled
Category	Portable	RF Exposure	Uncontrolled Environment
Frequency Band (uplink)	AMPS, 824-849 MHz TDMA: 1850-1910 MHz	System	AMPS TDMA

EUT Antenna Description			
Type	Monopole	Configuration	Fixed
Dimensions	22 mm (L)	Gain	0
Location	Right, Top		

Use of Product : Voice communications

Manufacturer: SAME as above.

Production is planned: Yes, No

EUT receive date: 5/8/00


EUT received condition: Good condition prototype

Test start date: 5/8/00

Test end date: 5/10/00

1.3 Test plan reference**FCC rule part 2.1093, FCC Docket 96-326 & Supplement C to OET Bulletin 65****1.4 System test configuration****1.4.1 System block diagram & Support equipment**

The diagram shown below details test configuration of the equipment under test .



S:	Shielded	U:	Unshielded	F:	With Ferrite Core
Support equipment					
Equip. #	Equipment	Manufacturer	Model #	S/N #	FCC ID
None	-	-	-	-	-

1.4.2 Test Position

The EUT was configured for testing in a typical fashion (as a customer would normally use it), and in the confines as outlined in C95.1 (1992) and Supplement C of OET 65 (1998). The EUT was placed in the intended use position, i.e. CENELEC 80° position. This position is defined by a reference plane and a line. The reference plane of the head is given by three points, the auditory canal opening of both ears and center of the closed mouth. The reference line of the EUT is defined by the line which connects the center of the ear piece with the center of the bottom of the case and lies on the surface of the case facing the phantom. The reference line of the EUT lies in the reference plane of the head. The center of the ear piece of the EUT is place at the entry of the auditory canal. The angle between the reference line of the phone and the line connecting both auditory canal openings is 80°. Please refer to figure 1 below for the position details:

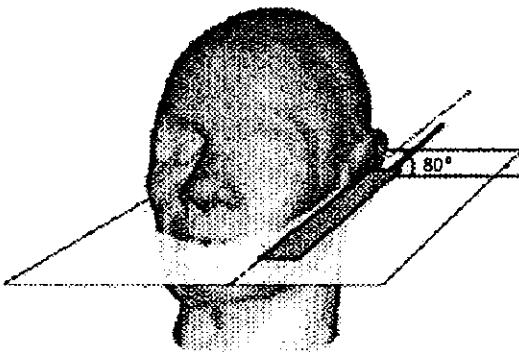


Figure 1: Intended use position

1.4.3 Test Condition

During tests, the worst case data (max. RF coupling) was determined with following conditions:

EUT Antenna	Extended	Orientation	N/A
Usage	Left-Hand and Right -Hand	Distance between antenna axis at the joint and the liquid surface:	18.4 mm
Simulating human hand	Not Used	EUT Battery	Fully Charged
Power output	25.2dBm on antenna port in AMPS mode, 27.5 on antenna port in TDMA mode		

The spatial peak SAR values were accessed for lowest, middle and highest operating channels defined by the manufacturer. Tests were performed at AMPS mode and TDMA mode.

Antenna port power measurement was performed, with the HP 435A power meter, before and after the SAR tests to ensure that the EUT operated at the highest power level.

1.5 Modifications required for compliance

No modifications were implemented by Intertek Testing Services.

1.6 Additions, deviations and exclusions from standards

No additions, deviations or exclusions have been made from standard.

2 SAR EVALUATION


2.1 SAR Limits

The following FCC limits for SAR apply to devices operate in General Population/Uncontrolled Exposure environment:

EXPOSURE (General Population/Uncontrolled Exposure environment)	SAR (W/kg)
Average over the whole body	0.08
Spatial Peak (1g)	1.60
Spatial Peak for hands, wrists, feet and ankles (10g)	4.00

2.2 Configuration Photographs

Worst-Case SAR measurement

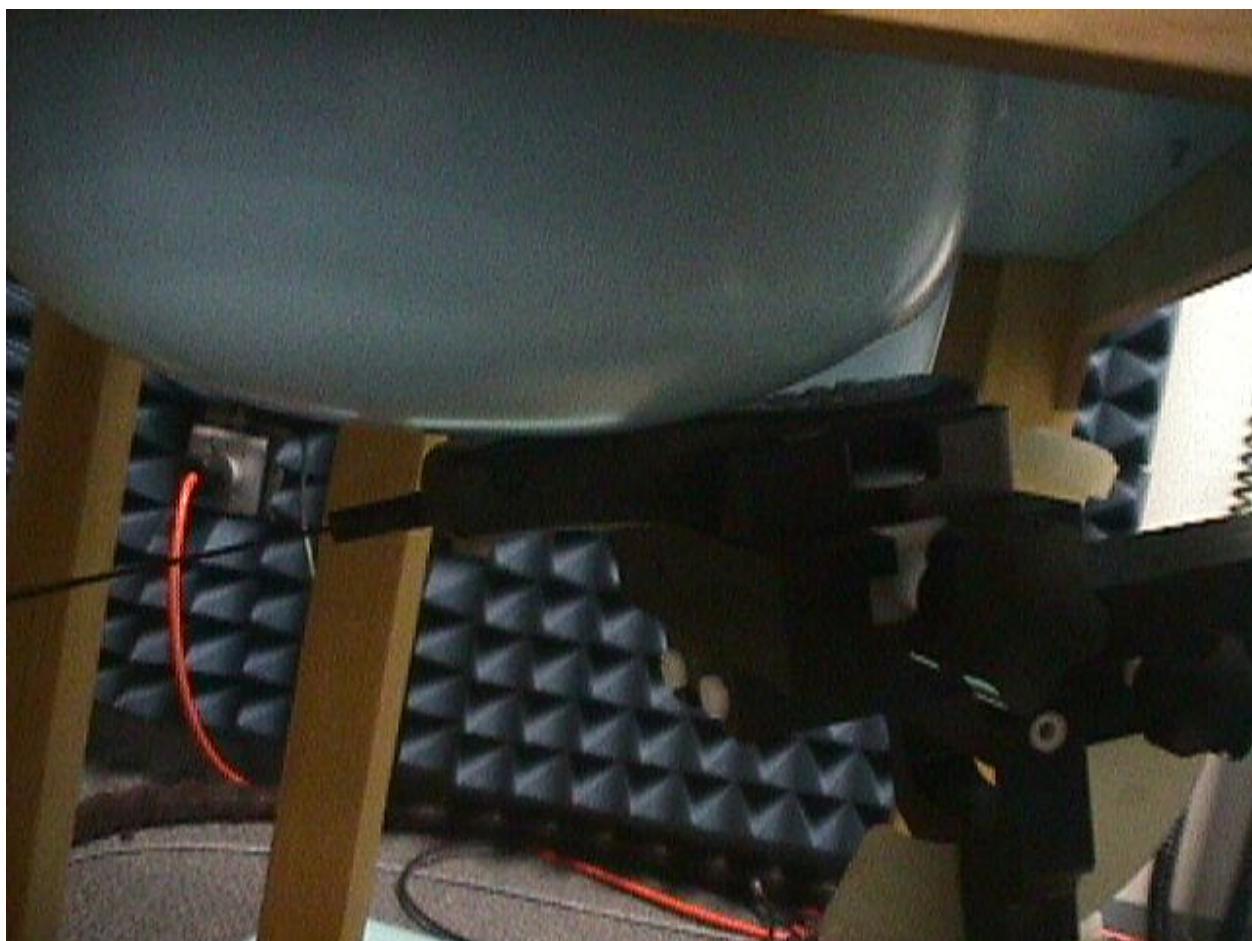

2.2 Configuration Photographs – Continued

Worst-Case SAR Measurement




2.2 Configuration Photographs – Continued

Worst-Case SAR Measurement




2.2 Configuration Photographs – Continued

Worst-Case SAR Measurement

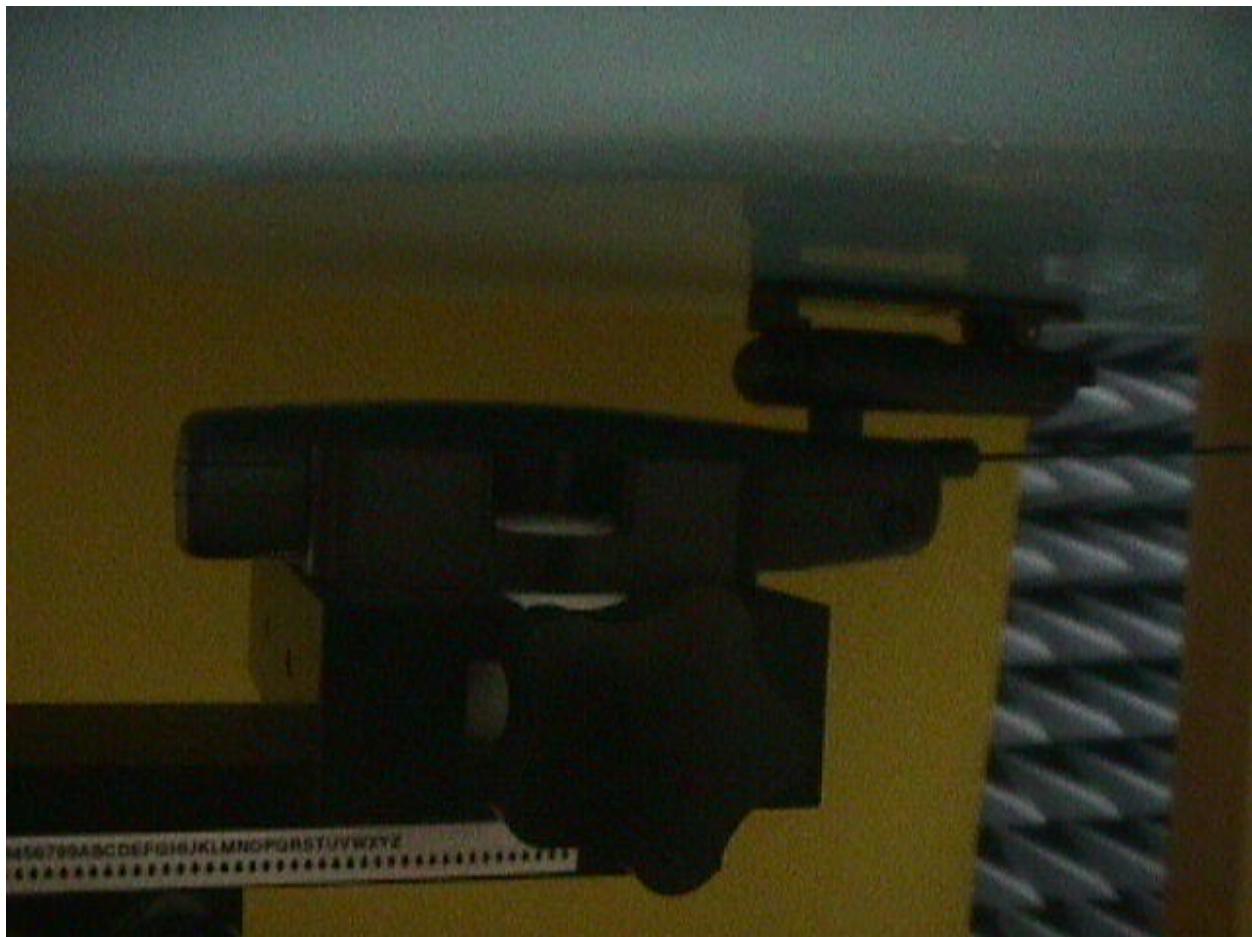

2.2 Configuration Photographs – Continued

Worst-Case SAR Measurement

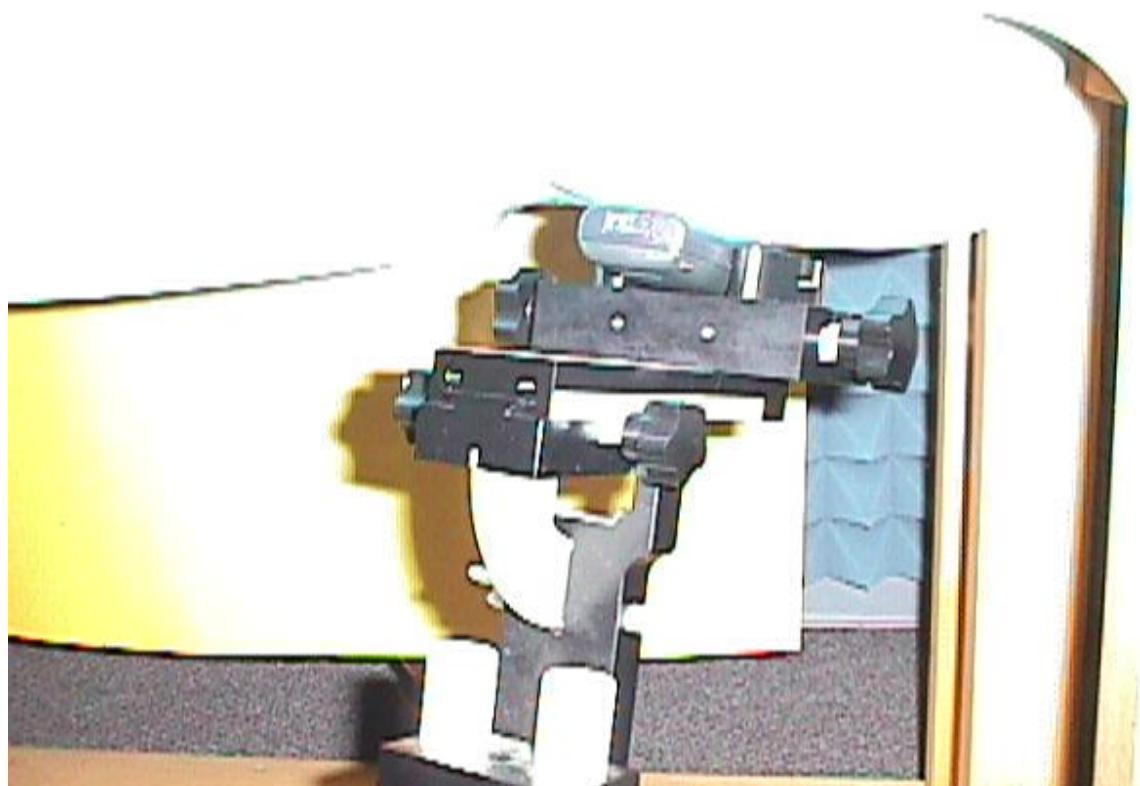

2.2 Configuration Photographs – Continued

Worst-Case SAR Measurement




2.2 Configuration Photographs – Continued

Worst-Case SAR Measurement




2.2 Configuration Photographs – Continued

Worst-Case SAR Measurement

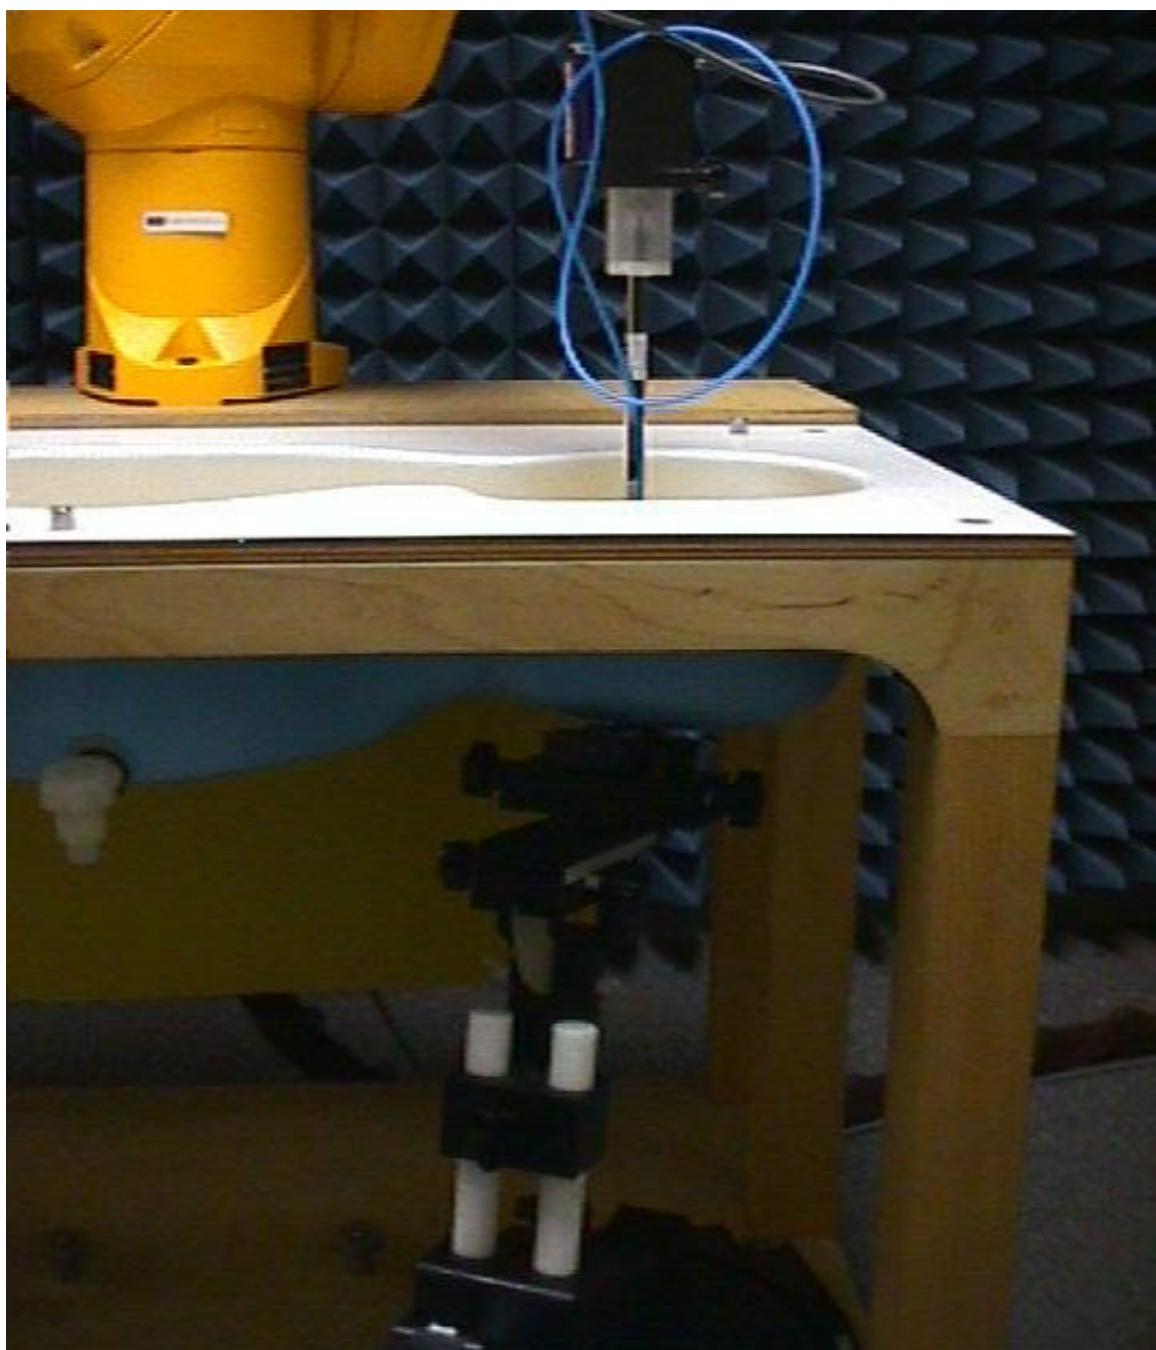

2.2 Configuration Photographs – Continued

Worst-Case SAR Measurement

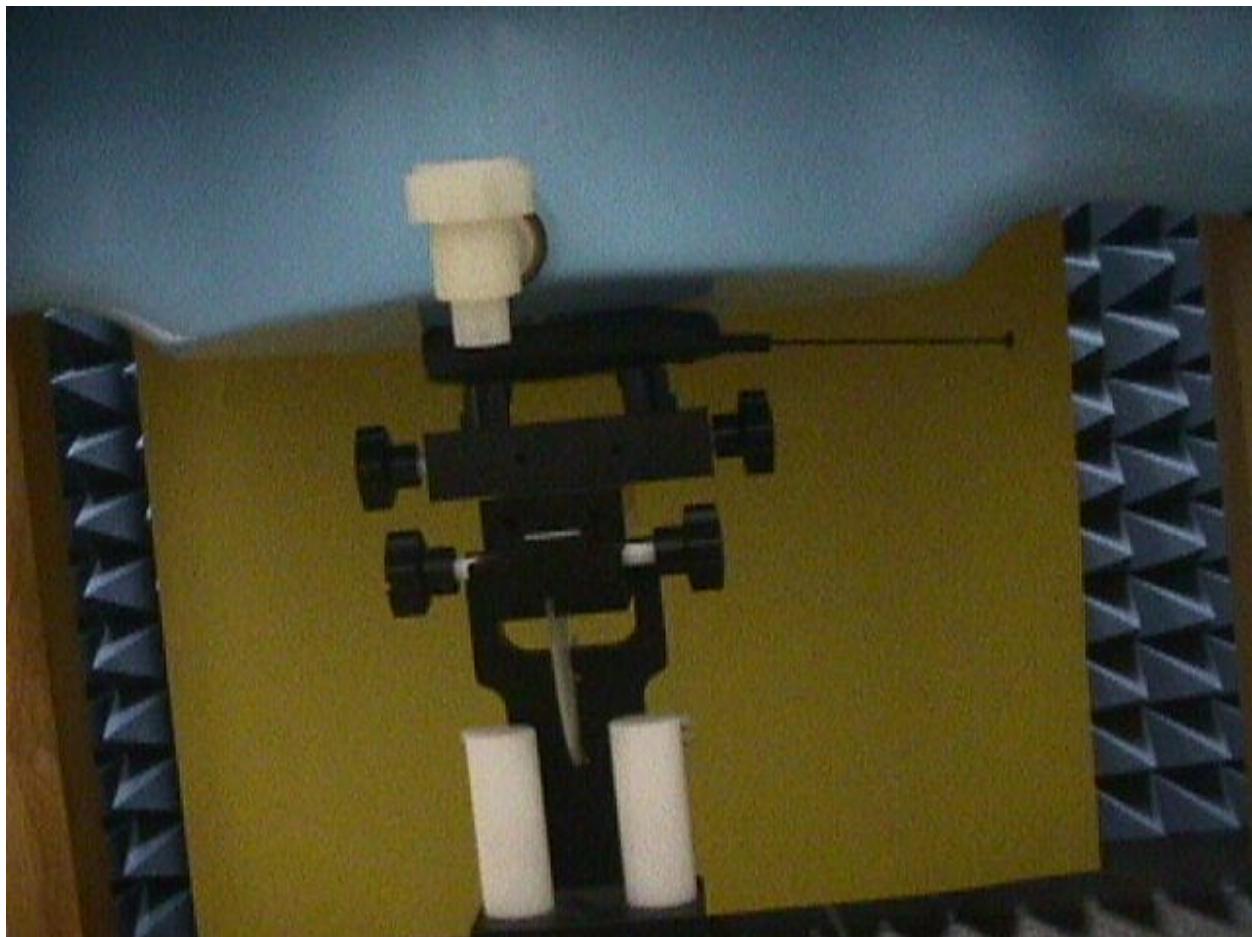

2.3 System Verification

Prior to the assessment, the system was verified to the $\pm 5\%$ of the specifications by using the system validation kit. The validation was performed at 900 MHz.

Validation kit	Targeted SAR _{1g} (mW/g)	Measured SAR _{1g} (mW/g)
D900V2, S/N #: 013	3.92	3.86

2.4 Evaluation Procedures

The SAR evaluation was performed with the following procedures:

- a. SAR was measured at a fixed location above the ear point and used as a reference value for the assessing the power drop.
- b. The SAR distribution at the exposed side of the head was measured at a distance of 4.0 mm from the inner surface of the shell. The area covered the entire dimension of the head and the horizontal grid spacing was 20 mm x 20 mm. Based on this data, the area of the maximum absorption was determined by spline interpolation.
- c. Around this point, a volume of 32 mm x 32 mm x 34 mm was assessed by measuring 5 x 5 x 7 points. On the basis of this data set, the spatial peak SAR value was evaluated with the following procedure:
 - I) The data at the surface were extrapolated, since the center of the dipoles is 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measurement point is 1.6 mm. The extrapolation was based on a least square algorithm. A polynomial of the fourth order was calculated through the points in Z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip.
 - ii) The maximum interpolated value was searched with a straight-forward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1g or 10g) were computed using the 3-D spline interpolation algorithm. The 3-D spline is composed of three one-dimensional splines with the "Not a knot" condition (in x, y and z directions). The volume was integrated with the trapezoidal algorithm. 1000 points (10 x 10 x 10) were interpolated to calculate the average.
 - iii) All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.
- d. Re-measurement of the SAR value at the same location as in step a. above. If the value changed by more than 5 %, the evaluation was repeated.

2.5 Test Results

The results on the following page(s) were obtained when the device was tested in the condition described in this report. Detail measurement data and plots which reveal information about the location of the maximum SAR with respect to the device, are reported in Appendix A.

Trade Name:	Mitsubishi Wireless	Model No.:	T300
Serial No.:	Not Labeled	Test Engineer:	Xi-Ming Yang

TEST CONDITIONS

Ambient Temperature	23 °C	Relative Humidity	55 %
Test Signal Source	Test Mode	Signal Modulation	CW
Output Power Before SAR Test	25.2 dBm (AMPS)	Output Power After SAR Test	25.2 dBm (AMPS)
Output Power Before SAR Test	27.5 dBm (TDMA, Cellular)	Output Power After SAR Test	29.5 dBm (TDMA, Cellular)
Output Power Before SAR Test	26.5 dBm (TDMA, PCS)	Output Power After SAR Test	26.8 dBm (TDMA, PCS)
Test Duration	23 Min.	Number of Battery Change	Every Scan

EUT Position: Left Hand, 2 Points Touching Phantom

Channel MHz	Operating Mode	Duty Cycle ratio	Antenna Position	Measured SAR _{1g} (mW/g)	Plot Number
849	AMPS	1	Extended	1.22	1
849	AMPS	1	IN	1.30	2
836	AMPS	1	Extended	1.15	3
836	AMPS	1	IN	1.17	4

EUT Position: Left Hand, 2 Points Touching Phantom

Channel MHz	Operating Mode	Duty Cycle ratio	Antenna Position	Measured SAR _{1g} (mW/g)	Plot Number
824	AMPS	1	Extended	1.27	5
824	AMPS	1	IN	1.26	6

EUT Position: Left Hand, 80°

Channel MHz	Operating Mode	Duty Cycle ratio	Antenna Position	Measured SAR _{1g} (mW/g)	Plot Number
849	AMPS	1	Extended	0.99	7
849	AMPS	1	IN	0.98	8
836	AMPS	1	Extended	1.14	9
836	AMPS	1	IN	1.26	10

EUT Position: Body SAR

Channel MHz	Operating Mode	Duty Cycle ratio	Antenna Position	Measured SAR _{1g} (mW/g)	Plot Number
824	AMPS	1	Extended	0.41	11
824	AMPS	1	IN	0.43	12
836	AMPS	1	Extended	0.42	13
836	AMPS	1	IN	0.45	14
849	AMPS	1	Extended	0.42	15
849	AMPS	1	IN	0.48	16

EUT Position: Left Hand, 2 Points Touching Phantom

Channel MHz	Operating Mode	Duty Cycle ratio	Antenna Position	Measured SAR _{1g} (mW/g)	Plot Number
824	TDMA	1/3	Extended	0.5	17
824	TDMA	1/3	IN	0.39	18
836	TDMA	1/3	Extended	0.51	19
836	TGMA	1/3	IN	0.51	20
849	TDMA	1/3	Extended	0.74	21
848	TGMA	1/3	IN	0.085	22

EUT Position: Body SAR

Channel MHz	Operating Mode	Duty Cycle ratio	Antenna Position	Measured SAR _{1g} (mW/g)	Plot Number
849	TDMA	1/3	Extended	0.31	23
849	TDMA	1/3	IN	0.37	24

EUT Position: Left Hand, 2 Points Touching Phantom

Channel MHz	Operating Mode	Duty Cycle ratio	Antenna Position	Measured SAR _{1g} (mW/g)	Plot Number
1850	TDMA	1/3	Extended	1.35	25
1850	TDMA	1/3	IN	1.33	26
1880	TDMA	1/3	Extended	1.34	27
1880	TGMA	1/3	IN	1.30	28
1910	TDMA	1/3	Extended	1.28	29

1910	TGMA	1/3	IN	1.26	30
------	------	-----	----	------	----

EUT Position: Body SAR

Channel MHz	Operating Mode	Duty Cycle ratio	Antenna Position	Measured SAR _{1g} (mW/g)	Plot Number
1850	TDMA	1/3	Extended	0.36	31
1850	TDMA	1/3	IN	0.51	32
1880	TDMA	1/3	Extended	0.32	33
1880	TGMA	1/3	IN	0.30	34
1910	TDMA	1/3	Extended	0.31	35
1910	TGMA	1/3	IN	0.27	36

EUT Position: Body SAR with earphone

Channel MHz	Operating Mode	Duty Cycle ratio	Antenna Position	Measured SAR _{1g} (mW/g)	Plot Number
824	AMPS	1	Extended	0.28	37
1850	TDMA	1/3	Extended	0.35	38
1880	TDMA	1/3	Extended	0.33	39

Note: a) Worst case data were reported
 b) Duty cycle factor included in the measured SAR data
 c) Uncertainty of the system is not included

3.0 EQUIPMENT

3.1 Equipment List

The Specific Absorption Rate (SAR) tests were performed with the SPEAG model DASY 3 automated near-field scanning system which is package optimized for dosimetric evaluation of mobile radios [3].

The following major equipment/components were used for the SAR evaluations:

SAR Measurement System			
EQUIPMENT	SPECIFICATIONS	S/N #	CAL. DATE
Robot	Stäubi RX60L Repeatability: $\pm 0.025\text{mm}$ Accuracy: 0.806×10^{-3} degree Number of Axes: 6	597412-01	N/A
E-Field Probe	ET3DV5 Frequency Range: 10 MHZ to 6 GHz Linearity: ± 0.2 dB Directivity: ± 0.1 dB in brain tissue	1333	03/18/99
Data Acquisition	DAE3 Measurement Range: $1\mu\text{V}$ to $>200\text{mV}$ Input offset Voltage: $< 1\mu\text{V}$ (with auto zero) Input Resistance: 200 M	317	N/A
Phantom	Generic Twin V3.0 Type: Generic Twin, Homogenous Shell Material: Fiberglass Thickness: 2 ± 0.1 mm Capacity: 20 liter Ear spacer: 4 mm (between EUT ear piece and tissue simulating liquid)	N/A	N/A
Simulated Tissue	Mixture Please see section 6.2 for details	N/A	04/12/99
Power Meter	HP 435A w/ 8481H sensor Frequency Range: 100kHz to 18 GHz Power Range: $300\mu\text{W}$ to 3W	1312A01255	02/1/99

3.2 Brain Tissue Simulating Liquid

Ingredient	Frequency (800 – 900 MHz)
Water	40.3 %
Sugar	56.0 %
Salt	2.5 %
HEC	1.0 %
Bactericide	0.2 %

The dielectric parameters were verified prior to assessment using the HP 85070A dielectric probe kit and the HP 8753C network Analyzer. The dielectric parameters were:

Frequency (MHz)	r *	*(mho/m)	**(kg/m ³)
900	41.9 ± 5%	0.835 ± 10%	1000

* worst case uncertainty of the HP 85070A dielectric probe kit

** worst case assumption

3.3 E-Field Probe Calibration

Probes were calibrated by the manufacturer in the TEM cell ifi 110. To ensure consistency, a strict protocol was followed. The conversion factor (ConF) between this calibration and the measurement in the tissue simulation solution was performed by comparison with temperature measurement and computer simulations. Probe calibration factors are included in Appendix C.

3.4 Measurement Uncertainty

The uncertainty budget has been determined for the DASY3 measurement system according to the NIS81 [5] and the NIST 1297 [6] documents and is given in the following table. The extended uncertainty (K=2) was assessed to be 23.5 %

UNCERTAINTY BUDGET				
Uncertainty Description	Error	Distrib.	Weight	Std.Dev.
Probe Uncertainty				
Axial isotropy	±0.2 dB	U-shape	0.5	±2.4 %
Spherical isotropy	±0.4 dB	U-shape	0.5	±4.8 %
Isotropy from gradient	±0.5 dB	U-shape	0	
Spatial resolution	±0.5 %	Normal	1	±0.5 %
Linearity error	±0.2 dB	Rectang.	1	±2.7 %
Calibration error	±3.3 %	Normal	1	±3.3 %
SAR Evaluation Uncertainty				
Data acquisition error	±1 %	Rectang.	1	±0.6 %
ELF and RF disturbances	±0.25 %	Normal	1	±0.25 %
Conductivity assessment	±10 %	Rectang.	1	±5.8 %
Spatial Peak SAR Evaluation Uncertainty				
Extrapol boundary effect	±3 %	Normal	1	±3 %
Probe positioning error	±0.1 mm	Normal	1	±1 %
Integrat. And cube orient	±3 %	Normal	1	±3 %
Cube shape inaccuracies	±2 %	Rectang.	1	±1.2 %
Device positioning	±6 %	Normal	1	±6 %
Combined Uncertainties				±11.7 %

3.5 Measurement Traceability

All measurements described in this report are traceable to National Institute of Standards and Technology (NIST) standards or appropriate national standards.

4.0 WARNING LABEL INFORMATION - USA

See attached users manual.