



Report No.: AGC00119130306FE03B

Page 1 of 47

---

# FCC Test Report

---

Report No.: AGC00119130306FE03B

**FCC ID** : BRCMB9500

**APPLICATION PURPOSE** : Original Equipment

**PRODUCT DESIGNATION** : Smart Mobile Phone

**BRAND NAME** : Titan, Kinwei

**MODEL NAME** : MB9500, MB9600, MB9XXX (xxx represents 000~999),  
KW-MB9500, KW-MB9600, KW-MB9XXX (xxx represents 000~999)

**CLIENT** : Kintech Co., Ltd.

**DATE OF ISSUE** : Apr.03,2013

**STANDARD(S)** : FCC Part 15 Rules

**REPORT VERSION** : V1.0



**Attestation of Global Compliance (Shenzhen) Co., Ltd**

**CAUTION:**

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.

**Report Revise Record**

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Apr.03,2013	Valid	Original Report


## VERIFICATION OF COMPLIANCE

Applicant	Kintech Co.,Ltd. 1F-5F, Bldg 22, Chen Tian Industrial Zone, Xi Xiang Bao An District, Shenzhen, Guang Dong, China
Manufacturer	Kintech Co.,Ltd. 1F-5F, Bldg 22, Chen Tian Industrial Zone, Xi Xiang Bao An District, Shenzhen, Guang Dong, China
Product Designation	Smart Mobile Phone
Brand Name	Titan, Kinwei
Test Model	MB9500
Series Model	MB9600, MB9XXX (xxx represents 000~999), KW-MB9500, KW-MB9600, KW-MB9XXX (xxx represents 000~999)
Difference description	All the same except for the model name and brand name.
Date of Test	Mar.22,2013 to Mar.30,2013

### WE HEREBY CERTIFY THAT:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (2003) and the energy emitted by the sample EUT tested as described in this report is in compliance with requirement of FCC Part 15 Rules requirement.

Prepared By




Jane Wu Apr.03,2013

Checked By



Forrest Lei Apr.03,2013

Authorized By



Solger Zhang Apr.03,2013

## TABLE OF CONTENTS

<b>1 .GENERAL INFORMATION .....</b>	<b>6</b>
1.1 PRODUCT DESCRIPTION .....	6
1.2 RELATED SUBMITTAL(S)/GRANT(S).....	6
1.3 TEST METHODOLOGY .....	6
1.4 TEST FACILITY .....	6
1.5 SPECIAL ACCESSORIES .....	6
1.6 EQUIPMENT MODIFICATIONS .....	6
<b>2. SYSTEM TEST CONFIGURATION.....</b>	<b>7</b>
2.1 CONFIGURATION OF TESTED SYSTEM .....	7
2.1 EQUIPMENT USED IN TESTED SYSTEM .....	7
<b>3. SUMMARY OF TEST RESULTS .....</b>	<b>8</b>
<b>4. DESCRIPTION OF TEST MODES .....</b>	<b>8</b>
<b>5. ANTENNA REQUIREMENT .....</b>	<b>9</b>
5.1. STANDARD APPLICABLE.....	9
5.2. TEST RESULT .....	9
<b>6. RADIATED EMISSION.....</b>	<b>10</b>
6.1 MEASUREMENT PROCEDURE .....	10
6.2 TEST SETUP .....	11
6.3 LIMITS AND MEASUREMENT RESULT .....	12
6.4 TEST RESULT.....	12
<b>7. BAND EDGE EMISSION.....</b>	<b>25</b>
7.1. MEASUREMENT PROCEDURE .....	25
7.2. TEST SET-UP .....	25
7.3. TEST RESULT .....	26
<b>8. 6DB BANDWIDTH.....</b>	<b>30</b>
8.1. TEST EQUIPMENT LIST AND DETAILS.....	30

8.2. TEST PROCEDURE .....	30
8.3. SUMMARY OF TEST RESULTS/PLOTS .....	30
<b>9. CONDUCTED OUTPUT POWER.....</b>	<b>33</b>
9.1. MEASUREMENT PROCEDURE .....	33
9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) .....	33
9.3. LIMITS AND MEASUREMENT RESULT .....	33
<b>10. MAXIMUM CONDUCTED OUTPUT POWER SPECTRAL DENSITY .....</b>	<b>34</b>
10.1 MEASUREMENT PROCEDURE .....	34
10.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) .....	34
10.3 MEASUREMENT EQUIPMENT USED .....	34
10.4 LIMITS AND MEASUREMENT RESULT .....	34
<b>11. FCC LINE CONDUCTED EMISSION TEST.....</b>	<b>37</b>
11.1 LIMITS .....	37
11.2 TEST SETUP .....	37
11.3 PRELIMINARY PROCEDURE .....	38
11.4 FINAL TEST PROCEDURE .....	38
11.5 TEST RESULT OF POWER LINE .....	39
<b>APPENDIX I: PHOTOGRAPHS OF THE EUT.....</b>	<b>42</b>
<b>APPENDIX II: PHOTOGRAPHS OF THE TEST SETUP .....</b>	<b>41</b>

## 1 .GENERAL INFORMATION

### 1.1 PRODUCT DESCRIPTION

The EUT is a WCDMA mobile phone designed as a “Communication Device”. It is designed by way of utilizing the FHSS technology to achieve the system operation.

A major technical description of EUT is described as following

Operation Frequency	2.402 GHz to 2.480GHz
Bluetooth Version	V4.0
Modulation	GFSK
Number of channels	40 Channel(37 Hopping Channel,3 advertising Channel)
Antenna Designation	Integrated Antenna
Antenna Gain	0.8dBi
Hardware Version	N/A
Software Version	N/A
Power Supply	DC 3.7V by Li-ion Battery

### 1.2 RELATED SUBMITTAL(S)/GRANT(S)

This submittal(s) (test report) is intended for **FCC ID: BRCMB9500** filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

### 1.3 TEST METHODOLOGY

All measurements contained in this report were conducted with ANSI C63.4-2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions. The EUT was tested in all three orthogonal planes and the worse case was showed.

### 1.4 TEST FACILITY

All measurement facilities used to collect the measurement data are located at  
Attestation of Global Compliance (Shenzhen) Co, Ltd

2/F., Building 2, No.1-No.4, Chaxi Sanwei Technical Industrial Park, Gushu, Xixiang, Bao'an District, Shenzhen, Guangdong, China.

FCC register No.: 259865

### 1.5 SPECIAL ACCESSORIES

Refer to section 2.2.


### 1.6 EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

## 2. SYSTEM TEST CONFIGURATION

### 2.1 CONFIGURATION OF TESTED SYSTEM

**Configuration:** (Continuous TX & Normal hopping)

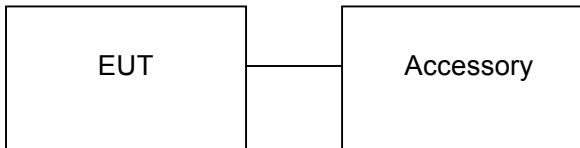

**Note:** All the accessories have been used during the test.

### 2.1 EQUIPMENT USED IN TESTED SYSTEM

Item	Equipment	Model No.	ID or Specification	Note
1	Smart Mobile Phone	MB9500	FCC ID: BRCMB9500	EUT
2	Adapter	ASUC30i	DC5V/1A	Accessory
3	Battery	BT95S	DC3.7V/2300mAh	Accessory
4	Earphone	MB9500	N/A	Accessory
5	USB Cable	MB9500	N/A	Accessory

### 3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§ 15.203	Antenna Requirement	Compliant
§15.209 §15.247(d)	Radiated Emission	Compliant
§15.247(d)	Band Edges	Compliant
§15.247	6 dB Bandwidth	Compliant
§15.247(b)	Conducted Power	Compliant
§15.247(e)	Maximum Conducted Output Power SPECTRAL Density	Compliant
§15.207	Line Conduction Emission	Compliant

### 4. DESCRIPTION OF TEST MODES

The EUT has been operated in three modulations: GFSK independently.

No.	TEST MODES
1	Low Channel(TX)
2	Middle Channel(TX)
3	High Channel(TX)
4	Normal Operating(BT)

**Note:** 1. All the test modes can be supply by Li-ion battery, only the result of the worst case was recorded in the report if no other records.

2. For Radiated Emission, 3axis were chosen for testing for each applicable mode

## **5. ANTENNA REQUIREMENT**

### **5.1. STANDARD APPLICABLE**

According to FCC 15.203, An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

### **5.2. TEST RESULT**

This product has a permanent antenna, fulfill the requirement of this section.


## 6. RADIATED EMISSION

### 6.1 MEASUREMENT PROCEDURE


1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High - Low scan is not required in this case.

## 6.2 TEST SETUP


### RADIATED EMISSION TEST SETUP BELOW 30MHz

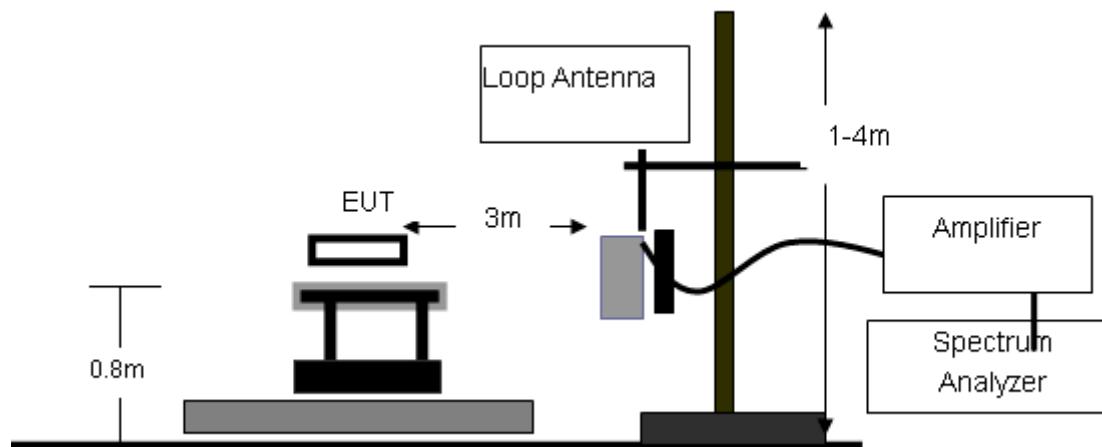

### RADIATED EMISSION TEST SETUP 30MHz-1000MHz

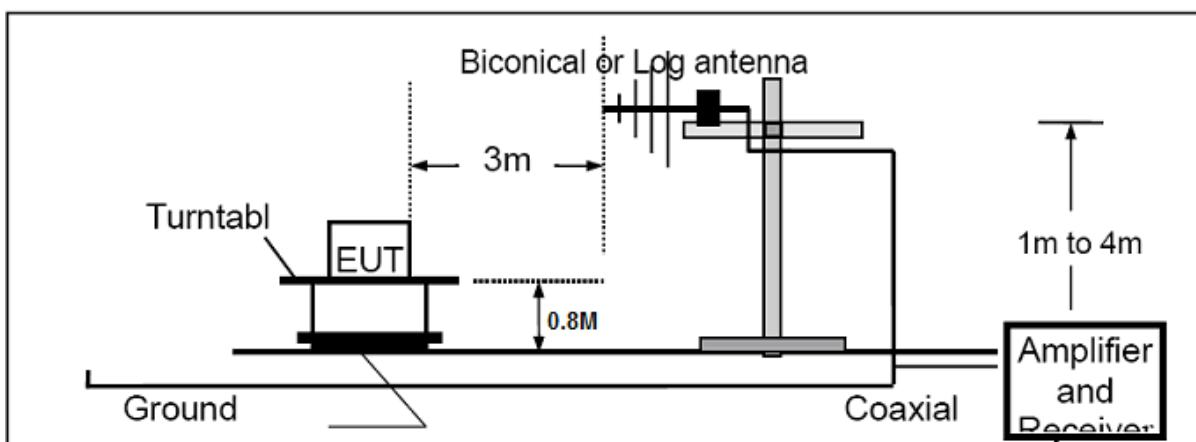

### RADIATED EMISSION TEST SETUP ABOVE 1000MHz

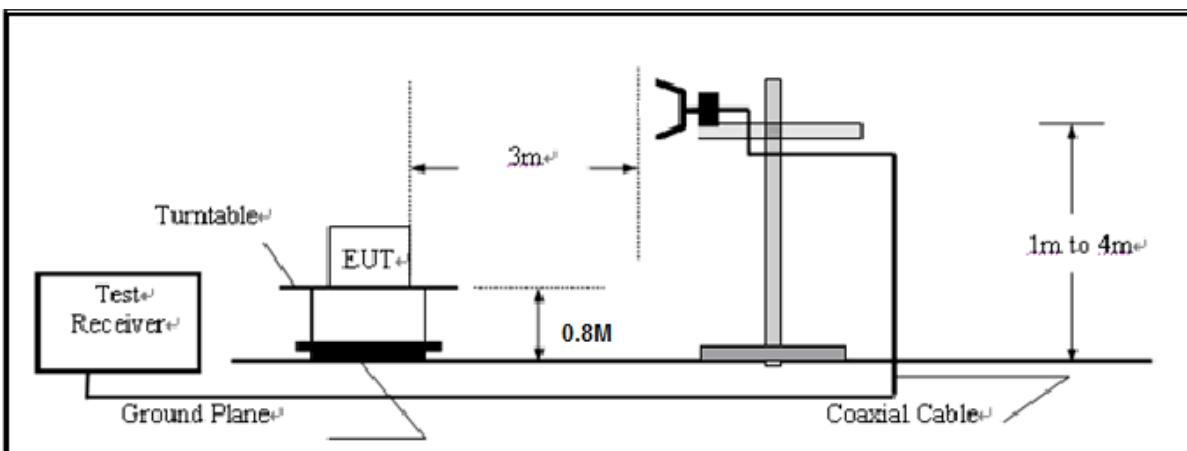

### 6.3 LIMITS AND MEASUREMENT RESULT

15.209 Limit in the below table has to be followed

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3


Note: All modes were tested For restricted band radiated emission,  
the test records reported below are the worst result compared to other modes.

### 6.4 TEST RESULT

#### RADIATED EMISSION BELOW 30MHZ

No emission found between lowest internal used/generated frequencies to 30MHz.

## RADIATED EMISSION BELOW 1GHZ

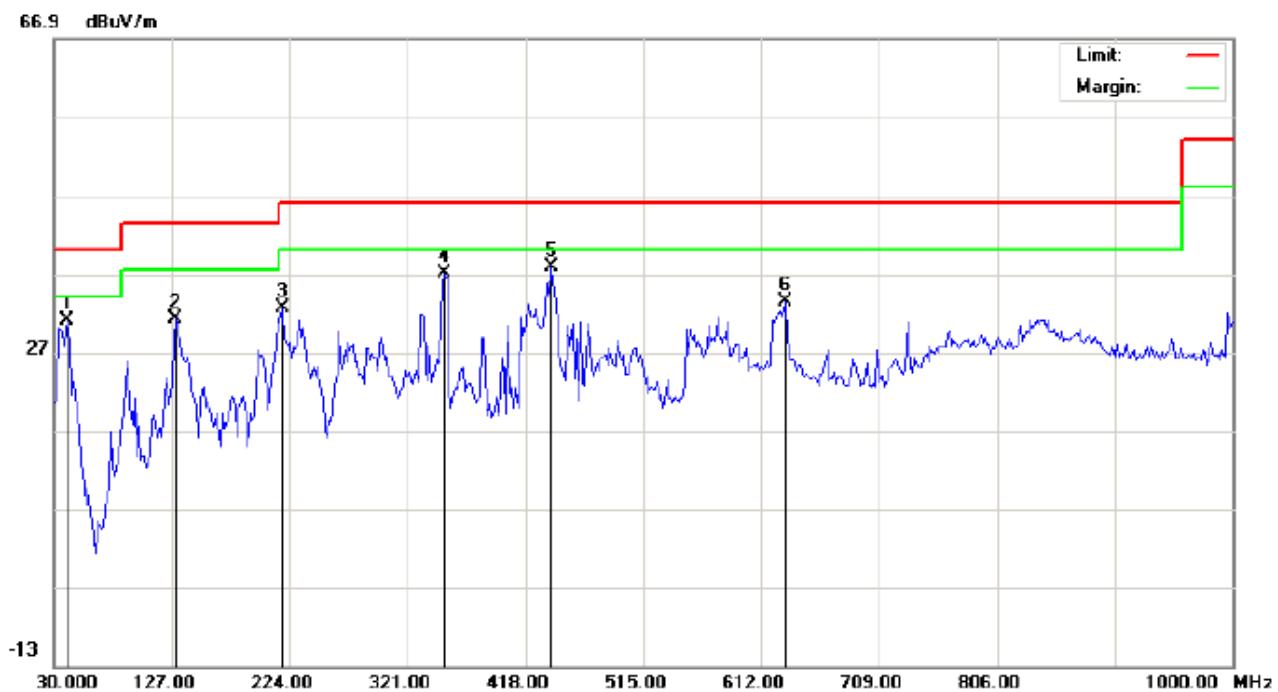

Site: site #1	Polarization: <i>Horizontal</i>	Temperature: 26
Limit: FCC Class B 3M Radiation	Power:	Humidity: 60 %
EUT: Smart Mobile Phone	Distance:	
M/N: MB9500		
Mode: Low channel TX		
Note:		

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		41.3167	23.75	7.34	31.09	40.00	-8.91	peak			
2		130.2333	16.85	14.35	31.20	43.50	-12.30	peak			
3		217.5333	21.02	11.54	32.56	46.00	-13.44	peak			
4		351.7167	17.85	19.06	36.91	46.00	-9.09	peak			
5	*	439.0167	16.46	21.43	37.89	46.00	-8.11	peak			
6		631.4000	8.61	24.88	33.49	46.00	-12.51	peak			



Site: site #1  
Limit: FCC Class B 3M Radiation  
EUT: Smart Mobile Phone  
M/N: MB9500  
Mode: Low channel TX  
Note:

Polarization: **Vertical**


## Power-

Temperature: 26

Humidity: 60 %

Distance:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	41.3167	24.84	6.79	31.63	40.00	-8.37	peak			
2		214.3000	23.45	7.60	31.05	43.50	-12.45	peak			
3		235.3167	19.59	11.61	31.20	46.00	-14.80	peak			
4		332.3167	14.49	18.72	33.21	46.00	-12.79	peak			
5		560.2667	10.11	24.02	34.13	46.00	-11.87	peak			
6		747.8000	4.30	27.50	31.80	46.00	-14.20	peak			

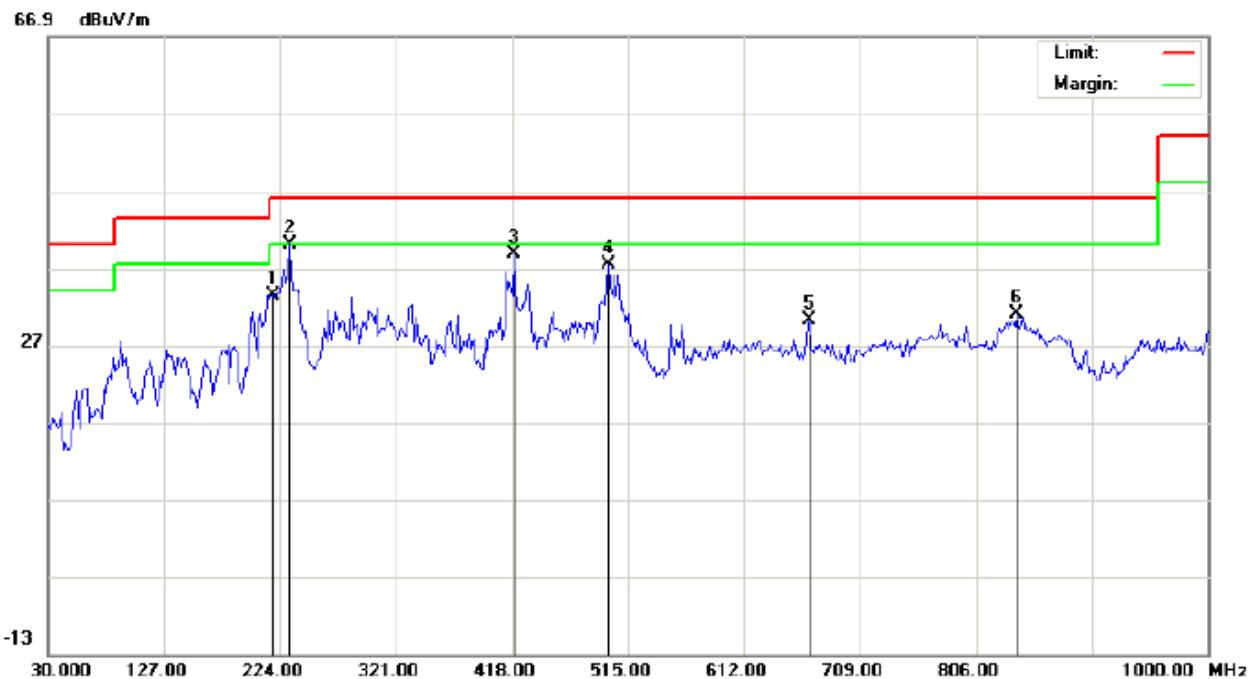

Site: site #1

Polarization: **Horizontal**

Temperature: 26

Limit: FCC Class B 3M Radiation

Power:

Humidity: 60 %

EUT: Smart Mobile Phone


Distance:

M/N: MB9500

Mode: Middle channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna	Table	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		Height	Degree	
1		217.5333	21.94	11.54	33.48	46.00	-12.52	peak			
2	*	232.0833	27.58	12.44	40.02	46.00	-5.98	peak			
3		419.6167	18.48	20.35	38.83	46.00	-7.17	peak			
4		498.8333	14.55	22.88	37.43	46.00	-8.57	peak			
5		666.9667	6.36	23.82	30.18	46.00	-15.82	peak			
6		839.9500	-0.41	31.34	30.93	46.00	-15.07	peak			

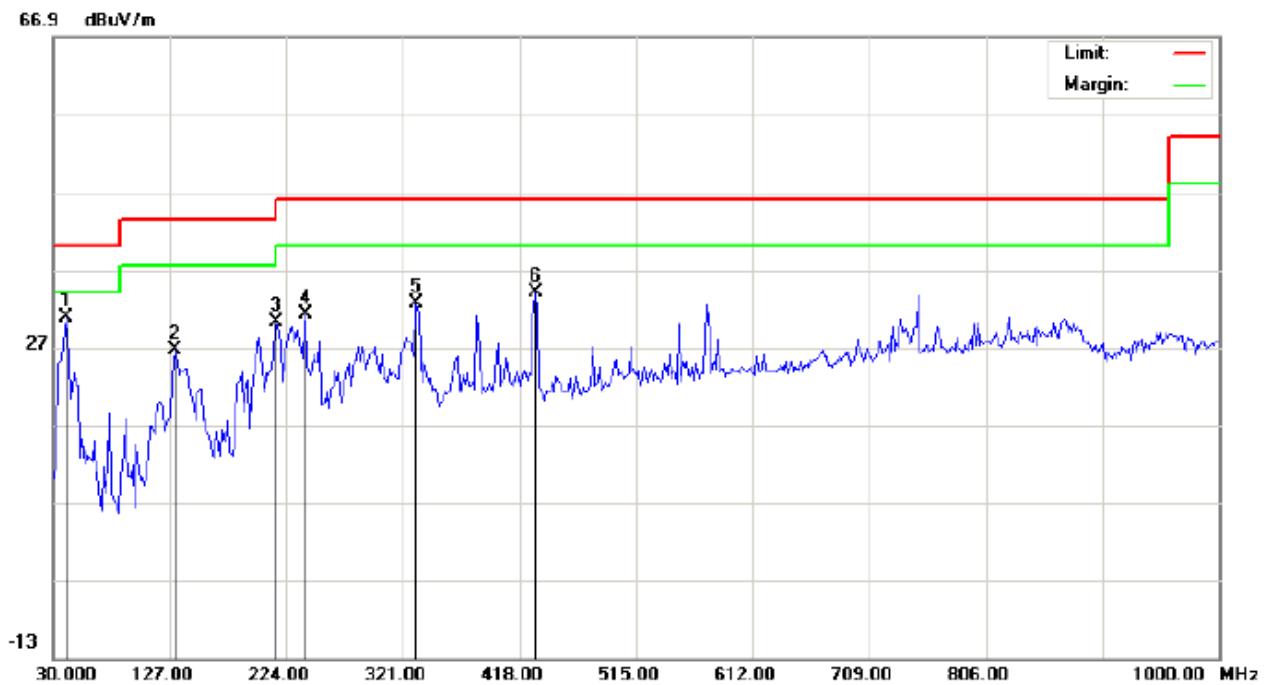


Site: site #1	Polarization: <i>Vertical</i>	Temperature: 26
Limit: FCC Class B 3M Radiation	Power:	Humidity: 60 %
EUT: Smart Mobile Phone	Distance:	
M/N: MB9500		
Mode: Middle channel TX		
Note:		

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	41.3167	24.11	6.79	30.90	40.00	-9.10	peak			
2		131.8500	16.59	9.93	26.52	43.50	-16.98	peak			
3		215.9167	22.65	7.56	30.21	43.50	-13.29	peak			
4		240.1667	16.98	14.23	31.21	46.00	-14.79	peak			
5		332.3167	13.97	18.72	32.69	46.00	-13.31	peak			
6		430.9333	12.51	21.46	33.97	46.00	-12.03	peak			



Site: site #1 Polarization: *Horizontal* Temperature: 26  
 Limit: FCC Class B 3M Radiation Power: Humidity: 60 %  
 EUT: Smart Mobile Phone Distance:  
 M/N: MB9500  
 Mode: High channel TX  
 Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		94.6667	16.49	15.06	31.55	43.50	-11.95	peak			
2	*	215.9167	23.46	10.93	34.39	43.50	-9.11	peak			
3		232.0833	21.89	12.44	34.33	46.00	-11.67	peak			
4		264.4167	19.02	14.71	33.73	46.00	-12.27	peak			
5		338.7833	12.92	18.94	31.86	46.00	-14.14	peak			
6		432.5500	11.61	21.09	32.70	46.00	-13.30	peak			

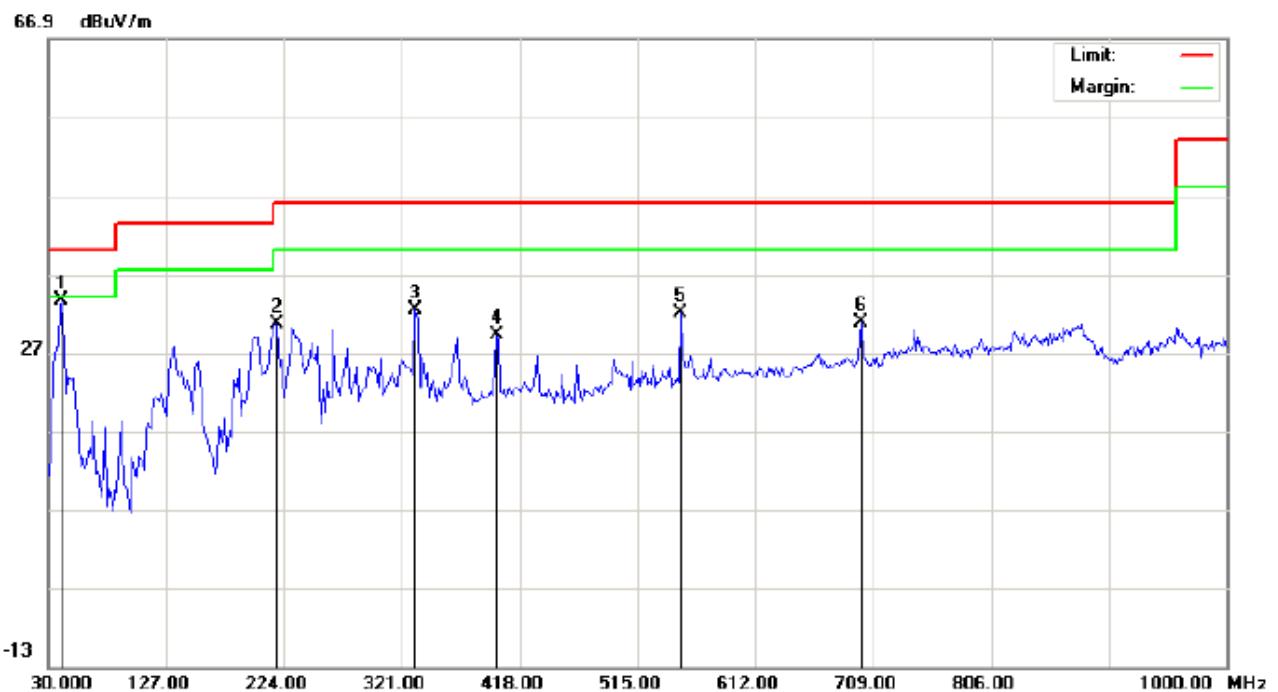

Site: site #1 Polarization: **Vertical** Temperature: 26  
 Limit: FCC Class B 3M Radiation Power: Humidity: 60 %  
 EUT: Smart Mobile Phone Distance:  
 M/N: MB9500  
 Mode: High channel TX  
 Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	41.3167	26.74	6.79	33.53	40.00	-6.47	peak			
2		217.5333	22.98	7.53	30.51	46.00	-15.49	peak			
3		332.3167	13.75	18.72	32.47	46.00	-13.53	peak			
4		398.6000	10.38	18.86	29.24	46.00	-16.76	peak			
5		550.5667	8.31	23.74	32.05	46.00	-13.95	peak			
6		699.3000	4.20	26.60	30.80	46.00	-15.20	peak			


RADIATED EMISSION ABOVE 1GHZ



Site: site #1      Polarization: *Horizontal*      Temperature: 26  
 Limit: FCC Class B 3M Radiation above 1GHZ(PK)      Power:      Humidity: 60 %  
 EUT: Smart Mobile Phone      Distance:  
 M/N: MB9500  
 Mode: Low channel TX  
 Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2158.333	34.71	10.05	44.76	74.00	-29.24	peak			
2	*	2400.000	65.48	10.32	75.80	74.00	1.80	peak			
3		4008.333	29.39	15.05	44.44	74.00	-29.56	peak			


**Note:** The 2 is the basic frequency.

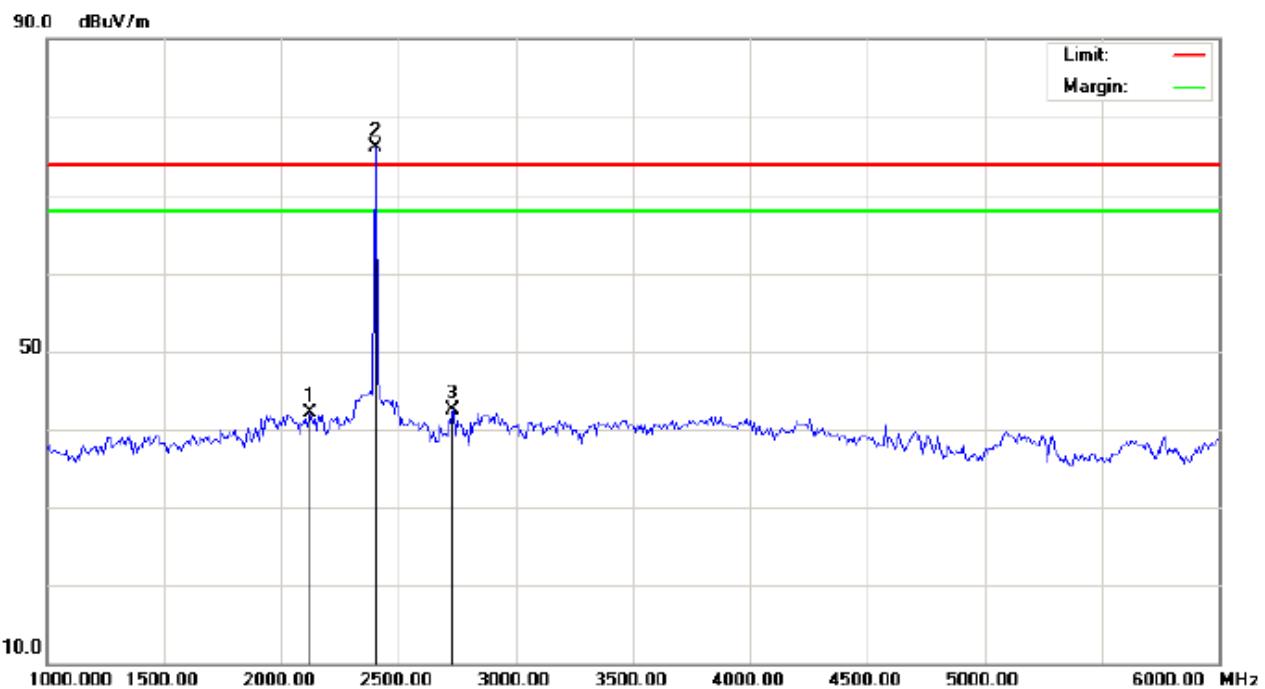

Site: site #1 Polarization: *Vertical* Temperature: 26  
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %  
EUT: Smart Mobile Phone Distance:  
M/N: MB9500  
Mode: Low channel TX  
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2125.000	32.17	10.02	42.19	74.00	-31.81	peak			
2	*	2400.000	65.84	10.32	76.16	74.00	2.16	peak			
3		2733.333	31.48	10.99	42.47	74.00	-31.53	peak			

**Note:** The 2 is the basic frequency.

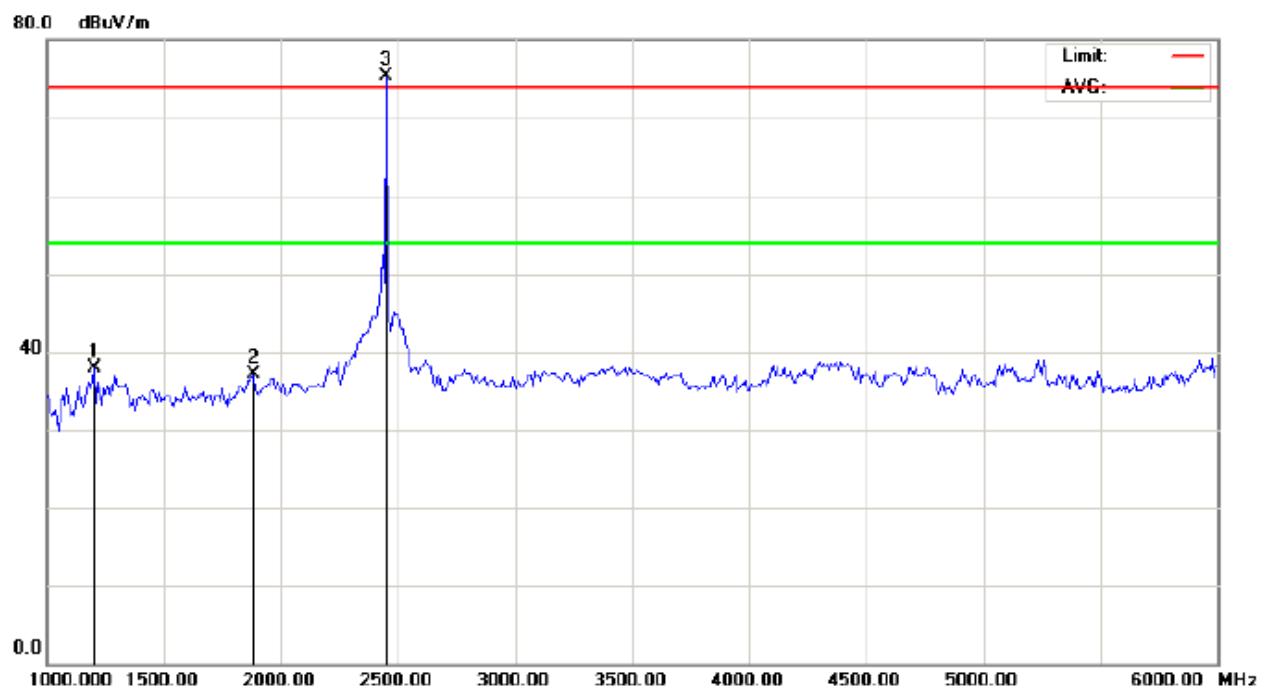



---

Site: site #1      Polarization: **Horizontal**      Temperature: 26  
 Limit: FCC Class B 3M Radiation above 1GHZ(PK)      Power:      Humidity: 60 %  
 EUT: Smart Mobile Phone      Distance: 3m  
 M/N: MB9500  
 Mode: Middle Channel TX  
 Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		1200.000	37.85	0.00	37.85	74.00	-36.15	peak			
2		1883.333	37.18	0.00	37.18	74.00	-36.82	peak			
3	*	2450.000	75.30	0.00	75.30	74.00	1.30	peak			


**Note:** The 3 is the basic frequency.

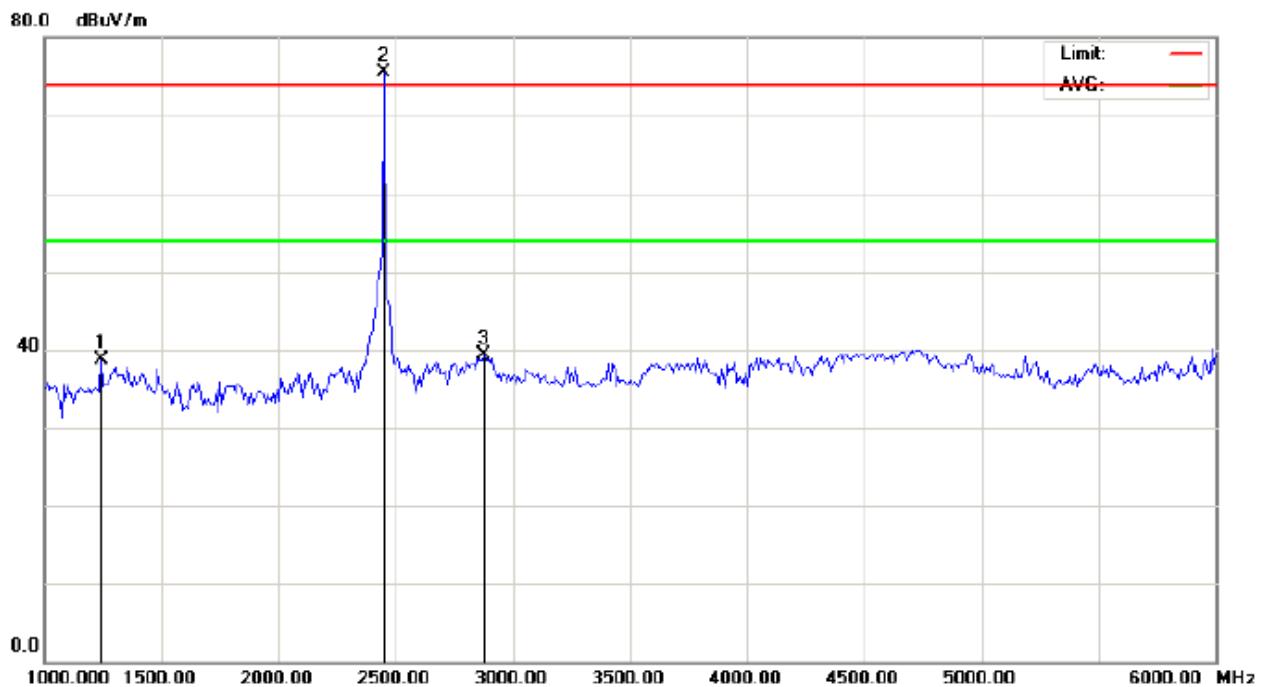

Site: site #1 Polarization: *Vertical* Temperature: 26  
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %  
EUT: Smart Mobile Phone Distance: 3m  
M/N: MB9500  
Mode: Middle Channel TX  
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		1241.667	38.68	0.00	38.68	74.00	-35.32	peak			
2	*	2450.000	75.58	0.00	75.58	74.00	1.58	peak			
3		2875.000	39.23	0.00	39.23	74.00	-34.77	peak			

**Note:** The 2 is the basic frequency.

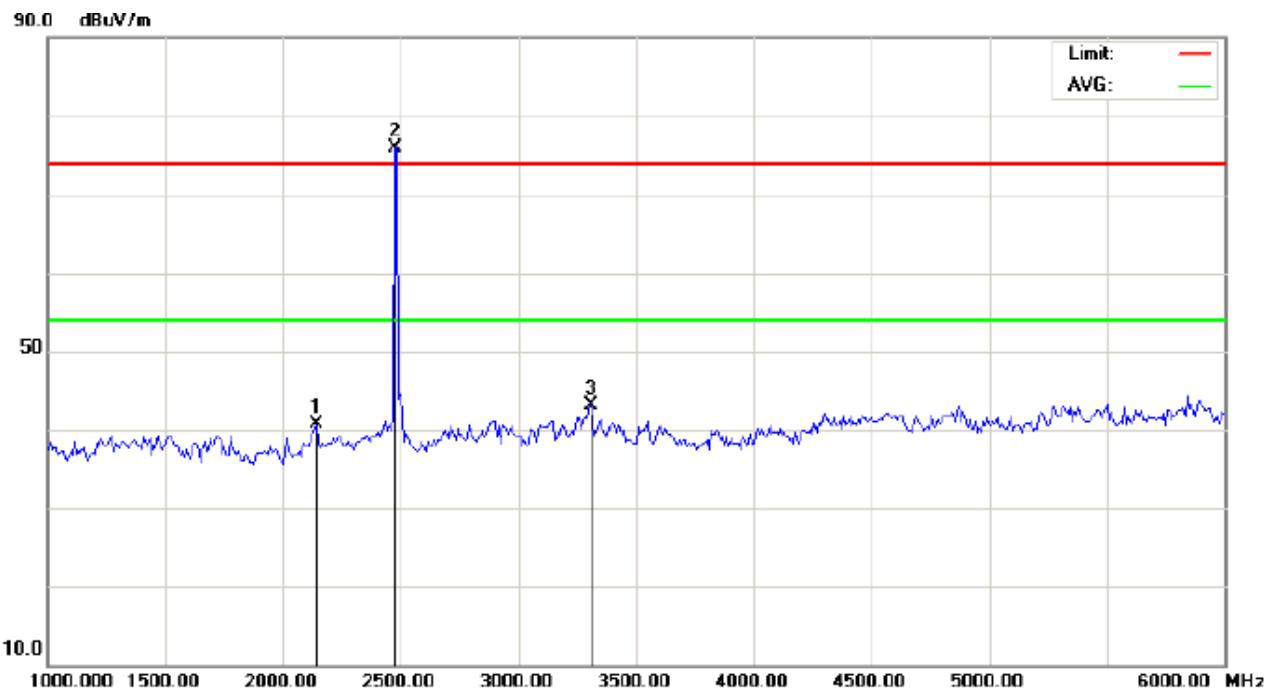

Site: site #1 Polarization: **Horizontal** Temperature: 26

Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT: Smart Mobile Phone Distance: 3m


M/N: MB9500

Mode: High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2141.667	40.61	0.00	40.61	74.00	-33.39	peak			
2	*	2475.000	75.89	0.00	75.89	74.00	1.89	peak			
3		3308.333	43.13	0.00	43.13	74.00	-30.87	peak			

**Note:** The 2 is the basic frequency.

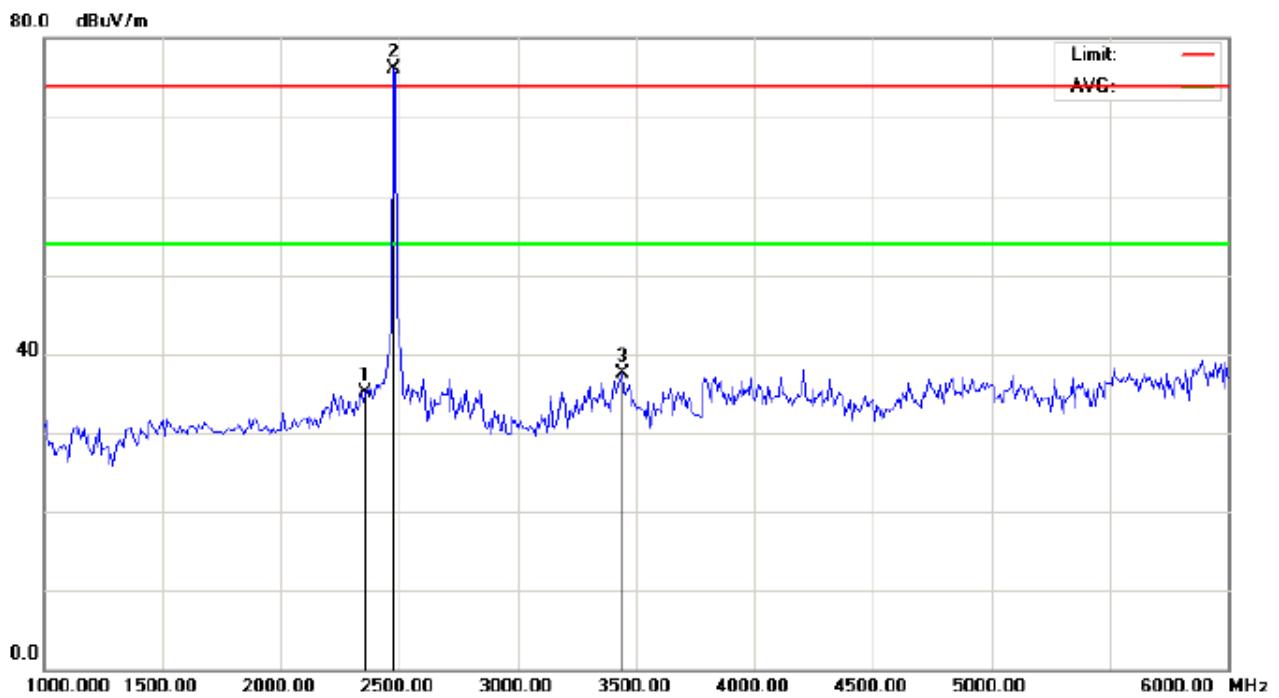

Site: site #1 Polarization: *Vertical* Temperature: 26  
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %  
EUT: Smart Mobile Phone Distance: 3m  
M/N: MB9500  
Mode: High Channel TX  
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2358.333	35.17	0.00	35.17	74.00	-38.83	peak			
2	*	2475.000	76.15	0.00	76.15	74.00	2.15	peak			
3		3441.667	37.60	0.00	37.60	74.00	-36.40	peak			

**Note:** The 2 is the basic frequency.  
6~25GHz at least have 20dB margin. No recording in the test report.

## **7. BAND EDGE EMISSION**

### **7.1. MEASUREMENT PROCEDURE**


1. Set the EUT Work on the top, the bottom operation frequency individually.
2. Set SPA Start or Stop Frequency = Operation Frequency,  $RBW \geq 1\% \text{span}$ ,  $VBW \geq RBW$
3. The band edges was measured and recorded.

### **7.2. TEST SET-UP**

Radiated same as 6.2

### 7.3. TEST RESULT

TEST PLOT OF BAND EDGE FOR LOW CHANNEL -Horizontal

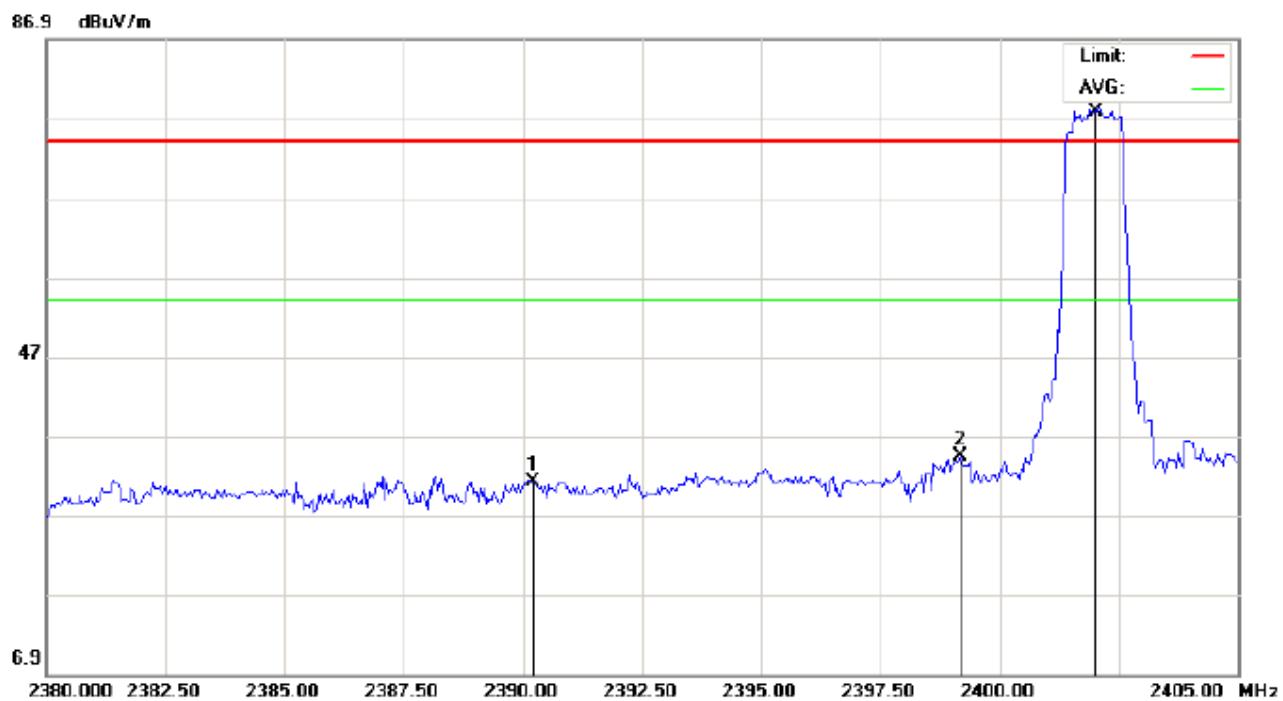

Site: site #1 Polarization: *Horizontal* Temperature: 26  
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %  
EUT: Smart Mobile Phone Distance: 3m  
M/N: MB9500  
Mode: Low channel TX  
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2390.204	39.58	-8.44	31.14	74.00	-42.86	peak			
2		2399.167	42.78	-8.40	34.38	74.00	-39.62	peak			
3	*	2402.023	86.18	-8.39	77.79	74.00	3.79	peak			

TEST PLOT OF BAND EDGE FOR LOW CHANNEL - Vertical




Site: site #1 Polarization: **Vertical** Temperature: 26  
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %  
EUT: Smart Mobile Phone Distance: 3m  
M/N: MB9500  
Mode: Low channel TX  
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2390.009	38.71	-8.44	30.27	74.00	-43.73	peak			
2		2398.667	42.73	-8.41	34.32	74.00	-39.68	peak			
3	*	2402.057	84.44	-8.39	76.05	74.00	2.05	peak			

**RESULT: PASS**

TEST PLOT OF BAND EDGE FOR HIGH CHANNEL –Horizontal

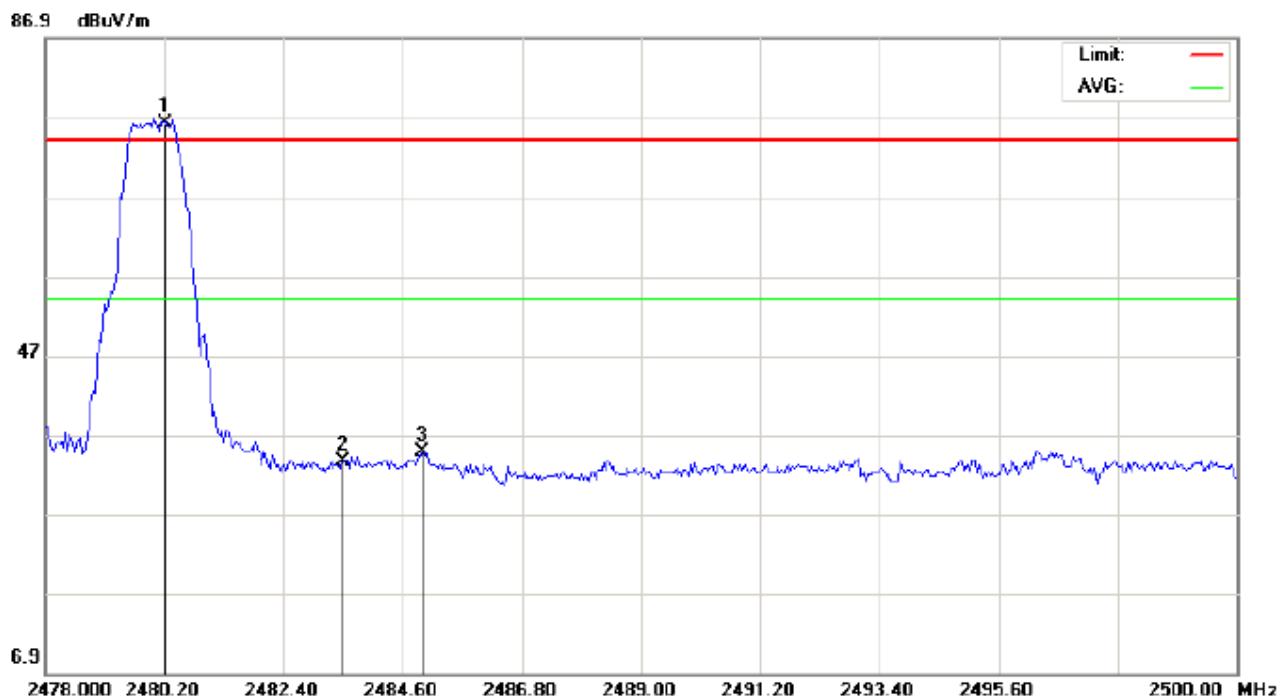

---

Site: site #1 Polarization: **Horizontal** Temperature: 26  
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %  
EUT: Smart Mobile Phone Distance: 3m  
M/N: MB9500  
Mode: High channel TX  
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna	Table	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2480.210	84.23	-8.08	76.15	74.00	2.15	peak			
2		2483.496	41.74	-8.07	33.67	74.00	-40.33	peak			
3		2484.967	42.78	-8.06	34.72	74.00	-39.28	peak			

TEST PLOT OF BAND EDGE FOR HIGH CHANNEL -Vertical



Site: site #1 Polarization: *Vertical* Temperature: 26  
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %  
EUT: Smart Mobile Phone Distance: 3m  
M/N: MB9500  
Mode: High channel TX  
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna	Table	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Degree	
1	*	2480.134	84.92	-8.08	76.84	74.00	2.84	peak			
2		2483.507	41.10	-8.07	33.03	74.00	-40.97	peak			
3		2486.177	42.18	-8.06	34.12	74.00	-39.88	peak			

**RESULT: PASS**

## 8. 6DB BANDWIDTH

### 8.1. TEST EQUIPMENT LIST AND DETAILS

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
PSA SERIES SPECTRUM ANALYZER	AGILENT	E4440A	US41421290	07/18/2012	07/17/2013
RECEIVER ANTENNA	ETS	2175	57337	07/18/2012	07/17/2013

### 8.2. TEST PROCEDURE

1. The EUT was placed on a table which is 0.8m above ground plane.
2. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
3. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
3. Set SPA Centre Frequency = Operation Frequency, RBW= 100 KHz, VBW $\geq$ RBW.
4. Set SPA Trace 1 Max hold, then View.

### 8.3. SUMMARY OF TEST RESULTS/PLOTS

Channel	6dB Bandwidth (KHz)	Minimum Limit (KHz)	Pass/Fail
Low	688.568		Pass
Middle	694.870	500KHz	Pass
High	700.179		Pass


TEST PLOT OF BANDWIDTH FOR LOW CHANNEL



TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL



TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

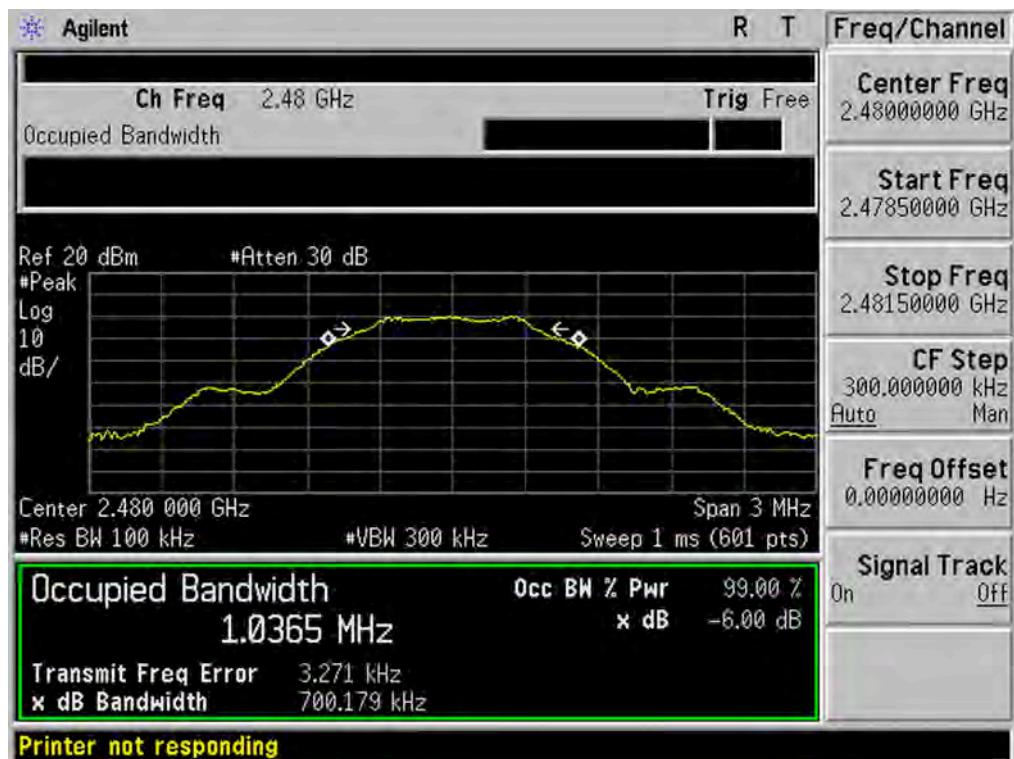


## 9. CONDUCTED OUTPUT POWER

### 9.1. MEASUREMENT PROCEDURE

1. The EUT was placed on a table which is 0.8m above ground plane.
2. Connect EUT RF output port to power meter through an RF attenuator
3. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
4. Set the RBW greater than 6DB bandwidth of emission.
5. Record the maximum power from the power meter.
6. The maximum peak power shall be less 1 Watt (30dBm).

**Note:** The EUT was tested according to KDB 558074 for compliance to FCC 47CFR 15.247 requirements.

### 9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

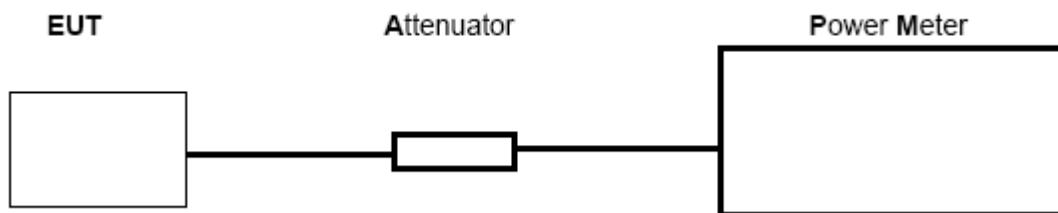

### 9.3. LIMITS AND MEASUREMENT RESULT

Channel	Average Power (dBm)	Peak Power (dBm)	Applicable Limits (dBm)	Pass/Fail
Low Channel	1.81	2.62	30	Pass
Middle Channel	1.95	2.74	30	Pass
High Channel	2.14	2.95	30	Pass

## 10. MAXIMUM CONDUCTED OUTPUT POWER SPECTRAL DENSITY

### 10.1 MEASUREMENT PROCEDURE

- (1). The EUT was placed on a turn table which is 0.8m above ground plane.
- (2). Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- (3). Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- (4). Set SPA Trace 1 Max hold, then View.

**Note:** The EUT was tested according to KDB 558074 for compliance to FCC 47CFR 15.247 requirements.

Set RBW= 100 kHz, VBW $\geq$ 300KHz, SPAN to 5-30 % greater than the EBW, Scale the observed power level to an equivalent value in 3 kHz by adjusting (reducing) the measured power by a bandwidth correction factor (BWCF) where BWCF =  $10\log(3\text{ kHz}/100\text{kHz}) = -15.2\text{ dB}$ .

### 10.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

Refer To Section 8.2


### 10.3 MEASUREMENT EQUIPMENT USED

Refer To Section 6.


### 10.4 LIMITS AND MEASUREMENT RESULT

Channel No.	Reading Value (dBm)	BWCF (dB)	PSD (dBm)	Limit (dBm)	Result
Low Channel	-0.17	-15.2	-15.37	8	Pass
Middle Channel	-0.62	-15.2	-15.82	8	Pass
High Channel	0.07	-15.2	-15.13	8	Pass


TEST PLOT OF SPECTRAL DENSITY FOR LOW CHANNEL

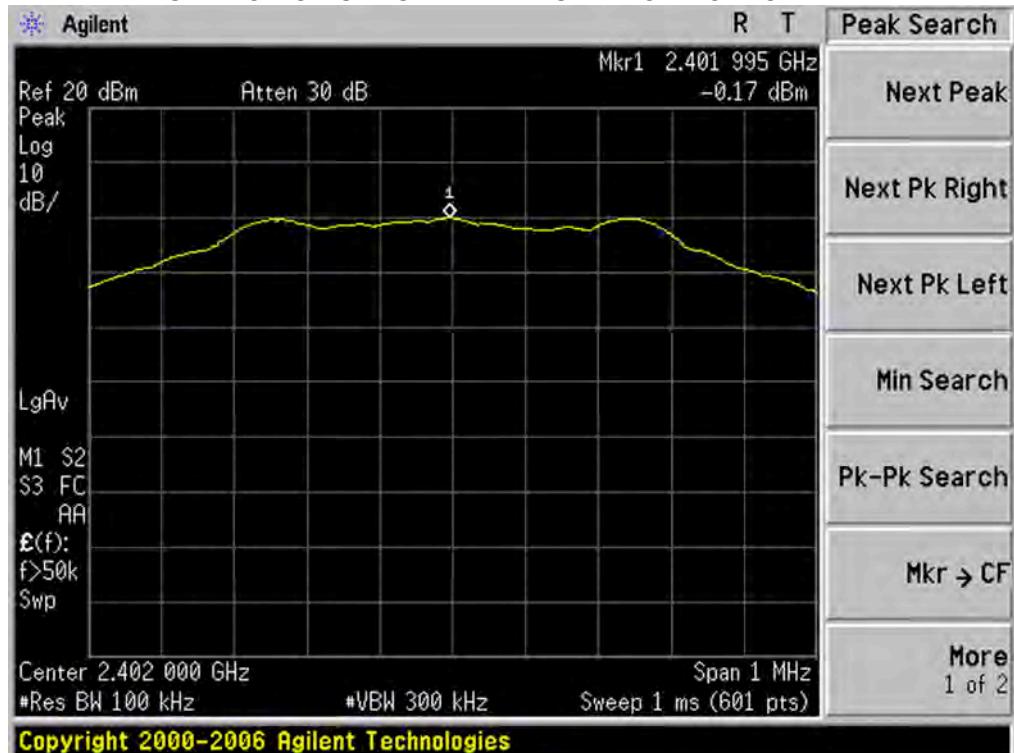

TEST PLOT OF SPECTRAL DENSITY FOR MIDDLE CHANNEL

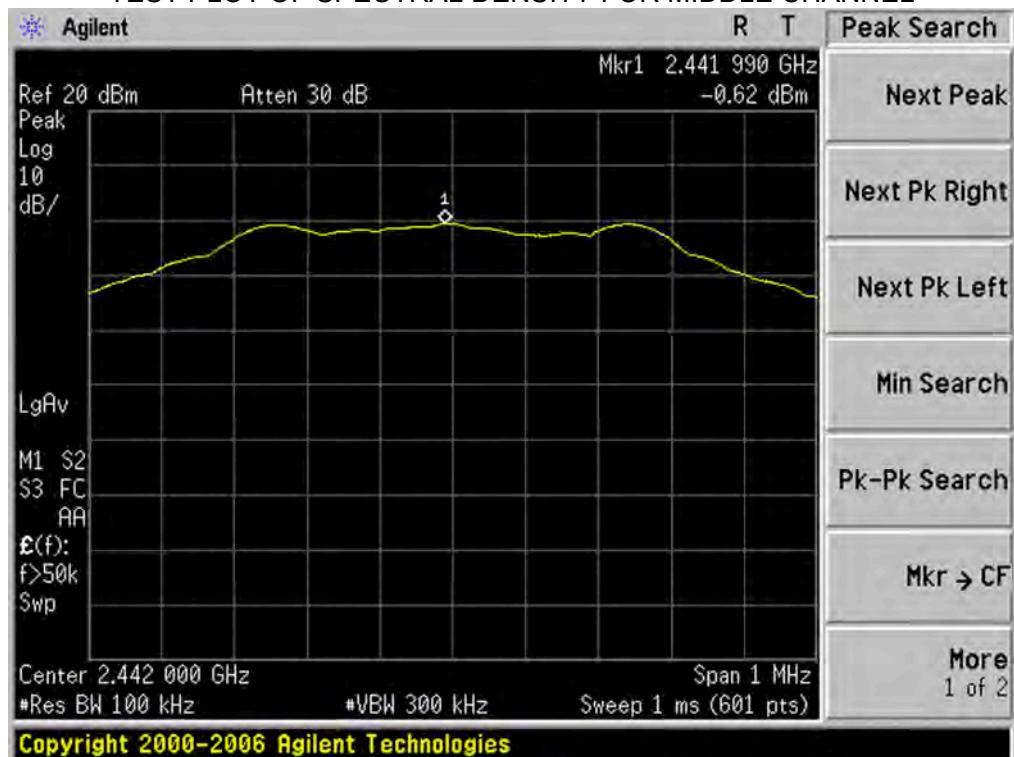

TEST PLOT OF SPECTRAL DENSITY FOR HIGH CHANNEL

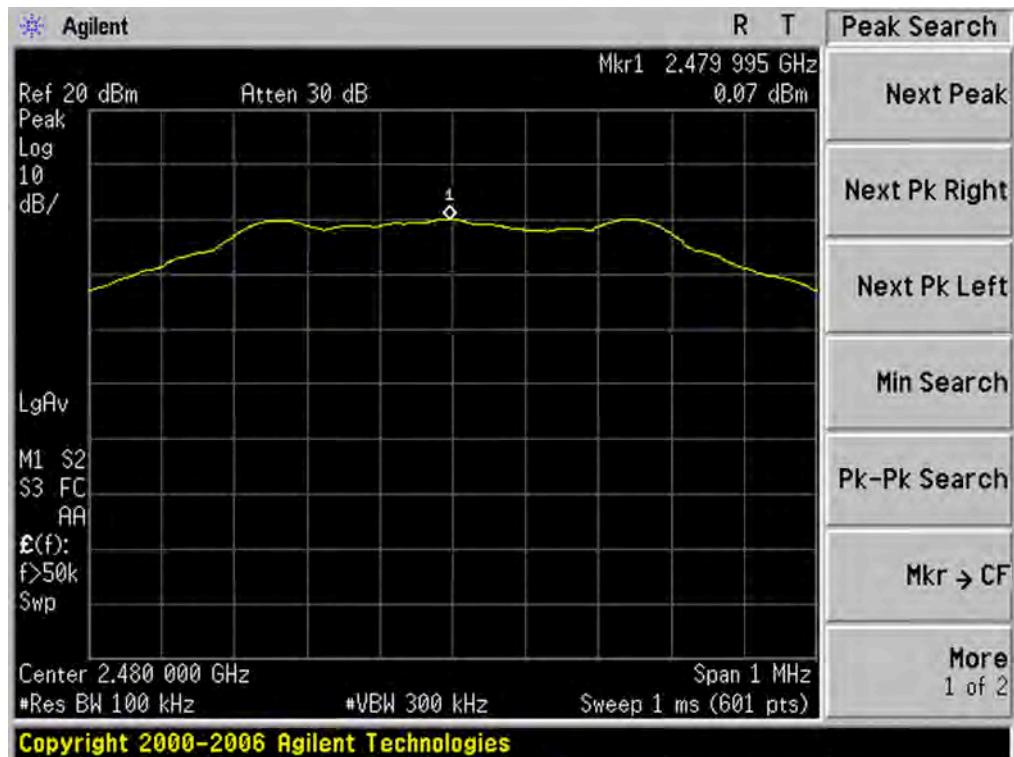

## 11. FCC LINE CONDUCTED EMISSION TEST


### 11.1 LIMITS

Frequency	Maximum RF Line Voltage	
	Q.P. ( dBuV)	Average( dBuV)
150kHz~500kHz	66-56	56-46
500kHz~5MHz	56	46
5MHz~30MHz	60	50

**\*\*Note:** 1. The lower limit shall apply at the transition frequency.

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz

### 11.2 TEST SETUP

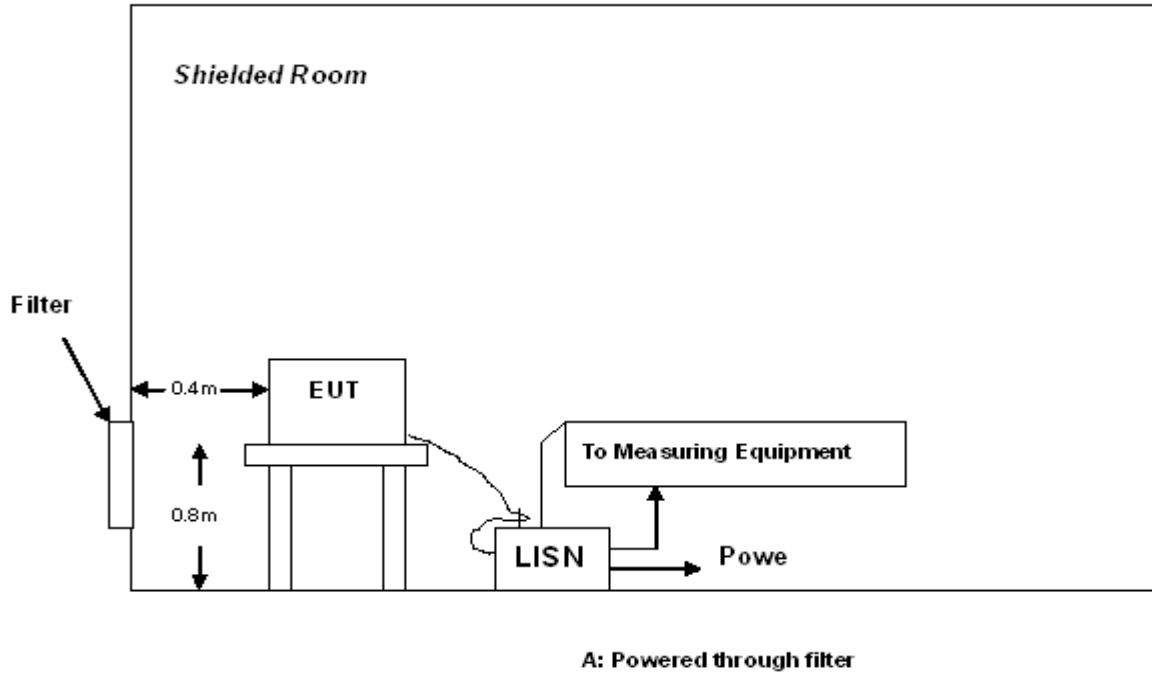

### 11.3 PRELIMINARY PROCEDURE


- 1) The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2) Support equipment, if needed, was placed as per ANSI C63.4.
- 3) All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.
- 4) All support equipments received AC120V/60Hz power from a LISN, if any.
- 5) The EUT received power by adapter which received power by a LISN.
- 6) The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7) Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8) During the above scans, the emissions were maximized by cable manipulation.
- 9) The following test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

### 11.4 FINAL TEST PROCEDURE

- 10) EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- 11) 2) A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less -2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 12) 3) The test data of the worst case condition(s) was reported on the Summary Data page.


## 11.5 TEST RESULT OF POWER LINE

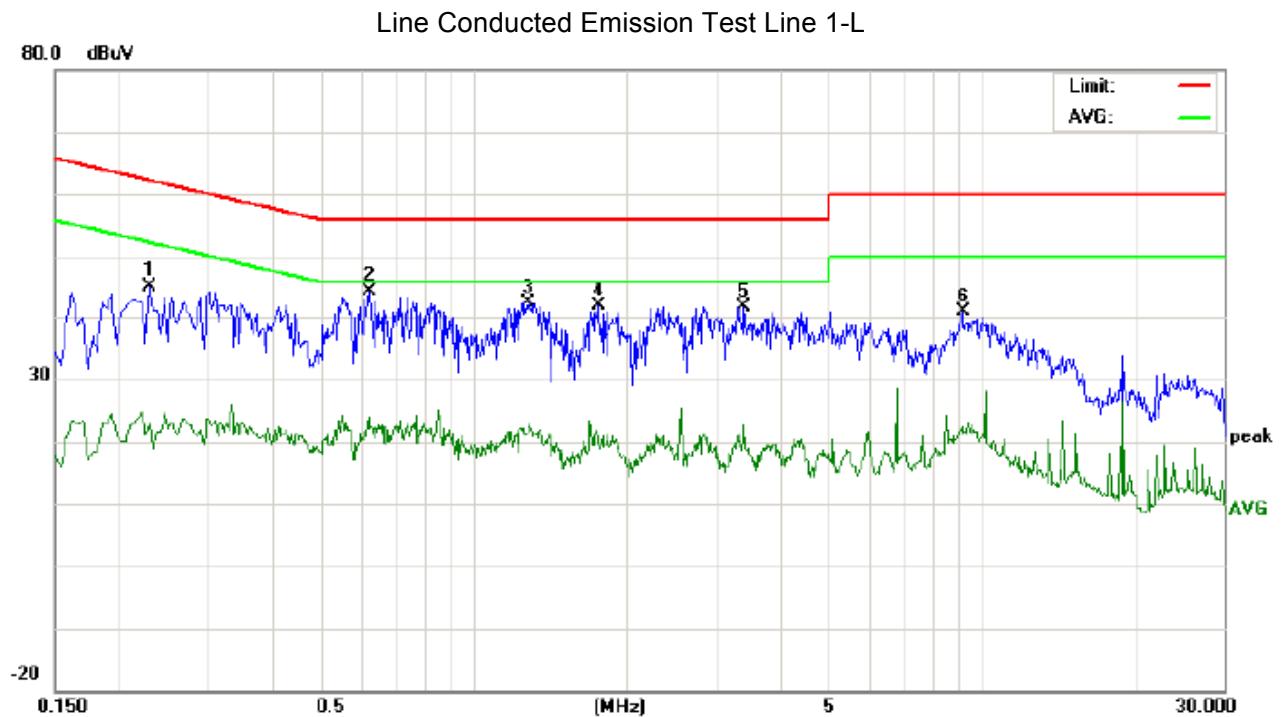

Site: Conduction Phase: L1 Temperature: 26  
 Limit: FCC Class B Conduction(QP) Power: AC 120V/60Hz Humidity: 60 %  
 EUT: Smart Mobile Phone  
 M/N: MB9500  
 Mode: Normal hopping  
 Note:

No.	Freq. (MHz)	Reading_Level (dBuV)			Correct Factor	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	Avg		Peak	QP	Avg	QP	Avg	QP	Avg		
1	0.2300	34.93		12.67	10.25	45.18		22.92	62.45	52.45	-17.27	-29.53	P	
2	0.6220	34.15		13.62	10.32	44.47		23.94	56.00	46.00	-11.53	-22.06	P	
3	1.2780	32.08		11.27	10.38	42.46		21.65	56.00	46.00	-13.54	-24.35	P	
4	1.7580	31.50		10.15	10.30	41.80		20.45	56.00	46.00	-14.20	-25.55	P	
5	3.4020	31.18		11.98	10.52	41.70		22.50	56.00	46.00	-14.30	-23.50	P	
6	9.1699	30.56		12.08	10.27	40.83		22.35	60.00	50.00	-19.17	-27.65	P	

Line Conducted Emission Test Line 1-N

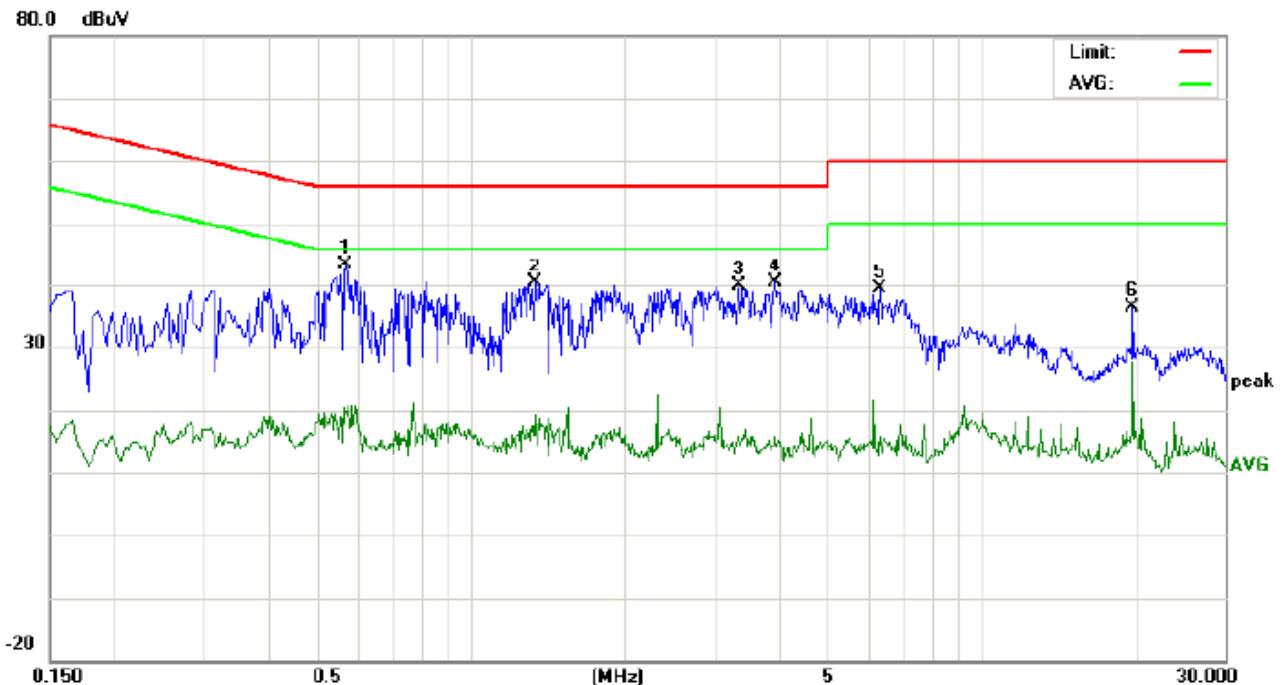

Site: Conduction Phase: **N** Temperature: 26  
 Limit: FCC Class B Conduction(QP) Power: AC 120V/60Hz Humidity: 60 %  
 EUT: Smart Mobile Phone  
 M/N: MB9500  
 Mode: Normal hopping  
 Note:


No.	Freq. (MHz)	Reading Level (dBuV)			Correct Factor	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.5700	32.91		9.30	10.34	43.25		19.64	56.00	46.00	-12.75	-26.36	P	
2	1.3340	29.96		8.69	10.38	40.34		19.07	56.00	46.00	-15.66	-26.93	P	
3	3.3580	29.40		5.30	10.52	39.92		15.82	56.00	46.00	-16.08	-30.18	P	
4	3.9460	30.00		5.13	10.44	40.44		15.57	56.00	46.00	-15.56	-30.43	P	
5	6.3459	29.16		5.42	10.29	39.45		15.71	60.00	50.00	-20.55	-34.29	P	
6	19.7499	26.30		17.46	10.11	36.41		27.57	60.00	50.00	-23.59	-22.43	P	

## APPENDIX I: PHOTOGRAPHS OF THE TEST SETUP

### LINE CONDUCTED EMISSION TEST SETUP




### RADIATED EMISSION TEST SETUP

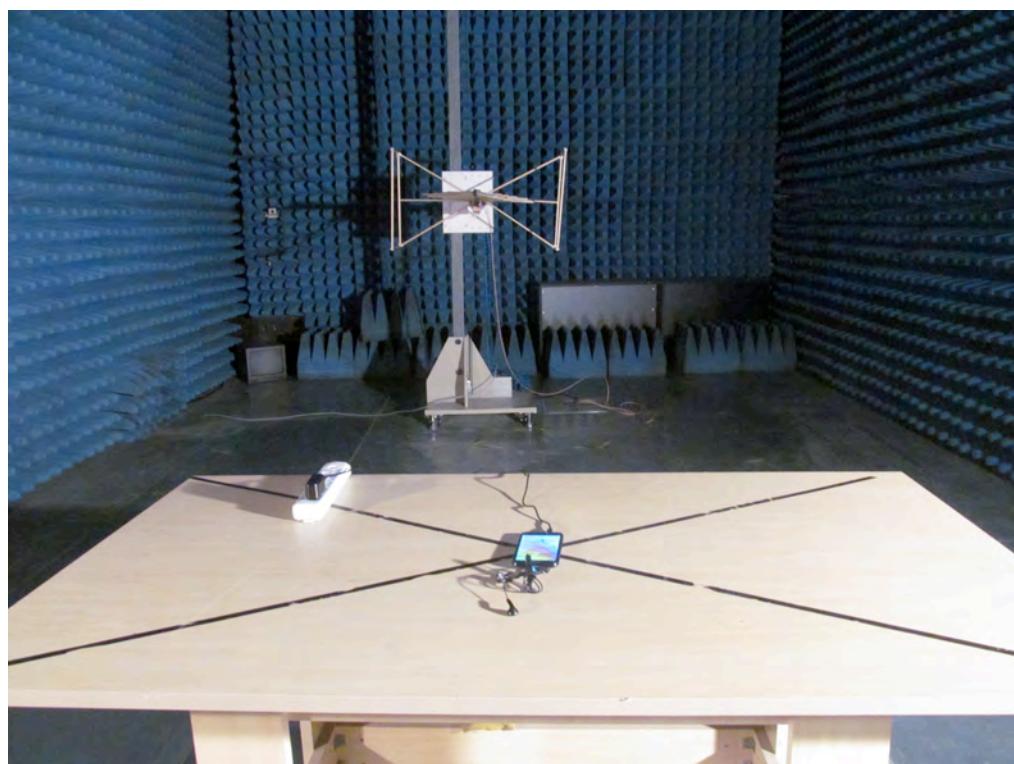

**APPENDIX II: PHOTOGRAPHS OF THE EUT**  
**TOTAL VIEW OF EUT**



TOP VIEW OF EUT

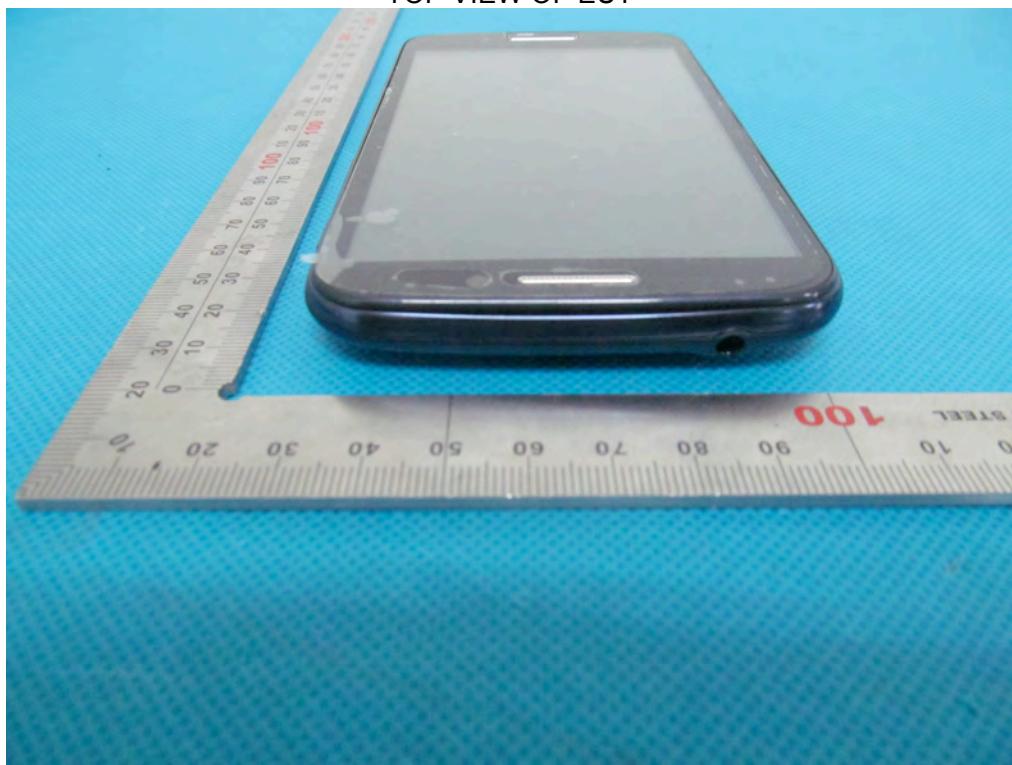


BOTTOM VIEW OF EUT



FRONT VIEW OF EUT



BACK VIEW OF EUT

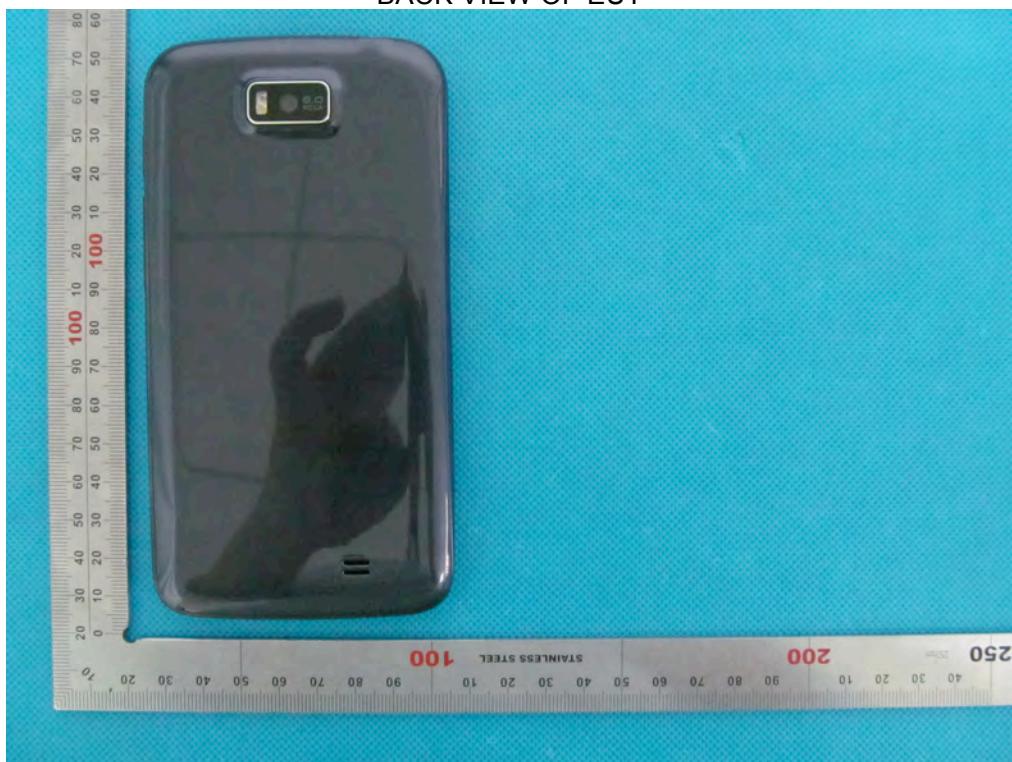

LEFT VIEW OF EUT



RIGHT VIEW OF EUT



WIFI&BT  
Antenna



OPEN VIEW OF EUT-1


OPEN VIEW OF EUT-2




OPEN VIEW OF EUT-3



INTERNAL VIEW OF EUT-1

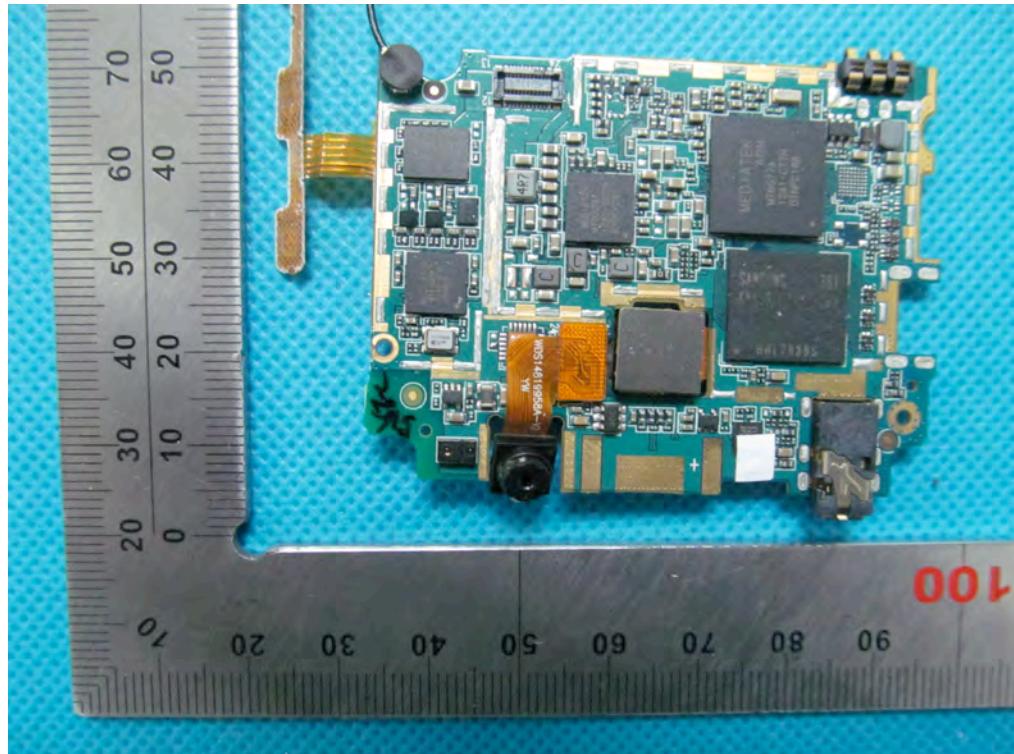

INTERNAL VIEW OF EUT-2

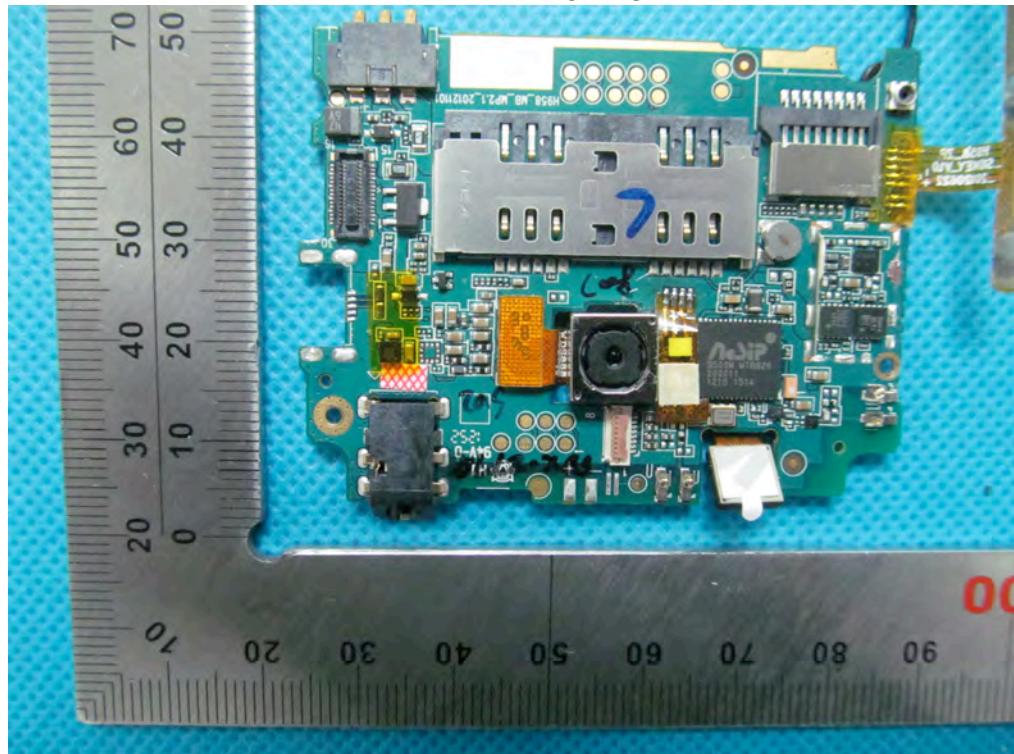

----END OF REPORT----