

APPLICATION CERTIFICATION FCC Part 15C

On Behalf of
Kintech Co., Ltd.

MID
Model No.: KW-PC70XXA

FCC ID: BRCPC7001A

Prepared for : Kintech Co., Ltd.
Address : 1F-5F, Bldg 22, Chen Tian Industrial Zone, Xi Xiang, Bao
An District, Shenzhen, Guang Dong, China

Prepared by : ACCURATE TECHNOLOGY CO., LTD
Address : F1, Bldg. A, Changyuan New Material Port, Keyuan Rd.
Science & Industry Park, Nanshan, Shenzhen, Guangdong
P.R. China

Tel: (0755) 26503290
Fax: (0755) 26503396

Report Number : ATE20120734
Date of Test : April 13-May 3, 2012
Date of Report : May 3, 2012

TABLE OF CONTENTS

Description	Page
Test Report Certification	
1. GENERAL INFORMATION	5
1.1. Description of Device (EUT).....	5
1.2. Description of Test Facility	6
1.3. Measurement Uncertainty	6
2. MEASURING DEVICE AND TEST EQUIPMENT	7
3. OPERATION OF EUT DURING TESTING	8
3.1. Operating Mode	8
3.2. Configuration and peripherals	9
4. TEST PROCEDURES AND RESULTS	10
5. 6DB BANDWIDTH MEASUREMENT	11
5.1. Block Diagram of Test Setup.....	11
5.2. The Requirement For Section 15.247(a)(2).....	11
5.3. EUT Configuration on Measurement	11
5.4. Operating Condition of EUT	11
5.5. Test Procedure	12
5.6. Test Result	12
6. MAXIMUM PEAK OUTPUT POWER	23
6.1. Block Diagram of Test Setup.....	23
6.2. The Requirement For Section 15.247(b)(3).....	23
6.3. EUT Configuration on Measurement	23
6.4. Operating Condition of EUT	23
6.5. Test Procedure	24
6.6. Test Result	24
7. POWER SPECTRAL DENSITY MEASUREMENT	35
7.1. Block Diagram of Test Setup.....	35
7.2. The Requirement For Section 15.247(e).....	35
7.3. EUT Configuration on Measurement	35
7.4. Operating Condition of EUT	35
7.5. Test Procedure	36
7.6. Test Result	36
8. BAND EDGE COMPLIANCE TEST	47
8.1. Block Diagram of Test Setup.....	47
8.2. The Requirement For Section 15.247(d)	47
8.3. EUT Configuration on Measurement	47
8.4. Operating Condition of EUT	48
8.5. Test Procedure	48
8.6. Test Result	49
9. RADIATED SPURIOUS EMISSION TEST	74
9.1. Block Diagram of Test Setup.....	74
9.2. The Limit For Section 15.247(d)	75
9.3. Restricted bands of operation	75
9.4. Configuration of EUT on Measurement	76
9.5. Operating Condition of EUT	76

9.6.	Test Procedure	76
9.7.	The Field Strength of Radiation Emission Measurement Results	77
10.	CONDUCTED SPURIOUS EMISSION COMPLIANCE TEST	149
10.1.	Block Diagram of Test Setup.....	149
10.2.	The Requirement For Section 15.247(d)	149
10.3.	EUT Configuration on Measurement	149
10.4.	Operating Condition of EUT	150
10.5.	Test Procedure	150
10.6.	Test Result	150
11.	AC POWER LINE CONDUCTED EMISSION FOR FCC PART 15 SECTION 15.207(A) 160	
11.1.	Block Diagram of Test Setup.....	160
11.2.	The Emission Limit	160
11.3.	Configuration of EUT on Measurement	161
11.4.	Operating Condition of EUT	161
11.5.	Test Procedure	161
11.6.	Power Line Conducted Emission Measurement Results	162
12.	ANTENNA REQUIREMENT.....	165
12.1.	The Requirement	165
12.2.	Antenna Construction	165

Test Report Certification

Applicant : Kintech Co., Ltd.
Manufacturer : Kin Wei Technology(Shenzhen) Ltd.
EUT Description : MID
(A) MODEL NO.: KW-PC70XXA
(B) SERIAL NO.: N/A
(C) POWER SUPPLY: DC 3.7V (Li-polymer battery);
AC 120V/60HZ (Adapter)

Measurement Procedure Used:

FCC Rules and Regulations Part 15 Subpart C Section 15.247
ANSI C63.4: 2003

The device described above is tested by ACCURATE TECHNOLOGY CO. LTD to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C Section 15.247 limits. The measurement results are contained in this test report and ACCURATE TECHNOLOGY CO. LTD is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC requirements.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of ACCURATE TECHNOLOGY CO. LTD.

Date of Test : April 13-May 3, 2012

Prepared by :

Apple Lv

(Engineer)

Approved & Authorized Signer :

Heinrich

(Manager)

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

EUT	:	MID
Model Number	:	KW-PC70XXA (Note: XX=01-99; KW-PC7001A, KW-PC7002A, KW-PC7003A, ..., KW-PC7099A These samples are same except for the appearance is difference. So we prepare the KW-PC7001A for EMC test.)
Frequency Range	:	2412-2462MHz
Number of Channels	:	11
Antenna Gain	:	0dBi
Power Supply	:	DC 3.7V (Li-polymer battery); AC 120V/60Hz (Adaptor input)
Adapter	:	Model number: JKY36-SP0502000 Input: AC 100-240V; 50/60Hz Output: DC 5V; 2000mA Output line: Non-shielded, Non-detachable, 1.4m
Data Rate	:	802.11b: 11 Mbps 802.11g: 54 Mbps 802.11n: 150 Mbps
Applicant	:	Kintech Co., Ltd.
Address	:	1F-5F, Bldg 22, Chen Tian Industrial Zone, Xi Xiang, Bao An District, Shenzhen, Guang Dong, China
Manufacturer	:	Kin Wei Technology(Shenzhen) Ltd.
Address	:	Bldg. 22, Chentian Industrial Zone, Baomin 2 nd Road, Xixiang, Bao'an District, Shenzhen, China
Date of sample received	:	April 10, 2012
Date of Test	:	April 13-May 3, 2012

1.2. Description of Test Facility

EMC Lab : Accredited by TUV Rheinland Shenzhen

Listed by FCC
The Registration Number is 752051

Listed by Industry Canada
The Registration Number is 5077A-2

Accredited by China National Accreditation Committee
for Laboratories
The Certificate Registration Number is L3193

Name of Firm : ACCURATE TECHNOLOGY CO. LTD

Site Location : F1, Bldg. A, Changyuan New Material Port, Keyuan Rd.
Science & Industry Park, Nanshan, Shenzhen, Guangdong
P.R. China

1.3. Measurement Uncertainty

Conducted Emission Expanded Uncertainty = 2.23dB, k=2

Radiated emission expanded uncertainty = 3.08dB, k=2
(9kHz-30MHz)

Radiated emission expanded uncertainty = 4.42dB, k=2
(30MHz-1000MHz)

Radiated emission expanded uncertainty = 4.06dB, k=2
(Above 1GHz)

2. MEASURING DEVICE AND TEST EQUIPMENT

Table 1: List of Test and Measurement Equipment

Kind of equipment	Manufacturer	Type	S/N	Calibrated dates	Calibrated until
EMI Test Receiver	Rohde&Schwarz	ESCS30	100307	Jan. 8, 2012	Jan. 7, 2013
EMI Test Receiver	Rohde&Schwarz	ESPI3	101526/003	Jan. 8, 2012	Jan. 7, 2013
Spectrum Analyzer	Agilent	E7405A	MY45115511	Jan. 8, 2012	Jan. 7, 2013
Pre-Amplifier	Rohde&Schwarz	CBLU118354 0-01	3791	Jan. 8, 2012	Jan. 7, 2013
Loop Antenna	Schwarzbeck	FMZB1516	1516131	Jan. 8, 2012	Jan. 7, 2013
Bilog Antenna	Schwarzbeck	VULB9163	9163-323	Jan. 8, 2012	Jan. 7, 2013
Horn Antenna	Schwarzbeck	BBHA9120D	9120D-655	Jan. 8, 2012	Jan. 7, 2013
Horn Antenna	Schwarzbeck	BBHA9170	9170-359	Jan. 8, 2012	Jan. 7, 2013
LISN	Rohde&Schwarz	ESH3-Z5	100305	Jan. 8, 2012	Jan. 7, 2013
LISN	Schwarzbeck	NSLK8126	8126431	Jan. 8, 2012	Jan. 7, 2013

3. OPERATION OF EUT DURING TESTING

3.1.Operating Mode

The mode is used: **802.11b Transmitting mode**

Low Channel: 2412MHz

Middle Channel: 2437MHz

High Channel: 2462MHz

802.11g Transmitting mode

Low Channel: 2412MHz

Middle Channel: 2437MHz

High Channel: 2462MHz

802.11n Transmitting mode



Low Channel: 2412MHz

Middle Channel: 2437MHz

High Channel: 2462MHz

Charging

3.2.Configuration and peripherals

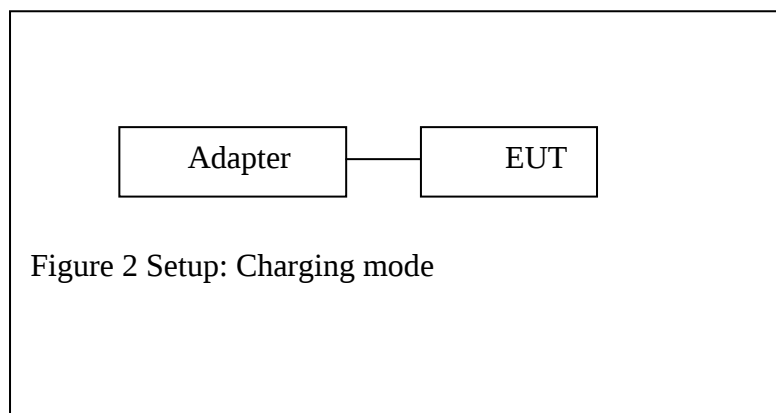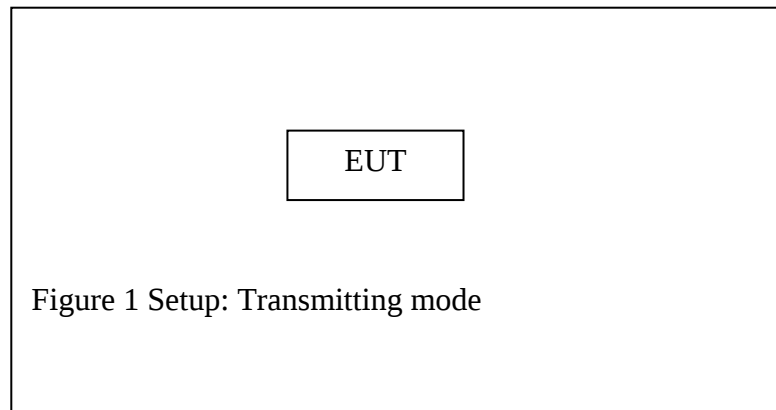


4. TEST PROCEDURES AND RESULTS

FCC Rules	Description of Test	Result
Section 15.247(a)(2)	6dB Bandwidth Test	Compliant
Section 15.247(e)	Power Spectral Density Test	Compliant
Section 15.247(b)(3)	Maximum Peak Output Power Test	Compliant
Section 15.247(d)	Band Edge Compliance Test	Compliant
Section 15.247(d) Section 15.209	Radiated Spurious Emission Test	Compliant
Section 15.247(d)	Conducted Spurious Emission Test	Compliant
Section 15.207	AC Power Line Conducted Emission Test	Compliant
Section 15.203	Antenna Requirement	Compliant

5. 6DB BANDWIDTH MEASUREMENT

5.1. Block Diagram of Test Setup

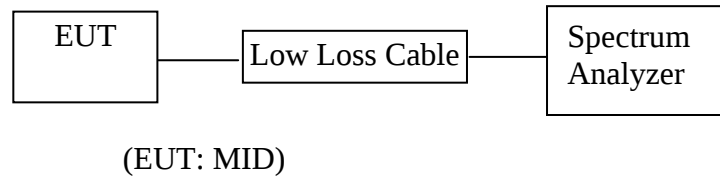

5.2. The Requirement For Section 15.247(a)(2)

Section 15.247(a)(2): Systems using digital modulation techniques may operate in the 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

5.3. EUT Configuration on Measurement

The following equipment are installed on the emission measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

5.3.1. MID (EUT)

Model Number	:	KW-PC7001A
Serial Number	:	N/A
Manufacturer	:	Kin Wei Technology(Shenzhen) Ltd.

5.4. Operating Condition of EUT

5.4.1. Setup the EUT and simulator as shown as Section 5.1.

5.4.2. Turn on the power of all equipment.

5.4.3. Let the EUT work in TX modes measure it. The transmit frequency are 2412-2462. We select 2412MHz, 2437MHz, 2462MHz TX frequency to transmit.

5.5. Test Procedure

5.5.1. The transmitter output was connected to the spectrum analyzer through a low loss cable.

5.5.2. Set RBW of spectrum analyzer to 100kHz and VBW to 300kHz.

5.5.3. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

5.6. Test Result

PASS.

Date of Test:	<u>April 26, 2012</u>	Temperature:	<u>25°C</u>
EUT:	<u>MID</u>	Humidity:	<u>50%</u>
Model No.:	<u>KW-PC7001A</u>	Power Supply:	<u>DC 3.7V</u>
Test Mode:	<u>TX</u>	Test Engineer:	<u>Pei</u>

The test was performed with 802.11b

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)
Low	2412	10.76	> 0.5MHz
Middle	2437	10.60	> 0.5MHz
High	2462	10.48	> 0.5MHz

The test was performed with 802.11g


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)
Low	2412	16.60	> 0.5MHz
Middle	2437	16.56	> 0.5MHz
High	2462	16.56	> 0.5MHz

The test was performed with 802.11n


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)
Low	2412	17.76	> 0.5MHz
Middle	2437	17.72	> 0.5MHz
High	2462	17.76	> 0.5MHz

The spectrum analyzer plots are attached as below.


802.11b Channel Low 2412MHz

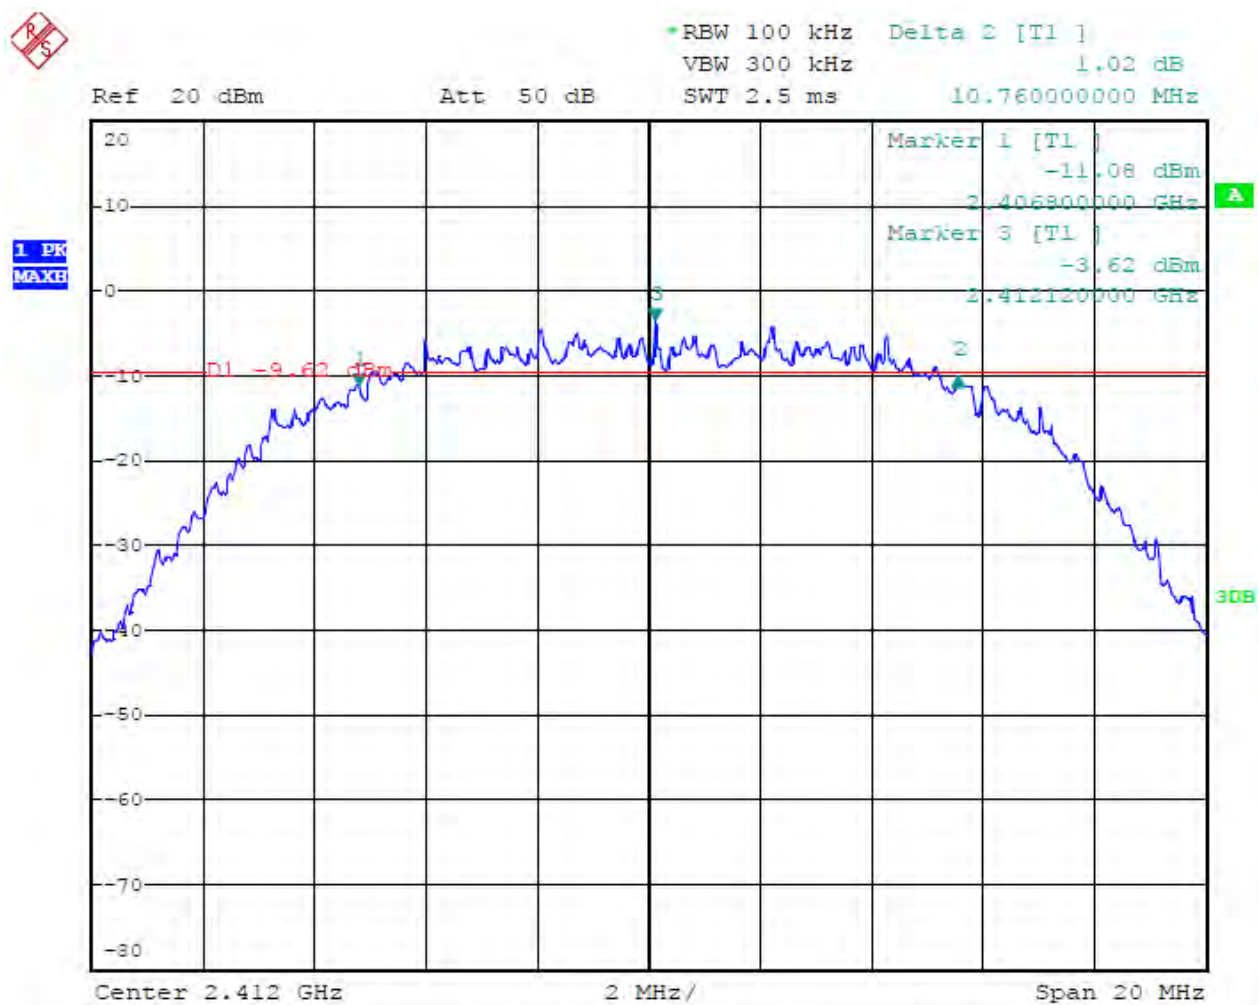


802.11b Channel Middle 2437MHz

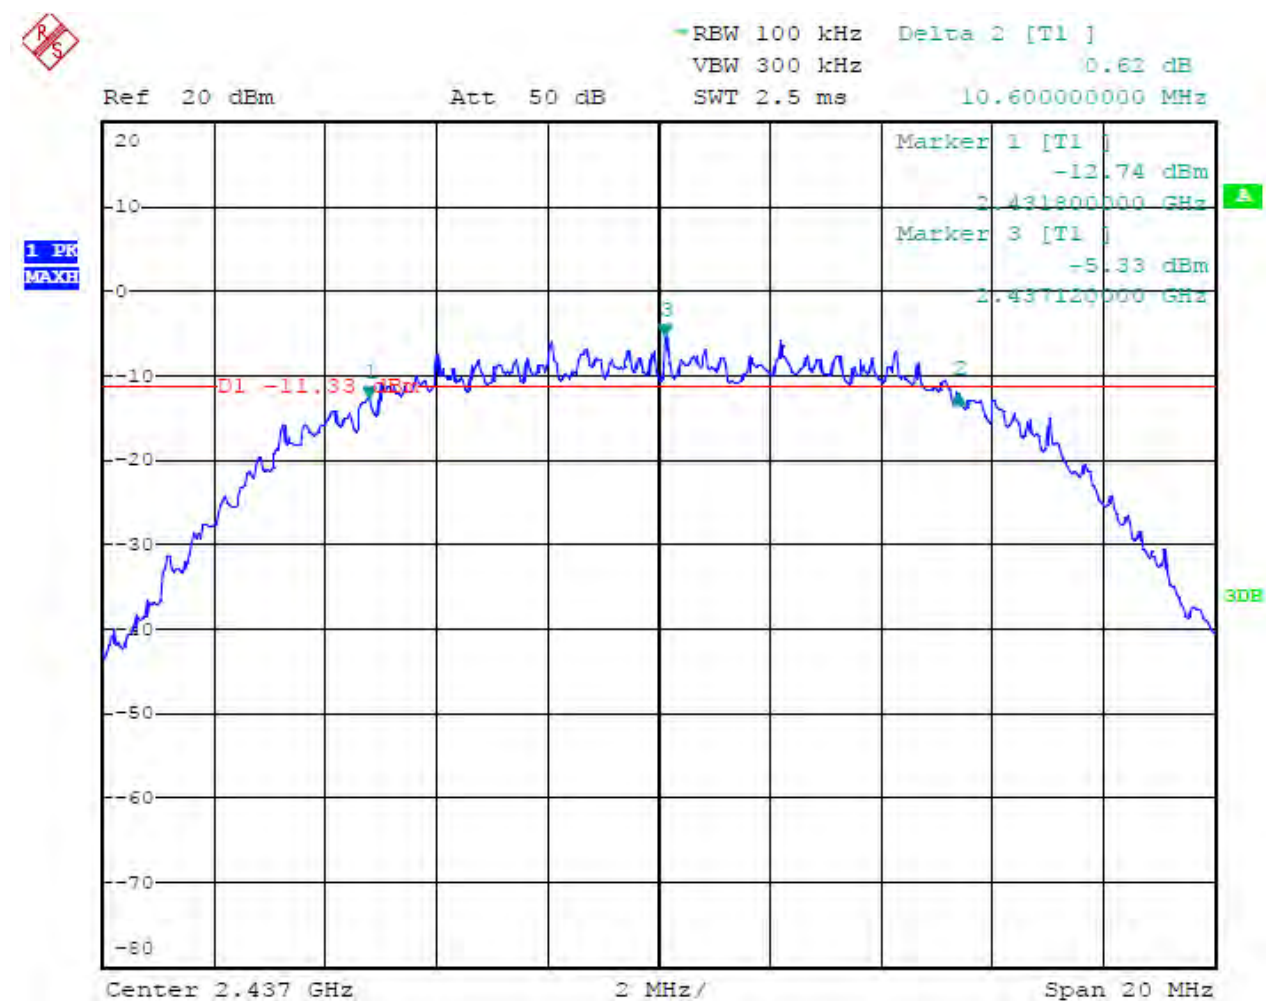


802.11b Channel High 2462MHz

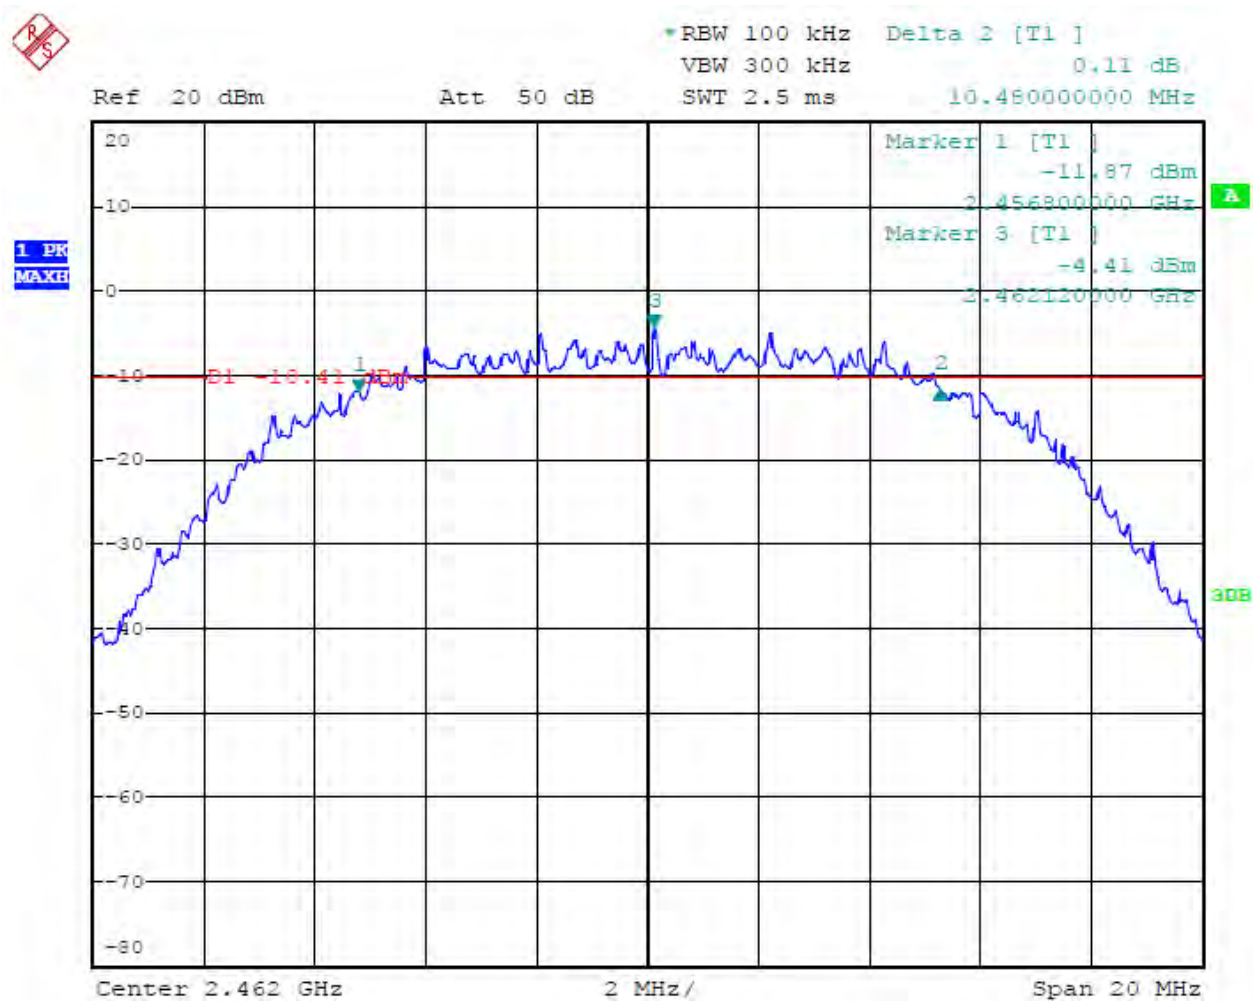


802.11g Channel Low 2412MHz

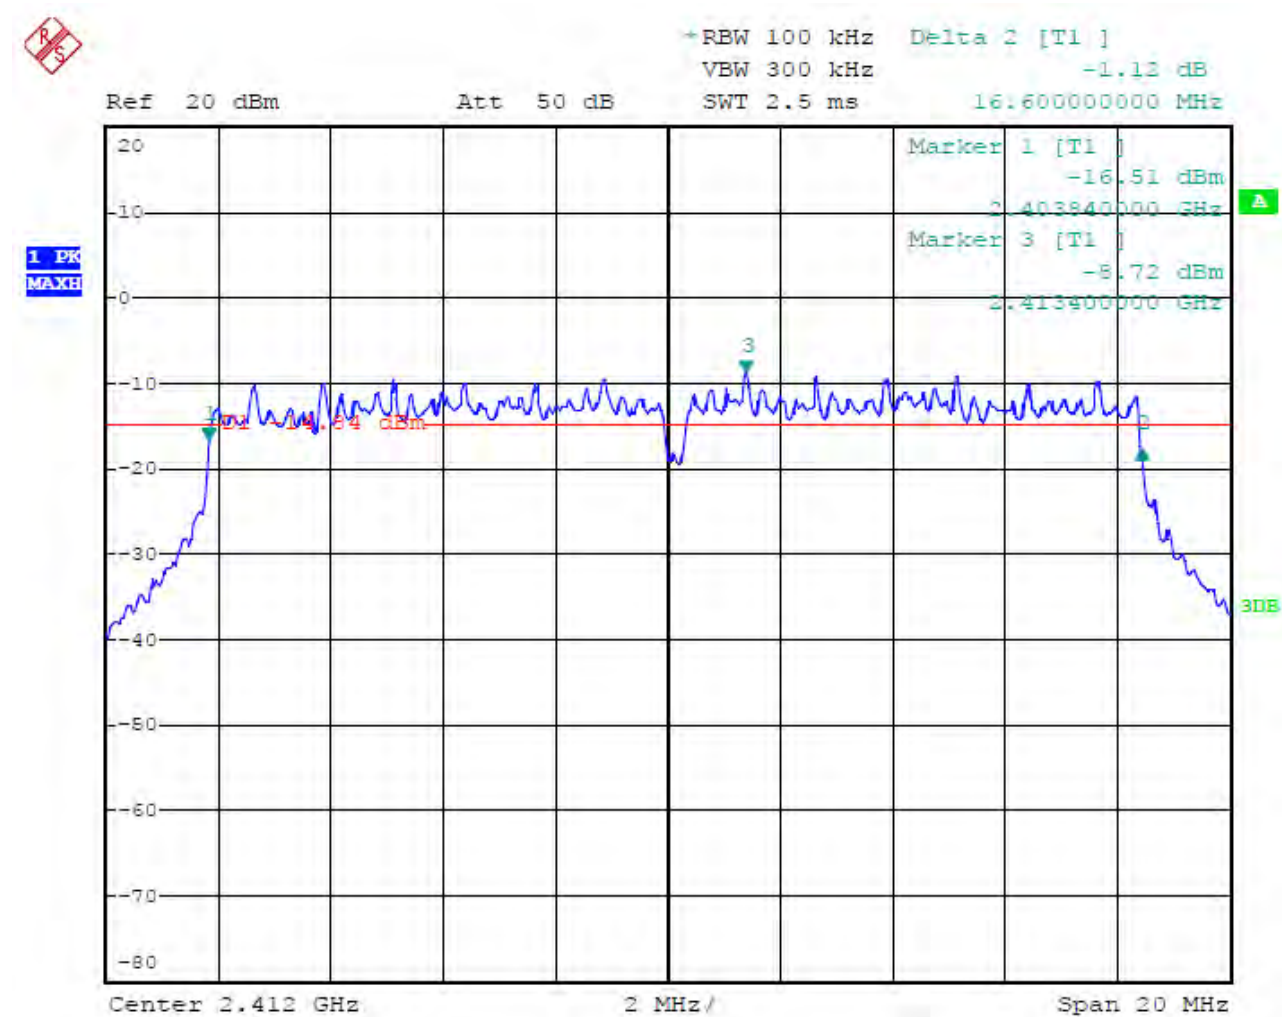


802.11g Channel Middle 2437MHz

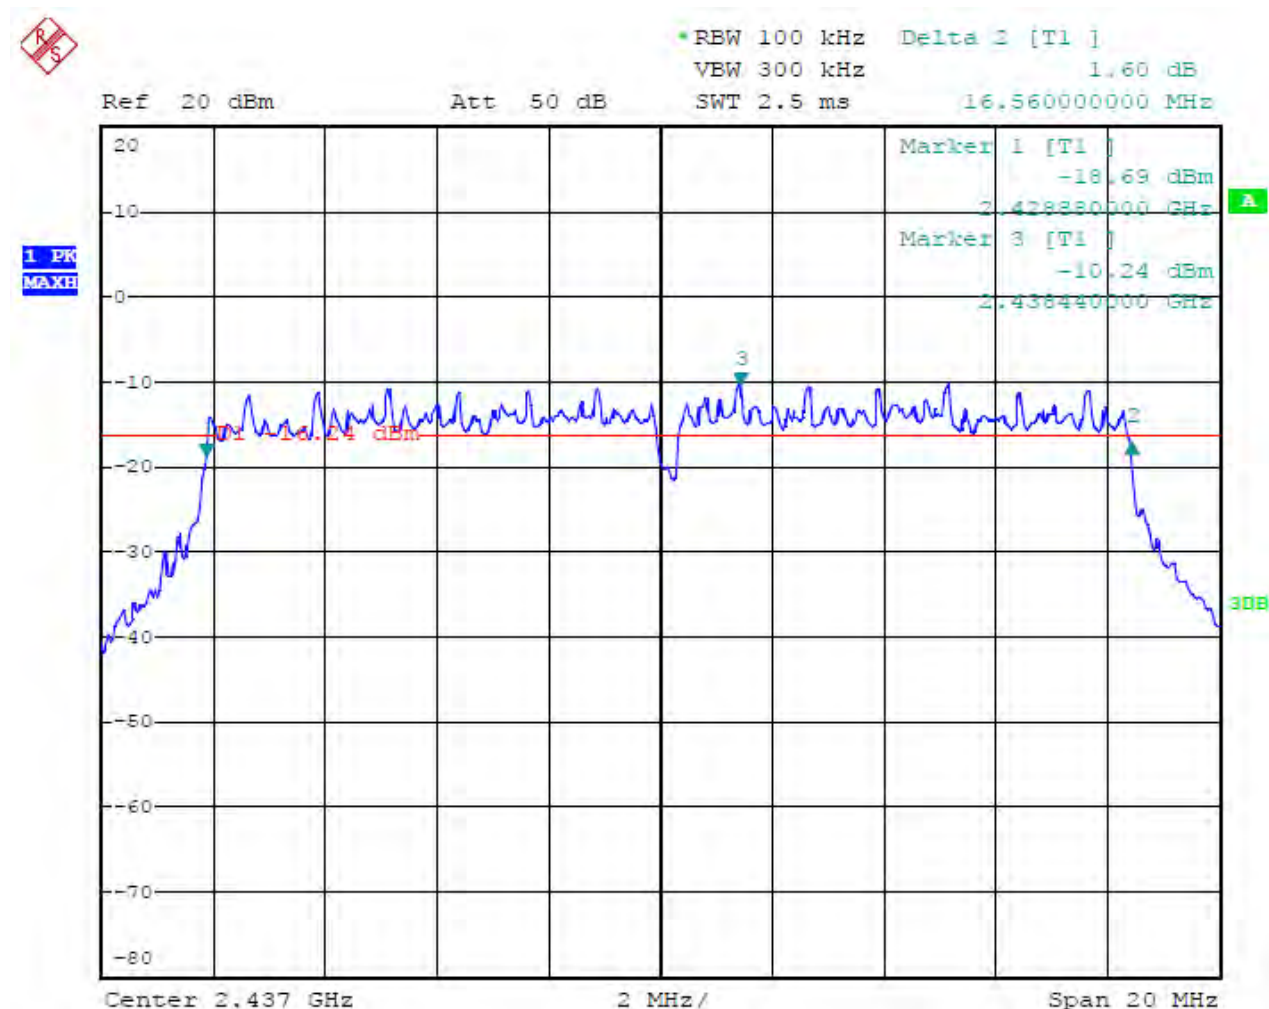


802.11g Channel High 2462MHz

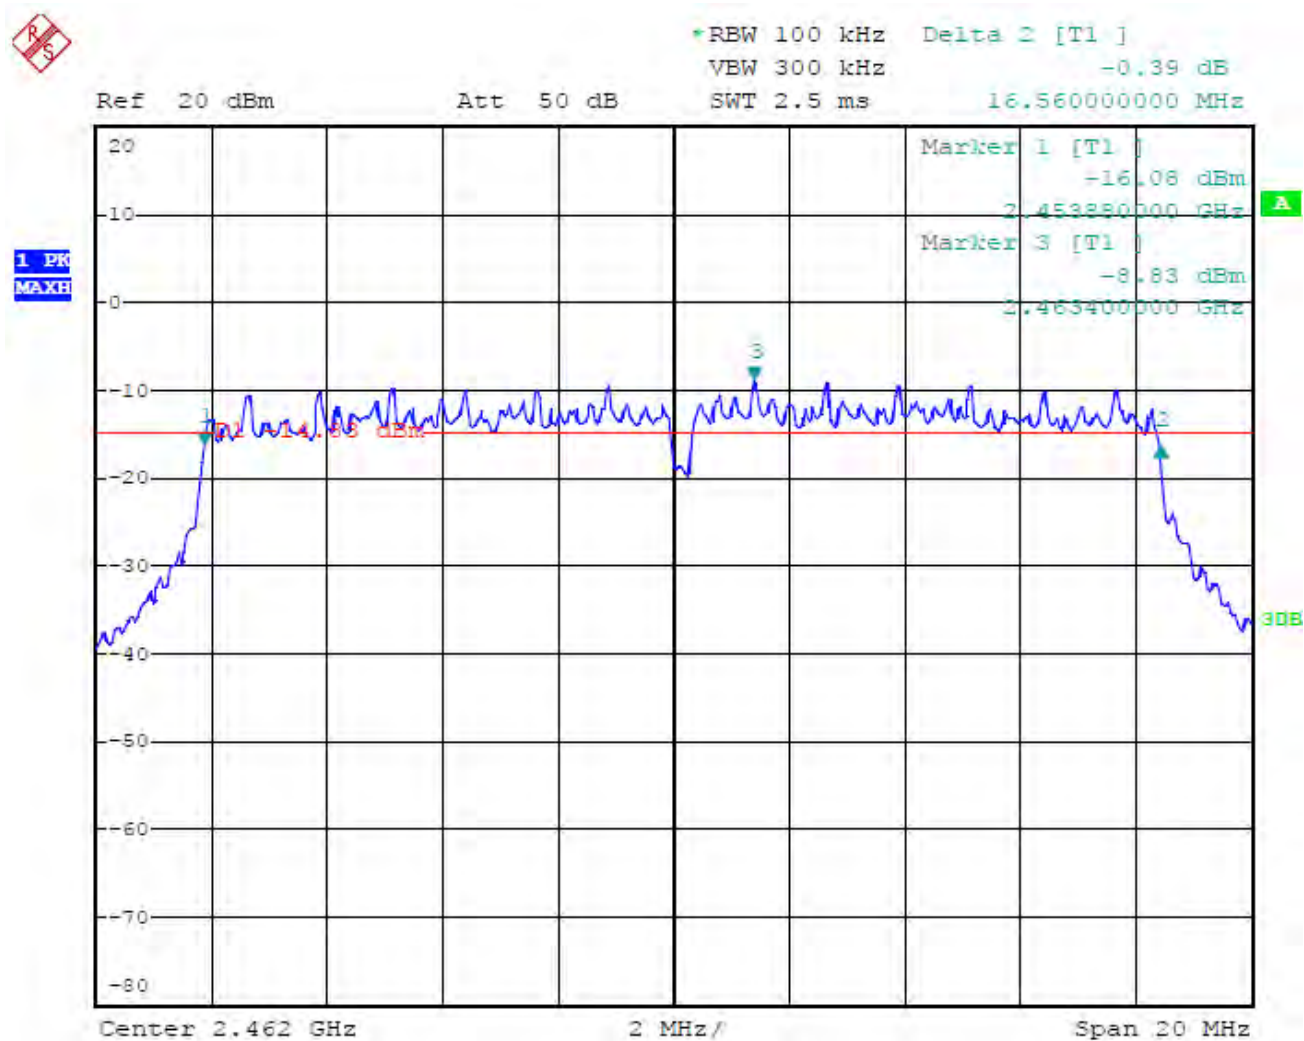


802.11n Channel Low 2412MHz

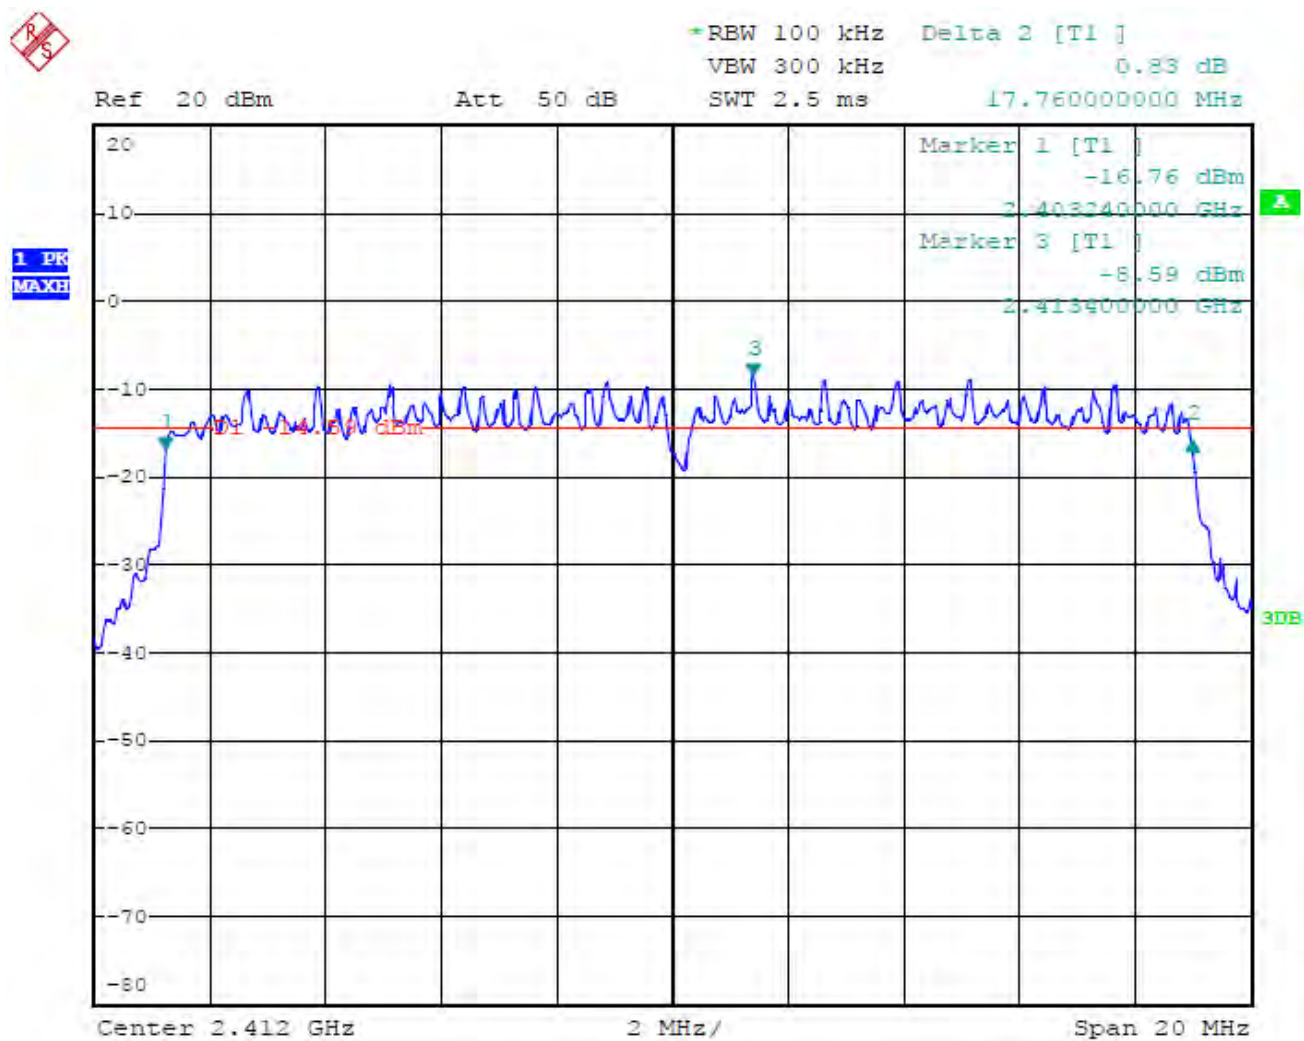

802.11n Channel Low 2437MHz

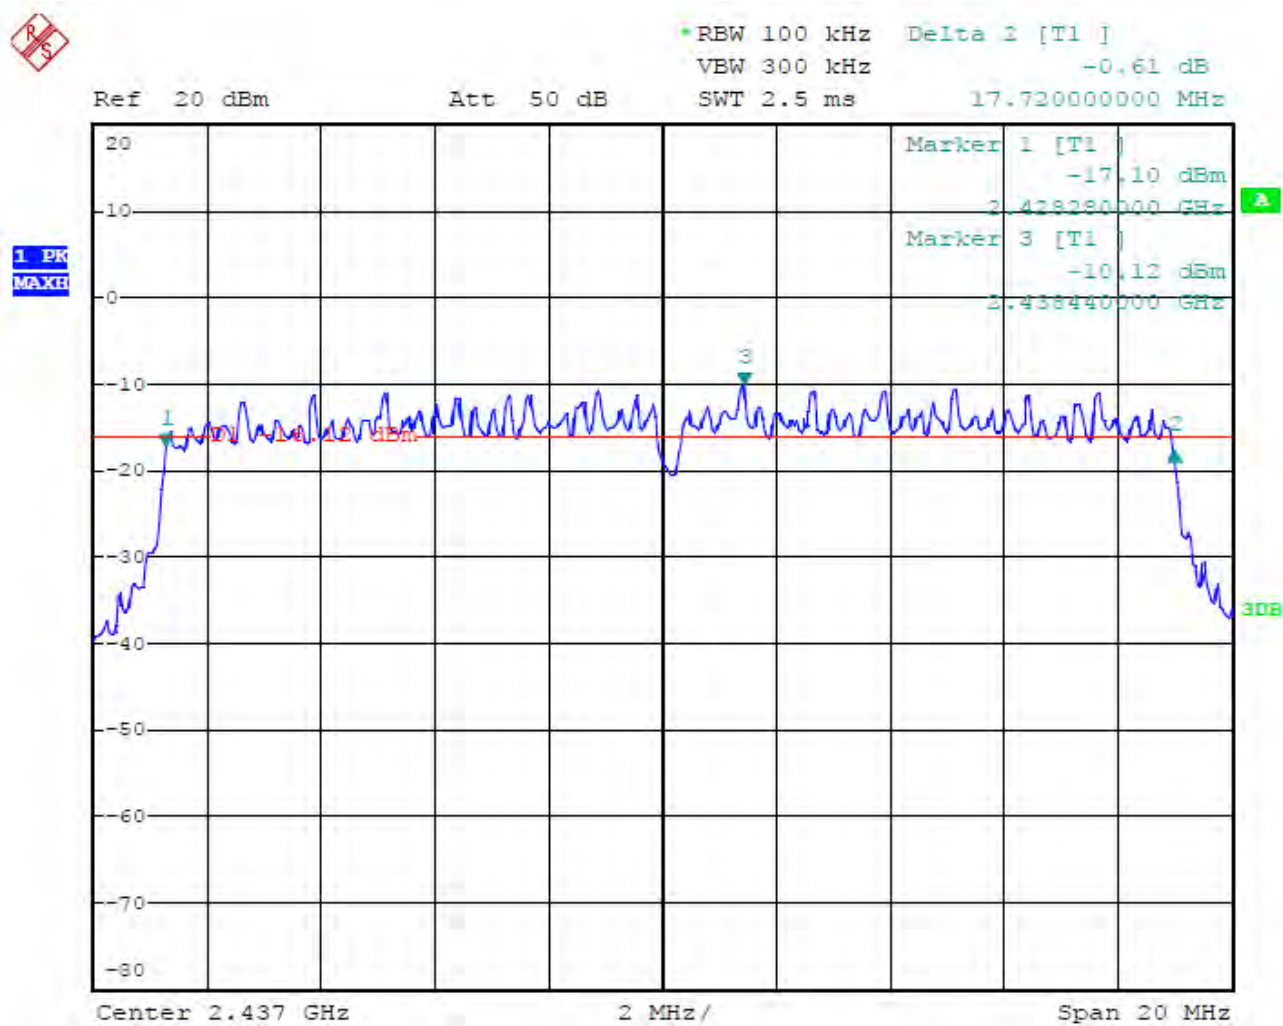


802.11n Channel Low 2462MHz

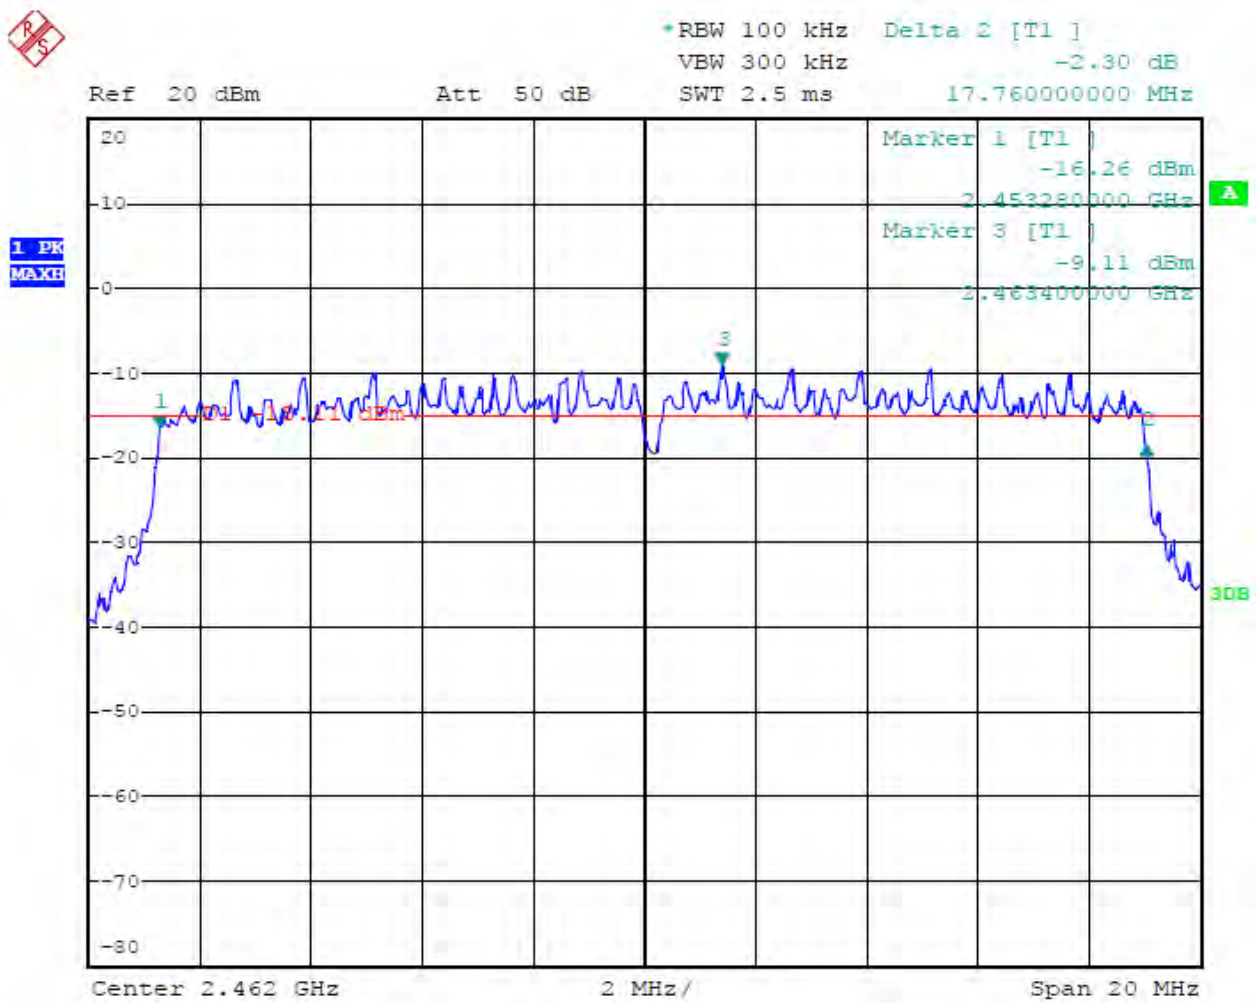

6. MAXIMUM PEAK OUTPUT POWER

6.1. Block Diagram of Test Setup

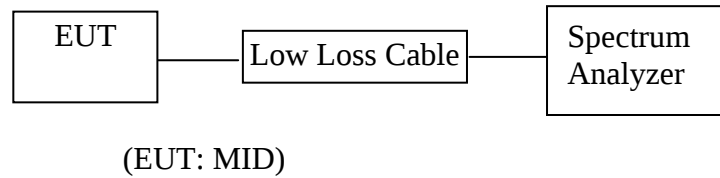

6.2. The Requirement For Section 15.247(b)(3)

Section 15.247(b)(3): For systems using digital modulation in the 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz bands: 1 Watt.

6.3. EUT Configuration on Measurement

The following equipment are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

6.3.1. MID (EUT)

Model Number	:	KW-PC7001A
Serial Number	:	N/A
Manufacturer	:	Kin Wei Technology(Shenzhen) Ltd.

6.4. Operating Condition of EUT

6.4.1. Setup the EUT and simulator as shown as Section 6.1.

6.4.2. Turn on the power of all equipment.

6.4.3. Let the EUT work in TX modes measure it. The transmit frequency are 2412-2462. We select 2412MHz, 2437MHz, 2462MHz TX frequency to transmit.

6.5. Test Procedure

6.5.1. The transmitter output was connected to the spectrum analyzer through a low loss cable.

6.5.2. Set RBW of spectrum analyzer to 1MHz and VBW to 3MHz.

6.5.3. Measurement the maximum peak output power.

6.6. Test Result

PASS.

Date of Test:	<u>April 26, 2012</u>	Temperature:	<u>25°C</u>
EUT:	<u>MID</u>	Humidity:	<u>50%</u>
Model No.:	<u>KW-PC7001A</u>	Power Supply:	<u>DC 3.7V</u>
Test Mode:	<u>TX</u>	Test Engineer:	<u>Pei</u>

The test was performed with 802.11b				
Channel	Frequency (MHz)	Peak Output Power (dBm)	Peak Output Power (mW)	Limits dBm / W
Low	2412	10.95	12.45	30 dBm / 1 W
Middle	2437	9.68	9.29	30 dBm / 1 W
High	2462	10.58	11.43	30 dBm / 1 W

The test was performed with 802.11g				
Channel	Frequency (MHz)	Peak Output Power (dBm)	Peak Output Power (mW)	Limits dBm / W
Low	2412	10.10	10.23	30 dBm / 1 W
Middle	2437	9.00	7.94	30 dBm / 1 W
High	2462	10.01	10.02	30 dBm / 1 W


The test was performed with 802.11n				
Channel	Frequency (MHz)	Peak Output Power (dBm)	Peak Output Power (mW)	Limits dBm / W
Low	2412	9.67	9.27	30 dBm / 1 W
Middle	2437	8.65	7.33	30 dBm / 1 W
High	2462	9.63	9.18	30 dBm / 1 W

The spectrum analyzer plots are attached as below.


802.11b Channel Low 2412MHz




802.11b Channel Middle 2437MHz

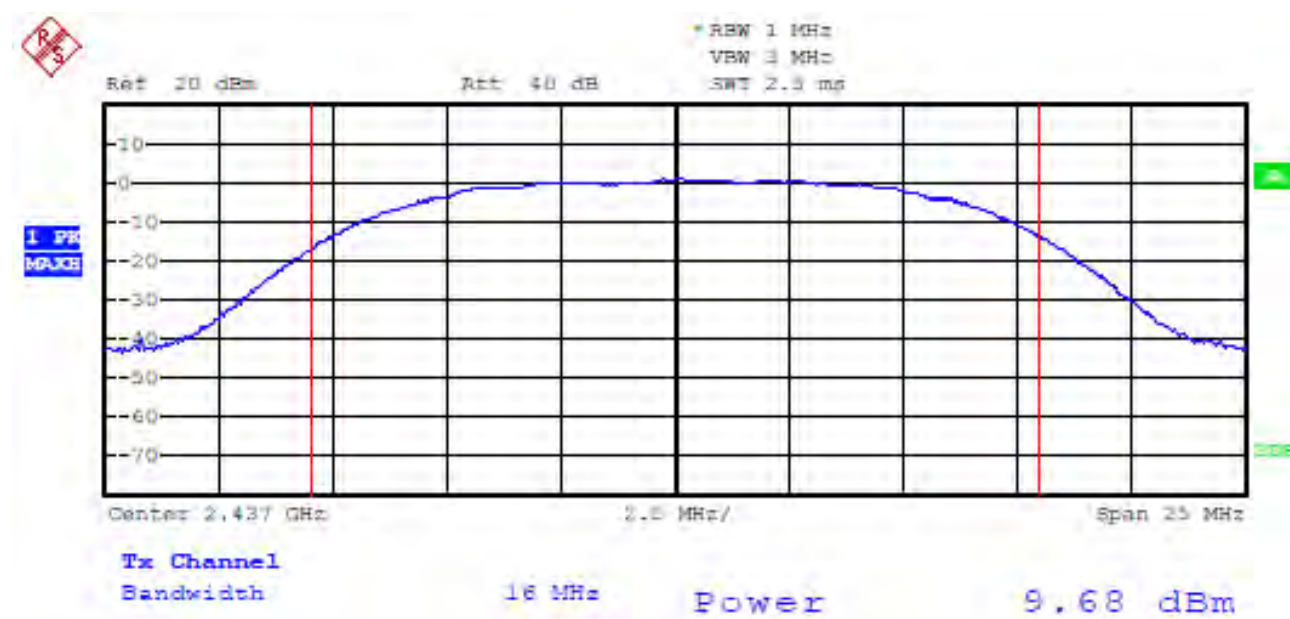


802.11b Channel High 2462MHz

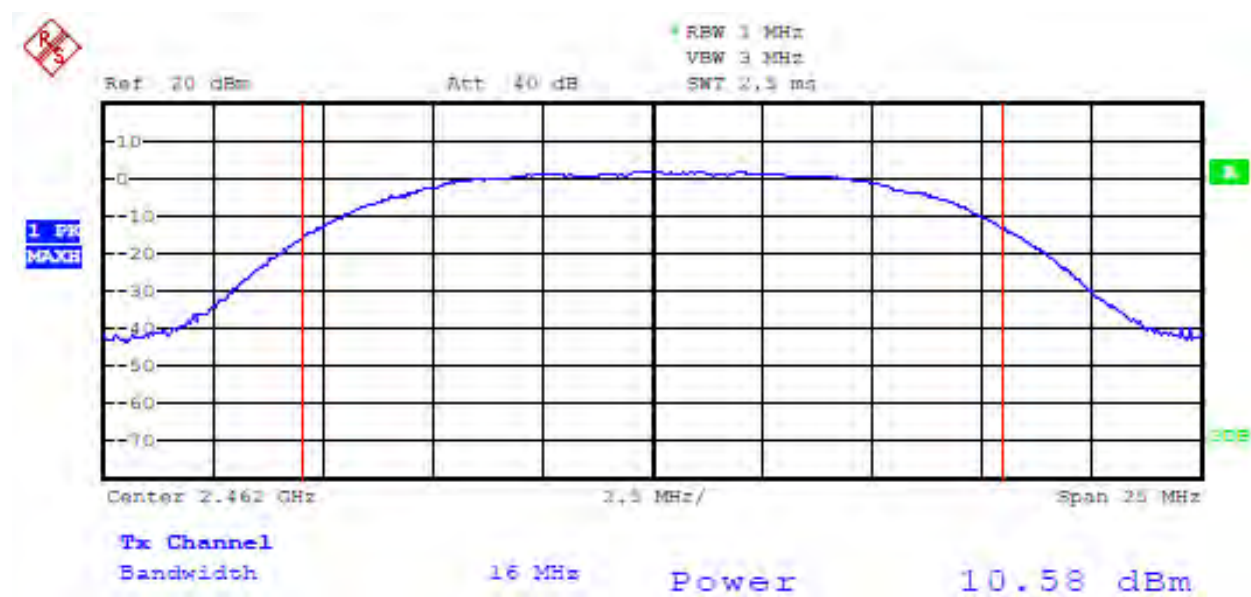


802.11g Channel Low 2412MHz

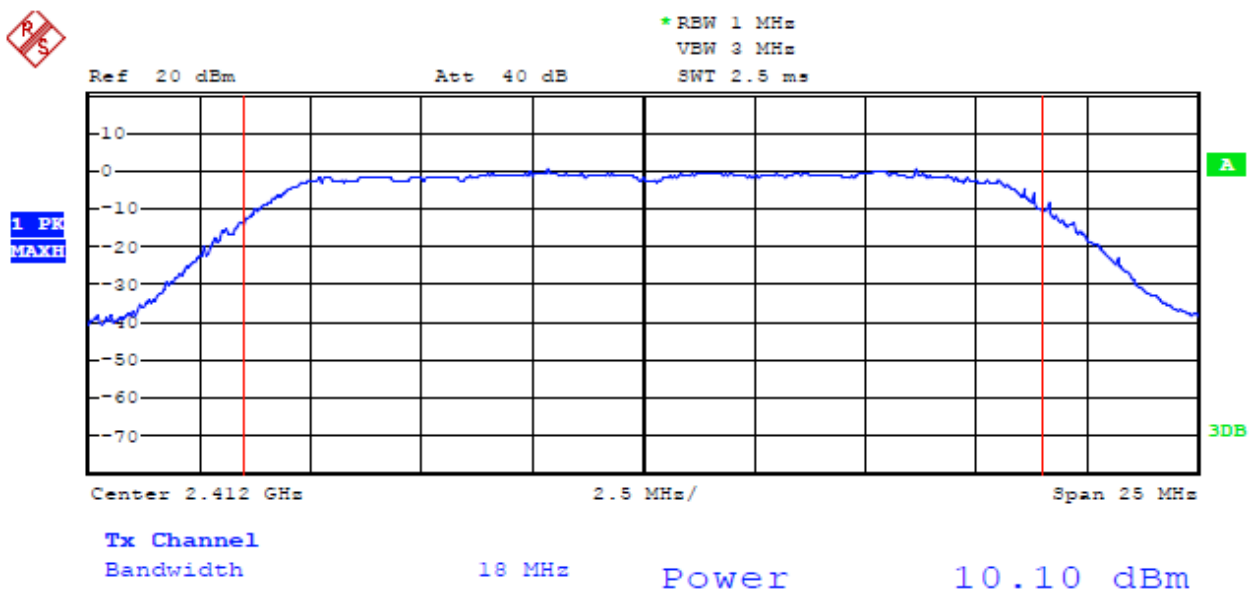


802.11g Channel Middle 2437MHz

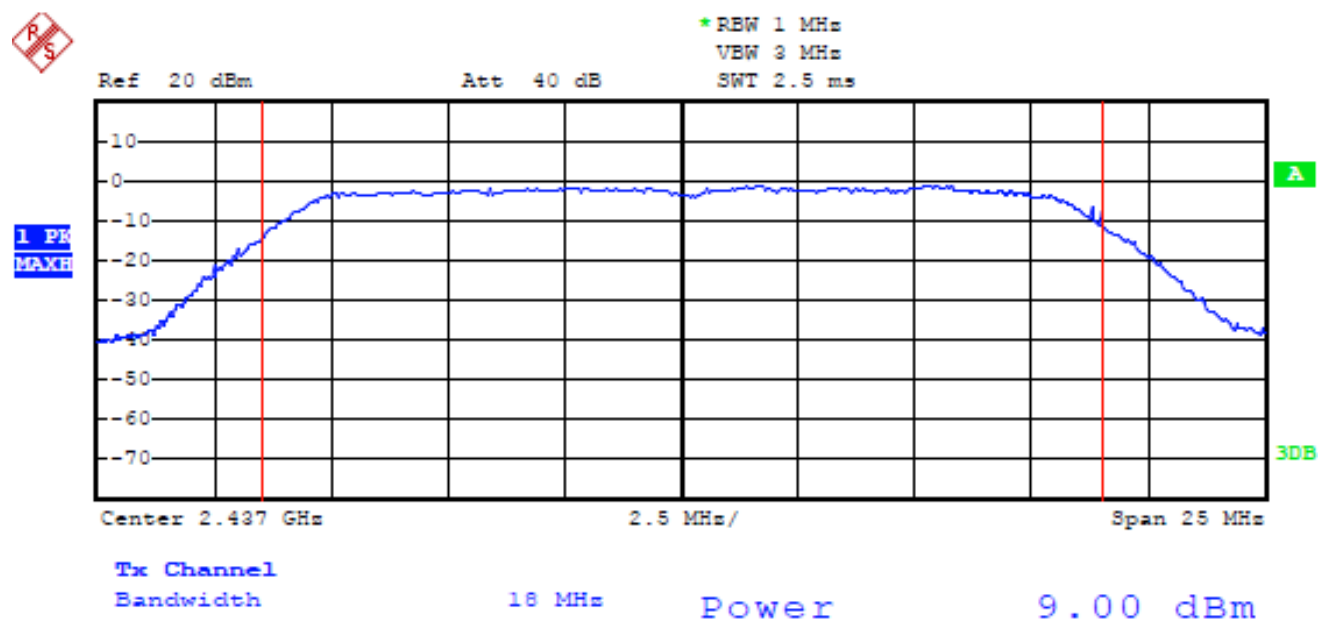


802.11g Channel High 2462MHz

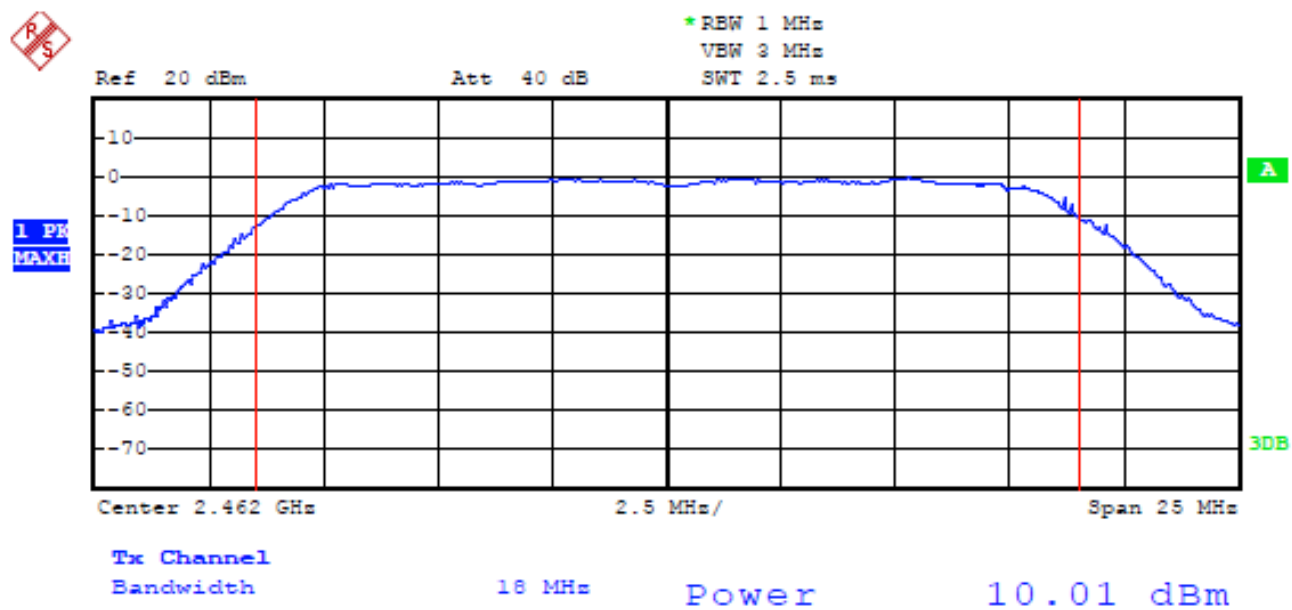


802.11n Channel High 2412MHz

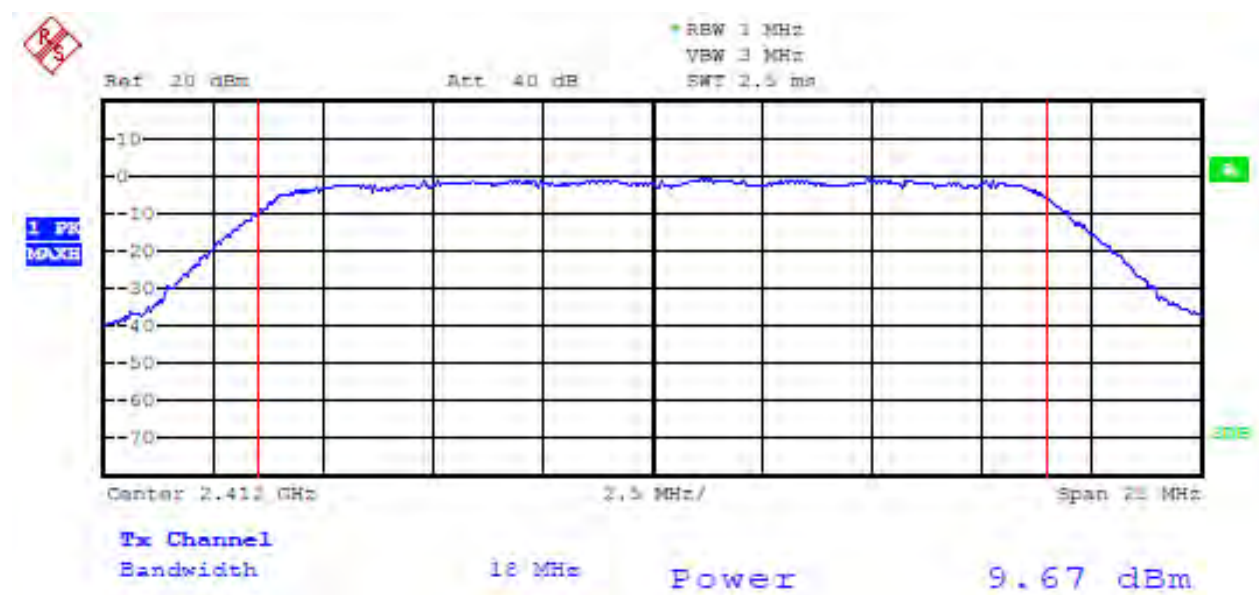

802.11n Channel High 2437MHz

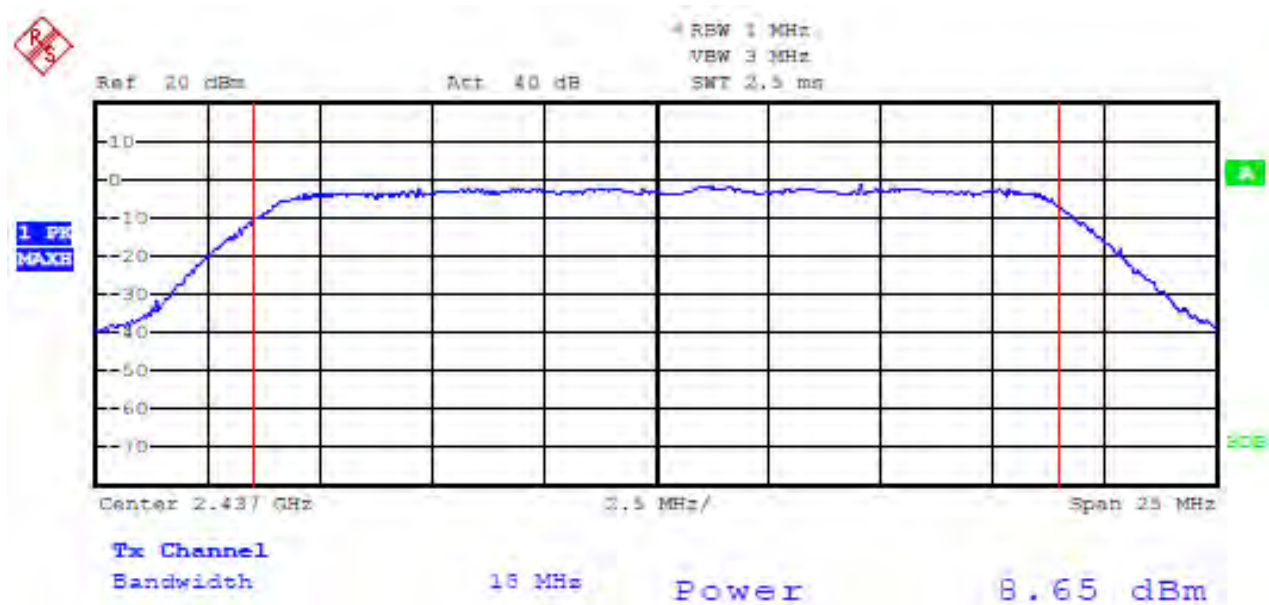


802.11n Channel High 2462MHz

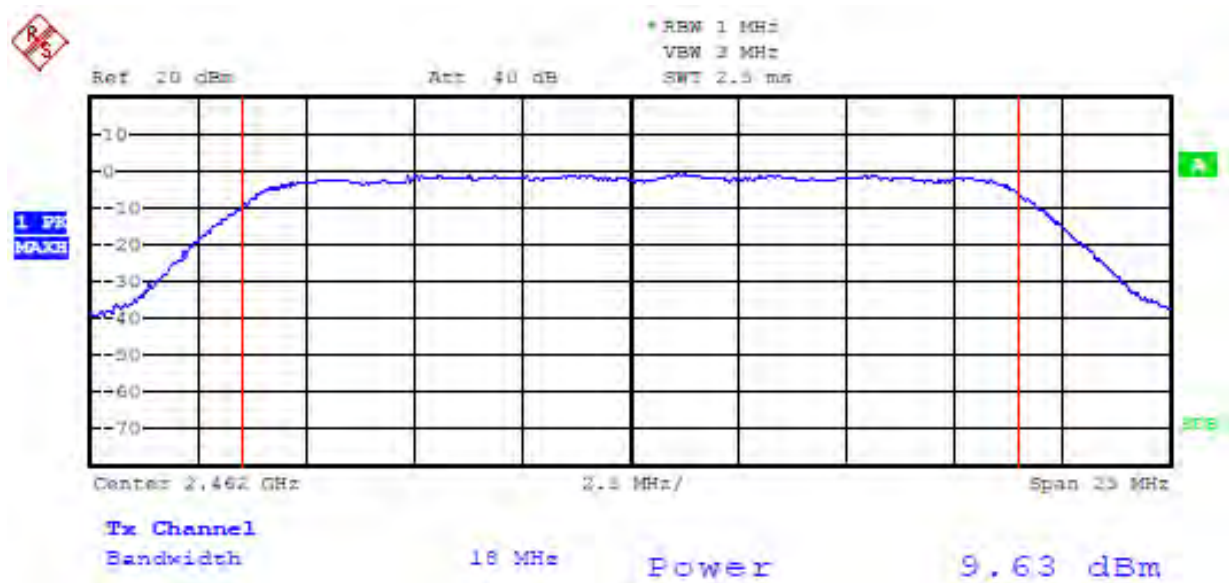

7. POWER SPECTRAL DENSITY MEASUREMENT

7.1. Block Diagram of Test Setup

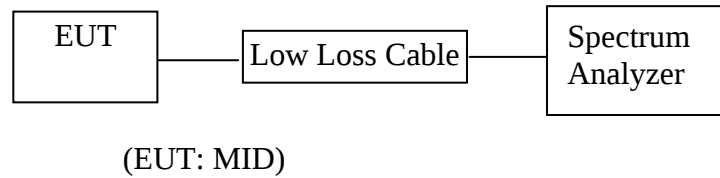

7.2. The Requirement For Section 15.247(e)

Section 15.247(e): For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

7.3. EUT Configuration on Measurement

The following equipment are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

7.3.1. MID (EUT)

Model Number	:	KW-PC7001A
Serial Number	:	N/A
Manufacturer	:	Kin Wei Technology(Shenzhen) Ltd.

7.4. Operating Condition of EUT

7.4.1. Setup the EUT and simulator as shown as Section 7.1.

7.4.2. Turn on the power of all equipment.

7.4.3. Let the EUT work in TX modes measure it. The transmit frequency are 2412-2462. We select 2412MHz, 2437MHz, 2462MHz TX frequency to transmit.

7.5. Test Procedure

7.5.1. The transmitter output was connected to the spectrum analyzer through a low loss cable.

7.5.2. Set RBW of spectrum analyzer to 3kHz and VBW to 10kHz, sweep time = Span/30kHz.

7.5.3. Measurement the maximum power spectral density.

7.6. Test Result

PASS.

Date of Test:	<u>April 26, 2012</u>	Temperature:	<u>25°C</u>
EUT:	<u>MID</u>	Humidity:	<u>50%</u>
Model No.:	<u>KW-PC7001A</u>	Power Supply:	<u>DC 3.7V</u>
Test Mode:	<u>TX</u>	Test Engineer:	<u>Pei</u>


The test was performed with 802.11b			
Channel	Frequency (MHz)	Power Spectral Density (dBm)	Limits (dBm)
Low	2412	-5.37	8 dBm
Middle	2437	-6.61	8 dBm
High	2462	-5.08	8 dBm

The test was performed with 802.11g			
Channel	Frequency (MHz)	Power Spectral Density (dBm)	Limits (dBm)
Low	2412	-24.95	8 dBm
Middle	2437	-26.77	8 dBm
High	2462	-24.99	8 dBm


The test was performed with 802.11n			
Channel	Frequency (MHz)	Power Spectral Density (dBm)	Limits (dBm)
Low	2412	-24.06	8 dBm
Middle	2437	-26.16	8 dBm
High	2462	-25.30	8 dBm

The spectrum analyzer plots are attached as below.


802.11b Channel Low 2412MHz

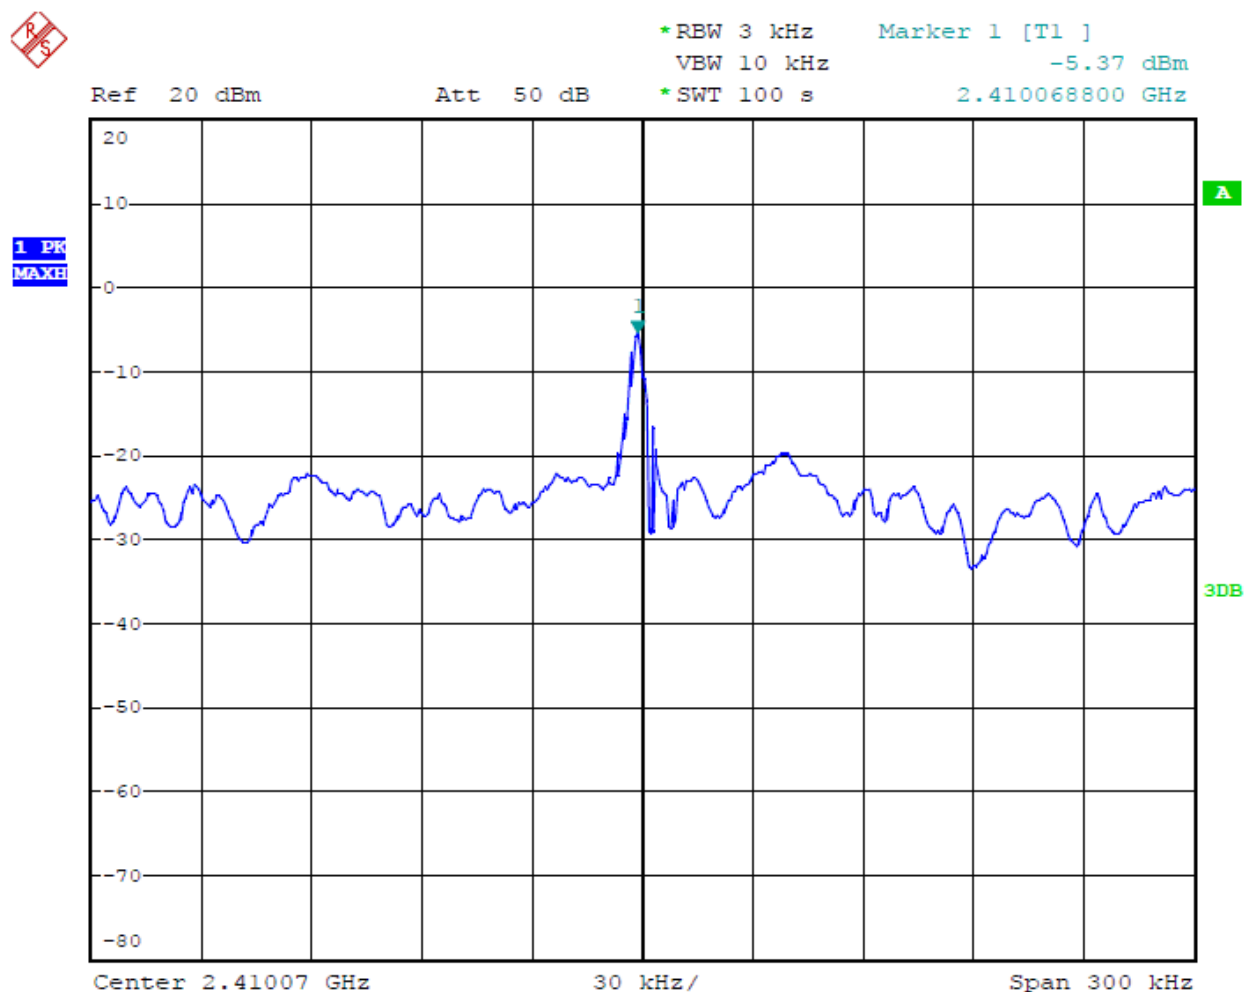

802.11b Channel Middle 2437MHz

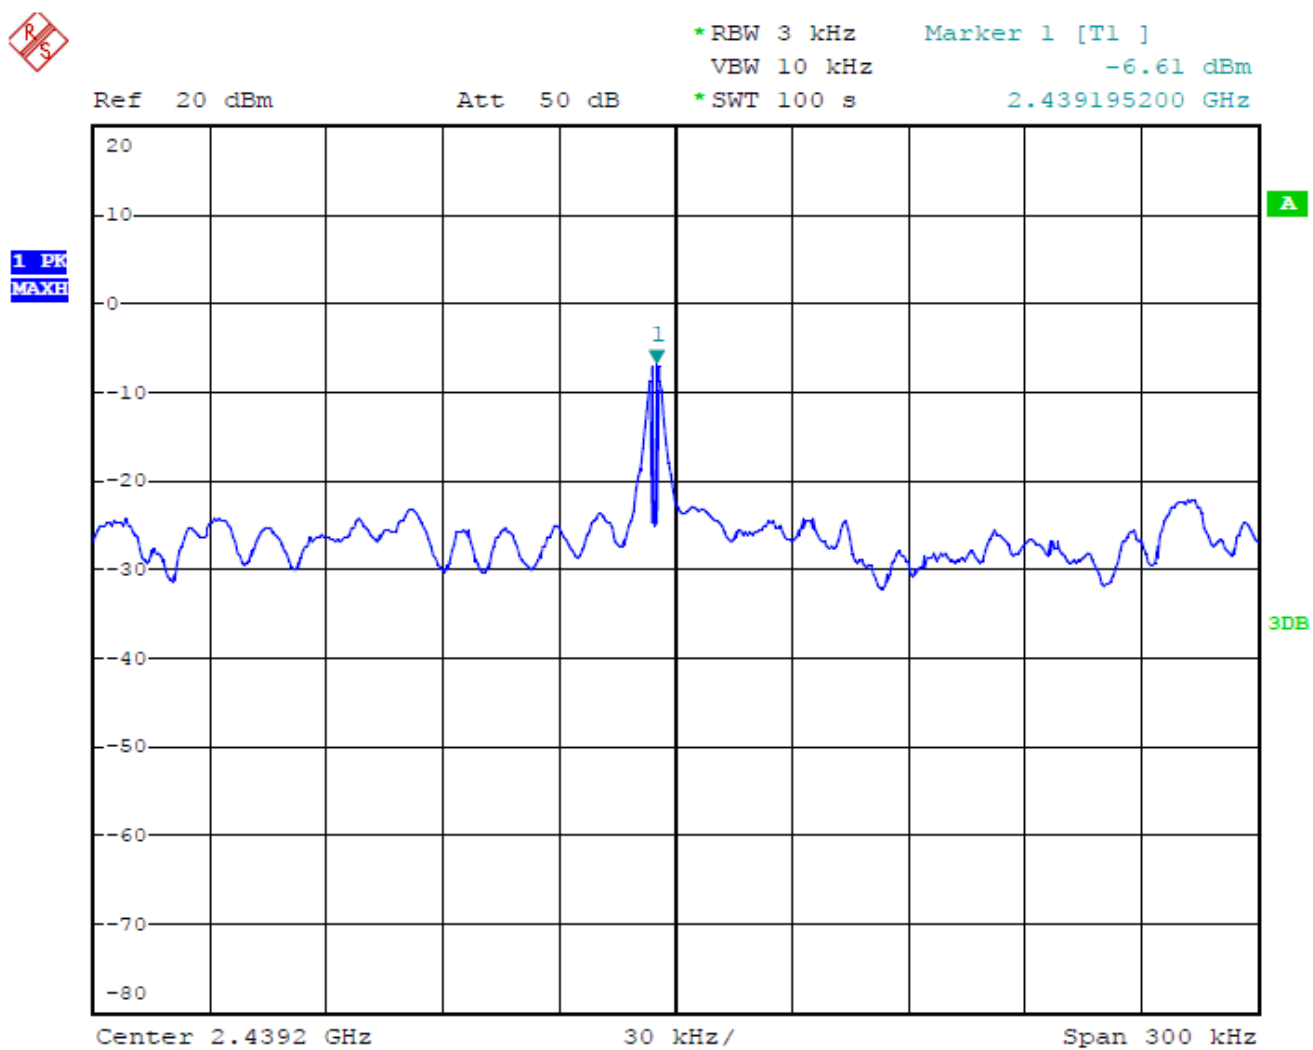

802.11b Channel High 2462MHz

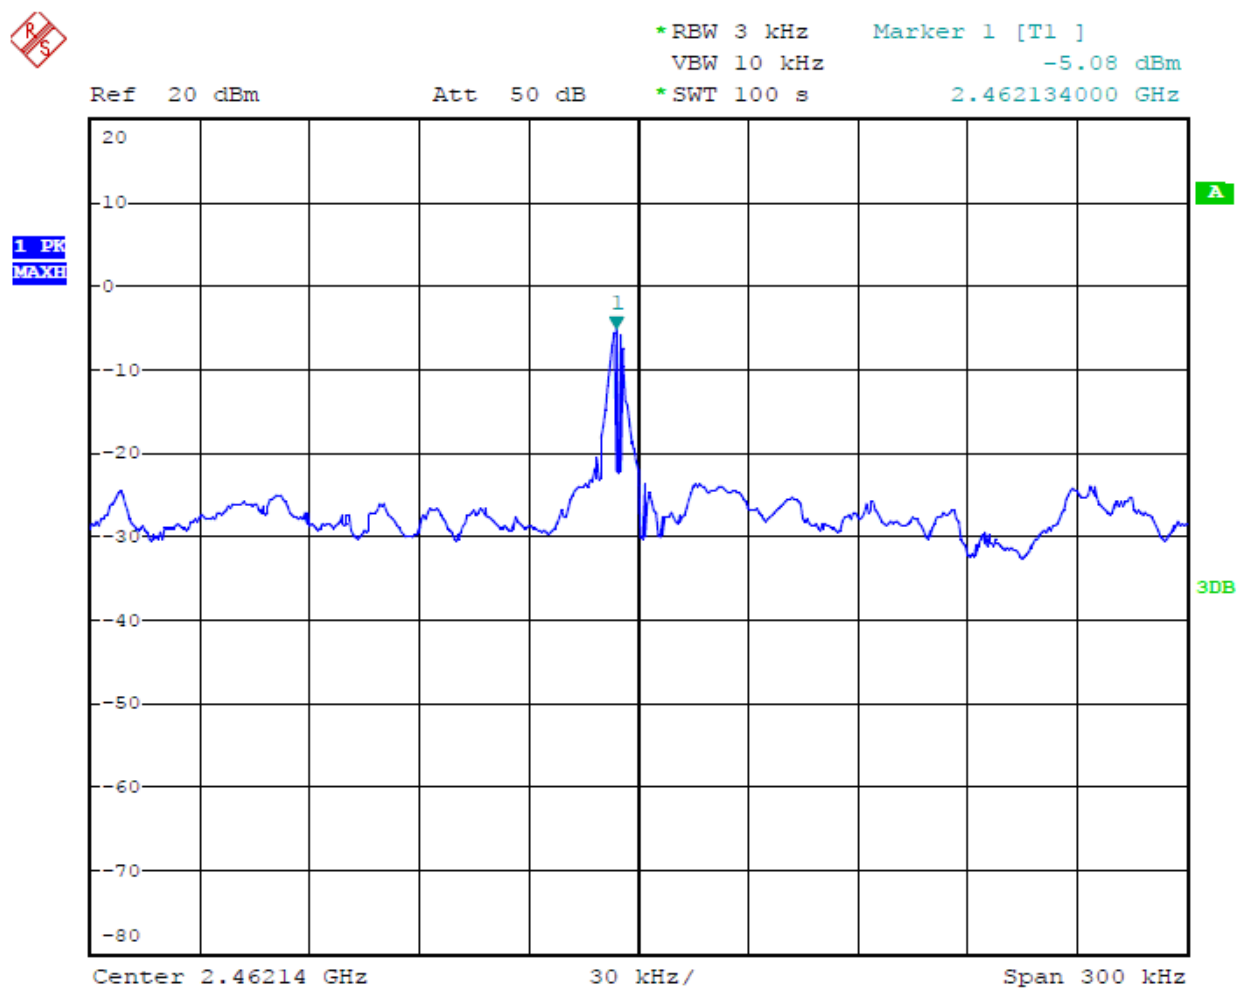

802.11g Channel Low 2412MHz




*RBW 3 kHz Marker 1 [T1]
VBW 10 kHz -24.95 dBm
*SWT 100 s 2.414606800 GHz

Ref 20 dBm

Att 50 dB

1 PK
MAXH

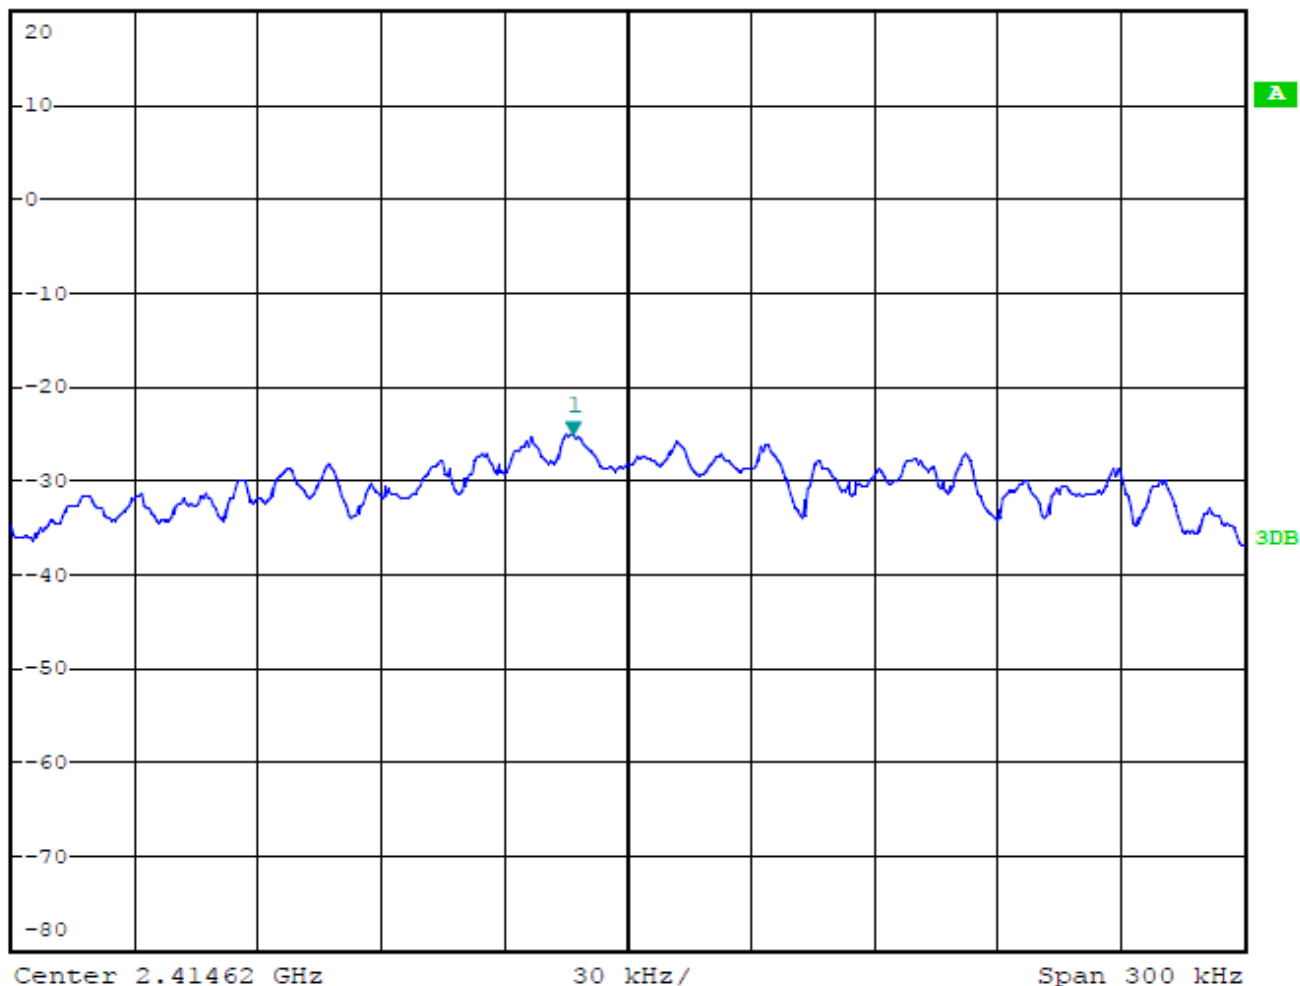

802.11g Channel Middle 2437MHz




*RBW 3 kHz Marker 1 [T1]
 VBW 10 kHz -26.77 dBm
 *SWT 100 s 2.438715800 GHz

Ref 20 dBm

Att 50 dB

1 PK
 MAXH

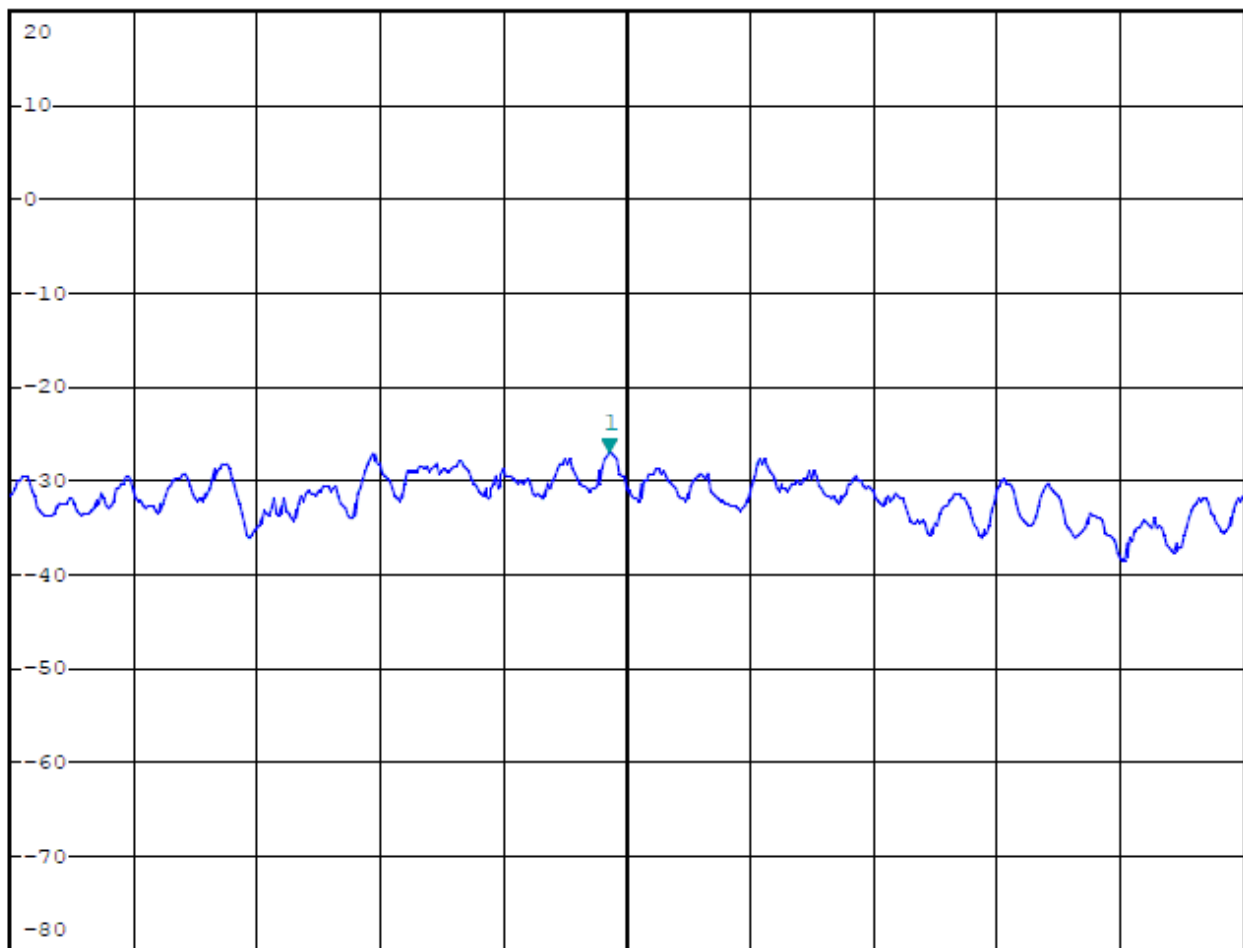


Center 2.43872 GHz

30 kHz/

Span 300 kHz


802.11g Channel High 2462MHz

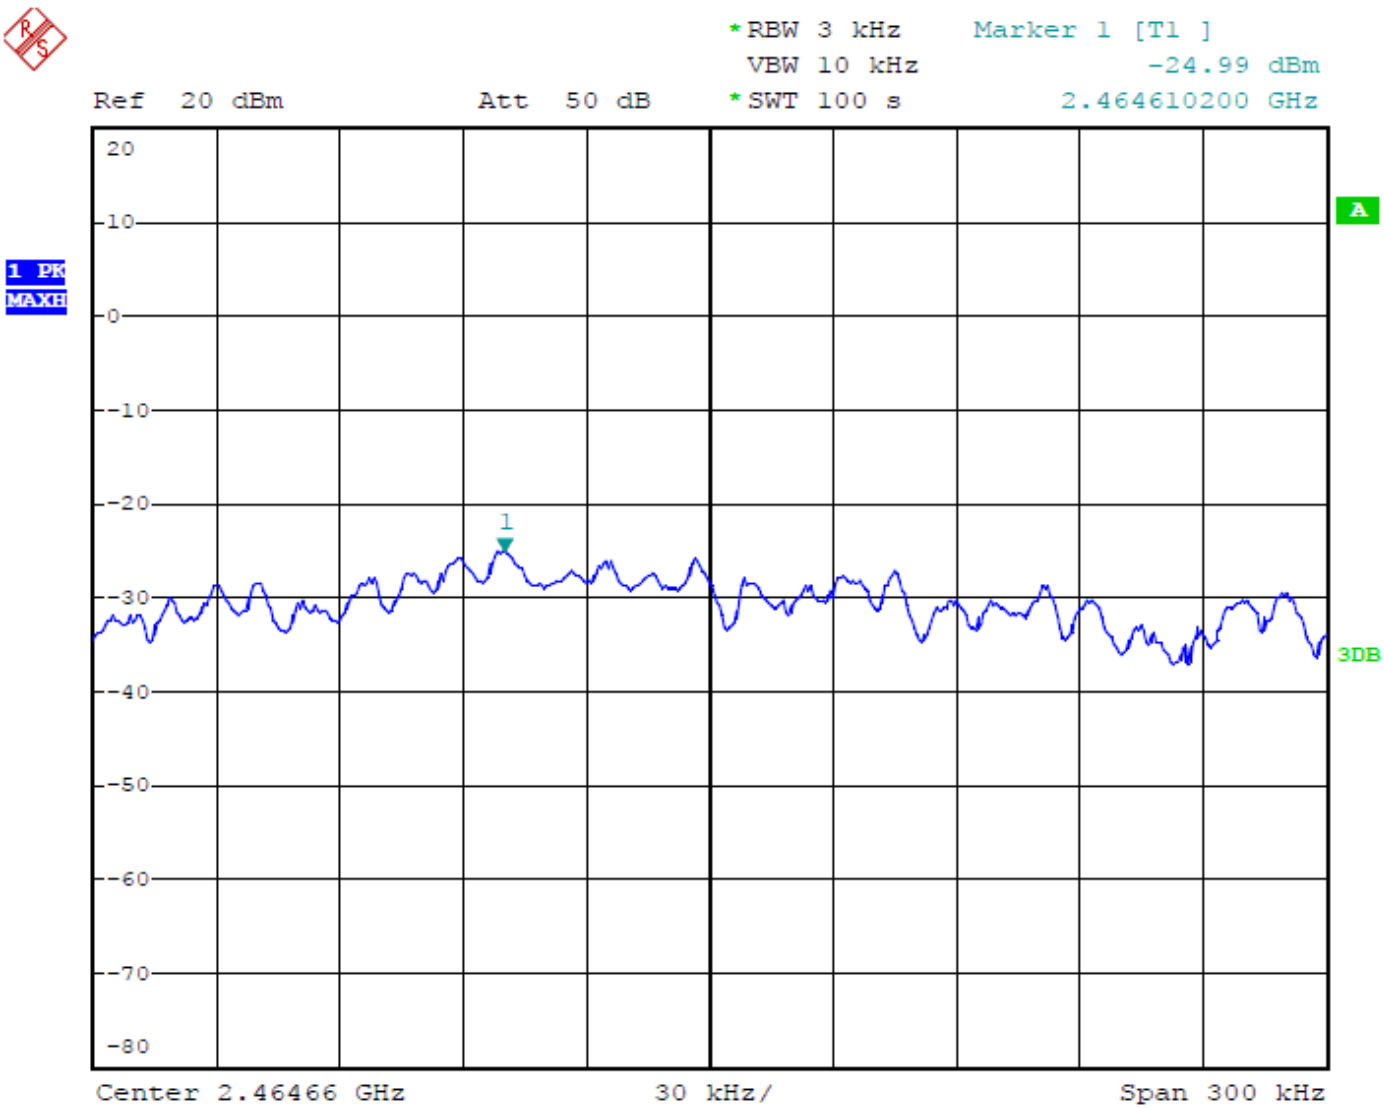

802.11n Channel High 2412MHz



*RBW 3 kHz Marker 1 [T1]
 VBW 10 kHz -24.06 dBm
 *SWT 100 s 2.409674000 GHz

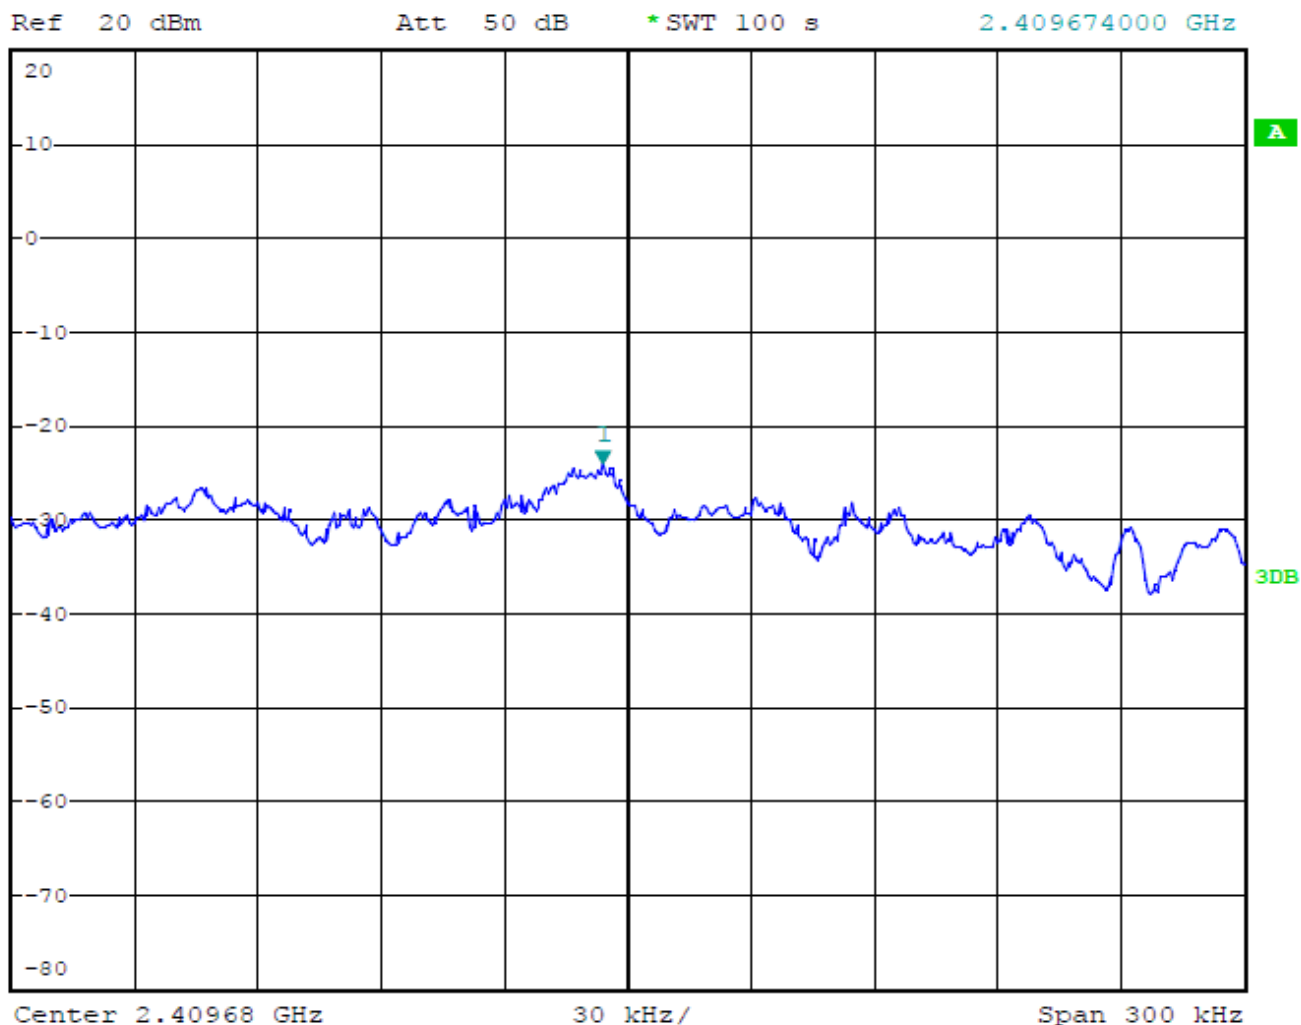

802.11n Channel High 2437MHz




*RBW 3 kHz Marker 1 [T1]
 VBW 10 kHz -26.16 dBm
 *SWT 100 s 2.438385200 GHz


Ref 20 dBm

Att 50 dB

1 PK
 MAXH

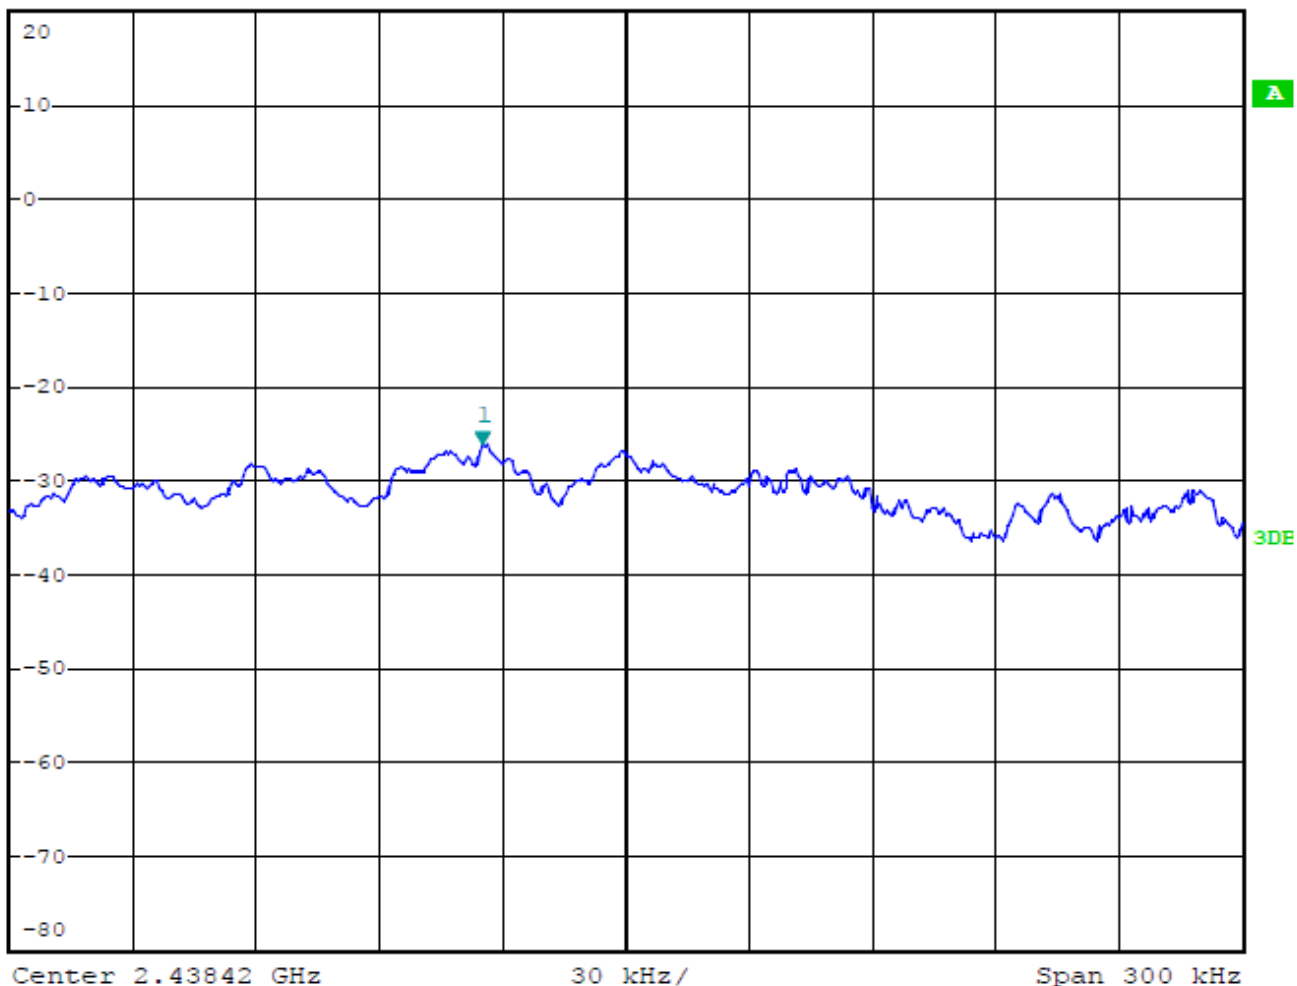


802.11n Channel High 2462MHz

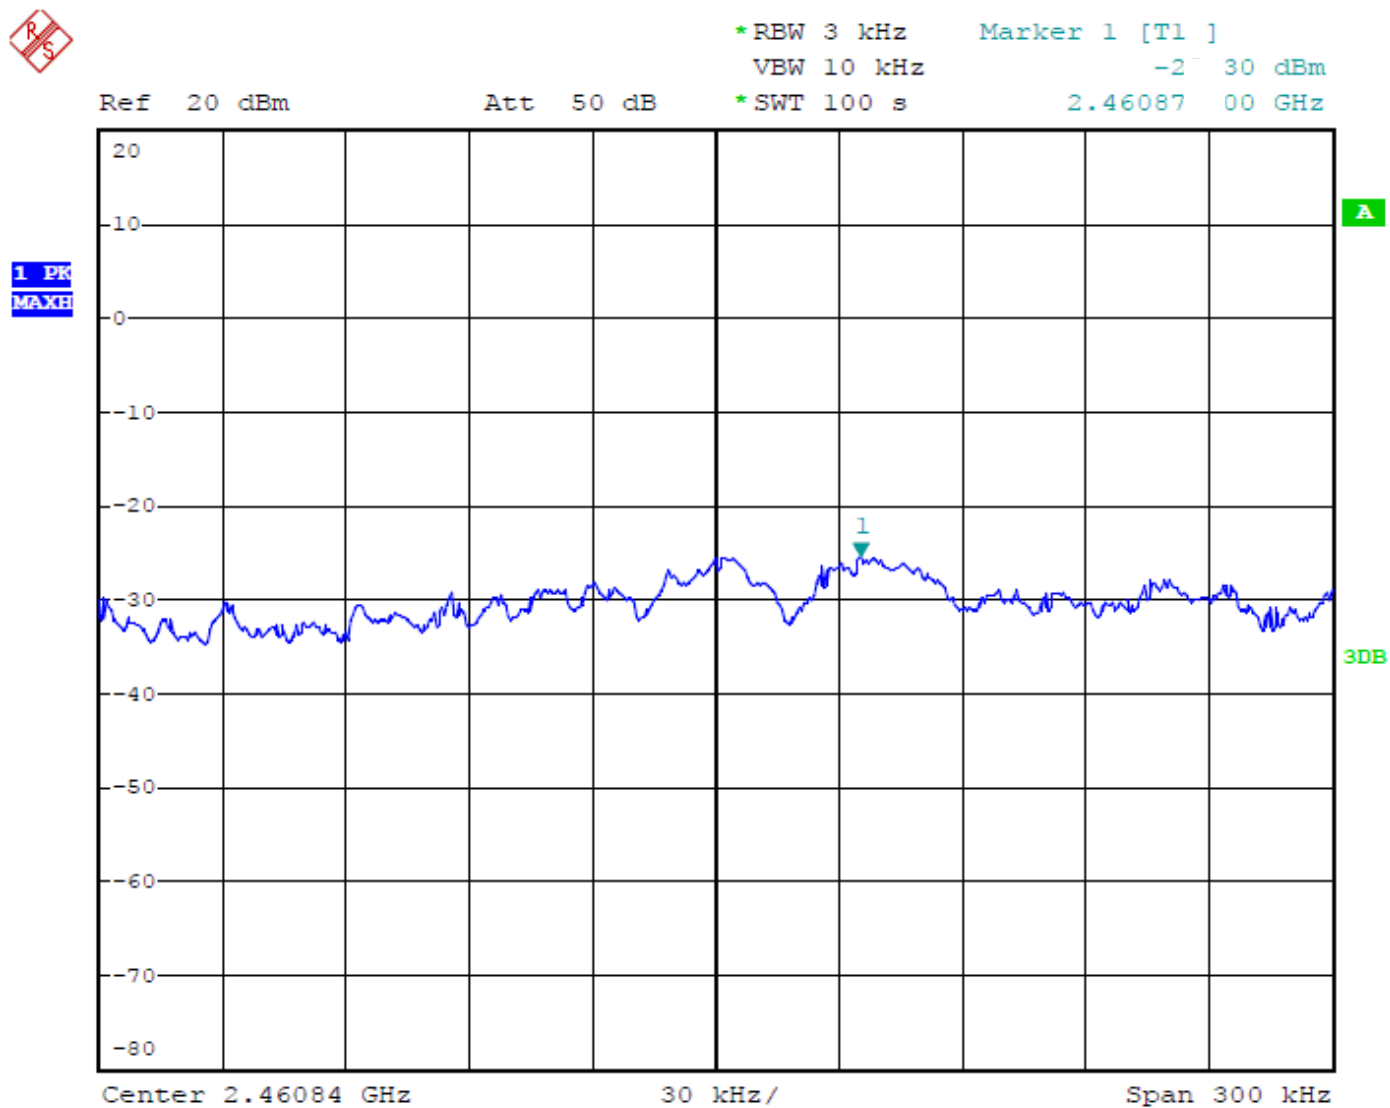

8. BAND EDGE COMPLIANCE TEST

8.1. Block Diagram of Test Setup

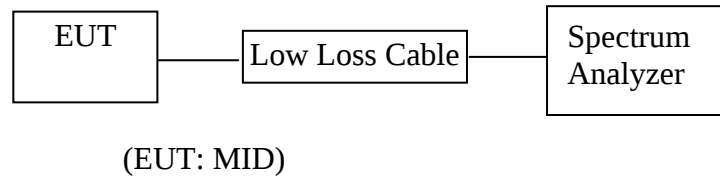

8.2. The Requirement For Section 15.247(d)

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

8.3. EUT Configuration on Measurement

The following equipment are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

8.3.1. MID (EUT)

Model Number	:	KW-PC7001A
Serial Number	:	N/A
Manufacturer	:	Kin Wei Technology(Shenzhen) Ltd.

8.4. Operating Condition of EUT

8.4.1. Setup the EUT and simulator as shown as Section 8.1.

8.4.2. Turn on the power of all equipment.

8.4.3. Let the EUT work in TX modes measure it. The transmit frequency are 2412-2462 MHz. We select 2412MHz, 2462MHz TX frequency to transmit.

8.5. Test Procedure

Conducted Band Edge:

8.5.1. The transmitter output was connected to the spectrum analyzer via a low loss cable.

8.5.2. Set RBW of spectrum analyzer to 100kHz and VBW to 300kHz.

Radiate Band Edge:

8.5.3. The EUT is placed on a turntable, which is 0.8m above the ground plane and worked at highest radiated power.

8.5.4. The turntable was rotated for 360 degrees to determine the position of maximum emission level.

8.5.5. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.

8.5.6. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:

RBW=1MHz, VBW=1MHz

8.5.7. The band edges was measured and recorded.

8.6. Test Result

Pass

Conducted test

Date of Test:	April 26, 2012	Temperature:	25°C
EUT:	MID	Humidity:	50%
Model No.:	KW-PC7001A	Power Supply:	DC 3.7V
Test Mode:	TX	Test Engineer:	Pei

The test was performed with 802.11b

Frequency (MHz)	Result of Band Edge (dBc)	Limit of Band Edge (dBc)
2412	37.09	> 20dBc
2462	36.84	> 20dBc


The test was performed with 802.11g

Frequency (MHz)	Result of Band Edge (dBc)	Limit of Band Edge (dBc)
2412	33.04	> 20dBc
2462	32.23	> 20dBc


The test was performed with 802.11n

Frequency (MHz)	Result of Band Edge (dBc)	Limit of Band Edge (dBc)
2412	32.45	> 20dBc
2462	32.76	> 20dBc


802.11b Channel Low 2412MHz

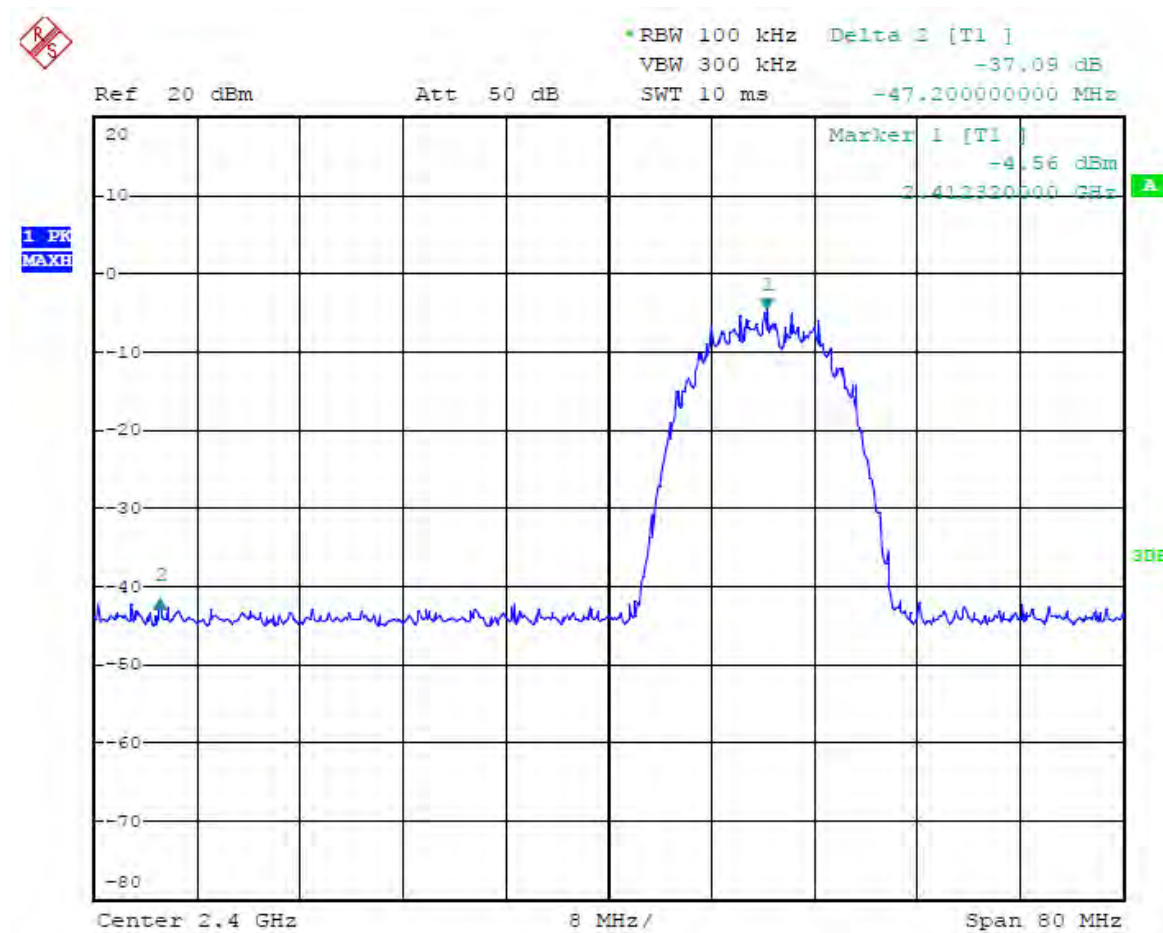


802.11b Channel High 2462MHz

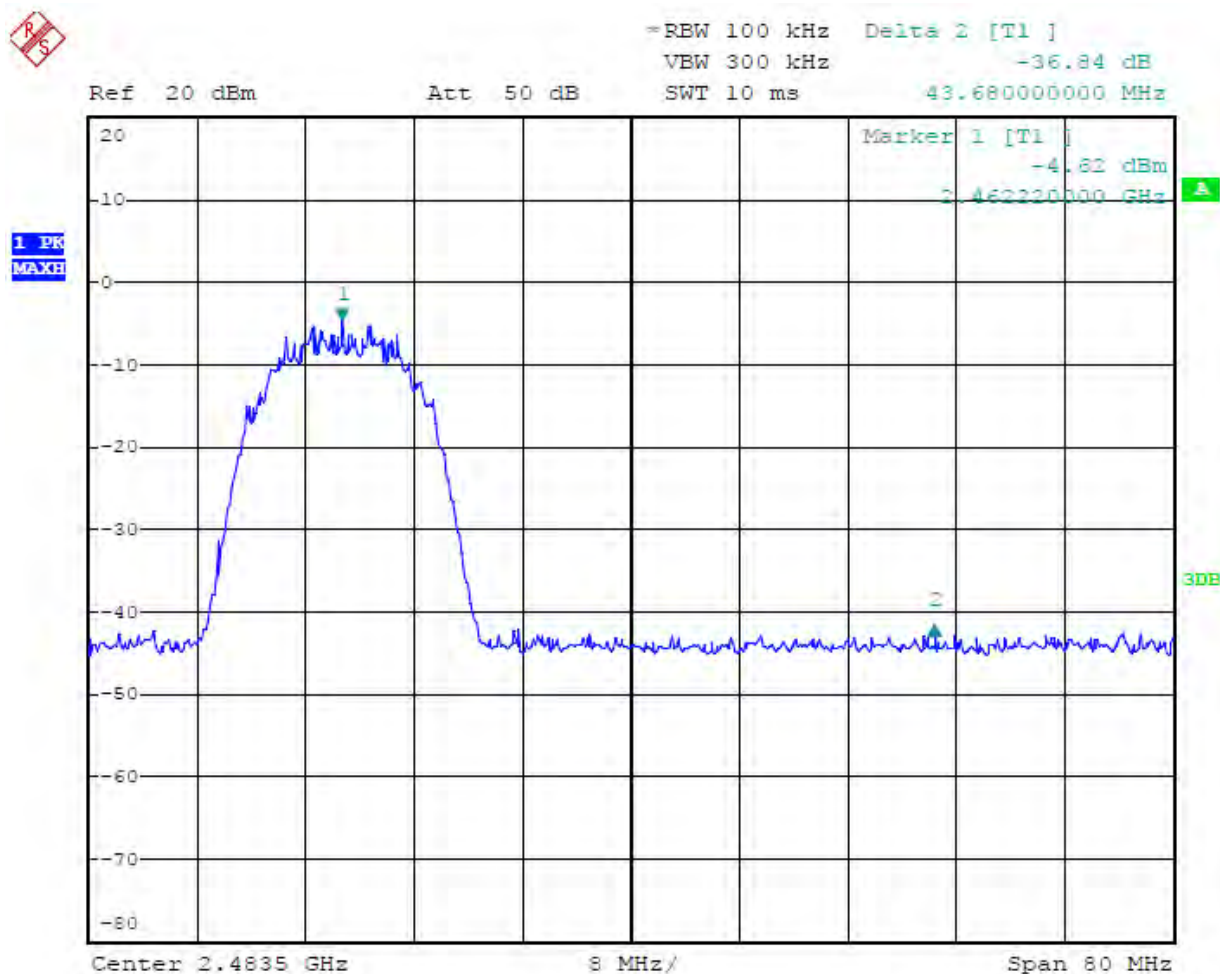


802.11g Channel Low 2412MHz

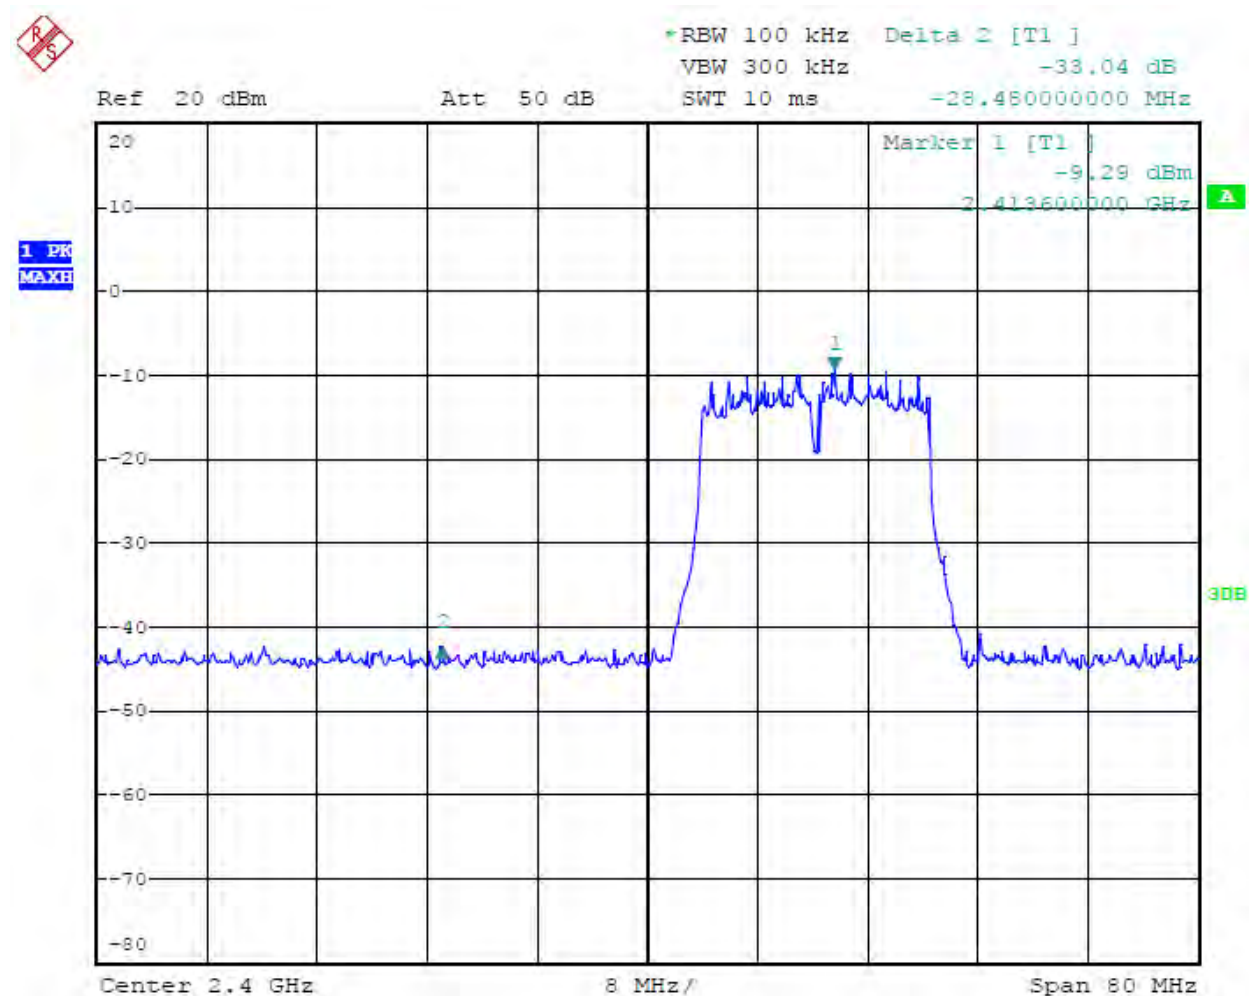


802.11g Channel High 2462MHz

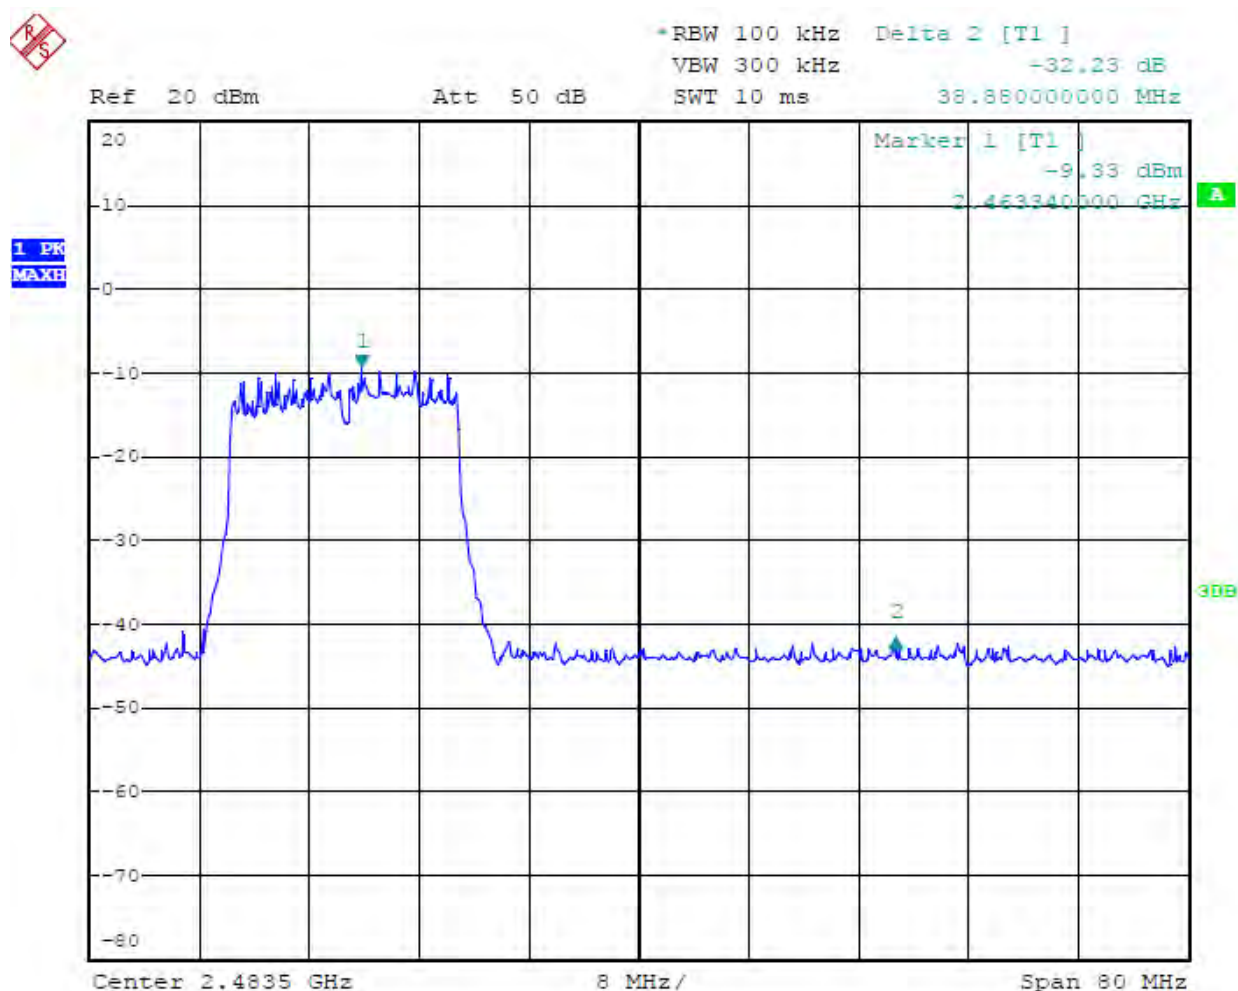

802.11n Channel High 2412MHz

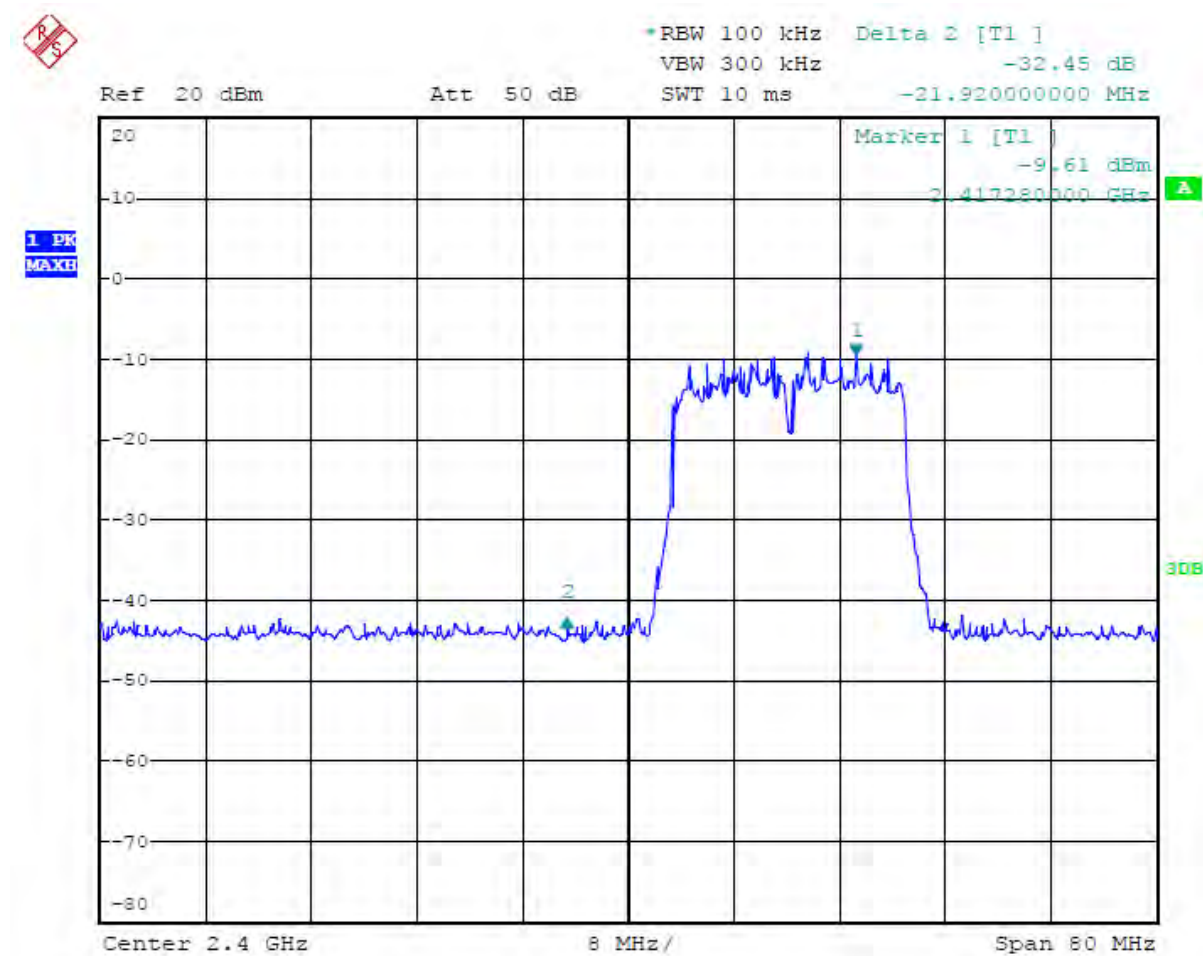

802.11n Channel High 2462MHz

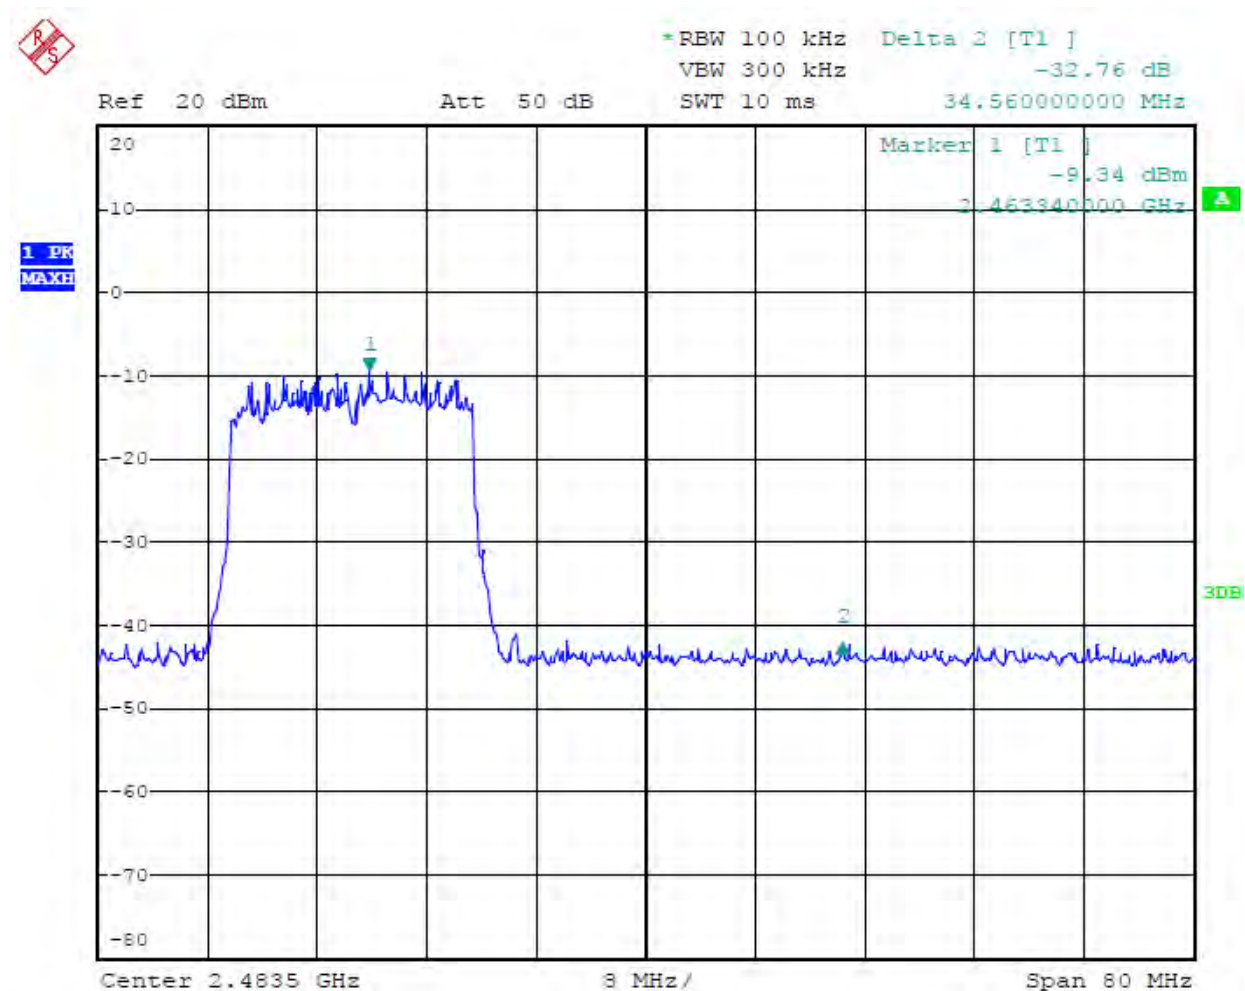

Radiated Band Edge Result

Date of Test:	<u>May 3, 2012</u>	Temperature:	<u>25°C</u>
EUT:	<u>MID</u>	Humidity:	<u>50%</u>
Model No.:	<u>KW-PC7001A</u>	Power Supply:	<u>DC 3.7V</u>
Test Mode:	<u>802.11b Channel Low 2412MHz</u>	Test Engineer:	<u>Pei</u>

Frequency (MHz)	Reading(dBμV/m)		Factor(dB) Corr.	Result(dBμV/m)		Limit(dBμV/m)		Margin(dB)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
-	-	-	-	-	-	-	-	-	-	Vertical
-	-	-	-	-	-	-	-	-	-	Horizontal

Note:

1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:

$$\text{Result} = \text{Reading} + \text{Corrected Factor}$$
3. Display the measurement of peak values.

Date of Test:	May 3, 2012	Temperature:	25°C
EUT:	MID	Humidity:	50%
Model No.:	KW-PC7001A	Power Supply:	DC 3.7V
Test Mode:	802.11b Channel High 2462MHz	Test Engineer:	Pei

Frequency (MHz)	Reading(dBμV/m)		Factor(dB) Corr.	Result(dBμV/m)		Limit(dBμV/m)		Margin(dB)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
-	-	-	-	-	-	-	-	-	-	Vertical
-	-	-	-	-	-	-	-	-	-	Horizontal

Note:

1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:
Result = Reading + Corrected Factor
3. Display the measurement of peak values.

Date of Test:	May 3, 2012	Temperature:	25°C
EUT:	MID	Humidity:	50%
Model No.:	KW-PC7001A	Power Supply:	DC 3.7V
Test Mode:	802.11g Channel Low 2412MHz	Test Engineer:	Pei

Frequency (MHz)	Reading(dBμV/m)		Factor(dB) Corr.	Result(dBμV/m)		Limit(dBμV/m)		Margin(dB)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
-	-	-	-	-	-	-	-	-	-	Vertical
-	-	-	-	-	-	-	-	-	-	Horizontal

Note:

1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:

$$\text{Result} = \text{Reading} + \text{Corrected Factor}$$
3. Display the measurement of peak values.

Date of Test:	May 3, 2012	Temperature:	25°C
EUT:	MID	Humidity:	50%
Model No.:	KW-PC7001A	Power Supply:	DC 3.7V
Test Mode:	802.11g Channel High 2462MHz	Test Engineer:	Pei

Frequency (MHz)	Reading(dBμV/m)		Factor(dB) Corr.	Result(dBμV/m)		Limit(dBμV/m)		Margin(dB)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
-	-	-	-	-	-	-	-	-	-	Vertical
-	-	-	-	-	-	-	-	-	-	Horizontal

Note:

1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:
Result = Reading + Corrected Factor
3. Display the measurement of peak values.

Date of Test:	May 3, 2012	Temperature:	25°C
EUT:	MID	Humidity:	50%
Model No.:	KW-PC7001A	Power Supply:	DC 3.7V
Test Mode:	802.11n Channel Low 2412MHz	Test Engineer:	Pei

Frequency (MHz)	Reading(dBμV/m)		Factor(dB) Corr.	Result(dBμV/m)		Limit(dBμV/m)		Margin(dB)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
-	-	-	-	-	-	-	-	-	-	Vertical
-	-	-	-	-	-	-	-	-	-	Horizontal

Note:

1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:

$$\text{Result} = \text{Reading} + \text{Corrected Factor}$$
3. Display the measurement of peak values.

Date of Test:	May 3, 2012	Temperature:	25°C
EUT:	MID	Humidity:	50%
Model No.:	KW-PC7001A	Power Supply:	DC 3.7V
Test Mode:	802.11n Channel High 2462MHz	Test Engineer:	Pei

Frequency (MHz)	Reading(dBμV/m)		Factor(dB) Corr.	Result(dBμV/m)		Limit(dBμV/m)		Margin(dB)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
-	-	-	-	-	-	-	-	-	-	Vertical
-	-	-	-	-	-	-	-	-	-	Horizontal

Note:

1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:
Result = Reading + Corrected Factor
3. Display the measurement of peak values.


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China


Site: 986 chamber

Tel:+86-0755-28503290

Fax:+86-0755-28503396

Job No.:	Polarization: Horizontal
Standard: FCC Part 15 PEAK 2.4G	Power Source: DC 3.7V
Test item: Radiation Test	Date: 28/04/12/
Temp.(C)/Hum.(%) 24 C / 48 %	Time: 23:15:17
EUT: MID	Engineer Signature:
Mode: TX Channel 1 (802.11b)	Distance:
Model: KW-PC7001A	
Manufacturer: Kin Wei	

Note:

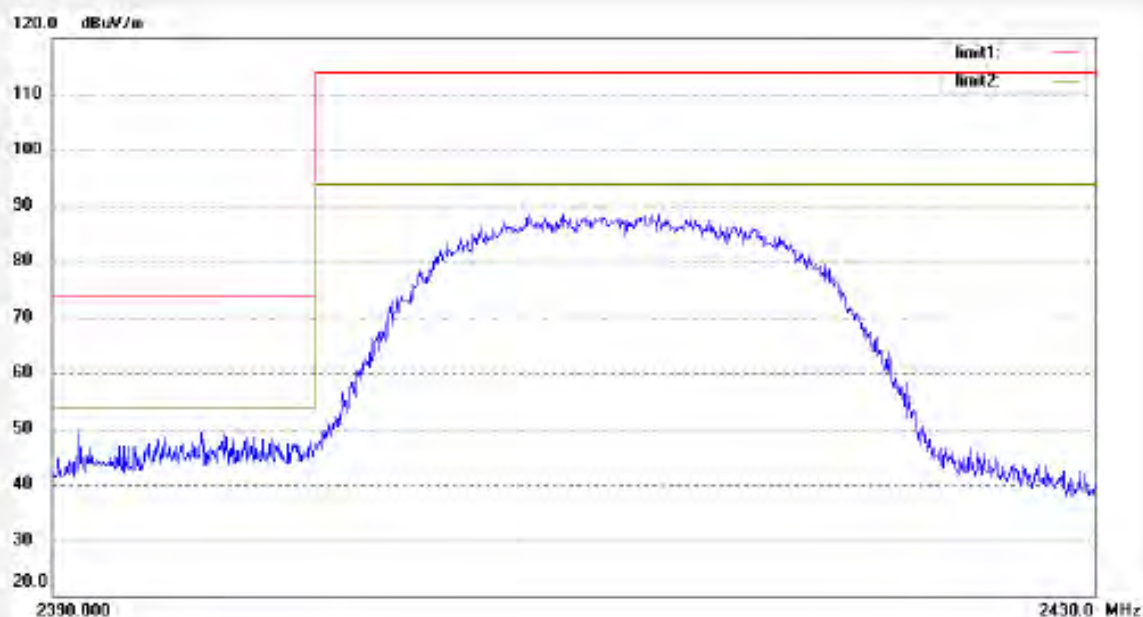

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg.,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China


Site: 986 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.:	Polarization: Vertical
Standard: FCC Part 15 PEAK 2.4G	Power Source: DC 3.7V
Test item: Radiation Test	Date: 28/04/12/
Temp.(C)/Hum.(%) 24 C / 48 %	Time: 23:11:09
EUT: MID	Engineer Signature:
Mode: TX Channel 1 (802.11b)	Distance:
Model: KW-PC7001A	
Manufacturer: Kin Wei	

Note:

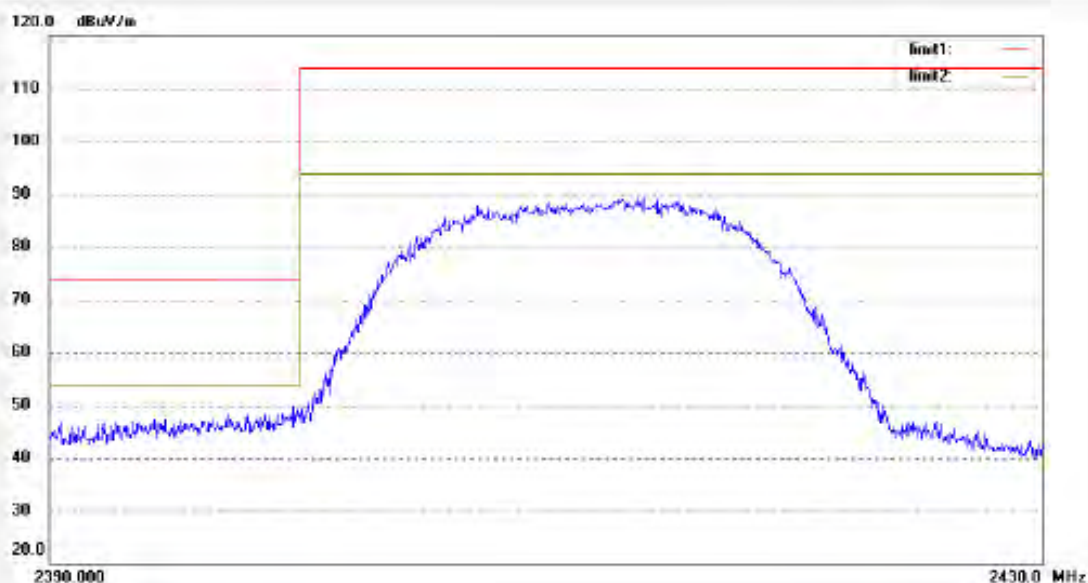

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 986 chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.:
Standard: FCC Part 15 PEAK 2.4G
Test item: Radiation Test
Temp.(C)/Hum.(%) 24 C / 48 %
EUT: MID
Mode: TX Channel 11 (802.11b)
Model: KW-PC7001A
Manufacturer: Kin Wei

Polarization: Horizontal
Power Source: DC 3.7V
Date: 28/04/12/
Time: 23:05:45
Engineer Signature:
Distance:

Note:

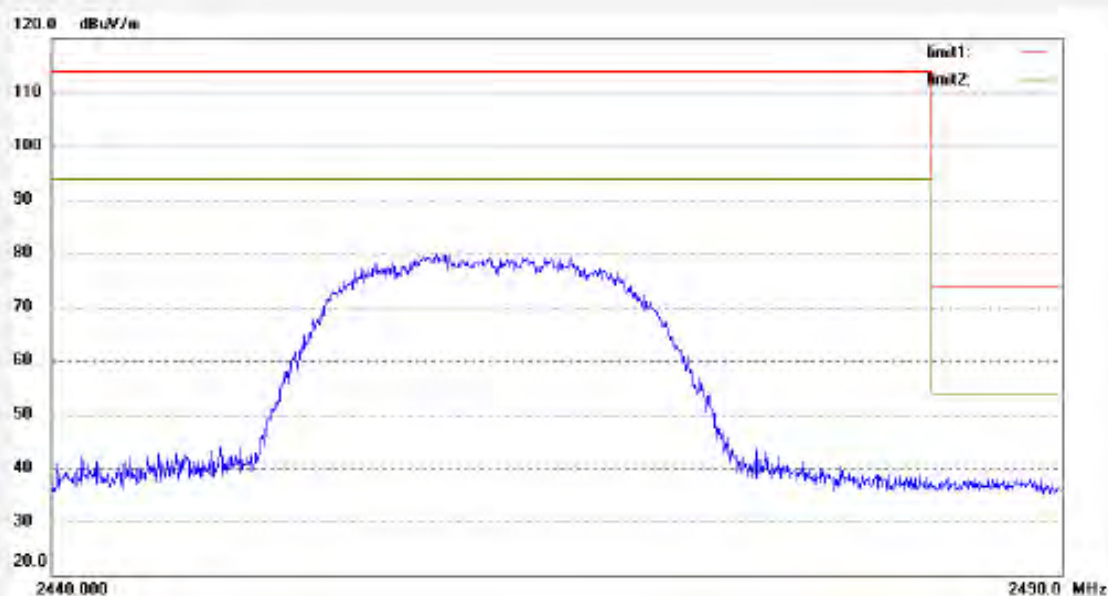

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 986 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.:
Standard: FCC Part 15 PEAK 2.4G
Test item: Radiation Test
Temp.(C)/Hum.(%) 24 C / 48 %
EUT: MID
Mode: TX Channel 11 (802.11b)
Model: KW-PC7001A
Manufacturer: Kin Wei

Polarization: Vertical
Power Source: DC 3.7V
Date: 28/04/12/
Time: 23:07:21
Engineer Signature:
Distance:

Note:

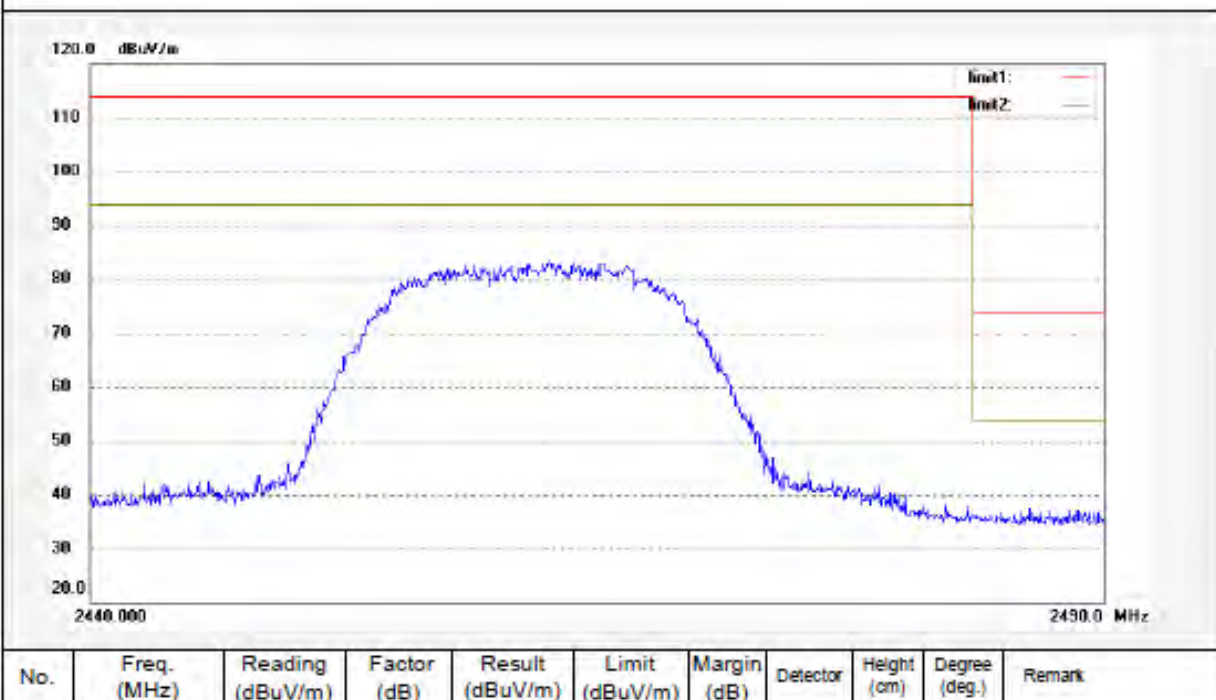


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China


Site: 988 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503398

Job No.:	Polarization: Horizontal
Standard: FCC Part 15 PEAK 2.4G	Power Source: DC 3.7V
Test item: Radiation Test	Date: 28/04/12/
Temp.(C)/Hum.(%) 24 C / 48 %	Time: 22:55:09
EUT: MID	Engineer Signature:
Mode: TX Channel 1 (802.11g)	Distance:
Model: KW-PC7001A	
Manufacturer: Kin Wei	

Note:

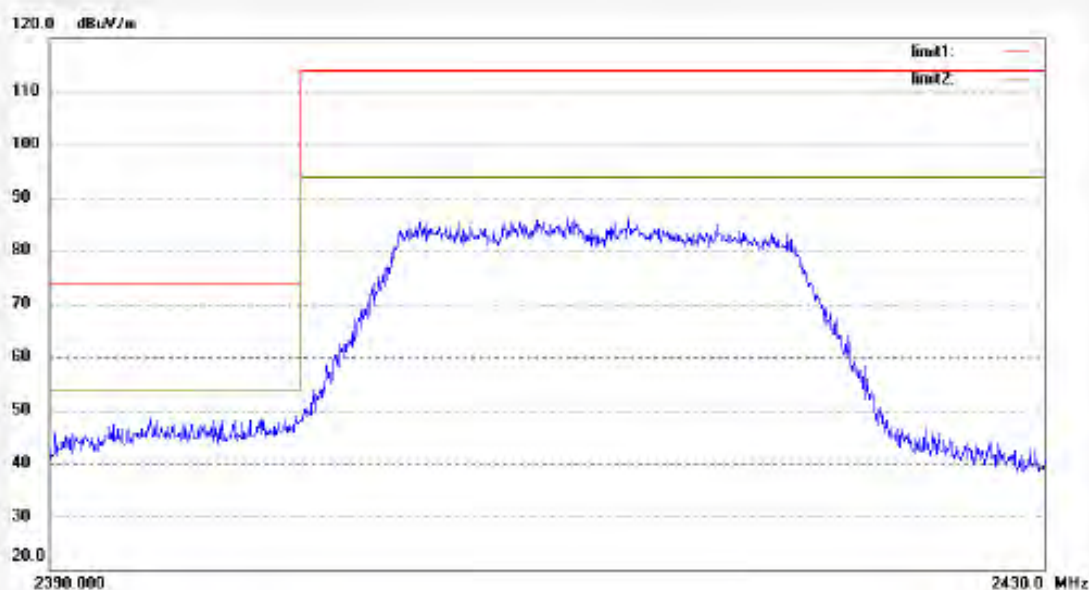

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 868 chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503398

Job No.:
 Standard: FCC Part 15 PEAK 2.4G
 Test item: Radiation Test
 Temp.(C)/Hum.(%) 24 C / 48 %
 EUT: MID
 Mode: TX Channel 1 (802.11g)
 Model: KW-PC7001A
 Manufacturer: Kin Wei

Polarization: Vertical
 Power Source: DC 3.7V
 Date: 28/04/12/
 Time: 22:58:35
 Engineer Signature:
 Distance:

Note:

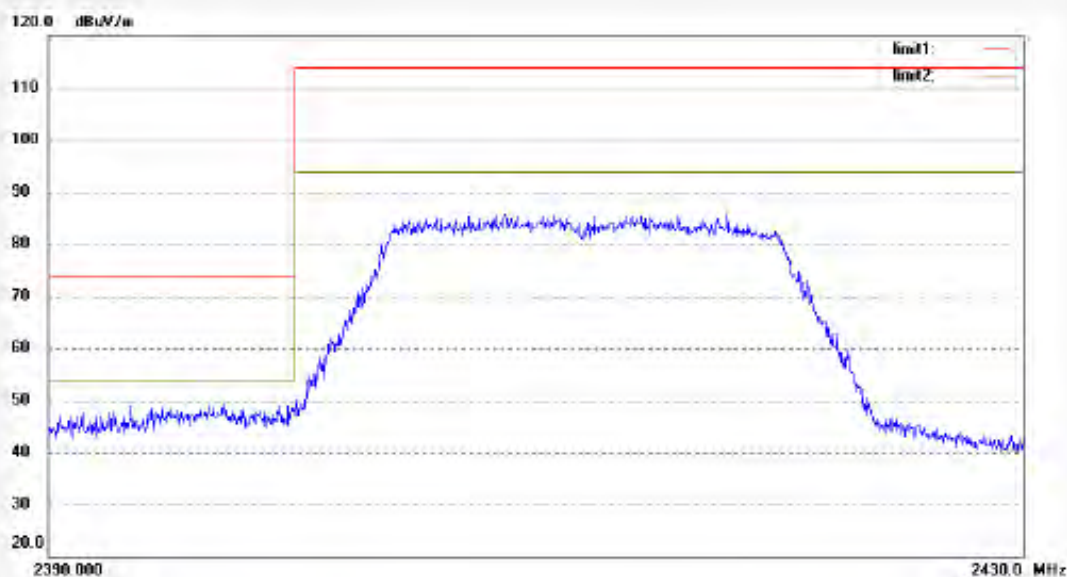

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.:
Standard: FCC Part 15 PEAK 2.4G
Test item: Radiation Test
Temp.(C)/Hum.(%) 24 C / 48 %
EUT: MID
Mode: TX Channel 11 (802.11g)
Model: KW-PC7001A
Manufacturer: Kin Wei

Polarization: Horizontal
Power Source: DC 3.7V
Date: 28/04/12/
Time: 23:01:23
Engineer Signature:
Distance:

Note:

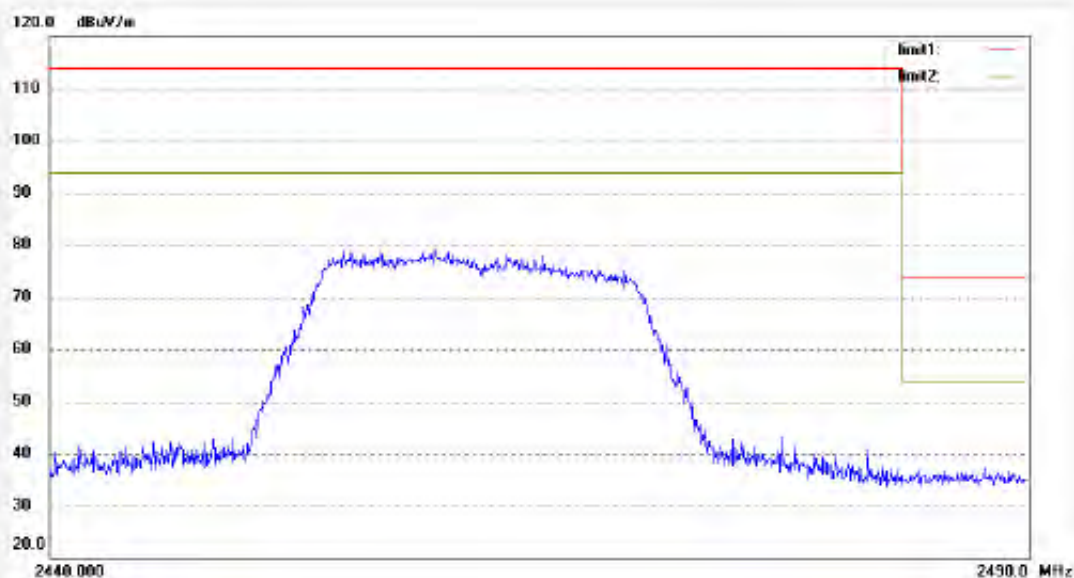

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 988 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503398

Job No.:
 Standard: FCC Part 15 PEAK 2.4G
 Test item: Radiation Test
 Temp.(C)/Hum.(%) 24 C / 48 %
 EUT: MID
 Mode: TX Channel 11 (802.11g)
 Model: KW-PC7001A
 Manufacturer: Kin Wei

Polarization: Vertical
 Power Source: DC 3.7V
 Date: 28/04/12/
 Time: 23:00:19
 Engineer Signature:
 Distance:

Note:



No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 988 chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503398

Job No.:
Standard: FCC Part 15 PEAK 2.4G
Test item: Radiation Test
Temp.(C)/Hum.(%) 24 C / 48 %
EUT: MID
Mode: TX Channel 1 (802.11n)
Model: KW-PC7001A
Manufacturer: Kin Wei

Polarization: Horizontal
Power Source: DC 3.7V
Date: 28/04/12/
Time: 22:42:51
Engineer Signature:
Distance:

Note:

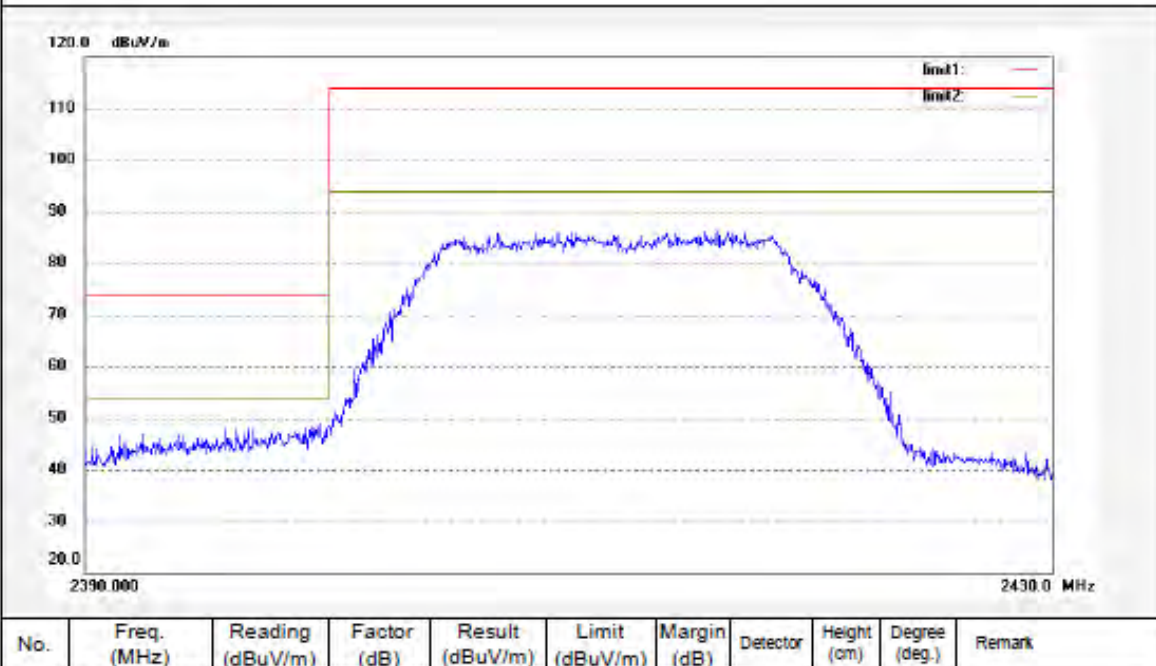


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.:
Standard: FCC Part 15 PEAK 2.4G
Test item: Radiation Test
Temp.(C)/Hum.(%) 24 C / 48 %
EUT: MID
Mode: TX Channel 1 (802.11n)
Model: KW-PC7001A
Manufacturer: Kin Wei

Polarization: Vertical
Power Source: DC 3.7V
Date: 28/04/12/
Time: 22:44:01
Engineer Signature: DC 3.7V
Distance:

Note:



No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 988 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.:	Polarization: Horizontal
Standard: FCC Part 15 PEAK 2.4G	Power Source: DC 3.7V
Test item: Radiation Test	Date: 28/04/12/
Temp.(C)/Hum.(%) 24 C / 48 %	Time: 22:50:08
EUT: MID	Engineer Signature: DC 3.7V
Mode: TX Channel 11 (802.11n)	Distance:
Model: KW-PC7001A	
Manufacturer: Kin Wei	

Note:



No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 988 chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.:
Standard: FCC Part 15 PEAK 2.4G
Test item: Radiation Test
Temp.(C)/Hum.(%) 24 C / 48 %
EUT: MID
Mode: TX Channel 11 (802.11n)
Model: KW-PC7001A
Manufacturer: Kin Wei

Polarization: Vertical
Power Source: DC 3.7V
Date: 28/04/12/
Time: 22:48:57
Engineer Signature: DC 3.7V
Distance:

Note:

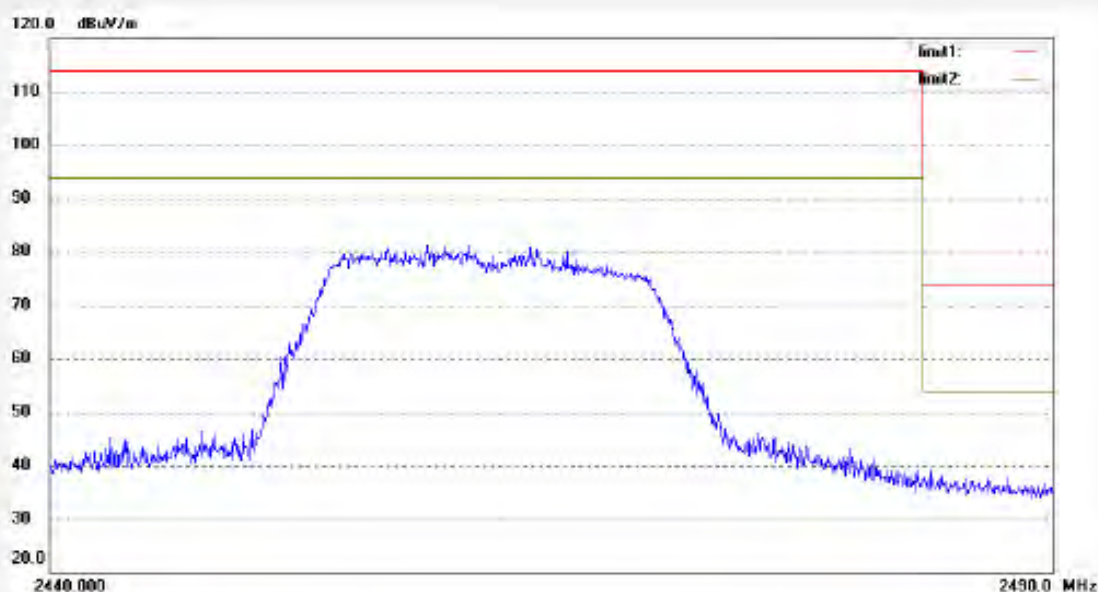


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------

9. RADIATED SPURIOUS EMISSION TEST

9.1. Block Diagram of Test Setup


9.1.1. Block diagram of connection between the EUT and peripherals

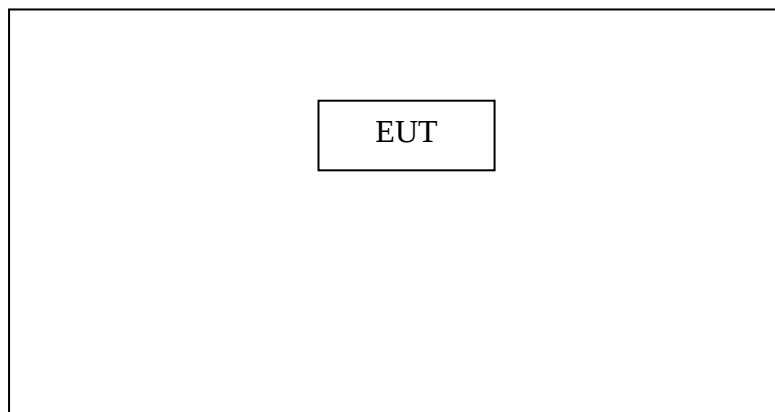

Setup: Transmitting mode

(EUT: MID)

9.1.2. Semi-Anechoic Chamber Test Setup Diagram

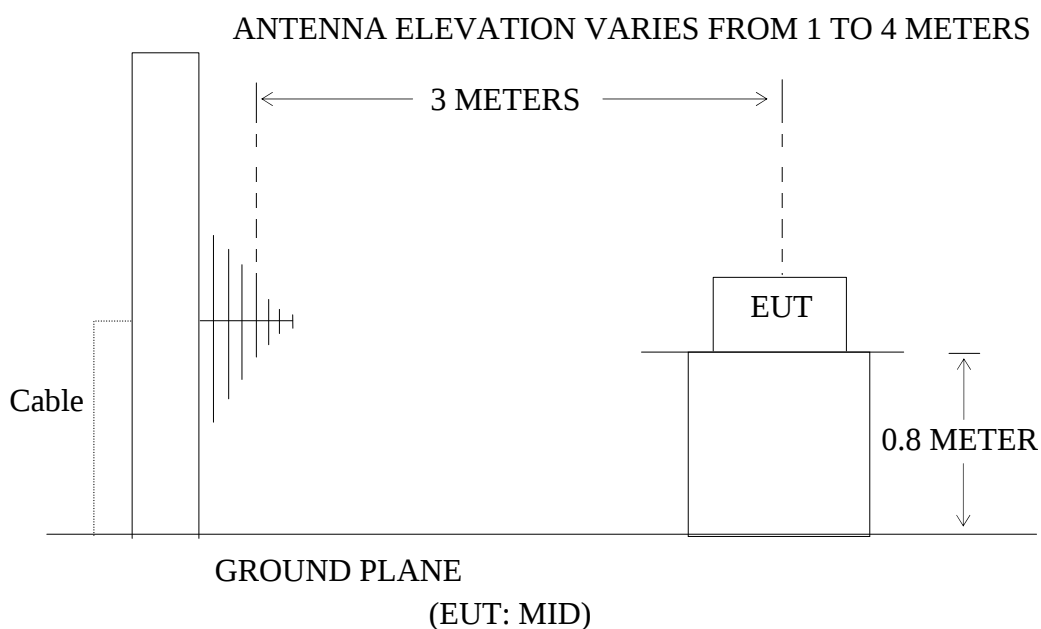

9.2.The Limit For Section 15.247(d)

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

9.3.Restricted bands of operation

9.3.1.FCC Part 15.205 Restricted bands of operation

(a) Except as shown in paragraph (d) of this section, Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

¹Until February 1, 1999, this restricted band shall be 0.490-0.510

²Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emission appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000MHz, Compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

9.4.Configuration of EUT on Measurement

The following equipment are installed on Radiated Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

9.4.1.MID (EUT)

Model Number : KW-PC7001A
 Serial Number : N/A
 Manufacturer : Kin Wei Technology(Shenzhen) Ltd.

9.5.Operating Condition of EUT

9.5.1.Setup the EUT and simulator as shown as Section 9.1.

9.5.2.Turn on the power of all equipment.

9.5.3.Let the EUT work in TX modes measure it. The transmit frequency are 2412-2462 MHz. We select 2412MHz, 2437MHz, 2462MHz TX frequency to transmit.

9.6.Test Procedure

The EUT and its simulators are placed on a turntable, which is 0.8 meter high above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.4: 2003 on radiated emission measurement. The EUT was tested in 3 orthogonal planes.

The worst-case data rate for this channel to be 1Mbps for 802.11b mode and 6Mbps for 802.11g mode and 300Mbps for 802.11n mode, based on previous with 802.11 WLAN product design architectures.

The bandwidth of test receiver is set at 9kHz in below 30MHz. and set at 120kHz in 30-1000MHz, and 1MHz in above 1000MHz.

The frequency range from 9kHz to 25GHz is checked.

The final measurement in band 9-90kHz, 110-490kHz and above 1000MHz is performed with Average detector. Except those frequency bands mention above, the final measurement for frequencies below 1000MHz is performed with Quasi Peak detector.

The field strength is calculated by adding the antenna factor, and cable loss, and subtracting the amplifier gain from the measured reading. The basic equation calculation is as follows:

Result = Reading + Corrected Factor

Where Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

9.7.The Field Strength of Radiation Emission Measurement Results

PASS.

Date of Test:	April 28, 2012	Temperature:	25°C
EUT:	MID	Humidity:	50%
Model No.:	KW-PC7001A	Power Supply:	DC 3.7V
Test Mode:	802.11b Channel Low 2412MHz	Test Engineer:	Pei

For Below 30MHz

Frequency (MHz)	Reading (dBμV/m)	Factor(dB) Corr.	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
-	-	-	-	-	-	X
-	-	-	-	-	-	Y
-	-	-	-	-	-	Z

For 30MHz-1000MHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading (dBμV/m)	Factor Corr. (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
98.7215	27.03	13.94	40.97	43.50	-2.53	Vertical
130.3048	26.31	14.89	41.20	43.50	-2.30	Vertical
162.0197	26.47	14.62	41.09	43.50	-2.41	Vertical
195.8701	25.19	16.14	41.33	43.50	-2.17	Vertical
259.4433	22.93	18.52	41.45	46.00	-4.55	Vertical
328.3068	21.36	19.69	41.05	46.00	-4.95	Vertical
98.7215	27.28	14.01	41.29	43.50	-2.21	Horizontal
120.6118	24.66	14.72	39.38	43.50	-4.12	Horizontal
162.0197	26.40	14.62	41.02	43.50	-2.48	Horizontal
195.8701	25.17	16.02	41.19	43.50	-2.31	Horizontal
259.4433	25.22	18.52	43.74	46.00	-2.26	Horizontal
328.3068	24.25	19.69	43.94	46.00	-2.06	Horizontal

For 1GHz-25GHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading(dBμV/m)		Factor Corr. (dB)	Result(dBμV/m)		Limit(dBμV/m)		Margin(dBμV/m)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
2412.000	71.43	71.96	-7.43	64.00	64.53	-	-	-	-	Vertical
*4824.028	40.00	41.63	-0.19	39.81	41.44	54	74	-14.19	-32.56	Vertical
2412.000	71.54	71.72	-7.43	64.11	64.29	-	-	-	-	Horizontal
*4824.028	40.00	40.99	-0.19	39.81	40.80	54	74	-14.19	-33.20	Horizontal

Note: 1. Emissions attenuated more than 20 dB below the permissible value are not reported.**2. *: Denotes restricted band of operation.**

Date of Test: April 26, 2012

Temperature: 25°C

EUT: MID

Humidity: 50%

Model No.: KW-PC7001A

Power Supply: DC 3.7V

Test Mode: 802.11b Channel Middle 2437MHz

Test Engineer: Pei

For Below 30MHz

Frequency (MHz)	Reading (dBμV/m)	Factor(dB) Corr.	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
-	-	-	-	-	-	X
-	-	-	-	-	-	Y
-	-	-	-	-	-	Z

For 30MHz-1000MHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading (dBμV/m)	Factor Corr. (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
98.7215	27.38	13.94	41.32	43.50	-2.18	Vertical
130.3048	26.34	14.89	41.23	43.50	-2.27	Vertical
162.0197	26.48	14.62	41.10	43.50	-2.40	Vertical
195.8701	25.04	16.14	41.18	43.50	-2.32	Vertical
259.4433	25.28	18.52	43.80	46.00	-2.20	Vertical
328.3068	21.91	19.69	41.60	46.00	-4.40	Vertical
98.7215	27.24	14.01	41.25	43.50	-2.25	Horizontal
130.3048	26.07	14.89	40.96	43.50	-2.54	Horizontal
162.0197	26.55	14.62	41.17	43.50	-2.33	Horizontal
195.8701	25.25	16.02	41.27	43.50	-2.23	Horizontal
259.4433	25.16	18.52	43.68	46.00	-2.32	Horizontal
328.3068	23.85	19.69	43.54	46.00	-2.46	Horizontal

For 1GHz-25GHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading(dBμV/m)		Factor Corr. (dB)	Result(dBμV/m)		Limit(dBμV/m)		Margin(dBμV/m)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
2437.000	74.09	74.20	-7.36	66.73	66.84	-	-	-	-	Vertical
*4874.030	44.07	44.13	0.09	44.16	44.22	54	74	-9.84	-29.78	Vertical
2437.000	72.37	72.84	-7.36	65.01	65.48	-	-	-	-	Horizontal
*4874.030	41.59	41.96	0.09	41.68	42.05	54	74	-12.32	-31.95	Horizontal

Note: 1. Emissions attenuated more than 20 dB below the permissible value are not reported.**2. *: Denotes restricted band of operation.**

Date of Test: April 26, 2012

Temperature: 25°C

EUT: MID

Humidity: 50%

Model No.: KW-PC7001A

Power Supply: DC 3.7V

Test Mode: 802.11b Channel High 2462MHz

Test Engineer: Pei

For Below 30MHz

Frequency (MHz)	Reading (dBμV/m)	Factor(dB) Corr.	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
-	-	-	-	-	-	X
-	-	-	-	-	-	Y
-	-	-	-	-	-	Z

For 30MHz-1000MHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading (dBμV/m)	Factor Corr. (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
98.7215	27.22	13.94	41.16	43.50	-2.34	Vertical
130.3048	25.80	14.89	40.69	43.50	-2.81	Vertical
162.0197	26.52	14.62	41.14	43.50	-2.36	Vertical
195.8701	25.30	16.14	41.44	43.50	-2.06	Vertical
259.4433	25.29	18.52	43.81	46.00	-2.19	Vertical
328.3068	22.55	19.69	42.24	46.00	-3.76	Vertical
98.7215	25.24	14.01	39.25	43.50	-4.25	Horizontal
130.3048	22.64	14.89	37.53	43.50	-5.97	Horizontal
162.0197	26.79	14.62	41.41	43.50	-2.09	Horizontal
195.8701	23.61	16.02	39.63	43.50	-3.87	Horizontal
259.4433	24.23	18.52	42.75	46.00	-3.25	Horizontal
328.3068	23.82	19.69	43.51	46.00	-2.49	Horizontal

For 1GHz-25GHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading(dBμV/m)		Factor Corr. (dB)	Result(dBμV/m)		Limit(dBμV/m)		Margin(dBμV/m)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
2462.000	76.37	76.59	-7.35	69.02	69.24	-	-	-	-	Vertical
*4924.038	46.15	46.21	0.34	46.49	46.55	54	74	-7.51	-27.45	Vertical
2462.000	74.54	74.72	-7.35	67.19	67.37	-	-	-	-	Horizontal
*4924.038	42.16	42.27	0.34	42.50	42.61	54	74	-11.50	-31.39	Horizontal

Note: 1. Emissions attenuated more than 20 dB below the permissible value are not reported.**2. *: Denotes restricted band of operation.**

Date of Test:	April 26, 2012	Temperature:	25°C
EUT:	MID	Humidity:	50%
Model No.:	KW-PC7001A	Power Supply:	DC 3.7V
Test Mode:	802.11g Channel Low 2412MHz	Test Engineer:	Pei

For Below 30MHz

Frequency (MHz)	Reading (dBμV/m)	Factor(dB) Corr.	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
-	-	-	-	-	-	X
-	-	-	-	-	-	Y
-	-	-	-	-	-	Z

For 30MHz-1000MHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading (dBμV/m)	Factor Corr. (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
98.7215	27.27	13.94	41.21	43.50	-2.29	Vertical
130.3048	26.09	14.89	40.98	43.50	-2.52	Vertical
162.0197	26.73	14.62	41.35	43.50	-2.15	Vertical
195.8701	25.18	16.14	41.32	43.50	-2.18	Vertical
259.4433	22.98	18.52	41.50	46.00	-4.50	Vertical
328.3068	23.02	19.69	42.71	46.00	-3.29	Vertical
98.7215	27.27	14.01	41.28	43.50	-2.22	Horizontal
130.3048	26.04	14.89	40.93	43.50	-2.57	Horizontal
162.0197	26.58	14.62	41.20	43.50	-2.30	Horizontal
195.8701	24.71	16.02	40.73	43.50	-2.77	Horizontal
259.4433	25.21	18.52	43.73	46.00	-2.27	Horizontal
328.3068	24.05	19.69	43.74	46.00	-2.26	Horizontal

For 1GHz-25GHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading(dBμV/m)		Factor Corr. (dB)	Result(dBμV/m)		Limit(dBμV/m)		Margin(dBμV/m)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
2412.000	72.66	72.93	-7.43	65.23	65.50	-	-	-	-	Vertical
*4824.031	40.00	41.62	-0.19	39.81	41.43	54	74	-14.19	-32.57	Vertical
2412.000	74.55	79.58	-7.43	67.12	72.15	-	-	-	-	Horizontal
*4824.031	40.00	41.20	-0.19	39.81	41.01	54	74	-14.19	-32.99	Horizontal

Note: 1. Emissions attenuated more than 20 dB below the permissible value are not reported.**2. *: Denotes restricted band of operation.**

Date of Test: April 26, 2012

Temperature: 25°C

EUT: MID

Humidity: 50%

Model No.: KW-PC7001A

Power Supply: DC 3.7V

Test Mode: 802.11g Channel Middle 2437MHz

Test Engineer: Pei

For Below 30MHz

Frequency (MHz)	Reading (dBμV/m)	Factor(dB) Corr.	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
-	-	-	-	-	-	X
-	-	-	-	-	-	Y
-	-	-	-	-	-	Z

For 30MHz-1000MHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading (dBμV/m)	Factor Corr. (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
98.7215	27.28	13.94	41.22	43.50	-2.28	Vertical
130.3048	26.32	14.89	41.21	43.50	-2.29	Vertical
162.0197	26.45	14.62	41.07	43.50	-2.43	Vertical
195.8701	25.59	16.14	41.73	43.50	-1.77	Vertical
259.4433	22.17	18.52	40.69	46.00	-5.31	Vertical
328.3068	22.87	19.69	42.56	46.00	-3.44	Vertical
98.7215	27.23	14.01	41.24	43.50	-2.26	Horizontal
130.3048	26.19	14.89	41.08	43.50	-2.42	Horizontal
162.0197	26.41	14.62	41.03	43.50	-2.47	Horizontal
195.8701	25.20	16.02	41.22	43.50	-2.28	Horizontal
259.4433	25.14	18.52	43.66	46.00	-2.34	Horizontal
328.3068	24.01	19.69	43.70	46.00	-2.30	Horizontal

For 1GHz-25GHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading(dBμV/m)		Factor Corr. (dB)	Result(dBμV/m)		Limit(dBμV/m)		Margin(dBμV/m)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
2437.000	72.62	72.82	-7.36	65.26	65.46	-	-	-	-	Vertical
*4874.110	44.17	44.31	0.09	44.26	44.40	54	74	-9.74	-29.60	Vertical
2437.000	75.06	81.23	-7.36	67.70	73.87	-	-	-	-	Horizontal
*4874.110	41.83	49.42	0.09	41.92	49.51	54	74	-12.08	-24.49	Horizontal

Note: 1. Emissions attenuated more than 20 dB below the permissible value are not reported.**2. *: Denotes restricted band of operation.**

Date of Test:	April 26, 2012	Temperature:	25°C
EUT:	MID	Humidity:	50%
Model No.:	KW-PC7001A	Power Supply:	DC 3.7V
Test Mode:	802.11g Channel High 2462MHz	Test Engineer:	Pei

For Below 30MHz

Frequency (MHz)	Reading (dBμV/m)	Factor(dB) Corr.	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
-	-	-	-	-	-	X
-	-	-	-	-	-	Y
-	-	-	-	-	-	Z

For 30MHz-1000MHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading (dBμV/m)	Factor Corr. (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
98.7215	27.51	13.94	41.45	43.50	-2.05	Vertical
130.3048	26.23	14.89	41.12	43.50	-2.38	Vertical
162.0197	26.45	14.62	41.07	43.50	-2.43	Vertical
195.8701	25.14	16.14	41.28	43.50	-2.22	Vertical
259.4433	23.07	18.52	41.59	46.00	-4.41	Vertical
328.3068	21.10	19.69	40.79	46.00	-5.21	Vertical
98.7215	27.20	14.01	41.21	43.50	-2.29	Horizontal
130.3048	26.04	14.89	40.93	43.50	-2.57	Horizontal
162.0197	26.73	14.62	41.35	43.50	-2.15	Horizontal
195.8701	25.23	16.02	41.25	43.50	-2.25	Horizontal
259.4433	25.13	18.52	43.65	46.00	-2.35	Horizontal
328.3068	24.04	19.69	43.73	46.00	-2.27	Horizontal

For 1GHz-25GHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading(dBμV/m)		Factor Corr. (dB)	Result(dBμV/m)		Limit(dBμV/m)		Margin(dBμV/m)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
2462.000	77.21	77.33	-7.35	69.86	69.98	-	-	-	-	Vertical
*4924.105	43.29	43.47	0.34	43.63	43.81	54	74	-10.37	-30.19	Vertical
2462.000	78.42	78.60	-7.35	71.07	71.25	-	-	-	-	Horizontal
*4924.105	44.83	45.05	0.34	45.17	45.39	54	74	-8.83	-28.61	Horizontal

Note: 1. Emissions attenuated more than 20 dB below the permissible value are not reported.**2. *: Denotes restricted band of operation.**

Date of Test: April 26, 2012

Temperature: 25°C

EUT: MID

Humidity: 50%

Model No.: KW-PC7001A

Power Supply: DC 3.7V

Test Mode: 802.11n Channel Low 2412MHz

Test Engineer: Pei

For Below 30MHz

Frequency (MHz)	Reading (dBμV/m)	Factor(dB) Corr.	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
-	-	-	-	-	-	X
-	-	-	-	-	-	Y
-	-	-	-	-	-	Z

For 30MHz-1000MHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading (dBμV/m)	Factor Corr. (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
98.7215	27.51	13.94	41.45	43.50	-2.05	Vertical
130.3048	26.21	14.89	41.10	43.50	-2.40	Vertical
162.0197	26.72	14.62	41.34	43.50	-2.16	Vertical
195.8701	25.27	16.14	41.41	43.50	-2.09	Vertical
259.4433	21.29	18.52	39.81	46.00	-6.19	Vertical
328.3068	21.57	19.69	41.26	46.00	-4.74	Vertical
98.7215	26.88	14.01	40.89	43.50	-2.61	Horizontal
130.3048	25.47	14.89	40.36	43.50	-3.14	Horizontal
162.0197	26.26	14.62	40.88	43.50	-2.62	Horizontal
195.8701	25.16	16.02	41.18	43.50	-2.32	Horizontal
259.4433	25.06	18.52	43.58	46.00	-2.42	Horizontal
328.3068	23.08	19.69	42.77	46.00	-3.23	Horizontal

For 1GHz-25GHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading(dBμV/m)		Factor Corr. (dB)	Result(dBμV/m)		Limit(dBμV/m)		Margin(dBμV/m)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
2412.000	71.52	71.73	-7.43	64.09	64.30	-	-	-	-	Vertical
*4824.101	40.00	41.01	-0.19	39.81	40.82	54	74	-14.19	-33.18	Vertical
2412.000	73.34	73.63	-7.43	65.91	66.20	-	-	-	-	Horizontal
*4824.101	41.40	41.64	-0.19	41.21	41.45	54	74	-12.79	-32.55	Horizontal

Note: 1. Emissions attenuated more than 20 dB below the permissible value are not reported.**2. *: Denotes restricted band of operation.**

Date of Test: April 26, 2012

Temperature: 25°C

EUT: MID

Humidity: 50%

Model No.: KW-PC7001A

Power Supply: DC 3.7V

Test Mode: 802.11n Channel Middle 2437MHz

Test Engineer: Pei

For Below 30MHz

Frequency (MHz)	Reading (dBμV/m)	Factor(dB) Corr.	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
-	-	-	-	-	-	X
-	-	-	-	-	-	Y
-	-	-	-	-	-	Z

For 30MHz-1000MHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading (dBμV/m)	Factor Corr. (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
98.7215	27.28	13.94	41.22	43.50	-2.28	Vertical
130.3048	25.76	14.89	40.65	43.50	-2.85	Vertical
162.0197	25.27	14.62	39.89	43.50	-3.61	Vertical
195.8701	25.37	16.14	41.87	43.50	-1.63	Vertical
259.4433	22.39	18.52	40.91	46.00	-5.09	Vertical
328.3068	21.27	19.69	40.96	46.00	-5.04	Vertical
98.7215	26.58	14.01	40.59	43.50	-2.91	Horizontal
130.3048	25.22	14.89	40.11	43.50	-3.39	Horizontal
162.0197	26.86	14.62	41.48	43.50	-2.02	Horizontal
195.8701	24.77	16.02	40.79	43.50	-2.71	Horizontal
259.4433	24.60	18.52	43.12	46.00	-2.88	Horizontal
328.3068	23.27	19.69	42.96	46.00	-3.04	Horizontal

For 1GHz-25GHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading(dBμV/m)		Factor Corr. (dB)	Result(dBμV/m)		Limit(dBμV/m)		Margin(dBμV/m)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
2437.000	72.48	72.70	-7.43	65.05	65.27	-	-	-	-	Vertical
*4874.120	44.15	44.28	0.09	44.24	44.37	54	74	-9.76	-9.63	Vertical
2437.000	75.45	78.92	-7.36	68.09	71.29	-	-	-	-	Horizontal
*4874.120	42.31	44.57	0.09	42.40	44.66	54	74	-11.60	-29.34	Horizontal

Note: 1. Emissions attenuated more than 20 dB below the permissible value are not reported.**2. *: Denotes restricted band of operation.**

Date of Test: April 26, 2012

Temperature: 25°C

EUT: MID

Humidity: 50%

Model No.: KW-PC7001A

Power Supply: DC 3.7V

Test Mode: 802.11n Channel High 2462MHz

Test Engineer: Pei

For Below 30MHz

Frequency (MHz)	Reading (dBμV/m)	Factor(dB) Corr.	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
-	-	-	-	-	-	X
-	-	-	-	-	-	Y
-	-	-	-	-	-	Z

For 30MHz-1000MHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading (dBμV/m)	Factor Corr. (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
98.7215	27.40	13.94	41.34	43.50	-2.16	Vertical
130.3048	25.87	14.89	40.76	43.50	-2.74	Vertical
162.0197	26.19	14.62	40.81	43.50	-2.69	Vertical
195.8701	25.35	16.14	41.49	43.50	-2.01	Vertical
259.4433	23.76	18.52	42.28	46.00	-3.72	Vertical
328.3068	22.45	19.69	42.14	46.000	-3.86	Vertical
98.7215	27.47	14.01	41.48	43.50	-2.02	Horizontal
130.3048	26.27	14.89	41.16	43.50	-2.34	Horizontal
162.0197	27.20	14.62	41.82	43.50	-1.68	Horizontal
195.8701	25.17	16.02	41.19	43.50	-2.31	Horizontal
259.4433	25.06	18.52	43.58	46.00	-2.42	Horizontal
328.3068	23.78	19.69	43.47	46.00	-2.53	Horizontal

For 1GHz-25GHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading(dBμV/m)		Factor Corr. (dB)	Result(dBμV/m)		Limit(dBμV/m)		Margin(dBμV/m)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
2462.000	76.11	76.29	-7.35	68.76	68.94	-	-	-	-	Vertical
*4924.121	46.42	46.75	0.34	46.76	47.09	54	74	-7.24	-26.91	Vertical
2462.000	75.08	75.25	-7.35	67.73	67.90	-	-	-	-	Horizontal
*4924.121	40.00	40.16	0.34	40.34	40.50	54	74	-13.66	-33.50	Horizontal

Note: 1. Emissions attenuated more than 20 dB below the permissible value are not reported.**2. *: Denotes restricted band of operation.**



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.:
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 24 C / 48 %
EUT: MID
Mode: TX Channel 1 (802.11b)
Model: KW-PC7001A
Manufacturer: Kin Wei

Polarization: Horizontal
Power Source: DC 3.7V
Date: 28/04/12/
Time: 9/05/58
Engineer Signature:
Distance: 3m

Note:

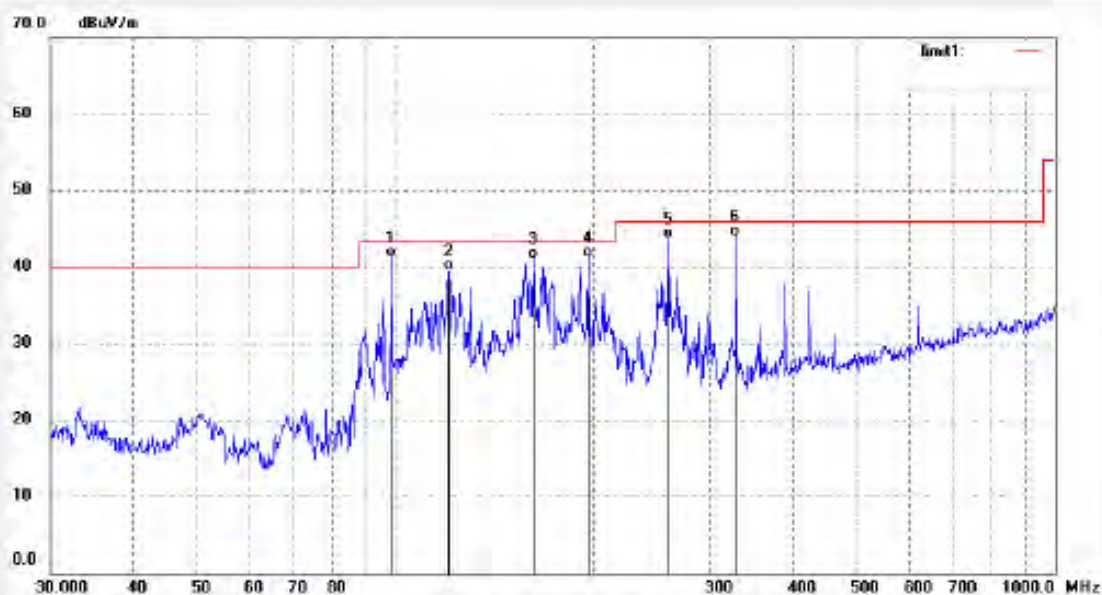

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	98.7215	27.28	14.01	41.29	43.50	-2.21	QP			
2	120.6118	24.66	14.72	39.38	43.50	-4.12	QP			
3	182.0197	26.40	14.62	41.02	43.50	-2.48	QP			
4	195.8701	25.17	16.02	41.19	43.50	-2.31	QP			
5	259.4433	25.22	18.52	43.74	46.00	-2.26	QP			
6	328.3068	24.25	19.69	43.94	46.00	-2.06	QP			


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 986 chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.:
 Standard: FCC Class B 3M Radiated
 Test item: Radiation Test
 Temp.(C)/Hum.(%) 24 C / 48 %
 EUT: MID
 Mode: TX Channel 1 (802.11b)
 Model: KW-PC7001A
 Manufacturer: Kin Wei

Polarization: Vertical
 Power Source: DC 3.7V
 Date: 28/04/12/
 Time: 9/07/48
 Engineer Signature:
 Distance: 3m

Note:

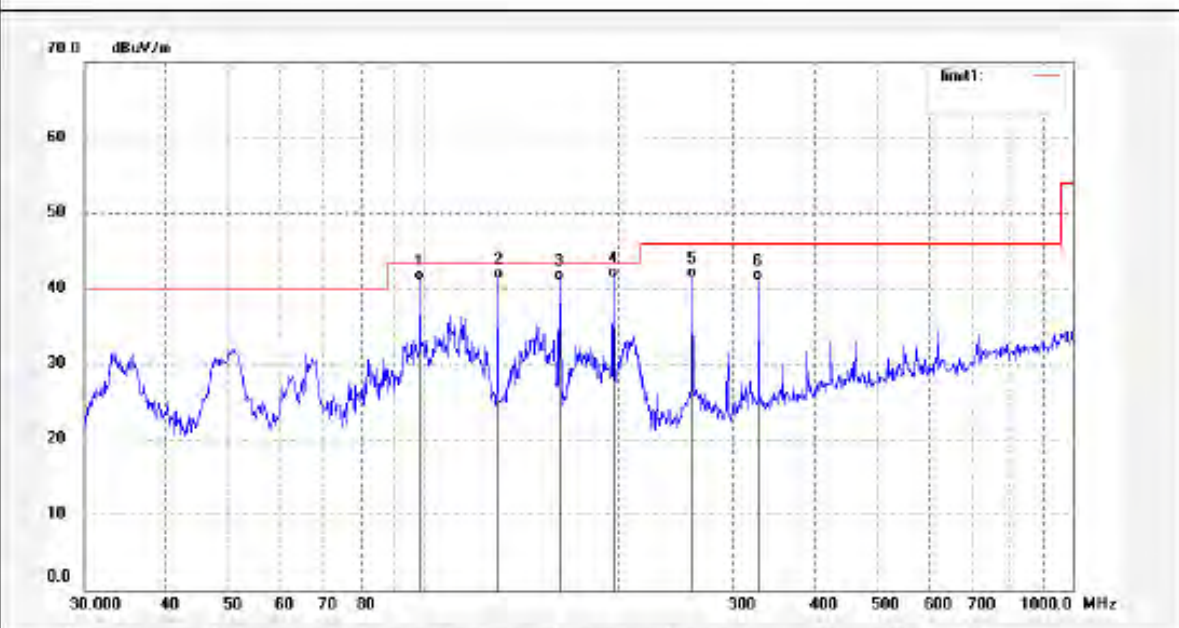

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	98.7215	27.03	13.94	40.97	43.50	-2.53	QP			
2	130.3048	26.31	14.89	41.20	43.50	-2.30	QP			
3	162.0197	26.47	14.62	41.09	43.50	-2.41	QP			
4	195.8701	25.19	18.14	41.33	43.50	-2.17	QP			
5	259.4433	22.93	18.52	41.45	46.00	-4.55	QP			
6	328.3068	21.38	19.69	41.05	46.00	-4.95	QP			



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 988 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503398

Job No.:
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 24 C / 48 %
EUT: MID
Mode: TX Channel 1 (802.11b)
Model: KW-PC7001A
Manufacturer: Kin Wei

Polarization: Horizontal
Power Source: DC 3.7V
Date: 28/04/12/
Time: 18:01:27
Engineer Signature:
Distance: 3m

Note:

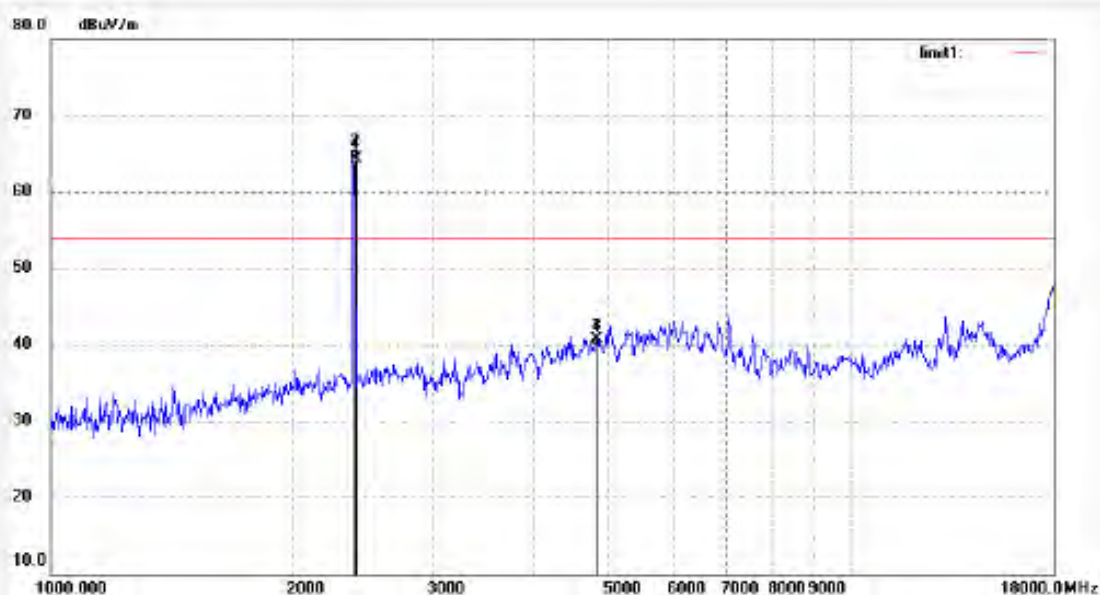

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2412.000	71.72	-7.43	64.29	—	—	peak			
2	2412.000	71.54	-7.43	64.11	—	—	AVG			
3	4824.028	40.99	-0.19	40.80	74.00	-33.20	peak			
4	4824.028	40.00	-0.19	39.81	54.00	-14.19	AVG			


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.:
 Standard: FCC Class B 3M Radiated
 Test item: Radiation Test
 Temp.(C)/Hum.(%) 24 C / 48 %
 EUT: MID
 Mode: TX Channel 1 (802.11b)
 Model: KW-PC7001A
 Manufacturer: Kin Wei

Polarization: Vertical
 Power Source: DC 3.7V
 Date: 28/04/12/
 Time: 17:55:36
 Engineer Signature:
 Distance: 3m

Note: Report No.:

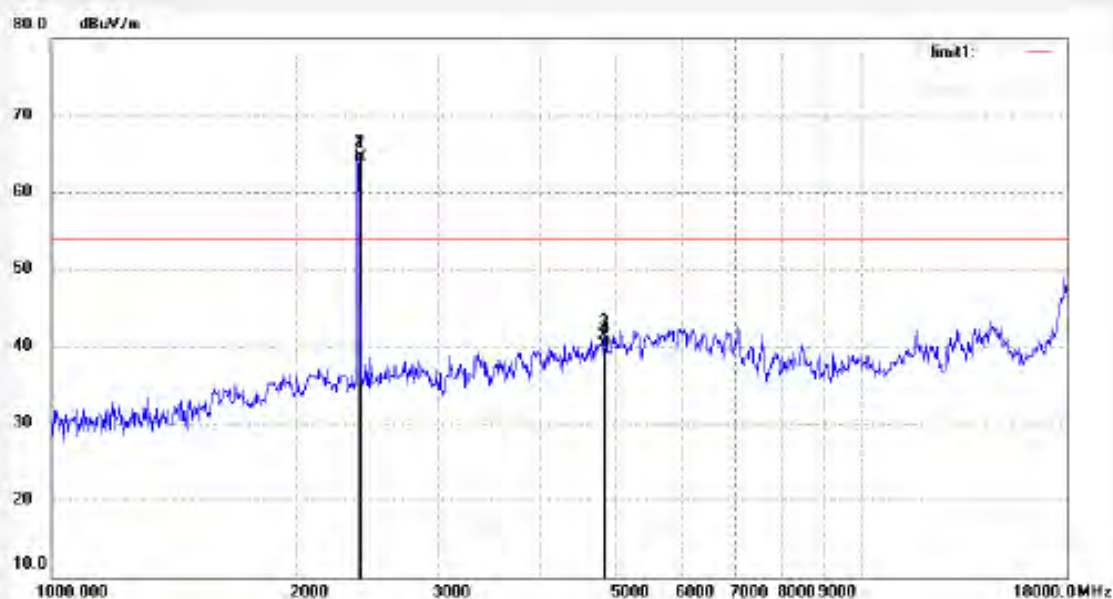

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2412.000	71.96	-7.43	64.53	--	--	peak			
2	2412.000	71.43	-7.43	64.00	--	--	AVG			
3	4824.028	41.63	-0.19	41.44	74.00	-32.56	peak			
4	4824.028	40.00	-0.19	39.81	54.00	-14.19	AVG			


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China


Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.:	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: DC 3.7V
Test item: Radiation Test	Date: 28/04/12/
Temp.(C)/Hum.(%) 25 C / 50 %	Time: 14:57:50
EUT: MID	Engineer Signature:
Mode: TX Channel 1 (802.11b)	Distance: 3m
Model: KW-PC7001A	
Manufacturer: Kin Wei	

Note:

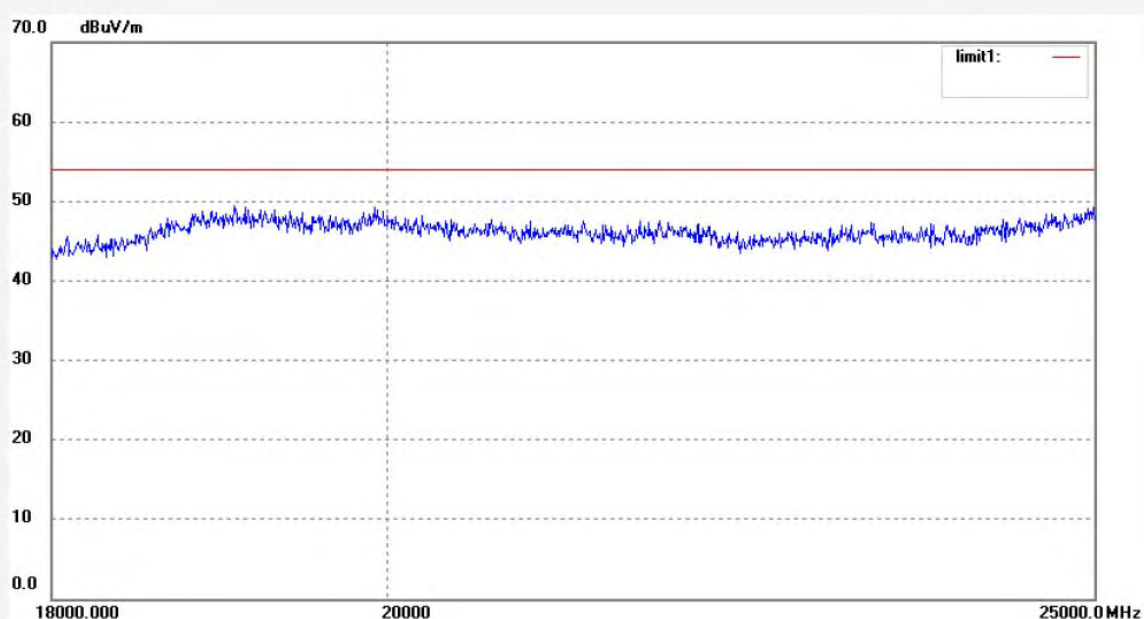

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China


Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.:	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: DC 3.7V
Test item: Radiation Test	Date: 28/04/12/
Temp.(C)/Hum.(%) 25 C / 50 %	Time: 15:01:26
EUT: MID	Engineer Signature:
Mode: TX Channel 1 (802.11b)	Distance: 3m
Model: KW-PC7001A	
Manufacturer: Kin Wei	

Note:

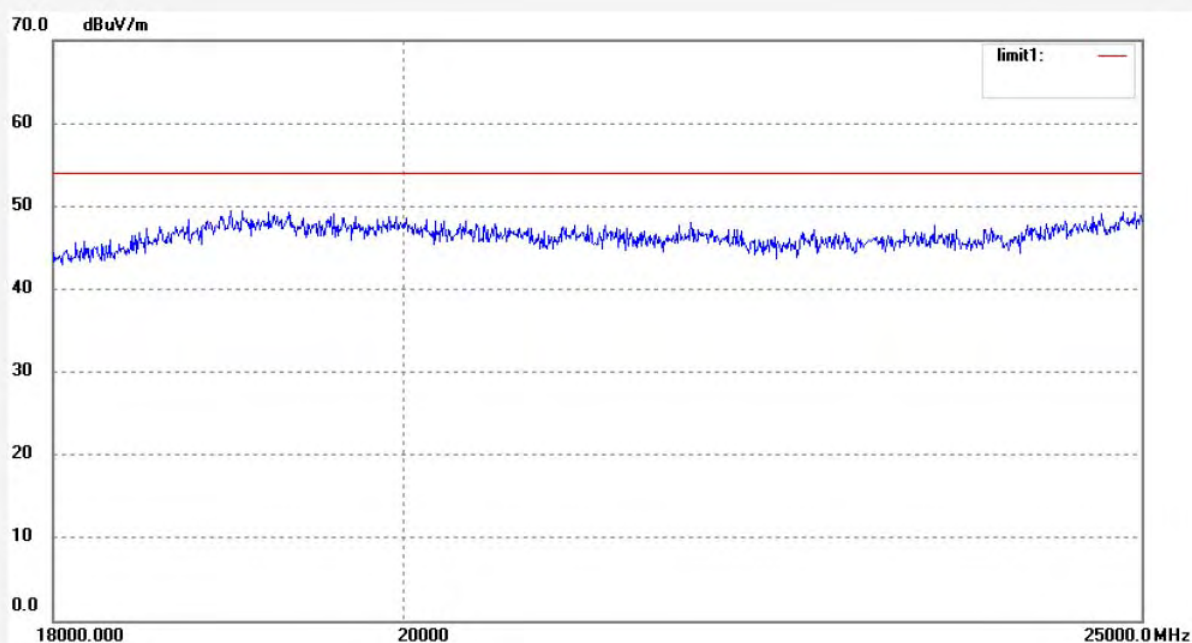

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.:
 Standard: FCC Class B 3M Radiated
 Test item: Radiation Test
 Temp.(C)/Hum.(%) 24 C / 48 %
 EUT: MID
 Mode: TX Channel 6 (802.11b)
 Model: KW-PC7001A
 Manufacturer: Kin Wei

Polarization: Horizontal
 Power Source: DC 3.7V
 Date: 28/04/12/
 Time: 9/09/27
 Engineer Signature:
 Distance: 3m

Note:

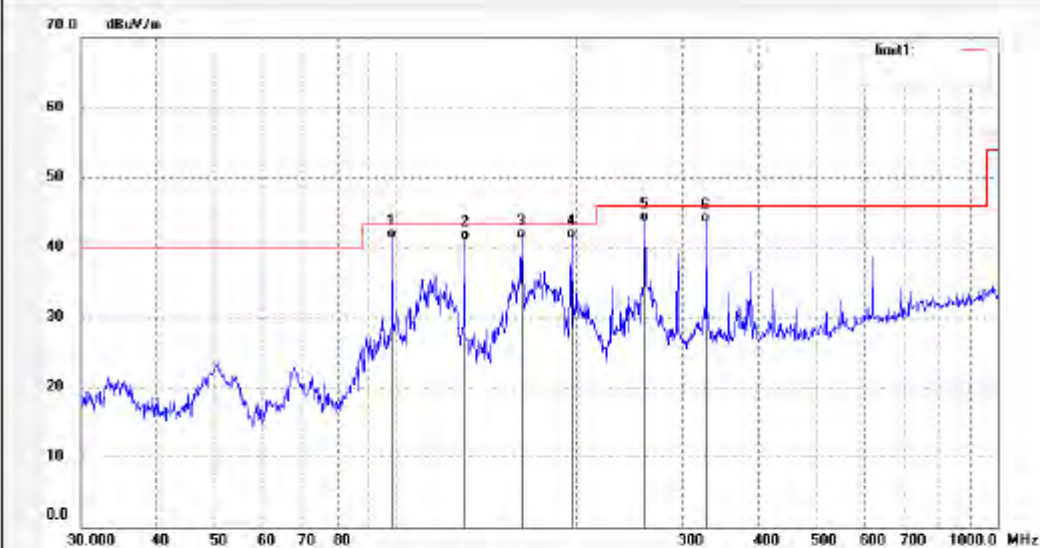

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	98.7215	27.24	14.01	41.25	43.50	-2.25	QP			
2	130.3048	26.07	14.89	40.96	43.50	-2.54	QP			
3	162.0197	26.55	14.62	41.17	43.50	-2.33	QP			
4	195.8701	25.25	16.02	41.27	43.50	-2.23	QP			
5	259.4433	25.16	18.52	43.68	46.00	-2.32	QP			
6	328.3068	23.85	19.69	43.54	46.00	-2.46	QP			


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.:
 Standard: FCC Class B 3M Radiated
 Test item: Radiation Test
 Temp.(C)/Hum.(%) 24 C / 48 %
 EUT: MID
 Mode: TX Channel 6 (802.11b)
 Model: KW-PC7001A
 Manufacturer: Kin Wei

Polarization: Vertical
 Power Source: DC 3.7V
 Date: 28/04/12/
 Time: 9/08/38
 Engineer Signature:
 Distance: 3m

Note:

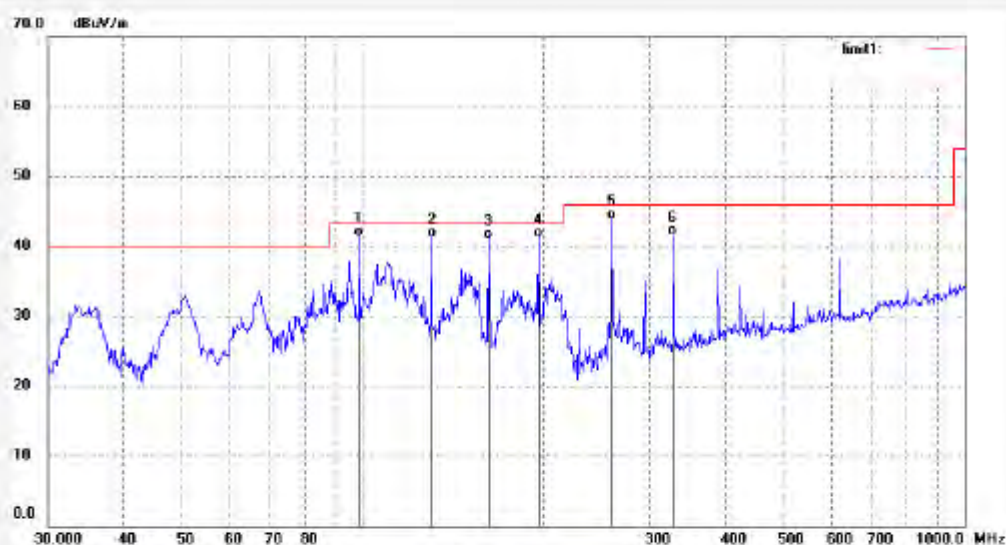

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	98.7215	27.38	13.94	41.32	43.50	-2.18	QP			
2	130.3048	26.34	14.89	41.23	43.50	-2.27	QP			
3	162.0197	26.48	14.62	41.10	43.50	-2.40	QP			
4	195.8701	25.04	16.14	41.18	43.50	-2.32	QP			
5	259.4433	25.28	18.52	43.80	46.00	-2.20	QP			
6	328.3068	21.91	19.69	41.60	46.00	-4.40	QP			


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China


Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.:	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: DC 3.7V
Test item: Radiation Test	Date: 28/04/12/
Temp.(C)/Hum.(%) 24 C / 48 %	Time: 18:02:47
EUT: MID	Engineer Signature:
Mode: TX Channel 6 (802.11b)	Distance: 3m
Model: KW-PC7001A	
Manufacturer: Kin Wei	

Note:

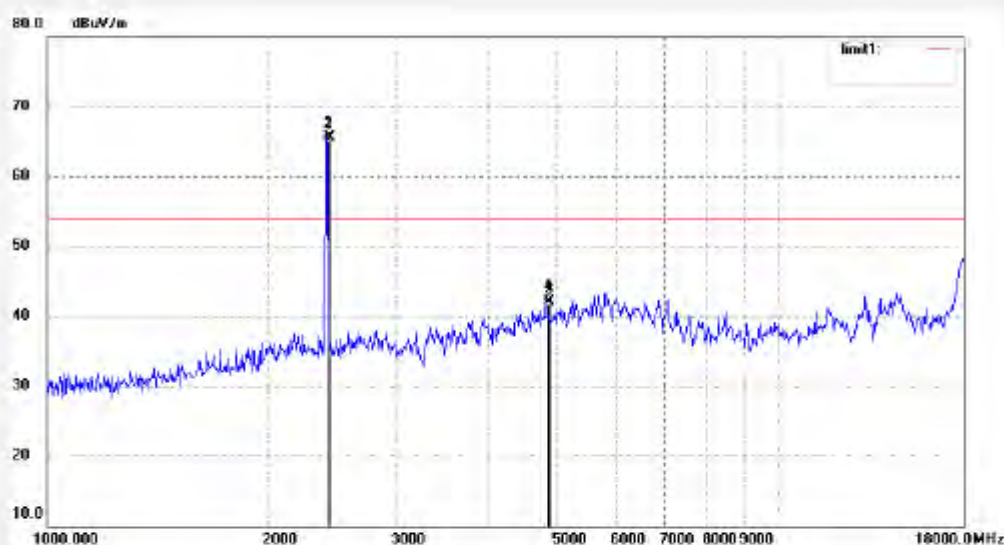

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2437.000	72.84	-7.36	65.48	—	—	peak			
2	2437.000	72.37	-7.36	65.01	—	—	AVG			
3	4874.030	41.96	0.09	42.05	74.00	-31.95	peak			
4	4874.030	41.59	0.09	41.68	54.00	-12.32	AVG			


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

 Job No.:
 Standard: FCC Class B 3M Radiated
 Test item: Radiation Test
 Temp.(C)/Hum.(%) 24 C / 48 %
 EUT: MID
 Mode: TX Channel 6 (802.11b)
 Model: KW-PC7001A
 Manufacturer: Kin Wei

 Polarization: Vertical
 Power Source: DC 3.7V
 Date: 28/04/12/
 Time: 18:03:59
 Engineer Signature:
 Distance: 3m

Note:

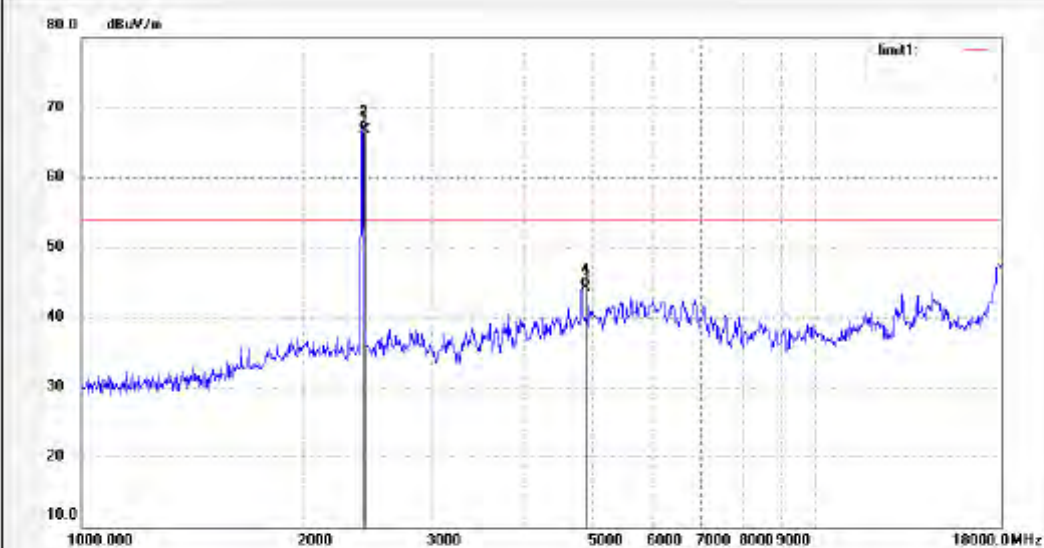

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2437.000	74.20	-7.36	66.84	—	—	peak			
2	2437.000	74.09	-7.36	66.73	—	—	AVG			
3	4874.030	44.13	0.09	44.22	74.00	-29.78	peak			
4	4874.030	44.07	0.09	44.16	54.00	-9.84	AVG			


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China


Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.:	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: DC 3.7V
Test item: Radiation Test	Date: 28/04/12/
Temp.(C)/Hum.(%) 25 C / 50 %	Time: 15:09:14
EUT: MID	Engineer Signature:
Mode: TX Channel 6 (802.11b)	Distance: 3m
Model: KW-PC7001A	
Manufacturer: Kin Wei	

Note:

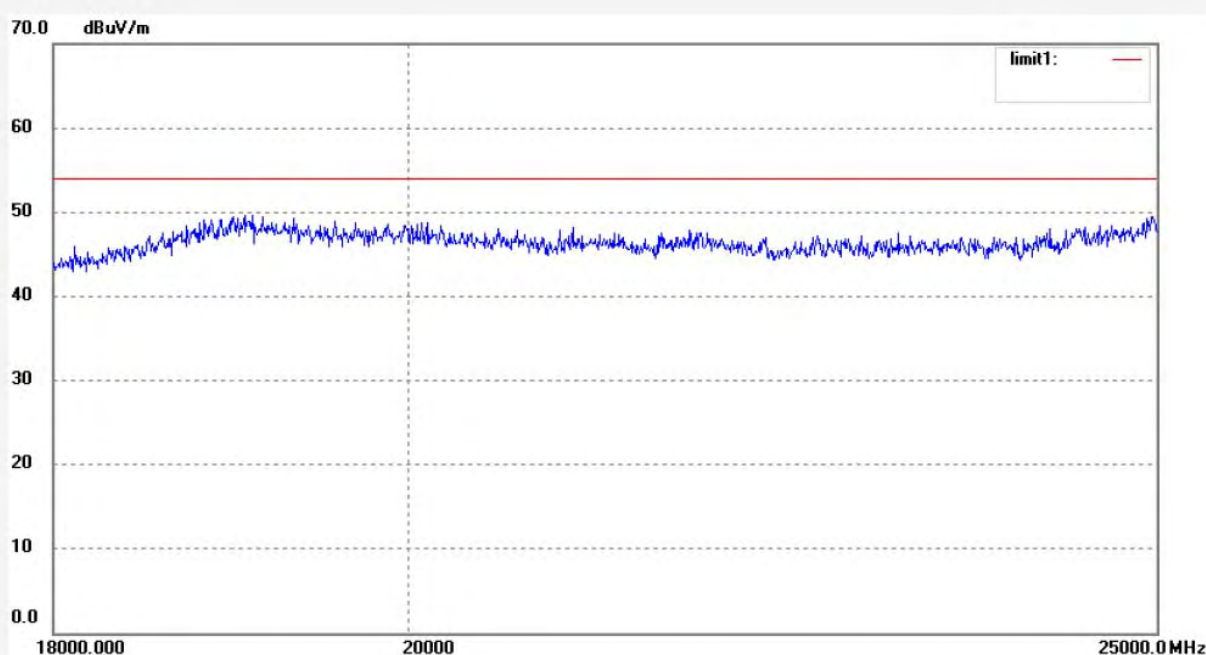

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.:	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: DC 3.7V
Test item: Radiation Test	Date: 28/04/12/
Temp.(C)/Hum.(%) 25 C / 50 %	Time: 15:05:40
EUT: MID	Engineer Signature:
Mode: TX Channel 6 (802.11b)	Distance: 3m
Model: KW-PC7001A	
Manufacturer: Kin Wei	

Note:

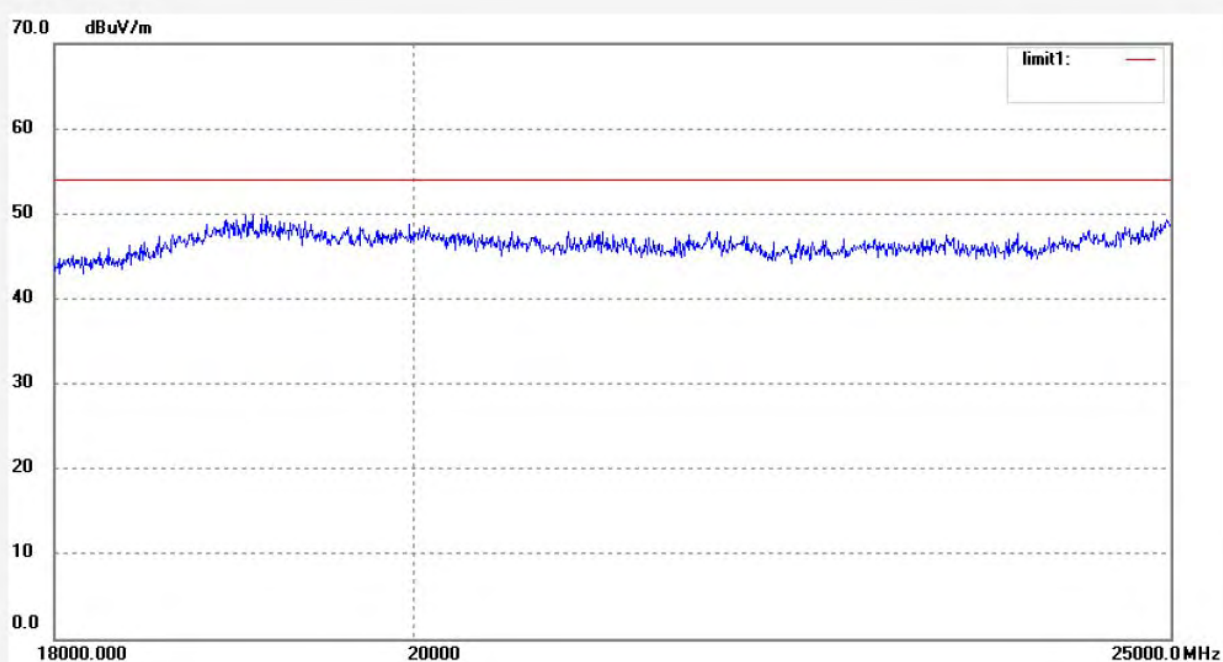

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 986 chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

 Job No.:
 Standard: FCC Class B 3M Radiated
 Test item: Radiation Test
 Temp.(C)/Hum.(%) 24 C / 48 %
 EUT: MID
 Mode: TX Channel 11 (802.11b)
 Model: KW-PC7001A
 Manufacturer: Kin Wei

 Polarization: Horizontal
 Power Source: DC 3.7V
 Date: 28/04/12/
 Time: 9/09/55
 Engineer Signature:
 Distance: 3m

Note:

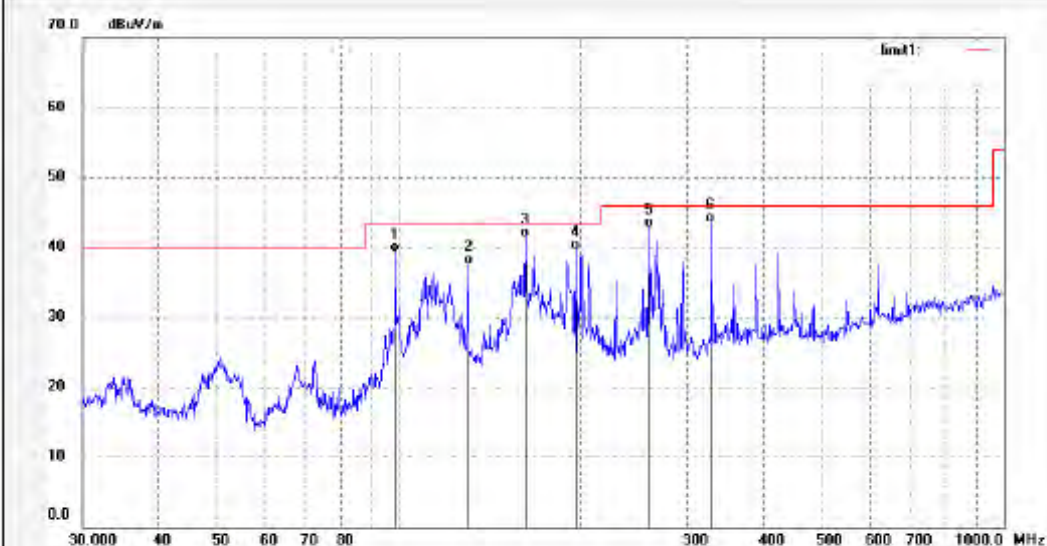

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	98.7215	25.24	14.01	39.25	43.50	-4.25	QP			
2	130.3048	22.64	14.89	37.53	43.50	-5.97	QP			
3	162.0197	26.79	14.62	41.41	43.50	-2.09	QP			
4	195.8701	23.61	16.02	39.63	43.50	-3.87	QP			
5	259.4433	24.23	18.52	42.75	46.00	-3.25	QP			
6	328.3068	23.82	19.69	43.51	46.00	-2.49	QP			


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 988 chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.:
 Standard: FCC Class B 3M Radiated
 Test item: Radiation Test
 Temp.(C)/Hum.(%) 24 C / 48 %
 EUT: MID
 Mode: TX Channel 11 (802.11b)
 Model: KW-PC7001A
 Manufacturer: Kin Wei

Polarization: Vertical
 Power Source: DC 3.7V
 Date: 28/04/12/
 Time: 9/10/58
 Engineer Signature:
 Distance: 3m

Note:

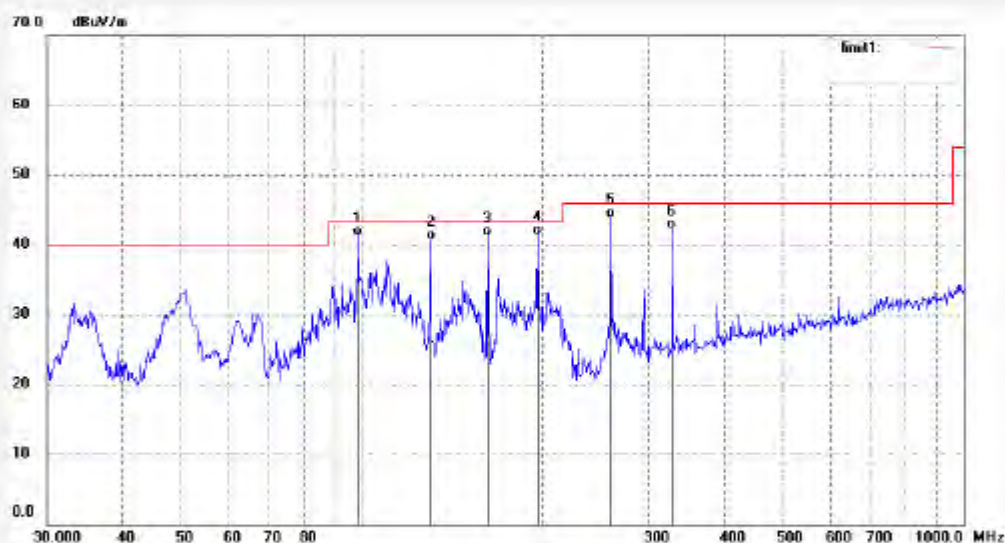

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	98.7215	27.22	13.94	41.16	43.50	-2.34	QP			
2	130.3048	25.80	14.89	40.69	43.50	-2.81	QP			
3	162.0197	26.52	14.62	41.14	43.50	-2.36	QP			
4	195.8701	25.30	16.14	41.44	43.50	-2.06	QP			
5	259.4433	25.29	18.52	43.81	46.00	-2.19	QP			
6	328.3068	22.55	19.69	42.24	46.00	-3.76	QP			


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 986 chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

 Job No.:
 Standard: FCC Class B 3M Radiated
 Test item: Radiation Test
 Temp.(C)/Hum.(%) 24 C / 48 %
 EUT: MID
 Mode: TX Channel 11 (802.11b)
 Model: KW-PC7001A
 Manufacturer: Kin Wei

 Polarization: Horizontal
 Power Source: DC 3.7V
 Date: 28/04/12/
 Time: 18:06:23
 Engineer Signature:
 Distance: 3m

Note:

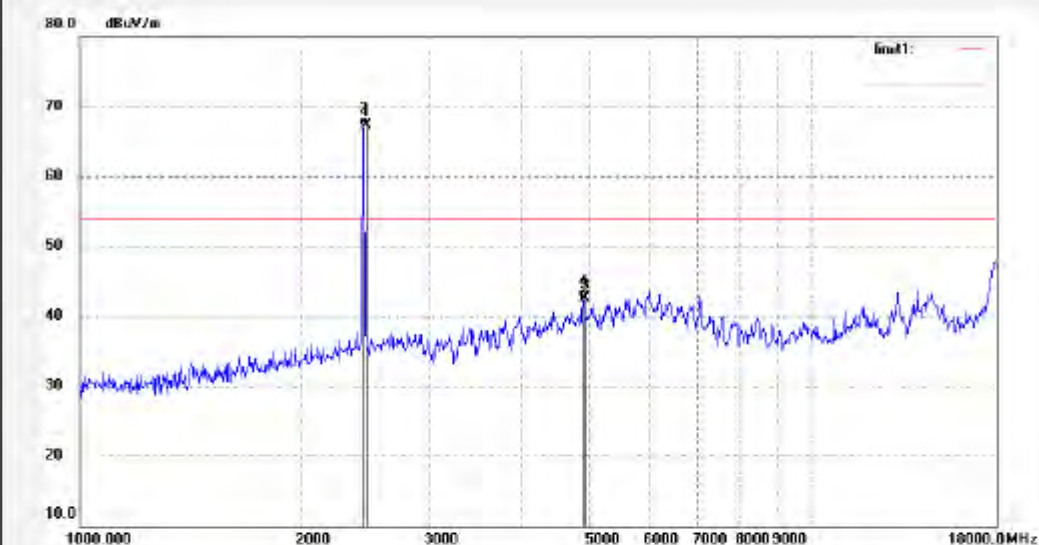

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2462.000	74.72	-7.35	67.37	—	—	peak			
2	2462.000	74.54	-7.35	67.19	—	—	AVG			
3	4924.038	42.27	0.34	42.61	74.00	-31.39	peak			
4	4924.038	42.16	0.34	42.50	54.00	-11.50	AVG			


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.:
 Standard: FCC Class B 3M Radiated
 Test item: Radiation Test
 Temp.(C)/Hum.(%) 24 C / 48 %
 EUT: MID
 Mode: TX Channel 11 (802.11b)
 Model: KW-PC7001A
 Manufacturer: Kin Wei

Polarization: Vertical
 Power Source: DC 3.7V
 Date: 28/04/12/
 Time: 18:05:15
 Engineer Signature:
 Distance: 3m

Note:

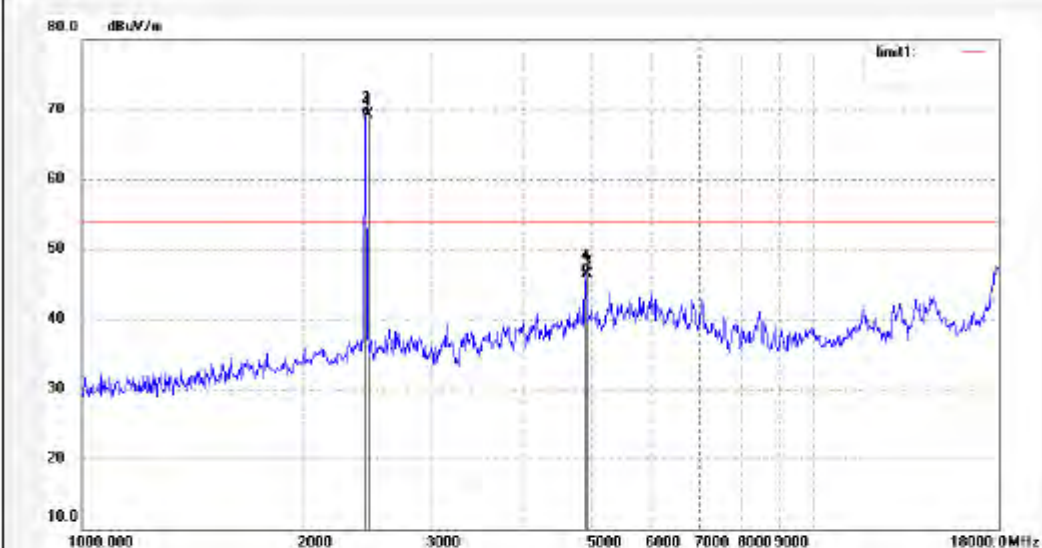

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2462.000	76.59	-7.35	69.24	--	--	peak			
2	2462.000	76.37	-7.35	69.02	--	--	AVG			
3	4924.038	46.21	0.34	46.55	74.00	-27.45	peak			
4	4924.038	46.15	0.34	46.49	54.00	-7.51	AVG			


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.:

Polarization: Horizontal

Standard: FCC Class B 3M Radiated

Power Source: DC 3.7V

Test item: Radiation Test

Date: 28/04/12/

Temp.(C)/Hum.(%) 25 C / 50 %

Time: 15:13:25

EUT: MID

Engineer Signature:


Mode: TX Channel 11 (802.11b)

Distance: 3m

Model: KW-PC7001A

Manufacturer: Kin Wei

Note:

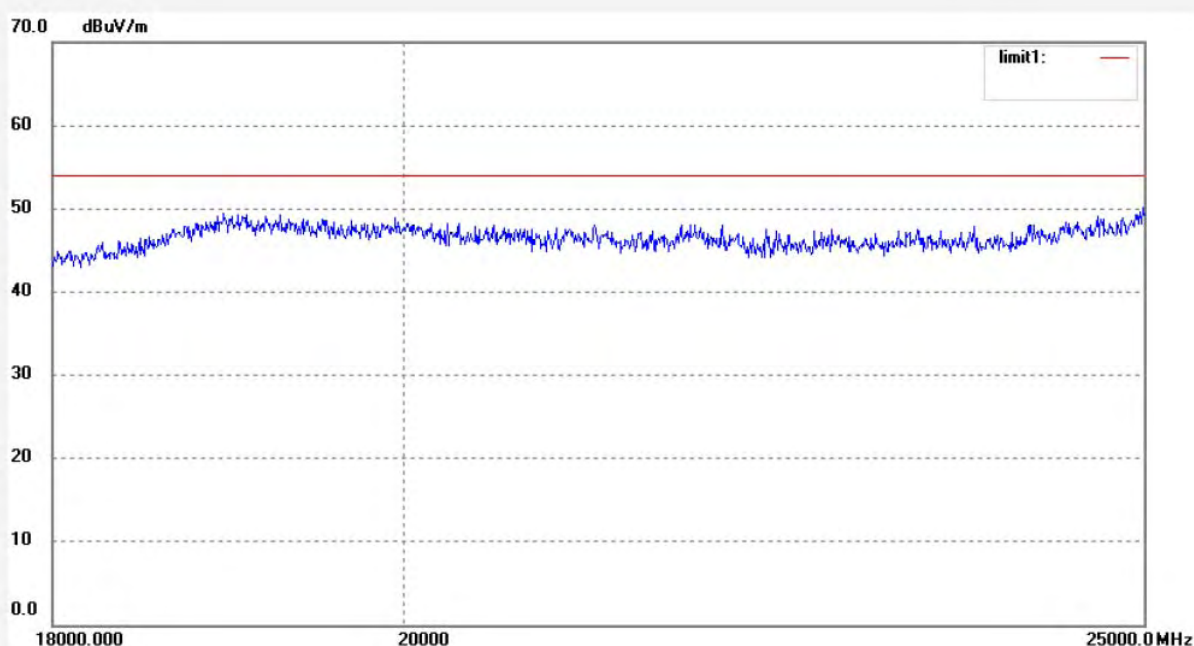

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.:
 Standard: FCC Class B 3M Radiated
 Test item: Radiation Test
 Temp.(C)/Hum.(%) 25 C / 50 %
 EUT: MID
 Mode: TX Channel 11 (802.11b)
 Model: KW-PC7001A
 Manufacturer: Kin Wei

Polarization: Vertical
 Power Source: DC 3.7V
 Date: 28/04/12/
 Time: 15:16:58
 Engineer Signature:
 Distance: 3m

Note:

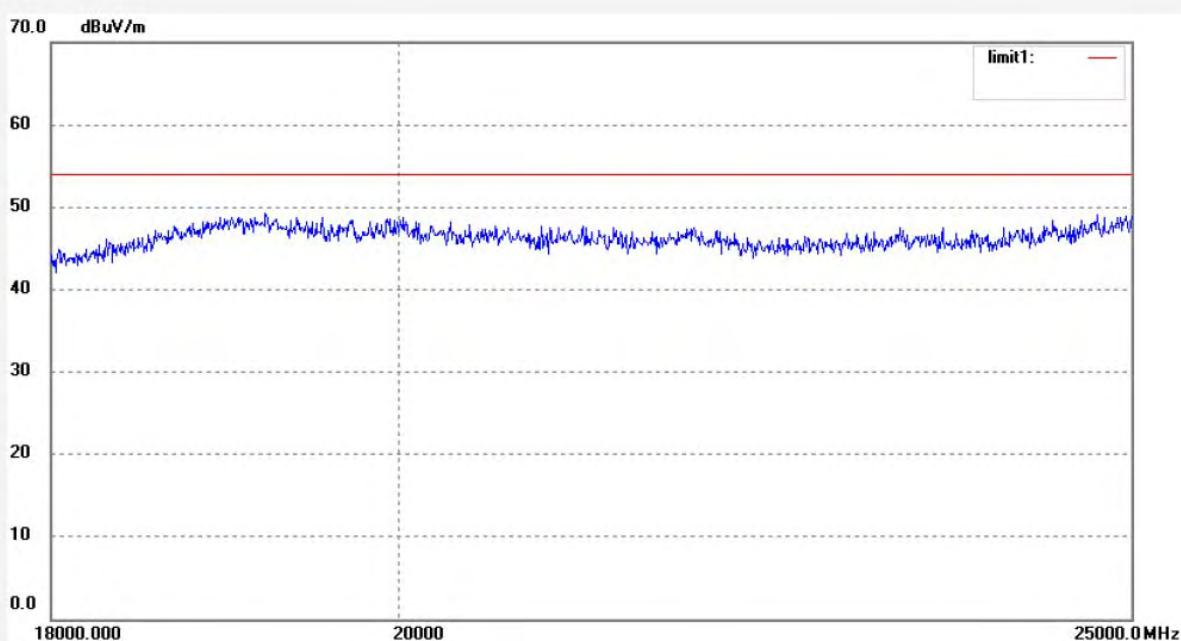

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.:
 Standard: FCC Class B 3M Radiated
 Test item: Radiation Test
 Temp.(C)/Hum.(%) 24 C / 48 %
 EUT: MID
 Mode: TX Channel 1 (802.11g)
 Model: KW-PC7001A
 Manufacturer: Kin Wei

Polarization: Horizontal
 Power Source: DC 3.7V
 Date: 28/04/12/
 Time: 9/15/04
 Engineer Signature:
 Distance: 3m

Note:

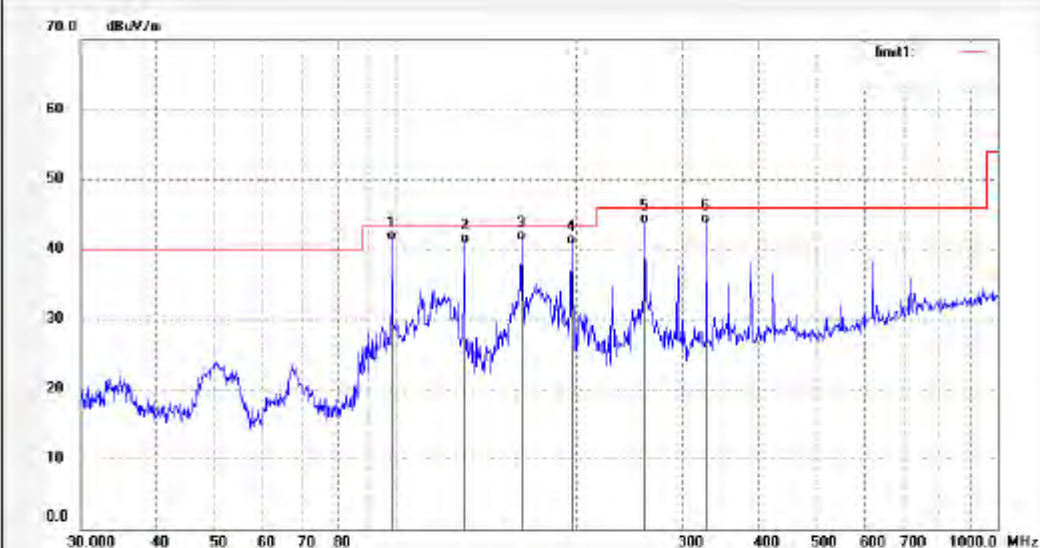

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	98.7215	27.27	14.01	41.28	43.50	-2.22	QP			
2	130.3048	26.04	14.89	40.93	43.50	-2.57	QP			
3	162.0197	26.58	14.62	41.20	43.50	-2.30	QP			
4	195.8701	24.71	16.02	40.73	43.50	-2.77	QP			
5	259.4433	25.21	18.52	43.73	46.00	-2.27	QP			
6	328.3068	24.05	19.69	43.74	46.00	-2.26	QP			


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

 Job No.:
 Standard: FCC Class B 3M Radiated
 Test item: Radiation Test
 Temp.(C)/Hum.(%) 24 C / 48 %
 EUT: MID
 Mode: TX Channel 1 (802.11g)
 Model: KW-PC7001A
 Manufacturer: Kin Wei

 Polarization: Vertical
 Power Source: DC 3.7V
 Date: 28/04/12/
 Time: 9/14/19
 Engineer Signature:
 Distance: 3m

Note:

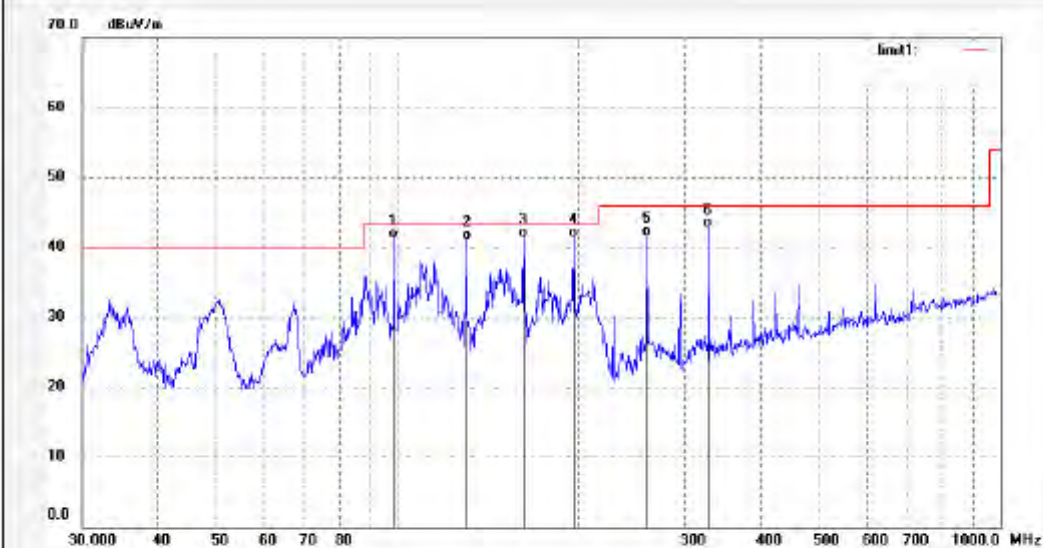

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	98.7215	27.27	13.94	41.21	43.50	-2.29	QP			
2	130.3048	26.09	14.89	40.98	43.50	-2.52	QP			
3	162.0197	26.73	14.62	41.35	43.50	-2.15	QP			
4	195.8701	25.18	16.14	41.32	43.50	-2.18	QP			
5	259.4433	22.98	18.52	41.50	46.00	-4.50	QP			
6	328.3068	23.02	19.69	42.71	46.00	-3.29	QP			


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 986 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503398

Job No.:

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 24 C / 48 %

EUT: MID

Mode: TX Channel 1 (802.11g)

Model: KW-PC7001A

Manufacturer: Kin Wei

Polarization: Horizontal

Power Source: DC 3.7V


Date: 28/04/12/

Time: 18:23:18

Engineer Signature:

Distance: 3m

Note:

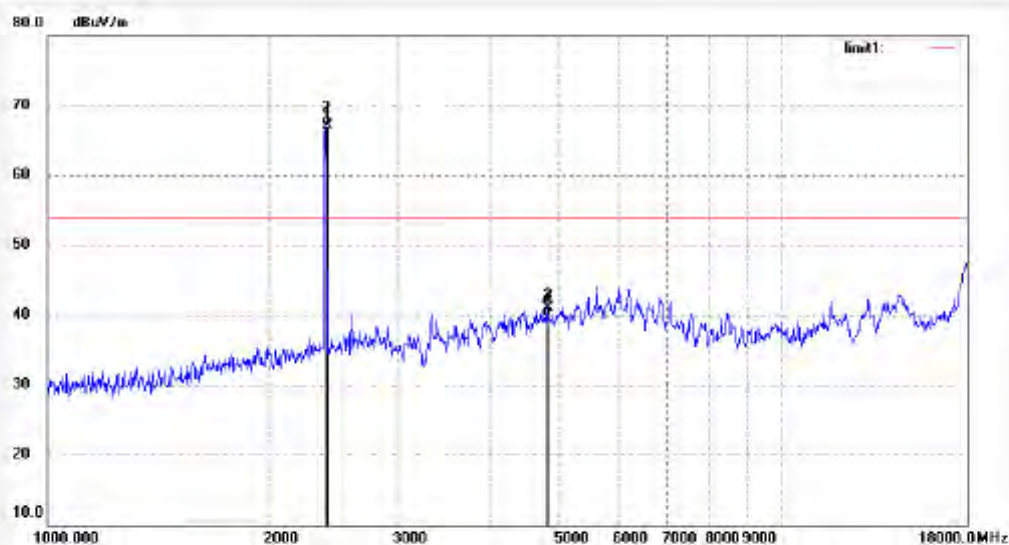

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2412.000	79.58	-7.43	72.15	—	—	peak			
2	2412.000	74.55	-7.43	67.12	—	—	AVG			
3	4824.031	41.20	-0.19	41.01	74.00	-32.99	peak			
4	4824.031	40.00	-0.19	39.81	54.00	-14.19	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China


Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.:	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: DC 3.7V
Test item: Radiation Test	Date: 28/04/12/
Temp.(C)/Hum.(%) 24 C / 48 %	Time: 18:24:19
EUT: MID	Engineer Signature:
Mode: TX Channel 1 (802.11g)	Distance: 3m
Model: KW-PC7001A	
Manufacturer: Kin Wei	

Note:

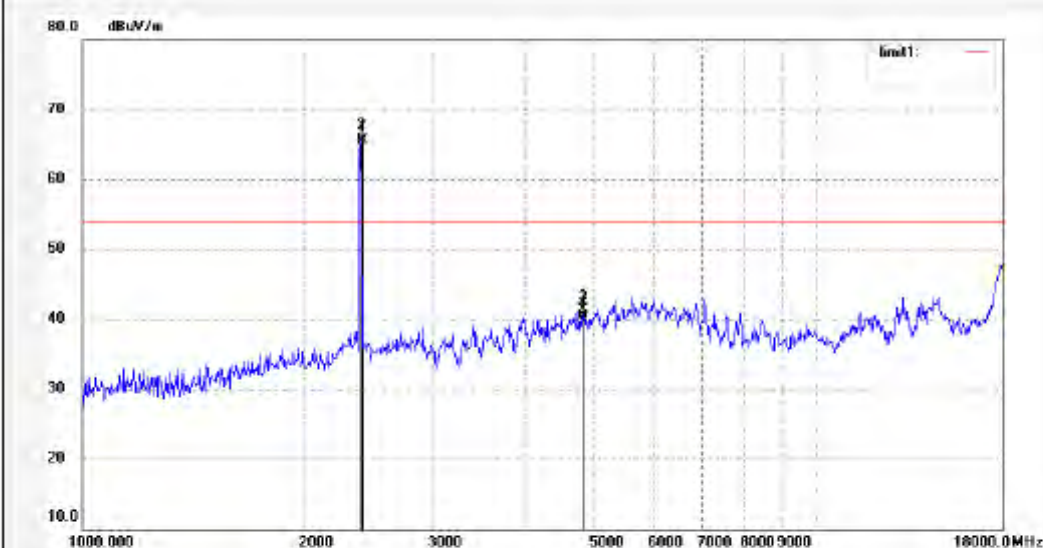

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2412.000	72.93	-7.43	65.50	--	--	peak			
2	2412.000	72.66	-7.43	65.23	--	--	AVG			
3	4824.031	41.62	-0.19	41.43	74.00	-32.57	peak			
4	4824.031	40.00	-0.19	39.81	54.00	-14.19	AVG			


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China


Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.:	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: DC 3.7V
Test item: Radiation Test	Date: 28/04/12/
Temp.(C)/Hum.(%) 25 C / 50 %	Time: 15:26:21
EUT: MID	Engineer Signature:
Mode: TX Channel 1 (802.11g)	Distance: 3m
Model: KW-PC7001A	
Manufacturer: Kin Wei	

Note:

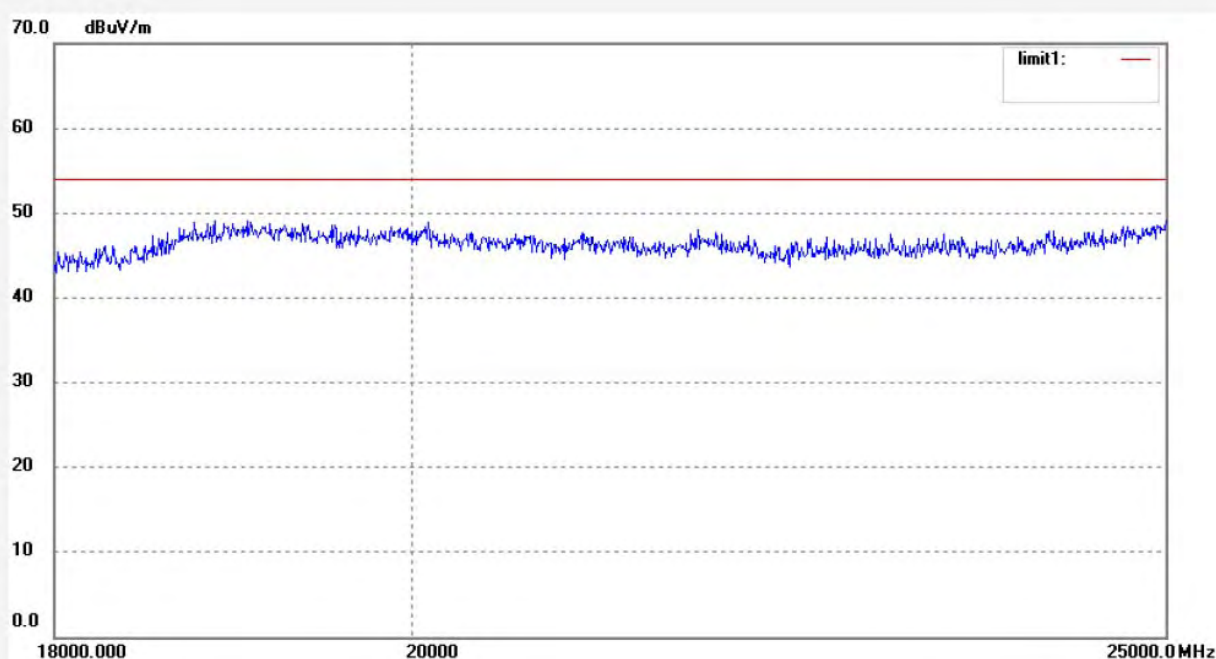

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.:
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 25 C / 50 %
EUT: MID
Mode: TX Channel 1 (802.11g)
Model: KW-PC7001A
Manufacturer: Kin Wei

Polarization: Vertical
Power Source: DC 3.7V
Date: 28/04/12/
Time: 15:22:46
Engineer Signature:
Distance: 3m

Note:

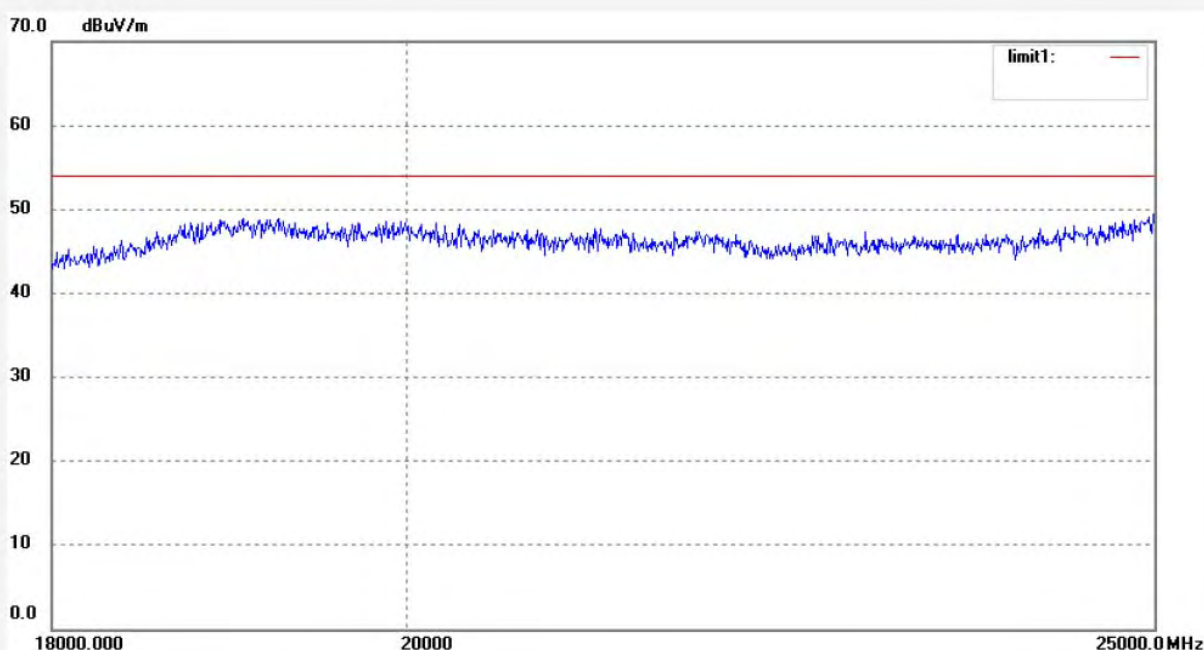

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.:
 Standard: FCC Class B 3M Radiated
 Test item: Radiation Test
 Temp.(C)/Hum.(%) 24 C / 48 %
 EUT: MID
 Mode: TX Channel 6 (802.11g)
 Model: KW-PC7001A
 Manufacturer: Kin Wei

Polarization: Horizontal
 Power Source: DC 3.7V
 Date: 28/04/12/
 Time: 9/12/54
 Engineer Signature:
 Distance: 3m

Note:

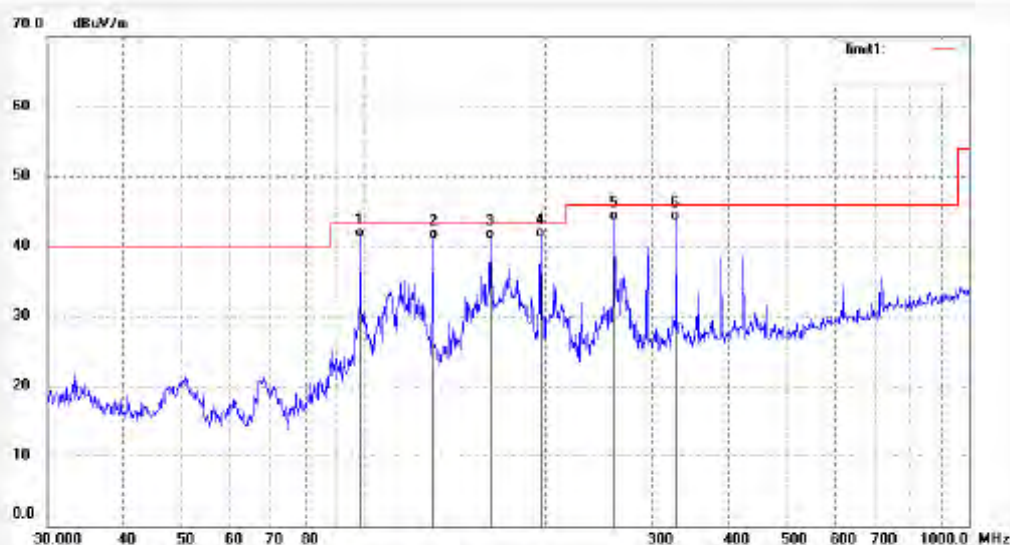

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	98.7215	27.23	14.01	41.24	43.50	-2.26	QP			
2	130.3048	26.19	14.89	41.08	43.50	-2.42	QP			
3	162.0197	26.41	14.62	41.03	43.50	-2.47	QP			
4	195.8701	25.20	16.02	41.22	43.50	-2.28	QP			
5	259.4433	25.14	18.52	43.66	46.00	-2.34	QP			
6	328.3068	24.01	19.69	43.70	46.00	-2.30	QP			


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-28503290

Fax:+86-0755-28503398

Job No.:

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 24 C / 48 %

EUT: MID

Mode: TX Channel 6 (802.11g)

Model: KW-PC7001A

Manufacturer: Kin Wei

Polarization: Vertical

Power Source: DC 3.7V


Date: 28/04/12/

Time: 9/13/33

Engineer Signature:

Distance: 3m

Note:

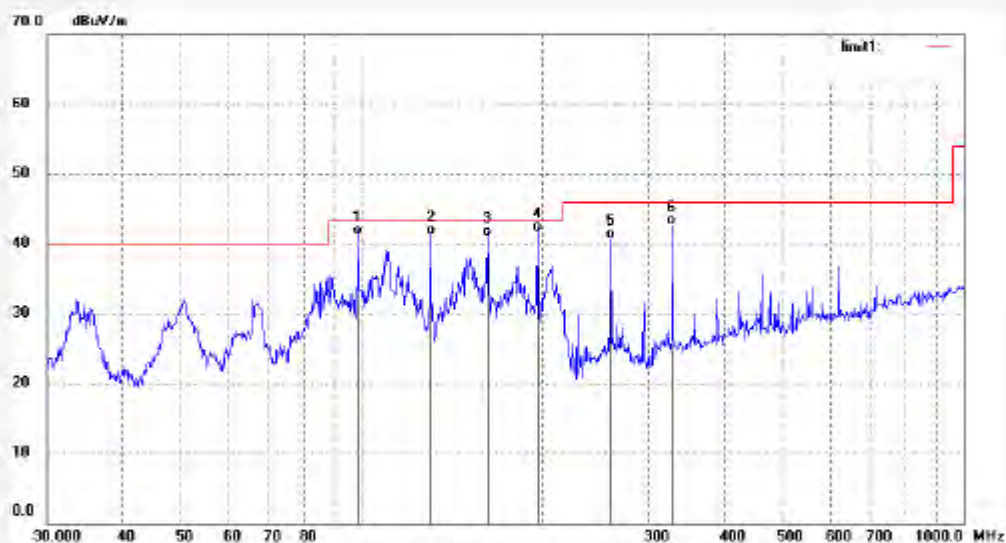

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	98.7215	27.28	13.94	41.22	43.50	-2.28	QP			
2	130.3048	26.32	14.89	41.21	43.50	-2.29	QP			
3	162.0197	26.45	14.62	41.07	43.50	-2.43	QP			
4	195.8701	25.59	16.14	41.73	43.50	-1.77	QP			
5	259.4433	22.17	18.52	40.69	48.00	-5.31	QP			
6	328.3068	22.87	19.69	42.56	48.00	-3.44	QP			


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 988 chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.:
 Standard: FCC Class B 3M Radiated
 Test item: Radiation Test
 Temp.(C)/Hum.(%) 24 C / 48 %
 EUT: MID
 Mode: TX Channel 6 (802.11g)
 Model: KW-PC7001A
 Manufacturer: Kin Wei

Polarization: Horizontal
 Power Source: DC 3.7V
 Date: 28/04/12/
 Time: 18:21:53
 Engineer Signature:
 Distance: 3m

Note:

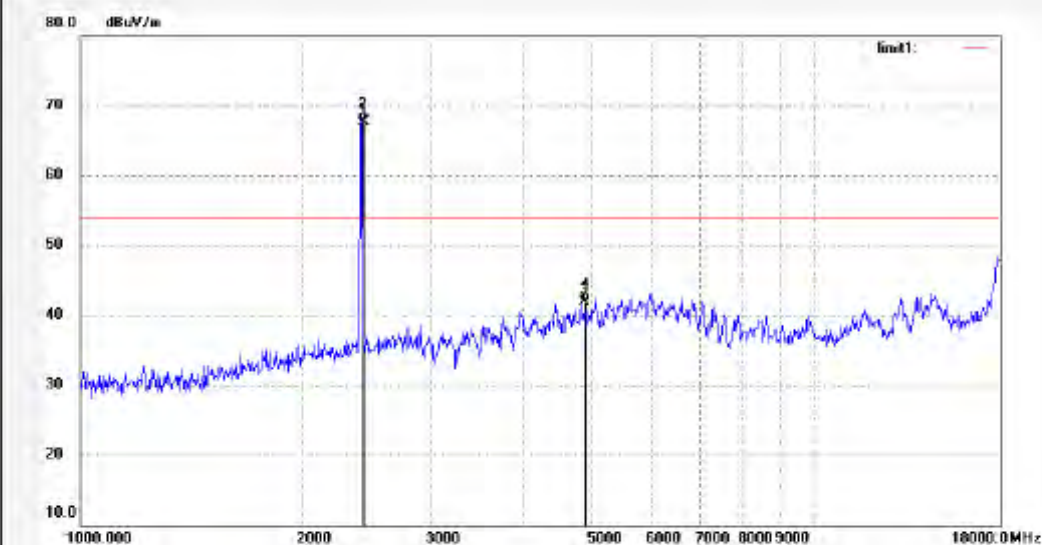

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2437.000	81.23	-7.36	73.87	--	--	peak			
2	2437.000	75.06	-7.36	67.70	--	--	AVG			
3	4874.110	49.42	0.09	41.92	74.00	-24.49	peak			
4	4874.110	41.83	0.09	49.51	54.00	-12.08	AVG			


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.:

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 24 C / 48 %

EUT: MID

Mode: TX Channel 6 (802.11g)

Model: KW-PC7001A

Manufacturer: Kin Wei

Polarization: Vertical

Power Source: DC 3.7V


Date: 28/04/12/

Time: 18:20:45

Engineer Signature:

Distance: 3m

Note:

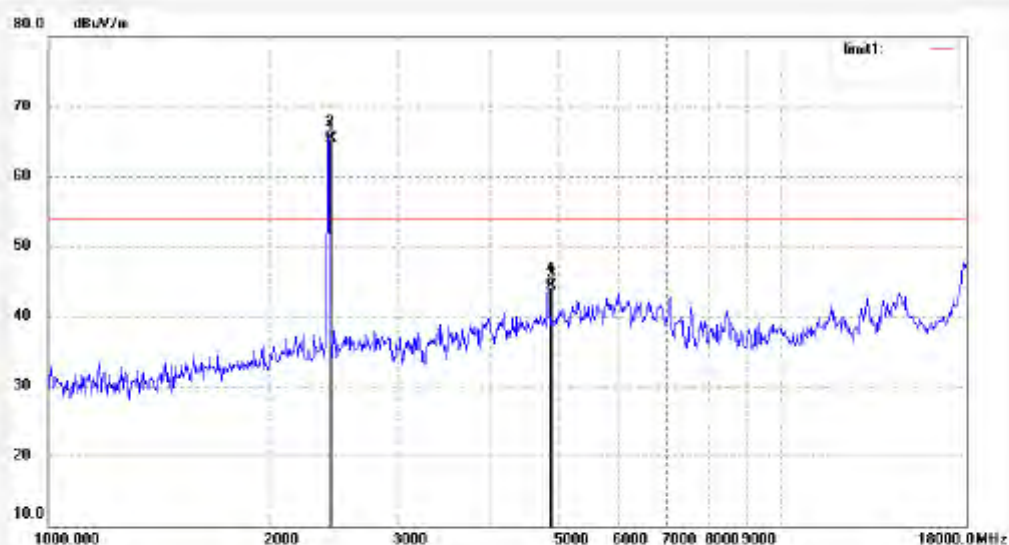

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2437.000	72.82	-7.36	65.46	--	--	peak			
2	2437.000	72.62	-7.36	65.26	--	--	AVG			
3	4874.110	44.31	0.09	44.40	74.00	-29.60	peak			
4	4874.110	44.17	0.09	44.26	54.00	-9.74	AVG			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.:	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: DC 3.7V
Test item: Radiation Test	Date: 28/04/12/
Temp.(C)/Hum.(%) 25 C / 50 %	Time: 15:30:38
EUT: MID	Engineer Signature:
Mode: TX Channel 6 (802.11g)	Distance: 3m
Model: KW-PC7001A	
Manufacturer: Kin Wei	

Note:

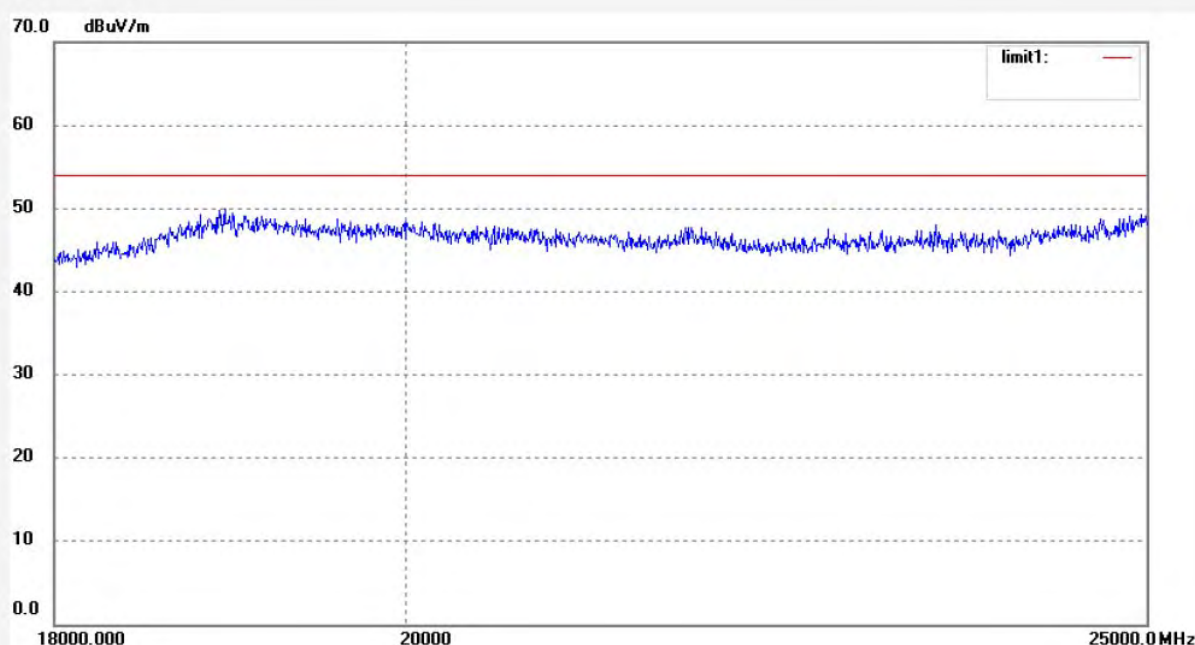

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.:	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: DC 3.7V
Test item: Radiation Test	Date: 28/04/12/
Temp.(C)/Hum.(%) 25 C / 50 %	Time: 15:34:11
EUT: MID	Engineer Signature:
Mode: TX Channel 6 (802.11g)	Distance: 3m
Model: KW-PC7001A	
Manufacturer: Kin Wei	

Note:

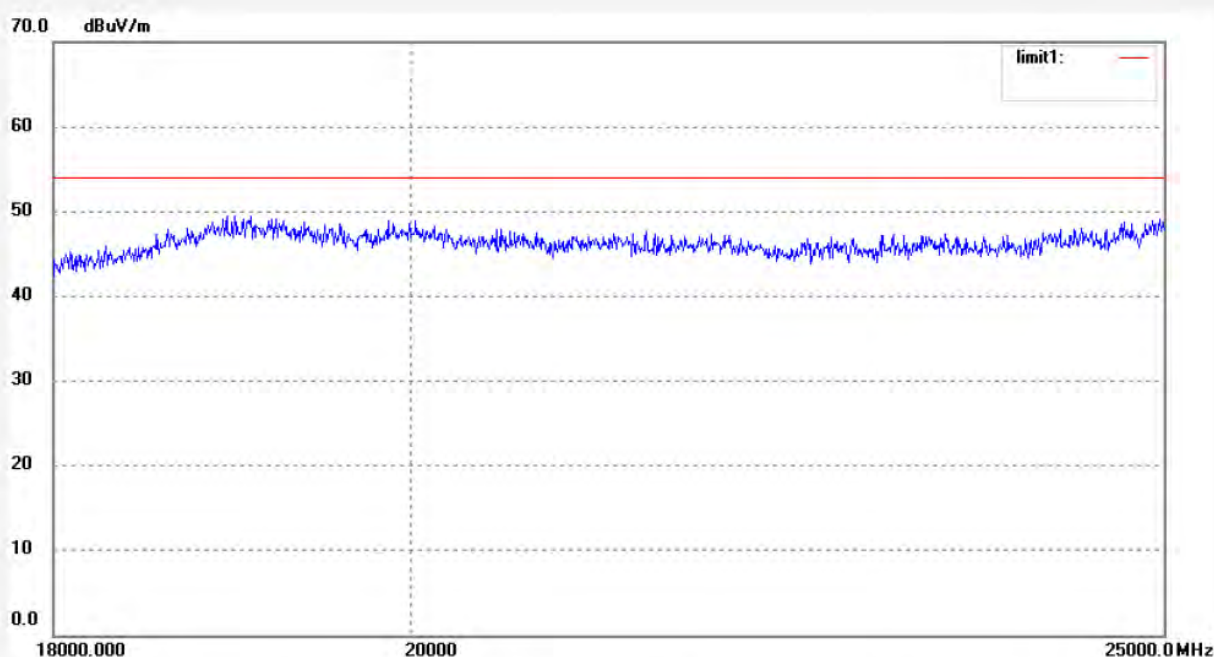

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-28503290

Fax:+86-0755-28503398

Job No.:

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 24 C / 48 %

EUT: MID

Mode: TX Channel 11 (802.11g)

Model: KW-PC7001A

Manufacturer: Kin Wei

Polarization: Horizontal

Power Source: DC 3.7V


Date: 28/04/12/

Time: 9/12/28

Engineer Signature:

Distance: 3m

Note:

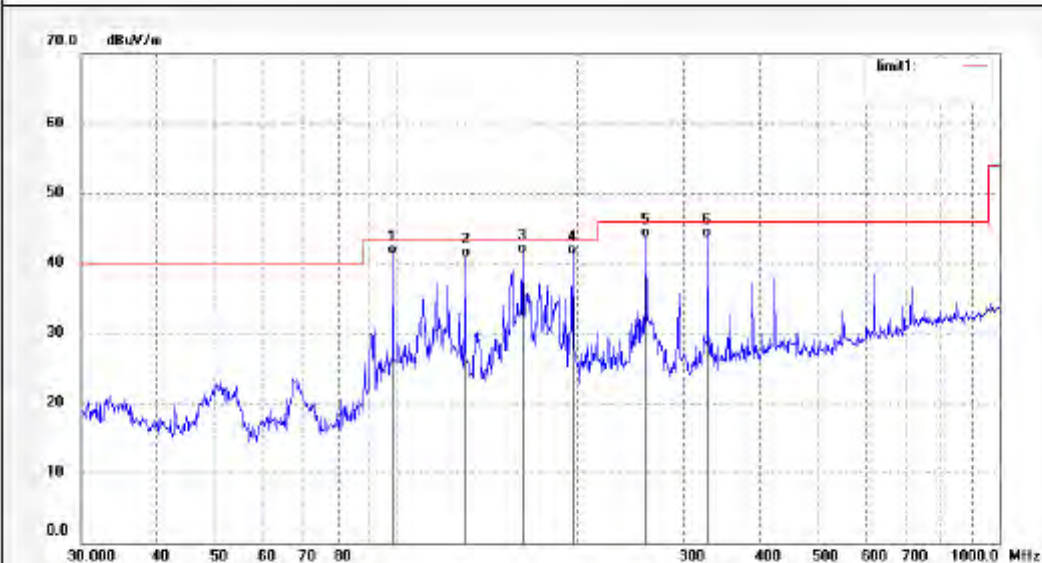

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	98.7215	27.20	14.01	41.21	43.50	-2.29	QP			
2	130.3048	26.04	14.89	40.93	43.50	-2.57	QP			
3	162.0197	26.73	14.62	41.35	43.50	-2.15	QP			
4	195.8701	26.23	16.02	41.25	43.50	-2.25	QP			
5	259.4433	26.13	18.52	43.65	46.00	-2.35	QP			
6	328.3068	24.04	19.69	43.73	46.00	-2.27	QP			


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

 Job No.:
 Standard: FCC Class B 3M Radiated
 Test item: Radiation Test
 Temp.(C)/Hum.(%) 24 C / 48 %
 EUT: MID
 Mode: TX Channel 11 (802.11g)
 Model: KW-PC7001A
 Manufacturer: Kin Wei

 Polarization: Vertical
 Power Source: DC 3.7V
 Date: 28/04/12/
 Time: 9/11/32
 Engineer Signature:
 Distance: 3m

Note:

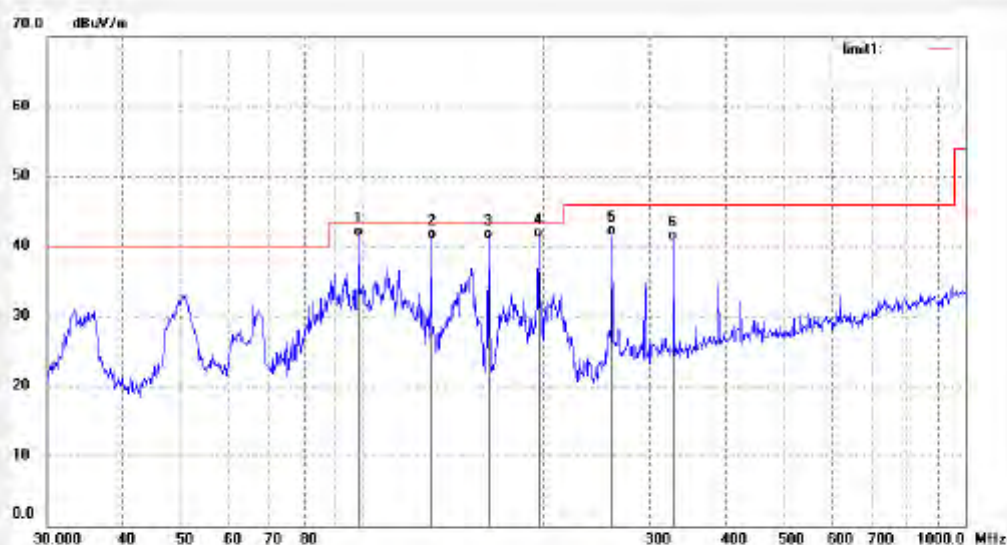

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	98.7215	27.51	13.94	41.45	43.50	-2.05	QP			
2	130.3048	26.23	14.89	41.12	43.50	-2.38	QP			
3	162.0197	26.45	14.62	41.07	43.50	-2.43	QP			
4	195.8701	25.14	16.14	41.28	43.50	-2.22	QP			
5	259.4433	23.07	18.52	41.59	46.00	-4.41	QP			
6	328.3068	21.10	19.69	40.79	46.00	-5.21	QP			


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.:

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 24 C / 48 %

EUT: MID

Mode: TX Channel 11 (802.11g)

Model: KW-PC7001A

Manufacturer: Kin Wei

Polarization: Horizontal

Power Source: DC 3.7V


Date: 28/04/12/

Time: 18:18:02

Engineer Signature:

Distance: 3m

Note:

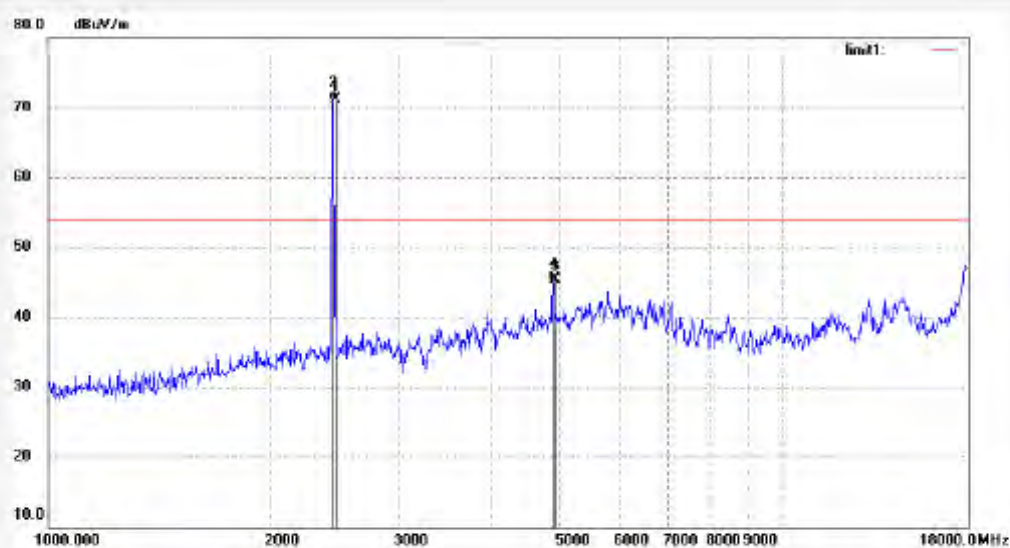

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2462.000	78.60	-7.35	71.25	—	—	peak			
2	2462.000	78.42	-7.35	71.07	—	—	AVG			
3	4924.105	45.05	0.34	45.39	74.00	-28.61	peak			
4	4924.105	44.83	0.34	45.17	54.00	-8.83	AVG			


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China


Site: 968 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Polarization: Vertical
 Standard: FCC Class B 3M Radiated Power Source: DC 3.7V
 Test item: Radiation Test Date: 28/04/12/
 Temp.(C)/Hum.(%) 24 C / 48 % Time: 18:19:00
 EUT: MID Engineer Signature:
 Mode: TX Channel 11 (802.11g) Distance: 3m
 Model: KW-PC7001A
 Manufacturer: Kin Wei

Note:

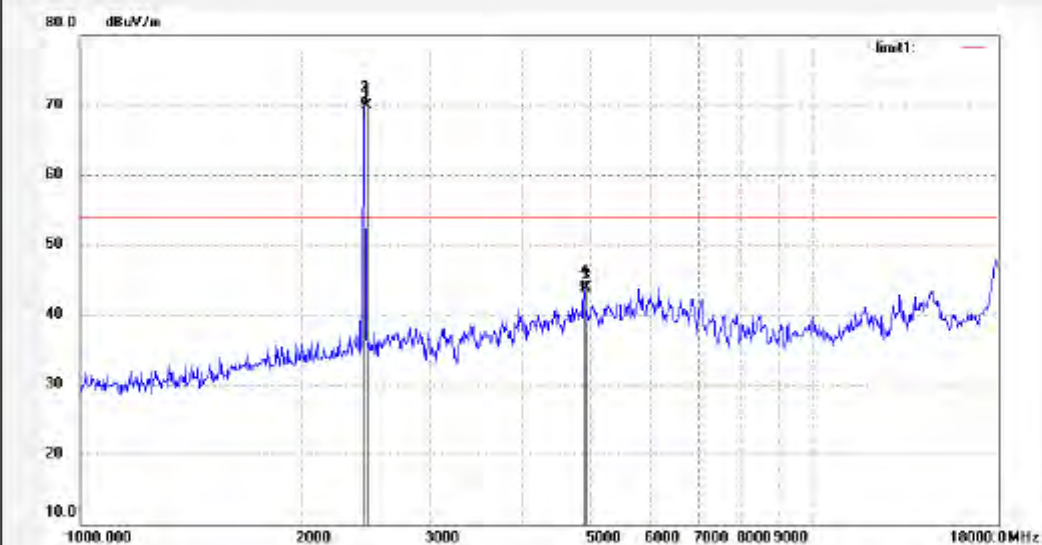

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2462.000	77.33	-7.35	69.98	--	--	peak			
2	2462.000	77.21	-7.35	69.86	--	--	AVG			
3	4924.105	43.47	0.34	43.81	74.00	-30.19	peak			
4	4924.105	43.29	0.34	43.63	54.00	-10.37	AVG			


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China


Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.:	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: DC 3.7V
Test item: Radiation Test	Date: 28/04/12/
Temp.(C)/Hum.(%) 25 C / 50 %	Time: 15:41:59
EUT: MID	Engineer Signature:
Mode: TX Channel 11 (802.11g)	Distance: 3m
Model: KW-PC7001A	
Manufacturer: Kin Wei	

Note:

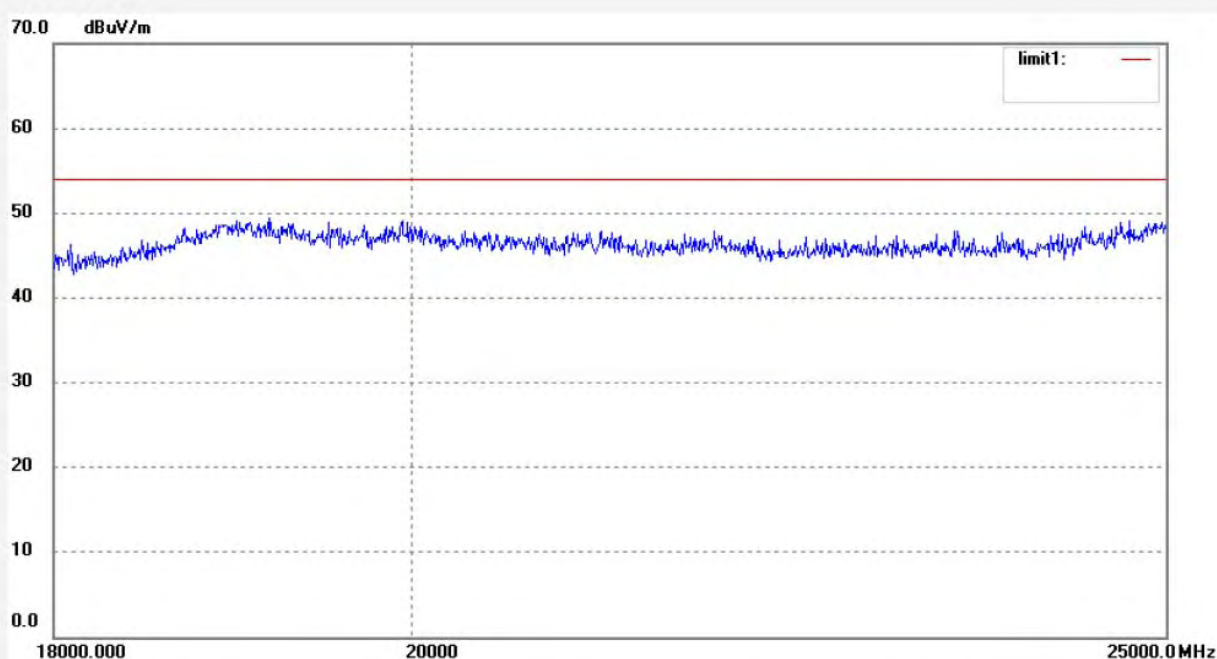

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.:

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 50 %

EUT: MID

Mode: TX Channel 11 (802.11g)

Model: KW-PC7001A

Manufacturer: Kin Wei

Polarization: Vertical

Power Source: DC 3.7V


Date: 28/04/12/

Time: 15:38:24

Engineer Signature:

Distance: 3m

Note:

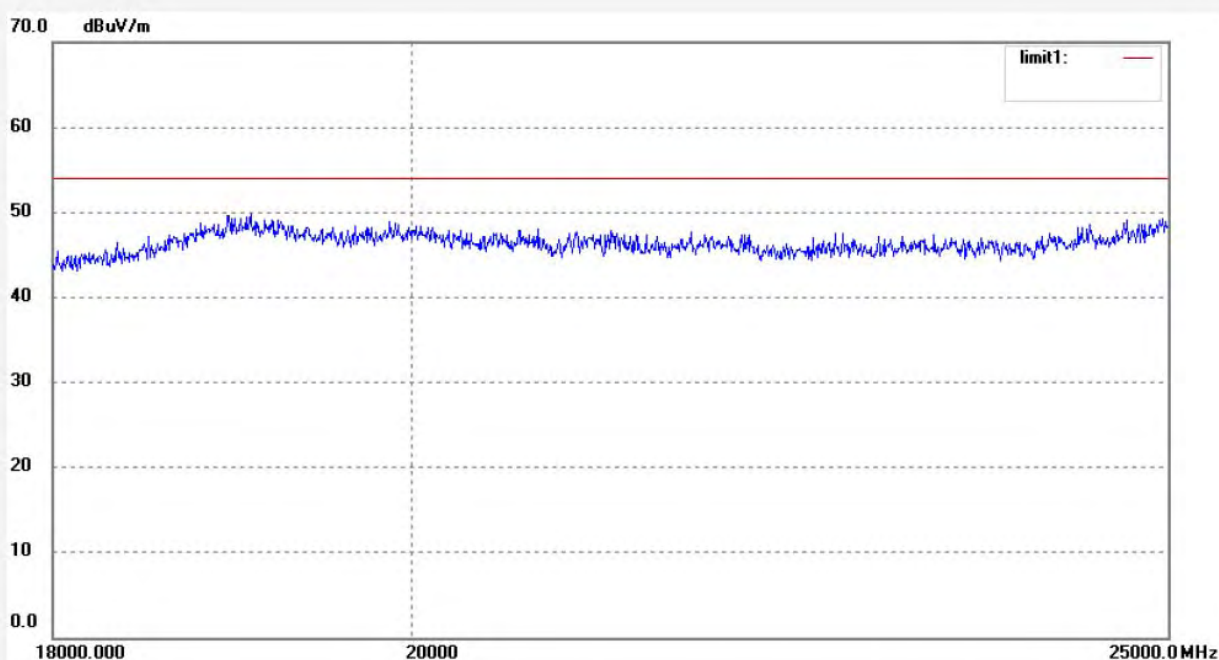

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

 F1.Bldg.A, Changyuan New Material Port Keyuan Rd,
 Science & Industry Park, Nanshan Shenzhen, P.R.China

Site: 966 chamber


Tel: +86-0755-26503290

Fax: +86-0755-26503396

Job No.:
 Standard: FCC Class B 3M Radiated
 Test item: Radiation Test
 Temp.(C)/Hum.(%) 24 C / 48 %
 EUT: MID
 Mode: TX Channel 1 (802.11n)
 Model: KW-PC7001A
 Manufacturer: Kin Wei

Polarization: Horizontal
 Power Source: DC 3.7V
 Date: 28/04/12/
 Time: 9/16/00
 Engineer Signature:
 Distance: 3m

Note:

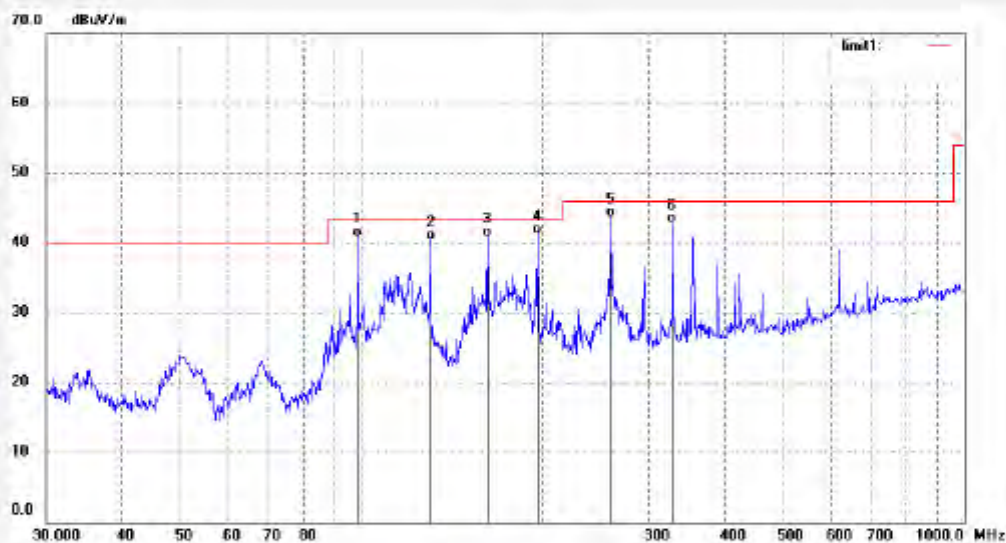

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	98.7215	26.88	14.01	40.89	43.50	-2.61	QP			
2	130.3048	25.47	14.89	40.36	43.50	-3.14	QP			
3	162.0197	26.26	14.62	40.88	43.50	-2.62	QP			
4	195.8701	25.18	16.02	41.18	43.50	-2.32	QP			
5	259.4433	25.08	18.52	43.58	46.00	-2.42	QP			
6	328.3068	23.08	19.69	42.77	46.00	-3.23	QP			


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg.A,Changyuan New Material Fort Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 988 chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

 Job No.:
 Standard: FCC Class B 3M Radiated
 Test item: Radiation Test
 Temp.(C)/Hum.(%) 24 C / 48 %
 EUT: MID
 Mode: TX Channel 1 (802.11n)
 Model: KW-PC7001A
 Manufacturer: Kin Wei

 Polarization: Vertical
 Power Source: DC 3.7V
 Date: 28/04/12/
 Time: 9/18/44
 Engineer Signature:
 Distance: 3m

Note:

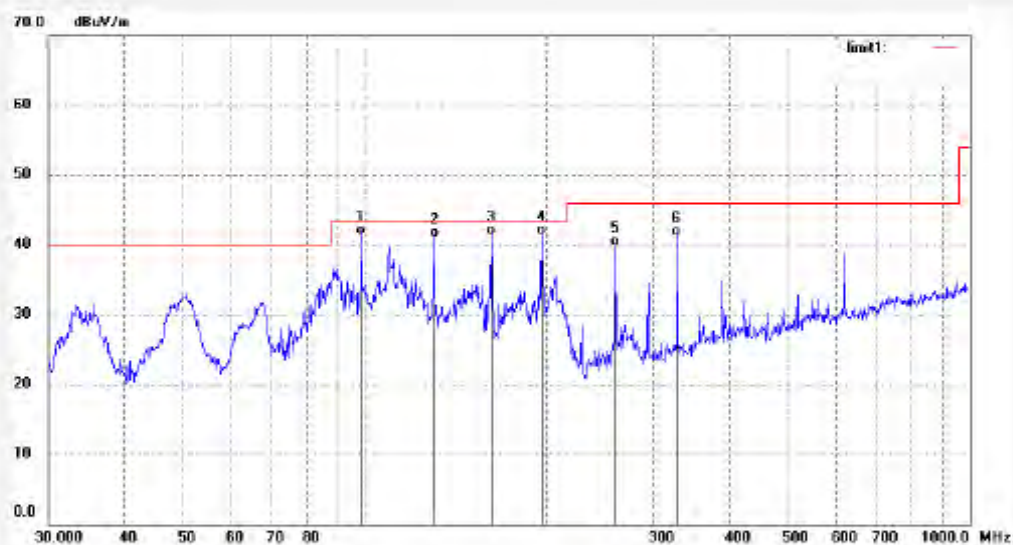

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	98.7215	27.51	13.94	41.45	43.50	-2.05	QP			
2	130.3048	26.21	14.89	41.10	43.50	-2.40	QP			
3	162.0197	26.72	14.62	41.34	43.50	-2.16	QP			
4	195.8701	25.27	16.14	41.41	43.50	-2.09	QP			
5	259.4433	21.29	18.52	39.81	46.00	-6.19	QP			
6	328.3068	21.57	19.69	41.26	46.00	-4.74	QP			


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.:

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 24 C / 48 %

EUT: MID

Mode: TX Channel 1 (802.11n)

Model: KW-PC7001A

Manufacturer: Kin Wei

Polarization: Horizontal

Power Source: DC 3.7Vz


Date: 28/04/12/

Time: 18:26:12

Engineer Signature:

Distance: 3m

Note:

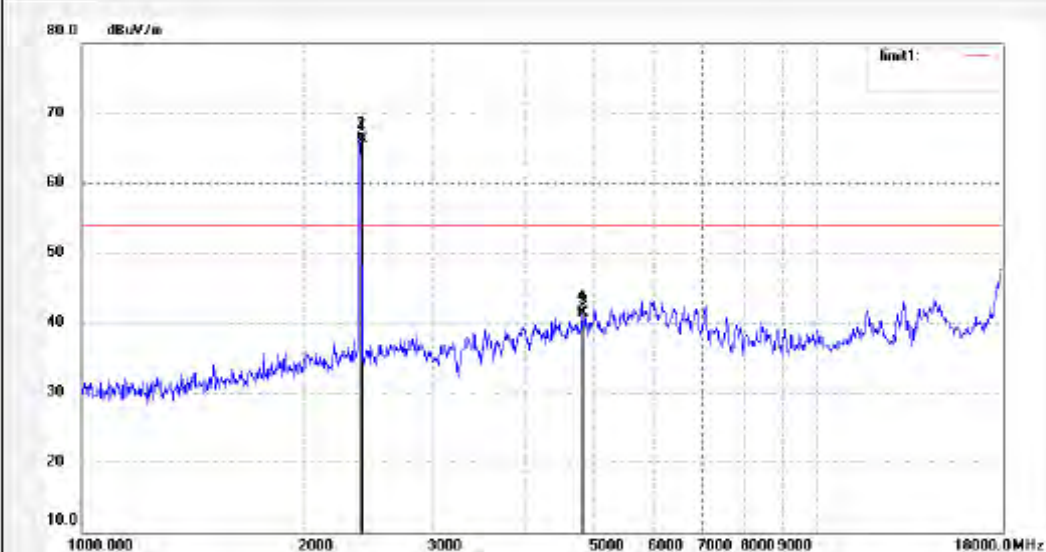

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2412.000	73.63	-7.43	66.20	—	—	peak			
2	2412.000	73.34	-7.43	65.91	—	—	AVG			
3	4824.101	41.84	-0.19	41.45	74.00	-32.55	peak			
4	4824.101	41.40	-0.19	41.21	54.00	-12.79	AVG			


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China


Site: 988 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.:	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: DC 3.7V
Test item: Radiation Test	Date: 28/04/12/
Temp.(C)/Hum.(%) 24 C / 48 %	Time: 18:25:17
EUT: MID	Engineer Signature:
Mode: TX Channel 1 (802.11n)	Distance: 3m
Model: KW-PC7001A	
Manufacturer: Kin Wei	

Note:

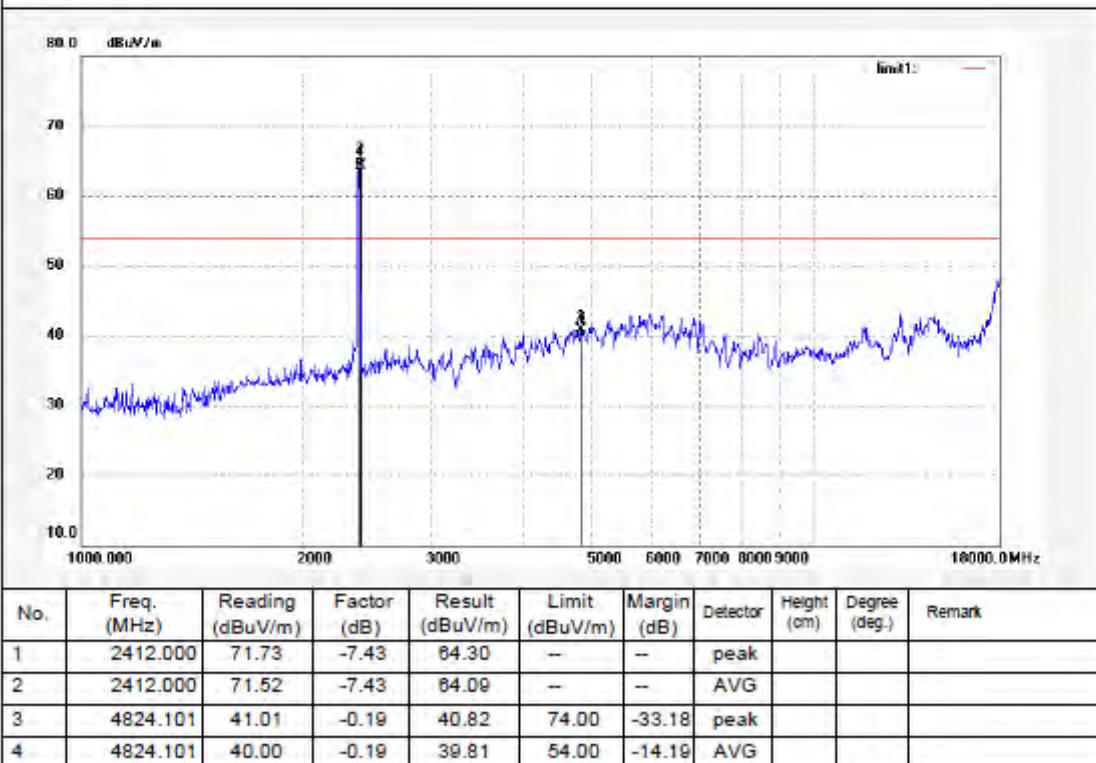


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.:

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 24 C / 48 %

EUT: MID

Mode: TX Channel 1 (802.11n)

Model: KW-PC7001A

Manufacturer: Kin Wei

Polarization: Horizontal

Power Source: DC 3.7V


Date: 28/04/12/

Time: 15:55:57

Engineer Signature:

Distance:

Note:

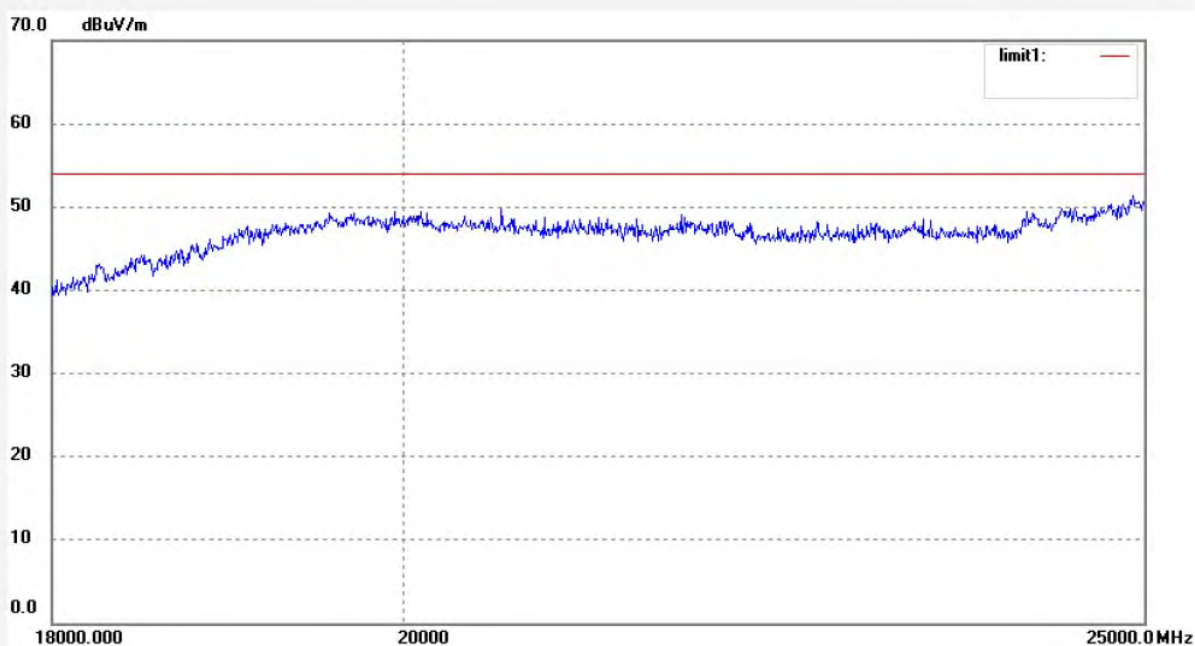

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.:
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 24 C / 48 %
EUT: MID
Mode: TX Channel 1 (802.11n)
Model: KW-PC7001A
Manufacturer: Kin Wei

Polarization: Vertical
Power Source: DC 3.7V
Date: 28/04/12/
Time: 15:57:43
Engineer Signature:
Distance:

Note:

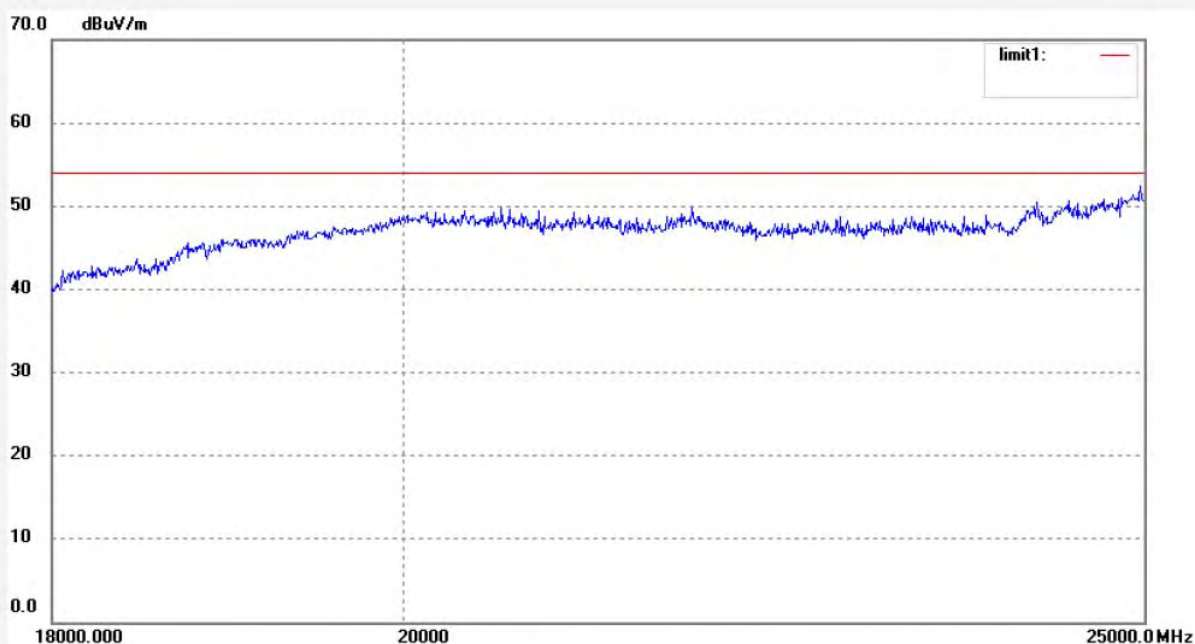

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

 Job No.:
 Standard: FCC Class B 3M Radiated
 Test item: Radiation Test
 Temp.(C)/Hum.(%) 24 C / 48 %
 EUT: MID
 Mode: TX Channel 6 (802.11n)
 Model: KW-PC7001A
 Manufacturer: Kin Wei

 Polarization: Horizontal
 Power Source: DC 3.7V
 Date: 28/04/12/
 Time: 9/19/02
 Engineer Signature:
 Distance: 3m

Note:

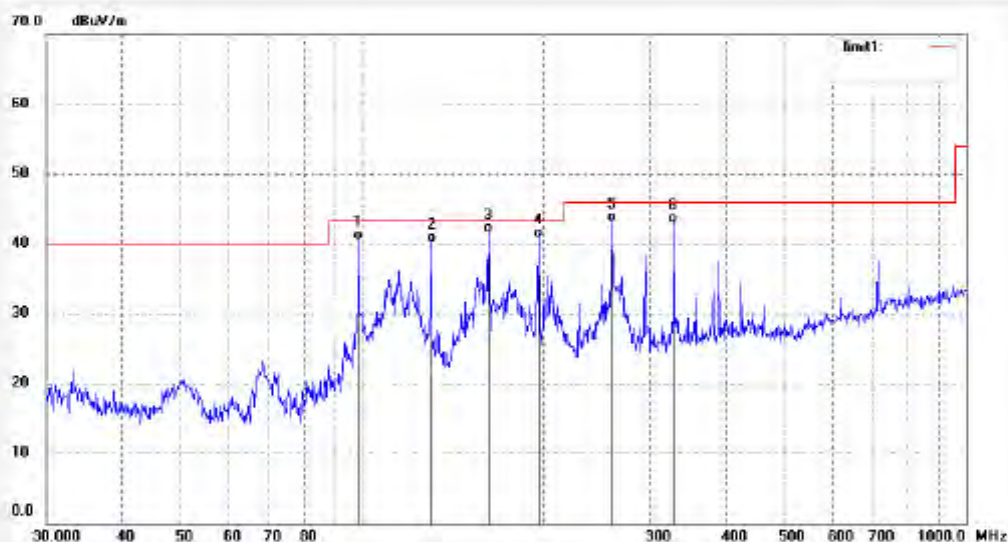

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	98.7215	26.58	14.01	40.59	43.50	-2.91	QP			
2	130.3048	25.22	14.89	40.11	43.50	-3.39	QP			
3	162.0197	26.86	14.62	41.48	43.50	-2.02	QP			
4	195.8701	24.77	16.02	40.79	43.50	-2.71	QP			
5	259.4433	24.60	18.52	43.12	46.00	-2.88	QP			
6	328.3068	23.27	19.69	42.96	46.00	-3.04	QP			


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China


Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.:	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: DC 3.7V
Test item: Radiation Test	Date: 28/04/12/
Temp.(C)/Hum.(%) 24 C / 48 %	Time: 9/17/17
EUT: MID	Engineer Signature:
Mode: TX Channel 6 (802.11n)	Distance: 3m
Model: KW-PC7001A	
Manufacturer: Kin Wei	

Note:

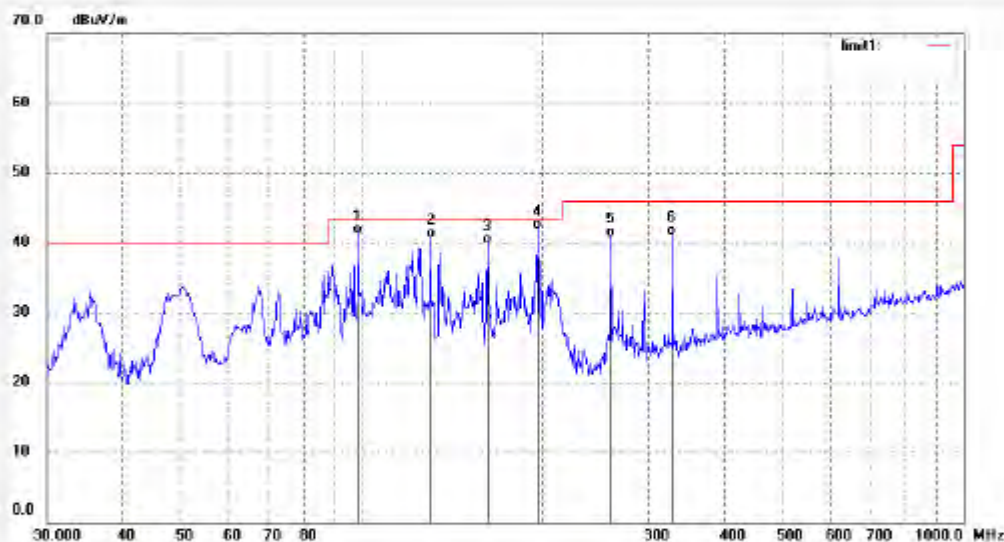

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	98.7215	27.28	13.94	41.22	43.50	-2.28	QP			
2	130.3048	25.76	14.89	40.65	43.50	-2.85	QP			
3	162.0197	25.27	14.62	39.89	43.50	-3.61	QP			
4	195.8701	25.73	16.14	41.87	43.50	-1.63	QP			
5	259.4433	22.39	18.52	40.91	46.00	-5.09	QP			
6	328.3068	21.27	19.69	40.96	46.00	-5.04	QP			


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 968 chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.:
 Standard: FCC Class B 3M Radiated
 Test item: Radiation Test
 Temp.(C)/Hum.(%) 24 C / 48 %
 EUT: MID
 Mode: TX Channel 6 (802.11n)
 Model: KW-PC7001A
 Manufacturer: Kin Wei

Polarization: Horizontal
 Power Source: DC 3.7V
 Date: 28/04/12/
 Time: 18:27:31
 Engineer Signature:
 Distance: 3m

Note:

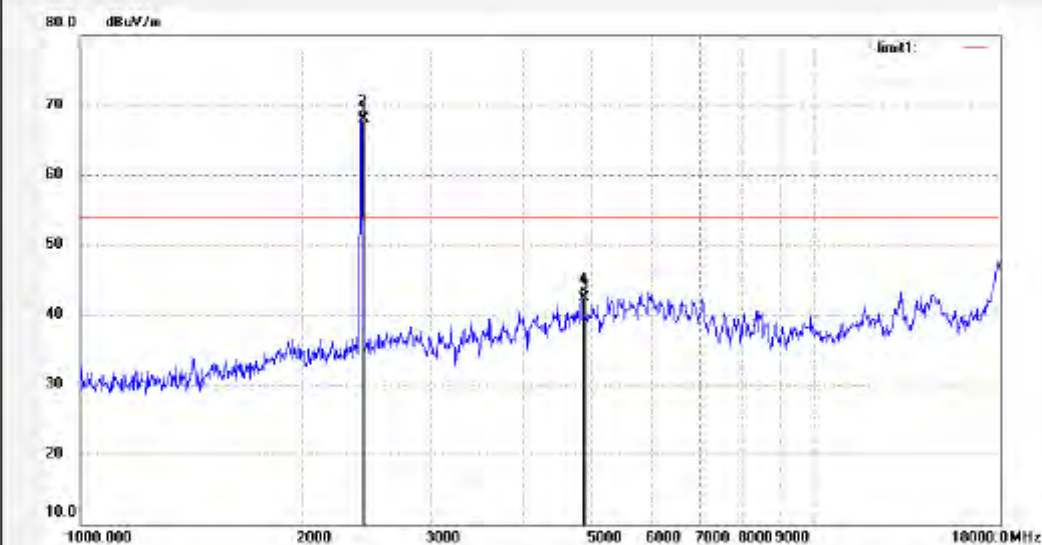

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2437.000	78.92	-7.36	71.29	--	--	peak			
2	2437.000	75.45	-7.36	68.09	--	--	AVG			
3	4874.120	44.57	0.09	44.66	74.00	-29.34	peak			
4	4874.120	42.31	0.09	42.40	54.00	-11.60	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 986 chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503398

Job No.:
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 24 C / 48 %
EUT: MID
Mode: TX Channel 6 (802.11n)
Model: KW-PC7001A
Manufacturer: Kin Wei

Polarization: Vertical
Power Source: DC 3.7V
Date: 28/04/12/
Time: 18:28:35
Engineer Signature:
Distance: 3m

Note:

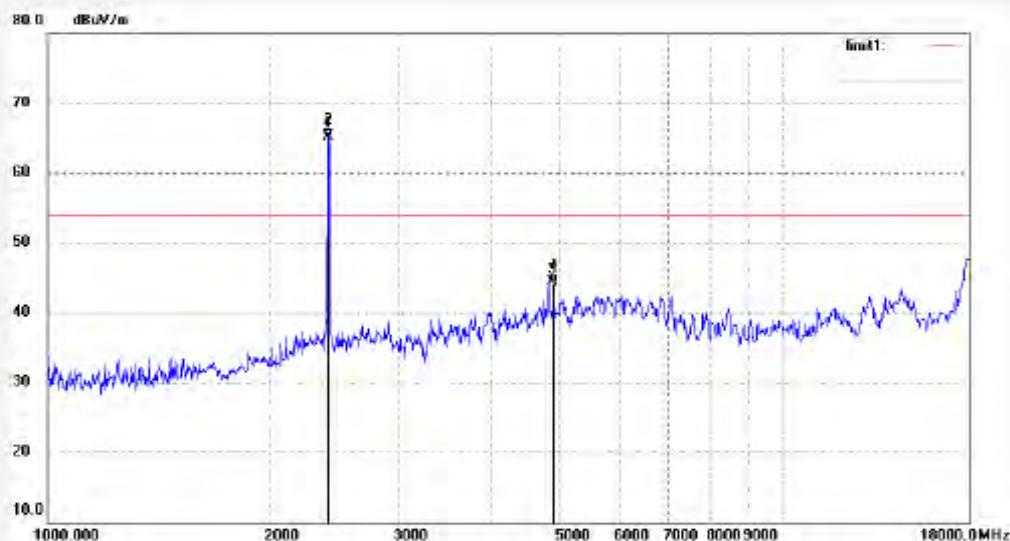

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2412.000	72.70	-7.43	65.27	—	—	peak			
2	2412.000	72.48	-7.43	65.05	—	—	AVG			
3	4873.000	44.28	0.08	44.37	74.00	-9.63	peak			
4	4873.000	44.15	0.08	44.24	54.00	-9.76	AVG			


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.:

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 24 C / 48 %

EUT: MID

Mode: TX Channel 6 (802.11n)

Model: KW-PC7001A

Manufacturer: Kin Wei

Polarization: Horizontal

Power Source: DC 3.7V


Date: 28/04/12/

Time: 15:53:01

Engineer Signature:

Distance:

Note:

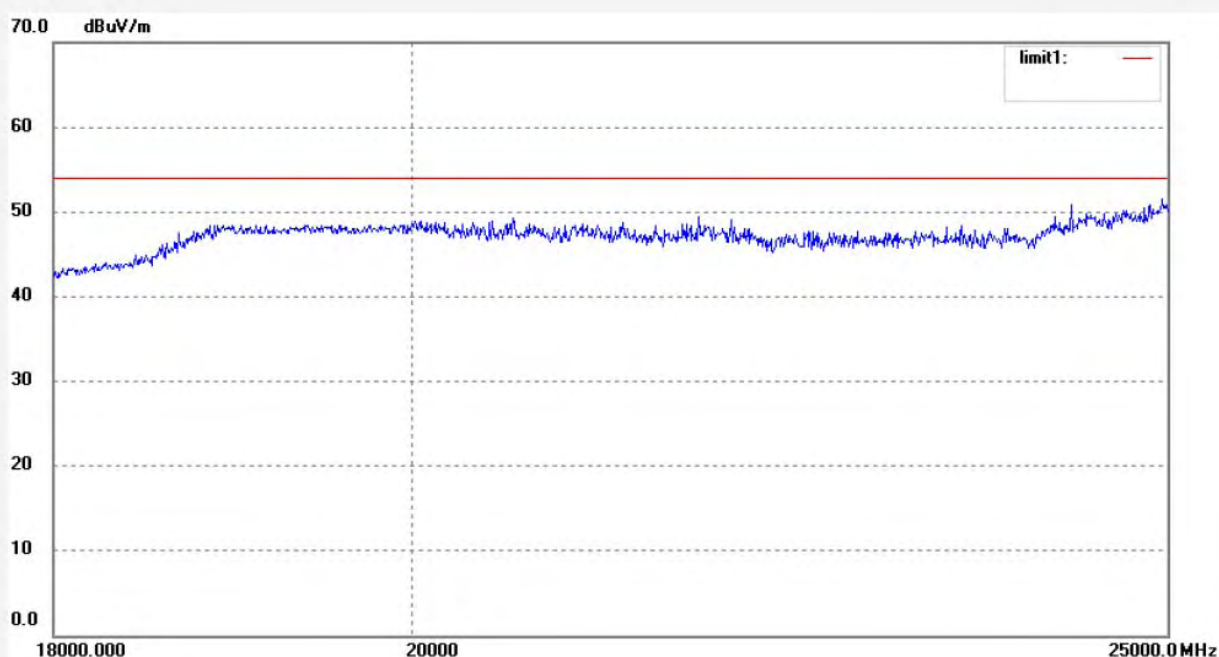

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China


Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.:	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: DC 3.7V
Test item: Radiation Test	Date: 28/04/12/
Temp.(C)/Hum.(%) 24 C / 48 %	Time: 15:51:02
EUT: MID	Engineer Signature:
Mode: TX Channel 6 (802.11n)	Distance:
Model: KW-PC7001A	
Manufacturer: Kin Wei	

Note:

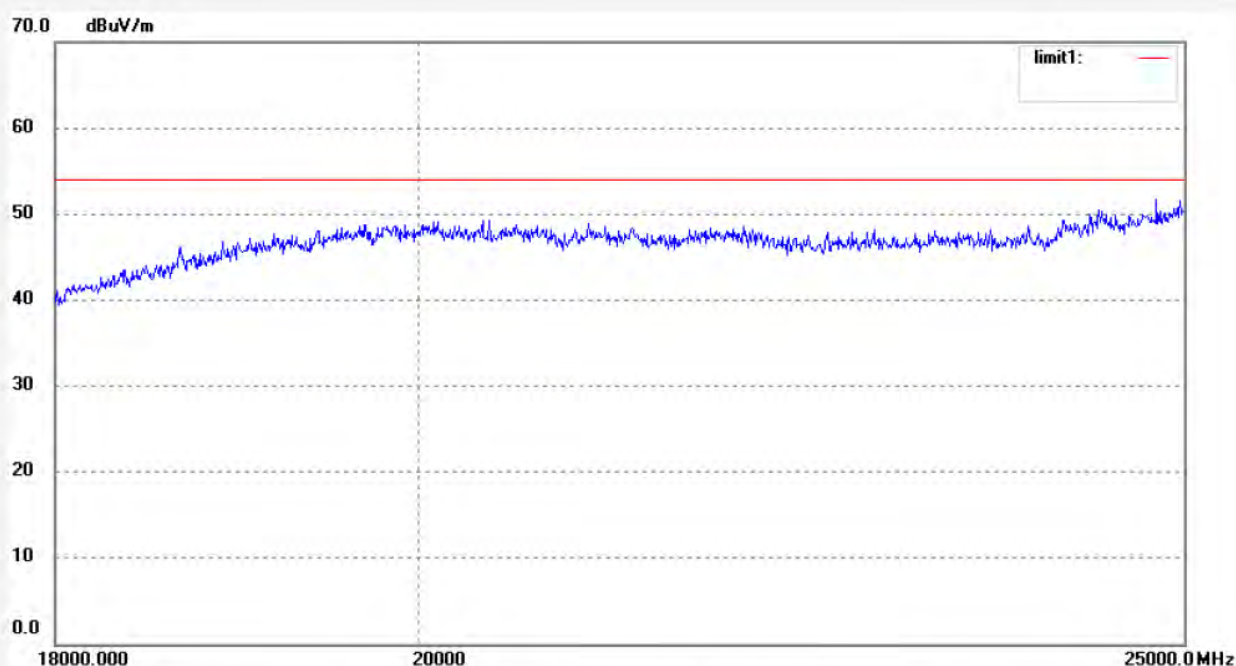

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 986 chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

 Job No.:
 Standard: FCC Class B 3M Radiated
 Test item: Radiation Test
 Temp.(C)/Hum.(%) 24 C / 48 %
 EUT: MID
 Mode: TX Channel 11 (802.11n)
 Model: KW-PC7001A
 Manufacturer: Kin Wei

 Polarization: Horizontal
 Power Source: DC 3.7V
 Date: 28/04/12/
 Time: 9/19/31
 Engineer Signature:
 Distance: 3m

Note:

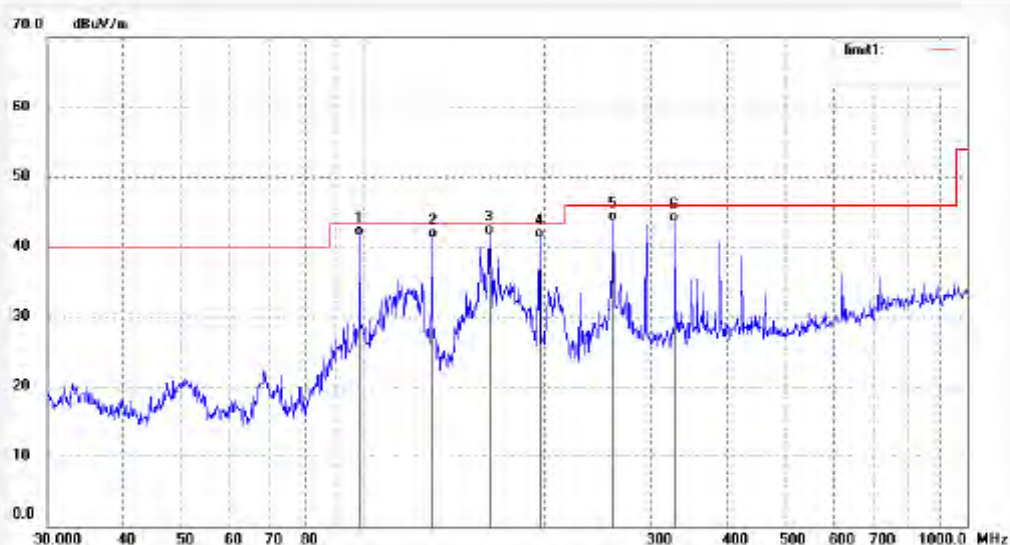

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	98.7215	27.47	14.01	41.48	43.50	-2.02	QP			
2	130.3048	26.27	14.89	41.16	43.50	-2.34	QP			
3	162.0197	27.20	14.62	41.82	43.50	-1.68	QP			
4	195.8701	25.17	16.02	41.19	43.50	-2.31	QP			
5	259.4433	25.06	18.52	43.58	46.00	-2.42	QP			
6	328.3068	23.78	19.69	43.47	46.00	-2.53	QP			


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 988 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.:

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 24 C / 48 %

EUT: MID

Mode: TX Channel 11 (802.11n)

Model: KW-PC7001A

Manufacturer: Kin Wei

Polarization: Vertical

Power Source: DC 3.7V


Date: 28/04/12/

Time: 9/20/09

Engineer Signature:

Distance: 3m

Note:

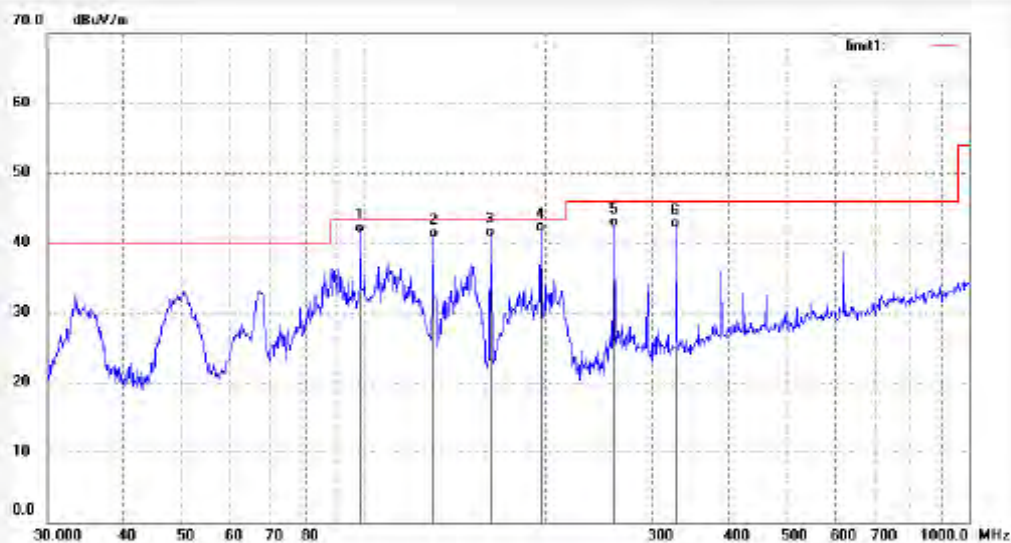

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	98.7215	27.40	13.94	41.34	43.50	-2.16	QP			
2	130.3048	25.87	14.89	40.76	43.50	-2.74	QP			
3	162.0197	26.19	14.62	40.81	43.50	-2.69	QP			
4	195.8701	25.35	16.14	41.49	43.50	-2.01	QP			
5	259.4433	23.76	18.52	42.28	46.00	-3.72	QP			
6	328.3068	22.45	19.69	42.14	46.00	-3.86	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd.
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.:	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: DC 3.7V
Test item: Radiation Test	Date: 28/04/12/
Temp.(C)/Hum.(%) 24 C / 48 %	Time: 18:30:10
EUT: MID	Engineer Signature: DC 3.7V
Mode: TX Channel 11 (802.11n)	Distance: 3m
Model: KW-PC7001A	
Manufacturer: Kin Wei	

Note:

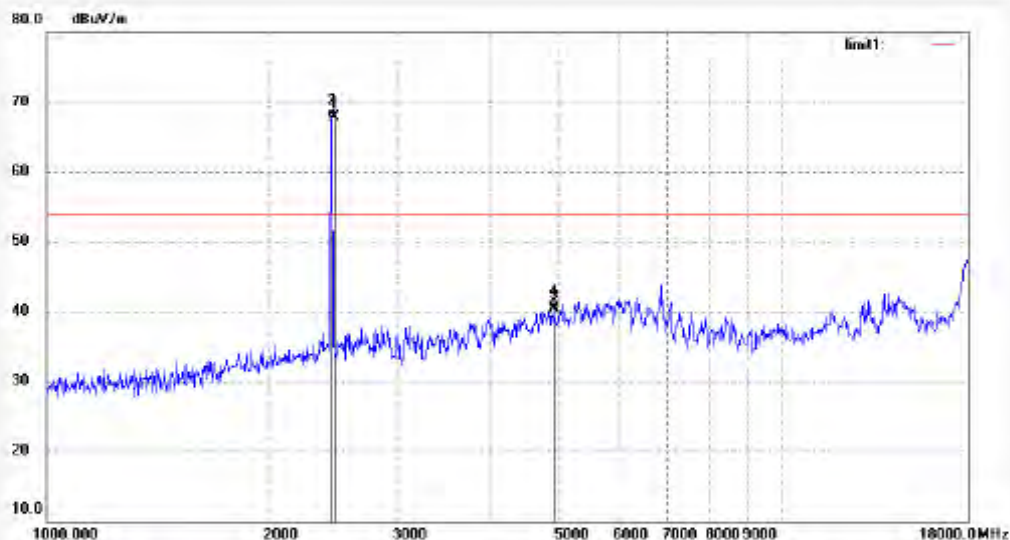

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2462.000	75.25	-7.35	67.90	--	--	peak			
2	2462.000	75.08	-7.35	67.73	--	--	AVG			
3	4924.121	40.16	0.34	40.50	74.00	-33.50	peak			
4	4924.121	40.00	0.34	40.34	54.00	-13.66	AVG			


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China


Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.:	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: DC 3.7V
Test item: Radiation Test	Date: 28/04/12/
Temp.(C)/Hum.(%) 24 C / 48 %	Time: 18:29:40
EUT: MID	Engineer Signature:
Mode: TX Channel 11 (802.11n)	Distance: 3m
Model: KW-PC7001A	
Manufacturer: Kin Wei	

Note:

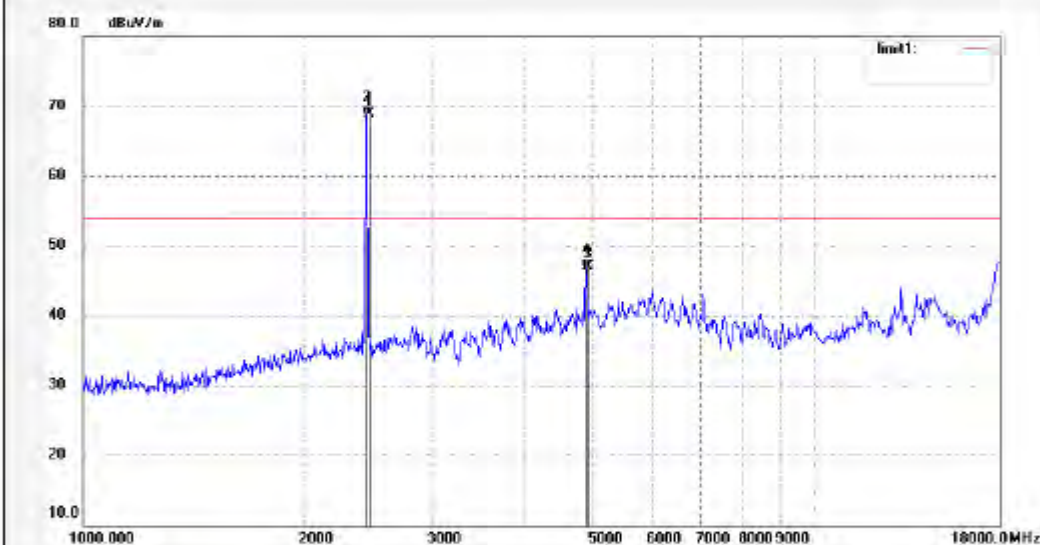

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2462.000	76.29	-7.35	68.94	—	—	peak			
2	2462.000	76.11	-7.35	68.76	—	—	AVG			
3	4924.121	46.75	0.34	47.09	74.00	-26.91	peak			
4	4924.121	46.42	0.34	46.76	54.00	-7.24	AVG			


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China


Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.:	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: DC 3.7V
Test item: Radiation Test	Date: 28/04/12/
Temp.(C)/Hum.(%) 24 C / 48 %	Time: 15:47:15
EUT: MID	Engineer Signature:
Mode: TX Channel 11 (802.11n)	Distance:
Model: KW-PC7001A	
Manufacturer: Kin Wei	

Note:

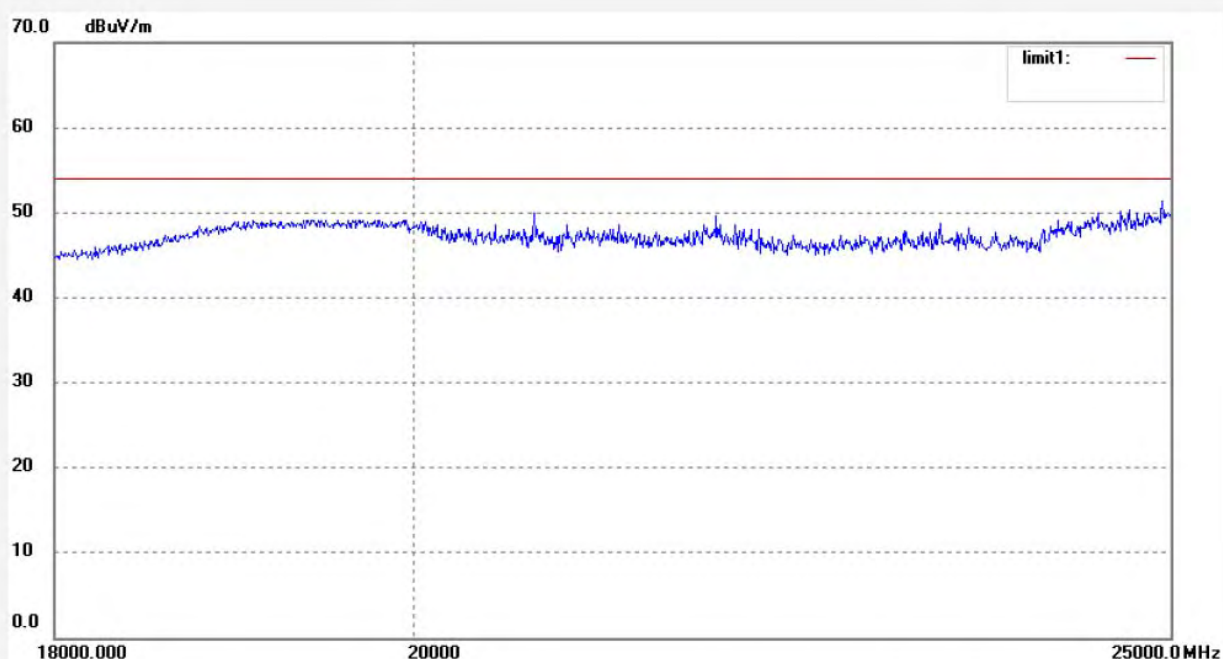

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.:

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 24 C / 48 %

EUT: MID

Mode: TX Channel 11 (802.11n)

Model: KW-PC7001A

Manufacturer: Kin Wei

Polarization: Vertical

Power Source: DC 3.7V


Date: 28/04/12/

Time: 15:49:05

Engineer Signature:

Distance:


Note:

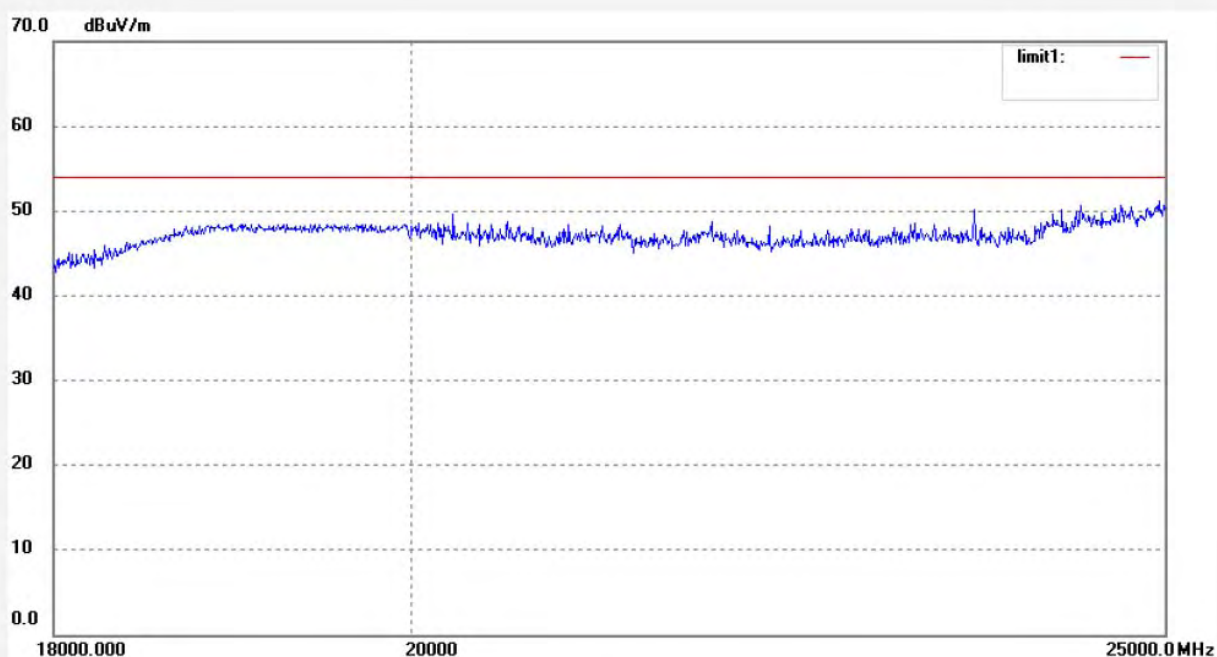

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------

10.CONDUCTED SPURIOUS EMISSION COMPLIANCE TEST

10.1.Block Diagram of Test Setup

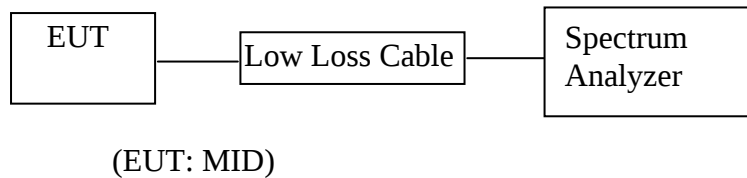

10.2.The Requirement For Section 15.247(d)

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

10.3.EUT Configuration on Measurement

The following equipment is installed on the emission measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

10.3.1.MID (EUT)

Model Number	:	KW-PC7001A
Serial Number	:	N/A
Manufacturer	:	Kin Wei Technology(Shenzhen) Ltd.

10.4.Operating Condition of EUT

10.4.1.Setup the EUT and simulator as shown as Section 10.1.

10.4.2.Turn on the power of all equipment.

10.4.3.Let the EUT work in TX modes measure it. The transmit frequency are 2412-2462. We select 2412MHz, 2437MHz, 2462MHz TX frequency to transmit.

10.5.Test Procedure

10.5.1.The transmitter output was connected to the spectrum analyzer via a low loss cable.

10.5.2.Set RBW of spectrum analyzer to 100kHz and VBW to 300kHz.


10.5.3.The Conducted Spurious Emission was measured and recorded.

10.6.Test Result


Pass.

The spectrum analyzer plots are attached as below.


TX 802.11b Channel Low 2412MHz

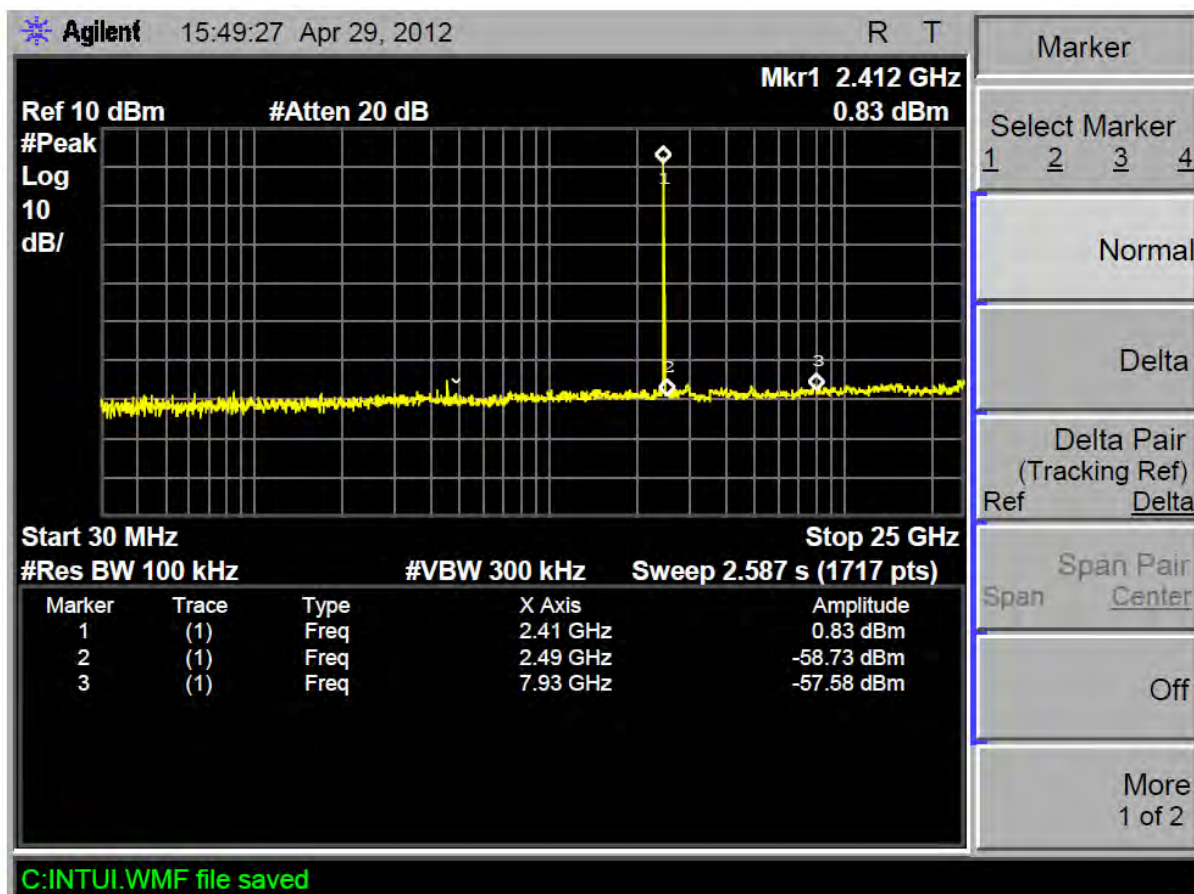


TX 802.11b Channel Middle 2437MHz

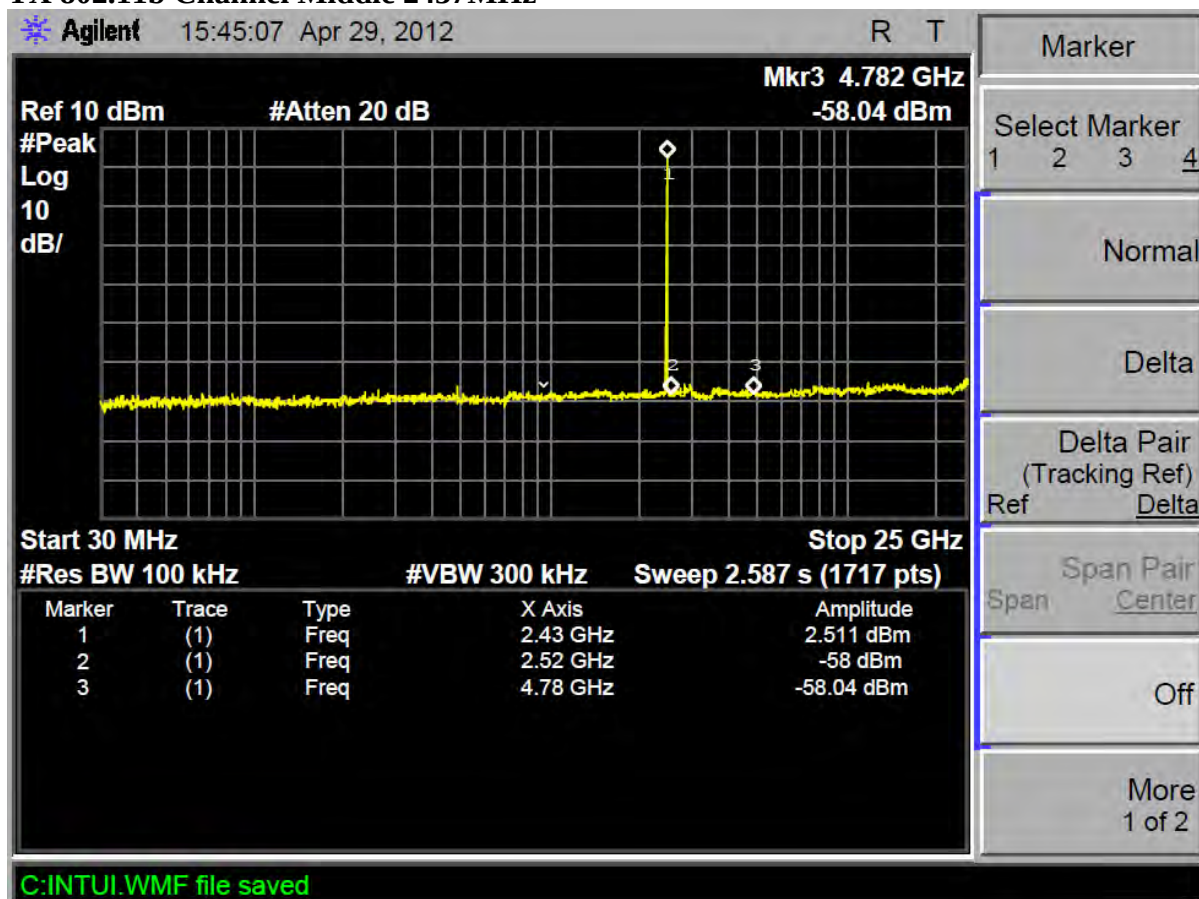


TX 802.11b Channel High 2462MHz

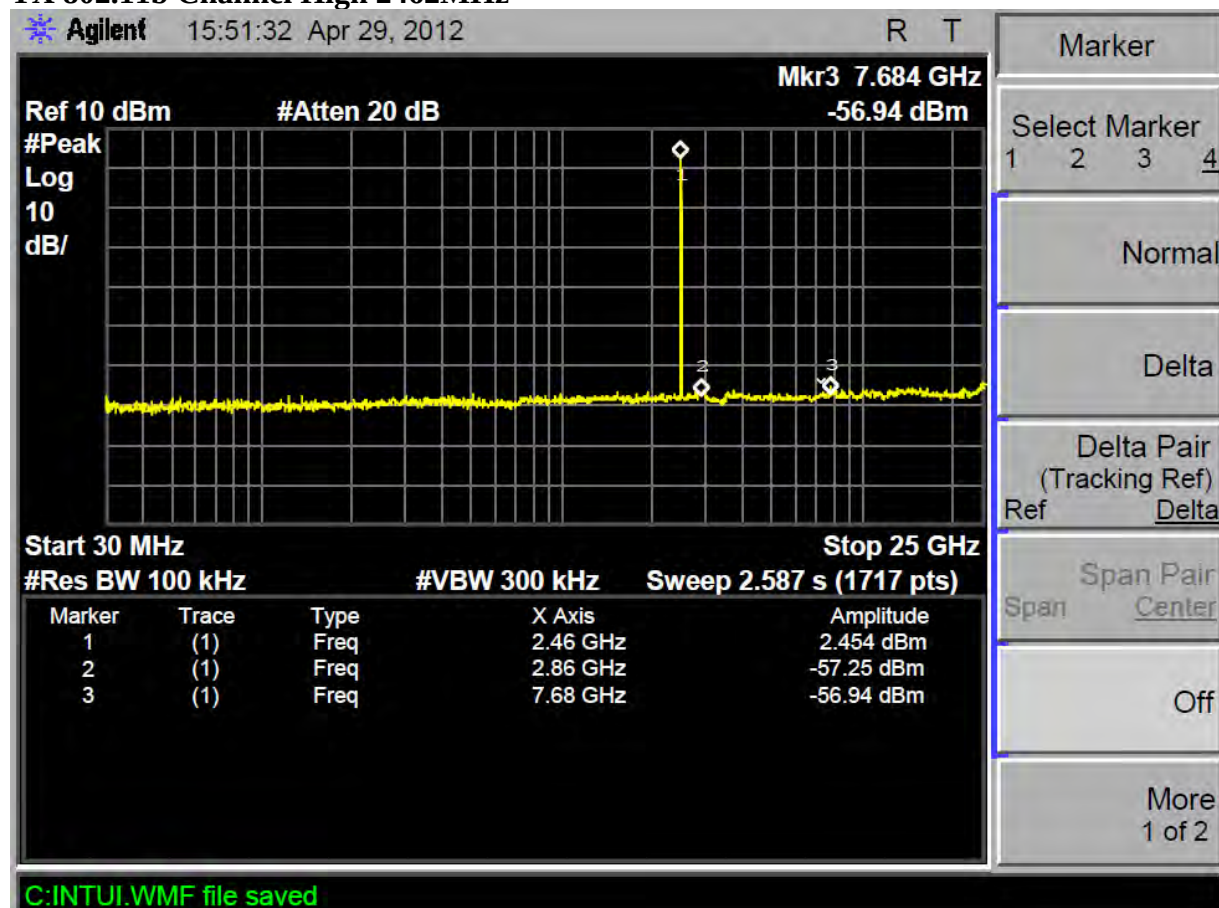


TX 802.11g Channel Low 2412MHz

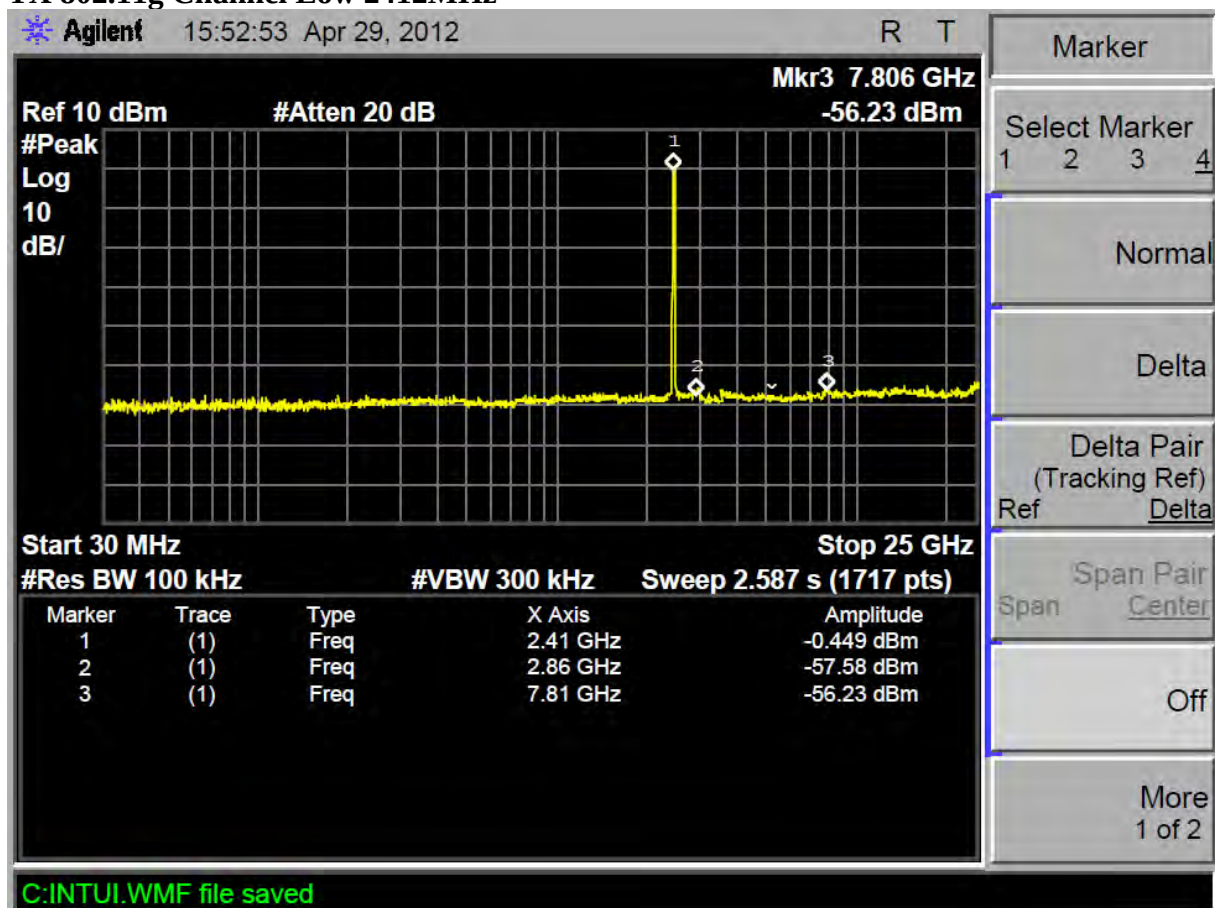


TX 802.11g Channel Middle 2437MHz

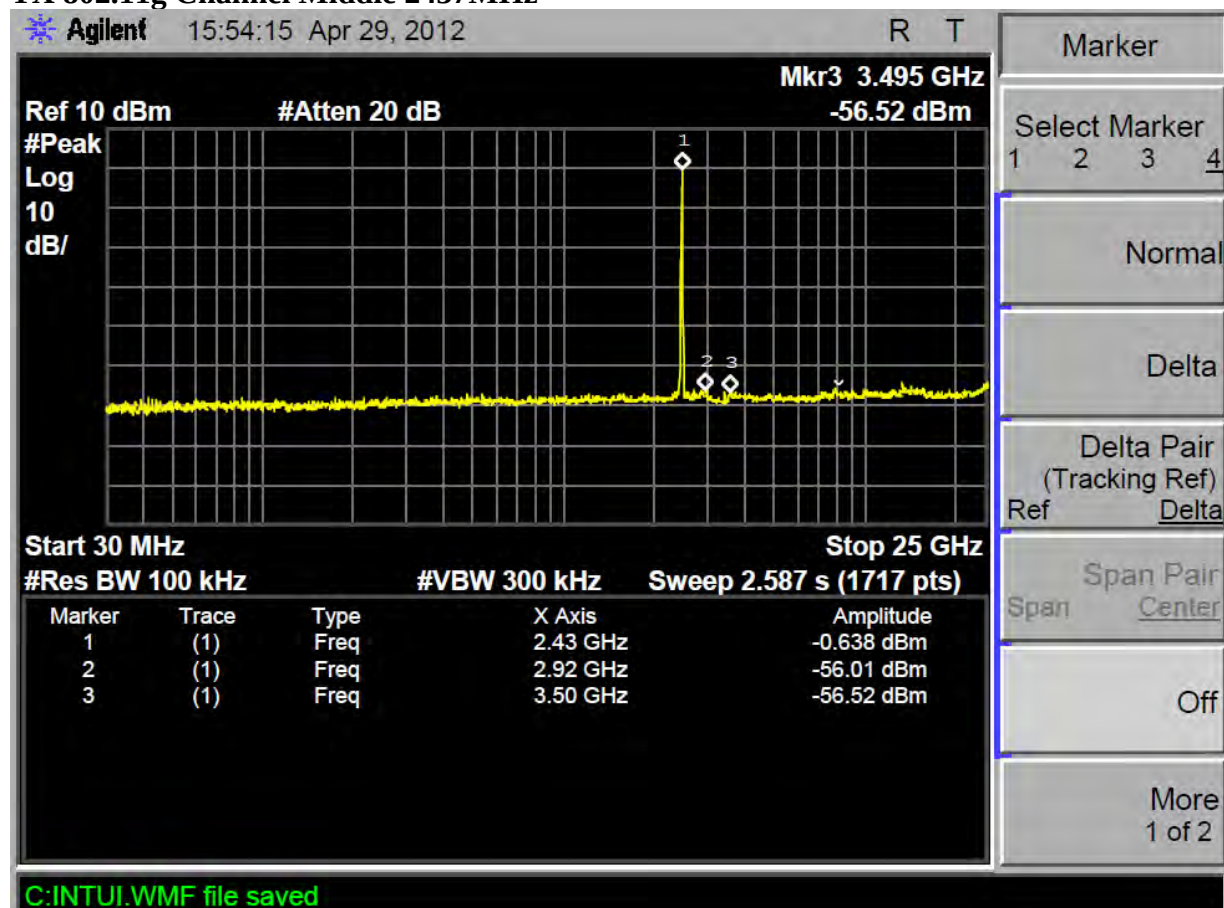


TX 802.11g Channel High 2462MHz

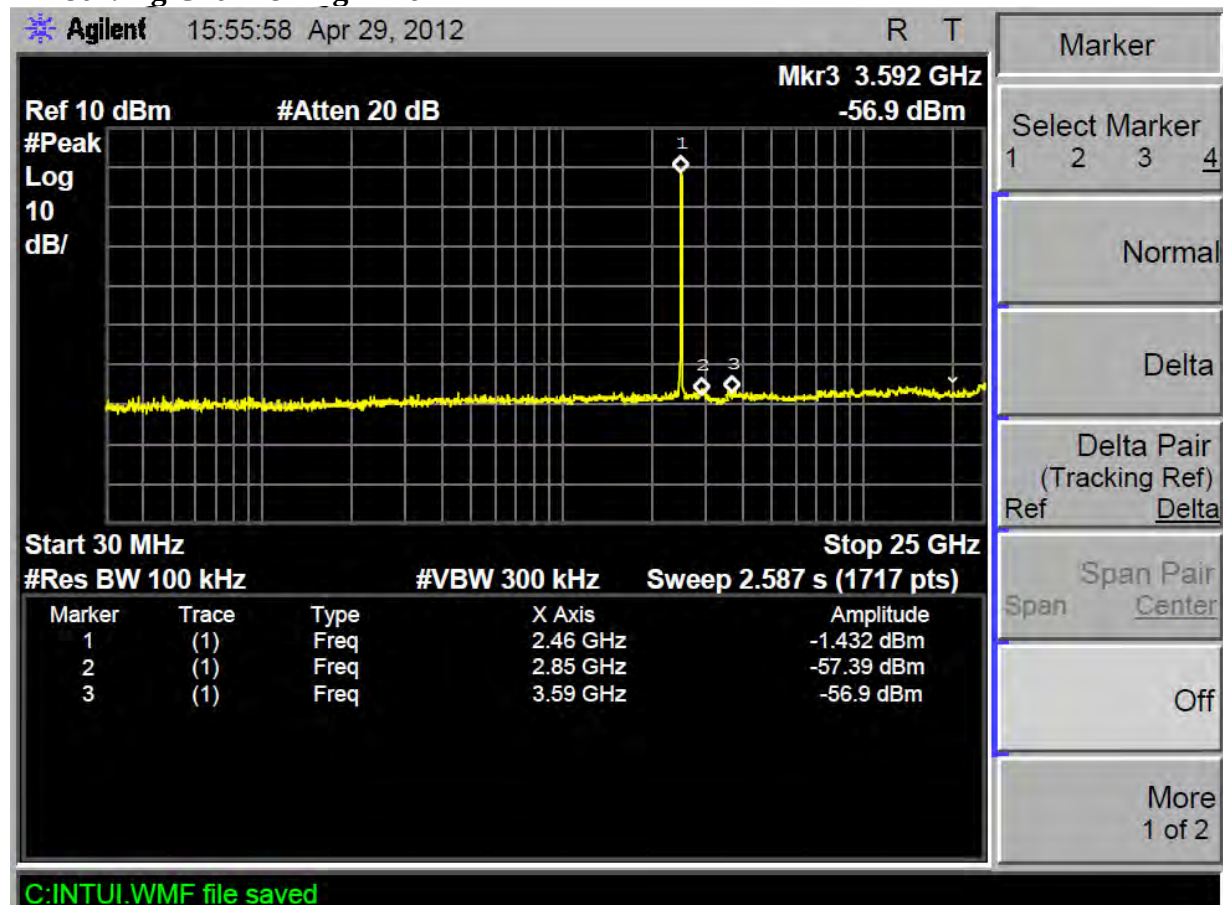


TX 802.11n Channel Low 2412MHz

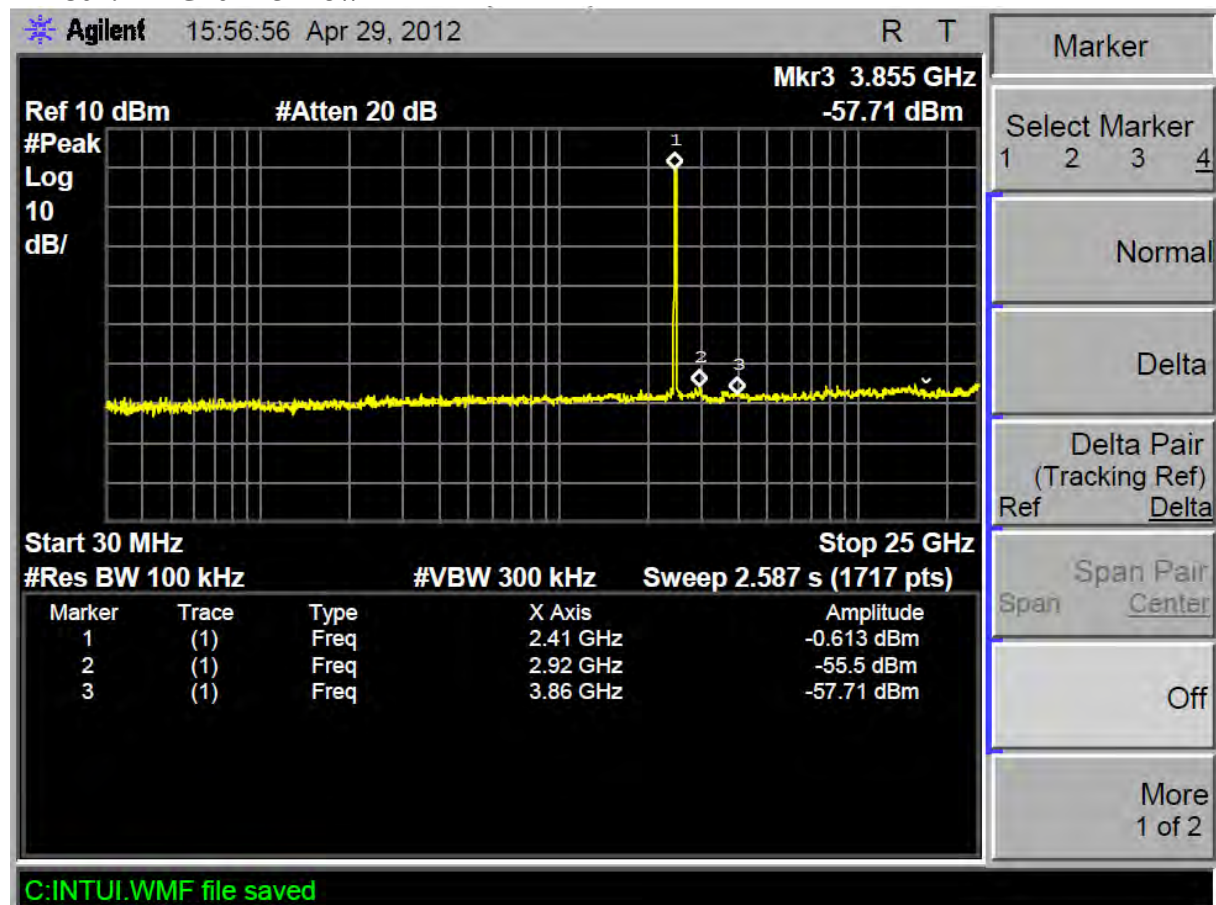

TX 802.11n Channel Middle 2437MHz

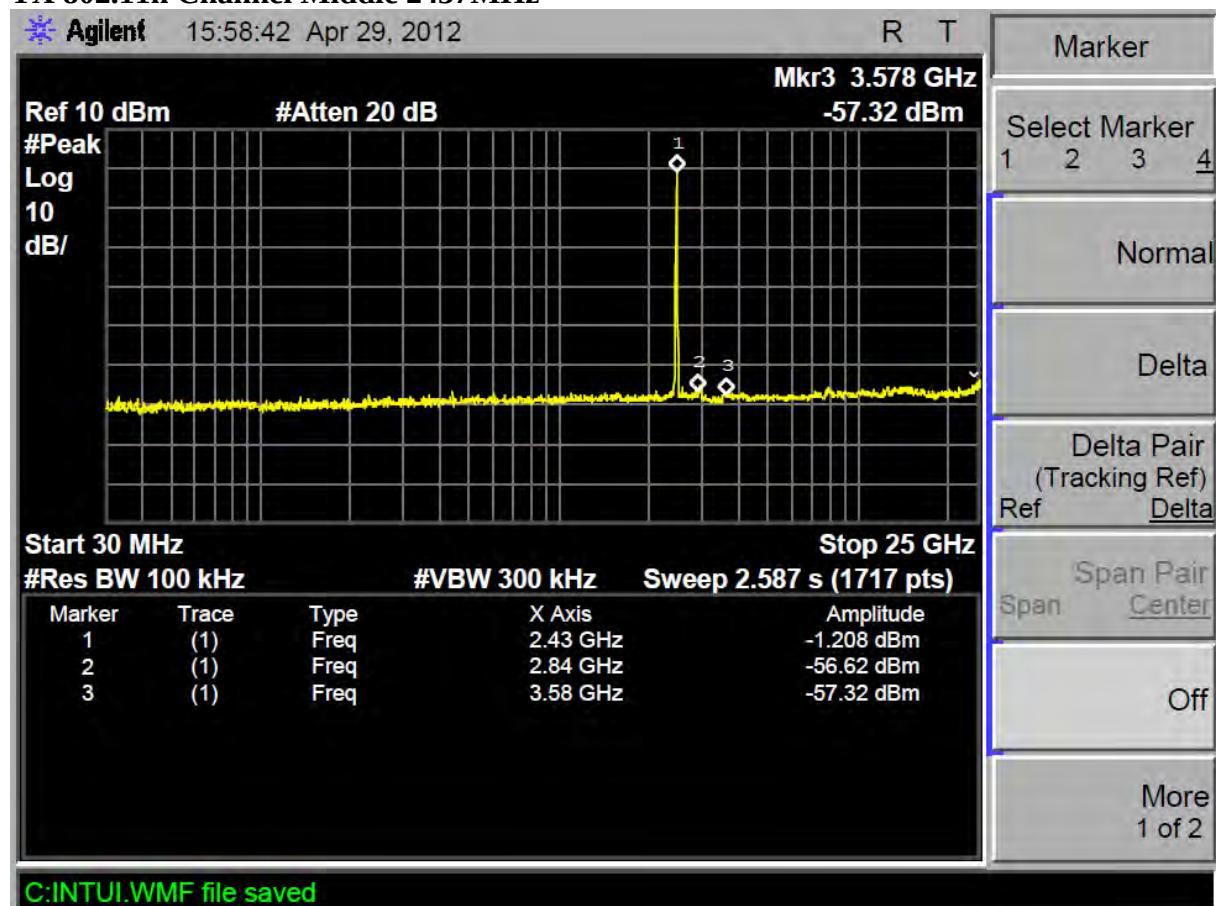


TX 802.11n Channel High 2462MHz

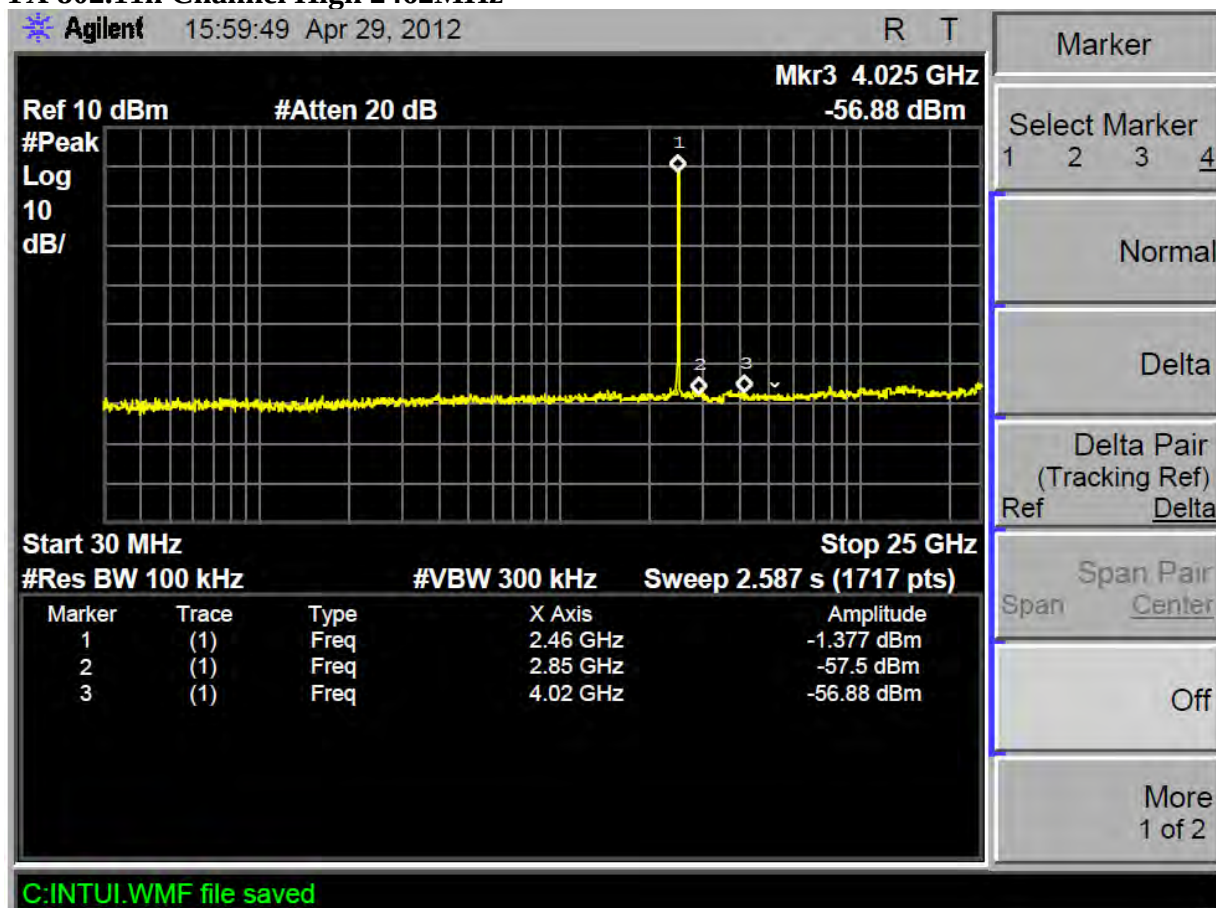


11.AC POWER LINE CONDUCTED EMISSION FOR FCC PART 15 SECTION 15.207(A)

11.1.Block Diagram of Test Setup

11.1.1.Block diagram of connection between the EUT and simulators

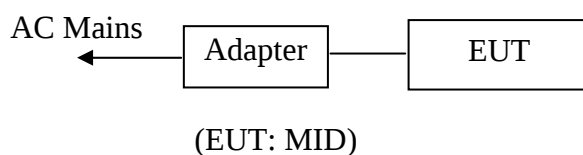

11.1.2.Shielding Room Test Setup Diagram

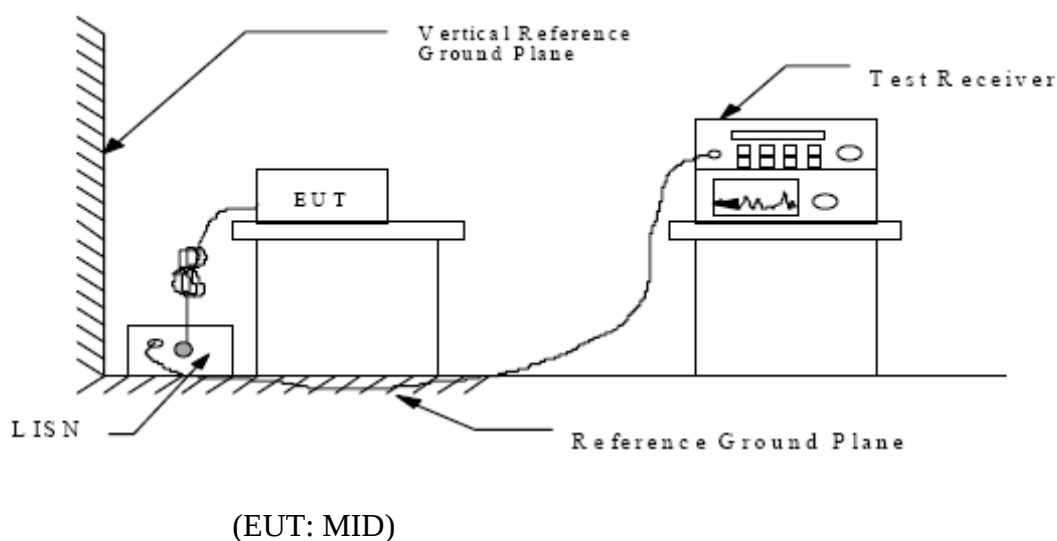

11.2.The Emission Limit

11.2.1.Conducted Emission Measurement Limits According to Section 15.207(a)

Frequency (MHz)	Limit dB(μ V)	
	Quasi-peak Level	Average Level
0.15 - 0.50	66.0 – 56.0 *	56.0 – 46.0 *
0.50 - 5.00	56.0	46.0
5.00 - 30.00	60.0	50.0

* Decreases with the logarithm of the frequency.

11.3.Configuration of EUT on Measurement

The following equipment are installed on the Conducted Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

11.3.1.MID (EUT)

Model Number : KW-PC7001A
Serial Number : N/A
Manufacturer : Kin Wei Technology(Shenzhen) Ltd.

11.4.Operating Condition of EUT

11.4.1.Setup the EUT and simulator as shown as Section 11.1.

11.4.2.Turn on the power of all equipment.

11.4.3.Let the EUT work in TX (Charging) mode measure it.

11.5.Test Procedure

The EUT is put on the plane 0.8m high above the ground by insulating support and is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC lines are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.4: 2003 on Conducted Emission Measurement.

The bandwidth of test receiver (R & S ESCS30) is set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.

11.6. Power Line Conducted Emission Measurement Results

PASS.

The frequency range from 150kHz to 30MHz is checked.

Date of Test:	April 25, 2012	Temperature:	25°C
EUT:	MID	Humidity:	50%
Model No.:	KW-PC7001A	Power Supply:	AC 120V/60Hz
Test Mode:	Charging	Test Engineer:	Pei

Frequency (MHz)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector	Line
0.198359	57.30	63.7	-6.4	QP	Neutral
0.500809	47.90	56	-8.1	QP	
2.099304	40.00	56	-16.0	QP	
2.193544	34.30	56	-21.7	QP	
8.489359	32.70	60	-27.3	QP	
16.273093	28.00	60	-32.0	QP	
0.199949	46.70	53.6	-6.9	AV	
0.498814	39.00	46	-7.0	AV	
2.099304	36.70	46	-9.3	AV	
2.193544	31.80	46	-14.2	AV	
8.48359	26.40	50	-23.6	AV	
16.079367	35.70	50	-14.3	AV	
0.198359	59.00	63.7	-4.7	QP	Live
0.299243	51.80	60.3	-8.5	QP	
0.398888	45.80	27.9	-12.1	QP	
1.899908	40.10	56	-15.9	QP	
3.295983	35.40	56	-20.6	QP	
15.887948	31.60	60	-28.4	QP	
0.198359	48.30	53.7	-5.4	AV	
0.498814	37.40	46	-8.6	AV	
2.099304	36.20	46	-9.8	AV	
2.394903	31.20	46	-14.8	AV	
7.995934	22.00	50	-18.0	AV	
15.887948	32.50	50	-17.5	AV	

Emissions attenuated more than 20 dB below the permissible value are not reported.

The spectral diagrams are attached as below.


ACCURATE TECHNOLOGY CO.,LTD

CONDUCTED EMISSION STANDARD FCC PART 15B

EUT: MID M/N:KW-PC7001A
 Manufacturer: Kin Wei
 Operating Condition: Charging
 Test Site: 1#Shielding Room
 Operator: Apple
 Test Specification: N 120V/60Hz
 Comment: Mains port

SCAN TABLE: "V 150K-30MHz fin"

Short Description: _SUB_STD_VTERM2 1.70
 Start Stop Step Detector Meas. IF Transducer
 Frequency Frequency Width Time Bandw.
 150.0 kHz 30.0 MHz 0.8 % QuasiPeak 1.0 s 9 kHz NSLK8126 2008
 Average

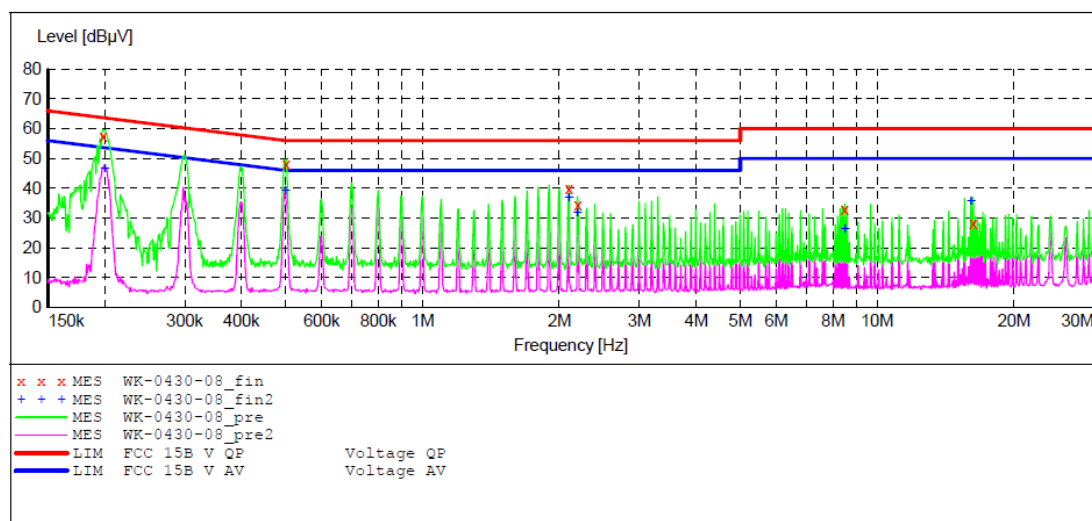

MEASUREMENT RESULT: "WK-0430-08_fin"

4/30/2012 9:36AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.198359	57.30	11.2	63.7	6.4	QP	N	GND
0.500809	47.90	12.0	56	8.1	QP	N	GND
2.099304	40.00	11.6	56	16.0	QP	N	GND
2.193544	34.30	11.6	56	21.7	QP	N	GND
8.489359	32.70	11.3	60	27.3	QP	N	GND
16.273093	28.00	11.1	60	32.0	QP	N	GND

MEASUREMENT RESULT: "WK-0112-08_fin2"

4/30/2012 9:36AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.199949	46.70	11.2	53.6	6.9	AV	N	GND
0.498814	39.00	12.0	46	7.0	AV	N	GND
2.099304	36.70	11.6	46	9.3	AV	N	GND
2.193544	31.80	11.6	46	14.2	AV	N	GND
8.489359	26.40	11.3	50	23.6	AV	N	GND
16.079367	35.70	11.2	50	14.3	AV	N	GND


ACCURATE TECHNOLOGY CO.,LTD**CONDUCTED EMISSION STANDARD FCC PART 15B**

EUT: MID M/N:KW-PC7001A
 Manufacturer: Kin Wei
 Operating Condition: Charging
 Test Site: 1#Shielding Room
 Operator: Apple
 Test Specification: L 120V/60Hz
 Comment: Mains port

SCAN TABLE: "V 150K-30MHz fin"

Short Description: _SUB_STD_VTERM2 1.70

Start	Stop	Step	Detector	Meas.	IF	Transducer
Frequency	Frequency	Width		Time	Bandw.	
150.0 kHz	30.0 MHz	0.8 %	QuasiPeak	1.0 s	9 kHz	NSLK8126 2008
Average						

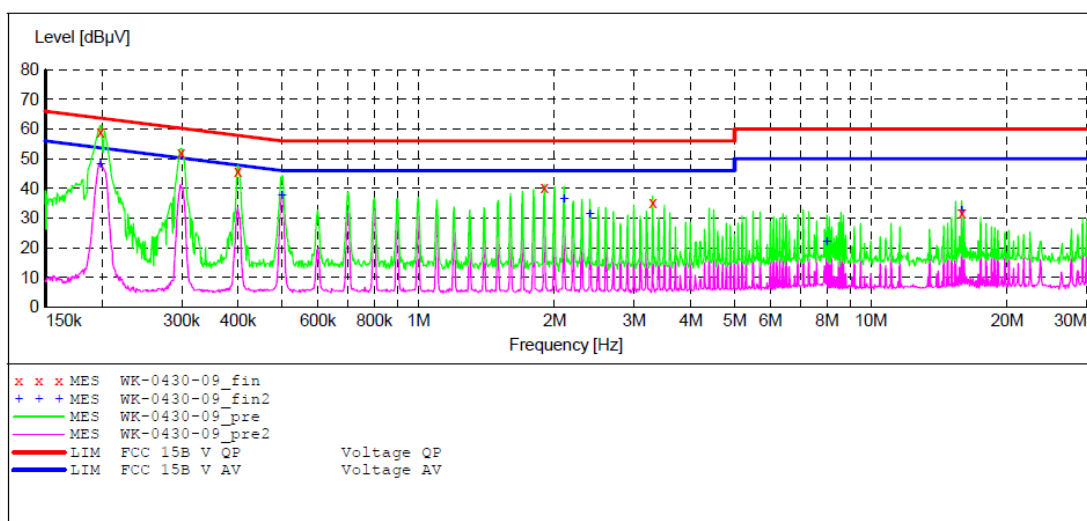**MEASUREMENT RESULT: "WK-0430-09_fin"**

4/30/2012 9:39AM

Frequency	Level	Transd	Limit	Margin	Detector	Line	PE
MHz	dBμV	dB	dBμV	dB			
0.198359	59.00	11.2	63.7	4.7	QP	L1	GND
0.299243	51.80	11.6	60.3	8.5	QP	L1	GND
0.398888	45.80	11.8	57.9	12.1	QP	L1	GND
1.899908	40.10	11.7	56	15.9	QP	L1	GND
3.295983	35.40	11.5	56	20.6	QP	L1	GND
15.887948	31.60	11.2	60	28.4	QP	L1	GND

MEASUREMENT RESULT: "WK-0430-09_fin2"

4/30/2012 9:39AM

Frequency	Level	Transd	Limit	Margin	Detector	Line	PE
MHz	dBμV	dB	dBμV	dB			
0.198359	48.30	11.2	53.7	5.4	AV	L1	GND
0.498814	37.40	12.0	46	8.6	AV	L1	GND
2.099304	36.20	11.6	46	9.8	AV	L1	GND
2.394903	31.20	11.6	46	14.8	AV	L1	GND
7.995934	22.00	11.3	50	28.0	AV	L1	GND
15.887948	32.50	11.2	50	17.5	AV	L1	GND

12.ANTENNA REQUIREMENT

12.1.The Requirement

According to Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

12.2.Antenna Construction

Device is equipped with unique antenna, which isn't displaced by other antenna. Therefore, the equipment complies with the antenna requirement of Section 15.203.

