

Test Report No.10048312 001

Appendix D: Radiated Spurious Emission Data

(File: 10048312AppendixD)

Contents

Spurious Emissions, Band Edges, 2.35-2.5G 2



Spurious Emissions, TX Mode, 1-18G..... 10

Spurious Emissions, TX Mode, 18-26G..... 22



Spurious Emissions, TX Mode, 30M-1G 34

Radiated Bandedge (GFSK)

Low Channel (Hor)

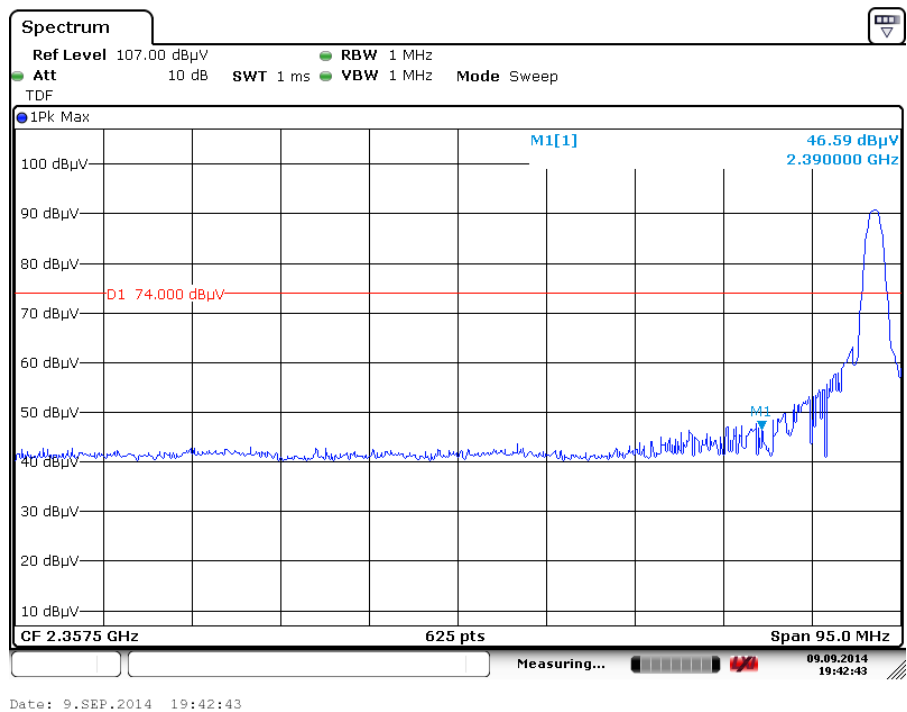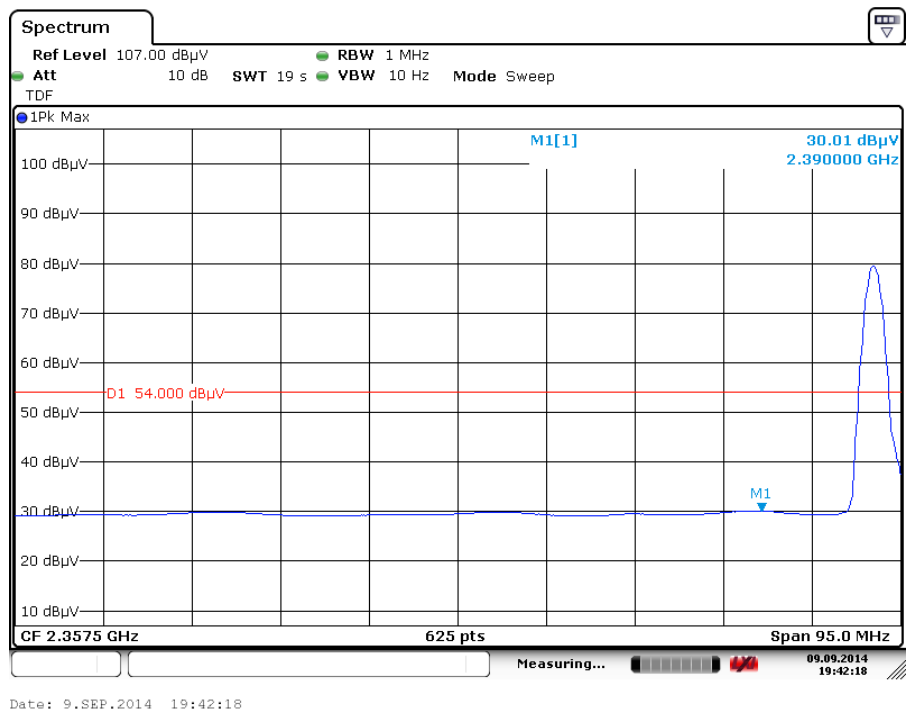



Low Channel (Ver)

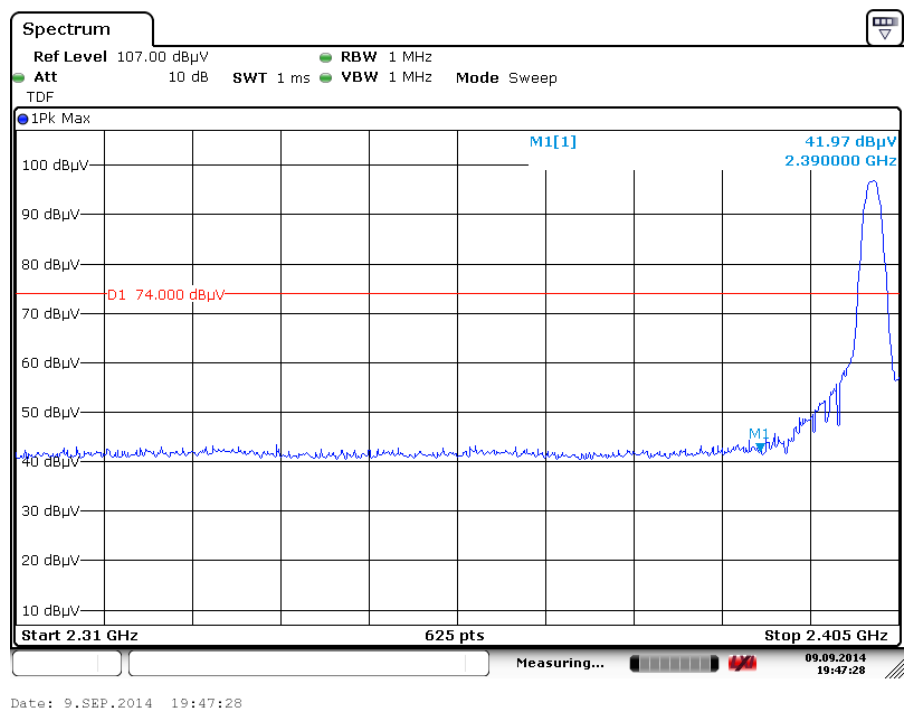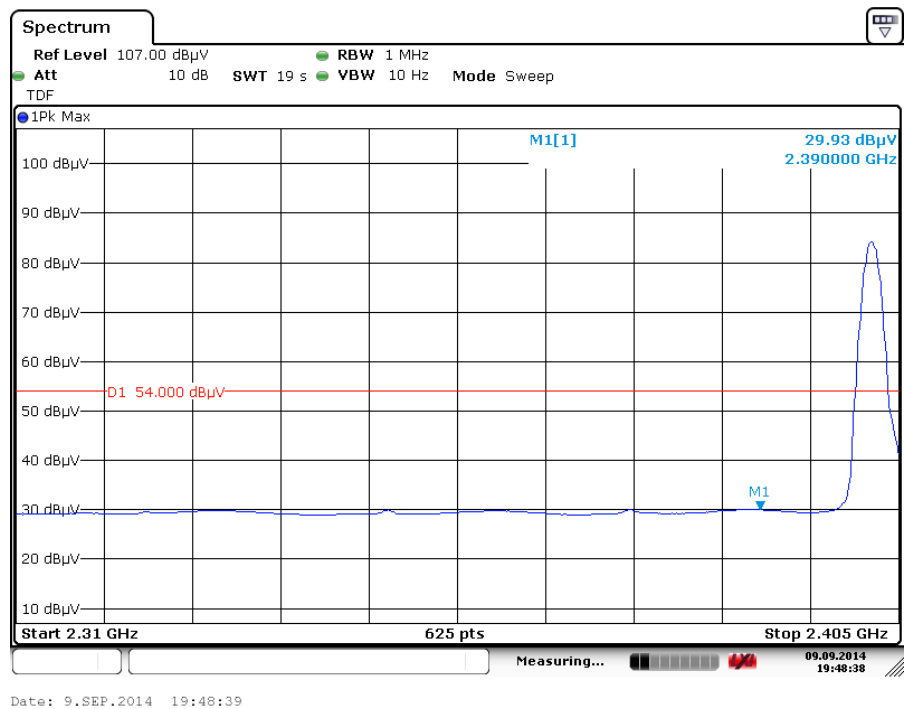



Spurious Emissions, Band Edge, 2.35-2.5G

Radiated Bandedge (GFSK)

High Channel (Hor)

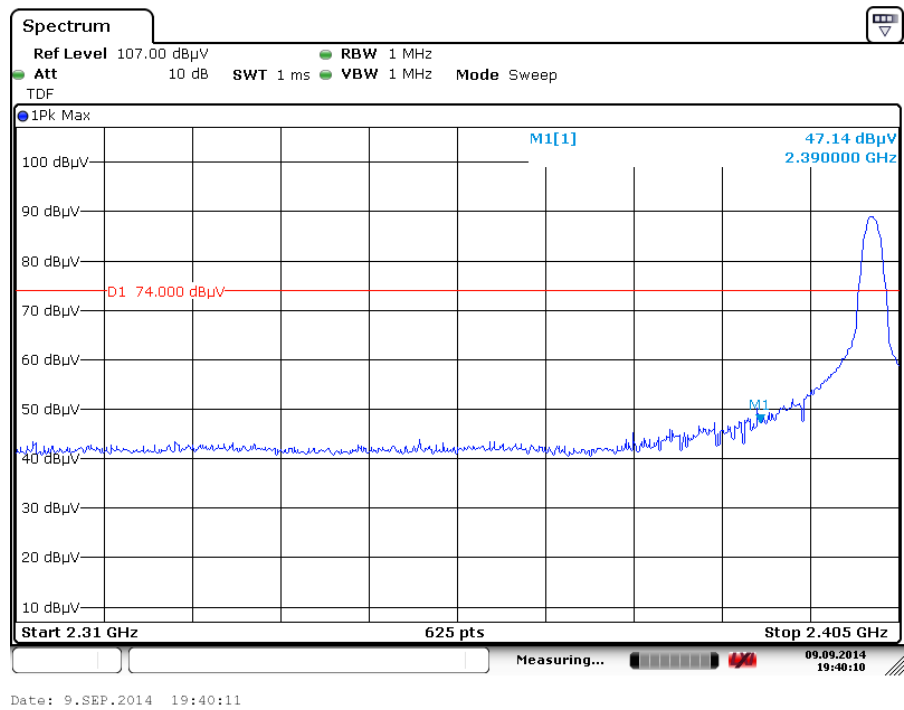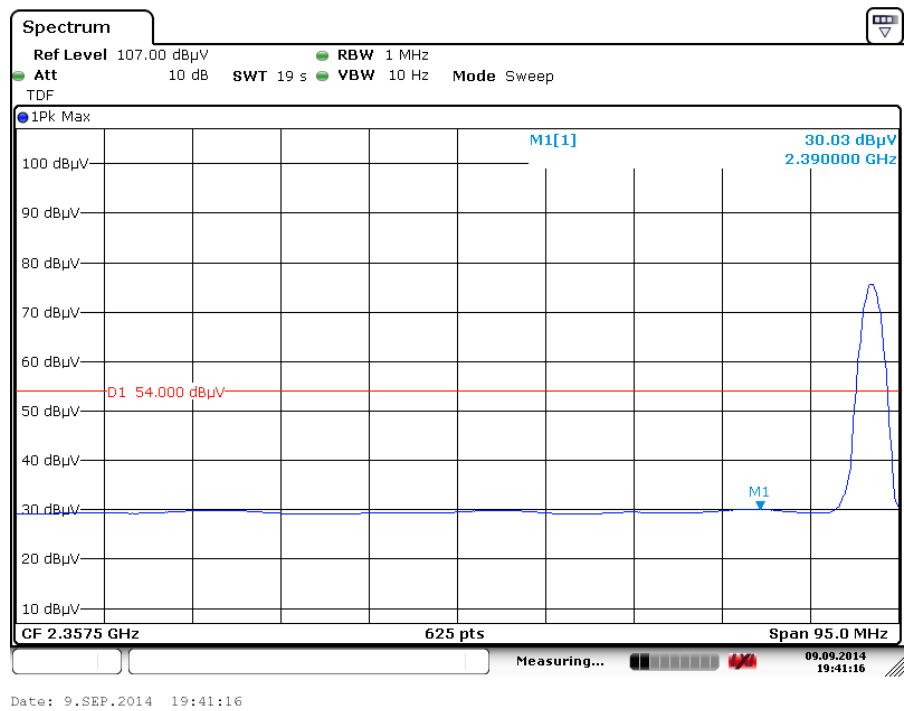



High Channel (Ver)

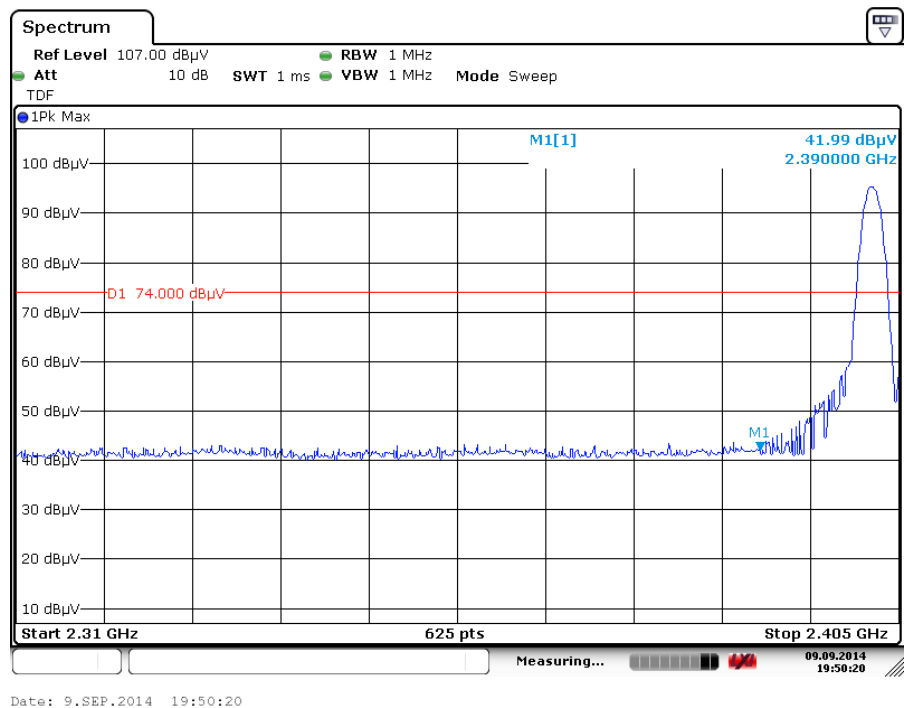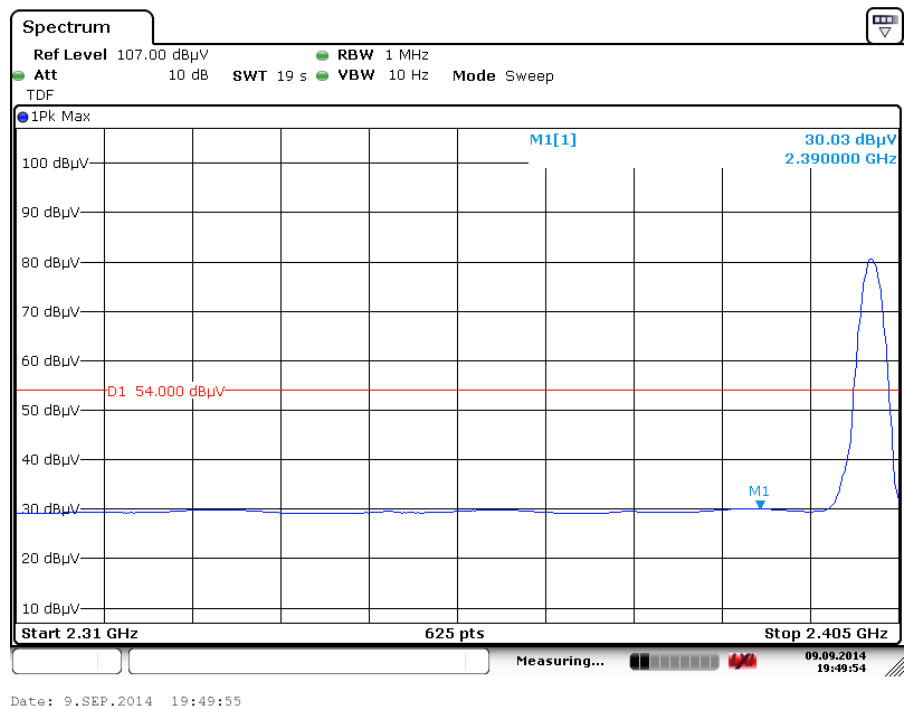

Spurious Emissions, Band Edge, 2.35-2.5G



Radiated Bandedge (8DPSK)

Low Channel (Hor)

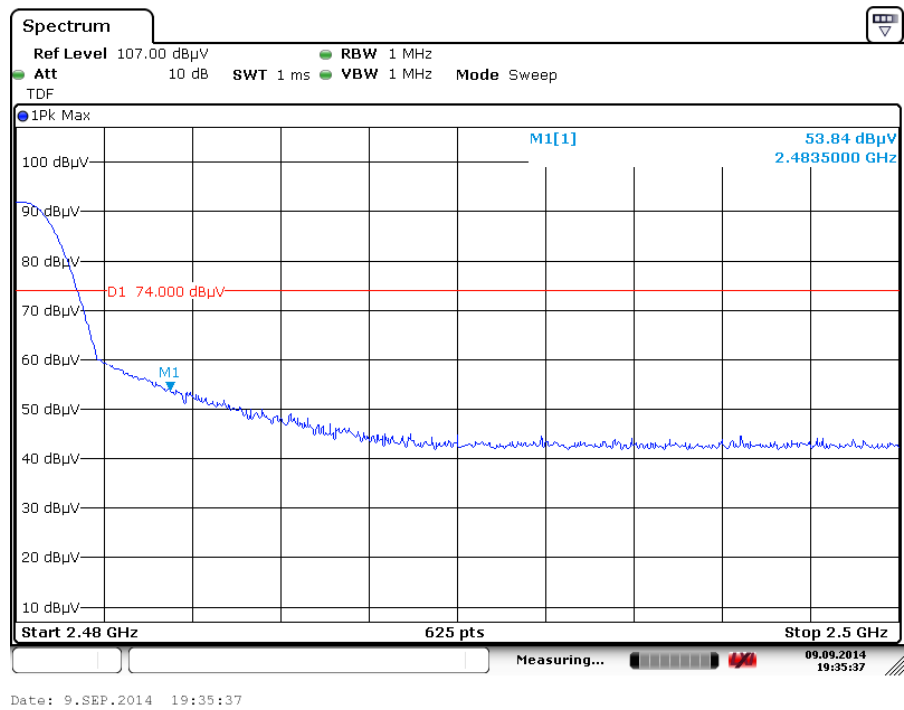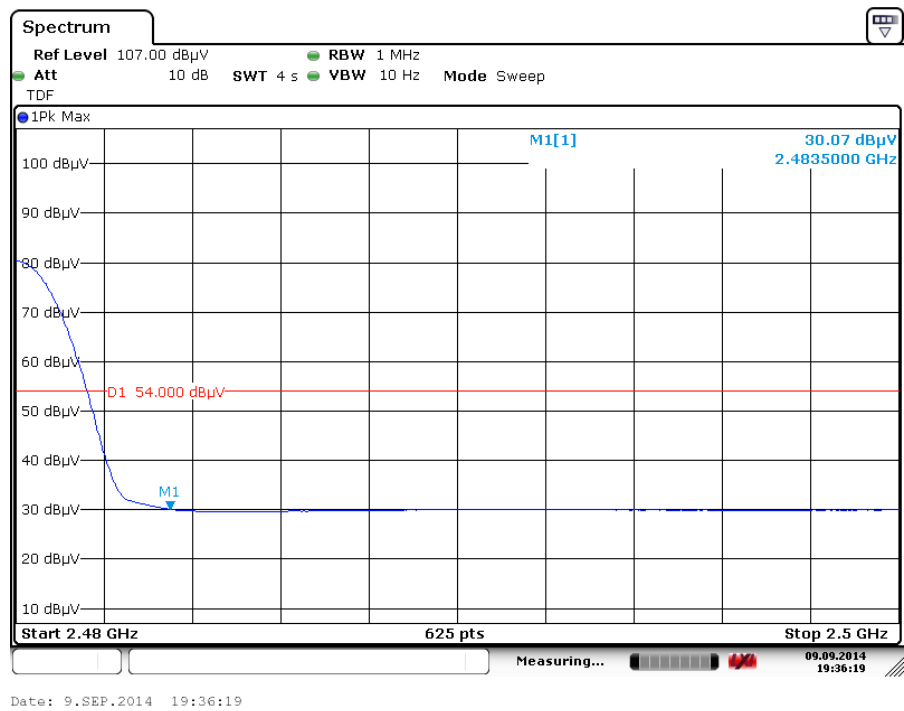

Spurious Emissions, Band Edge, 2.35-2.5G



Low Channel (Ver)

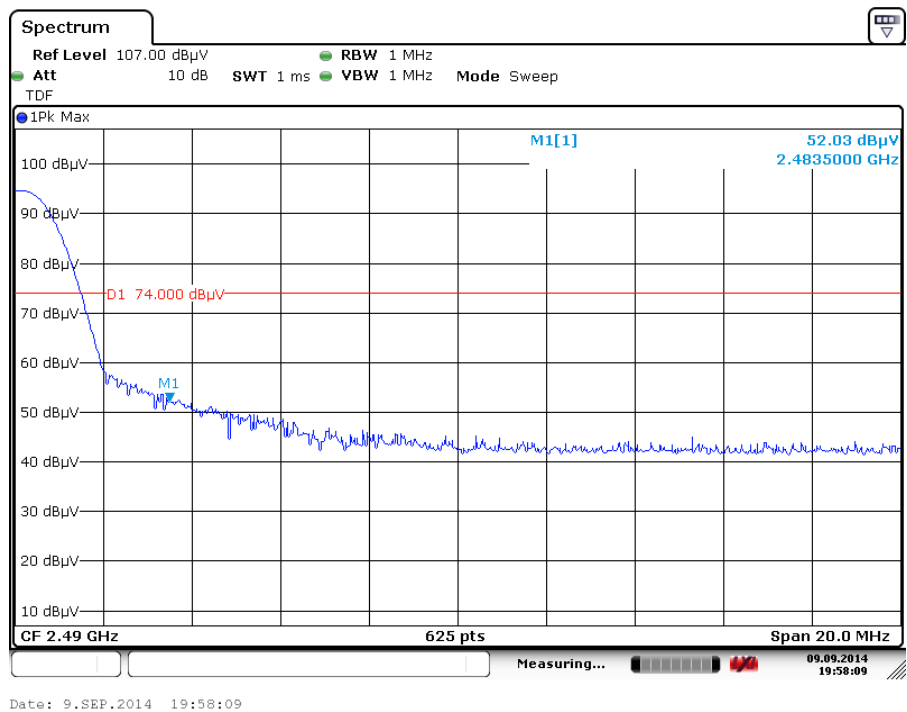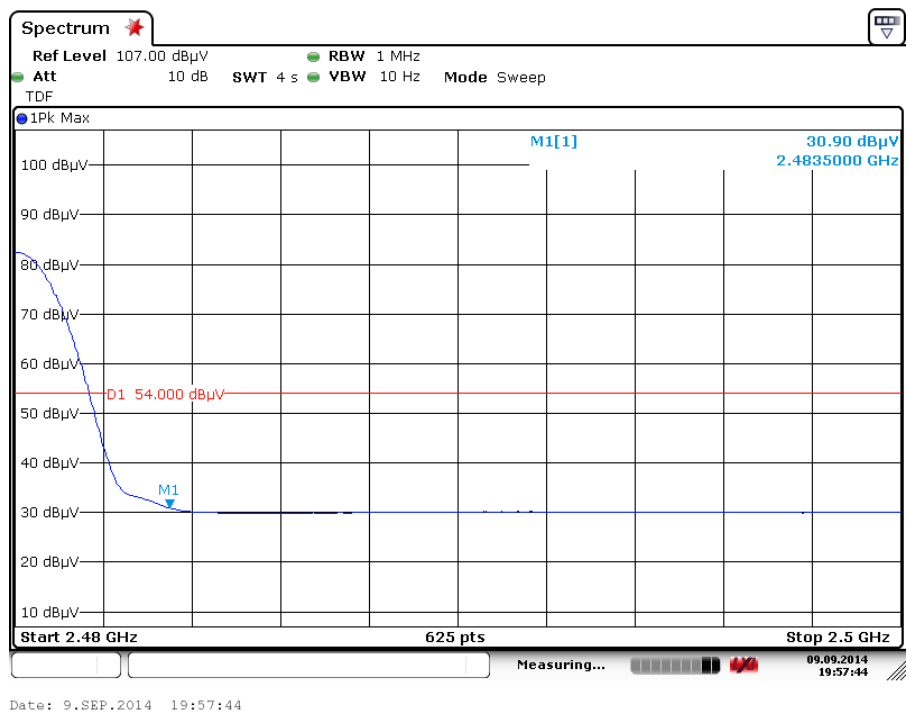

Spurious Emissions, Band Edge, 2.35-2.5G



Radiated Bandedge (8DPSK)

High Channel (Hor)

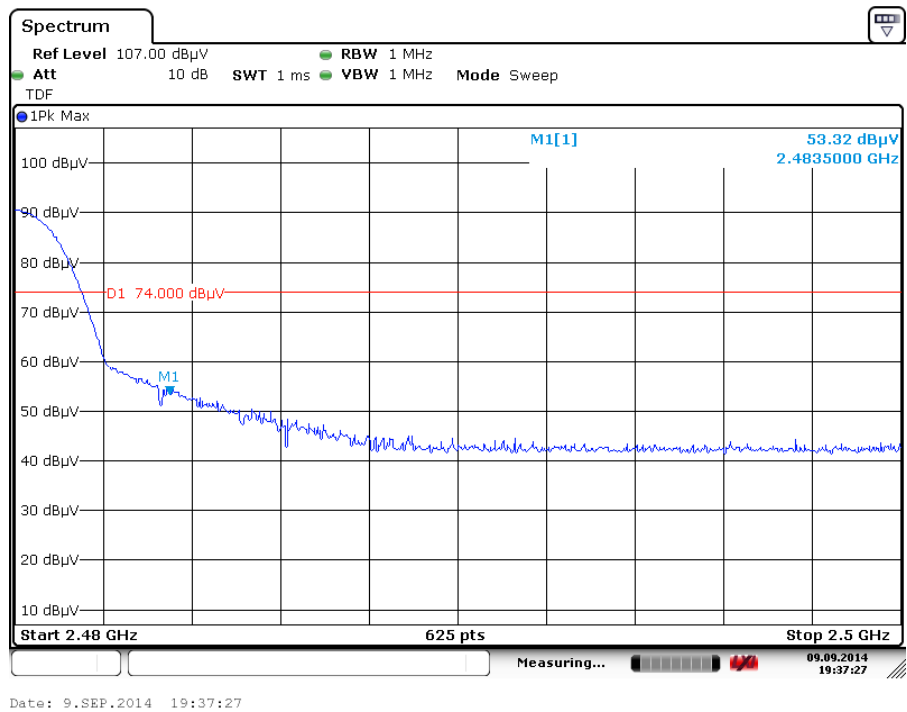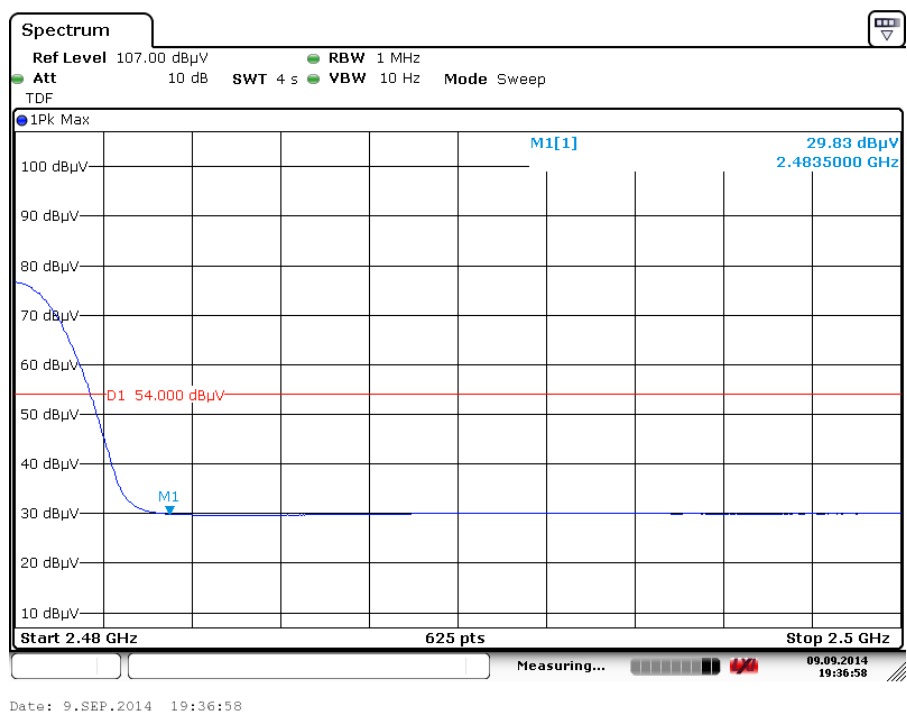

Spurious Emissions, Band Edge, 2.35-2.5G

High Channel (Ver)

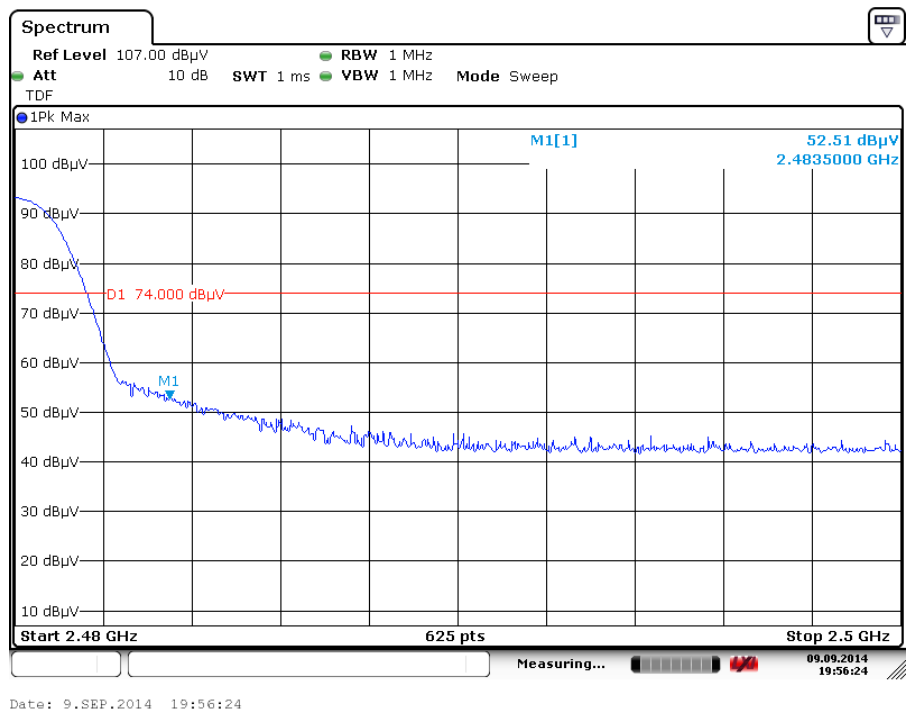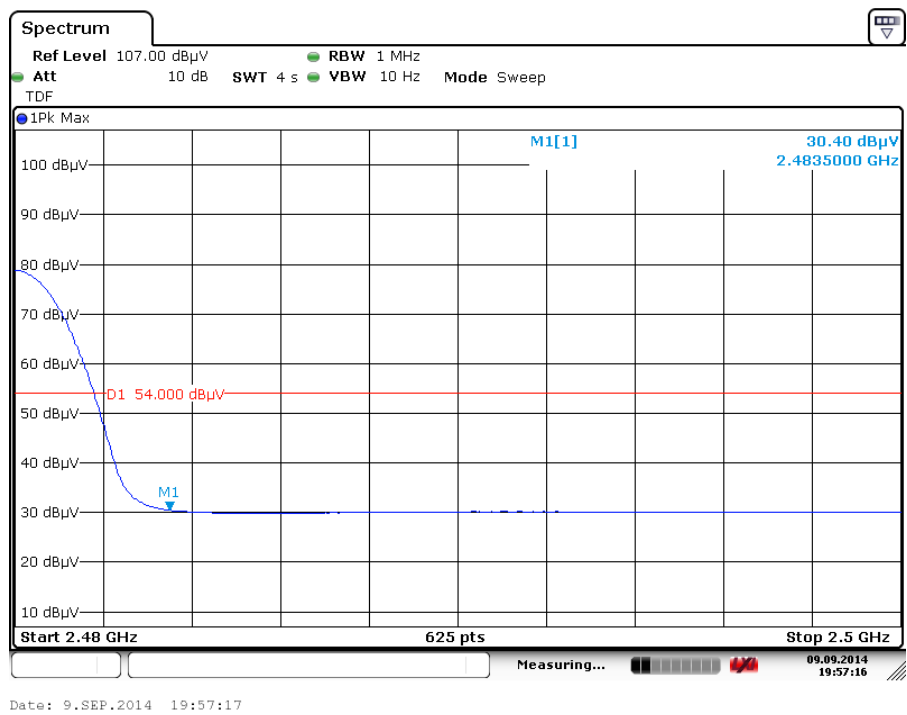

Spurious Emissions, Band Edge, 2.35-2.5G


Spurious Emissions, TX Mode, 1-18G



TUV Rheinland Taiwan


11F.,No.758,Sec. 4,Bade Rd.,Songshan Dist.,Taipei 105,Taiwan

Tel:+886-2-2172-7000 Fax:+886-2-2528-0018

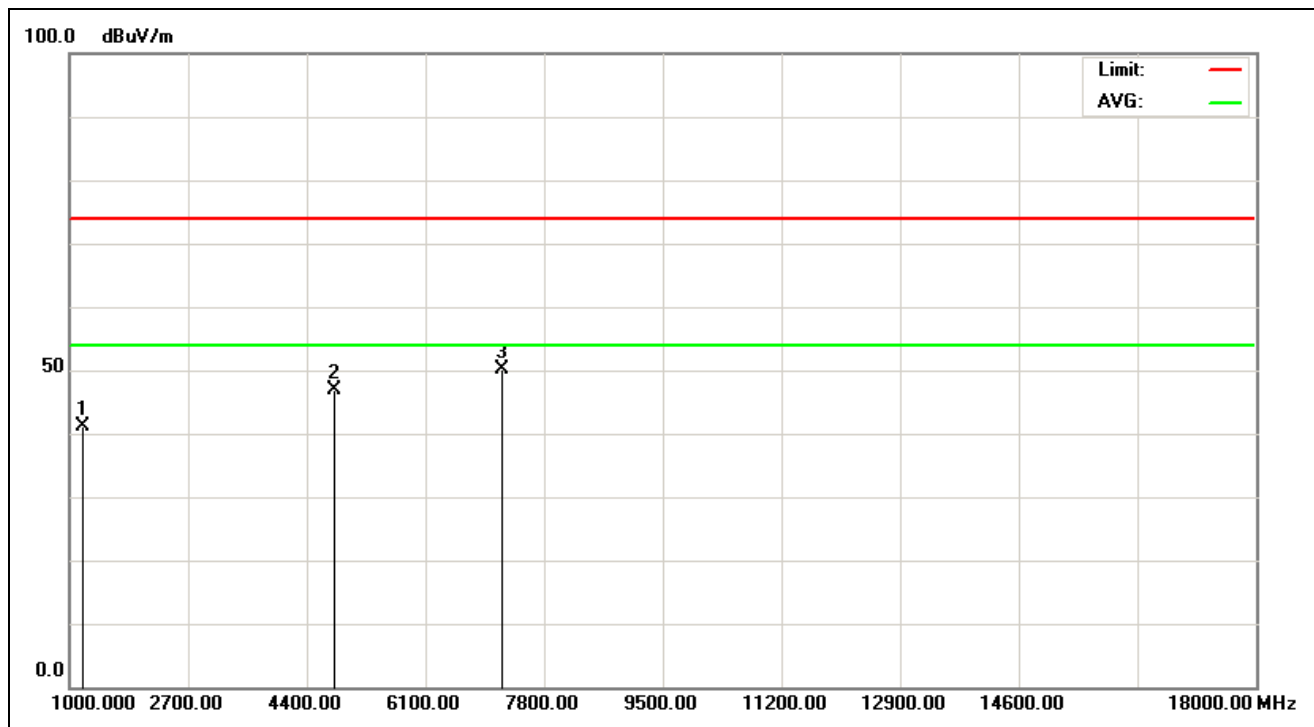


Service No.:	114019974-BT-FCC	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2014/9/9 20:01:11
Applicant:	Trans	Test Rating:	DC 12V
Product:	inCar Bluetooth Music Receiver	Temp.(°C)/Hum.(%)	30(°C)/48%
Model No.:	BTR-5300	Test Engineer:	Freeman Wang
Test Mode:	2402MHz_1DH5_TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	1190.705	-9.79	50.96	41.17	74.00	-32.83	peak			
2	4804.000	-2.59	49.36	46.77	74.00	-27.23	peak			
3	7206.000	5.44	44.61	50.05	74.00	-23.95	peak			

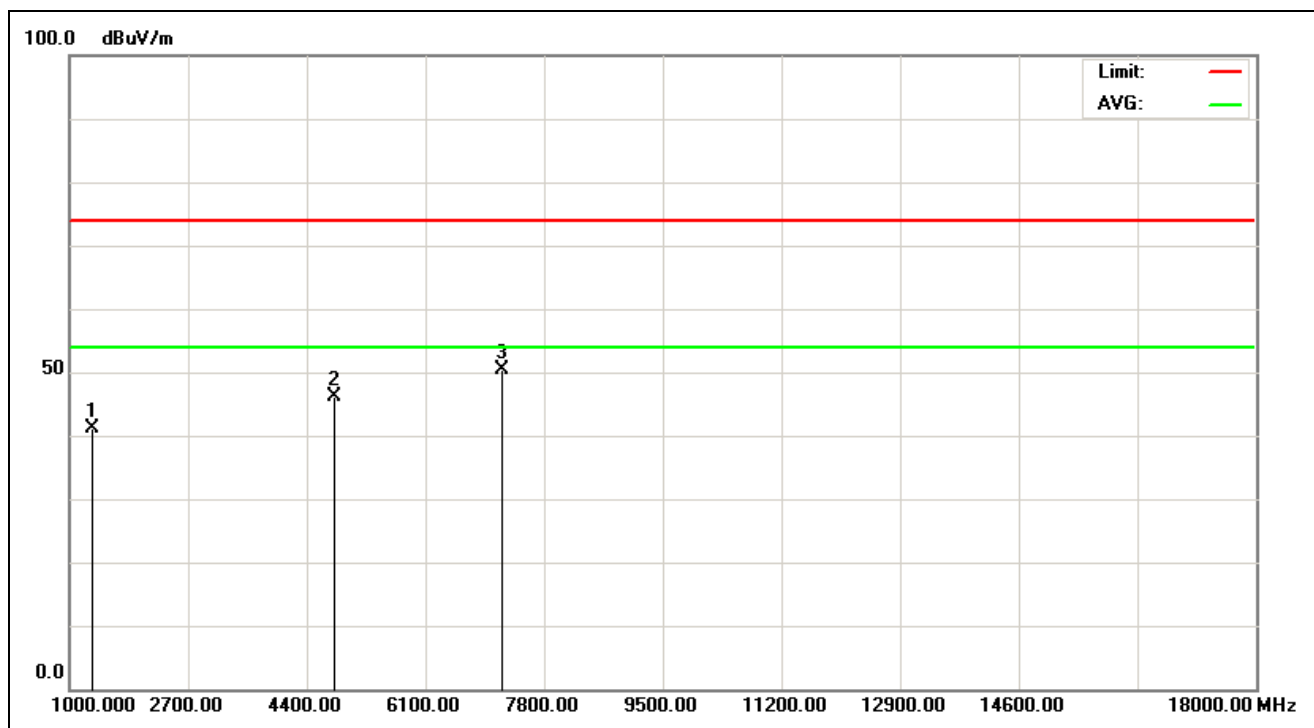


Service No.:	114019974-BT-FCC	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2014/9/9 20:02:13
Applicant:	Trans	Test Rating:	DC 12V
Product:	inCar Bluetooth Music Receiver	Temp.(°C)/Hum.(%)	30(°C)/48%
Model No.:	BTR-5300	Test Engineer:	Freeman Wang
Test Mode:	2402MHz_1DH5_TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	1326.923	-10.17	51.21	41.04	74.00	-32.96	peak			
2	4804.000	-2.59	48.75	46.16	74.00	-27.84	peak			
3	7206.000	5.44	45.01	50.45	74.00	-23.55	peak			

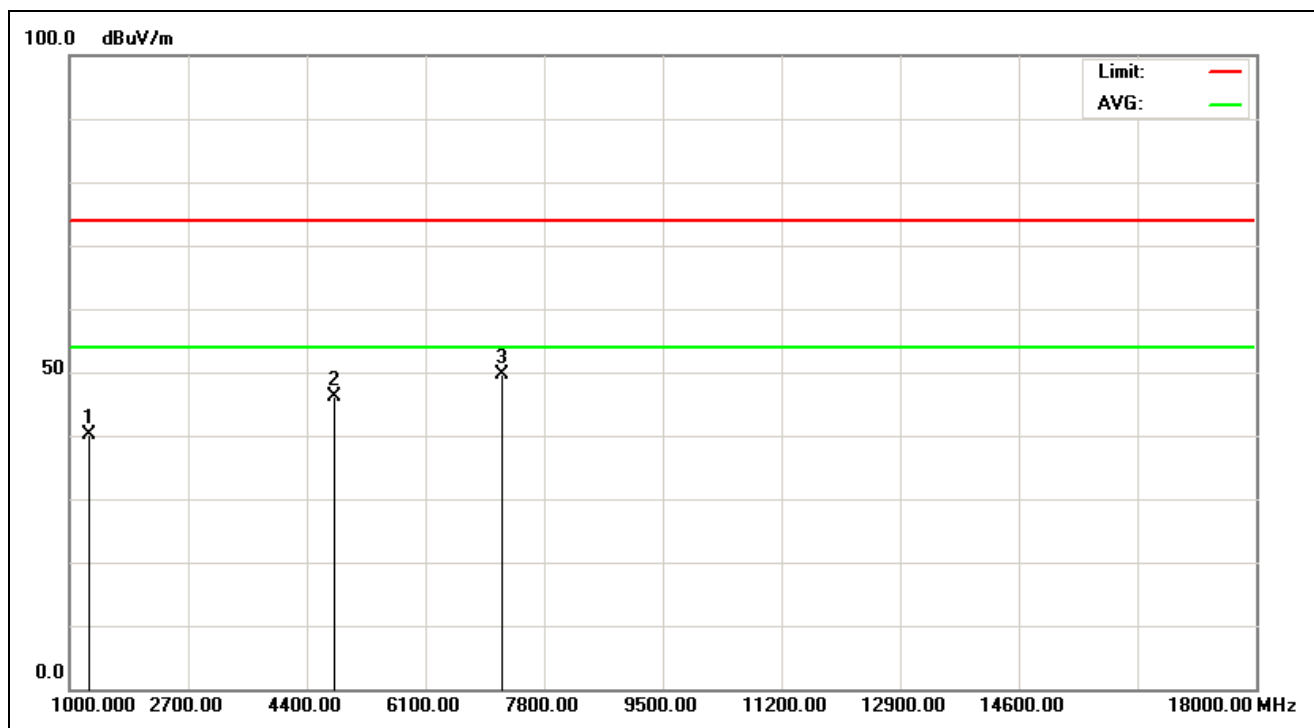


Service No.:	114019974-BT-FCC	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2014/9/9 20:14:19
Applicant:	Trans	Test Rating:	DC 12V
Product:	inCar Bluetooth Music Receiver	Temp.(°C)/Hum.(%)	30(°C)/48%
Model No.:	BTR-5300	Test Engineer:	Freeman Wang
Test Mode:	2402MHz_3DH5_TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	1272.436	-10.02	50.17	40.15	74.00	-33.85	peak	100	229	
2	4804.000	-2.59	48.77	46.18	74.00	-27.82	peak			
3	7206.000	5.44	44.24	49.68	74.00	-24.32	peak			

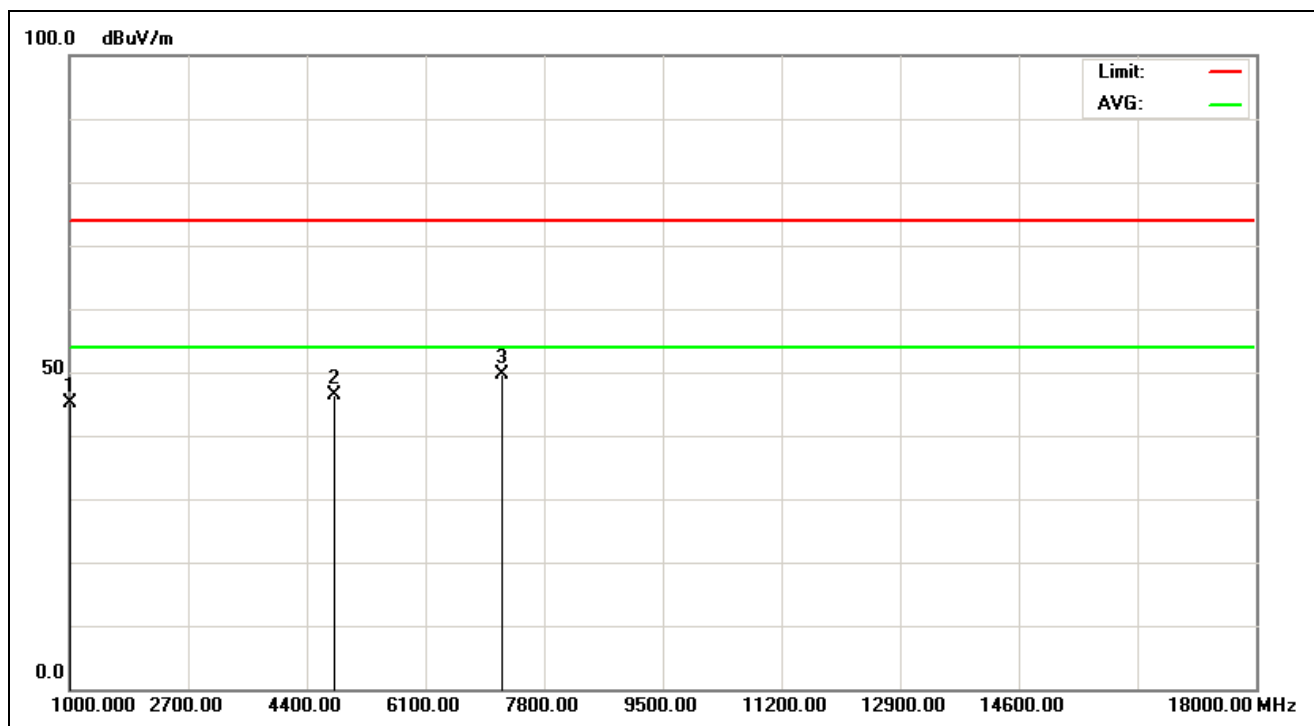


Service No.:	114019974-BT-FCC	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2014/9/9 20:15:21
Applicant:	Trans	Test Rating:	DC 12V
Product:	inCar Bluetooth Music Receiver	Temp.(°C)/Hum.(%)	30(°C)/48%
Model No.:	BTR-5300	Test Engineer:	Freeman Wang
Test Mode:	2402MHz_3DH5_TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	1000.0000	-9.25	54.38	45.13	74.00	-28.87	peak	100	261	
2	4804.000	-2.59	49.04	46.45	74.00	-27.55	peak			
3	7206.000	5.44	44.14	49.58	74.00	-24.42	peak			

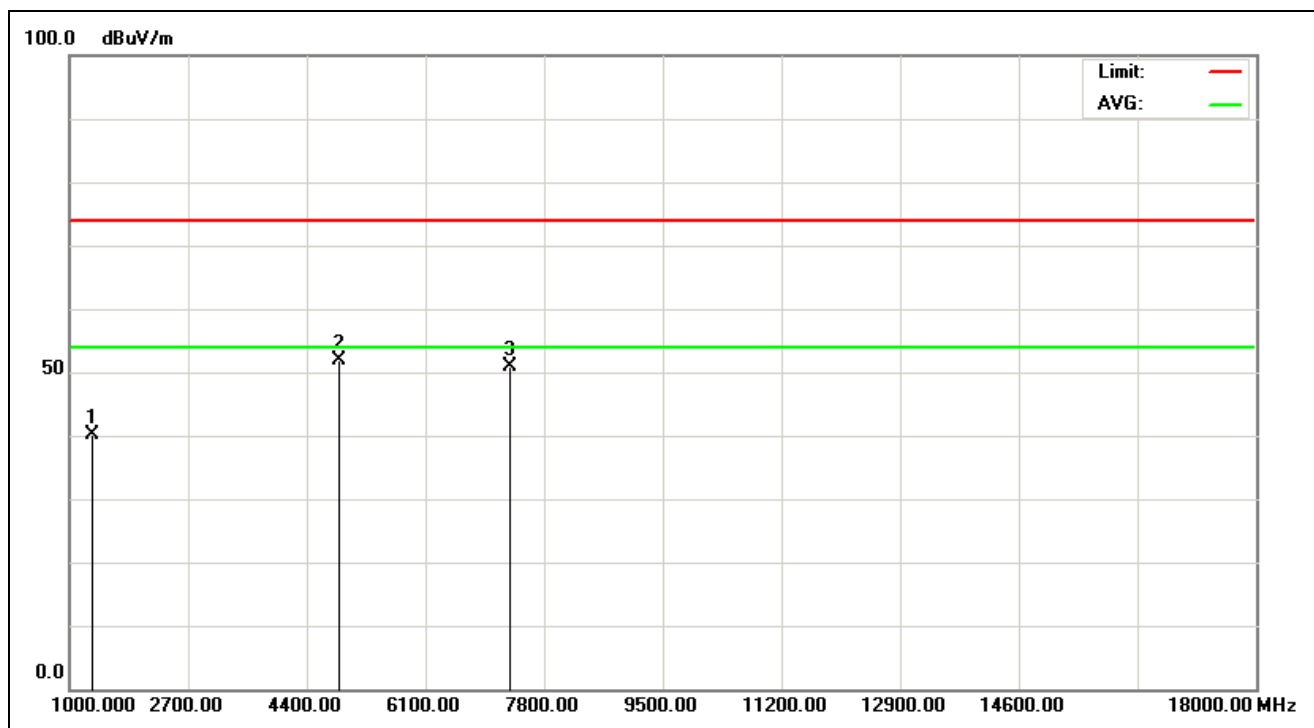


Service No.:	114019974-BT-FCC	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2014/9/9 20:04:28
Applicant:	Trans	Test Rating:	DC 12V
Product:	inCar Bluetooth Music Receiver	Temp.(°C)/Hum.(%):	30(°C)/48%
Model No.:	BTR-5300	Test Engineer:	Freeman Wang
Test Mode:	2441MHz_1DH5_TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	1326.923	-10.17	50.38	40.21	74.00	-33.79	peak			
2	4868.590	-2.42	54.41	51.99	74.00	-22.01	peak			
3	7323.000	5.76	45.03	50.79	74.00	-23.21	peak			

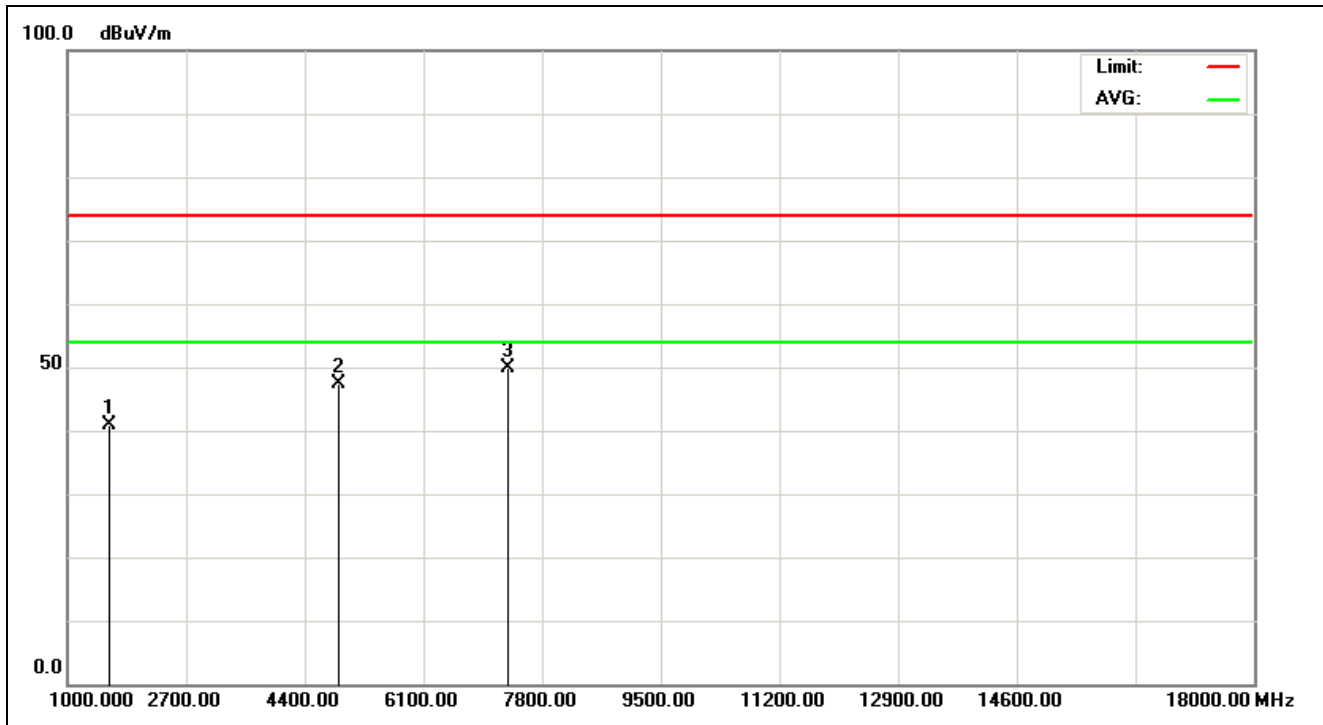


Service No.:	114019974-BT-FCC	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2014/9/9 20:05:31
Applicant:	Trans	Test Rating:	DC 12V
Product:	inCar Bluetooth Music Receiver	Temp.(°C)/Hum.(%):	30(°C)/48%
Model No.:	BTR-5300	Test Engineer:	Freeman Wang
Test Mode:	2441MHz_1DH5_TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	1599.359	-10.03	50.89	40.86	74.00	-33.14	peak			
2	4882.000	-2.39	49.72	47.33	74.00	-26.67	peak			
3	7323.000	5.76	44.23	49.99	74.00	-24.01	peak			

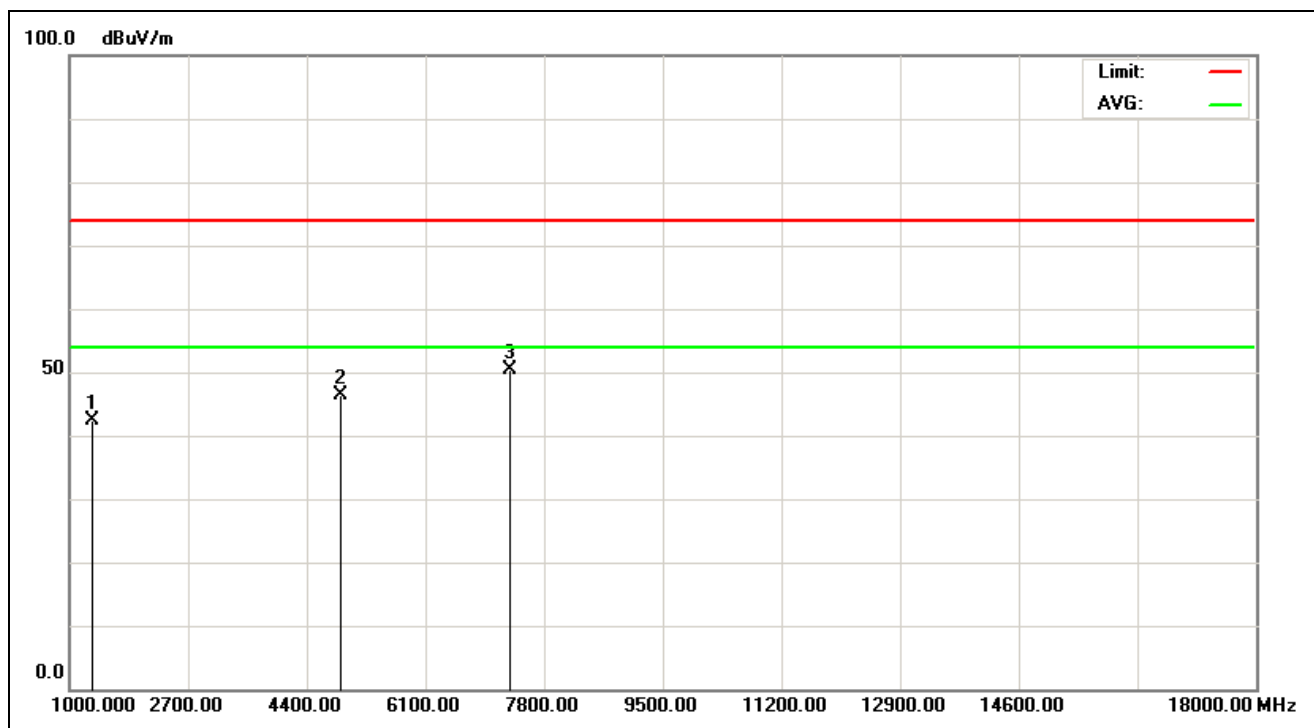


Service No.:	114019974-BT-FCC	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2014/9/9 20:17:41
Applicant:	Trans	Test Rating:	DC 12V
Product:	inCar Bluetooth Music Receiver	Temp.(°C)/Hum.(%)	30(°C)/48%
Model No.:	BTR-5300	Test Engineer:	Freeman Wang
Test Mode:	2441MHz_3DH5_TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	1326.923	-10.17	52.52	42.35	74.00	-31.65	peak	100	219	
2	4882.000	-2.39	48.73	46.34	74.00	-27.66	peak			
3	7323.000	5.76	44.52	50.28	74.00	-23.72	peak			

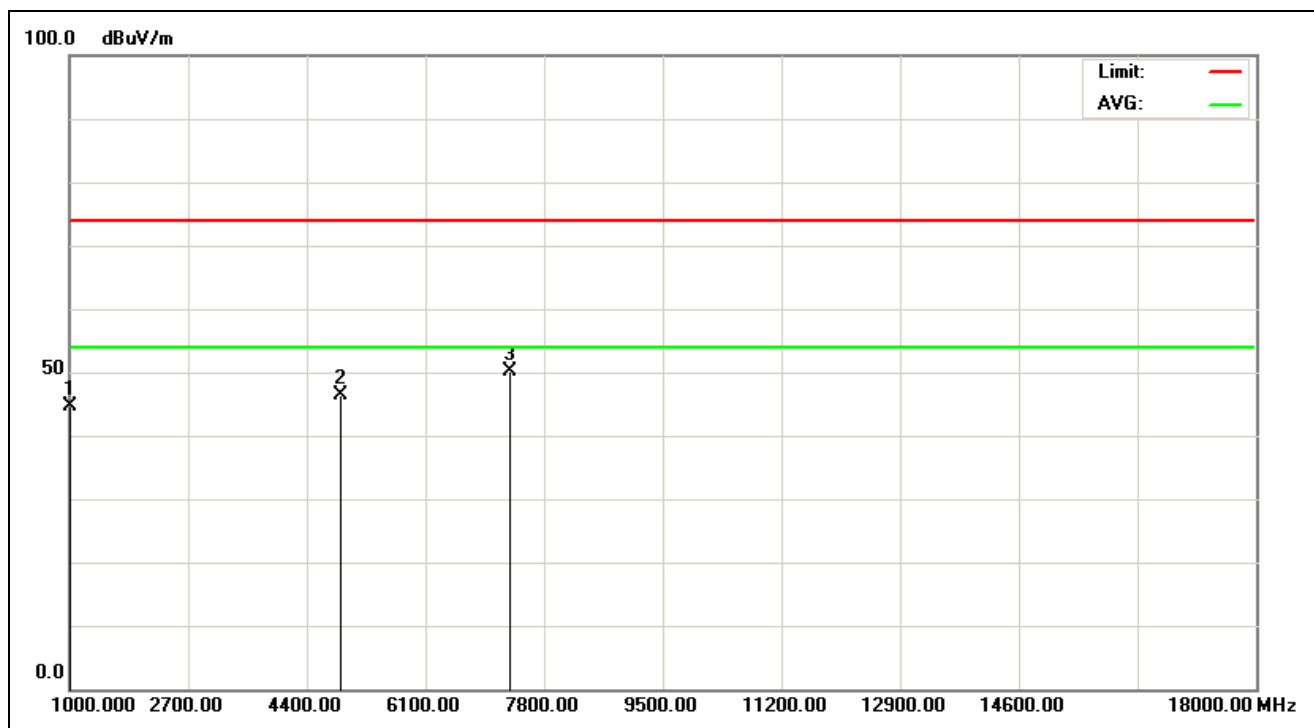


Service No.:	114019974-BT-FCC	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2014/9/9 20:18:43
Applicant:	Trans	Test Rating:	DC 12V
Product:	inCar Bluetooth Music Receiver	Temp.(°C)/Hum.(%)	30(°C)/48%
Model No.:	BTR-5300	Test Engineer:	Freeman Wang
Test Mode:	2441MHz_3DH5_TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	1000.0000	-9.25	53.86	44.61	74.00	-29.39	peak	100	246	
2	4882.000	-2.39	48.82	46.43	74.00	-27.57	peak			
3	7323.000	5.76	44.44	50.20	74.00	-23.80	peak			

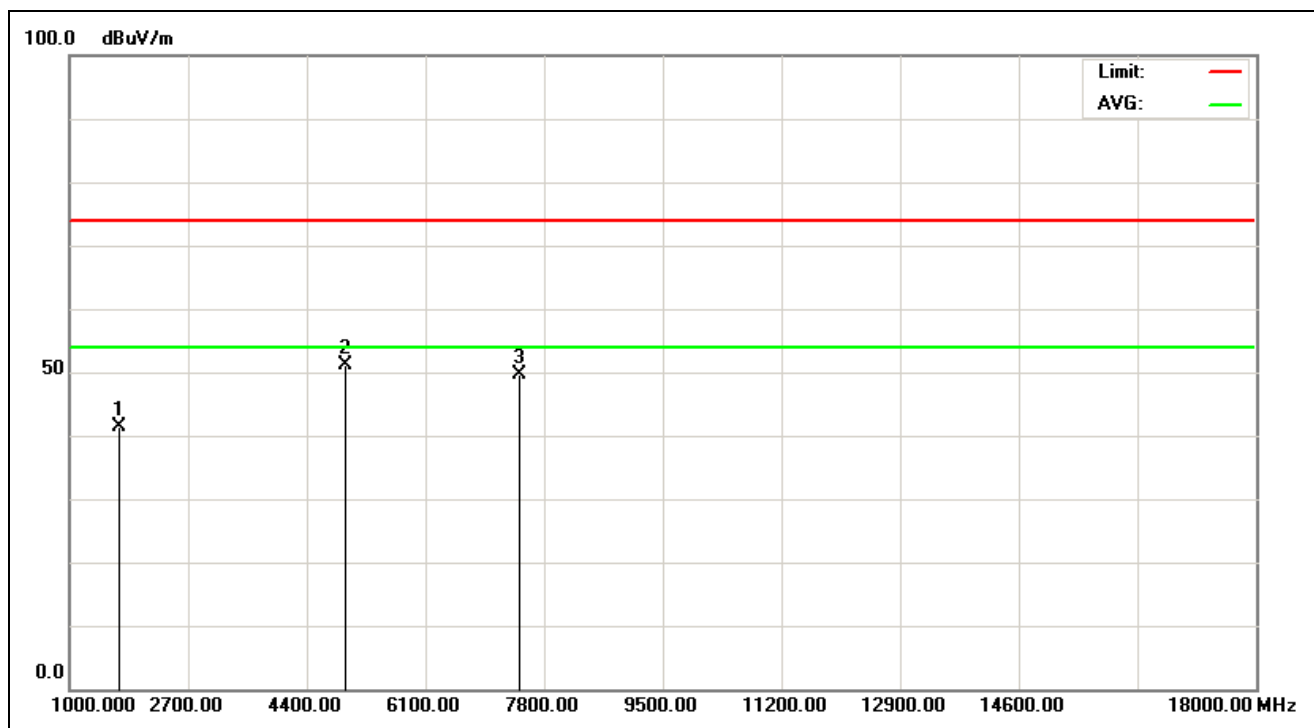


Service No.:	114019974-BT-FCC	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2014/9/9 20:07:03
Applicant:	Trans	Test Rating:	DC 12V
Product:	inCar Bluetooth Music Receiver	Temp.(°C)/Hum.(%)	30(°C)/48%
Model No.:	BTR-5300	Test Engineer:	Freeman Wang
Test Mode:	2480MHz_1DH5_TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	1708.333	-9.32	50.59	41.27	74.00	-32.73	peak	100	40	
2	4950.320	-2.21	53.23	51.02	74.00	-22.98	peak	100	181	
3	7440.000	6.09	43.64	49.73	74.00	-24.27	peak			

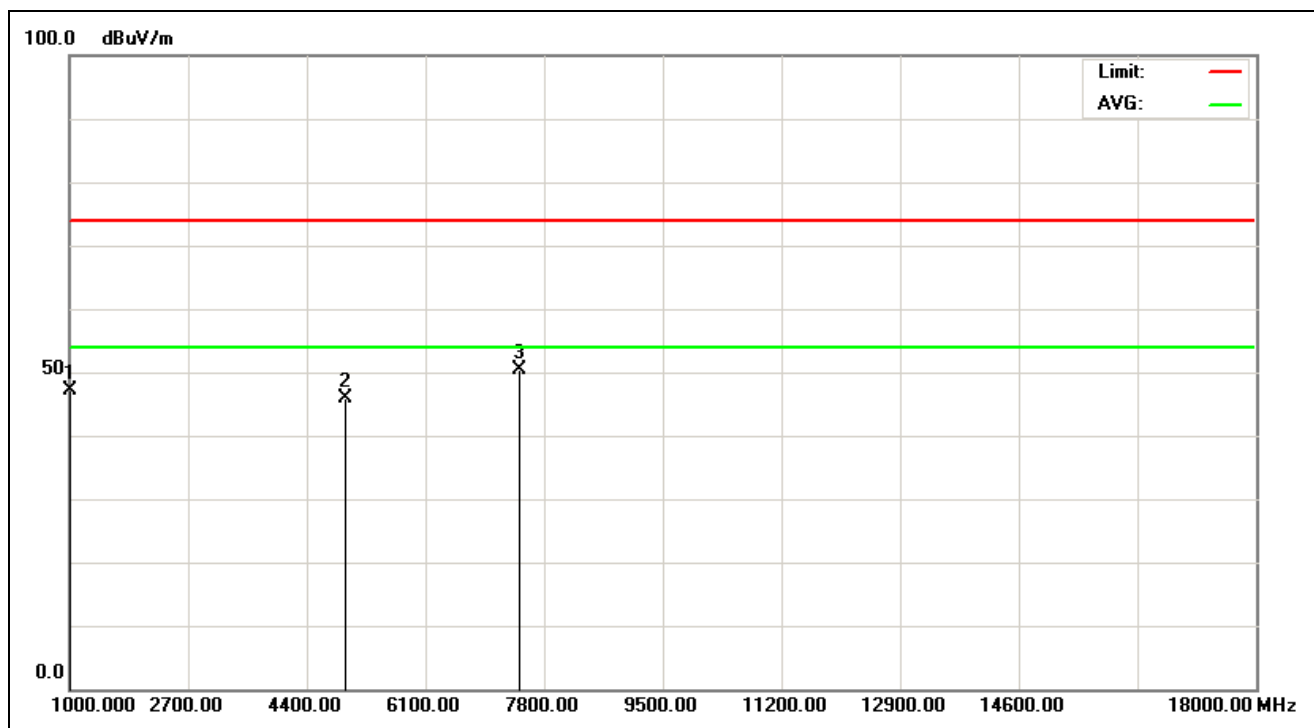


Service No.:	114019974-BT-FCC	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2014/9/9 20:08:05
Applicant:	Trans	Test Rating:	DC 12V
Product:	inCar Bluetooth Music Receiver	Temp.(°C)/Hum.(%):	30(°C)/48%
Model No.:	BTR-5300	Test Engineer:	Freeman Wang
Test Mode:	2480MHz_1DH5_TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	1000.0000	-9.25	56.43	47.18	74.00	-26.82	peak	100	171	
2	4960.000	-2.19	48.08	45.89	74.00	-28.11	peak			
3	7440.000	6.09	44.26	50.35	74.00	-23.65	peak			

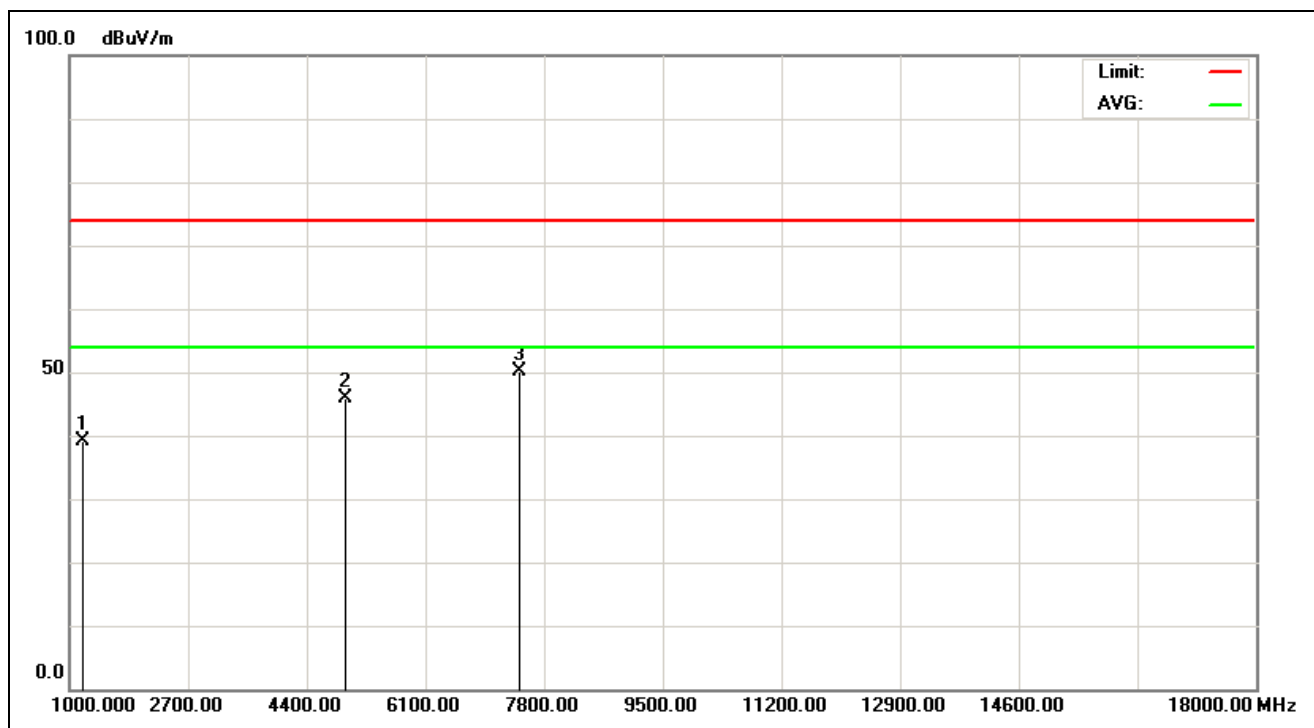

Service No.:	114019974-BT-FCC	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2014/9/9 20:21:31
Applicant:	Trans	Test Rating:	DC 12V
Product:	inCar Bluetooth Music Receiver	Temp.(°C)/Hum.(%):	30(°C)/48%
Model No.:	BTR-5300	Test Engineer:	Freeman Wang
Test Mode:	2480MHz_3DH5_TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	1190.705	-9.79	48.92	39.13	74.00	-34.87	peak	100	263	
2	4960.000	-2.19	48.02	45.83	74.00	-28.17	peak			
3	7440.000	6.09	43.93	50.02	74.00	-23.98	peak			

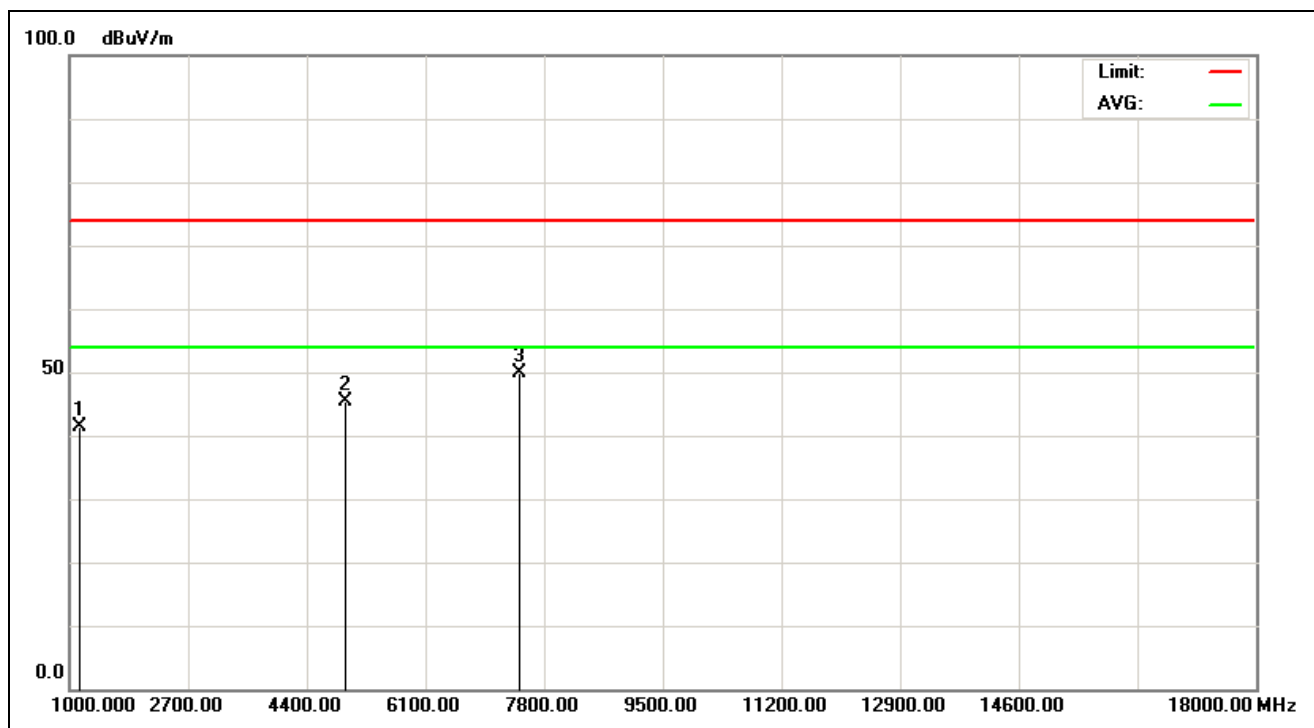

Service No.:	114019974-BT-FCC	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2014/9/9 20:22:33
Applicant:	Trans	Test Rating:	DC 12V
Product:	inCar Bluetooth Music Receiver	Temp.(°C)/Hum.(%)	30(°C)/48%
Model No.:	BTR-5300	Test Engineer:	Freeman Wang
Test Mode:	2480MHz_3DH5_TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	1136.218	-9.64	51.04	41.40	74.00	-32.60	peak	100	11	
2	4960.000	-2.19	47.55	45.36	74.00	-28.64	peak			
3	7440.000	6.09	43.88	49.97	74.00	-24.03	peak			


Spurious Emissions, TX Mode, 18-26G



TUV Rheinland Taiwan


11F.,No.758,Sec. 4,Bade Rd.,Songsan Dist.,Taipei 105,Taiwan

Tel:+886-2-2172-7000 Fax:+886-2-2528-0018

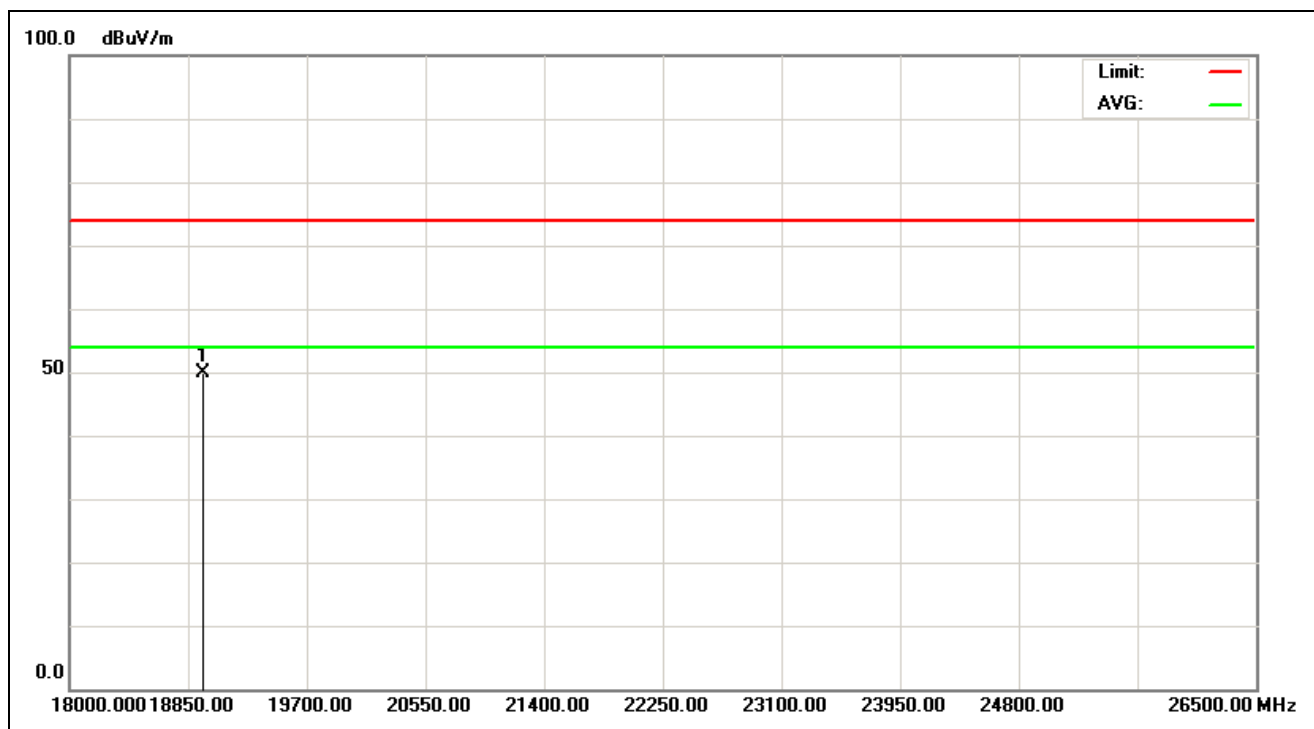


Service No.:	114019974-BT-FCC	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2014/9/9 20:35:49
Applicant:	Trans	Test Rating:	DC 12V
Product:	inCar Bluetooth Music Receiver	Temp.(°C)/Hum.(%)	30(°C)/48%
Model No.:	BTR-5300	Test Engineer:	Freeman Wang
Test Mode:	2402MHz_1DH5_TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	18953.526	29.84	20.05	49.89	74.00	-24.11	peak			

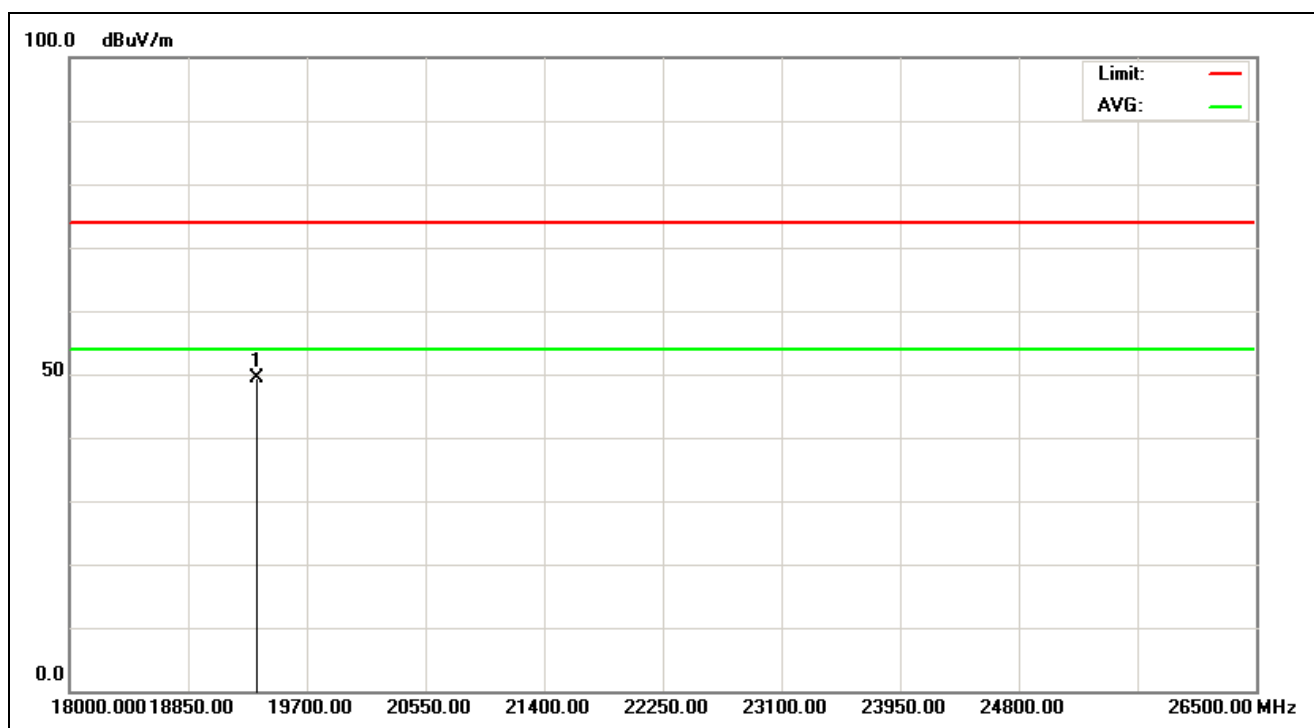


Service No.:	114019974-BT-FCC	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2014/9/9 20:36:04
Applicant:	Trans	Test Rating:	DC 12V
Product:	inCar Bluetooth Music Receiver	Temp.(°C)/Hum.(%):	30(°C)/48%
Model No.:	BTR-5300	Test Engineer:	Freeman Wang
Test Mode:	2402MHz_1DH5_TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	19348.558	29.21	20.18	49.39	74.00	-24.61	peak			

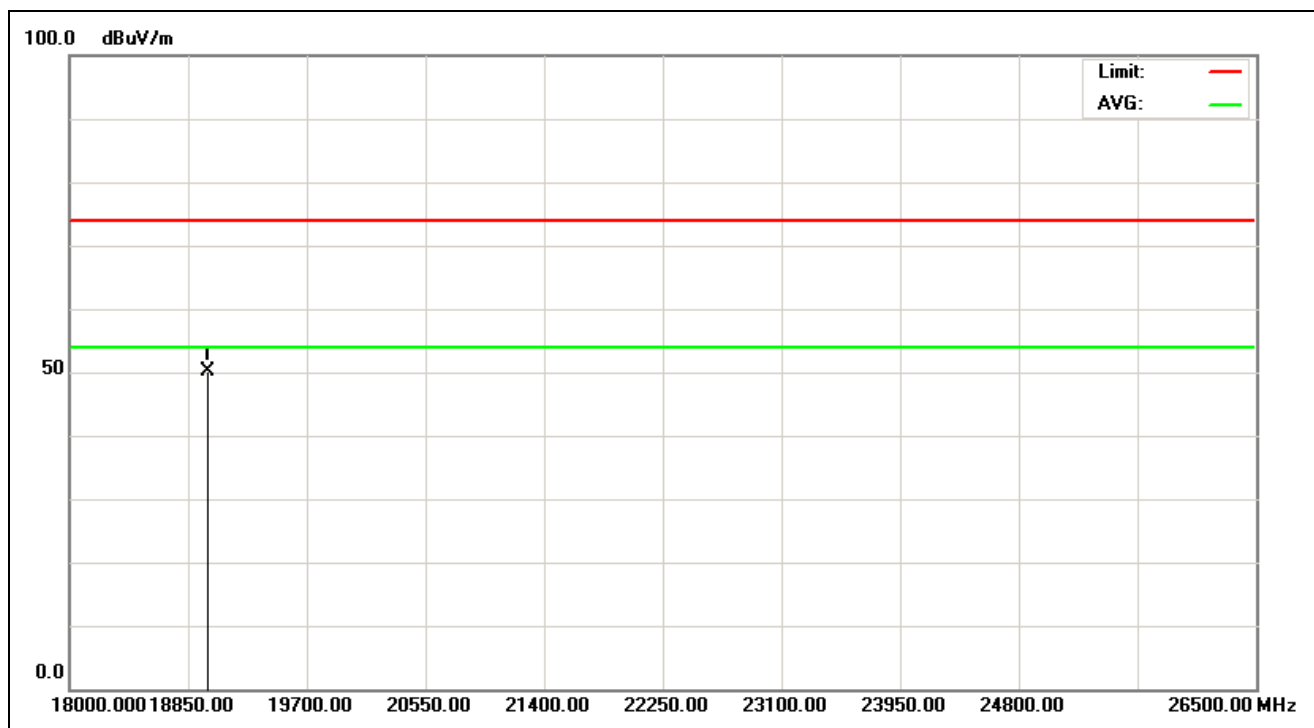


Service No.:	114019974-BT-FCC	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2014/9/9 20:37:32
Applicant:	Trans	Test Rating:	DC 12V
Product:	inCar Bluetooth Music Receiver	Temp.(°C)/Hum.(%):	30(°C)/48%
Model No.:	BTR-5300	Test Engineer:	Freeman Wang
Test Mode:	2402MHz_3DH5_TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	18994.391	29.96	20.06	50.02	74.00	-23.98	peak			

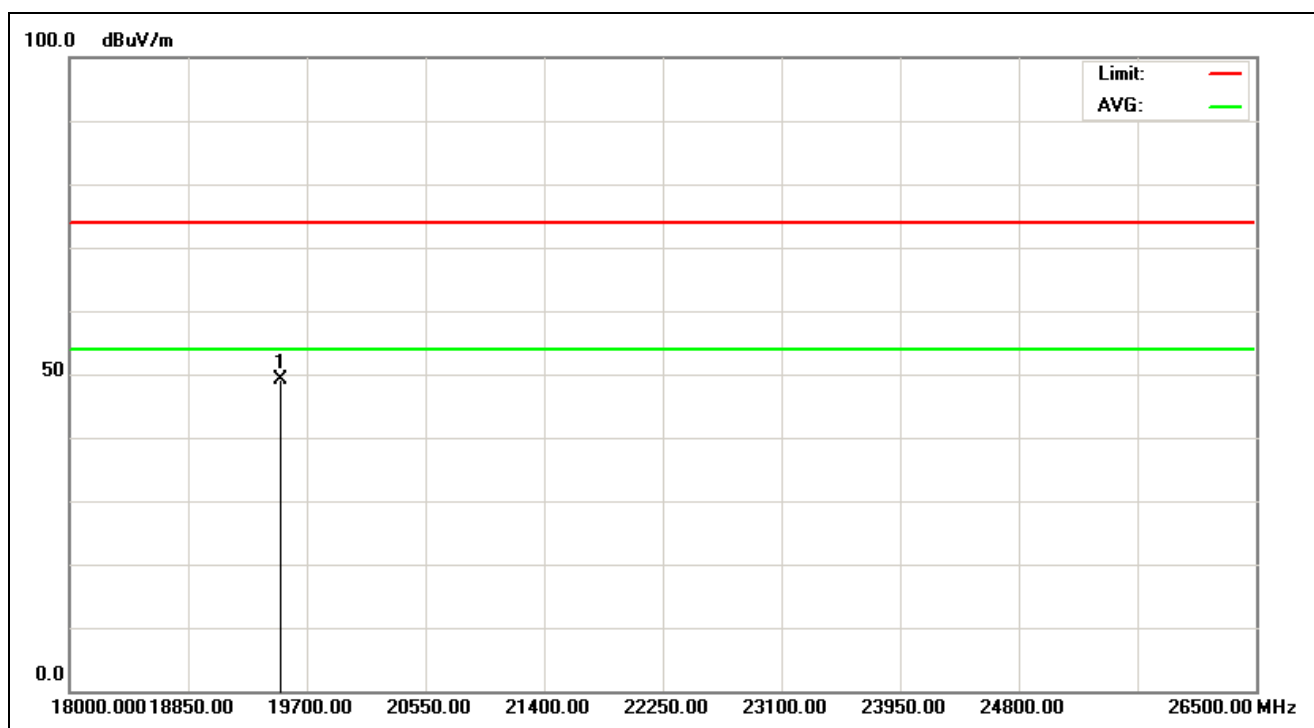


Service No.:	114019974-BT-FCC	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2014/9/9 20:37:44
Applicant:	Trans	Test Rating:	DC 12V
Product:	inCar Bluetooth Music Receiver	Temp.(°C)/Hum.(%):	30(°C)/48%
Model No.:	BTR-5300	Test Engineer:	Freeman Wang
Test Mode:	2402MHz_3DH5_TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	19512.019	28.88	20.25	49.13	74.00	-24.87	peak			

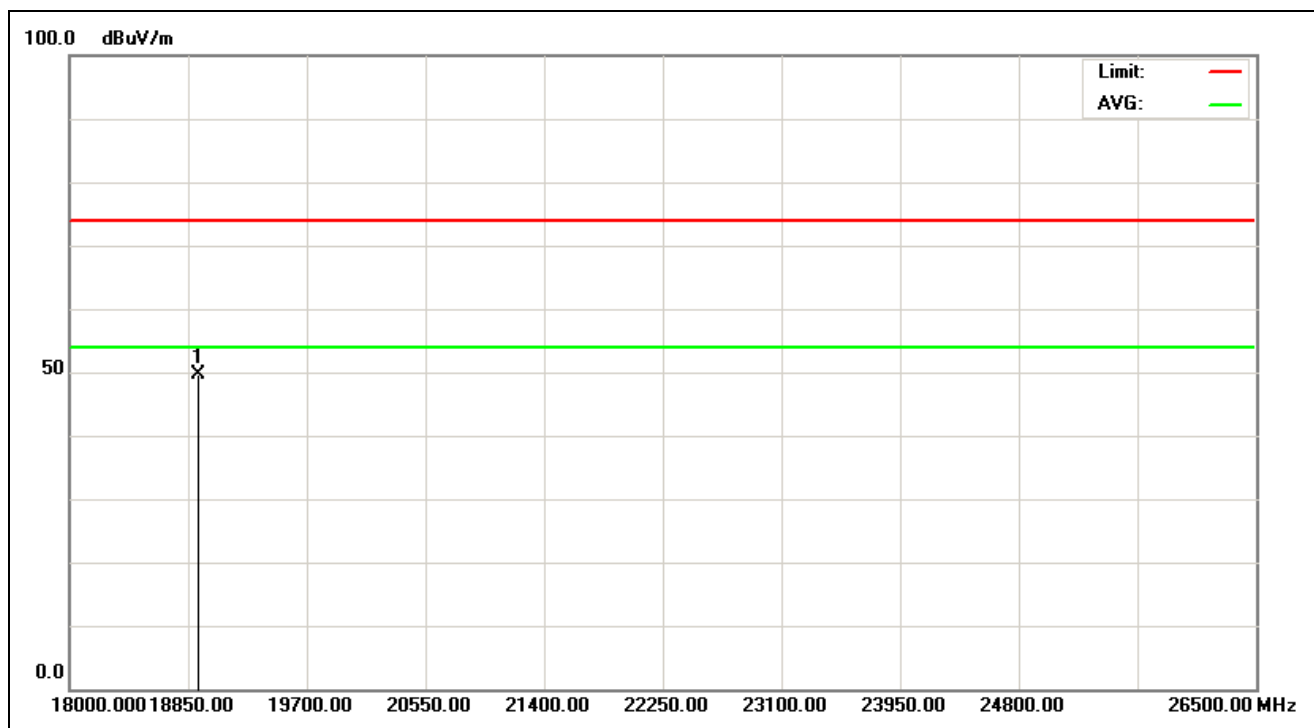


Service No.:	114019974-BT-FCC	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2014/9/9 20:36:23
Applicant:	Trans	Test Rating:	DC 12V
Product:	inCar Bluetooth Music Receiver	Temp.(°C)/Hum.(%):	30(°C)/48%
Model No.:	BTR-5300	Test Engineer:	Freeman Wang
Test Mode:	2441MHz_1DH5_TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	18926.282	29.75	19.78	49.53	74.00	-24.47	peak			

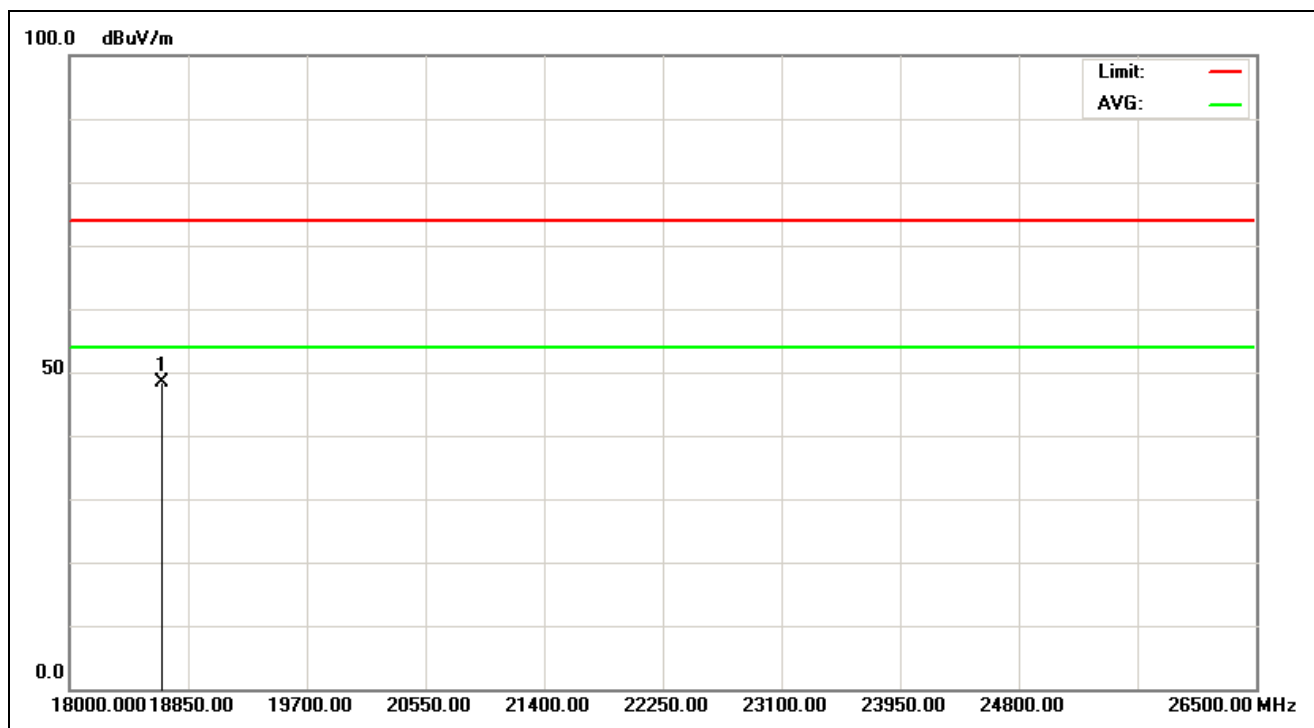


Service No.:	114019974-BT-FCC	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2014/9/9 20:36:37
Applicant:	Trans	Test Rating:	DC 12V
Product:	inCar Bluetooth Music Receiver	Temp.(°C)/Hum.(%):	30(°C)/48%
Model No.:	BTR-5300	Test Engineer:	Freeman Wang
Test Mode:	2441MHz_1DH5_TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	18667.468	28.95	19.40	48.35	74.00	-25.65	peak			

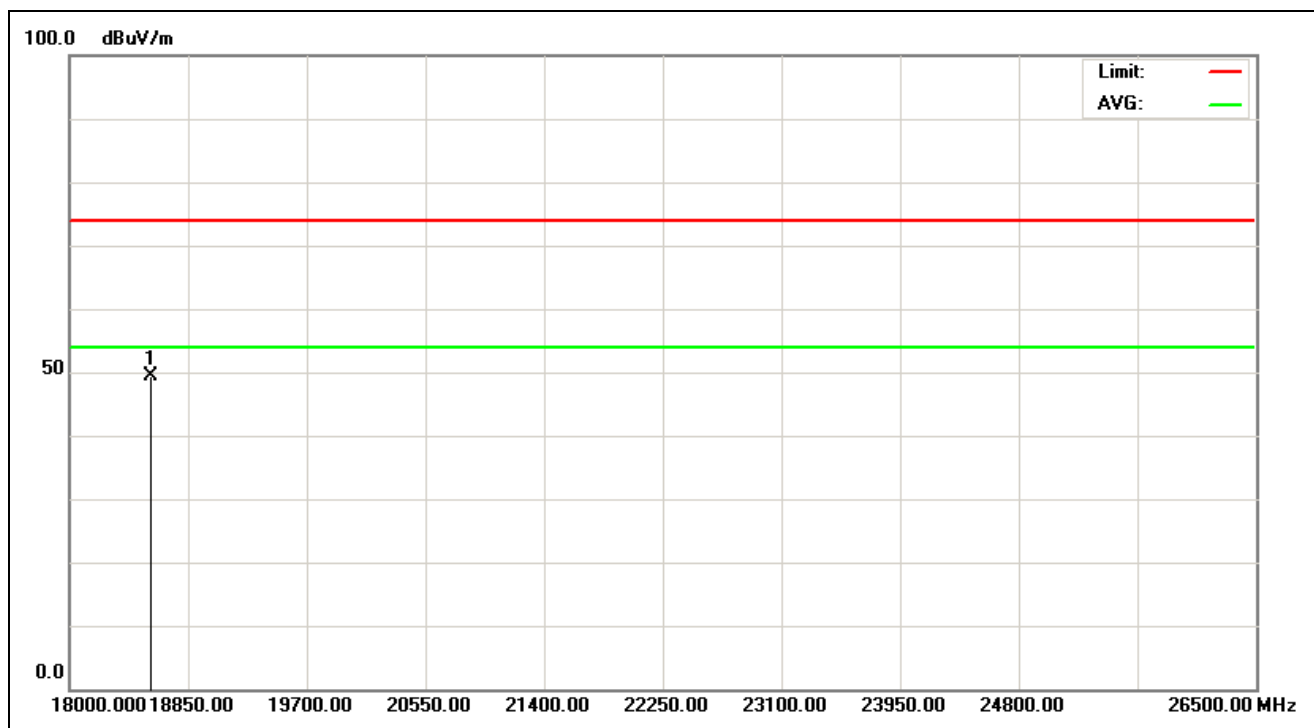


Service No.:	114019974-BT-FCC	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2014/9/9 20:38:03
Applicant:	Trans	Test Rating:	DC 12V
Product:	inCar Bluetooth Music Receiver	Temp.(°C)/Hum.(%):	30(°C)/48%
Model No.:	BTR-5300	Test Engineer:	Freeman Wang
Test Mode:	2441MHz_3DH5_TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	18585.737	28.70	20.80	49.50	74.00	-24.50	peak			

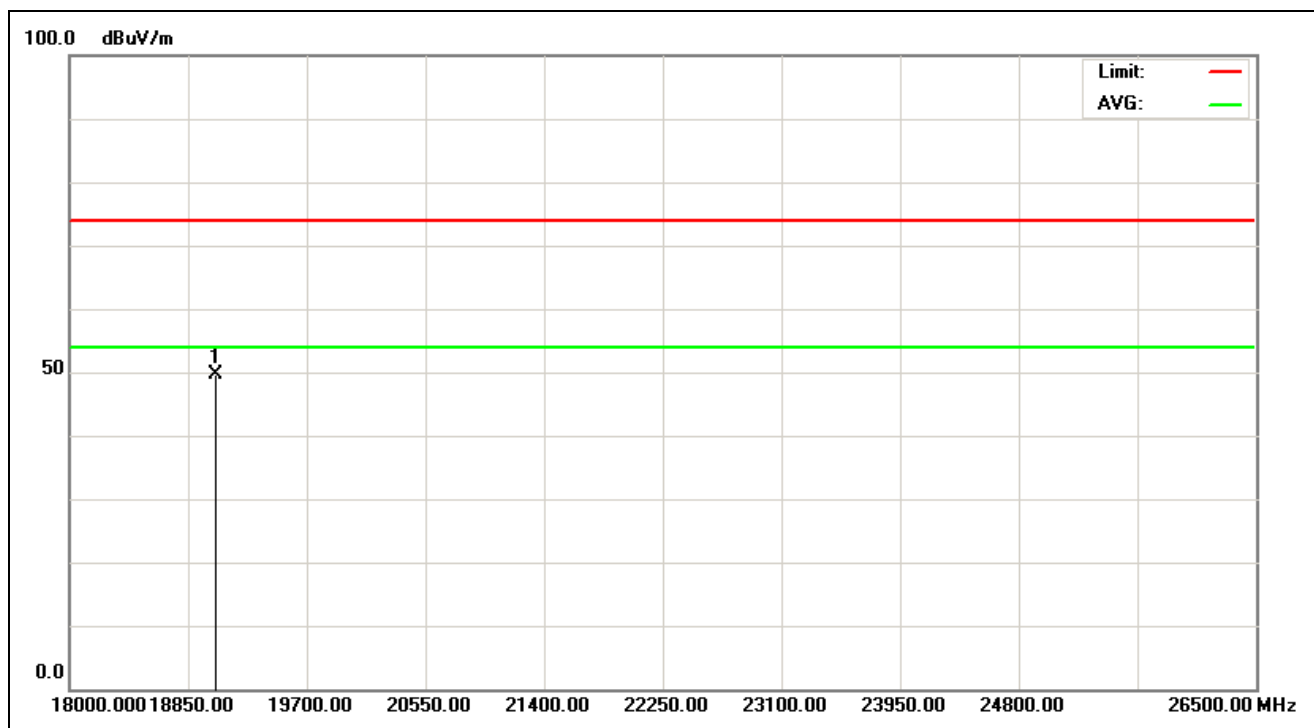


Service No.:	114019974-BT-FCC	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2014/9/9 20:38:18
Applicant:	Trans	Test Rating:	DC 12V
Product:	inCar Bluetooth Music Receiver	Temp.(°C)/Hum.(%):	30(°C)/48%
Model No.:	BTR-5300	Test Engineer:	Freeman Wang
Test Mode:	2441MHz_3DH5_TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	19048.878	29.87	19.74	49.61	74.00	-24.39	peak			

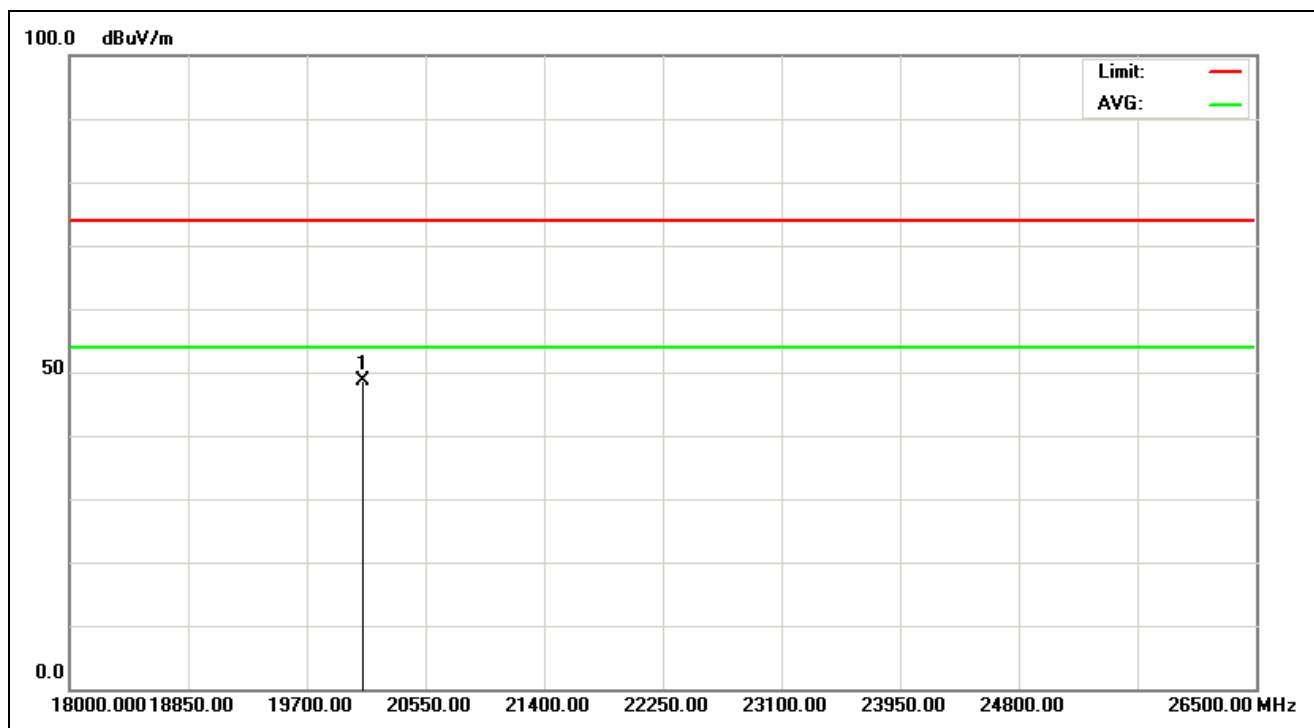


Service No.:	114019974-BT-FCC	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2014/9/9 20:36:56
Applicant:	Trans	Test Rating:	DC 12V
Product:	inCar Bluetooth Music Receiver	Temp.(°C)/Hum.(%)	30(°C)/48%
Model No.:	BTR-5300	Test Engineer:	Freeman Wang
Test Mode:	2480MHz_1DH5_TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	20097.756	29.37	19.26	48.63	74.00	-25.37	peak			

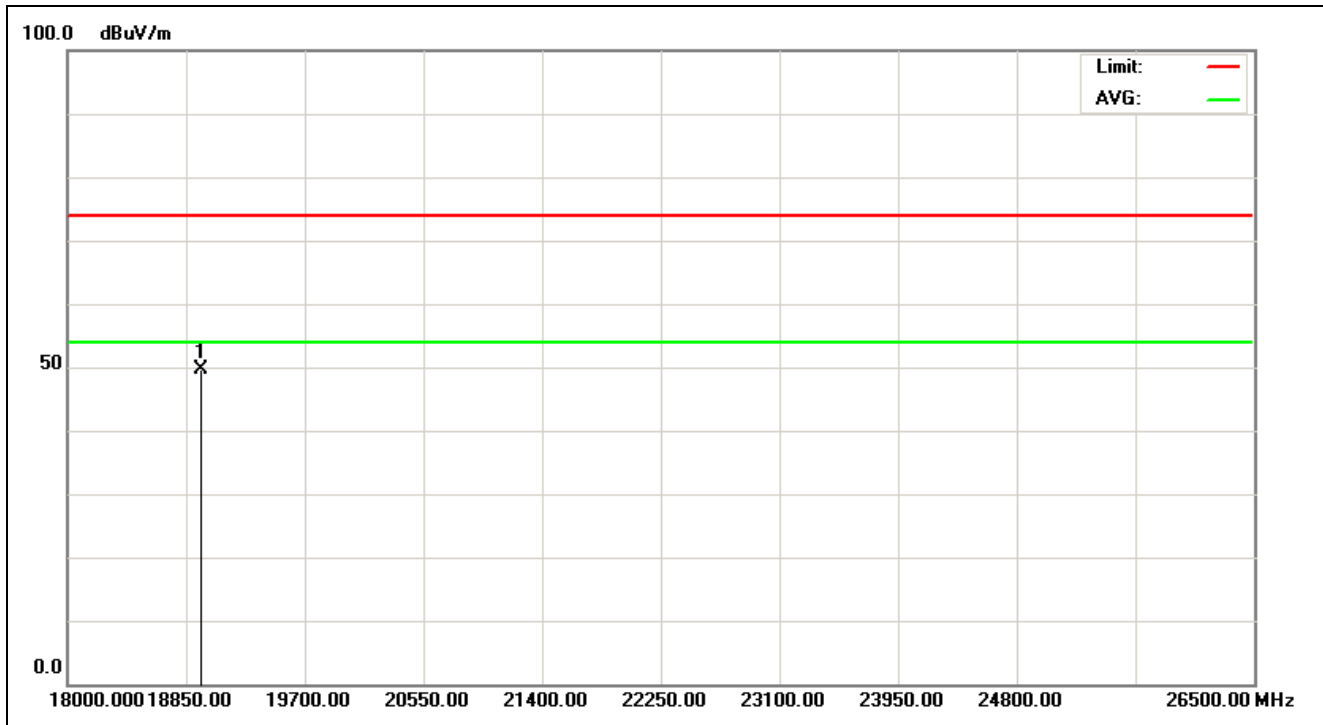


Service No.:	114019974-BT-FCC	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2014/9/9 20:37:10
Applicant:	Trans	Test Rating:	DC 12V
Product:	inCar Bluetooth Music Receiver	Temp.(°C)/Hum.(%)	30(°C)/48%
Model No.:	BTR-5300	Test Engineer:	Freeman Wang
Test Mode:	2480MHz_1DH5_TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	18953.526	29.84	19.71	49.55	74.00	-24.45	peak			

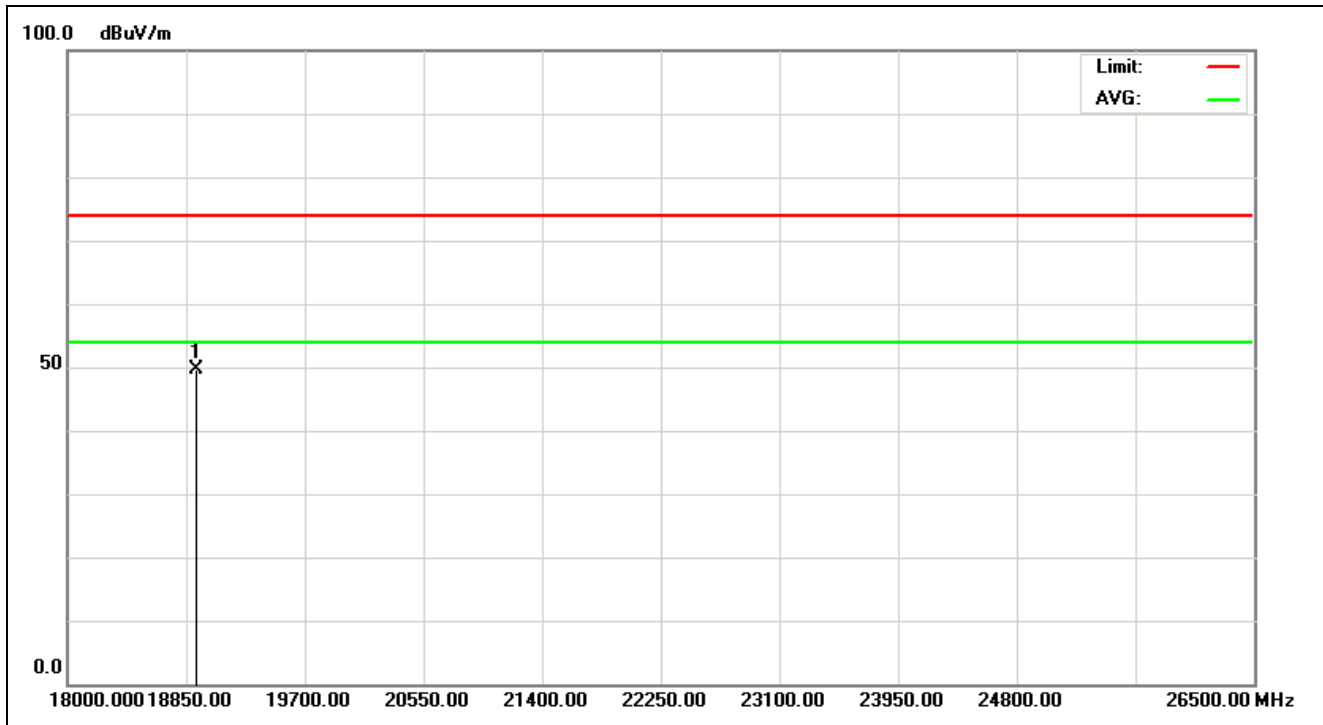

Service No.:	114019974-BT-FCC	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2014/9/9 20:38:38
Applicant:	Trans	Test Rating:	DC 12V
Product:	inCar Bluetooth Music Receiver	Temp.(°C)/Hum.(%)	30(°C)/48%
Model No.:	BTR-5300	Test Engineer:	Freeman Wang
Test Mode:	2480MHz_3DH5_TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	18926.282	29.75	19.85	49.60	74.00	-24.40	peak			

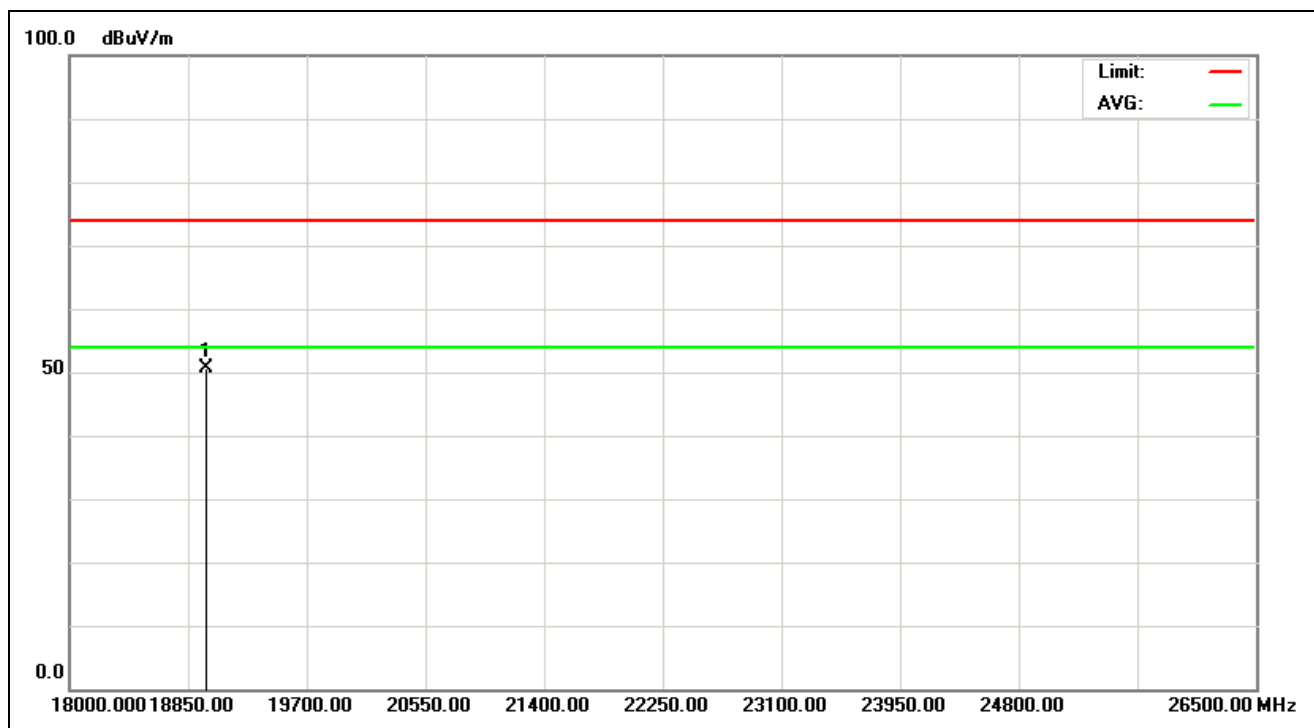

Service No.:	114019974-BT-FCC	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2014/9/9 20:38:53
Applicant:	Trans	Test Rating:	DC 12V
Product:	inCar Bluetooth Music Receiver	Temp.(°C)/Hum.(%):	30(°C)/48%
Model No.:	BTR-5300	Test Engineer:	Freeman Wang
Test Mode:	2480MHz_3DH5_TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	18980.769	29.93	20.62	50.55	74.00	-23.45	peak			


Spurious Emissions, TX Mode, 30M-1G



TUV Rheinland Taiwan


11F.,No.758,Sec. 4,Bade Rd.,Songshan Dist.,Taipei 105,Taiwan

Tel:+886-2-2172-7000 Fax:+886-2-2528-0018

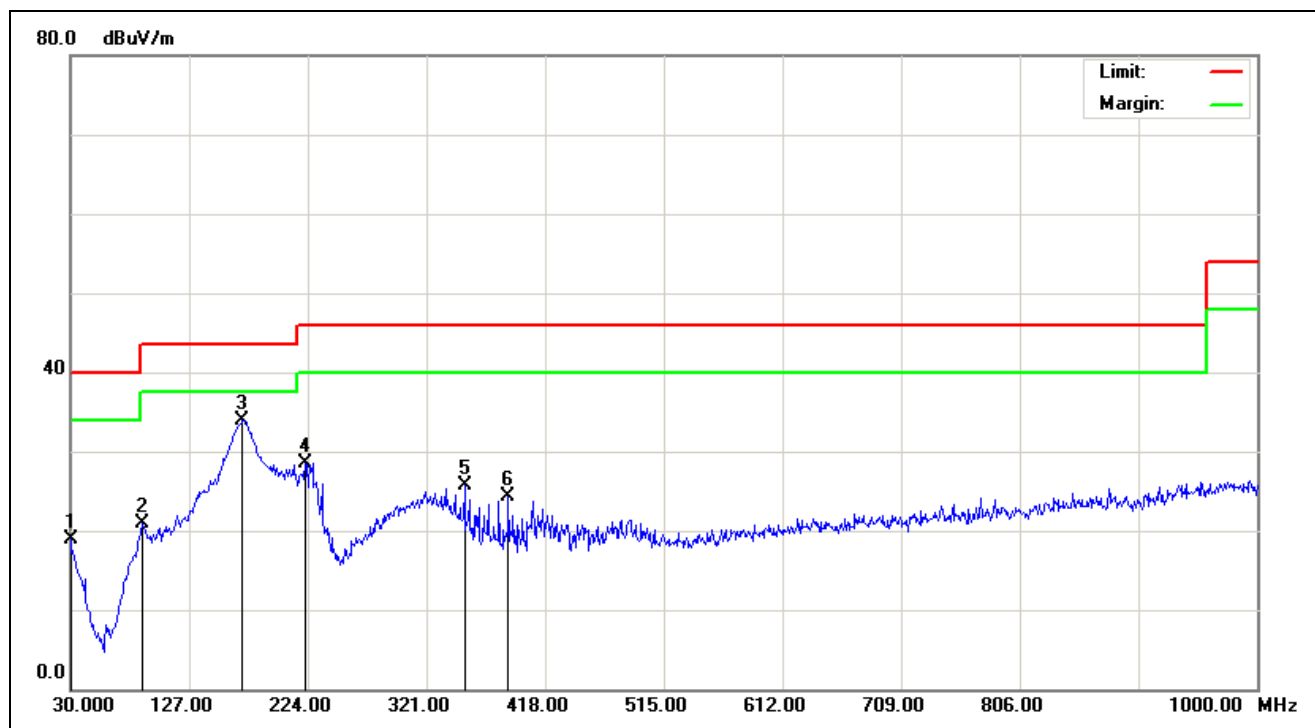

Service No.:	114019974-BT-FCC	Test Distance:	3m
Test Standard:	FCC Class B 3M Radiation	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2014/9/9 20:54:45
Applicant:	Trans	Test Rating:	DC 12V
Product:	inCar Bluetooth Music Receiver	Temp.(°C)/Hum.(%)	30(°C)/48%
Model No.:	BTR-5300	Test Engineer:	Freeman Wang
Test Mode:	2441MHz_1DH5_TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	30.0000	-7.35	26.32	18.97	40.00	-21.03	QP	100	61	
2	88.2000	-18.28	39.13	20.85	43.50	-22.65	QP	100	290	
3	170.6500	-16.41	50.39	33.98	43.50	-9.52	QP	100	245	
4	222.0600	-15.62	44.16	28.54	46.00	-17.46	QP	100	237	
5	352.0400	-10.80	36.43	25.63	46.00	-20.37	QP	100	112	
6	387.9300	-10.25	34.61	24.36	46.00	-21.64	QP	100	122	

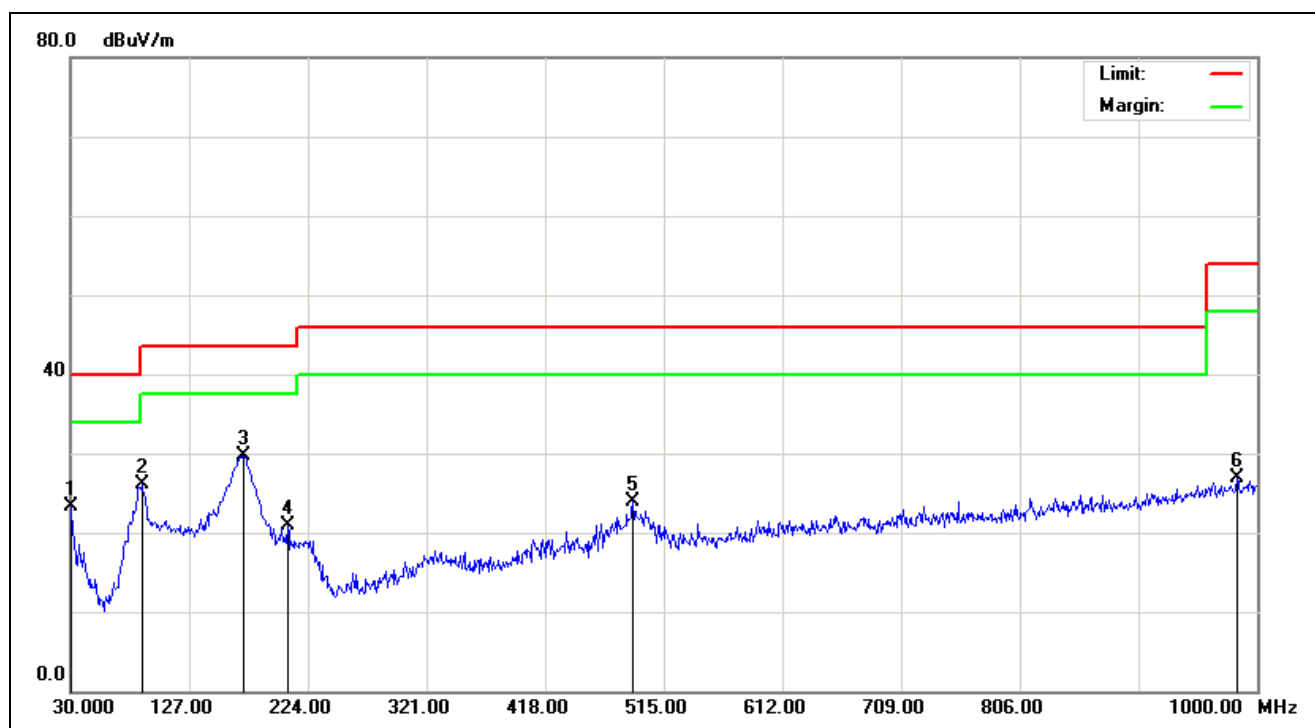

Service No.:	114019974-BT-FCC	Test Distance:	3m
Test Standard:	FCC Class B 3M Radiation	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2014/9/9 20:55:48
Applicant:	Trans	Test Rating:	DC 12V
Product:	inCar Bluetooth Music Receiver	Temp.(°C)/Hum.(%)	30(°C)/48%
Model No.:	BTR-5300	Test Engineer:	Freeman Wang
Test Mode:	2441MHz_1DH5_TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	30.0000	-7.35	30.68	23.33	40.00	-16.67	QP	100	328	
2	88.2000	-18.28	44.32	26.04	43.50	-17.46	QP	100	251	
3	171.6200	-16.50	46.27	29.77	43.50	-13.73	QP	100	64	
4	207.5100	-16.08	37.02	20.94	43.50	-22.56	QP	100	256	
5	489.7800	-8.69	32.62	23.93	46.00	-22.07	QP	100	238	
6	983.5100	-0.98	27.80	26.82	54.00	-27.18	QP	100	105	