

TOSHIBA FCC ID:CJ6DCE46036A-- CDMA 800 Body SAR

SAM Phantom; Flat Section; Probe:ET3DV6 - SN1560; ConvF(6.52,6.52,6.52)

Med. Parameters 835 MHz Muscle: $\sigma = 0.93$ mho/m $\epsilon_r = 56.9$ $\rho = 1.00$ g/cm³; Antenna Position -- In; Crest Factor 1.0


SAR (1g): 0.151 mW/g, SAR (10g): 0.107 mW/g

Toshiba TriMode Phone Model: CDM-9500

Cellular CDMA Mode, Ch.0383 [836.49MHz]; Standard Battery; Flip = closed; Ambient Temp. = 22.4°C / Meas. Tissue Temp. = 22.2°C

Conducted Power = 24.5dBm; Spacing = 3.0cm from EUT (antenna side) to flat phantom, w/Beltclip

Test Date - 04/26/2002 [FCC/OET Bulletin 65 - Supplement C, July 2001]

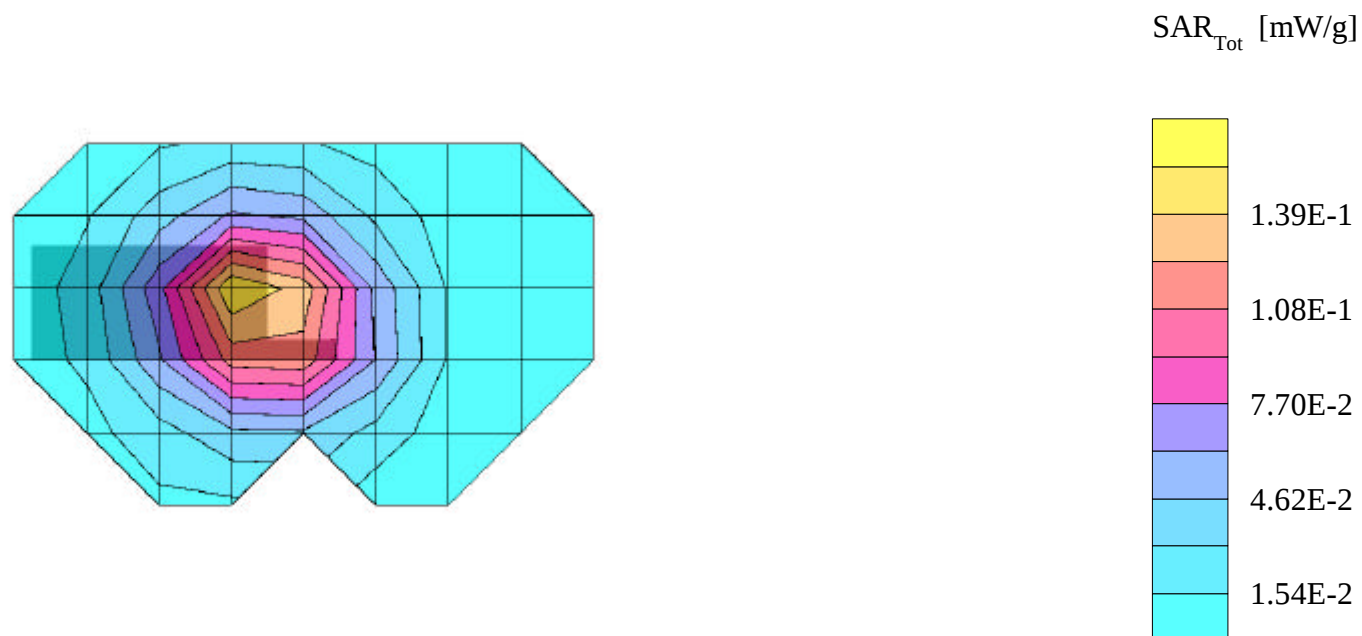

TOSHIBA FCC ID:CJ6DCE46036A CDMA 800 Body SAR

SAM Phantom; Flat Section;

Probe: ET3DV6 - SN1560

Medium Parameters 835 MHz Muscle: $\sigma = 0.93$ mho/m $\epsilon_r = 56.9$ $\rho = 1.00$ g/cm³

Antenna Position -- Out; Crest Factor 1.0


SAR (1g): 0.222 mW/g, SAR (10g): 0.157 mW/g

Toshiba TriMode Phone Model: CDM-9500

Cellular CDMA Mode, Ch.0383 [836.49MHz]; Standard Battery; Flip = closed; Ambient Temp. = 22.4°C / Meas. Tissue Temp. = 22.2°C

Conducted Power = 24.5dBm; Spacing = 3.0cm from EUT (antenna side) to flat phantom, w/Beltclip

Test Date - 04/26/2002 [FCC/OET Bulletin 65 - Supplement C, July 2001]

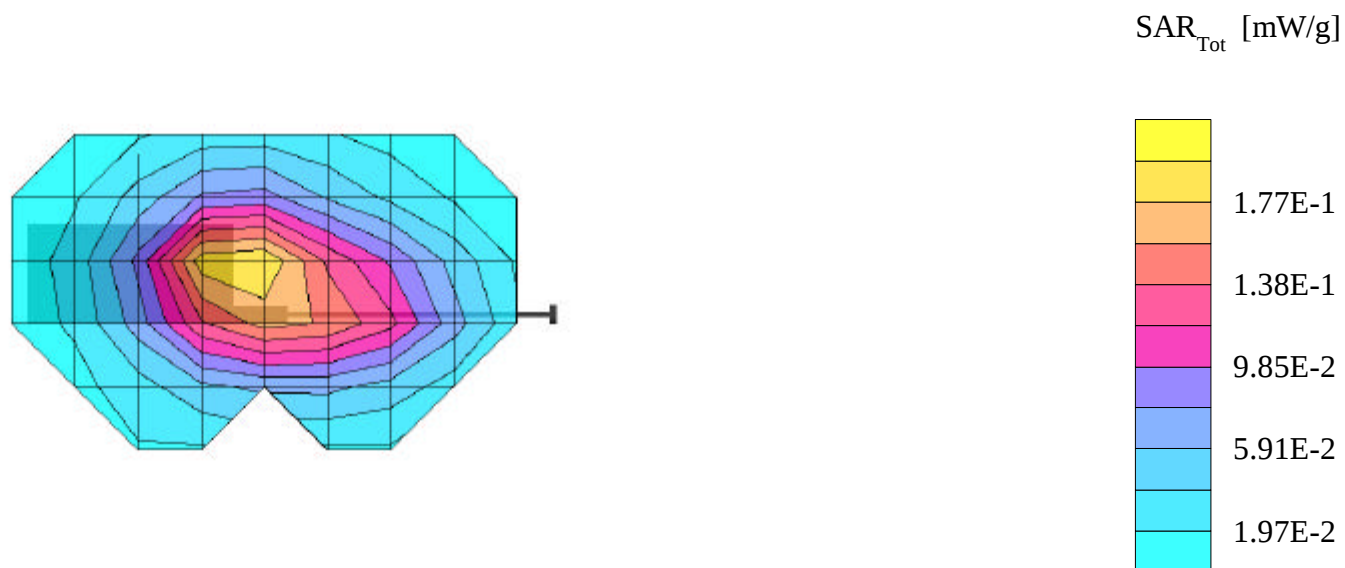

TOSHIBA FCC ID:CJ6DCE46036A CDMA 800 Body SAR

SAM Phantom; Flat Section;

Probe: ET3DV6 - SN1560

Medium Parameters 835 MHz Muscle: $\sigma = 0.93$ mho/m $\epsilon_r = 56.9$ $\rho = 1.00$ g/cm³

Antenna Position -- In; Crest Factor 1.0


SAR (1g): 0.175 mW/g, SAR (10g): 0.120 mW/g

Toshiba TriMode Phone Model: CDM-9500

CDMA Mode, Ch.1013 [824.70MHz]; Standard Battery; Flip = closed; Ambient Temp. = 22.4°C / Meas. Tissue Temp. = 22.2°C

Conducted Power = 24.5dBm; Spacing = 2.2cm from EUT (antenna side) to flat phantom, w/Holster

Test Date - 04/26/2002 [FCC/OET Bulletin 65 - Supplement C, July 2001]

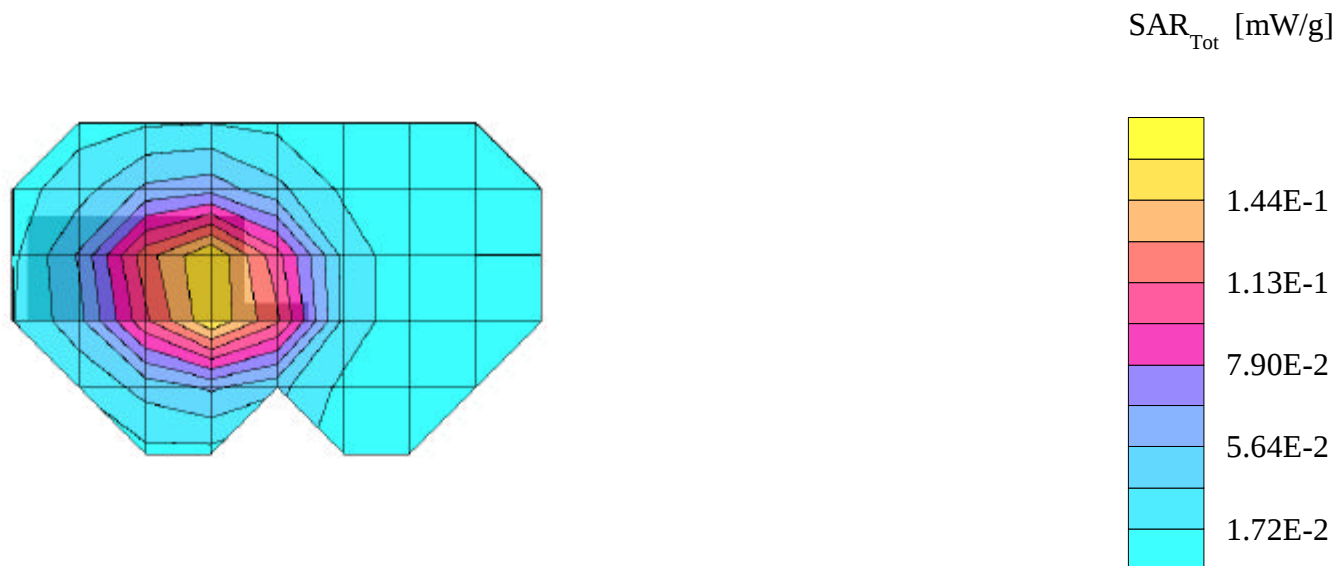

TOSHIBA FCC ID:CJ6DCE46036A--CDMA 800 Body SAR

SAM Phantom; Flat Section; Probe:ET3DV6 - SN1560; ConvF(6.52,6.52,6.52)

Med. Parameters 835 MHz Muscle: $\sigma = 0.93$ mho/m $\epsilon_r = 56.9$ $\rho = 1.00$ g/cm³; Antenna Position -- Out; Crest Factor 1.0

SAR (1g): 0.261 mW/g, SAR (10g): 0.159 mW/g

Toshiba TriMode Phone Model: CDM-9500

CDMA Mode, Ch.1013 [824.70MHz]; Standard Battery; Flip = closed; Ambient Temp. = 22.4°C / Meas. Tissue Temp. = 22.2°C

Conducted Power = 24.5dBm; Spacing = 2.2cm from EUT (antenna side) to flat phantom, w/Holster

Test Date - 04/26/2002 [FCC/OET Bulletin 65 - Supplement C, July 2001]

