

TOSHIBA FCC ID: CJ6DCE46036A -- FM Body SAR

SAM Phantom; Flat Section; Probe:ET3DV6 - SN1677; ConvF(6.40,6.40,6.40)

Med. Parameters 835 MHz Muscle: $\sigma = 0.98$ mho/m $\epsilon_r = 54.6$ $\rho = 1.00$ g/cm³; Antenna Position -- In; Crest Factor 1.0


SAR (1g): 0.312 mW/g, SAR (10g): 0.216 mW/g

Toshiba TriMode Phone Model: CDM-9500

FM Mode, Ch.0991 [824.04MHz]; Standard Battery; Flip = closed; Ambient Temp. = 22.4°C / Meas. Tissue Temp. = 22.3°C

Conducted Power = 27.2dBm; Spacing = 2.2cm from EUT (antenna side) to flat phantom, w/Leather Hoster/Beltclip

Test Date - 07/22/2002 [FCC/OET Bulletin 65 - Supplement C, July 2001]

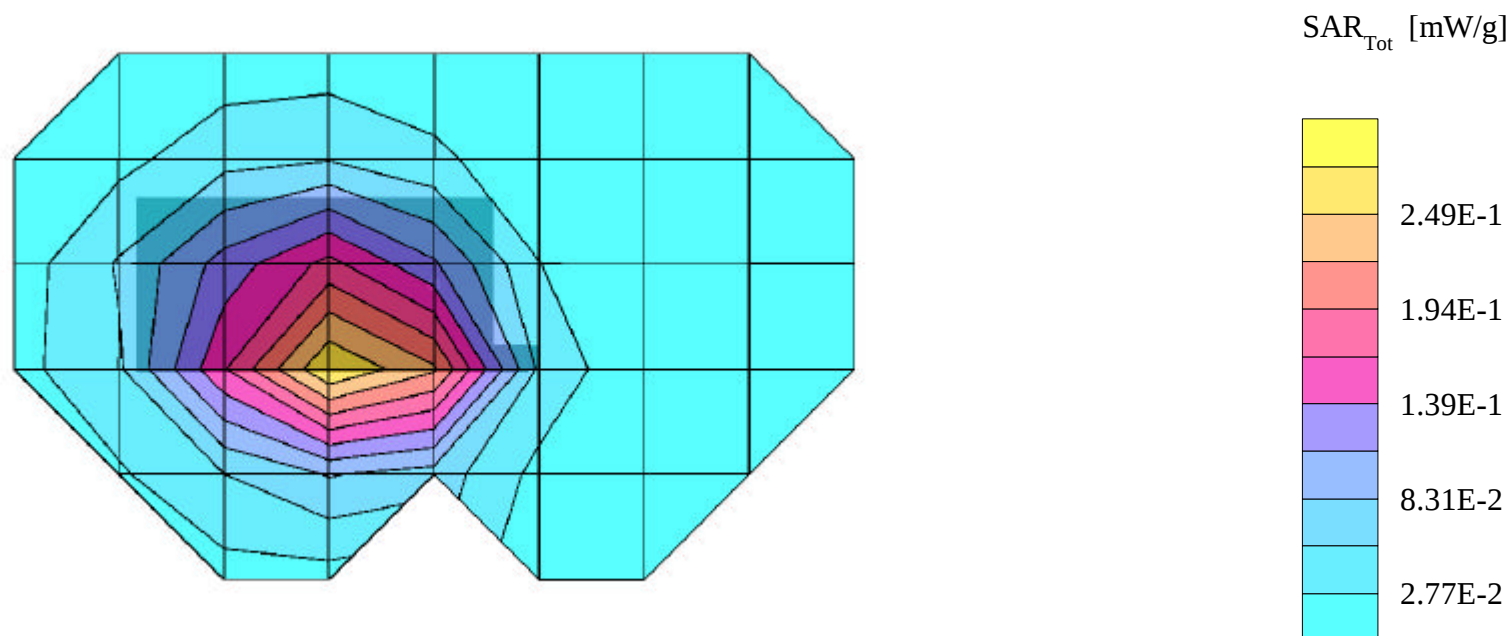

TOSHIBA FCC ID: CJ6DCE46036A -- FM Body SAR

SAM Phantom; Flat Section; Probe:ET3DV6 - SN1677; ConvF(6.40,6.40,6.40)

Med. Parameters 835 MHz Muscle: $\sigma = 0.98$ mho/m $\epsilon_r = 54.6$ $\rho = 1.00$ g/cm³; Antenna Position -- Out; Crest Factor 1.0


SAR (1g): 0.591 mW/g, SAR (10g): 0.398 mW/g

Toshiba TriMode Phone Model: CDM-9500

FM Mode, Ch.0991 [824.04MHz]; Standard Battery; Flip = closed; Ambient Temp. = 22.4°C / Meas. Tissue Temp. = 22.3°C

Conducted Power = 27.2dBm; Spacing = 2.2cm from EUT (antenna side) to flat phantom, w/Leather Hoster/Beltclip

Test Date - 07/22/2002 [FCC/OET Bulletin 65 - Supplement C, July 2001]

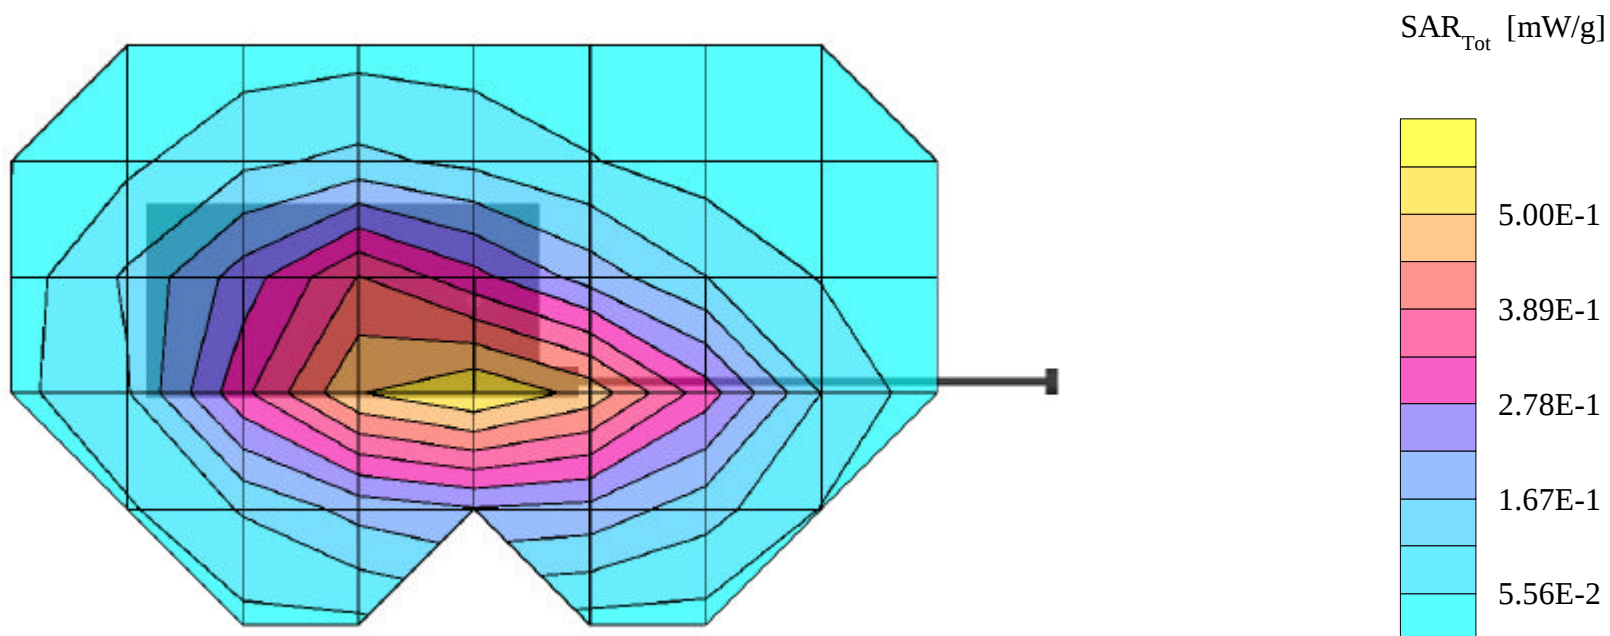

TOSHIBA FCC ID: CJ6DCE46036A -- FM Body SAR

SAM Phantom; Flat Section; Probe:ET3DV6 - SN1677; ConvF(6.40,6.40,6.40)

Med. Parameters 835 MHz Muscle: $\sigma = 0.98$ mho/m $\epsilon_r = 54.6$ $\rho = 1.00$ g/cm³; Antenna Position -- In; Crest Factor 1.0


SAR (1g): 0.396 mW/g, SAR (10g): 0.273 mW/g

Toshiba TriMode Phone Model: CDM-9500

FM Mode, Ch.0383 [836.49MHz]; Standard Battery; Flip = closed; Ambient Temp. = 22.4°C / Meas. Tissue Temp. = 22.3°C

Conducted Power = 27.2dBm; Spacing = 2.2cm from EUT (antenna side) to flat phantom, w/Leather Hoster/Beltclip

Test Date - 07/22/2002 [FCC/OET Bulletin 65 - Supplement C, July 2001]

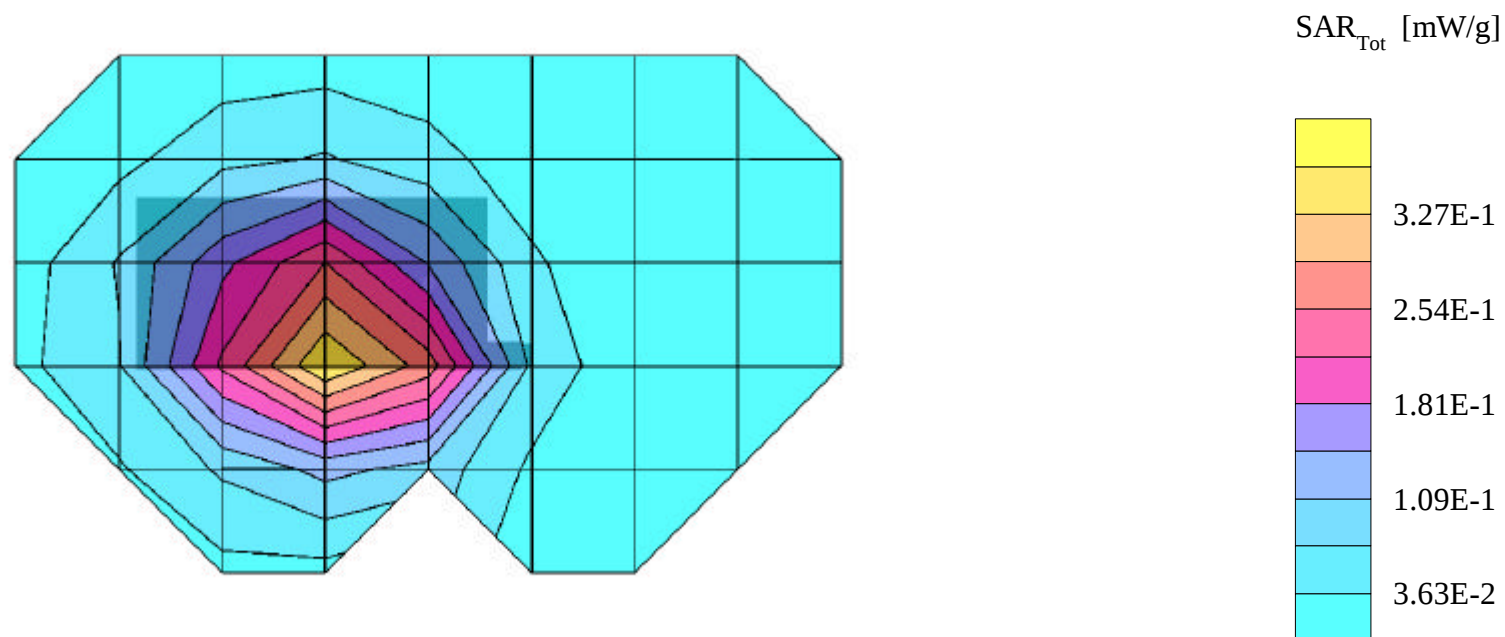

TOSHIBA FCC ID: CJ6DCE46036A -- FM Body SAR

SAM Phantom; Flat Section; Probe:ET3DV6 - SN1677; ConvF(6.40,6.40,6.40)

Med. Parameters 835 MHz Muscle: $\sigma = 0.98$ mho/m $\epsilon_r = 54.6$ $\rho = 1.00$ g/cm³; Antenna Position -- Out; Crest Factor 1.0


SAR (1g): 0.527 mW/g, SAR (10g): 0.358 mW/g

Toshiba TriMode Phone Model: CDM-9500

FM Mode, Ch.0383 [836.49MHz]; Standard Battery; Flip = closed; Ambient Temp. = 22.4°C / Meas. Tissue Temp. = 22.3°C

Conducted Power = 27.2dBm; Spacing = 2.2cm from EUT (antenna side) to flat phantom, w/Leather Hoster/Beltclip

Test Date - 07/22/2002 [FCC/OET Bulletin 65 - Supplement C, July 2001]

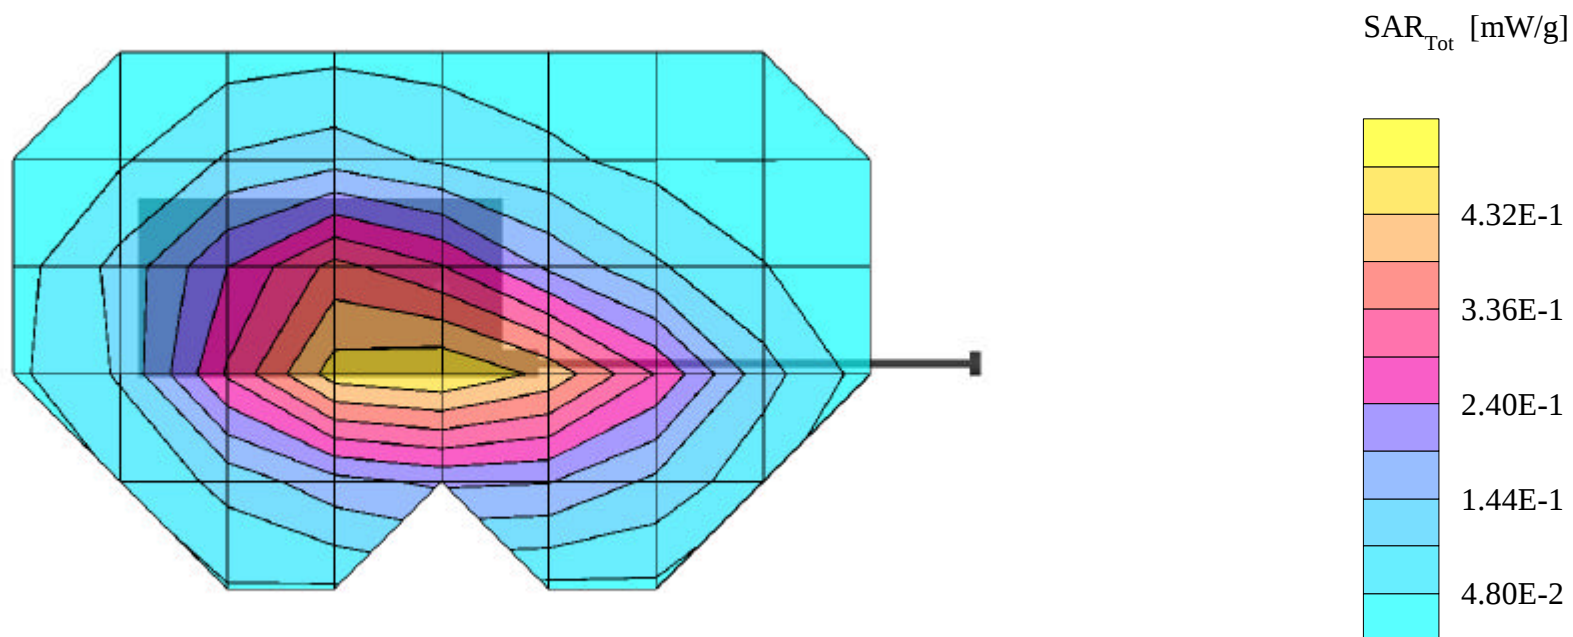

TOSHIBA FCC ID: CJ6DCE46036A -- FM Body SAR

SAM Phantom; Flat Section; Probe:ET3DV6 - SN1677; ConvF(6.40,6.40,6.40)

Med. Parameters 835 MHz Muscle: $\sigma = 0.98$ mho/m $\epsilon_r = 54.6$ $\rho = 1.00$ g/cm³; Antenna Position -- In; Crest Factor 1.0


SAR (1g): 0.354 mW/g, SAR (10g): 0.244 mW/g

Toshiba TriMode Phone Model: CDM-9500

FM Mode, Ch.0799 [848.97MHz]; Standard Battery; Flip = closed; Ambient Temp. = 22.4°C / Meas. Tissue Temp. = 22.3°C

Conducted Power = 27.2dBm; Spacing = 2.2cm from EUT (antenna side) to flat phantom, w/Leather Hoster/Beltclip

Test Date - 07/22/2002 [FCC/OET Bulletin 65 - Supplement C, July 2001]

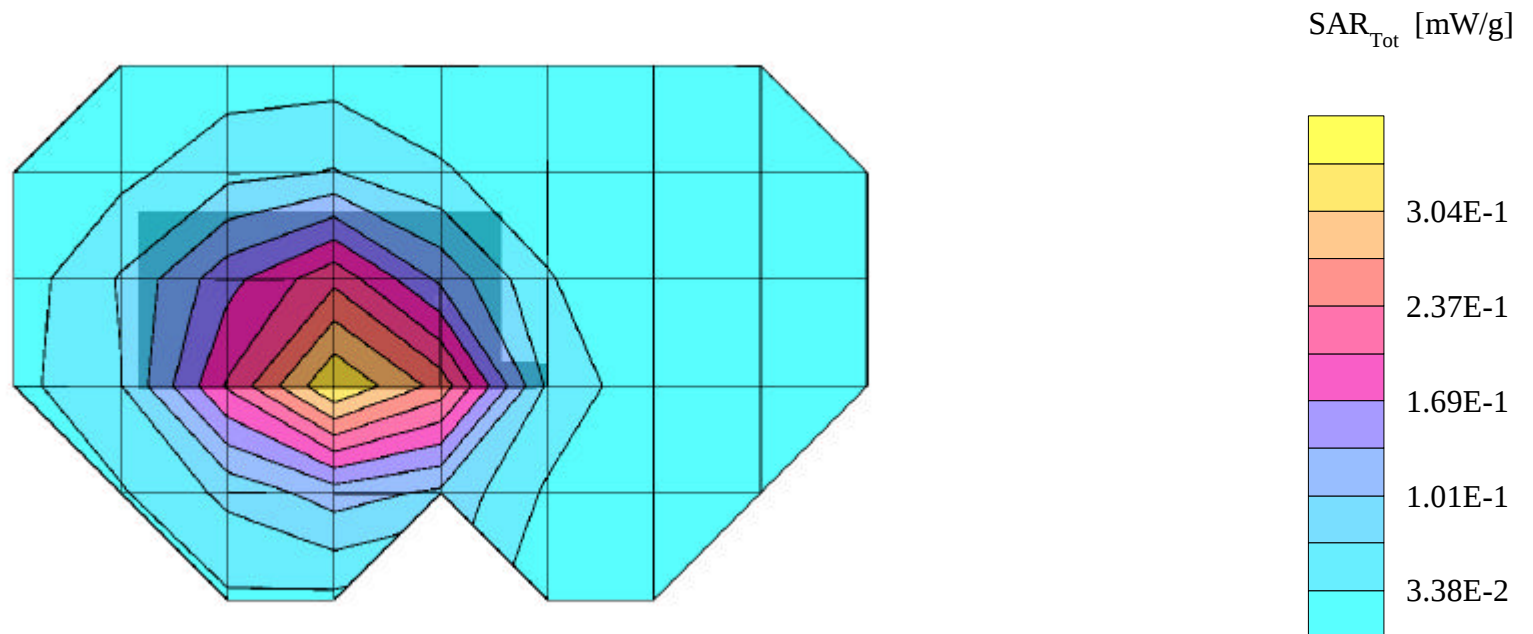

TOSHIBA FCC ID: CJ6DCE46036A -- FM Body SAR

SAM Phantom; Flat Section; Probe:ET3DV6 - SN1677; ConvF(6.40,6.40,6.40)

Med. Parameters 835 MHz Muscle: $\sigma = 0.98$ mho/m $\epsilon_r = 54.6$ $\rho = 1.00$ g/cm³; Antenna Position -- Out; Crest Factor 1.0


SAR (1g): 0.510 mW/g, SAR (10g): 0.340 mW/g

Toshiba TriMode Phone Model: CDM-9500

FM Mode, Ch.0799 [848.97MHz]; Standard Battery; Flip = closed; Ambient Temp. = 22.4°C / Meas. Tissue Temp. = 22.3°C

Conducted Power = 27.2dBm; Spacing = 2.2cm from EUT (antenna side) to flat phantom, w/Leather Hoster/Beltclip

Test Date - 07/22/2002 [FCC/OET Bulletin 65 - Supplement C, July 2001]

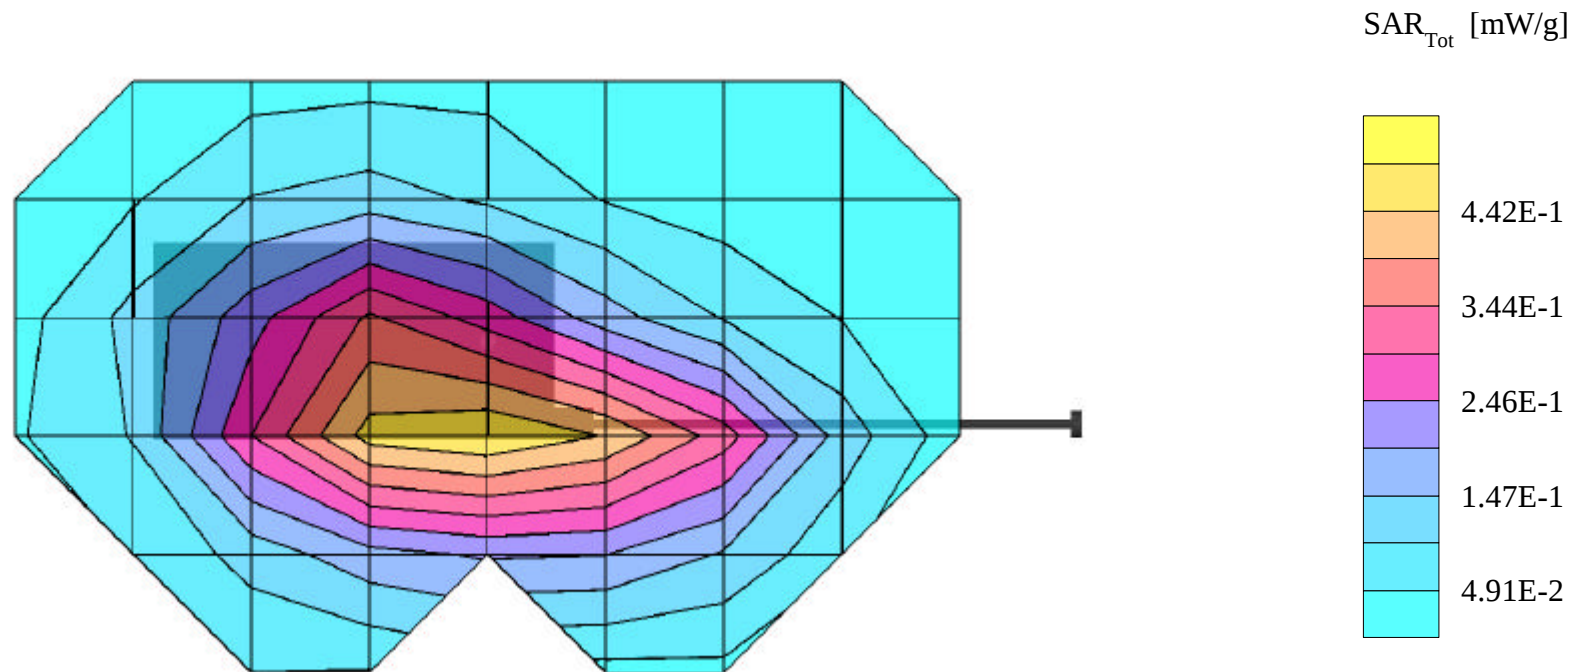

TOSHIBA FCC ID: CJ6DCE46036A -- FM Body SAR

SAM Phantom; Flat Section; Probe:ET3DV6 - SN1677; ConvF(6.40,6.40,6.40)

Med. Parameters 835 MHz Muscle: $\sigma = 0.98$ mho/m $\epsilon_r = 54.6$ $\rho = 1.00$ g/cm³; Antenna Position -- In; Crest Factor 1.0


SAR (1g): 0.270 mW/g, SAR (10g): 0.189 mW/g

Toshiba TriMode Phone Model: CDM-9500

FM Mode, Ch.0991 [824.04MHz]; Extended Battery; Flip = closed; Ambient Temp. = 22.4°C / Meas. Tissue Temp. = 22.3°C

Conducted Power = 27.2dBm; Spacing = 2.2cm from EUT (antenna side) to flat phantom, w/Leather Hoster/Beltclip

Test Date - 07/22/2002 [FCC/OET Bulletin 65 - Supplement C, July 2001]

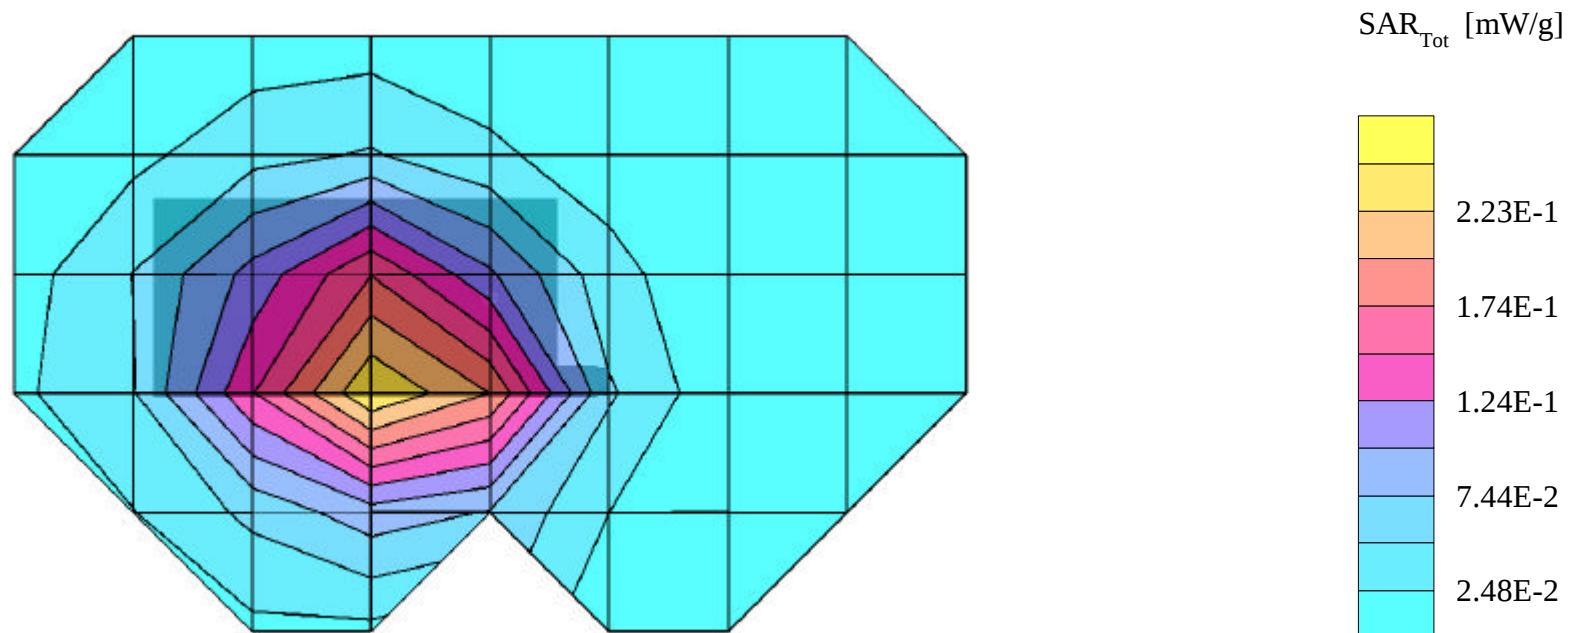

TOSHIBA FCC ID: CJ6DCE46036A -- FM Body SAR

SAM Phantom; Flat Section; Probe:ET3DV6 - SN1677; ConvF(6.40,6.40,6.40)

Med. Parameters 835 MHz Muscle: $\sigma = 0.98$ mho/m $\epsilon_r = 54.6$ $\rho = 1.00$ g/cm³; Antenna Position -- Out; Crest Factor 1.0


SAR (1g): 0.495 mW/g, SAR (10g): 0.337 mW/g

Toshiba TriMode Phone Model: CDM-9500

FM Mode, Ch.0991 [824.04MHz]; Extended Battery; Flip = closed; Ambient Temp. = 22.4°C / Meas. Tissue Temp. = 22.3°C

Conducted Power = 27.2dBm; Spacing = 2.2cm from EUT (antenna side) to flat phantom, w/Leather Hoster/Beltclip

Test Date - 07/22/2002 [FCC/OET Bulletin 65 - Supplement C, July 2001]

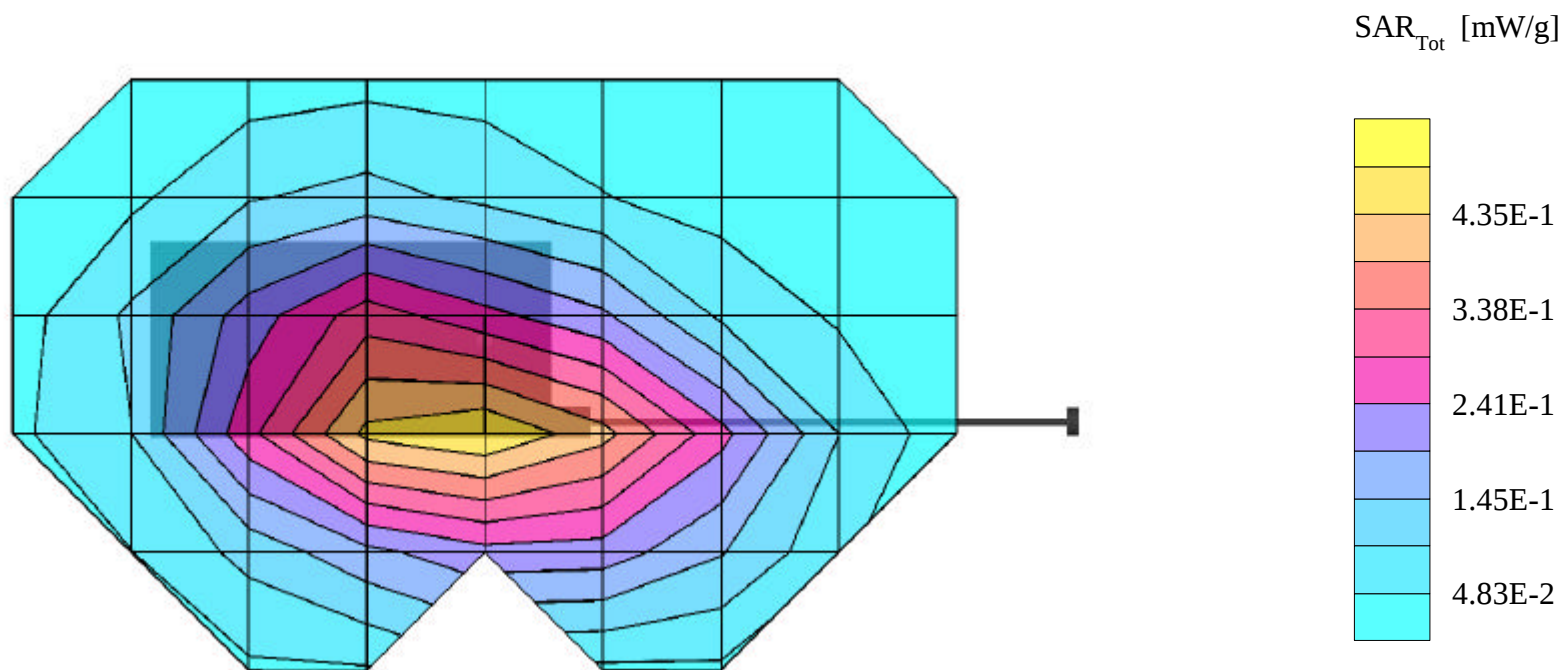

TOSHIBA FCC ID: CJ6DCE46036A -- FM Body SAR

SAM Phantom; Flat Section; Probe:ET3DV6 - SN1677; ConvF(6.40,6.40,6.40)

Med. Parameters 835 MHz Muscle: $\sigma = 0.98$ mho/m $\epsilon_r = 54.6$ $\rho = 1.00$ g/cm³; Antenna Position -- In; Crest Factor 1.0


SAR (1g): 0.211 mW/g, SAR (10g): 0.150 mW/g

Toshiba TriMode Phone Model: CDM-9500

FM Mode, Ch.0991 [824.04MHz]; Standard Battery; Flip = closed; Ambient Temp. = 22.4°C / Meas. Tissue Temp. = 22.3°C

Conducted Power = 27.2dBm; Spacing = 3.0cm from EUT (antenna side) to flat phantom, w/Plastic Hoster/Beltclip

Test Date - 07/22/2002 [FCC/OET Bulletin 65 - Supplement C, July 2001]

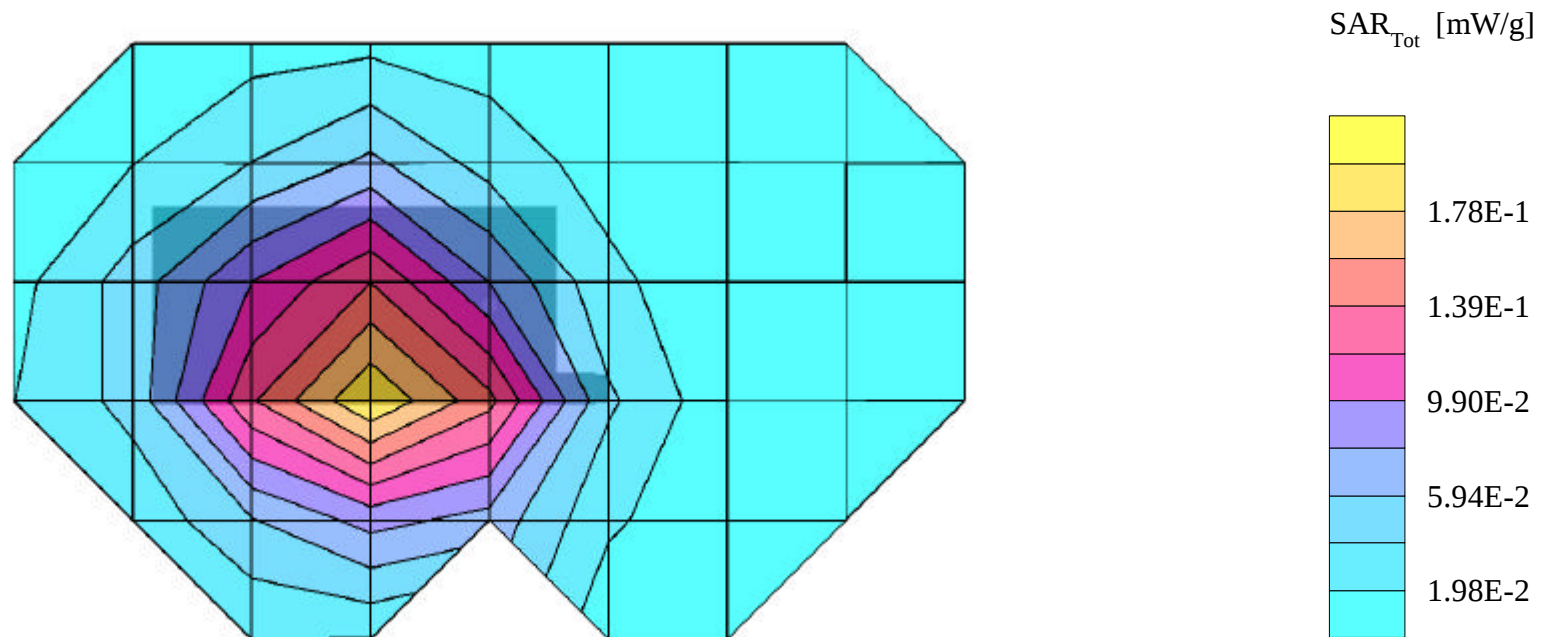

TOSHIBA FCC ID: CJ6DCE46036A -- FM Body SAR

SAM Phantom; Flat Section; Probe:ET3DV6 - SN1677; ConvF(6.40,6.40,6.40)

Med. Parameters 835 MHz Muscle: $\sigma = 0.98$ mho/m $\epsilon_r = 54.6$ $\rho = 1.00$ g/cm³; Antenna Position -- Out; Crest Factor 1.0


SAR (1g): 0.408 mW/g, SAR (10g): 0.293 mW/g

Toshiba TriMode Phone Model: CDM-9500

FM Mode, Ch.0991 [824.04MHz]; Standard Battery; Flip = closed; Ambient Temp. = 22.4°C / Meas. Tissue Temp. = 22.3°C

Conducted Power = 27.2dBm; Spacing =3.0cm from EUT (antenna side) to flat phantom, w/Plastic Hoster/Beltclip

Test Date - 07/22/2002 [FCC/OET Bulletin 65 - Supplement C, July 2001]

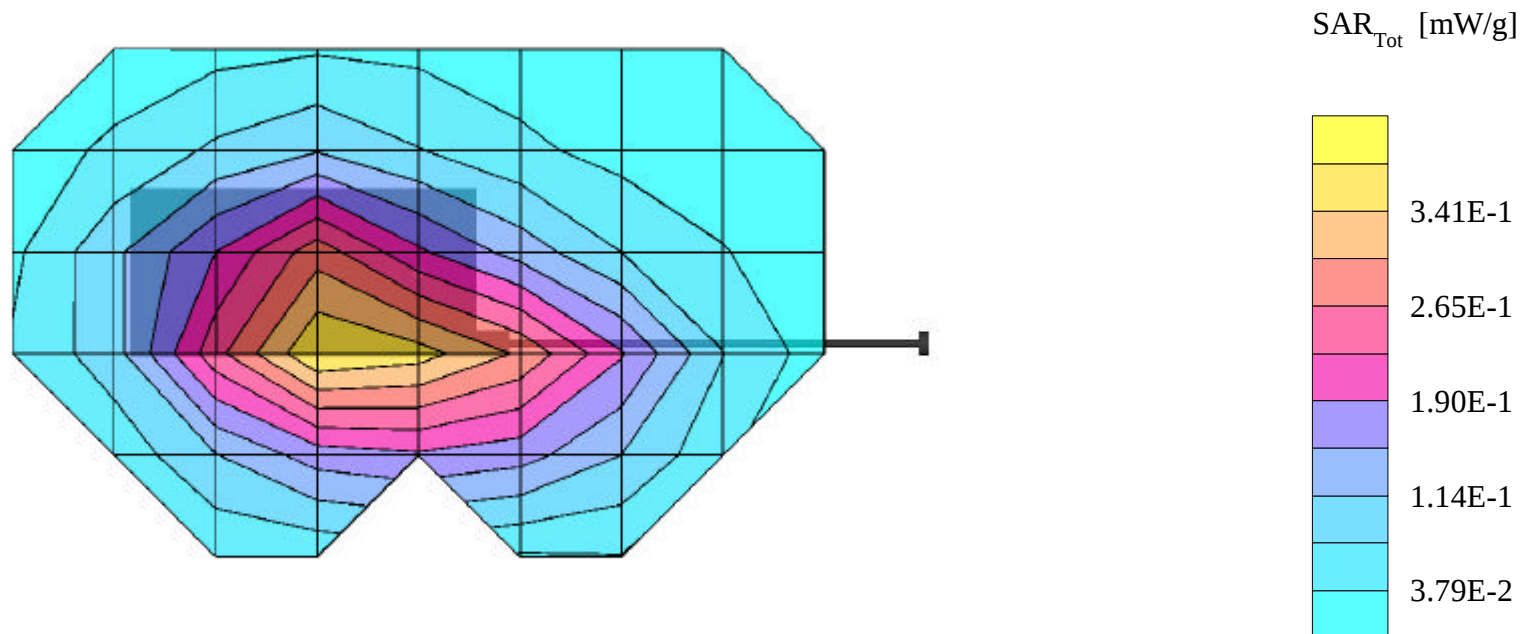

TOSHIBA FCC ID: CJ6DCE46036A -- FM Body SAR

SAM Phantom; Flat Section; Probe:ET3DV6 - SN1677; ConvF(6.40,6.40,6.40)

Med. Parameters 835 MHz Muscle: $\sigma = 0.98$ mho/m $\epsilon_r = 54.6$ $\rho = 1.00$ g/cm³; Antenna Position -- In; Crest Factor 1.0


SAR (1g): 0.276 mW/g, SAR (10g): 0.192 mW/g

Toshiba TriMode Phone Model: CDM-9500

FM Mode, Ch.0383 [836.49MHz]; Standard Battery; Flip = closed; Ambient Temp. = 22.4°C / Meas. Tissue Temp. = 22.3°C

Conducted Power = 27.2dBm; Spacing = 3.0cm from EUT (antenna side) to flat phantom, w/Plastic Hoster/Beltclip

Test Date - 07/22/2002 [FCC/OET Bulletin 65 - Supplement C, July 2001]

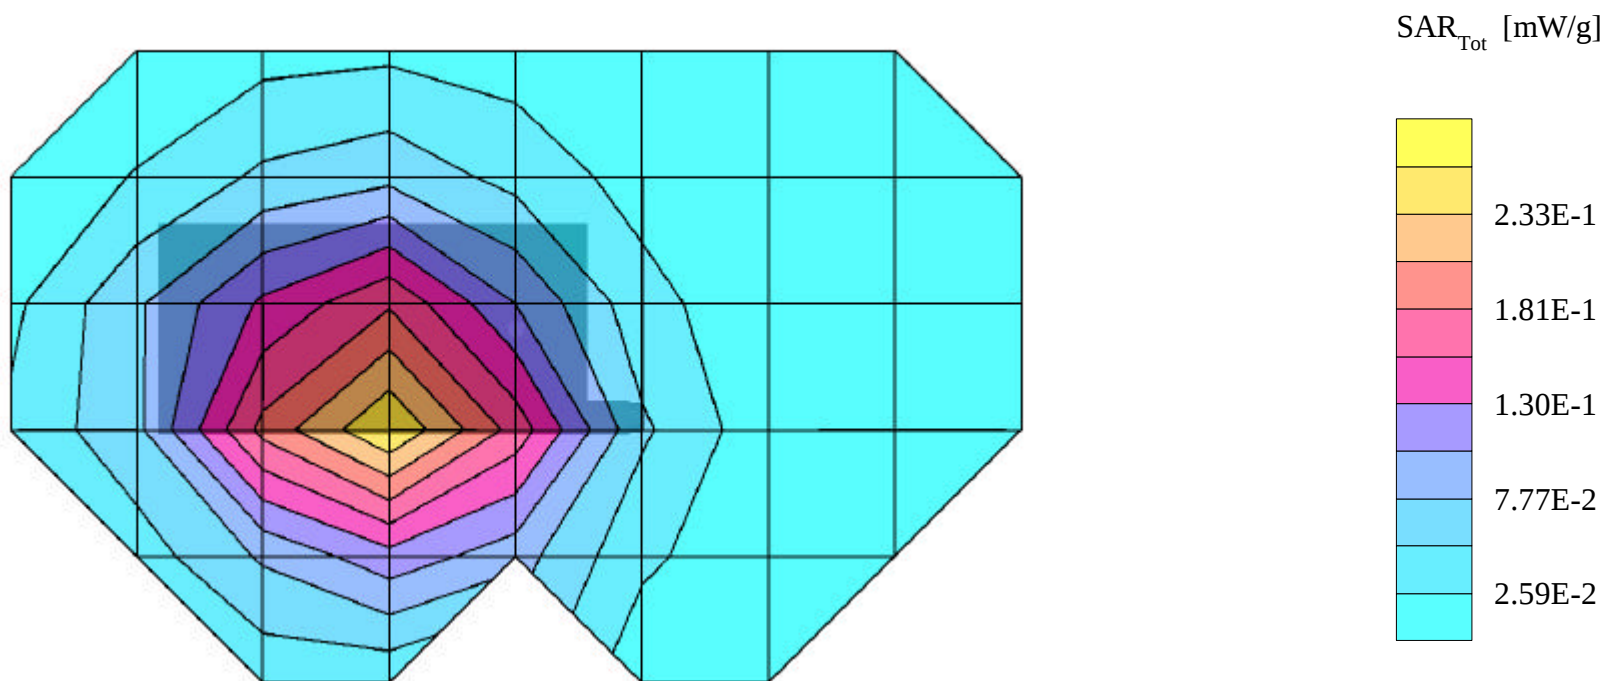

TOSHIBA FCC ID: CJ6DCE46036A -- FM Body SAR

SAM Phantom; Flat Section; Probe:ET3DV6 - SN1677; ConvF(6.40,6.40,6.40)

Med. Parameters 835 MHz Muscle: $\sigma = 0.98$ mho/m $\epsilon_r = 54.6$ $\rho = 1.00$ g/cm³; Antenna Position -- Out; Crest Factor 1.0


SAR (1g): 0.387 mW/g, SAR (10g): 0.275 mW/g

Toshiba TriMode Phone Model: CDM-9500

FM Mode, Ch.0383 [836.49MHz]; Standard Battery; Flip = closed; Ambient Temp. = 22.4°C / Meas. Tissue Temp. = 22.3°C

Conducted Power = 27.2dBm; Spacing =3.0cm from EUT (antenna side) to flat phantom, w/Plastic Hoster/Beltclip

Test Date - 07/22/2002 [FCC/OET Bulletin 65 - Supplement C, July 2001]

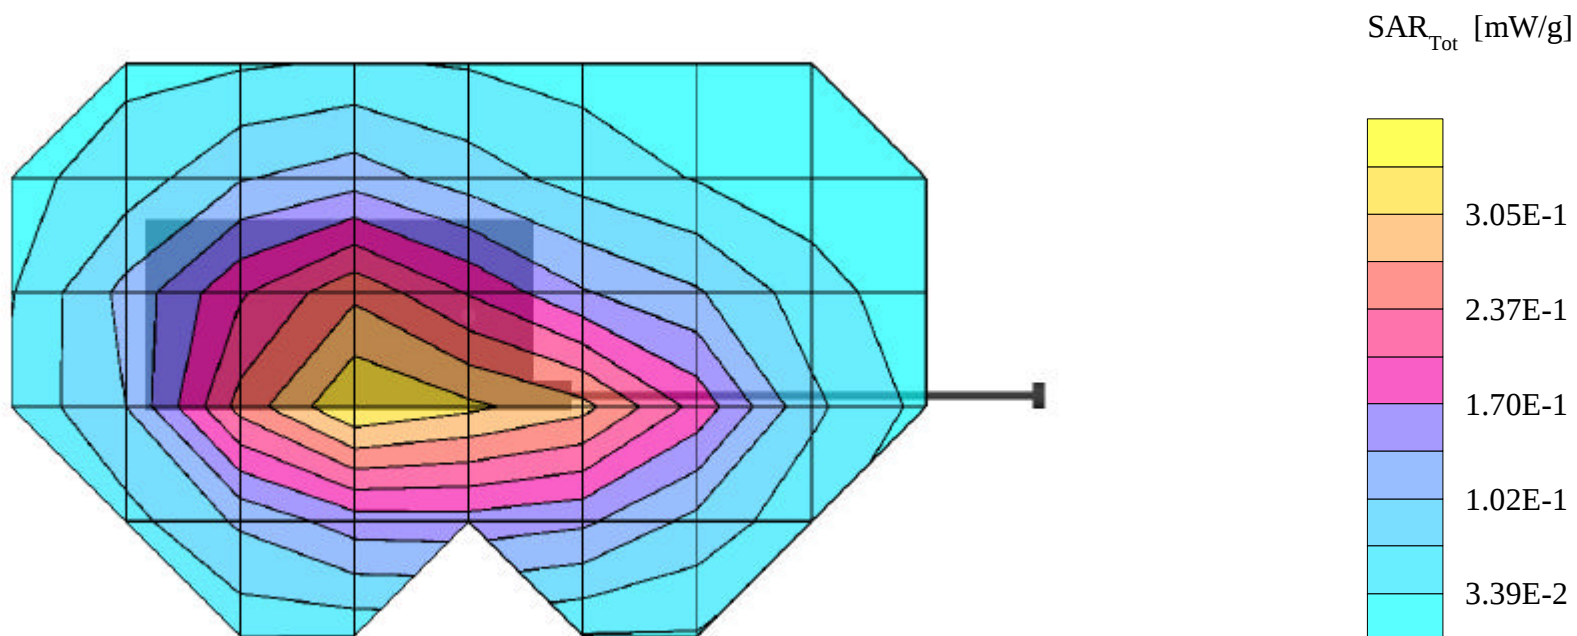

TOSHIBA FCC ID: CJ6DCE46036A -- FM Body SAR

SAM Phantom; Flat Section; Probe:ET3DV6 - SN1677; ConvF(6.40,6.40,6.40)

Med. Parameters 835 MHz Muscle: $\sigma = 0.98$ mho/m $\epsilon_r = 54.6$ $\rho = 1.00$ g/cm³; Antenna Position -- In; Crest Factor 1.0


SAR (1g): 0.243 mW/g, SAR (10g): 0.170 mW/g

Toshiba TriMode Phone Model: CDM-9500

FM Mode, Ch.0799 [848.97MHz]; Standard Battery; Flip = closed; Ambient Temp. = 22.4°C / Meas. Tissue Temp. = 22.3°C

Conducted Power = 27.2dBm; Spacing = 3.0cm from EUT (antenna side) to flat phantom, w/Plastic Hoster/Beltclip

Test Date - 07/22/2002 [FCC/OET Bulletin 65 - Supplement C, July 2001]

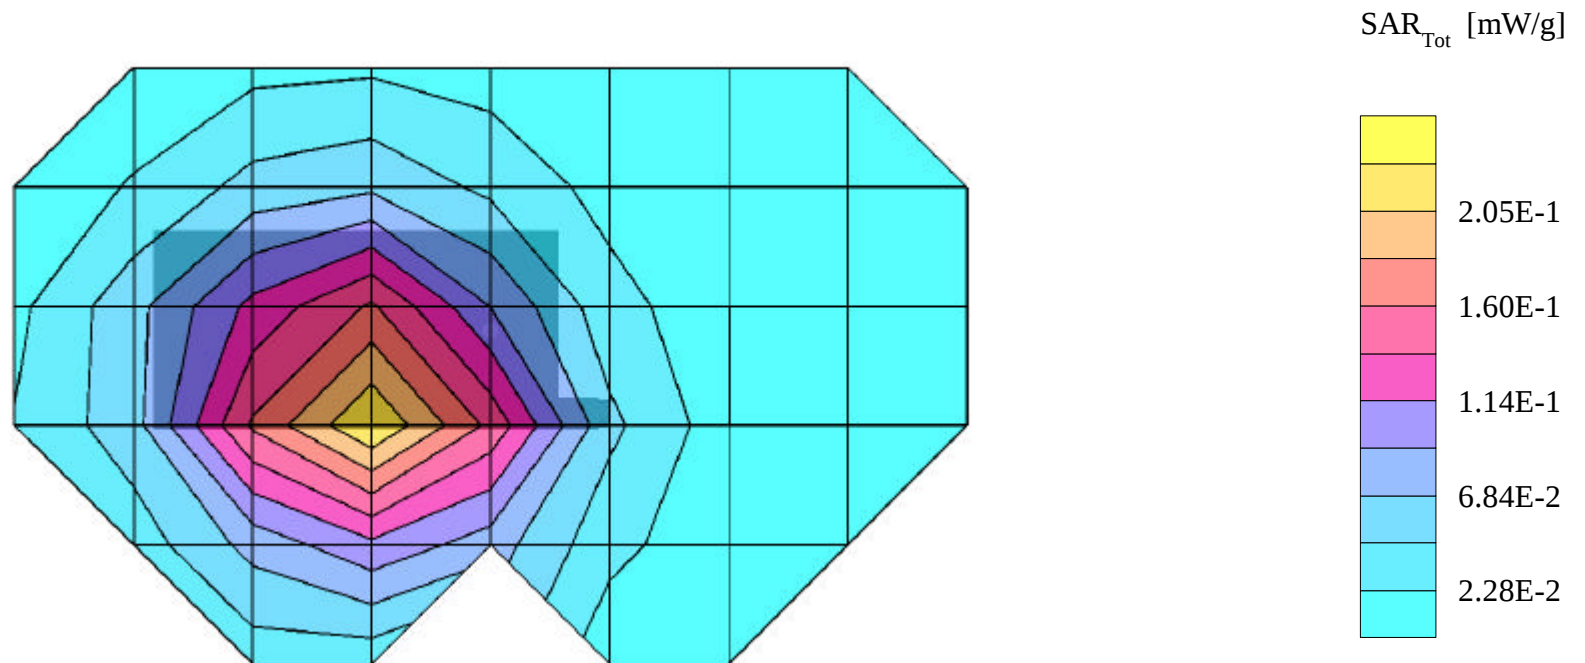

TOSHIBA FCC ID: CJ6DCE46036A -- FM Body SAR

SAM Phantom; Flat Section; Probe:ET3DV6 - SN1677; ConvF(6.40,6.40,6.40)

Med. Parameters 835 MHz Muscle: $\sigma = 0.98$ mho/m $\epsilon_r = 54.6$ $\rho = 1.00$ g/cm³; Antenna Position -- Out; Crest Factor 1.0


SAR (1g): 0.348 mW/g, SAR (10g): 0.243 mW/g

Toshiba TriMode Phone Model: CDM-9500

FM Mode, Ch.0799 [848.97MHz]; Standard Battery; Flip = closed; Ambient Temp. = 22.4°C / Meas. Tissue Temp. = 22.3°C

Conducted Power = 27.2dBm; Spacing = 3.0cm from EUT (antenna side) to flat phantom, w/Plastic Hoster/Beltclip

Test Date - 07/22/2002 [FCC/OET Bulletin 65 - Supplement C, July 2001]

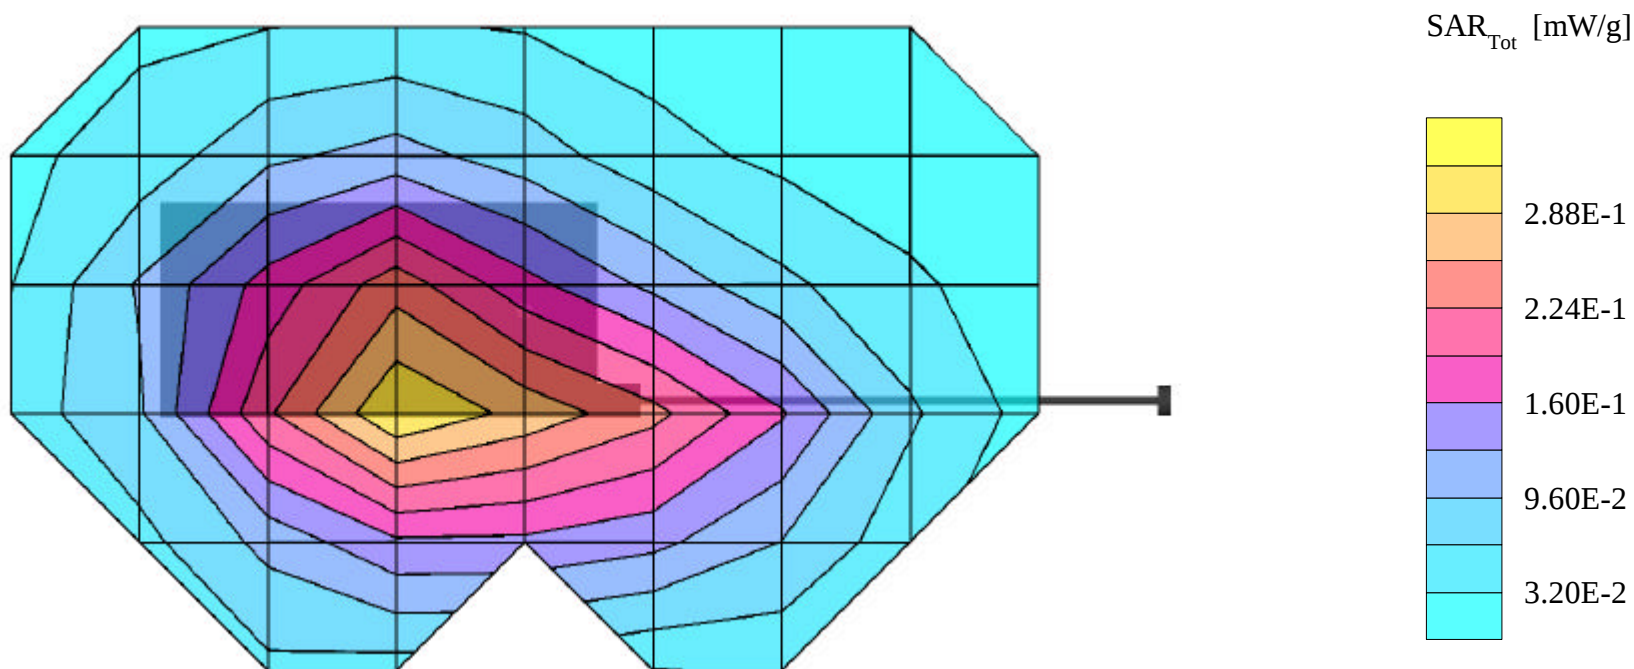

TOSHIBA FCC ID: CJ6DCE46036A -- FM Body SAR

SAM Phantom; Flat Section; Probe:ET3DV6 - SN1677; ConvF(6.40,6.40,6.40)

Med. Parameters 835 MHz Muscle: $\sigma = 0.98$ mho/m $\epsilon_r = 54.6$ $\rho = 1.00$ g/cm³; Antenna Position -- In; Crest Factor 1.0


SAR (1g): 0.220 mW/g, SAR (10g): 0.158 mW/g

Toshiba TriMode Phone Model: CDM-9500

FM Mode, Ch.0991 [824.04MHz]; Extended Battery; Flip = closed; Ambient Temp. = 22.4°C / Meas. Tissue Temp. = 22.3°C

Conducted Power = 27.2dBm; Spacing = 3.0cm from EUT (antenna side) to flat phantom, w/Plastic Hoster/Beltclip

Test Date - 07/22/2002 [FCC/OET Bulletin 65 - Supplement C, July 2001]

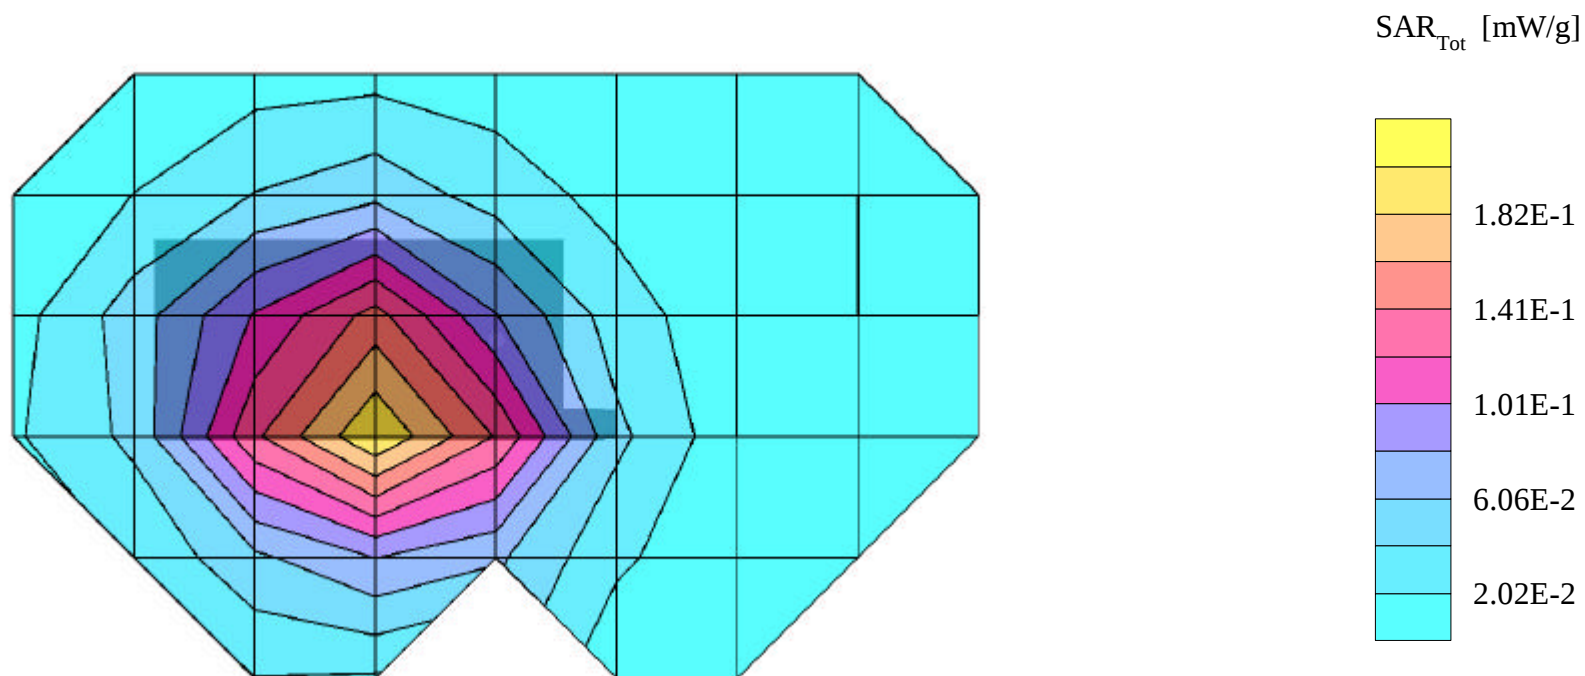

TOSHIBA FCC ID: CJ6DCE46036A -- FM Body SAR

SAM Phantom; Flat Section; Probe:ET3DV6 - SN1677; ConvF(6.40,6.40,6.40)

Med. Parameters 835 MHz Muscle: $\sigma = 0.98$ mho/m $\epsilon_r = 54.6$ $\rho = 1.00$ g/cm³; Antenna Position -- Out; Crest Factor 1.0

SAR (1g): 0.430 mW/g, SAR (10g): 0.307 mW/g

Toshiba TriMode Phone Model: CDM-9500

FM Mode, Ch.0991 [824.04MHz]; Extended Battery; Flip = closed; Ambient Temp. = 22.4°C / Meas. Tissue Temp. = 22.3°C

Conducted Power = 27.2dBm; Spacing =3.0cm from EUT (antenna side) to flat phantom, w/Plastic Hoster/Beltclip

Test Date - 07/22/2002 [FCC/OET Bulletin 65 - Supplement C, July 2001]

