

Test Laboratory: Compliance Certification Services

System Performance Check @ 5.2GHz (Body Tissue)

DUT: Dipole 5200-5800MHz; Type: D5GHzV2; Serial: 1003

Communication System: CW 5200MHz; Frequency: 5200 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5200$ MHz; $\sigma = 5.37$ mho/m; $\epsilon_r = 49.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 25 deg. C; Liquid Temperature: 24.5 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3552 ; ConvF(4.28, 4.28, 4.28); Calibrated: 3/19/2005
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 2/7/2005
- Phantom: SAM 1; Type: SAM 1; Serial: 1185
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

d=10mm, Pin=250mW/Area Scan (8x8x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 28.7 mW/g


d=10mm, Pin=250mW/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=4.3mm, dy=4.3mm, dz=3mm

Reference Value = 85.3 V/m; Power Drift = 0.141 dB

Peak SAR (extrapolated) = 67.2 W/kg

SAR(1 g) = 18.1 mW/g; SAR(10 g) = 5.15 mW/g

Maximum value of SAR (measured) = 34.9 mW/g

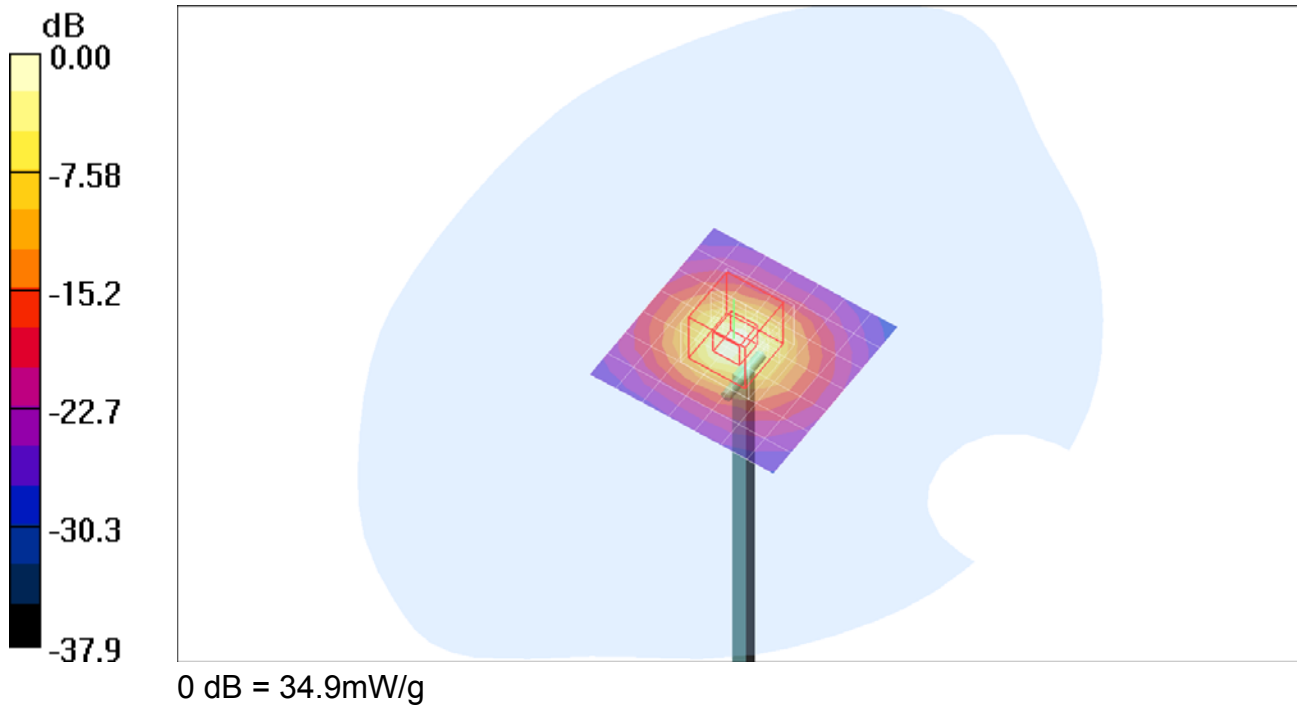


Test Laboratory: Compliance Certification Services

System Performance Check @ 5.2GHz (Body Tissue)

DUT: Dipole 5200-5800MHz; Type: D5GHzV2; Serial: 1003

Communication System: CW 5200MHz; Frequency: 5200 MHz;Duty Cycle: 1:1

d=10mm, Pin=250mW/Z Scan (1x1x41): Measurement grid: dx=20mm, dy=20mm, dz=2.5mm
Maximum value of SAR (measured) = 53.9 mW/g

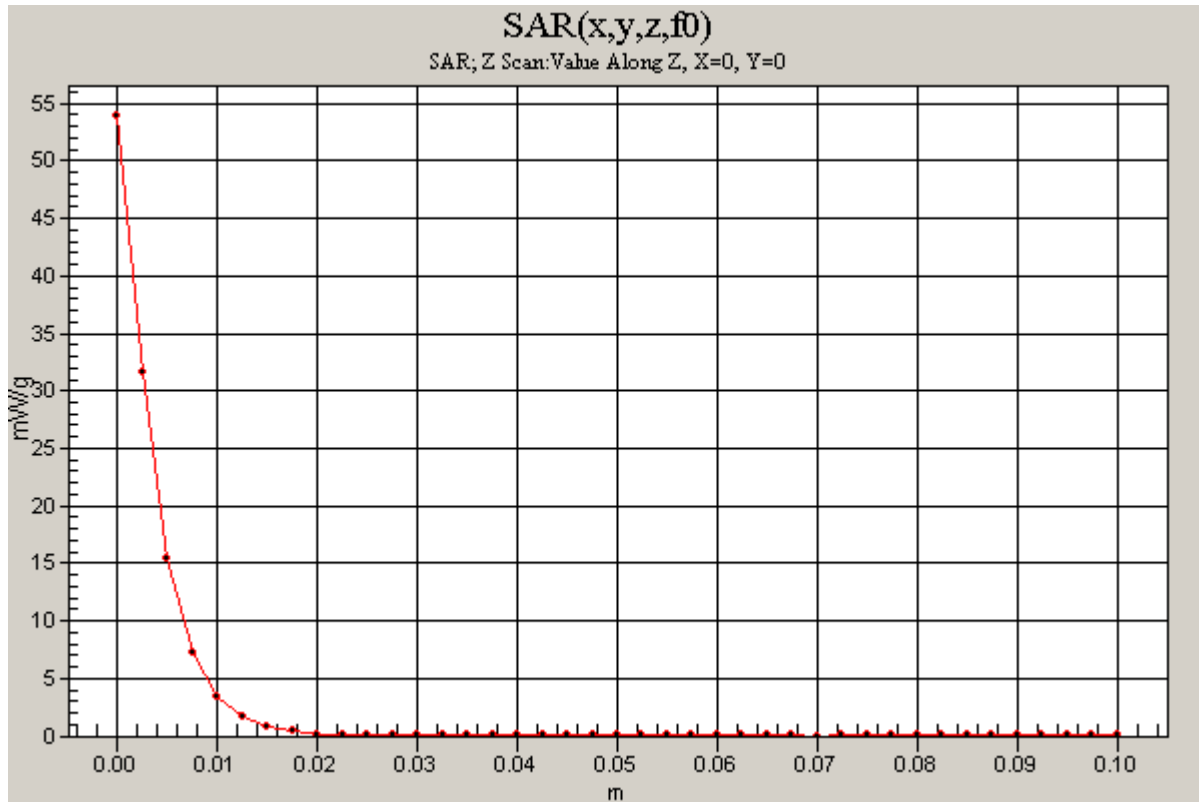

Test Laboratory: Compliance Certification Services

System Performance Check @ 5.8GHz (Body Tissue)

DUT: Dipole 5200-5800MHz; Type: D5GHzV2; Serial: 1003

Communication System: CW 5800MHz; Frequency: 5800 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5800$ MHz; $\sigma = 6.23$ mho/m; $\epsilon_r = 48.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 25 deg. C; Liquid Temperature: 24.5 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3552 ; ConvF(3.61, 3.61, 3.61); Calibrated: 3/19/2005
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 2/7/2005
- Phantom: SAM 1; Type: SAM 1; Serial: 1185
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

d=10mm, Pin=250mW/Area Scan (8x8x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 30.3 mW/g


d=10mm, Pin=250mW/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=4.3mm, dy=4.3mm, dz=3mm

Reference Value = 85.8 V/m; Power Drift = 0.118 dB

Peak SAR (extrapolated) = 78.0 W/kg

SAR(1 g) = 19.2 mW/g; SAR(10 g) = 5.39 mW/g

Maximum value of SAR (measured) = 37.6 mW/g

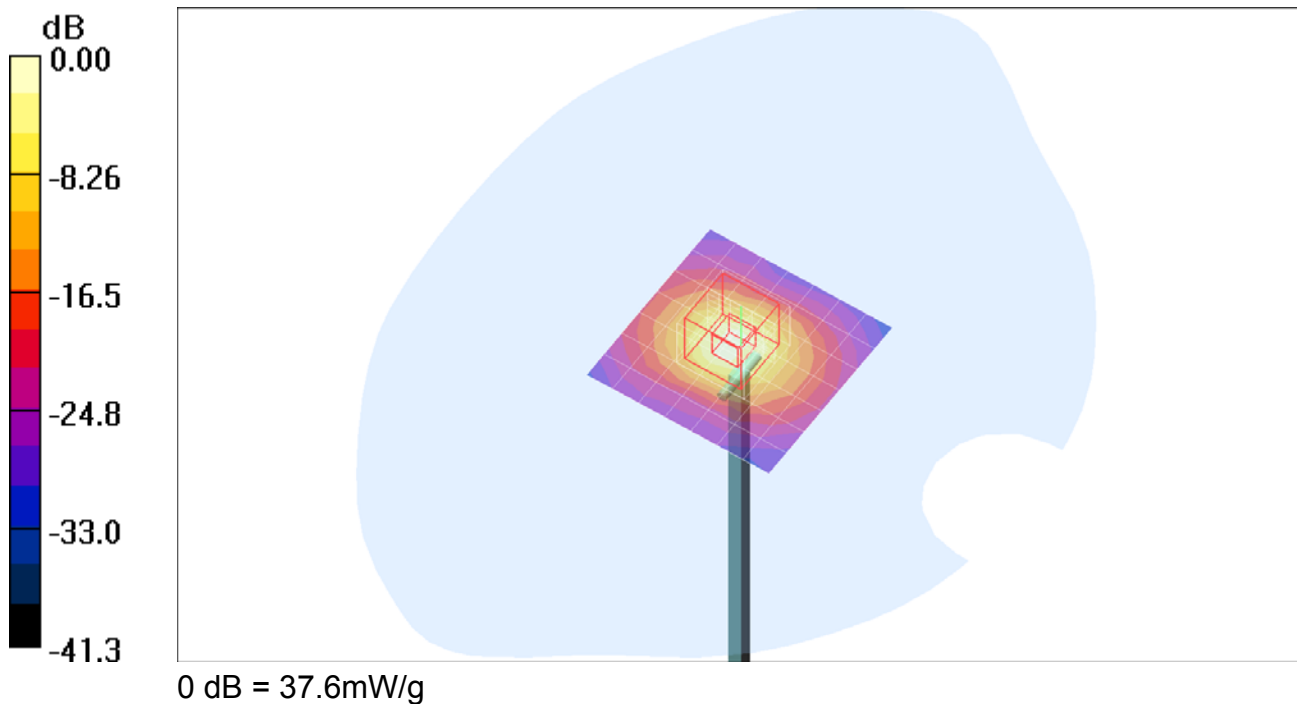

Test Laboratory: Compliance Certification Services

System Performance Check @ 5.8GHz (Body Tissue)

DUT: Dipole 5200-5800MHz; Type: D5GHzV2; Serial: 1003

Communication System: CW 5800MHz; Frequency: 5800 MHz;Duty Cycle: 1:1

d=10mm, Pin=250mW/Z Scan (1x1x41): Measurement grid: dx=20mm, dy=20mm, dz=2.5mm
Maximum value of SAR (measured) = 77.9 mW/g

