



TEST REPORT

APPLICANT : GoPro, Inc.
PRODUCT NAME : 3-Axis Gimbal
MODEL NAME : ACPN1
BRAND NAME : GoPro
FCC ID : CNFACPN1
STANDARD(S) : 47 CFR Part 15 Subpart C
RECEIPT DATE : 2025-07-07
TEST DATE : 2025-07-14 to 2025-07-22
ISSUE DATE : 2025-08-04

Edited by:

Zeng Xiaoying
Zeng Xiaoying (Rapporteur)

Approved by:

Shen Junsheng
Shen Junsheng (Supervisor)

NOTE: This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

MORLAB

Shenzhen Morlab Communications Technology Co., Ltd.
FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

Tel: 86-755-36698555 Fax: 86-755-36698525
Http://www.morlab.cn E-mail: service@morlab.cn





DIRECTORY

1. Summary of Test Result	4
1.1. Testing Applied Standards	4
1.2. Test Equipment List	5
1.3. Measurement Uncertainty	7
1.4. Testing Laboratory	7
2. General Description	8
2.1. Information of Applicant and Manufacturer	8
2.2. Information of EUT	8
2.3. Channel List of EUT	9
2.4. Test Configuration of EUT	10
2.5. Test Conditions	10
2.6. Test Setup Layout Diagram	10
3. Test Results	13
3.1. Antenna Requirement	13
3.2. Duty Cycle of Test Signal	14
3.3. Maximum Peak Conducted Output Power	15
3.4. Maximum Average Conducted Output Power	16
3.5. 6 dB Bandwidth	17
3.6. Conducted Spurious Emissions and Band Edge	18
3.7. Power Spectral Density	19
3.8. Conducted Emission	20
3.9. Restricted Frequency Bands	21
3.10. Radiated Emission	22
Annex A Test Data and Result	24



Change History		
Version	Date	Reason for change
1.0	2025-08-04	First edition



1. Summary of Test Result

No.	Section	Description	Test Date	Test Engineer	Result	Remark
1	15.203	Antenna Requirement	N/A	N/A	PASS	/
2	N/A	Duty Cycle of Test Signal	Jul. 14, 2025	Lin Haoyang	PASS	/
3	15.247(b)	Maximum Peak Conducted Output Power	Jul. 14, 2025	Lin Haoyang	PASS	/
4	15.247(b)	Maximum Average Conducted Output Power	Jul. 14, 2025	Lin Haoyang	PASS	/
5	15.247(a)	Bandwidth	Jul. 14, 2025	Lin Haoyang	PASS	/
6	15.247(d)	Conducted Spurious Emission and Band Edge	Jul. 14, 2025	Lin Haoyang	PASS	/
7	15.247(e)	Power Spectral Density	Jul. 14, 2025	Lin Haoyang	PASS	/
8	15.207	Conducted Emission	Jul. 18, 2025	Wang Yapeng	PASS	/
9	15.247(d)	Restricted Frequency Bands	Jul. 12, 2025	Wang Deyong	PASS	/
10	15.209, 15.247(d)	Radiated Emission	Jul. 12, 2025	Wang Deyong	PASS	/

Note 1: The tests were performed according to the method of measurements prescribed in ANSI C63.10-2013 and KDB 558074 D01 v05r02.

Note 2: Any additions, deviation, or exclusions from the method shall be noted in the “Remark”.

1.1. Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart C Radio Frequency Devices



1.2. Test Equipment List

1.2.1 Conducted Test Equipment

Equipment	Serial No.	Type	Manufacturer	Cal. Date	Due Date
EXA Signal Analyzer	MY53470836	N9010A	Agilent	2025.01.15	2026.01.14
RF Cable (30MHz-26GHz)	CB01	RF01	Morlab	N/A	N/A
SMA Connector	CN01	RF03	HUBER-SUHNER	N/A	N/A

1.2.2 Conducted Emission Test Equipment

Equipment	Serial No.	Type	Manufacturer	Cal. Date	Due Date
Receiver	101052	ESPI	R&S	2025.05.15	2026.05.14
LISN	103131	ENV 216	R&S	2025.03.20	2026.03.19
Pulse Limiter (10dB)	VTSD 9561 F-B #206	VTSD 9561-F	R&S	2025.05.13	2026.05.12
RF Coaxial Cable (DC-100MHz)	EMC-CE-00514	N/A	N/A	2025.05.06	2026.05.05

1.2.3 List of Software Used

Description	Manufacturer	Software Version
Test System	MaiWei	2.0.0.0
JS32-RE	Tonscend	5.0.0
TS+ -[JS32-CE]	Tonscend	2.5.0.0

**1.2.4 Radiated Test Equipment**

Equipment	Serial No.	Type	Manufacturer	Cal. Date	Due Date
Signal Analyzer	MY56060145	N9020A	Agilent	2025.05.13	2026.05.12
Test Antenna - Bi-Log	9163-519	VULB 9163	Schwarzbeck	2025.06.22	2026.06.21
Test Antenna - Loop	1519-022	FMZB1519	Schwarzbeck	2025.05.16	2026.05.15
Test Antenna - Horn	01774	BBHA 9120D	Schwarzbeck	2025.06.20	2026.06.19
Test Antenna - Horn	BBHA9170 #773	BBHA9170	Schwarzbeck	2025.06.20	2026.06.19
Preamplifier (10MHz-6GHz)	46732	S10M100L38 02	LUCIX CORP.	2025.05.13	2026.05.12
Preamplifier (2GHz-18GHz)	61171/61172	S020180L32 03	LUCIX CORP.	2025.05.13	2026.05.12
Preamplifier (18GHz-40GHz)	DS77209	DCLNA0118-40C-S	Decentest	2025.05.13	2026.05.12
RF Coaxial Cable (DC-18GHz)	MRE001	PE330	Pasternack	2025.05.13	2026.05.12
RF Coaxial Cable (DC-18GHz)	MRE002	CLU18	Pasternack	2025.05.13	2026.05.12
RF Coaxial Cable (DC-18GHz)	MRE003	CLU18	Pasternack	2025.05.13	2026.05.12
RF Coaxial Cable (DC-40GHz)	22290045	QA360-40-KK-0.5	Qualwave	2024.09.11	2025.09.10
RF Coaxial Cable (DC-40GHz)	22290046	QA360-40-KKF-2	Qualwave	2024.09.11	2025.09.10
RF Coaxial Cable (DC-18GHz)	22120181	QA500-18-NN-5	Qualwave	2024.09.11	2025.09.10
Notch Filter	N/A	WRCG-2400-2483.5-60SS	Wainwright	N/A	N/A
Anechoic Chamber	N/A	9m*6m*6m	CRT	2025.06.21	2028.06.20
Anechoic Chamber	N/A	9m*6m*6m	CRT	2022.11.30	2025.11.29



1.3. Measurement Uncertainty

Test Items	Uncertainty	Remark
Peak Output Power	±2.22dB	Confidence levels of 95%
Power Spectral Density	±2.22dB	Confidence levels of 95%
Bandwidth	±5%	Confidence levels of 95%
Conducted Spurious Emission	±2.77dB	Confidence levels of 95%
Restricted Frequency Bands	±5%	Confidence levels of 95%
Radiated Emission	±2.95dB	Confidence levels of 95%
Conducted Emission	±2.44dB	Confidence levels of 95%

1.4. Testing Laboratory

Laboratory Name:	Shenzhen Morlab Communications Technology Co., Ltd.
Laboratory Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China
Telephone:	+86 755 36698555
Facsimile:	+86 755 36698525
FCC Designation Number:	CN1192
FCC Test Firm Registration Number:	226174



2. General Description

2.1. Information of Applicant and Manufacturer

Applicant:	GoPro, Inc.
Applicant Address:	3025 Clearview Way, San Mateo, CA 94402, USA
Manufacturer:	GoPro, Inc.
Manufacturer Address:	3025 Clearview Way, San Mateo, CA 94402, USA

2.2. Information of EUT

Product Name:	3-Axis Gimbal
Sample No.:	1#, 4#, 6#
Hardware Version:	V1.1
Software Version:	V7.005.04
Equipment Type:	Bluetooth LE
Bluetooth Version:	5.1
Modulation Type:	GFSK
Data Rate:	1Mbps, 2Mbps
Operating Frequency Range:	2402MHz-2480MHz
Antenna Type:	PCB Antenna
Antenna Gain:	-2.16dBi
Accessory Information:	Battery
	Brand Name: hohem
	Model No.: ICR18650
	Serial No.: N/A
	Capacity: 2600mAh
	Rated Voltage: 7.4V
	Charge Limit: 8.4V
	Manufacturer: ZHU HAI UNIDEN POWER ENERGY CO, LTD
	Manufacturer Address: 2F block c,37th Puging road, Xingning Technology park, Jingan town, Doumen district, Zhuhai city,Guangdong,P.R.China

Note 1: The EUT description presented in the report are provided by applicant and/or manufacturer, and the test laboratory is not responsible for the accuracy of the information. For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or



manufacturer.

2.3. Channel List of EUT

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

Note 1: The black bold channels were selected for test.

2.4. Test Configuration of EUT


The EUT is controlled by dedicated software to transmit at the default maximum power level.

2.5. Test Conditions


Temperature (°C):	15-35
Relative Humidity (%):	30-60
Atmospheric Pressure (kPa):	86-106

2.6. Test Setup Layout Diagram

2.6.1. Conducted Measurement

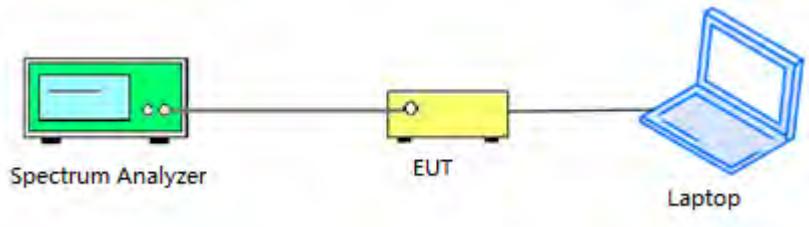


2.6.2. Conducted Emission Measurement

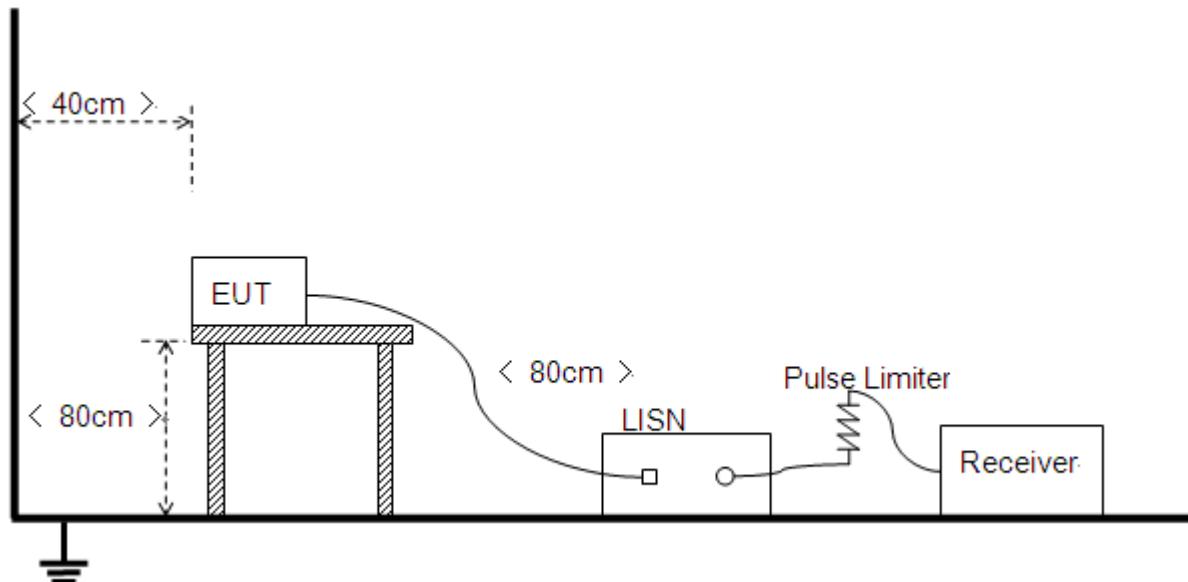


2.6.3.Radiation Measurement


- 1) For radiated emissions from 9kHz to 30MHz

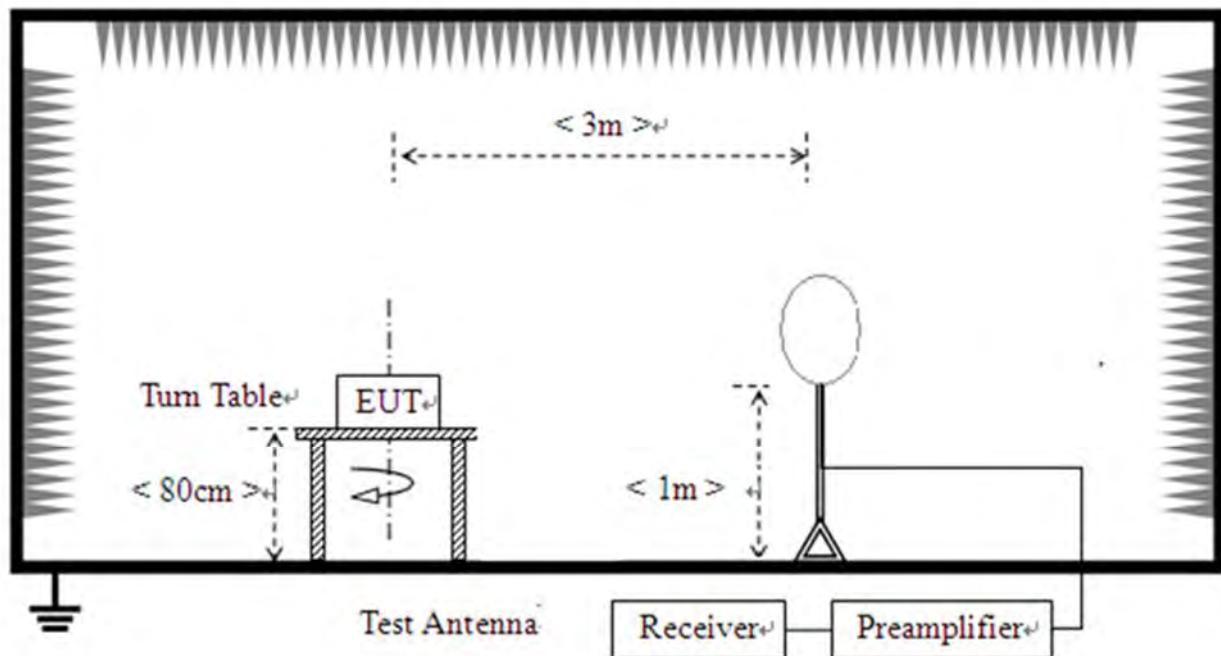

- 2) For radiated emissions from 30MHz to1GHz

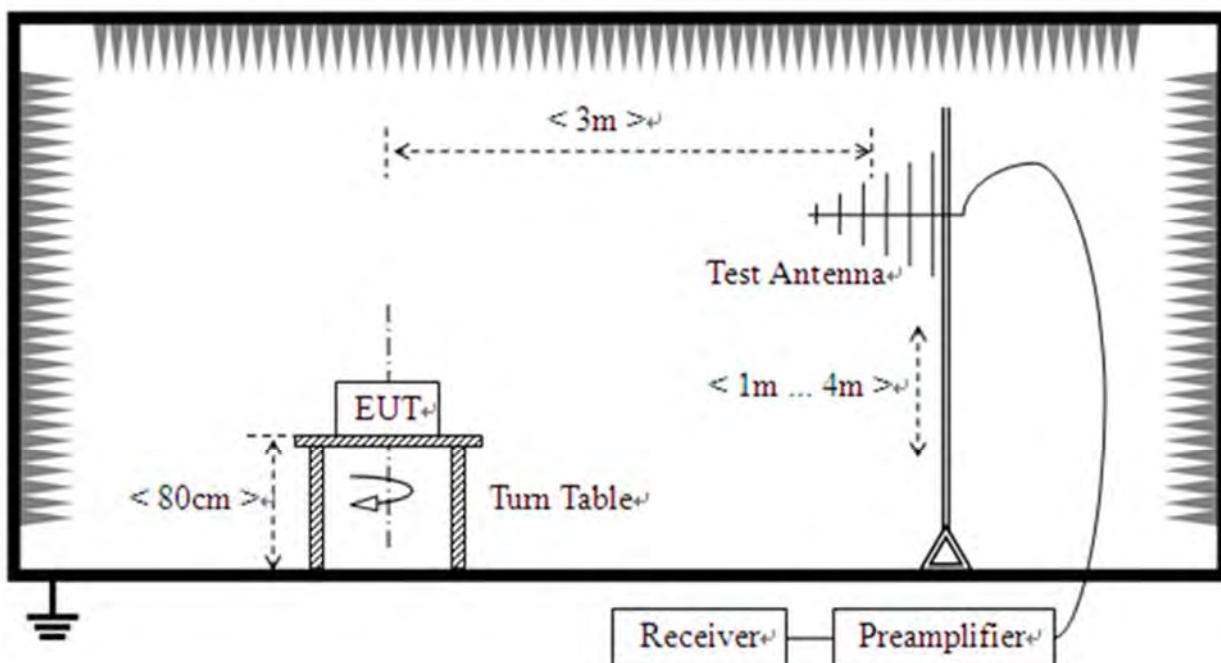

3) For radiated emissions above 1GHz

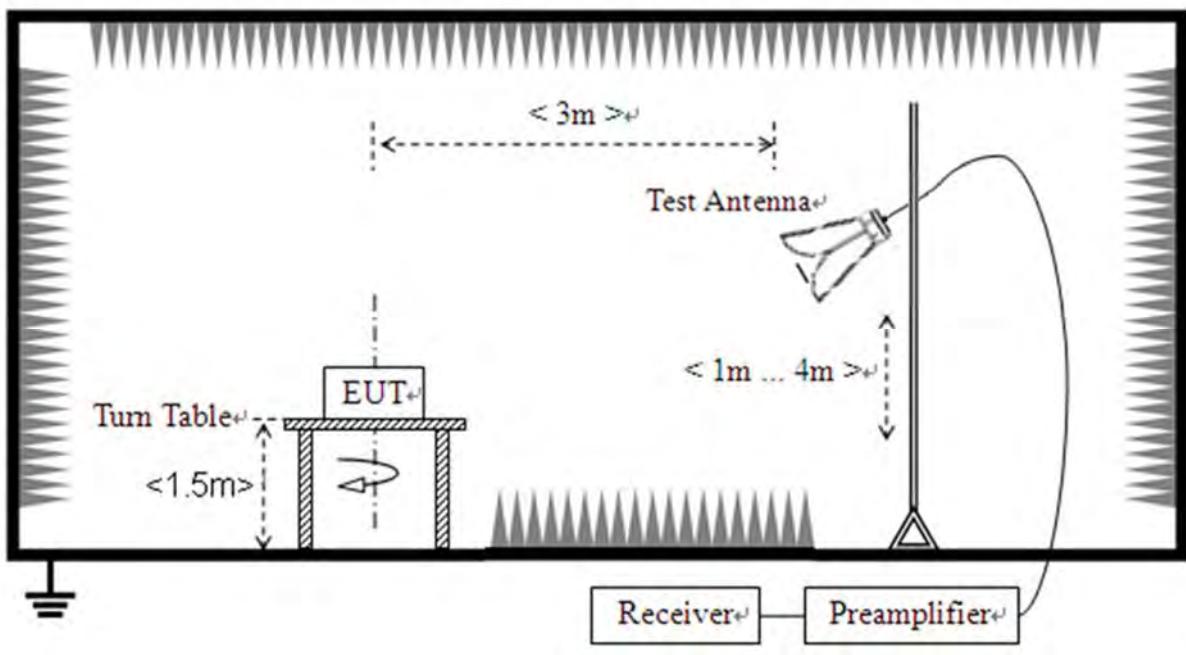



3. Test Results

3.1. Antenna Requirement

3.1.1. Requirement

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.1.2. Test Result

Antenna location	Antenna Type	Coupling Method
<input checked="" type="checkbox"/> Internal <input type="checkbox"/> External	<input type="checkbox"/> FPC Antenna <input type="checkbox"/> Spring Antenna <input type="checkbox"/> Ceramic Antenna <input type="checkbox"/> Integrated Antenna <input type="checkbox"/> Dipole Antenna <input checked="" type="checkbox"/> PCB Antenna <input type="checkbox"/> PIFA Antenna <input type="checkbox"/> Inverted F Antenna	<input type="checkbox"/> I-PEX Connector <input type="checkbox"/> SMA Connector <input type="checkbox"/> RP-SMA Connector <input type="checkbox"/> Metal Shrapnel <input checked="" type="checkbox"/> Layout



3.2. Duty Cycle of Test Signal

3.2.1. Requirement

Preferably, all measurements of maximum conducted (average) output power will be performed with the EUT transmitting continuously (i.e., with a duty cycle of greater than or equal to 98%). When continuous operation cannot be realized, then the use of sweep triggering/signal gating techniques can be used to ensure that measurements are made only during transmissions at the maximum power control level. Such sweep triggering/signal gating techniques will require knowledge of the minimum transmission duration(T) over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation. Sweep triggering/signal gating techniques can then be used if the measurement/sweep time of the analyzer can be set such that it does not exceed T at any time that data are being acquired (i.e., no transmitter OFF-time is to be considered).

When continuous transmission cannot be achieved and sweep triggering/signal gating cannot be implemented, alternative procedures are provided that can be used to measure the average power; however, they will require an additional measurement of the transmitter duty cycle (D). Within this sub clause, the duty cycle refers to the fraction of time over which the transmitter is ON and is transmitting at its maximum power control level. The duty cycle is considered to be constant if variations are less than $\pm 2\%$; otherwise, the duty cycle is considered to be non constant.

3.2.2. Test Result

Refer to Annex A.1 in this report.



3.3. Maximum Peak Conducted Output Power

3.3.1. Requirement

According to FCC section 15.247(b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: The maximum peak conducted output power of the intentional radiator shall not exceed 1 Watt.

3.3.2. Test Procedures

KDB 558074 Section 8.3.1 was used in order to prove compliance.

3.3.3. Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.3.4. Test Result

Refer to Annex A.2 in this report.



3.4. Maximum Average Conducted Output Power

3.4.1. Requirement

According to FCC section 15.247(b)(3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: The maximum average conducted output power of the intentional radiator shall not exceed 1 Watt.

3.4.2. Test Procedures

KDB 558074 Section 8.3.2 was used in order to prove compliance.

3.4.3. Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.4.4. Test Result

Refer to Annex A.3 in this report.



3.5.6 dB Bandwidth

3.5.1. Requirement

According to FCC section 15.247(a) (2), systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6dB bandwidth shall be at least 500 kHz.

3.5.1. Test Procedures

The steps for the first option are as follows:

- a) Set analyzer center frequency to channel center frequency
- b) Set RBW to 100kHz
- c) Set VBW to 300kHz
- d) Detector = peak.
- e) Trace mode = max hold
- f) Sweep time = auto couple
- g) Allow the trace to fully stabilize
- h) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described in 11.8.1 (i.e., RBW = 100 kHz, VBW \geq 3 \times RBW, and peak detector with maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be \geq 6 dB.

3.5.2. Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.5.3. Test Result

Refer to Annex A.4 in this report.



3.6. Conducted Spurious Emissions and Band Edge

3.6.1. Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

3.6.2. Test Procedures

KDB 558074 Section 8.5 and 8.7 was used in order to prove compliance.

3.6.3. Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.6.4. Test Result

Refer to Annex A.5 and A.6 in this report.



3.7. Power Spectral Density

3.7.1. Requirement

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

3.7.2. Test Procedures

The measured power spectral density was calculated by the reading of the spectrum analyzer and calibration. Following is the test procedure for PSD test:

- a) Set analyzer center frequency to channel center frequency
- b) Set span to 1.5 times DTS
- c) Set RBW to 3kHz
- d) Set VBW to 10kHz
- e) Detector = peak
- f) Sweep time = auto couple
- g) Trace mode = max hold
- h) Allow trace to fully stabilize
- i) Use the peak marker function to determine the maximum amplitude level within the RBW

3.7.3. Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.7.4. Test Result

Refer to Annex A.7 in this report.



3.8. Conducted Emission

3.8.1. Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Frequency Range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

Note:

- (a) The lower limit shall apply at the band edges.
- (b) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

3.8.2. Test Procedures

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.10: 2013.

3.8.3. Test Setup Layout

Refer to chapter 2.6.2 in this report.

3.8.4. Test Result

Refer to Annex A.8 in this report.



3.9. Restricted Frequency Bands

3.9.1. Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

3.9.2. Test Procedures

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1\text{GHz}$, 100 kHz for $f < 1\text{GHz}$

VBW = 3 MHz

Sweep = auto

Detector function = peak/average

Trace = max hold

Allow the trace to stabilize

3.9.3. Test Setup Layout

Refer to chapter 2.6.3 in this report.

3.9.4. Test Result

Refer to Annex A.9 in this report.



3.10. Radiated Emission

3.10.1. Requirement

According to FCC section 15.247(d), radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (μ V/m)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note1: For above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.

Note2: For above 1000MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK). In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table).



3.10.2. Test Procedures

The EUT is placed on a non-conducting table 80 cm above the ground plane for measurement below 1GHz; 1.5 m above the ground plane for measurement above 1GHz. The antenna to EUT distance is 3meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 30MHz, the emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9kHz-90 kHz, 110kHz-490 kHz. Radiated emission limits in these two bands are based on measurements employing an average detector.

For measurements below 1GHz the resolution bandwidth is set to 100kHz for peak detection measurements or 120kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1GHz the resolution bandwidth is set to 1MHz, the video band width is set to 3MHz for peak measurements and as applicable for average measurements.

The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions. For measurements above 1 GHz, keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response.

3.10.3. Test Setup Layout

Refer to chapter 2.6.3 in this report.

3.10.4. Test Result


Refer to Annex A.10 in this report.




Annex A Test Data and Result

A.1. Duty Cycle of Test Signal


Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	BLE 1M	2402	Ant1	61.04	2.14	2.62
NVNT	BLE 1M	2440	Ant1	61.12	2.14	2.62
NVNT	BLE 1M	2480	Ant1	61.12	2.14	2.62
NVNT	BLE 2M	2402	Ant1	32.32	4.91	4.95
NVNT	BLE 2M	2440	Ant1	32.24	4.92	4.96
NVNT	BLE 2M	2480	Ant1	32.32	4.91	4.95

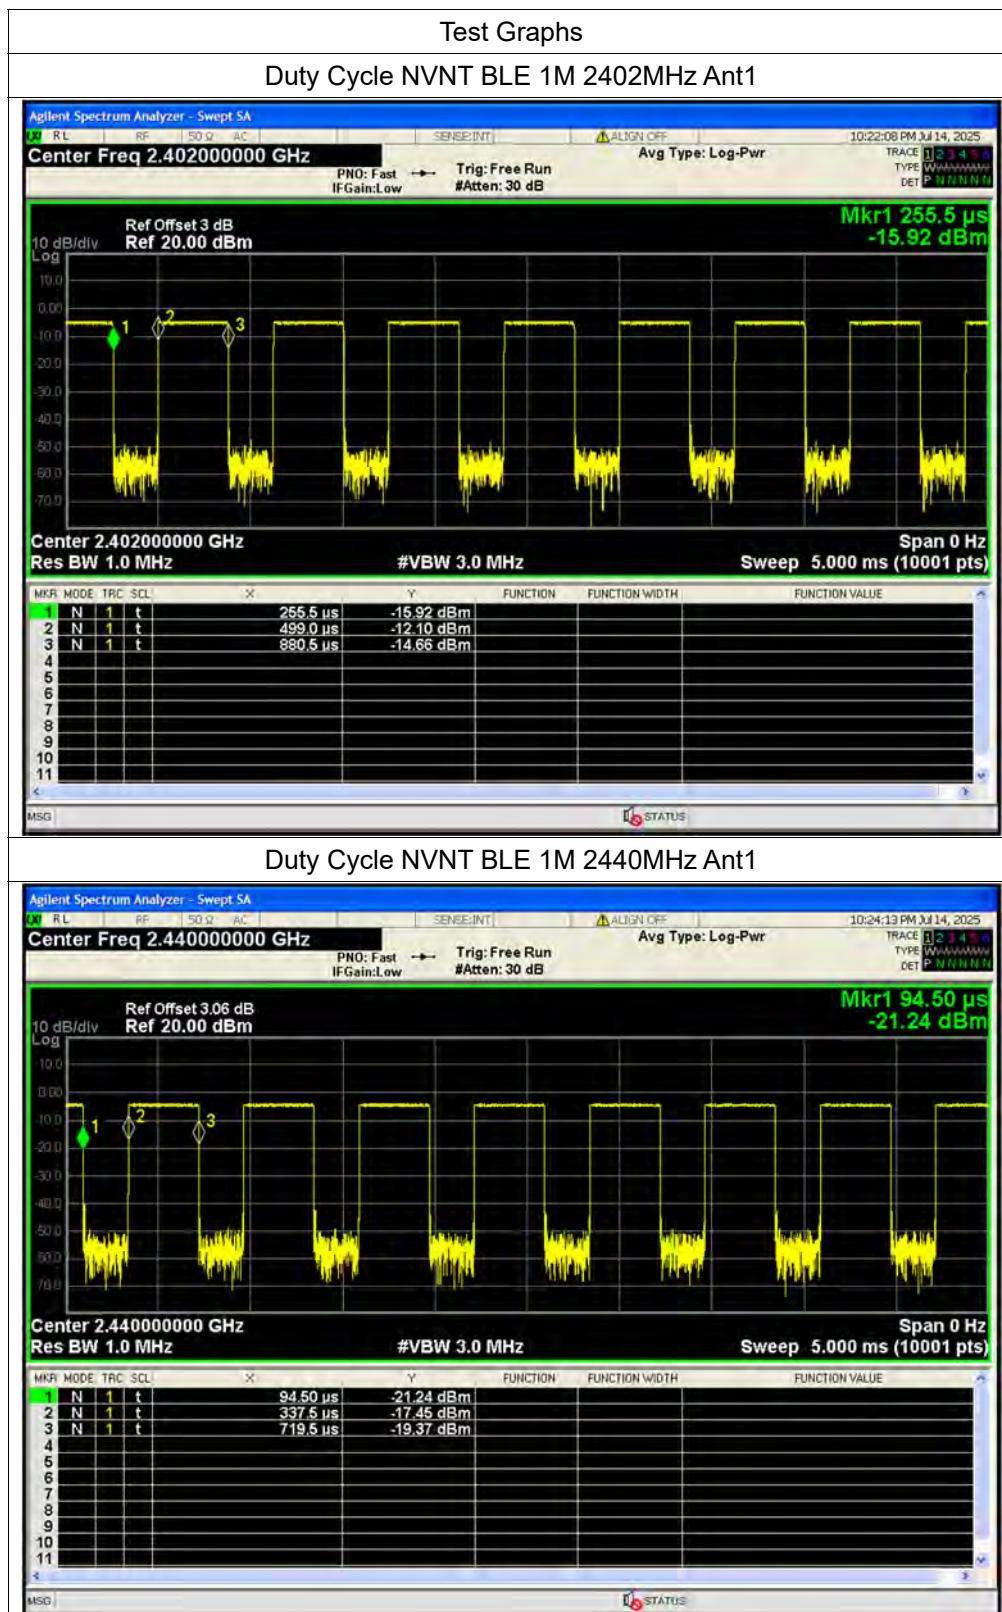

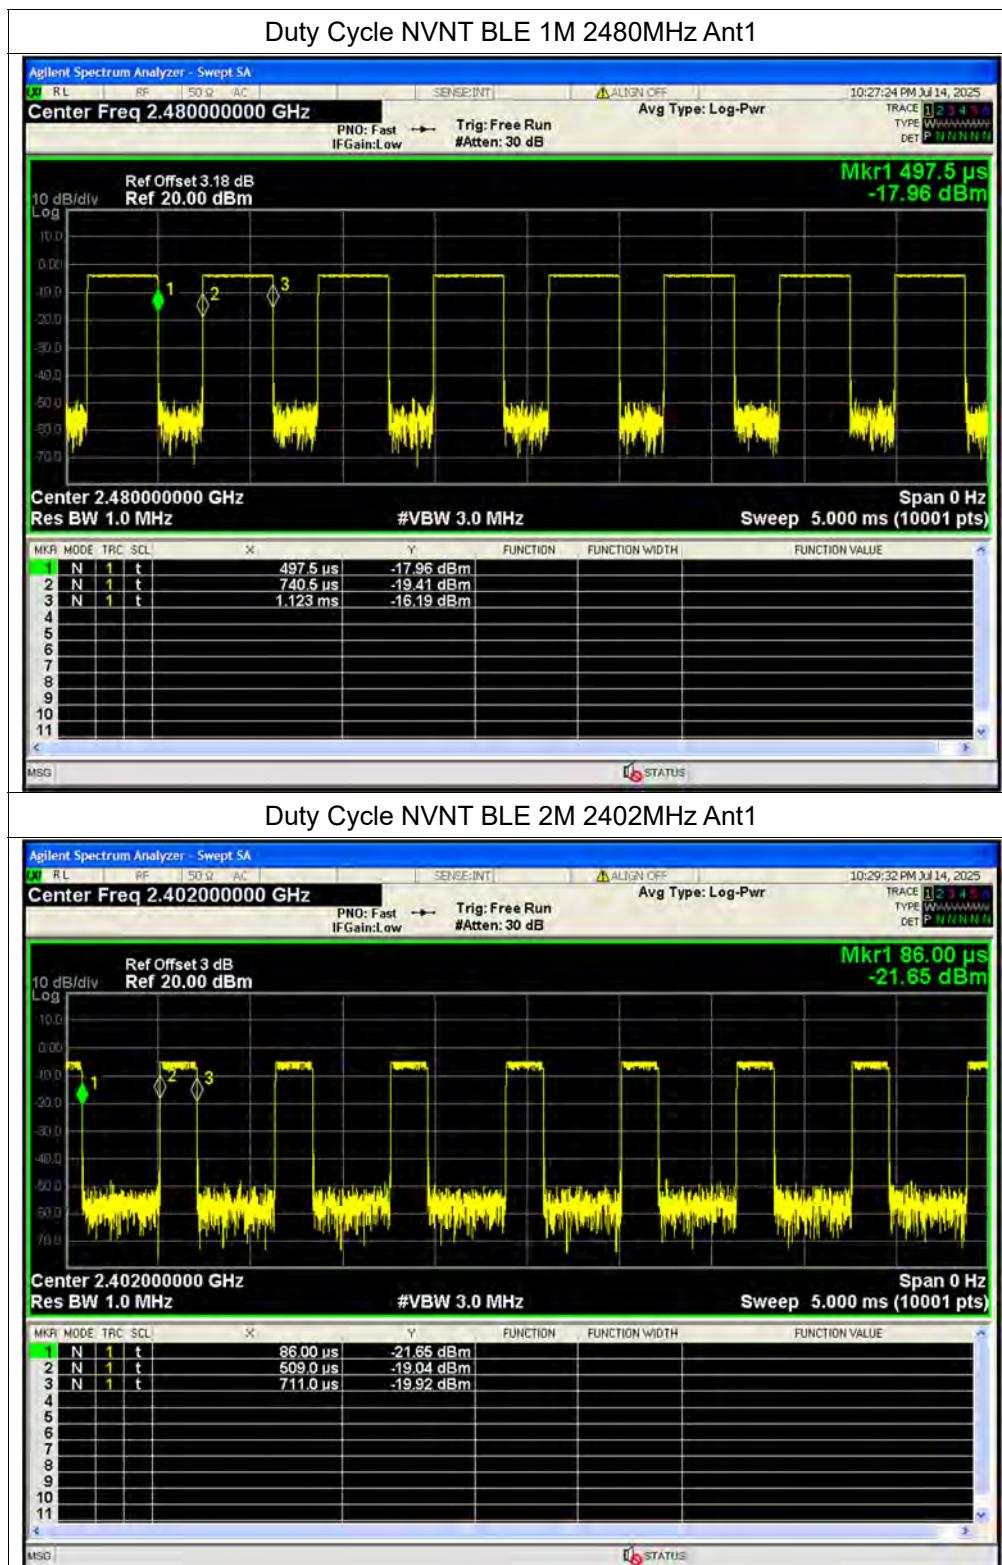



REPORT No.: SZ25070062W01

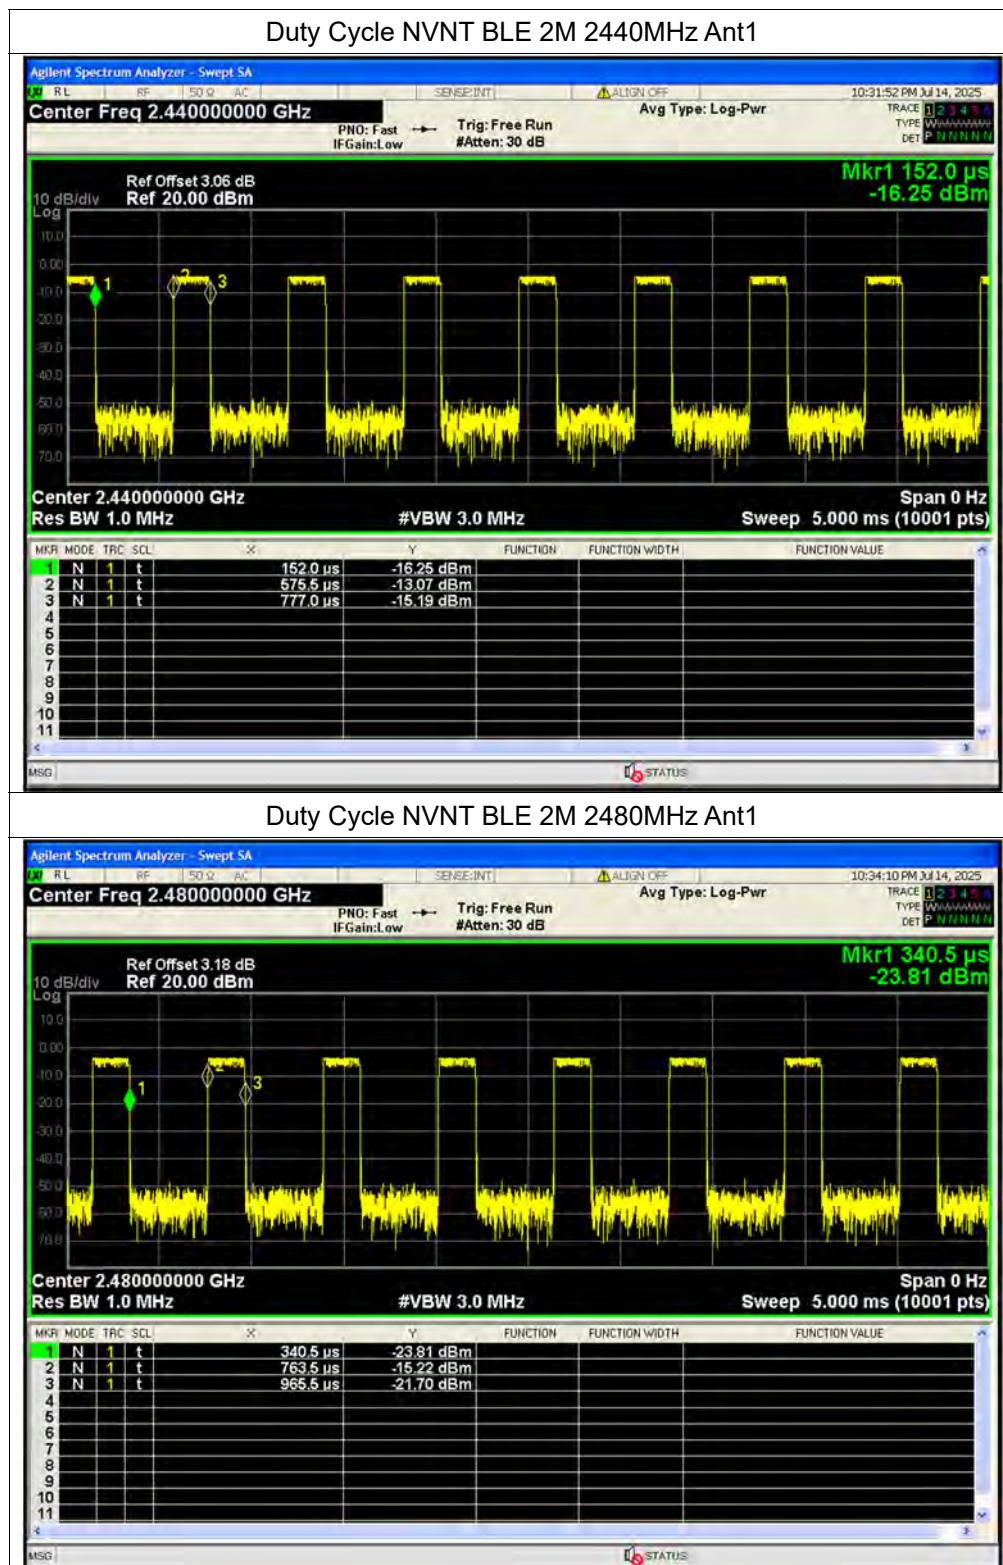

MORLAB

Shenzhen Morlab Communications Technology Co., Ltd.
FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China


Tel: 86-755-36698555 Fax: 86-755-36698525
Http://www.morlab.cn E-mail: service@morlab.cn



REPORT No.: SZ25070062W01


A.2. Maximum Peak Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Conducted Power (dBm)	Total Conducted Power (W)	Limit Conducted (dBm)	Verdict
NVNT	BLE 1M	2402	Ant1	-4.26	0	-4.26	0.00037	30	Pass
NVNT	BLE 1M	2440	Ant1	-3.61	0	-3.61	0.00044	30	Pass
NVNT	BLE 1M	2480	Ant1	-3.01	0	-3.01	0.0005	30	Pass
NVNT	BLE 2M	2402	Ant1	-3.92	0	-3.92	0.00041	30	Pass
NVNT	BLE 2M	2440	Ant1	-3.29	0	-3.29	0.00047	30	Pass
NVNT	BLE 2M	2480	Ant1	-2.68	0	-2.68	0.00054	30	Pass

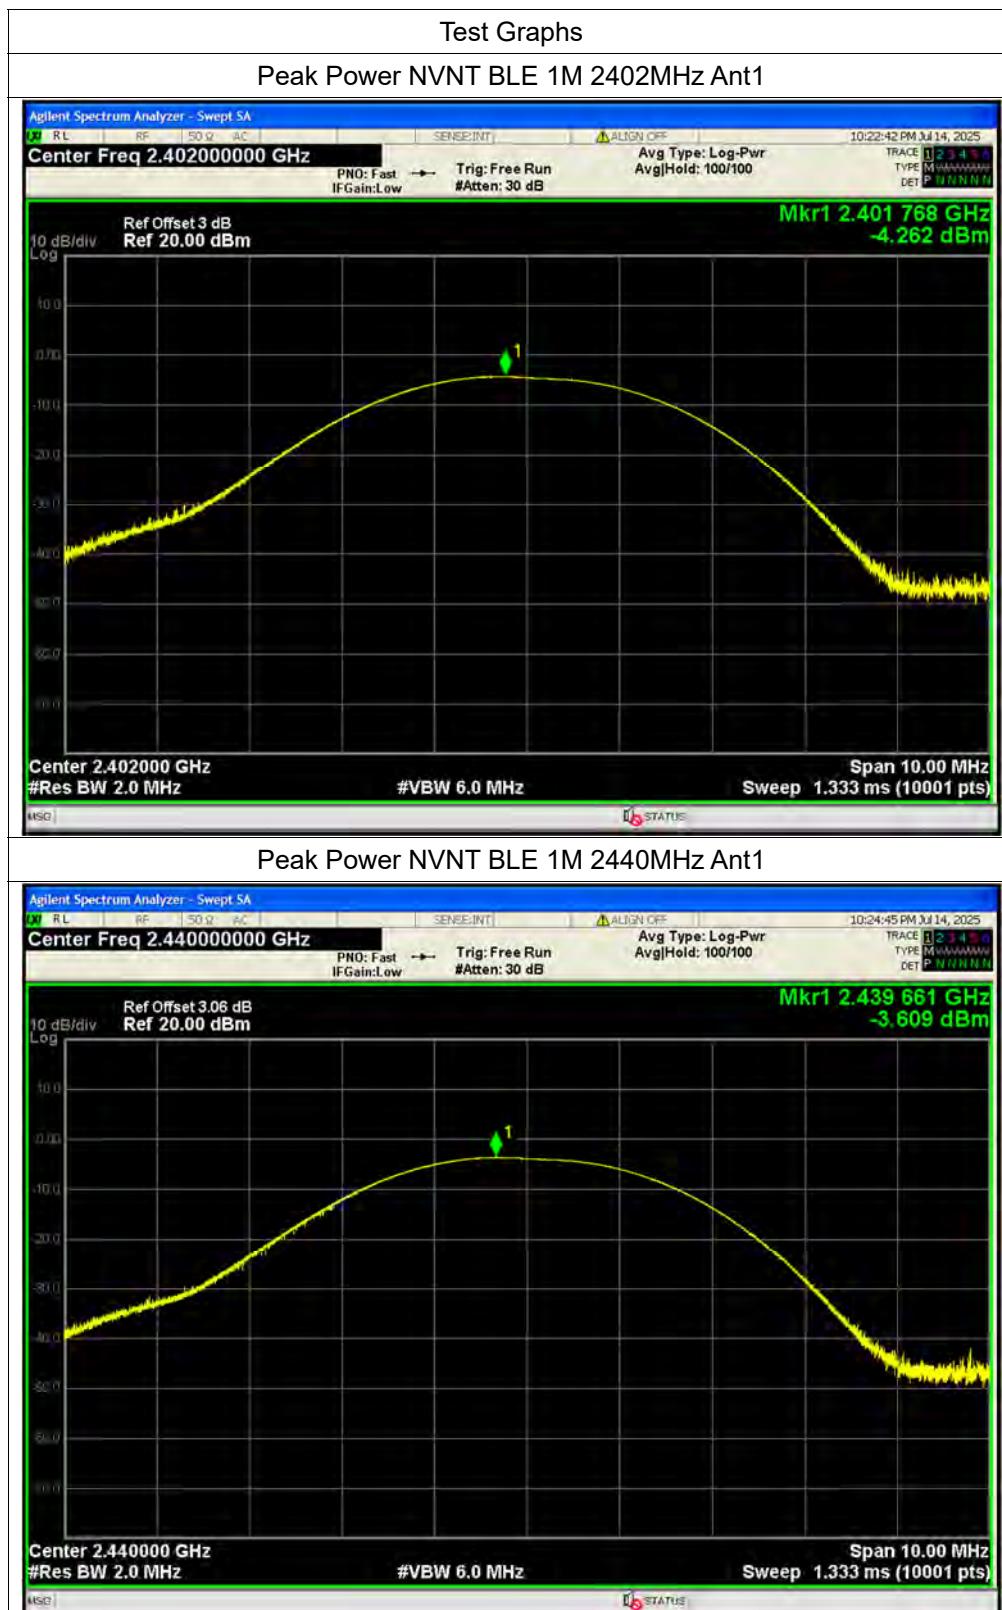



REPORT No.: SZ25070062W01

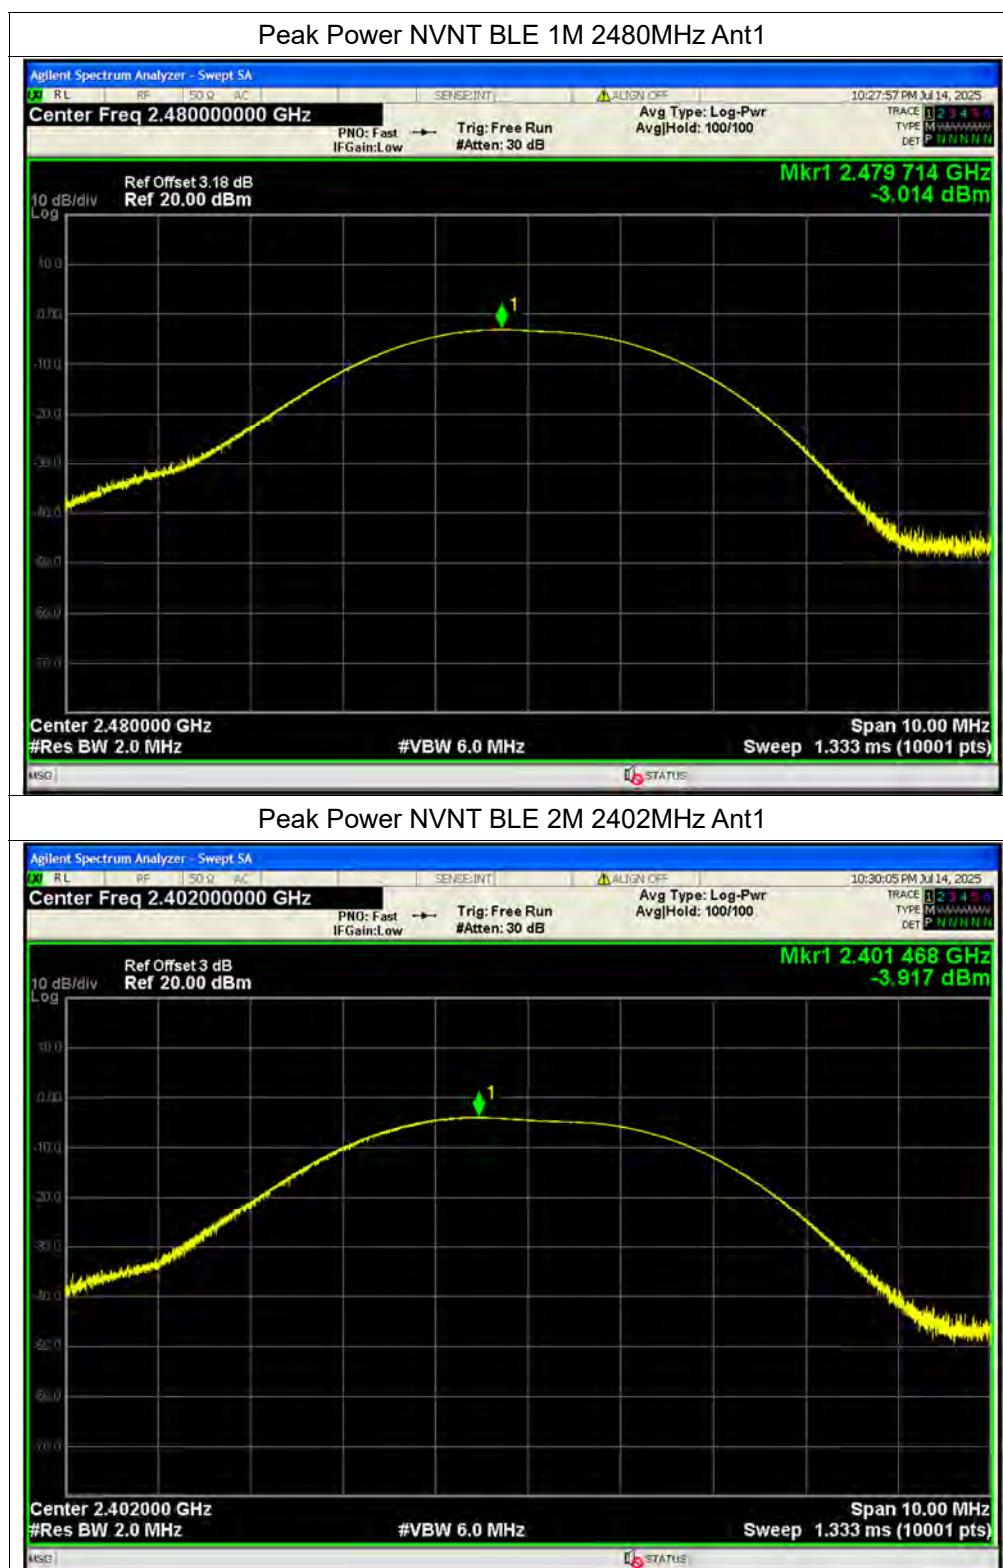


MORLAB

Shenzhen Morlab Communications Technology Co., Ltd.
FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

Tel: 86-755-36698555 Fax: 86-755-36698525
Http://www.morlab.cn E-mail: service@morlab.cn



REPORT No.: SZ25070062W01

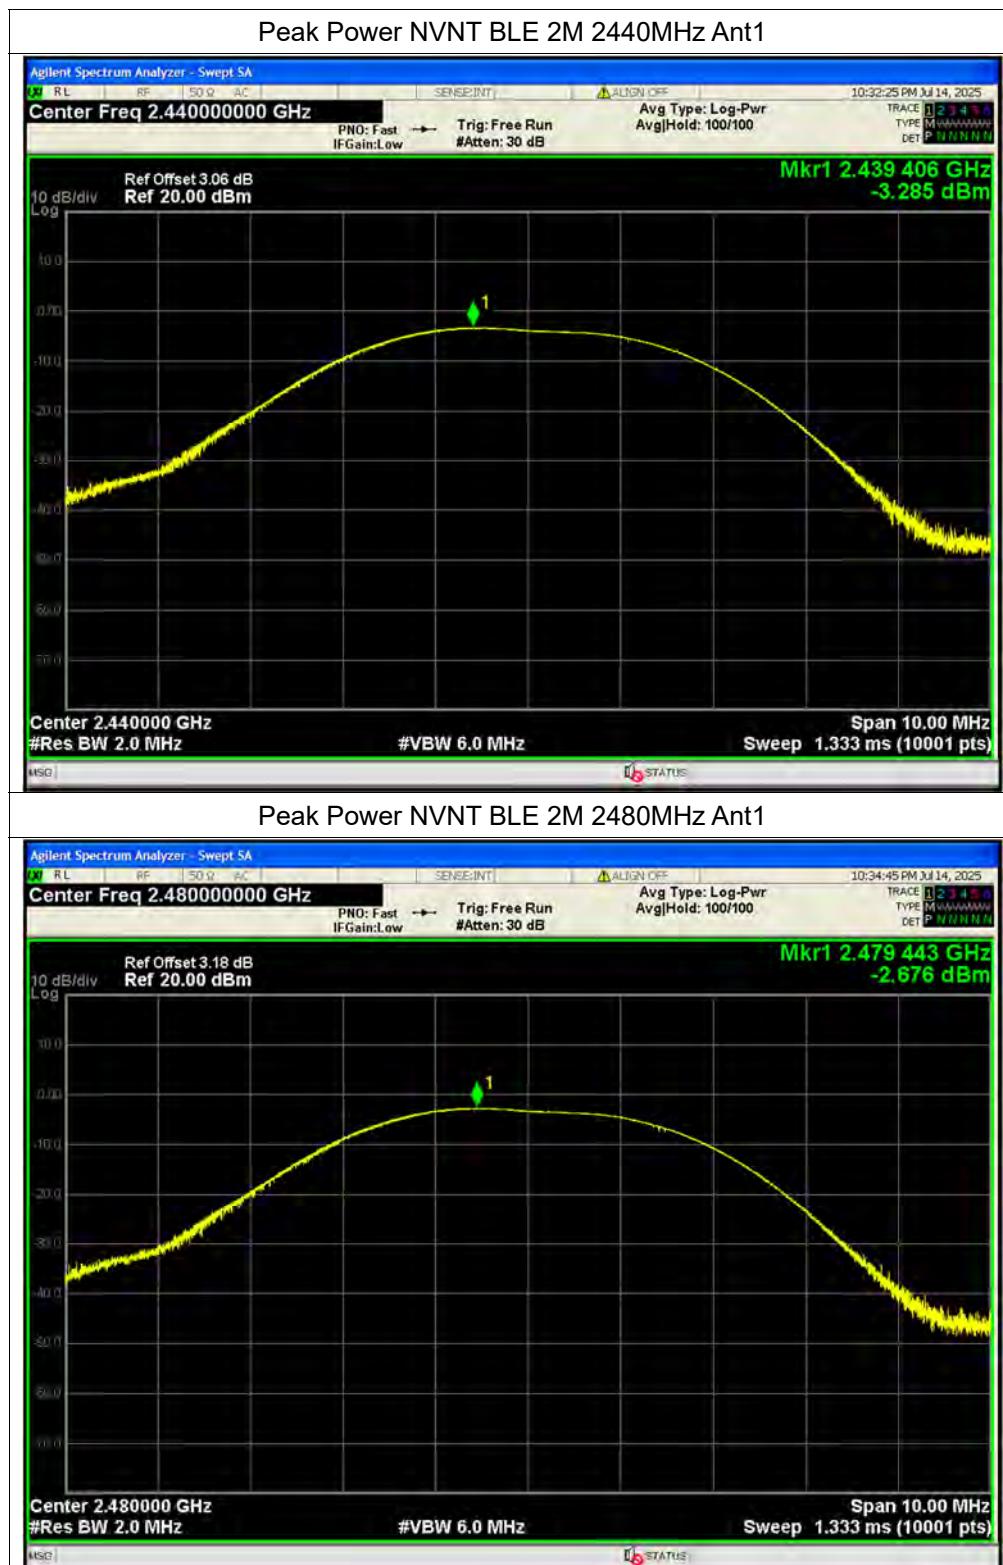


MORLAB

Shenzhen Morlab Communications Technology Co., Ltd.
FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

Tel: 86-755-36698555
Fax: 86-755-36698525
Http://www.morlab.cn
E-mail: service@morlab.cn

**A.3. Maximum Average Conducted Output Power**

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Conducted Power (dBm)	Total Conducted Power (W)	Limit Conducted (dBm)	Verdict
NVNT	BLE 1M	2402	Ant1	-6.87	2.14	-4.73	0.00034	30	Pass
NVNT	BLE 1M	2440	Ant1	-6.25	2.14	-4.11	0.00039	30	Pass
NVNT	BLE 1M	2480	Ant1	-5.69	2.14	-3.55	0.00044	30	Pass
NVNT	BLE 2M	2402	Ant1	-9.75	4.91	-4.84	0.00033	30	Pass
NVNT	BLE 2M	2440	Ant1	-8.93	4.92	-4.01	0.0004	30	Pass
NVNT	BLE 2M	2480	Ant1	-8.54	4.91	-3.63	0.00043	30	Pass

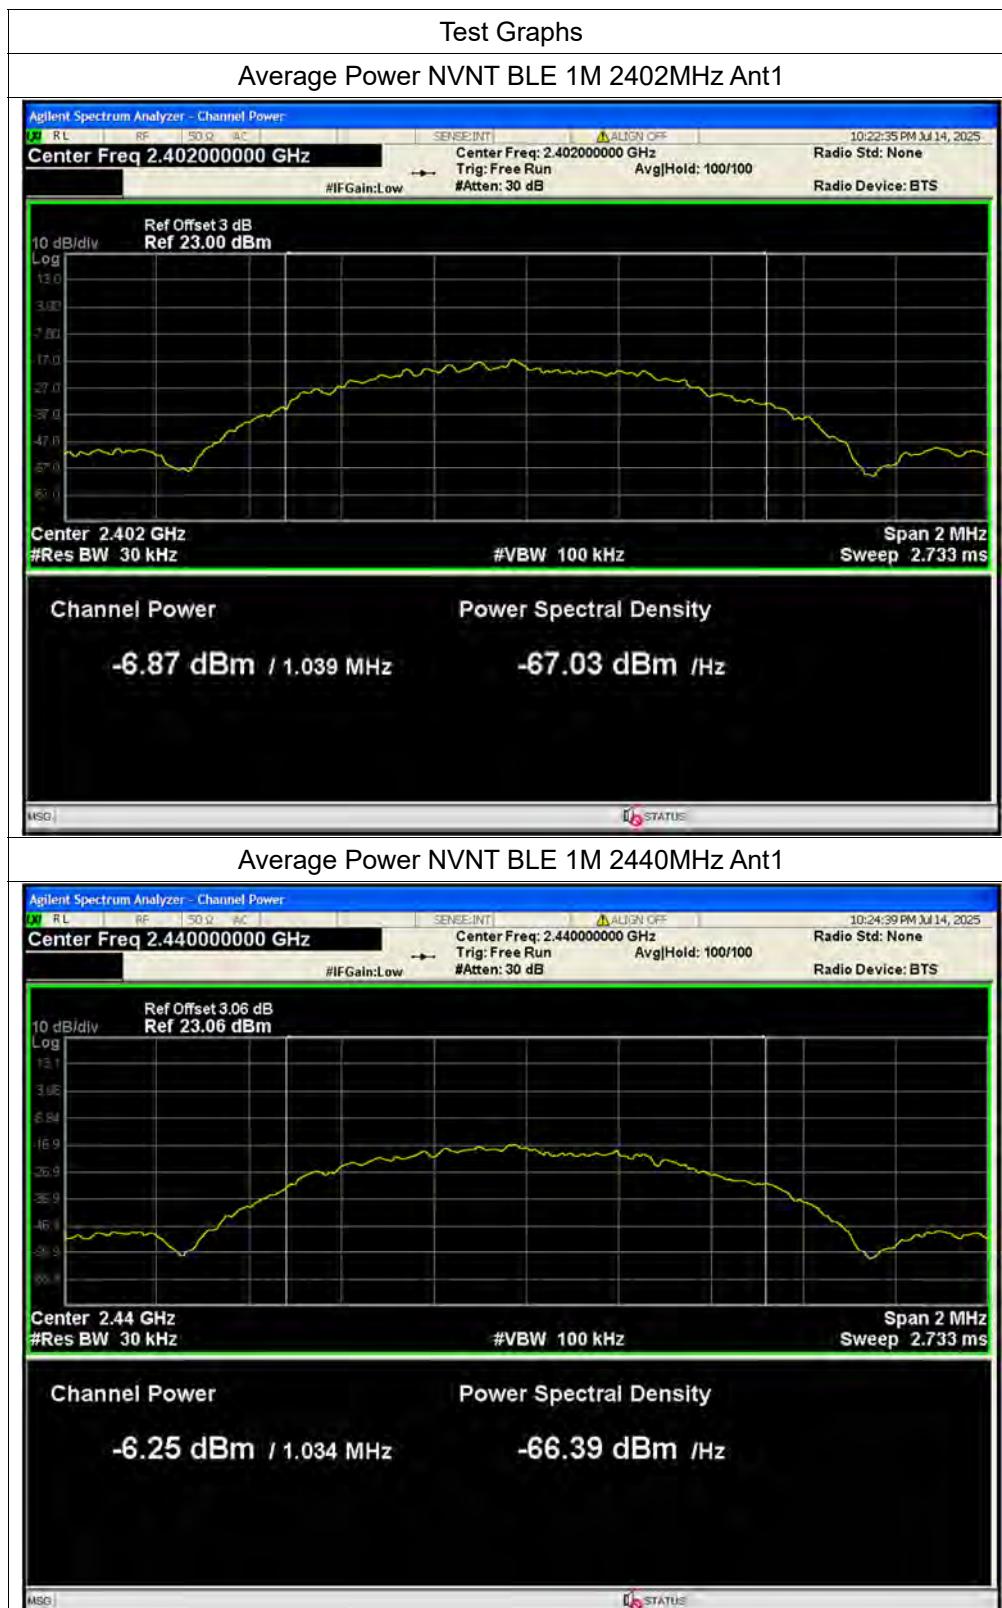



REPORT No.: SZ25070062W01



MORLAB

Shenzhen Morlab Communications Technology Co., Ltd.
FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

Tel: 86-755-36698555 Fax: 86-755-36698525
Http://www.morlab.cn E-mail: service@morlab.cn



REPORT No.: SZ25070062W01




MORLAB


Shenzhen Morlab Communications Technology Co., Ltd.
FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China


Tel: 86-755-36698555 Fax: 86-755-36698525
Http://www.morlab.cn E-mail: service@morlab.cn

**A.4. 6 dB Bandwidth**

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	BLE 1M	2402	Ant1	0.6877	0.5	Pass
NVNT	BLE 1M	2440	Ant1	0.6889	0.5	Pass
NVNT	BLE 1M	2480	Ant1	0.6911	0.5	Pass
NVNT	BLE 2M	2402	Ant1	1.137	0.5	Pass
NVNT	BLE 2M	2440	Ant1	1.138	0.5	Pass
NVNT	BLE 2M	2480	Ant1	1.115	0.5	Pass

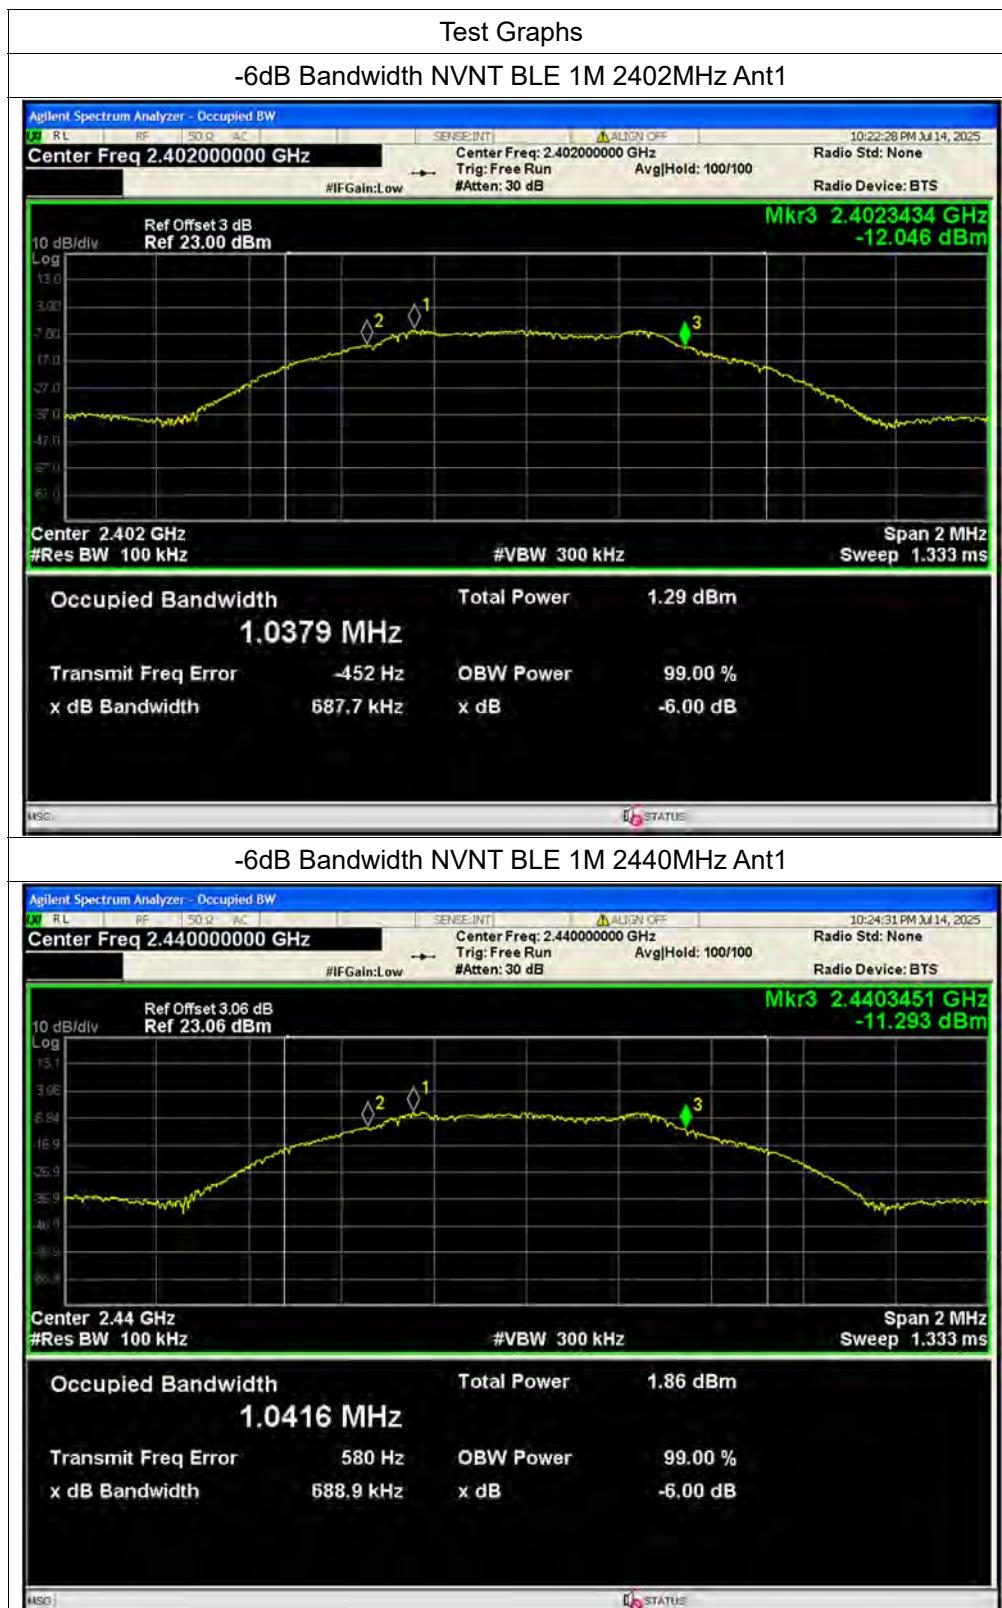

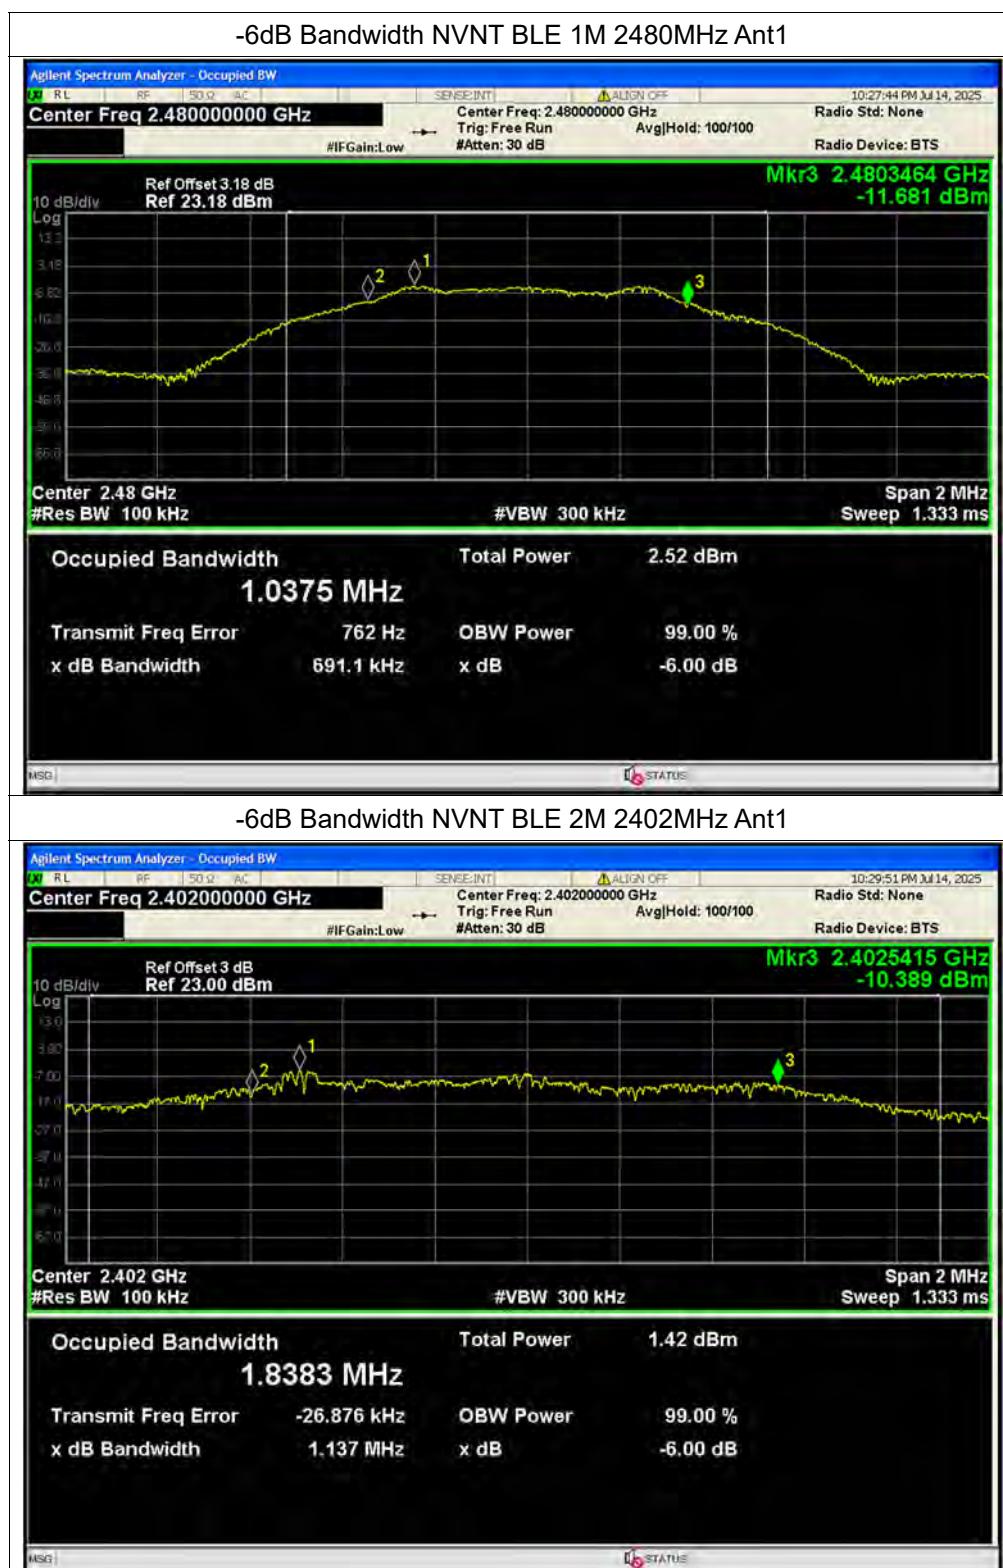


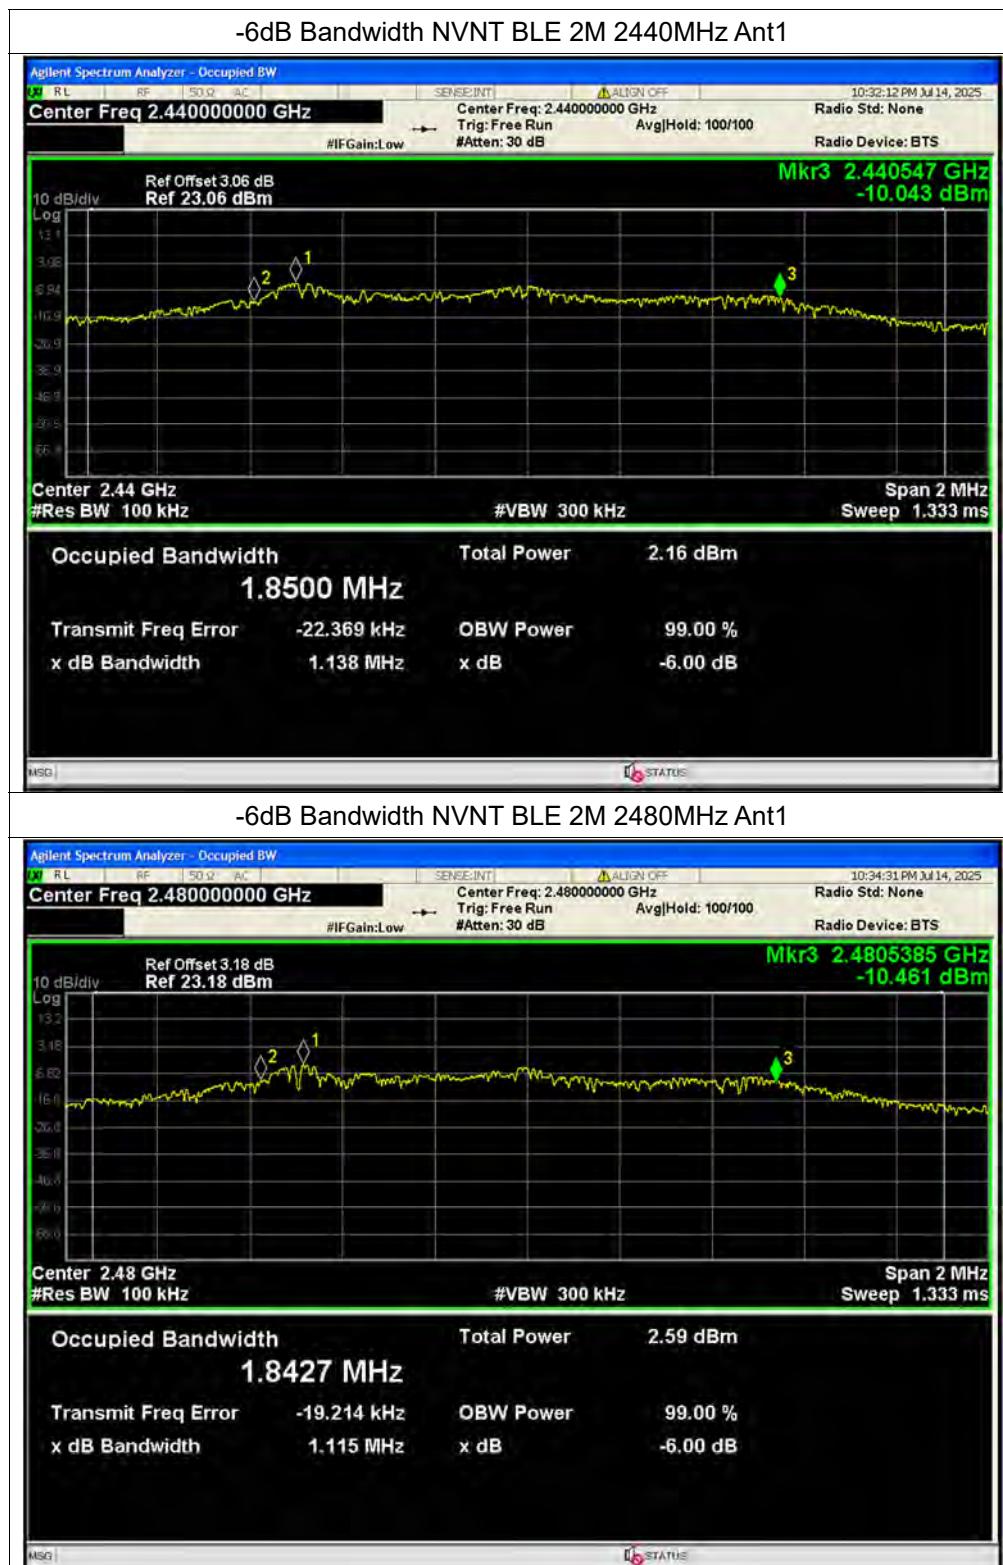






A.5. Conducted Spurious Emissions


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	Ant1	-33.82	-20	Pass
NVNT	BLE 1M	2440	Ant1	-34.48	-20	Pass
NVNT	BLE 1M	2480	Ant1	-34.57	-20	Pass
NVNT	BLE 2M	2402	Ant1	-34.47	-20	Pass
NVNT	BLE 2M	2440	Ant1	-34.74	-20	Pass
NVNT	BLE 2M	2480	Ant1	-35.78	-20	Pass

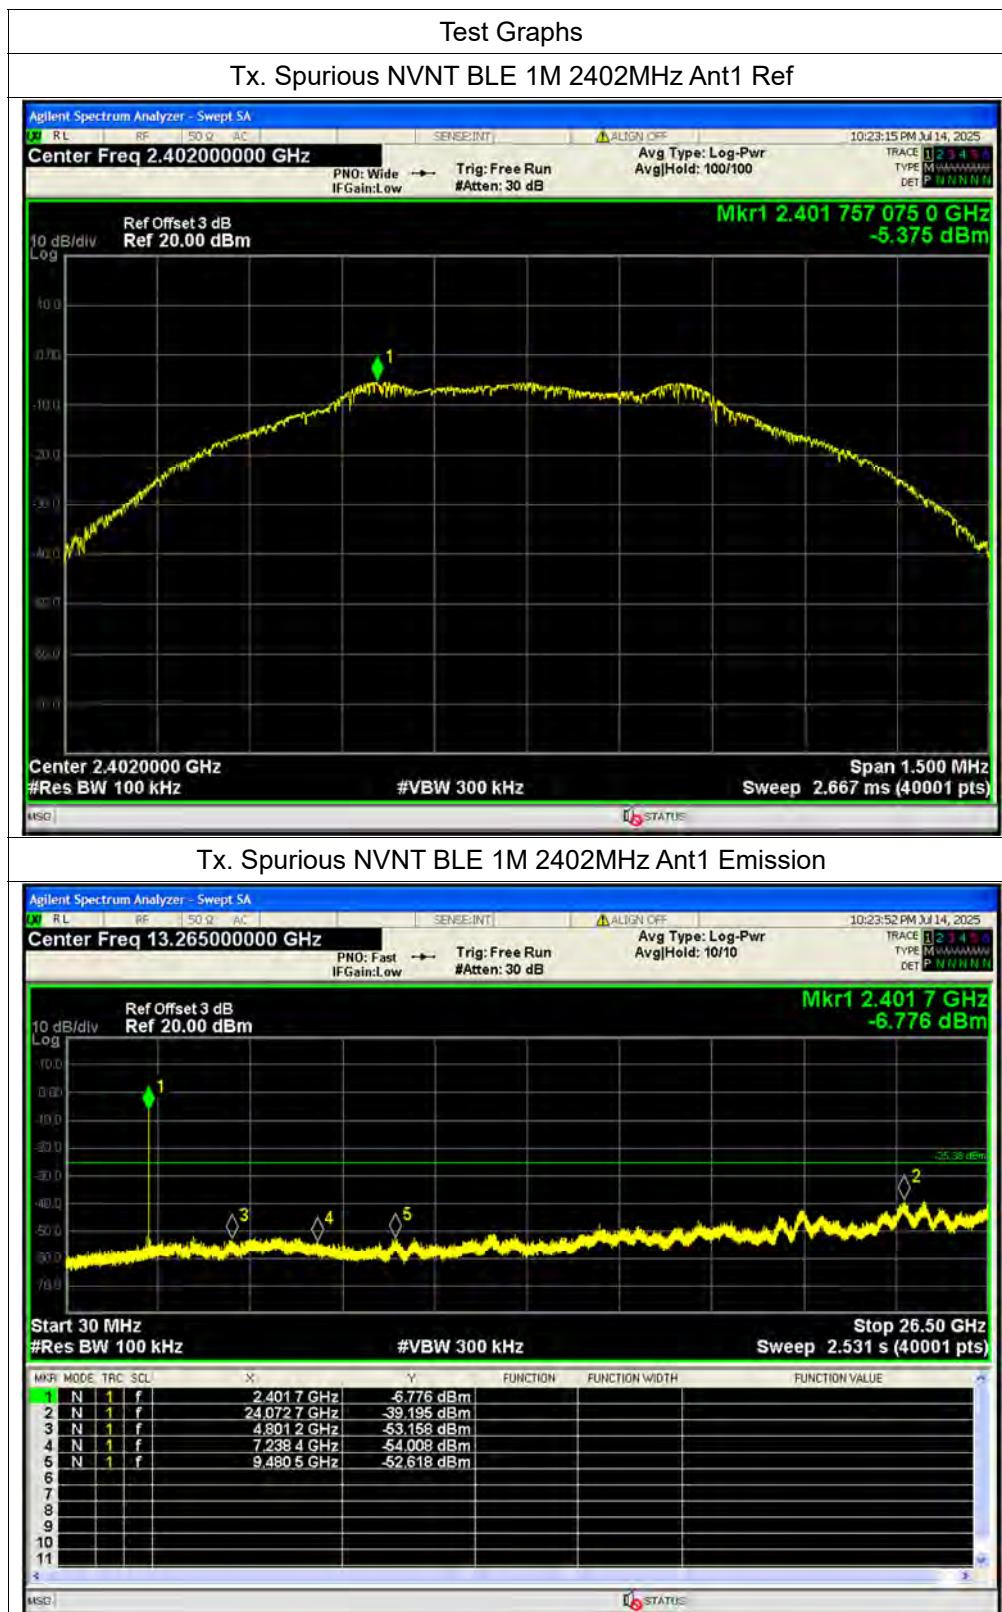


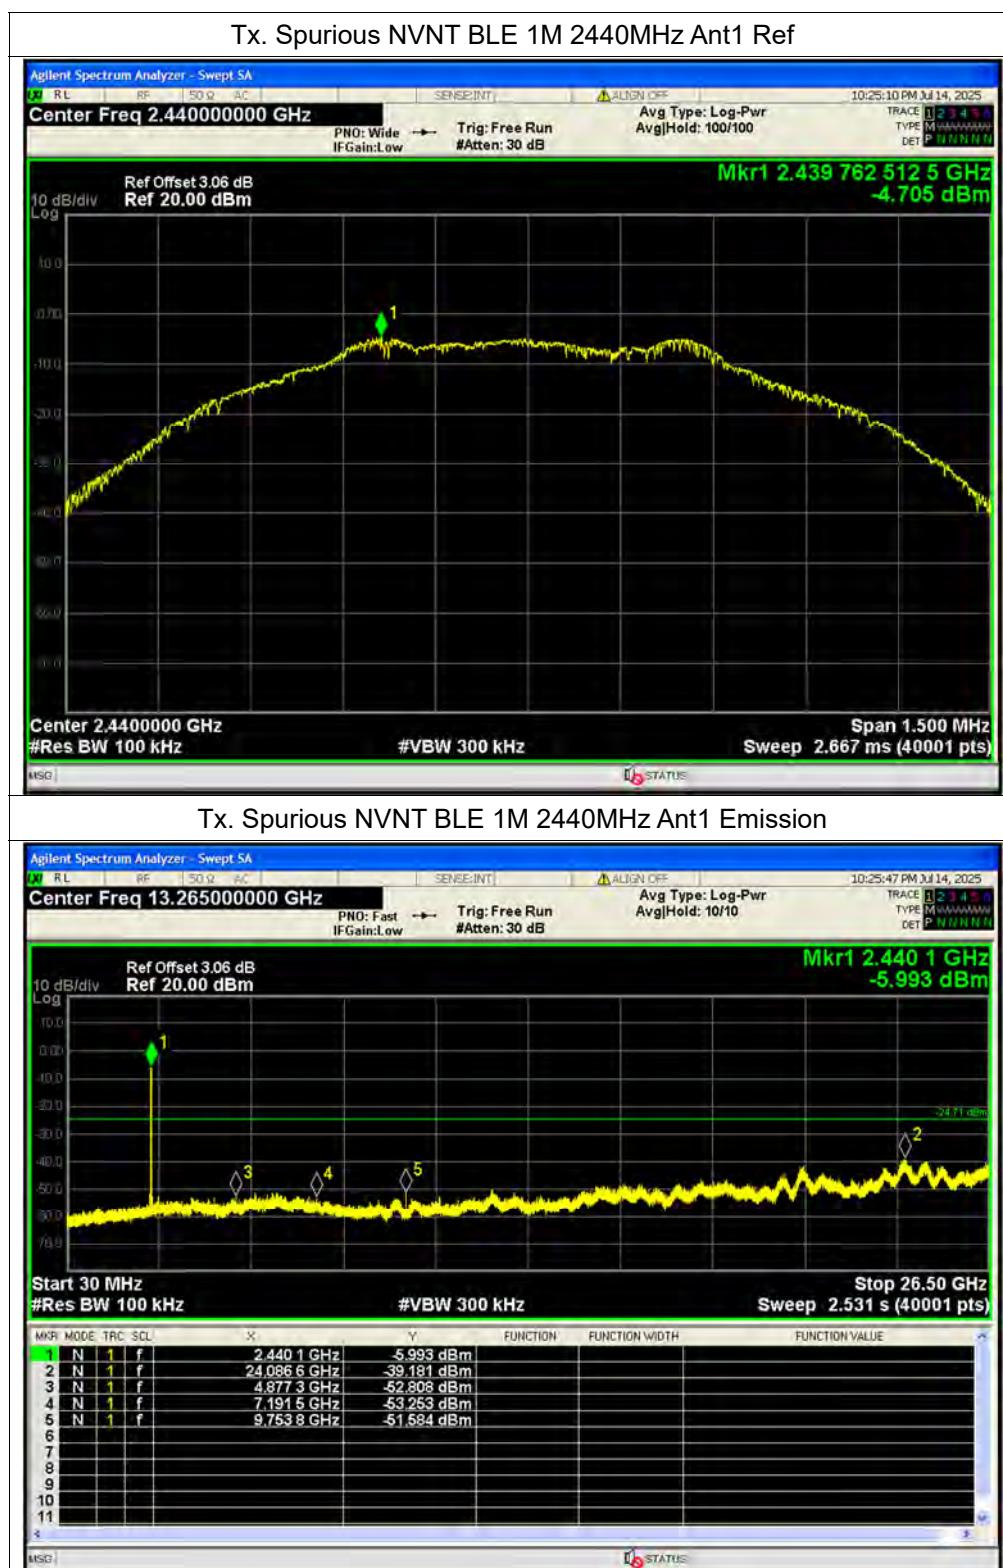

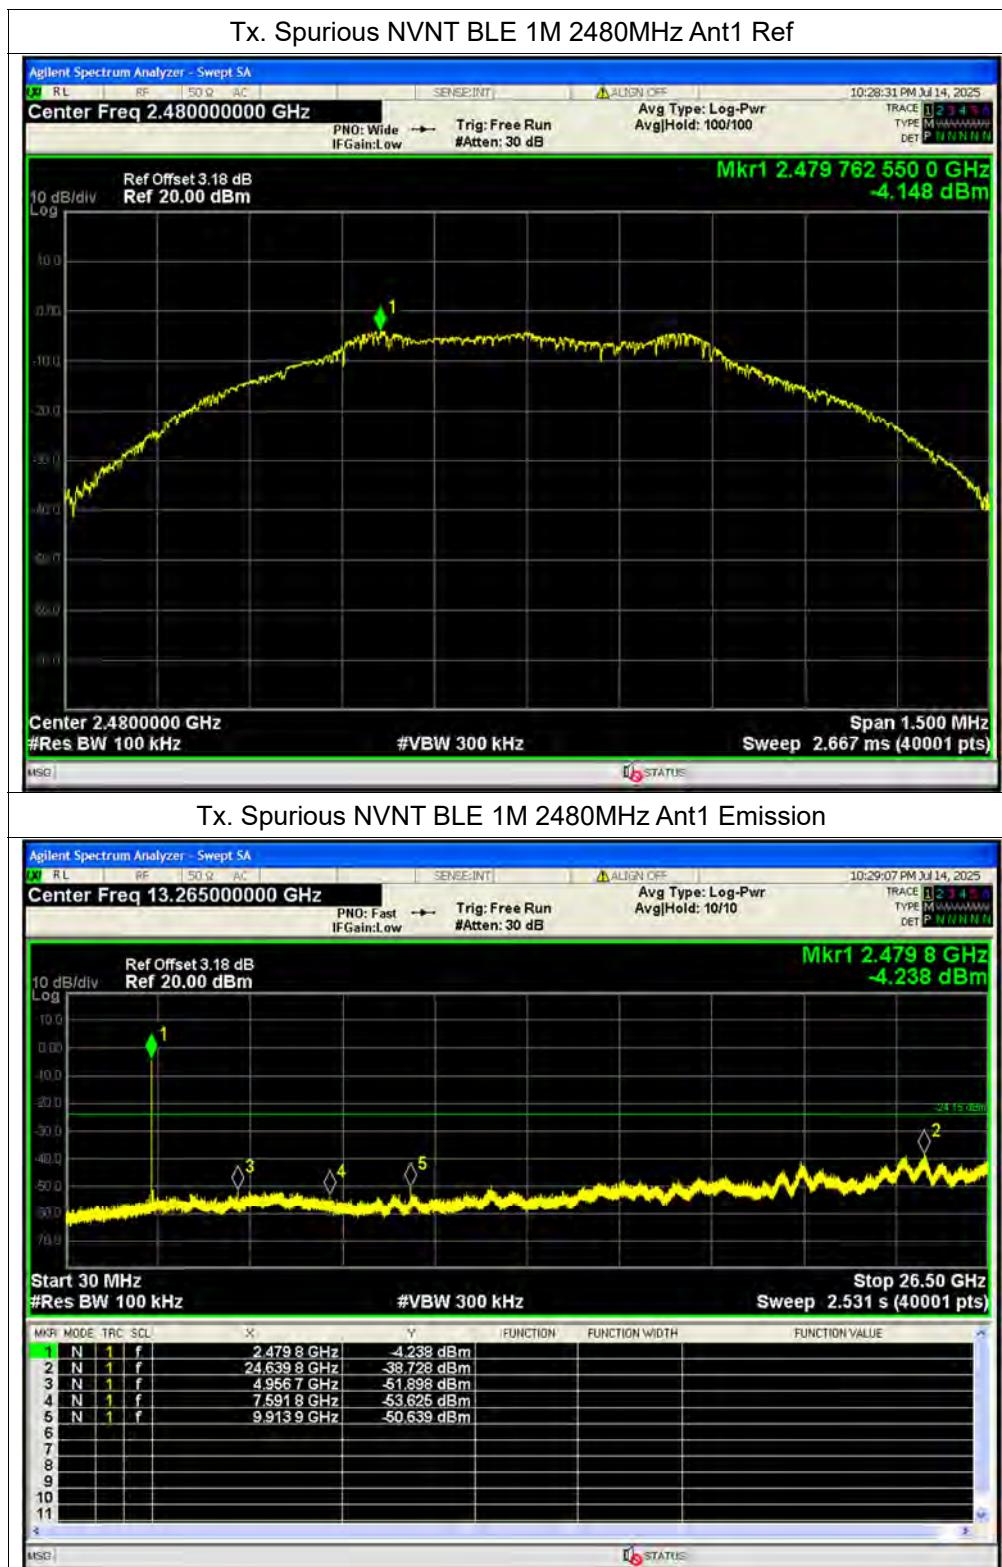

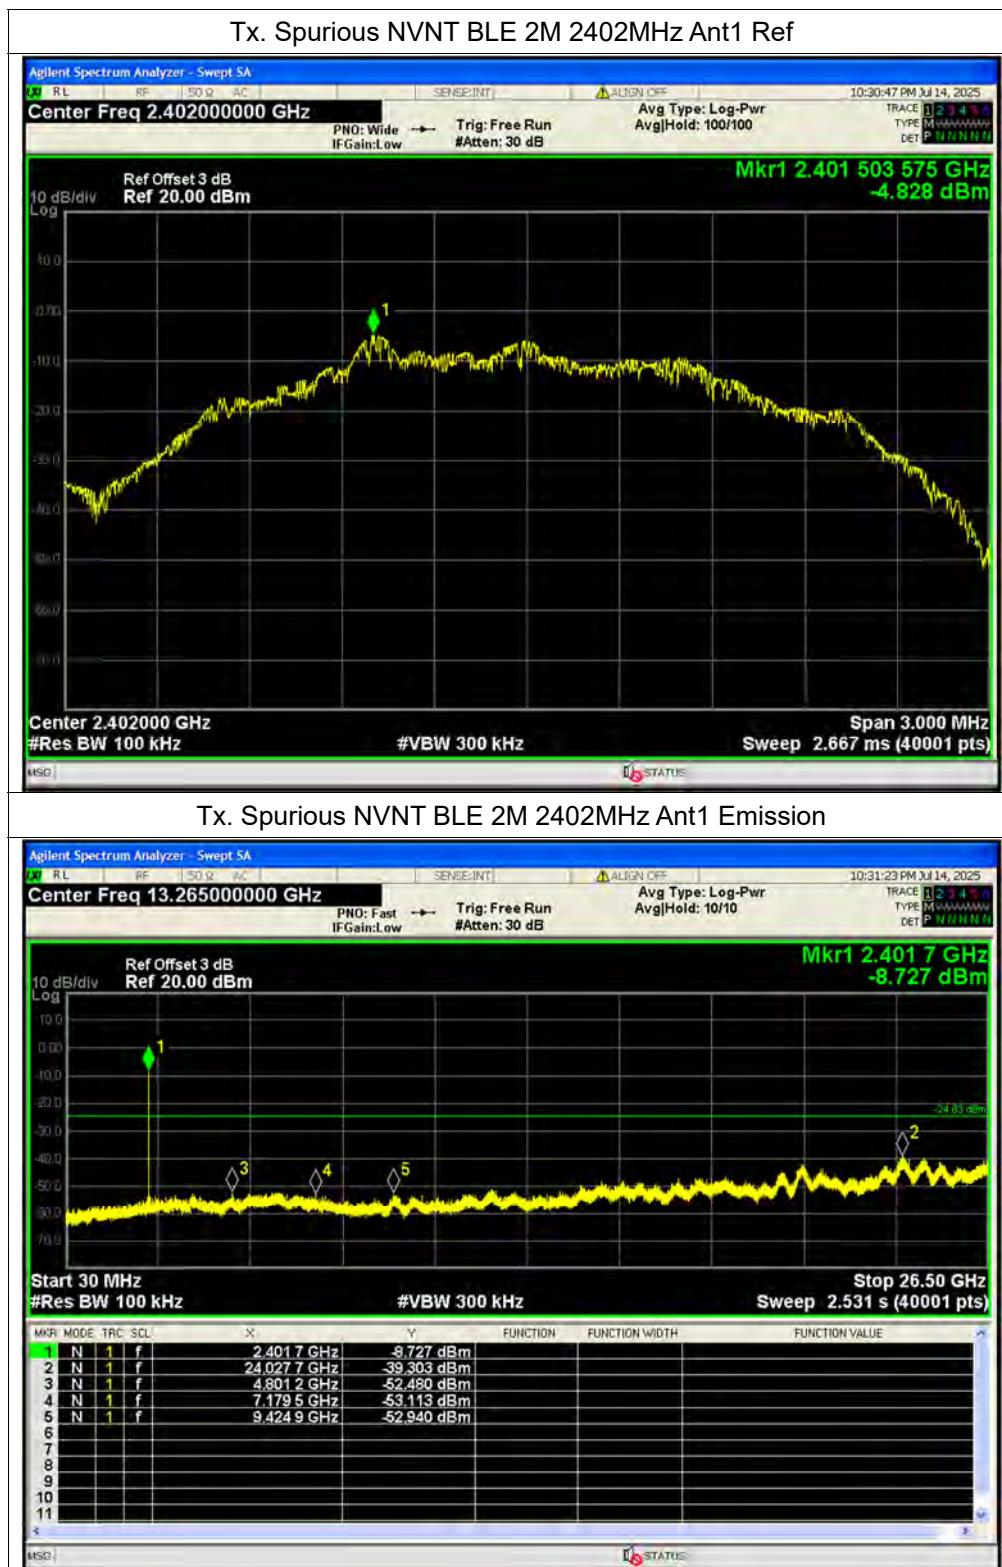


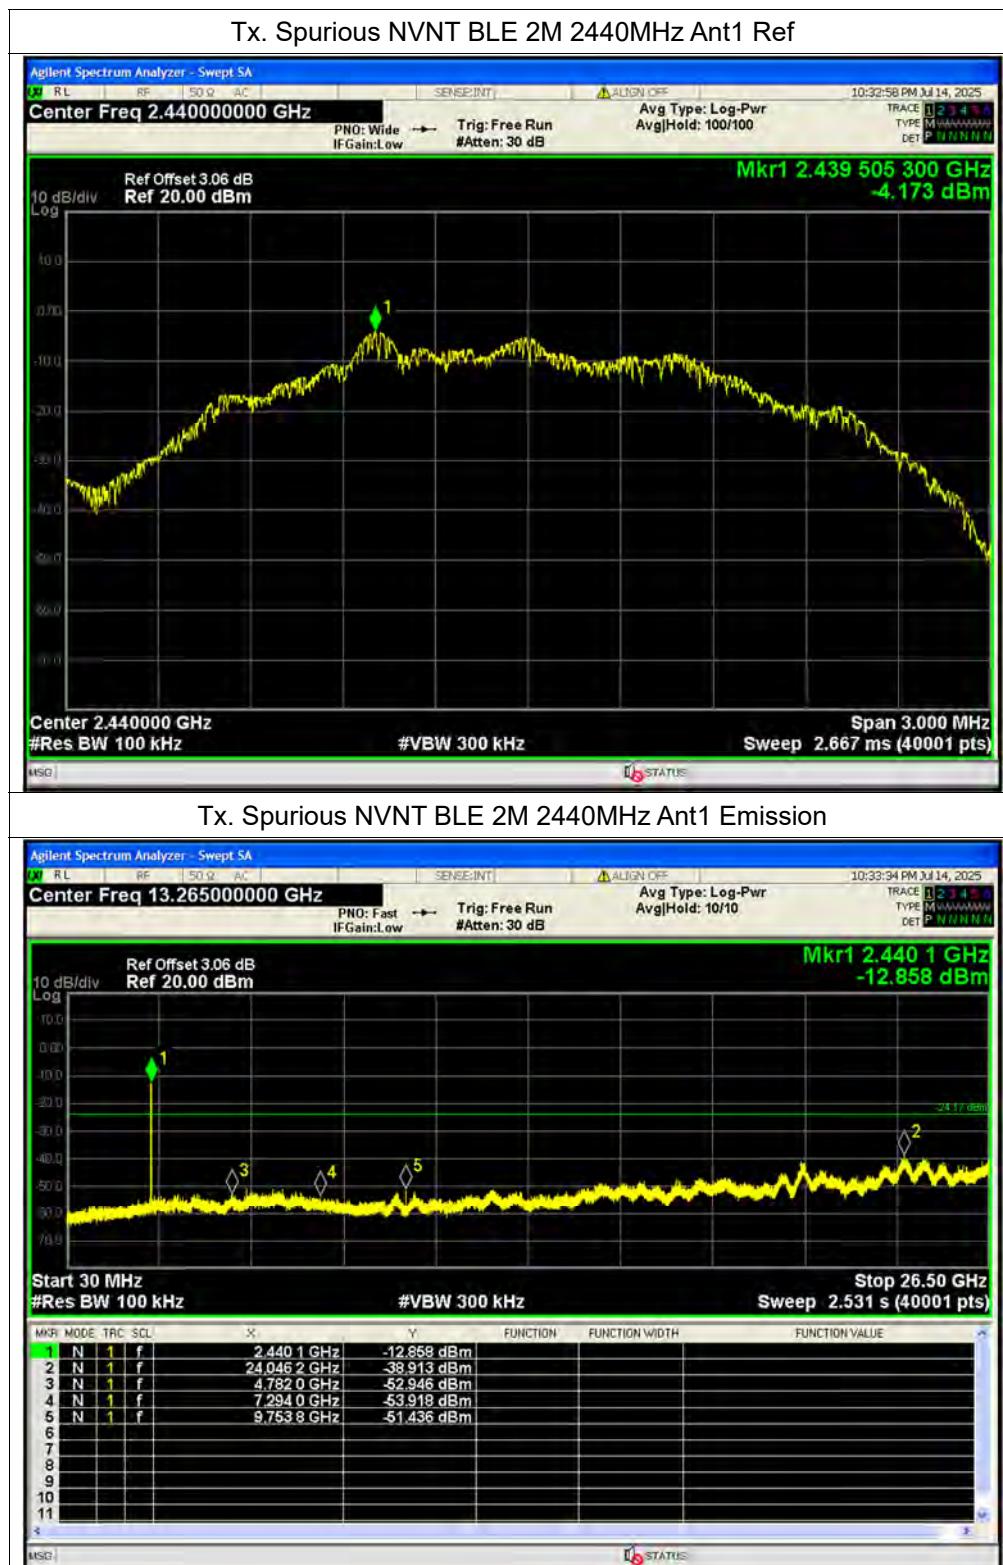

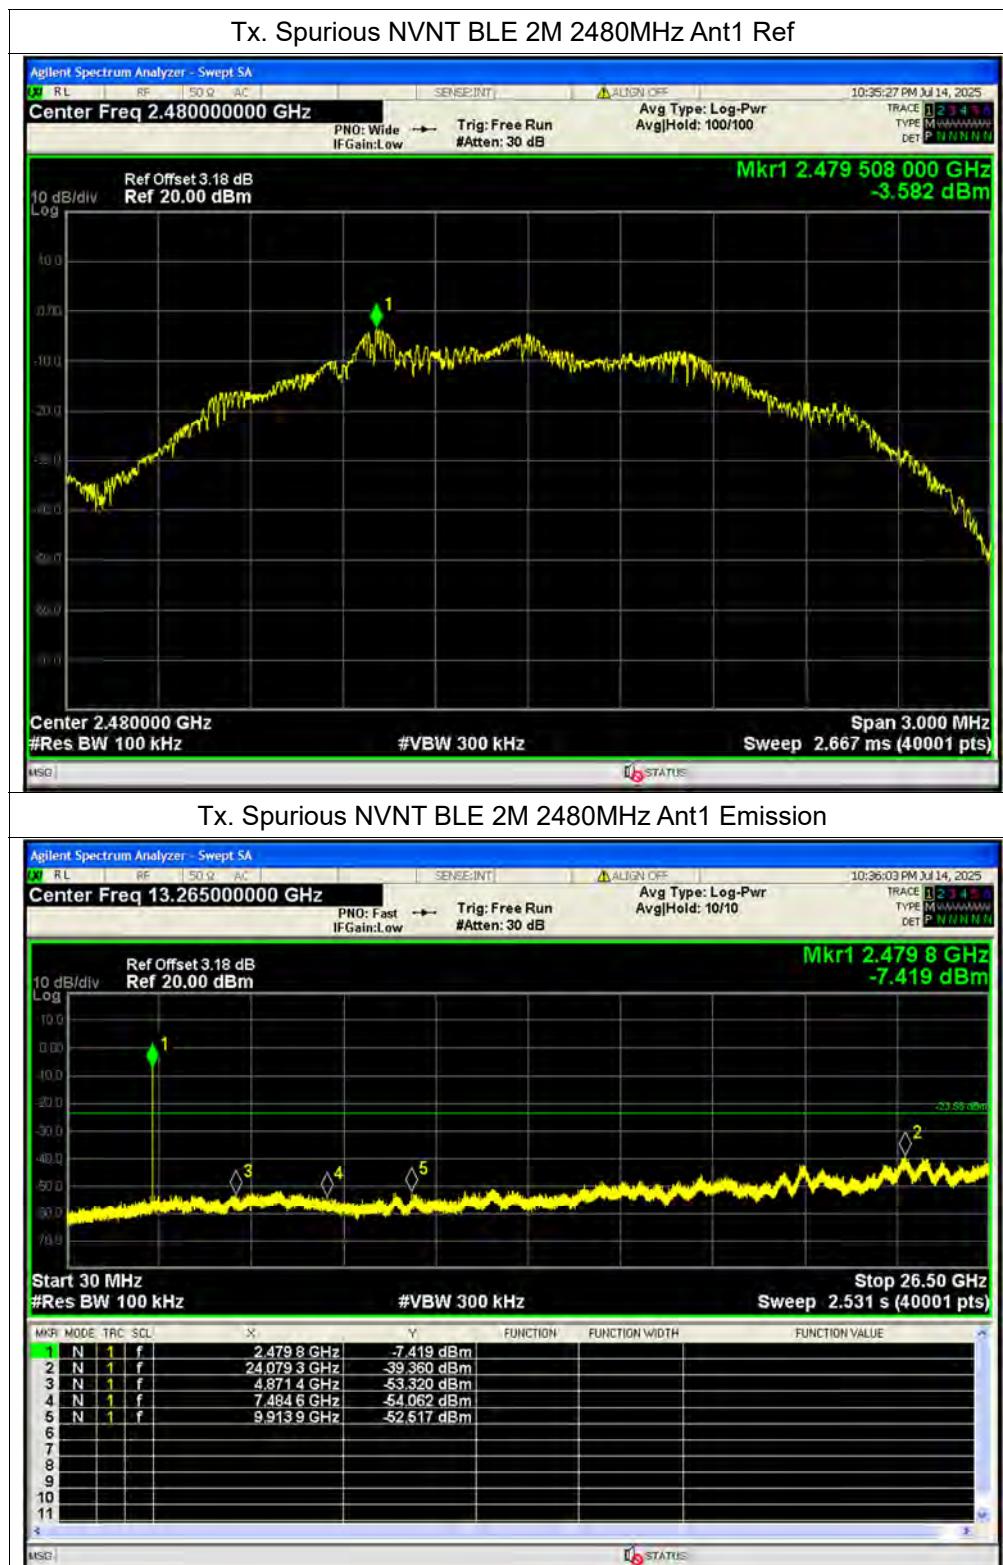


**A.6. Band Edge**

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	Ant1	-29.99	-20	Pass
NVNT	BLE 1M	2480	Ant1	-52.43	-20	Pass
NVNT	BLE 2M	2402	Ant1	-28.54	-20	Pass
NVNT	BLE 2M	2480	Ant1	-52.59	-20	Pass

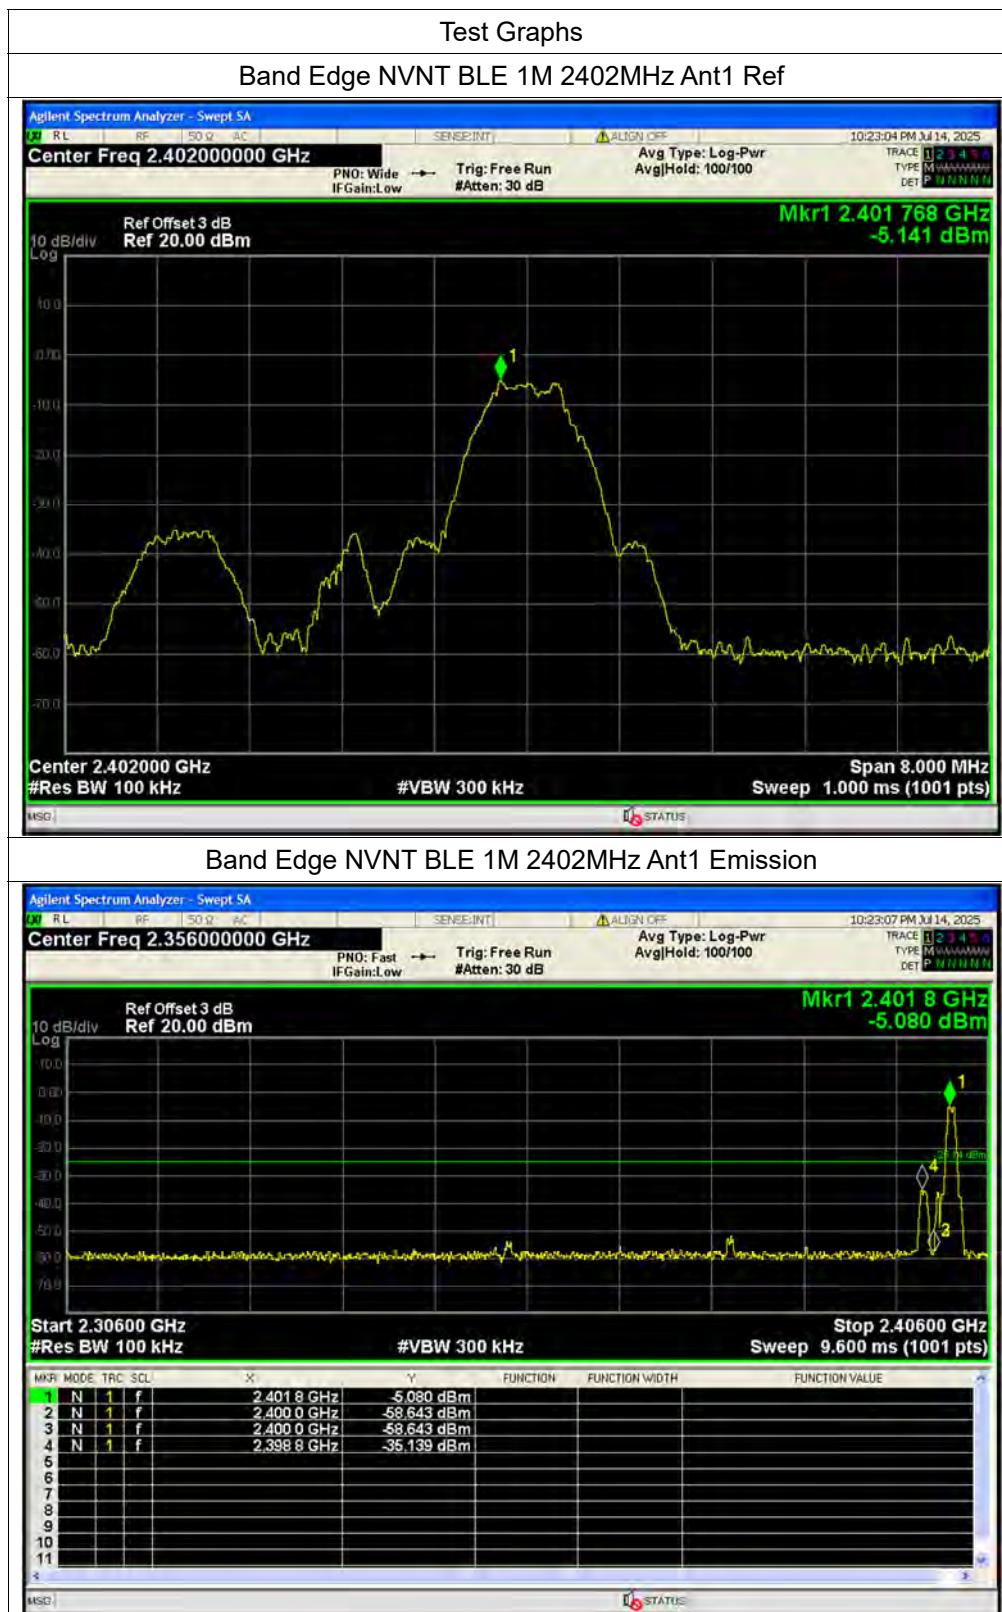




REPORT No.: SZ25070062W01

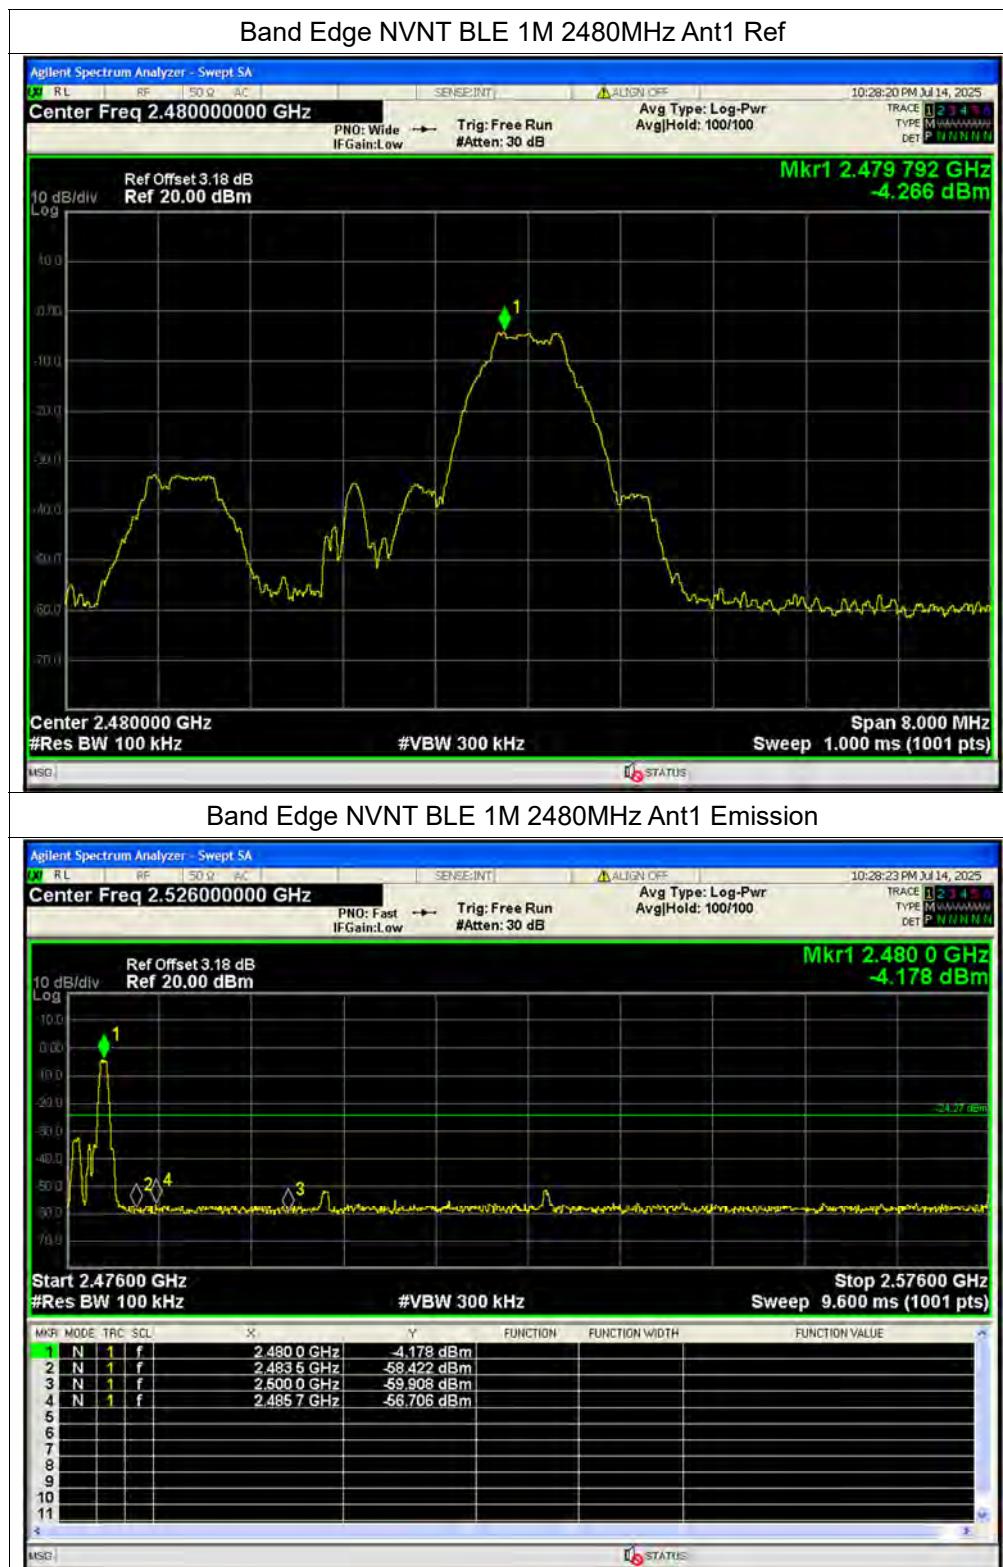


MORLAB

Shenzhen Morlab Communications Technology Co., Ltd.
FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

Tel: 86-755-36698555 Fax: 86-755-36698525
[Http://www.morlab.cn](http://www.morlab.cn) E-mail: service@morlab.cn

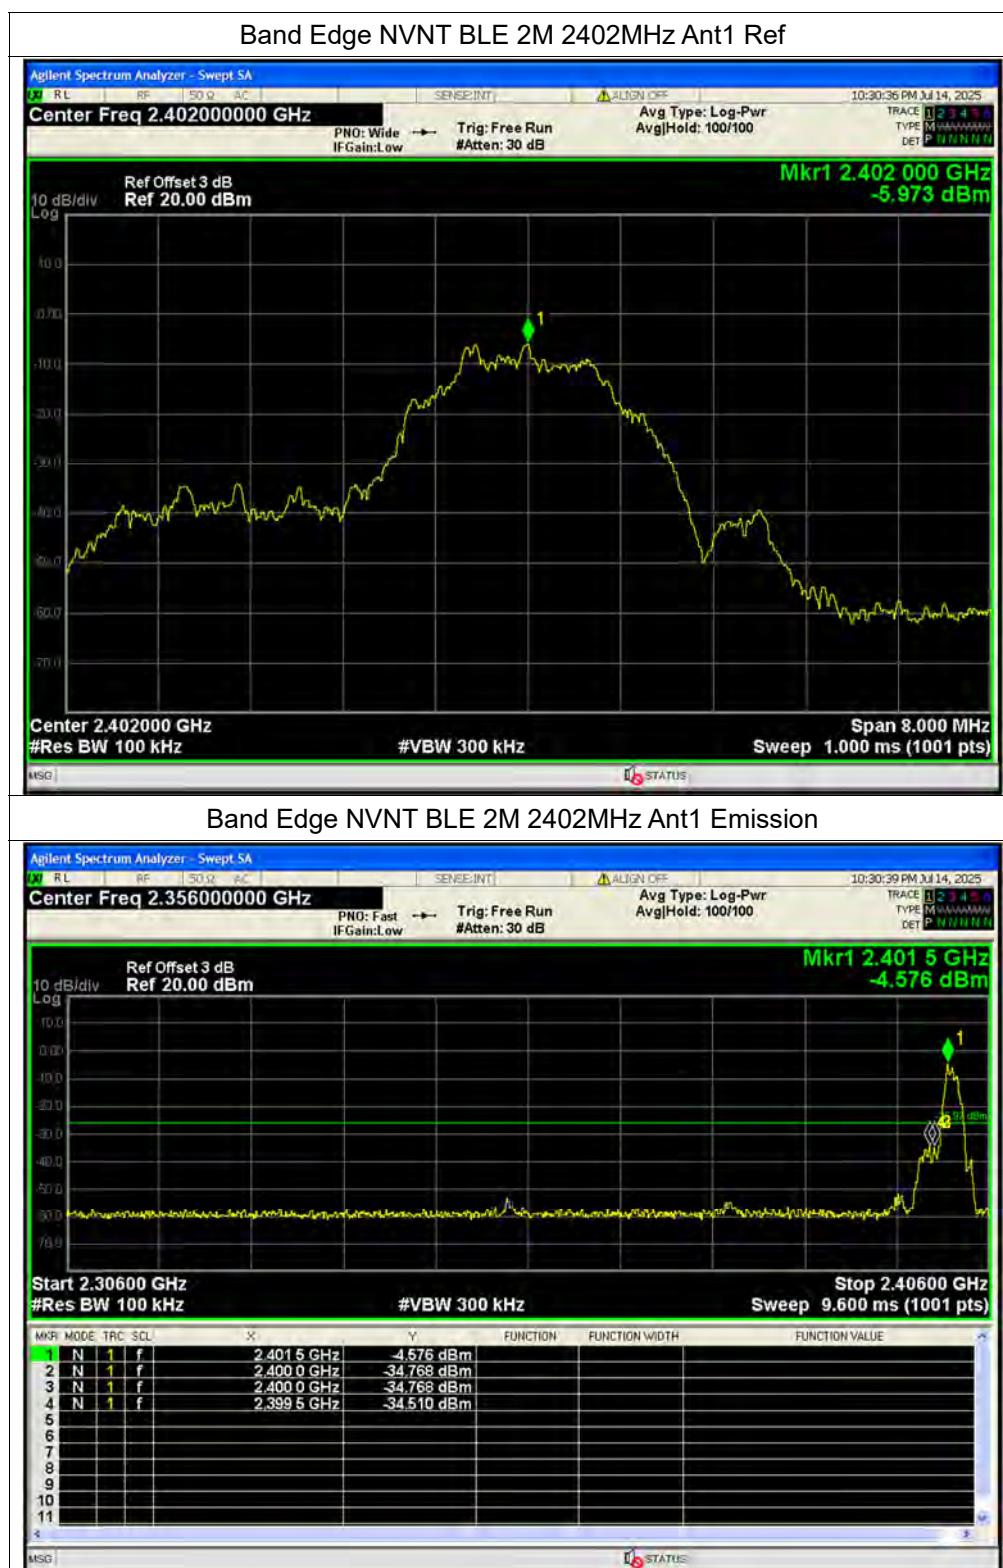

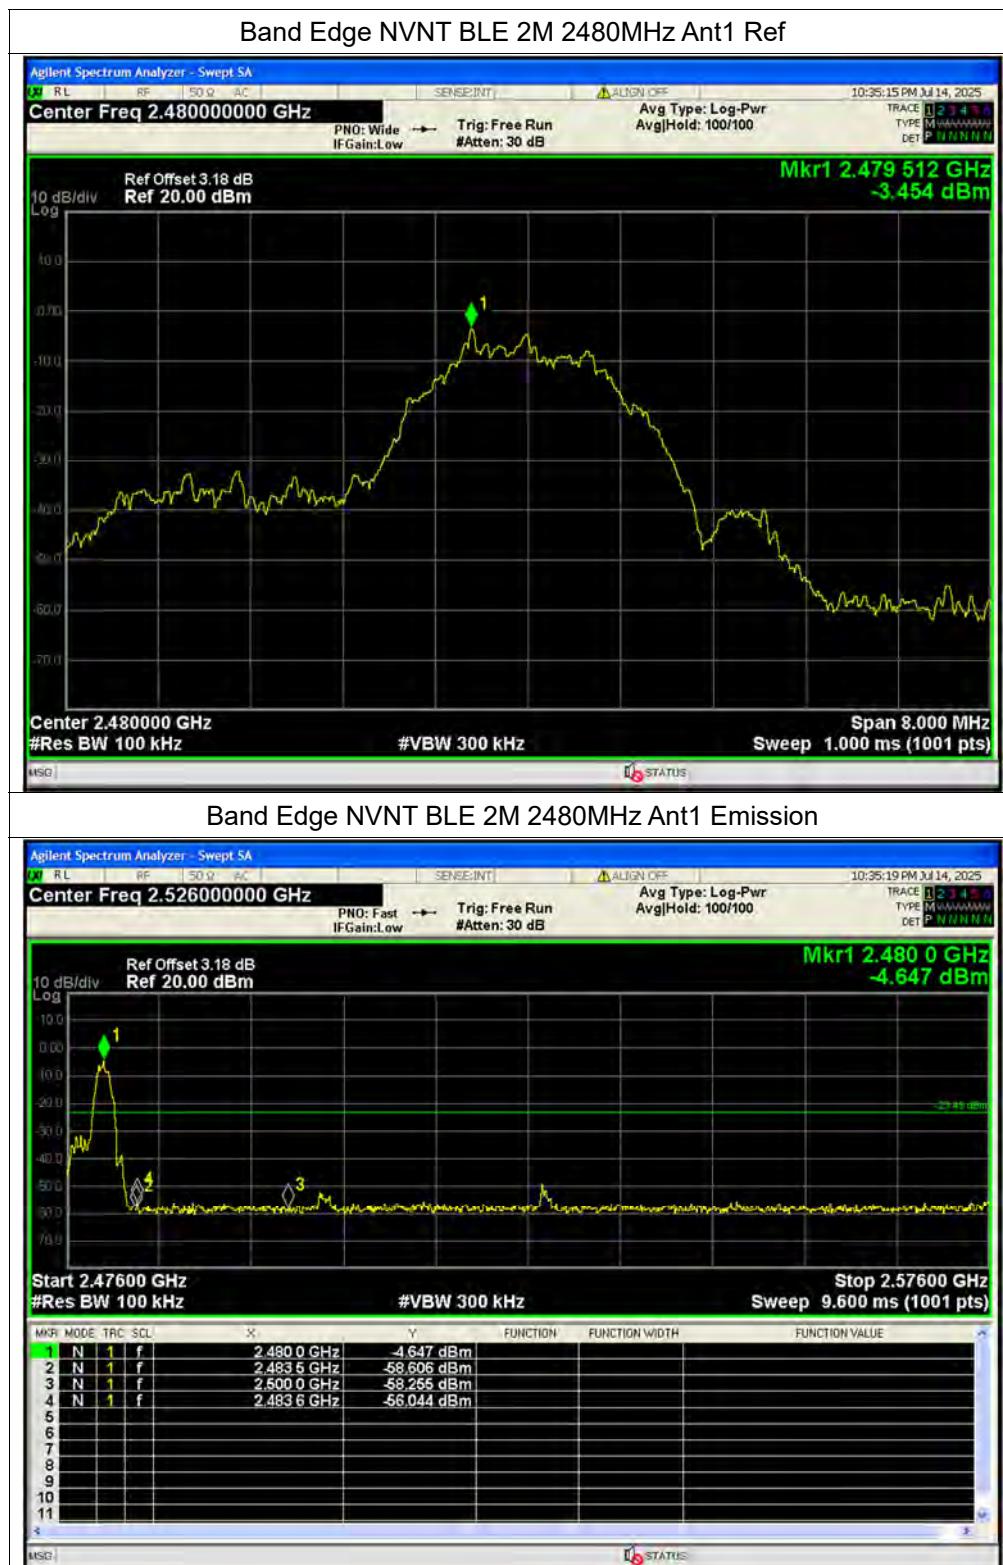




A.7. Power Spectral Density

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm/3kHz)	Duty Factor (dB)	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
NVNT	BLE 1M	2402	Ant1	-19.64	0	-19.64	8	Pass
NVNT	BLE 1M	2440	Ant1	-19.01	0	-19.01	8	Pass
NVNT	BLE 1M	2480	Ant1	-18.49	0	-18.49	8	Pass
NVNT	BLE 2M	2402	Ant1	-21.58	0	-21.58	8	Pass
NVNT	BLE 2M	2440	Ant1	-20.94	0	-20.94	8	Pass
NVNT	BLE 2M	2480	Ant1	-20.45	0	-20.45	8	Pass





REPORT No.: SZ25070062W01

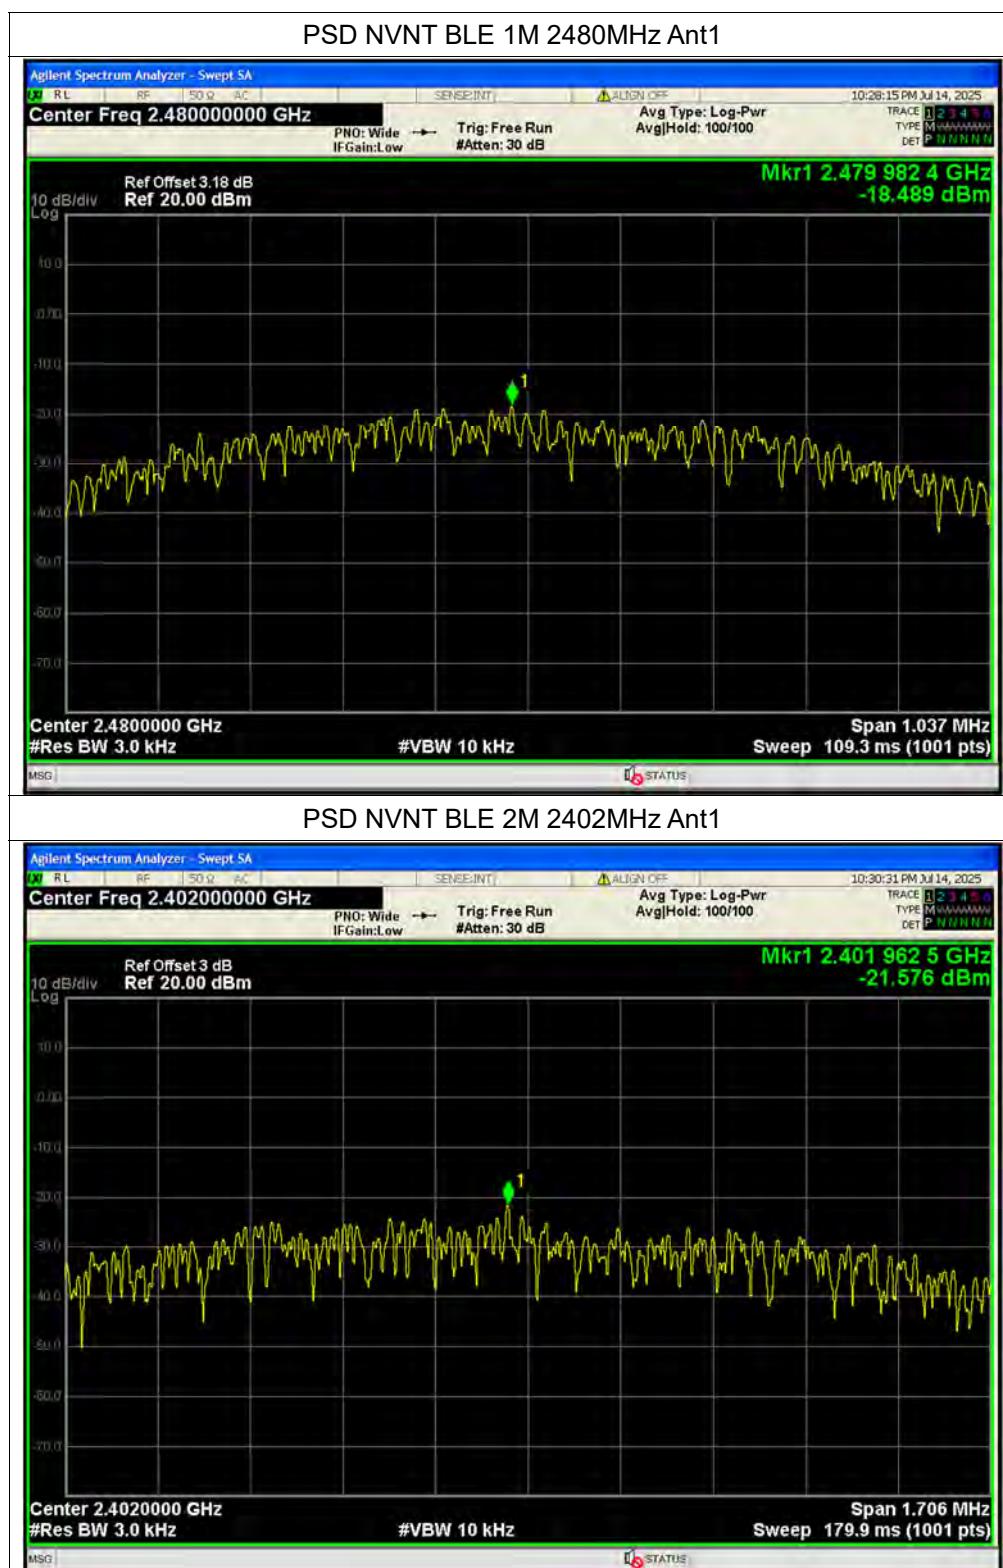


MORLAB

Shenzhen Morlab Communications Technology Co., Ltd.
FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

Tel: 86-755-36698555 Fax: 86-755-36698525
Http://www.morlab.cn E-mail: service@morlab.cn



REPORT No.: SZ25070062W01

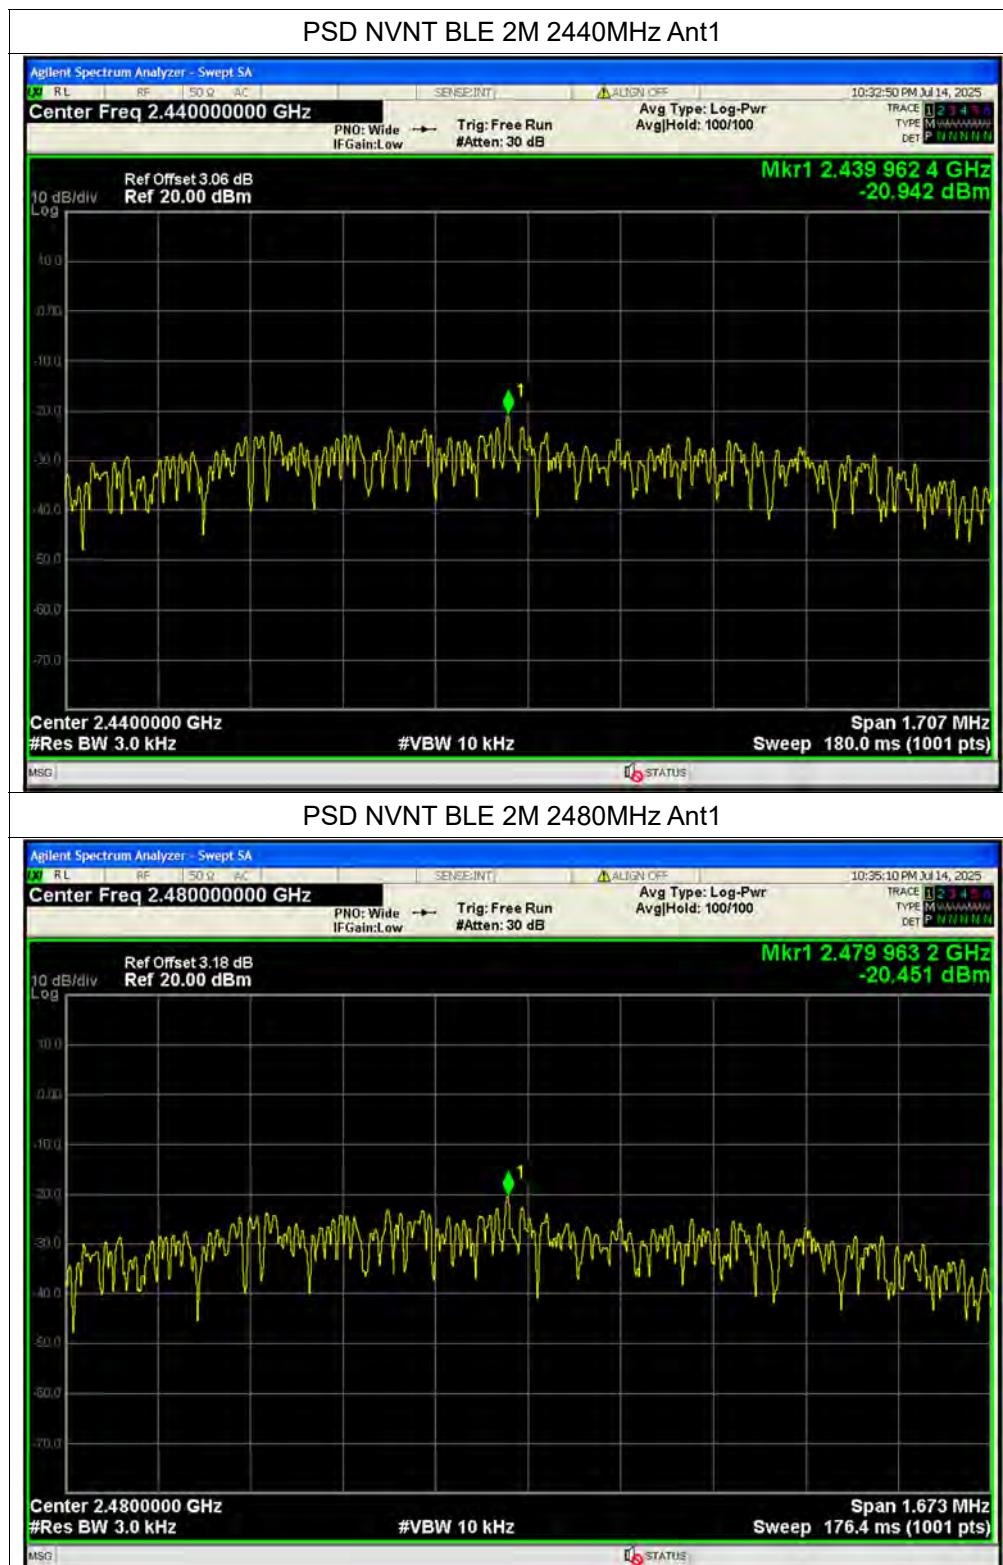

MORLAB

Shenzhen Morlab Communications Technology Co., Ltd.
FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

Tel: 86-755-36698555 Fax: 86-755-36698525
Http://www.morlab.cn E-mail: service@morlab.cn



A.8. Conducted Emission

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Set RBW=9kHz, VBW=30kHz. Refer to recorded points and plots below.

Note: Both of the test voltage AC 120V/60Hz and AC 230V/50Hz were considered and tested respectively, only the results of the worst case AC 120V/60Hz were recorded in this report.

A. Test Setup:

Test Mode: EUT+Adapter+Data cable+Mobile phone+APP link+Fill light+Camera+BLE TX


Test voltage: AC 120V/60Hz

The measurement results are obtained as below:

$$E [\text{dB}\mu\text{V}] = U_R + L_{\text{Cable loss}} [\text{dB}] + A_{\text{Factor}}$$


U_R : Receiver Reading

A_{Factor} : Voltage division factor of LISN

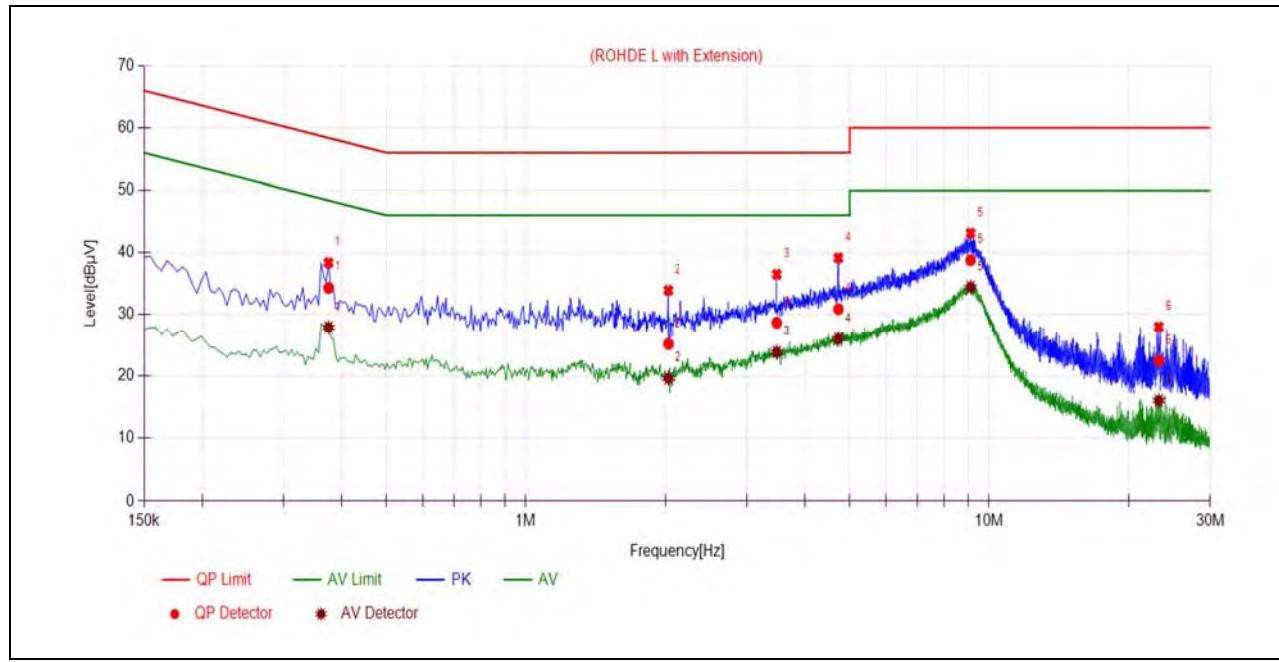B. Test Plot:


(L Phase)

No.	Fre. (MHz)	Emission Level (dB μ V)		Limit (dB μ V)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.3750	34.33	27.93	58.39	48.39	Line	PASS
2	2.0312	25.19	19.64	56.00	46.00		PASS
3	3.4800	28.68	23.88	56.00	46.00		PASS
4	4.7264	30.90	26.05	56.00	46.00		PASS
5	9.1189	38.81	34.48	60.00	50.00		PASS
6	23.2346	22.48	16.07	60.00	50.00		PASS

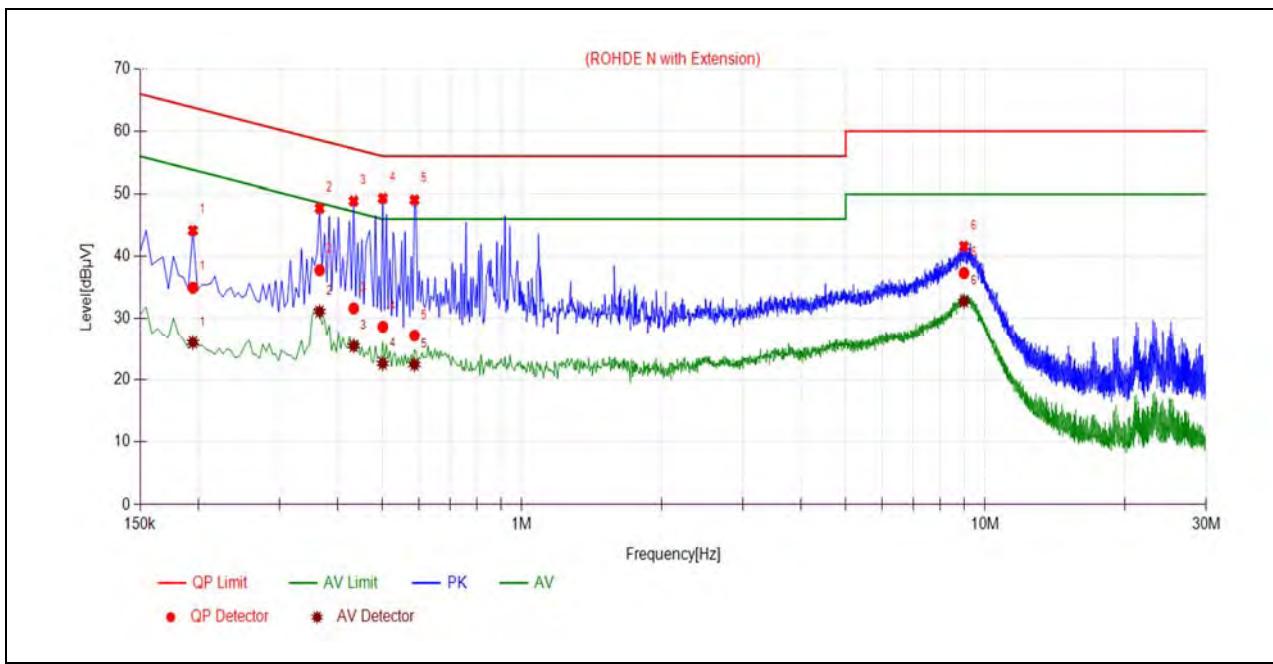

(N Phase)


No.	Fre. (MHz)	Emission Level (dB μ V)		Limit (dB μ V)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.1950	34.99	26.07	63.82	53.82	Neutral	PASS
2	0.3660	37.80	31.16	58.59	48.59		PASS
3	0.4335	31.65	25.49	57.19	47.19		PASS
4	0.5010	28.68	22.66	56.00	46.00		PASS
5	0.5865	27.22	22.48	56.00	46.00		PASS
6	9.0010	37.33	32.80	60.00	50.00		PASS

A.9. Restricted Frequency Bands

Note: Restricted Frequency Bands were performed when antenna was at vertical and horizontal polarity, and only the worse test condition (Vertical) was recorded in this test report.


1Mbps

Plot for Channel 0

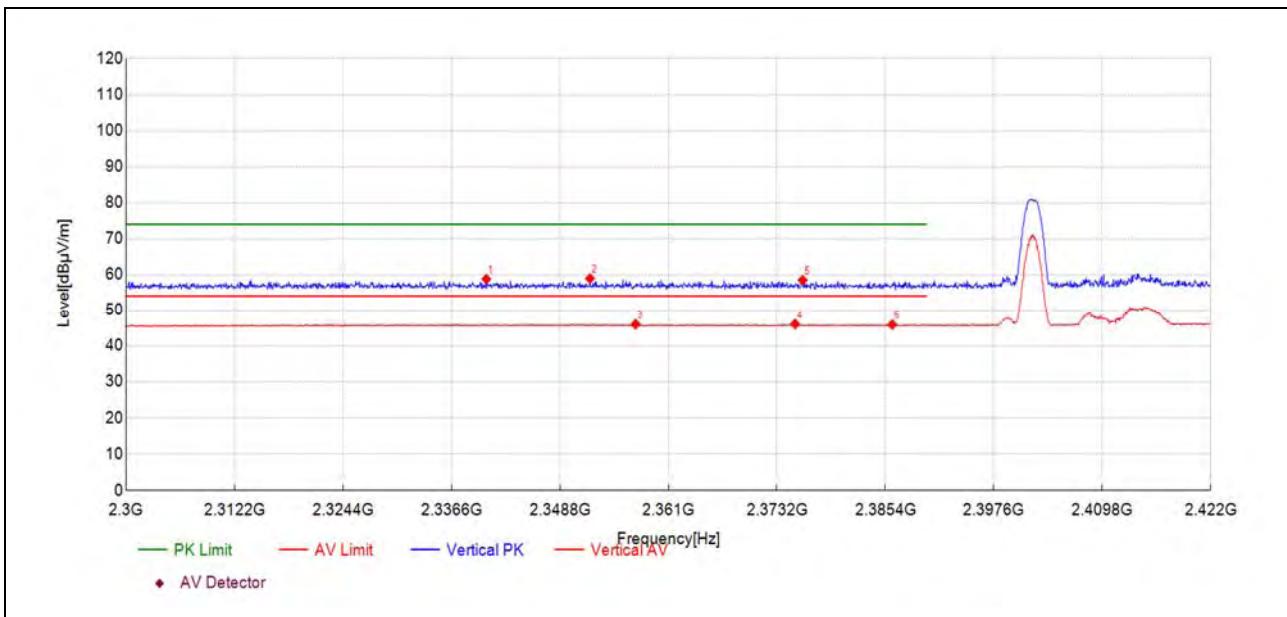

Freq. [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Angle [°]	Detect or	Polarity	Verdict
2340.52	21.4	58.78	37.370	74.00	15.22	277	PK	Vertical	PASS
2352.18	21.5	58.95	37.460	74.00	15.05	155	PK	Vertical	PASS
2357.31	8.6	46.01	37.460	54.00	7.99	33	AV	Vertical	PASS
2375.25	8.6	46.08	37.480	54.00	7.92	79	AV	Vertical	PASS
2376.11	21.0	58.48	37.480	74.00	15.52	337	PK	Vertical	PASS
2386.18	8.4	45.92	37.490	54.00	8.08	126	AV	Vertical	PASS


Plot for Channel 39

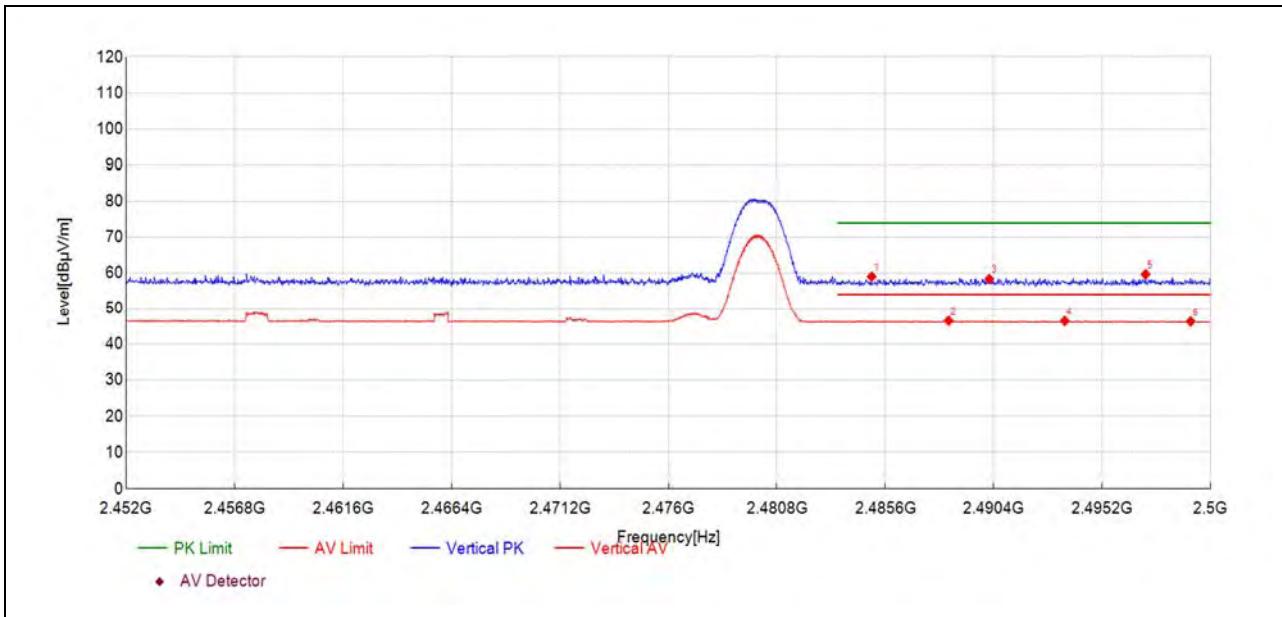

Freq. [MHz]	Reading [dB μ V]	Level [dB μ V/m]	Factor [dB/m]	Limit [dB μ V/m]	Margin [dB]	Angle [°]	Detector	Polarity	Verdict
2484.99	20.8	59.03	38.270	74.00	14.97	217	PK	Vertical	PASS
2488.40	8.2	46.49	38.270	54.00	7.51	241	AV	Vertical	PASS
2490.20	20.1	58.37	38.270	74.00	15.63	99	PK	Vertical	PASS
2493.54	8.2	46.45	38.260	54.00	7.55	76	AV	Vertical	PASS
2497.12	21.4	59.68	38.250	74.00	14.32	113	PK	Vertical	PASS
2499.11	8.1	46.32	38.250	54.00	7.68	94	AV	Vertical	PASS


2Mbps

Plot for Channel 0

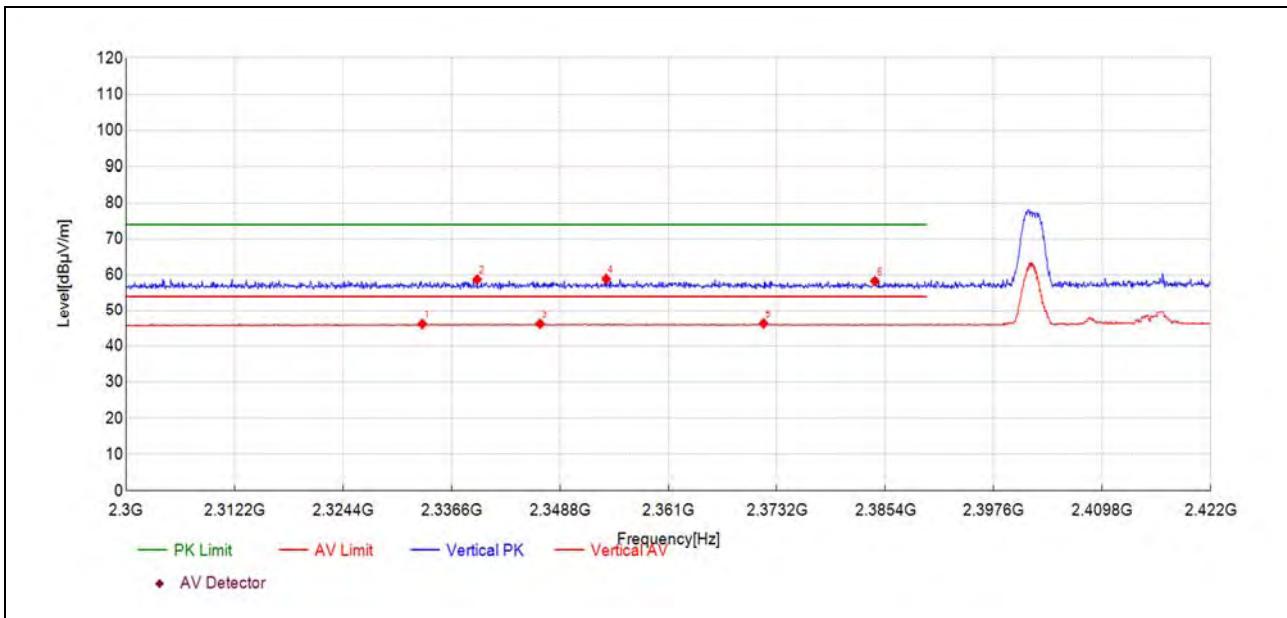

Freq. [MHz]	Reading [dB μ V]	Level [dB μ V/m]	Factor [dB/m]	Limit [dB μ V/m]	Margin [dB]	Angle [°]	Detector	Polarity	Verdict
2333.32	8.8	46.15	37.310	54.00	7.85	118	AV	Vertical	PASS
2339.49	21.4	58.77	37.370	74.00	15.23	284	PK	Vertical	PASS
2346.57	8.8	46.19	37.420	54.00	7.81	322	AV	Vertical	PASS
2354.01	21.5	58.92	37.460	74.00	15.08	123	PK	Vertical	PASS
2371.71	8.8	46.27	37.470	54.00	7.73	42	AV	Vertical	PASS
2384.22	20.8	58.31	37.490	74.00	15.69	28	PK	Vertical	PASS

Plot for Channel 39

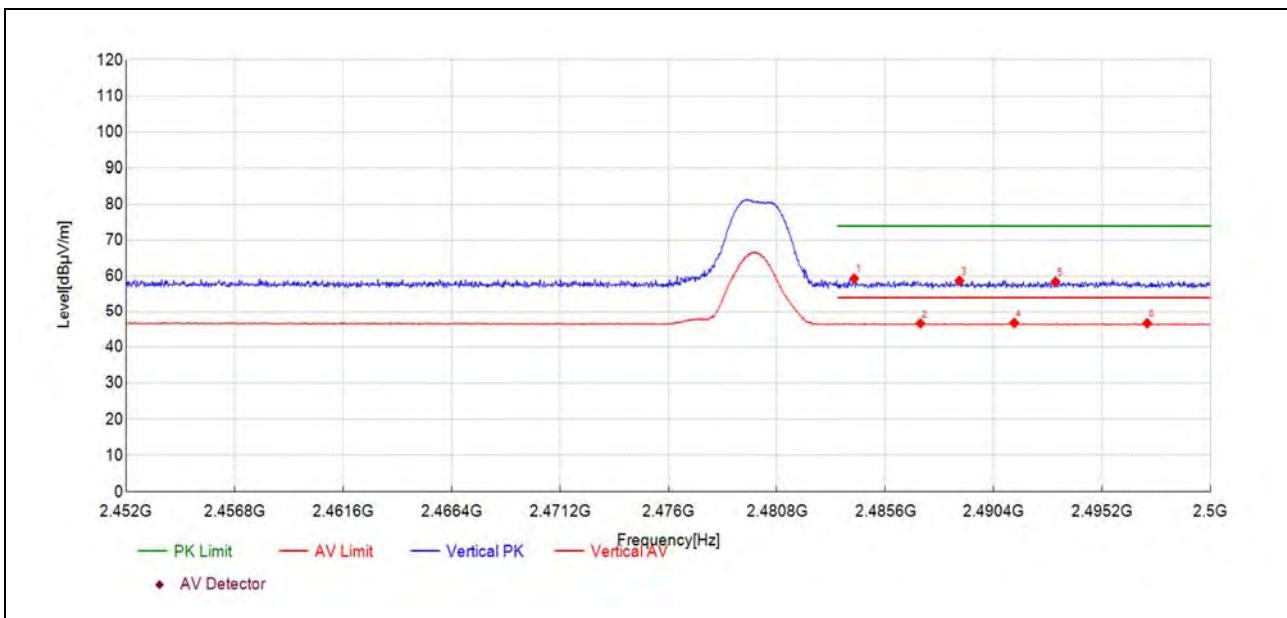

Freq. [MHz]	Reading [dB μ V]	Level [dB μ V/m]	Factor [dB/m]	Limit [dB μ V/m]	Margin [dB]	Angle [°]	Detector	Polarity	Verdict
2484.22	21.1	59.34	38.270	74.00	14.66	162	PK	Vertical	PASS
2487.15	8.3	46.58	38.270	54.00	7.42	5	AV	Vertical	PASS
2488.88	20.5	58.74	38.260	74.00	15.26	242	PK	Vertical	PASS
2491.31	8.4	46.70	38.260	54.00	7.30	5	AV	Vertical	PASS
2493.13	20.2	58.45	38.260	74.00	15.55	303	PK	Vertical	PASS
2497.19	8.4	46.63	38.250	54.00	7.37	242	AV	Vertical	PASS



A.10. Radiated Emission

According to ANSI C63.10, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak (or average) limit, it is unnecessary to perform an quasi-peak measurement (or average).

The measurement results are obtained as below:

$$E [dB\mu V/m] = U_R + A_T + A_{Factor} [dB]; A_T = L_{Cable\ loss} [dB] - G_{preamp} [dB]$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading

G_{preamp} : Preamplifier Gain

A_{Factor} : Antenna Factor at 3m

During the test, the total correction Factor A_T and A_{Factor} were built in test software.

Note1: All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.


Note2: For the frequency, which started from 9kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.

Note3: For the frequency, which started from 18GHz to 10th harmonic of the highest frequency, was pre-scanned and the result which was 20dB lower than the limit was not recorded.

Note 4: All test modes were considered and evaluated respectively by performing full test, only the worst data were recorded.


1Mbps

Plot for Channel 0

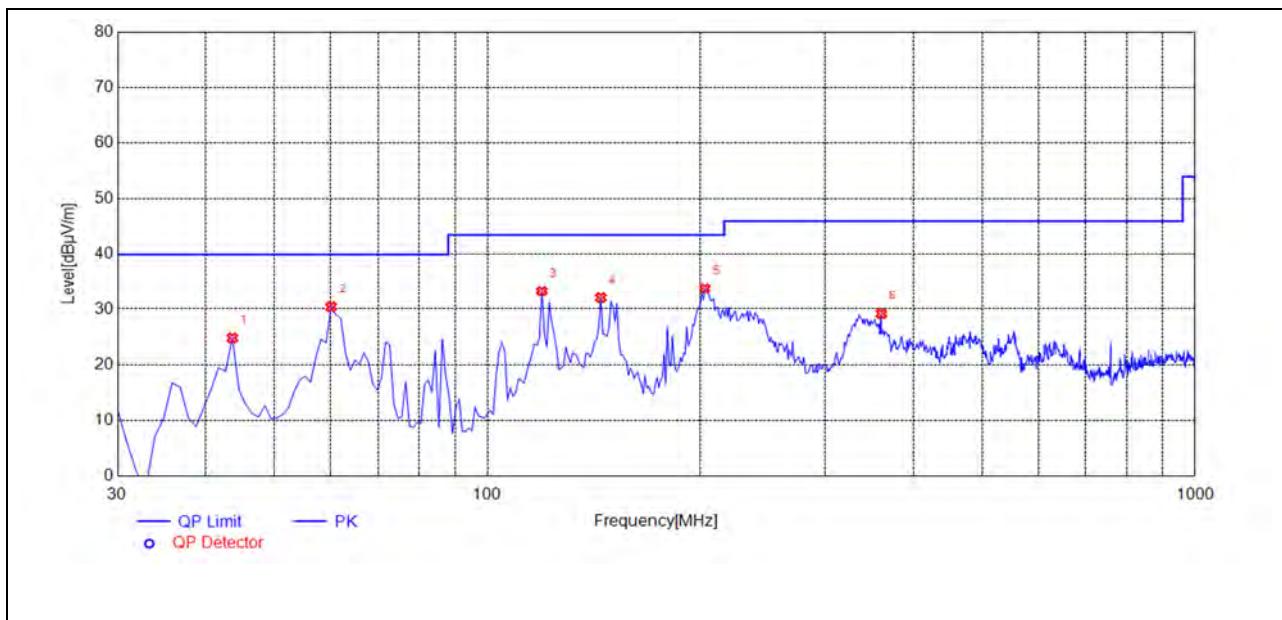


(Antenna Horizontal, 30MHz to 1GHz)

Freq. [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
43.5936	24.80	-30.05	40.00	15.20	150	174	Horizontal	PASS
60.1001	30.39	-29.65	40.00	9.61	150	302	Horizontal	PASS
119.3293	33.29	-32.43	43.50	10.21	150	251	Horizontal	PASS
144.5746	32.04	-34.09	43.50	11.46	150	37	Horizontal	PASS
202.8328	33.78	-32.37	43.50	9.72	150	148	Horizontal	PASS
360.1301	29.14	-26.34	46.00	16.86	150	311	Horizontal	PASS

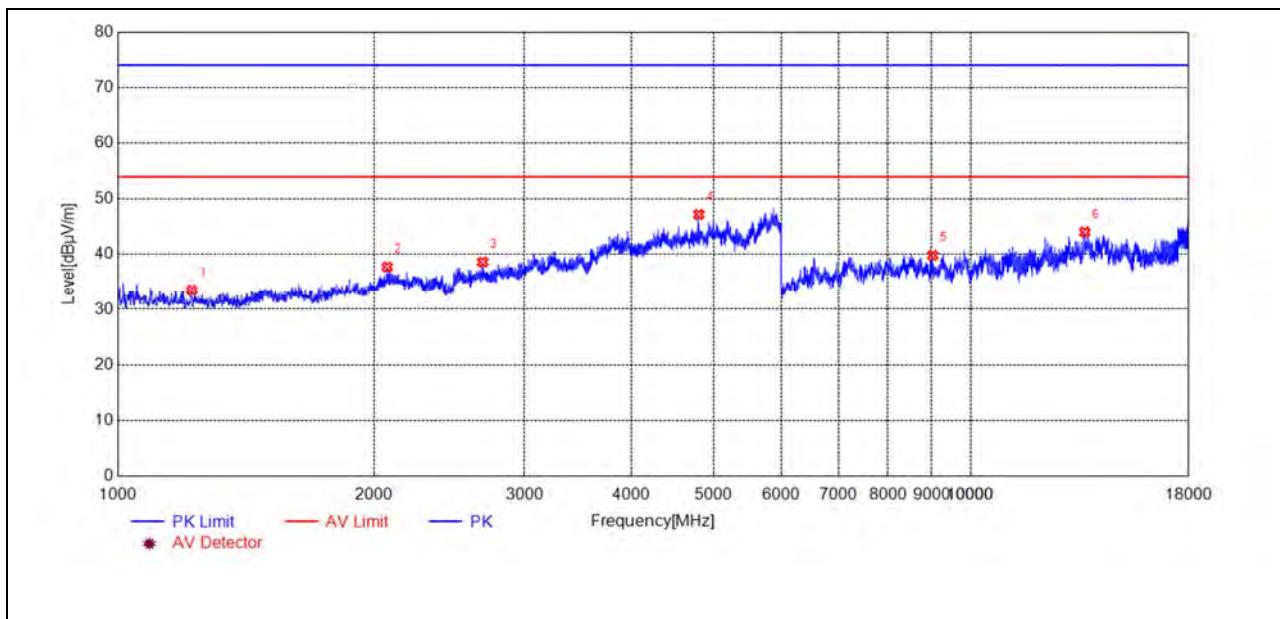


(Antenna Horizontal, 1GHz to 18GHz)

Freq. [MHz]	Level [dB μ V/m]	Factor [dB]	Limit [dB μ V/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1222.0444	33.46	-24.59	74.00	40.54	150	53	Horizontal	PASS
2070.2140	37.72	-20.48	74.00	36.28	150	43	Horizontal	PASS
2679.3359	38.64	-19.34	74.00	35.36	150	62	Horizontal	PASS
4800.7602	47.22	-10.57	74.00	26.78	150	0	Horizontal	PASS
9024.6049	39.82	-1.17	74.00	34.18	150	328	Horizontal	PASS
13602.3205	44.06	7.53	74.00	29.94	150	348	Horizontal	PASS

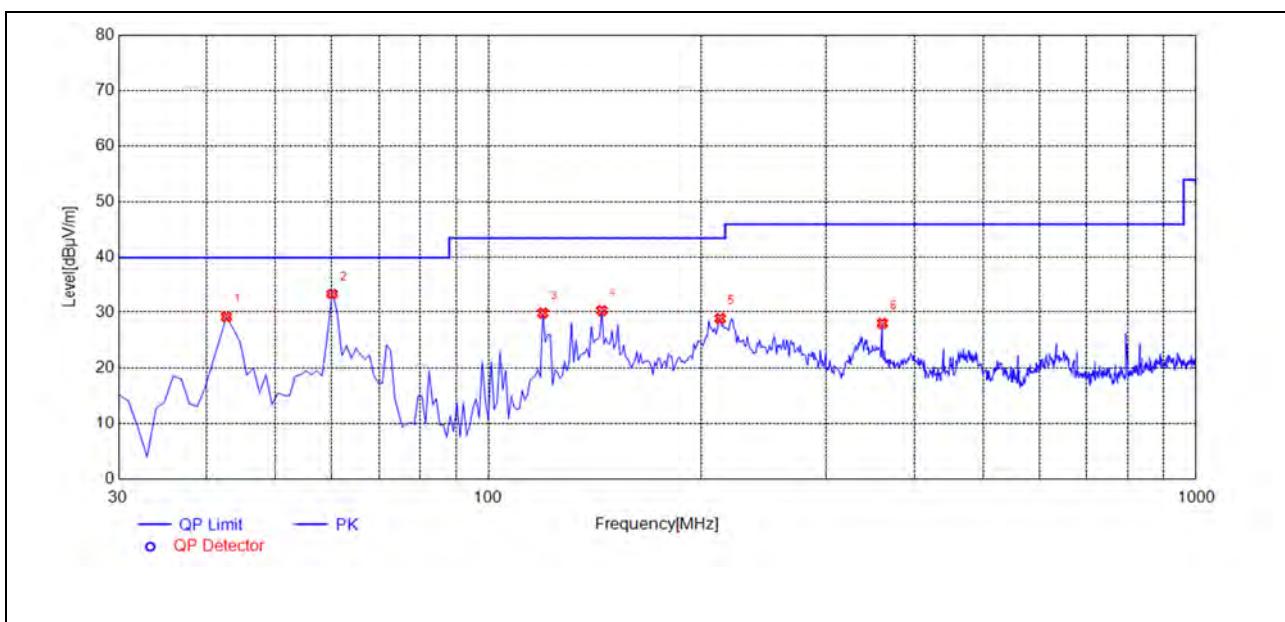

(Antenna Vertical, 30MHz to 1GHz)


Freq. [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
42.6226	29.14	-29.77	40.00	10.86	150	101	Vertical	PASS
60.1001	33.35	-29.65	40.00	6.65	150	57	Vertical	PASS
119.3293	29.83	-32.43	43.50	13.67	150	6	Vertical	PASS
144.5746	30.26	-34.09	43.50	13.24	150	297	Vertical	PASS
212.5425	28.85	-32.12	43.50	14.65	150	24	Vertical	PASS
360.1301	27.98	-26.34	46.00	18.02	150	340	Vertical	PASS

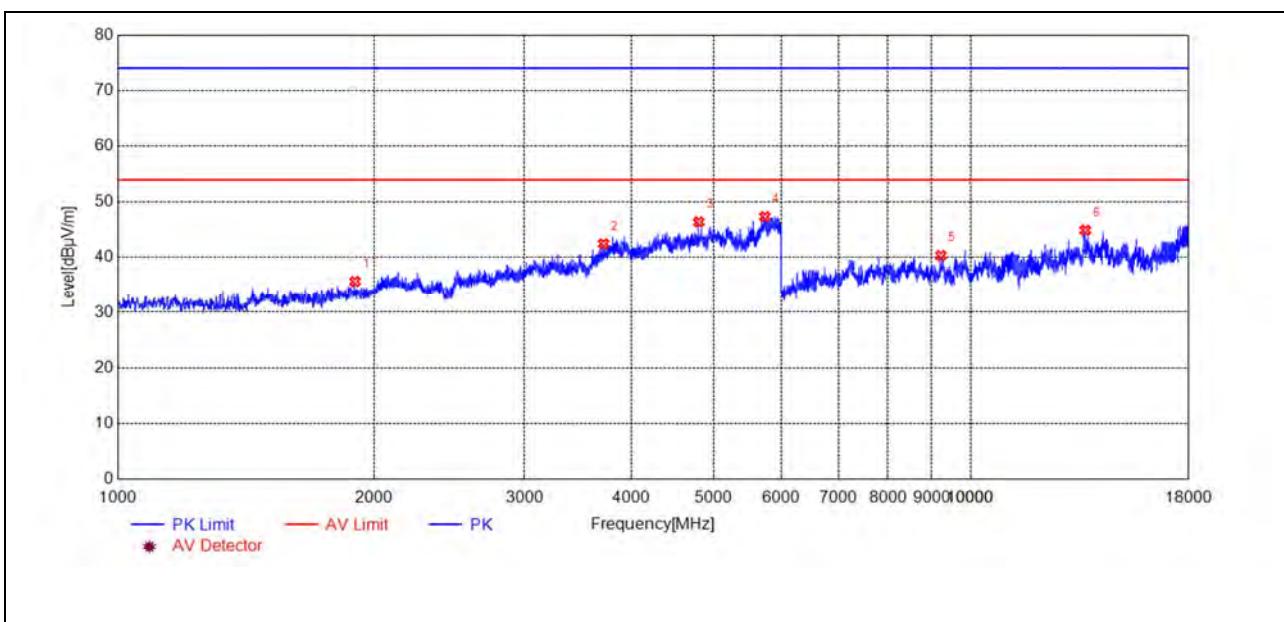

(Antenna Vertical, 1GHz to 18GHz)


Freq. [MHz]	Level [dB μ V/m]	Factor [dB]	Limit [dB μ V/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1898.1796	35.64	-22.15	74.00	38.36	150	222	Vertical	PASS
3712.5425	42.47	-15.72	74.00	31.53	150	51	Vertical	PASS
4800.7602	46.41	-10.57	74.00	27.59	150	343	Vertical	PASS
5736.9474	47.37	-6.94	74.00	26.63	150	161	Vertical	PASS
9226.2452	40.35	-0.58	74.00	33.65	150	38	Vertical	PASS
13621.5243	44.92	6.47	74.00	29.08	150	198	Vertical	PASS

Plot for Channel 19

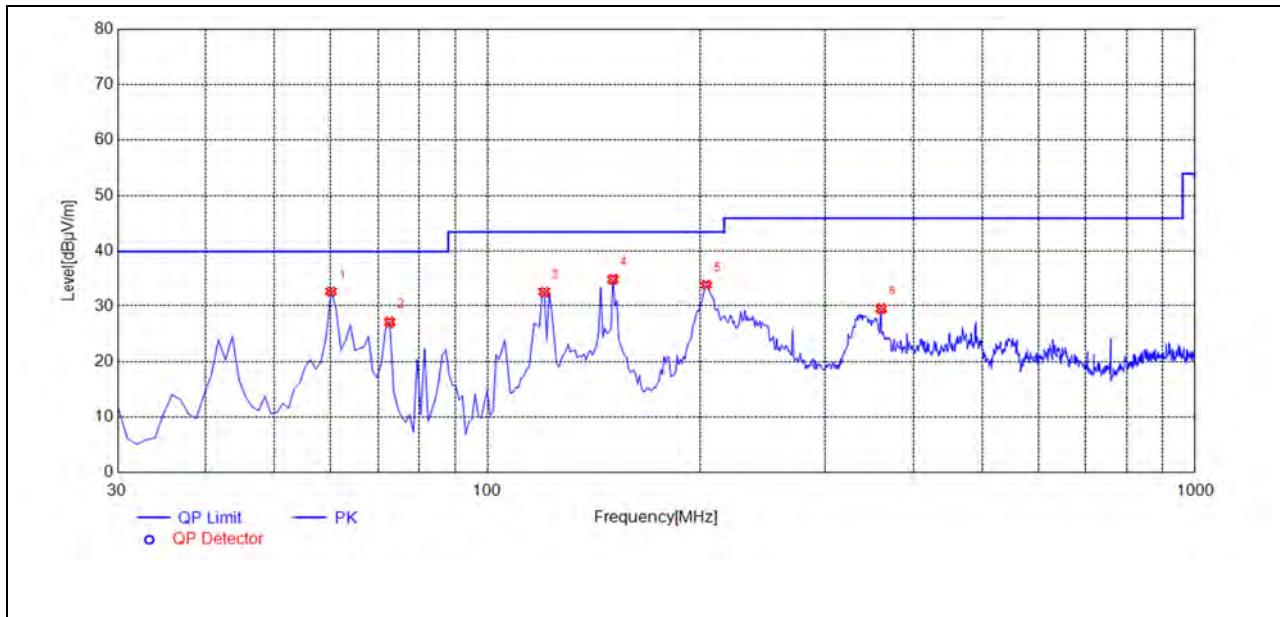


(Antenna Horizontal, 30MHz to 1GHz)

Freq. [MHz]	Level [dB μ V/m]	Factor [dB]	Limit [dB μ V/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
60.1001	32.67	-29.65	40.00	7.33	150	336	Horizontal	PASS
72.7227	27.08	-32.73	40.00	12.92	150	20	Horizontal	PASS
120.3003	32.57	-32.49	43.50	10.93	150	71	Horizontal	PASS
150.4004	34.98	-34.54	43.50	8.52	150	54	Horizontal	PASS
203.8038	33.88	-32.34	43.50	9.62	150	174	Horizontal	PASS
360.1301	29.51	-26.34	46.00	16.49	150	259	Horizontal	PASS

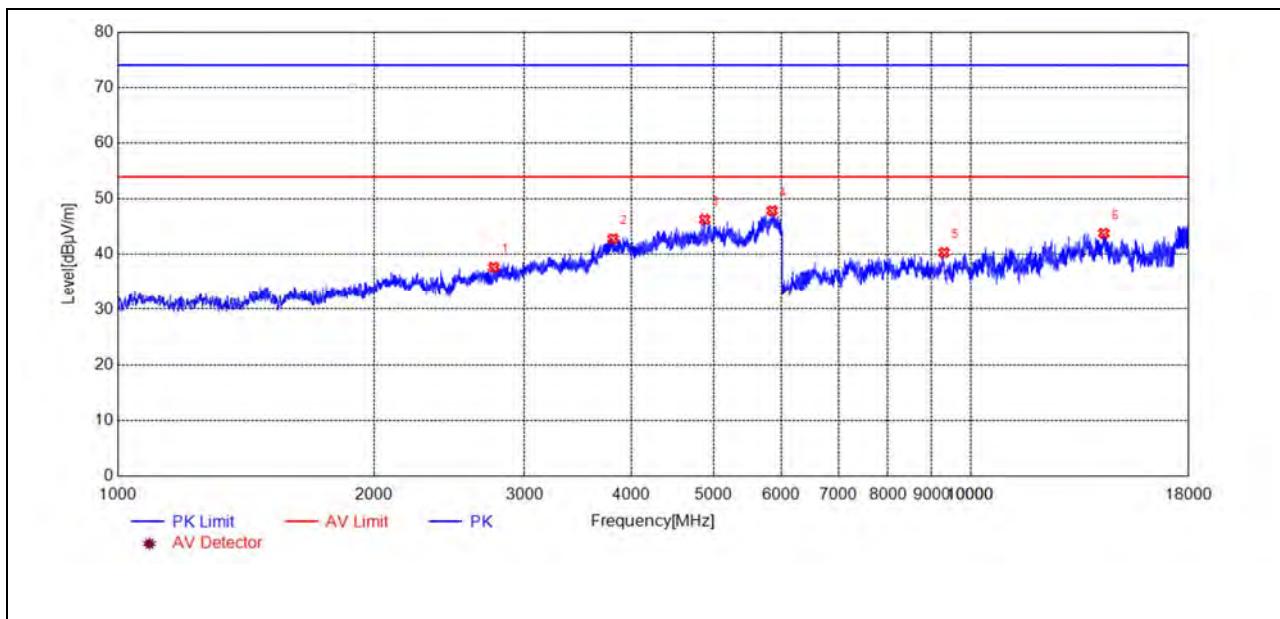


(Antenna Horizontal, 1GHz to 18GHz)

Freq. [MHz]	Level [dB μ V/m]	Factor [dB]	Limit [dB μ V/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
2760.3521	37.71	-19.46	74.00	36.29	150	312	Horizontal	PASS
3808.5617	42.85	-14.41	74.00	31.15	150	31	Horizontal	PASS
4876.7754	46.32	-10.91	74.00	27.68	150	332	Horizontal	PASS
5850.9702	47.90	-6.92	74.00	26.10	150	1	Horizontal	PASS
9303.0606	40.37	1.32	74.00	33.63	150	148	Horizontal	PASS
14320.0640	43.83	7.67	74.00	30.17	150	138	Horizontal	PASS

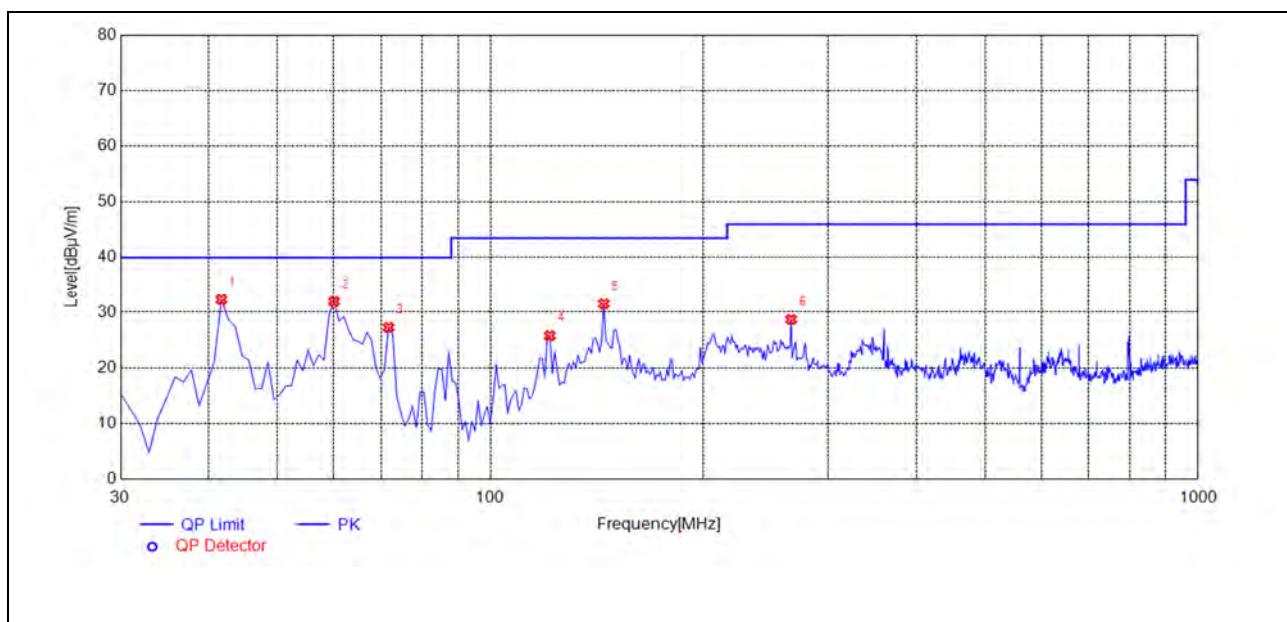

(Antenna Vertical, 30MHz to 1GHz)


Freq. [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
41.6517	32.27	-29.90	40.00	7.73	150	221	Vertical	PASS
60.1001	31.91	-29.65	40.00	8.09	150	92	Vertical	PASS
71.7518	27.24	-32.07	40.00	12.76	150	19	Vertical	PASS
121.2713	25.78	-32.61	43.50	17.72	150	314	Vertical	PASS
144.5746	31.51	-34.09	43.50	11.99	150	314	Vertical	PASS
265.9459	28.68	-30.52	46.00	17.32	150	263	Vertical	PASS

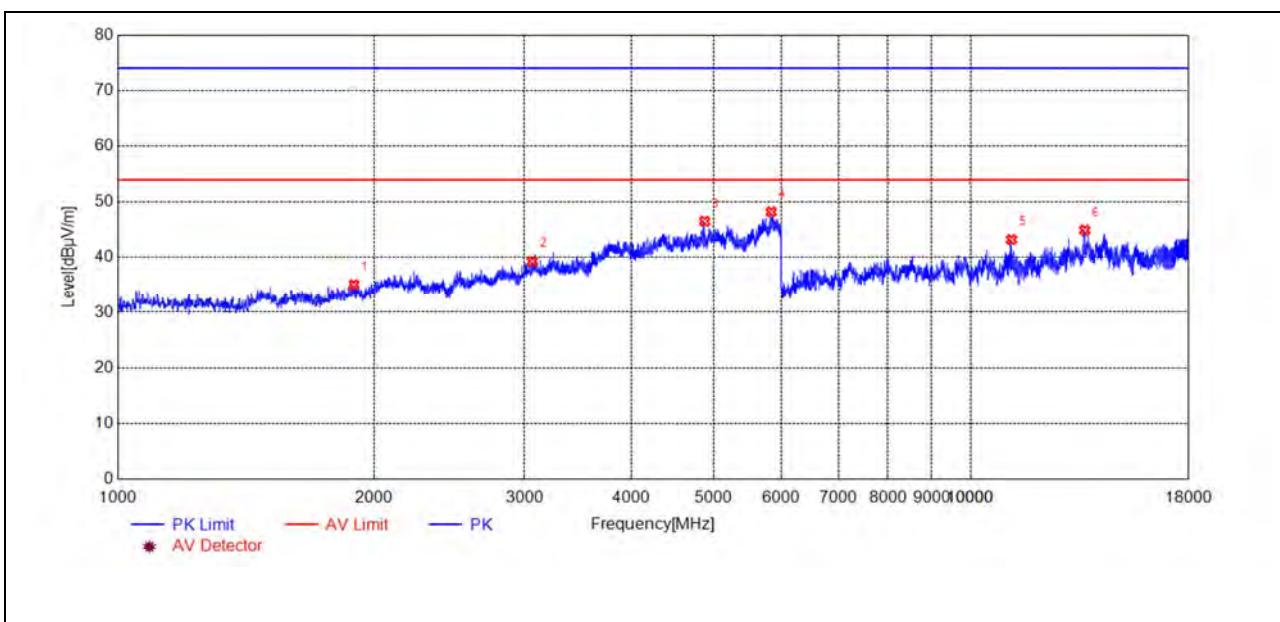

(Antenna Vertical, 1GHz to 18GHz)


Freq. [MHz]	Level [dB μ V/m]	Factor [dB]	Limit [dB μ V/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1892.1784	35.08	-22.22	74.00	38.92	150	273	Vertical	PASS
3062.4125	39.28	-17.16	74.00	34.72	150	83	Vertical	PASS
4876.7754	46.52	-10.91	74.00	27.48	150	342	Vertical	PASS
5835.9672	48.24	-7.32	74.00	25.76	150	243	Vertical	PASS
11161.0322	43.22	3.18	74.00	30.78	150	118	Vertical	PASS
13602.3205	44.94	7.53	74.00	29.06	150	98	Vertical	PASS

Plot for Channel 39

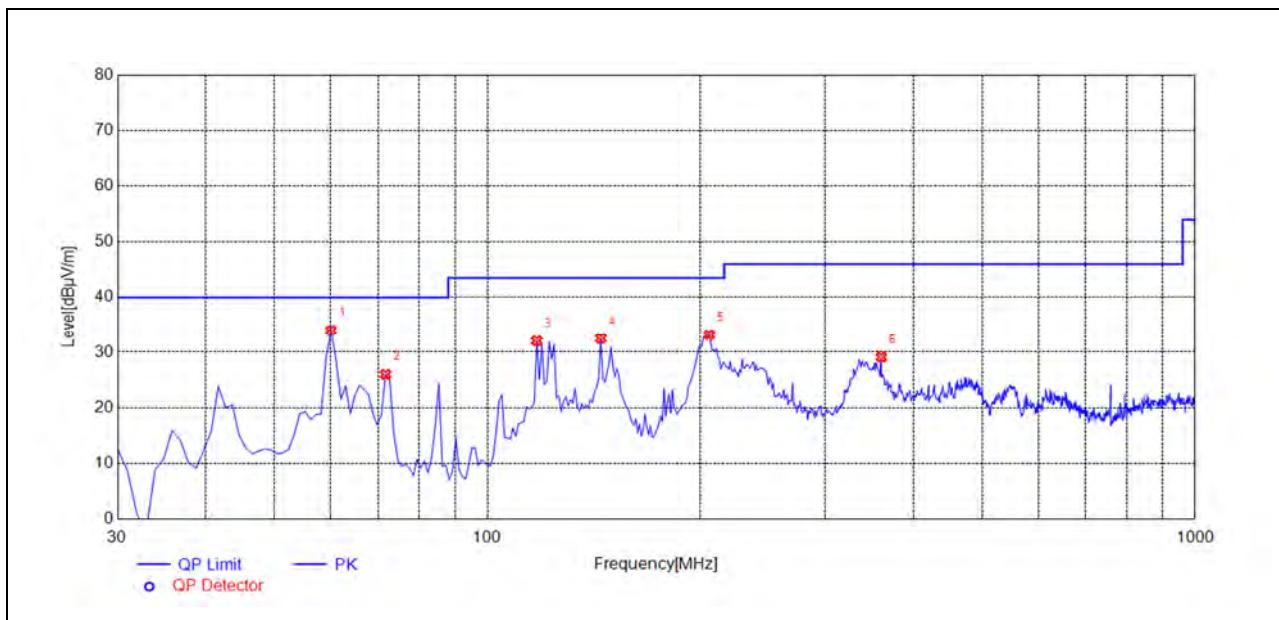


(Antenna Horizontal, 30MHz to 1GHz)

Freq. [MHz]	Level [dB μ V/m]	Factor [dB]	Limit [dB μ V/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
60.1001	33.96	-29.65	40.00	6.04	150	331	Horizontal	PASS
71.7518	25.98	-32.07	40.00	14.02	150	331	Horizontal	PASS
117.3874	32.05	-32.50	43.50	11.45	150	75	Horizontal	PASS
144.5746	32.48	-34.09	43.50	11.02	150	23	Horizontal	PASS
205.7457	33.18	-32.31	43.50	10.32	150	136	Horizontal	PASS
360.1301	29.09	-26.34	46.00	16.91	150	178	Horizontal	PASS

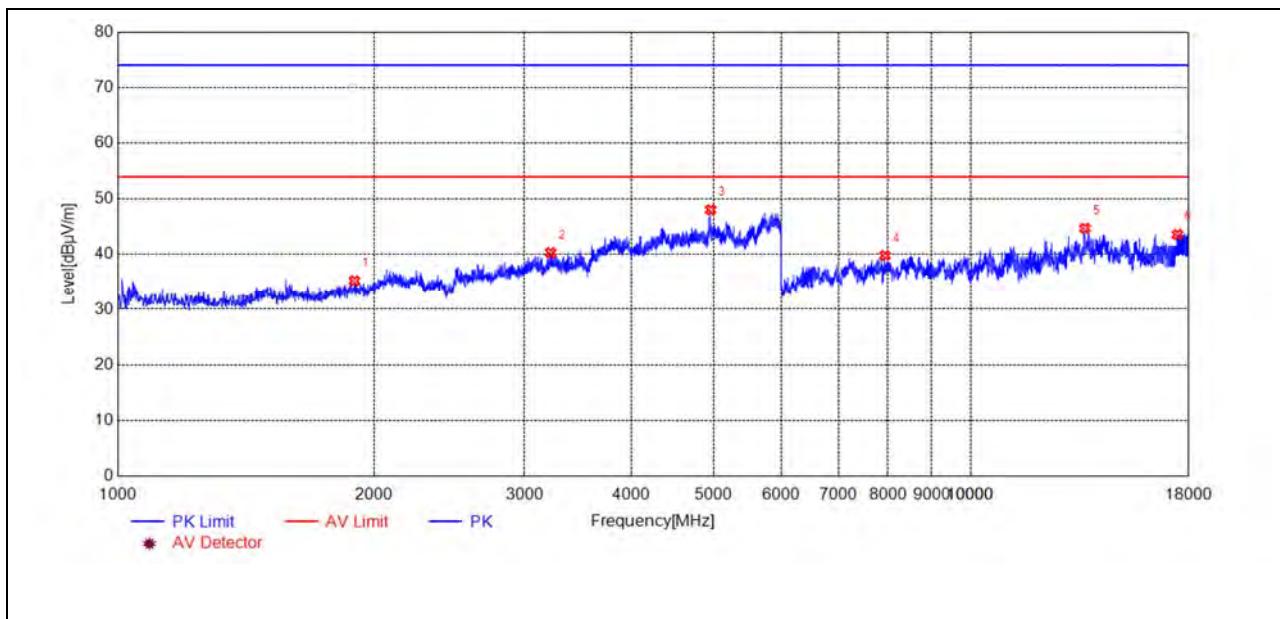


(Antenna Horizontal, 1GHz to 18GHz)

Freq. [MHz]	Level [dB μ V/m]	Factor [dB]	Limit [dB μ V/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1895.1790	35.24	-22.19	74.00	38.76	150	78	Horizontal	PASS
3218.4437	40.34	-16.94	74.00	33.66	150	342	Horizontal	PASS
4956.7914	48.05	-9.59	74.00	25.95	150	342	Horizontal	PASS
7932.3865	39.81	-2.93	74.00	34.19	150	259	Horizontal	PASS
13607.1214	44.72	7.27	74.00	29.28	150	278	Horizontal	PASS
17464.6929	43.60	8.60	74.00	30.40	150	148	Horizontal	PASS

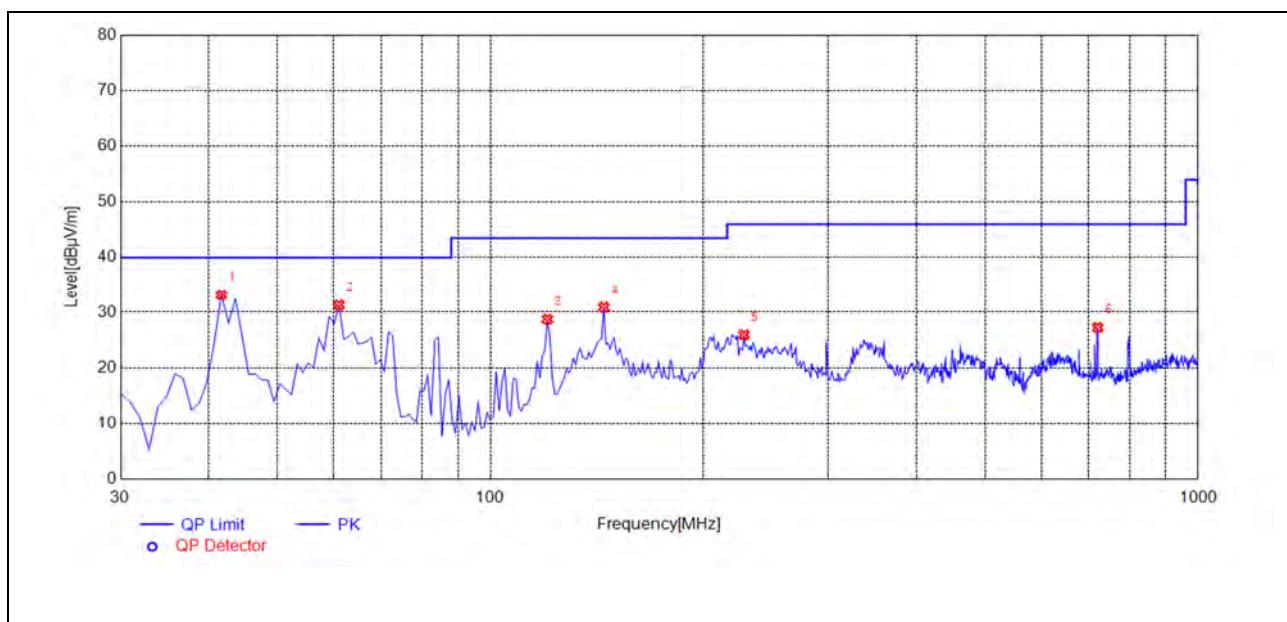

(Antenna Vertical, 30MHz to 1GHz)

Freq. [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
41.6517	33.18	-29.90	40.00	6.82	150	20	Vertical	PASS
61.0711	31.29	-29.64	40.00	8.71	150	93	Vertical	PASS
120.3003	28.70	-32.49	43.50	14.80	150	20	Vertical	PASS
144.5746	30.87	-34.09	43.50	12.63	150	320	Vertical	PASS
228.0781	25.90	-31.16	46.00	20.10	150	47	Vertical	PASS
721.3313	27.22	-21.65	46.00	18.78	150	192	Vertical	PASS

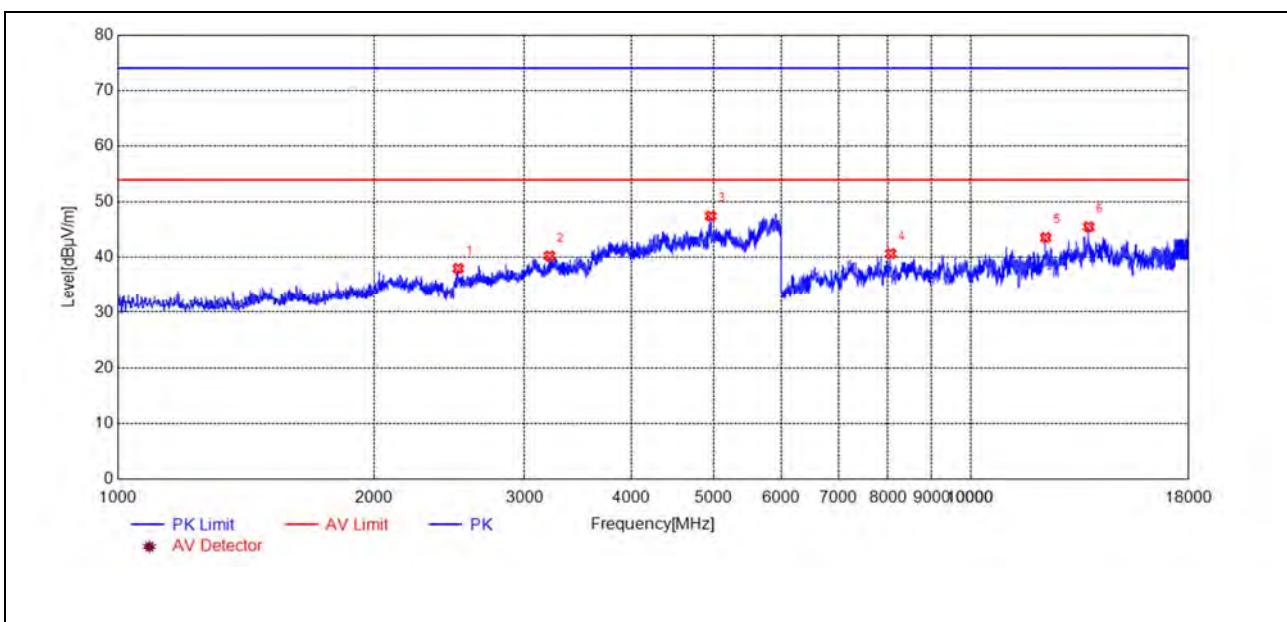

(Antenna Vertical, 1GHz to 18GHz)

Freq. [MHz]	Level [dB μ V/m]	Factor [dB]	Limit [dB μ V/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
2508.3017	38.02	-19.59	74.00	35.98	150	343	Vertical	PASS
3208.4417	40.26	-17.07	74.00	33.74	150	322	Vertical	PASS
4956.7914	47.47	-9.59	74.00	26.53	150	263	Vertical	PASS
8057.2114	40.69	-2.33	74.00	33.31	150	58	Vertical	PASS
12241.2483	43.59	5.12	74.00	30.41	150	357	Vertical	PASS
13751.1502	45.53	7.23	74.00	28.47	150	118	Vertical	PASS

————— END OF REPORT —————