

FCC Part 15C

Measurement and Test Report

For

Fashion Star Technology Limited

**A-2305, Cyber Times, Tian'an Cyber Park Futian District, Shenzhen,
China**

FCC ID: COAF-23AB

FCC Rules:	<u>FCC Part 15.249</u>
Product Description:	<u>2.4G Radio Control System</u>
Tested Model:	<u>F-2</u>
Report No.:	<u>STR12088079I</u>
Tested Date:	<u>2012-08-10 to 2012-08-24</u>
Issued Date:	<u>2012-09-03</u>
Tested By:	<u>Susan Su / Engineer</u>
Reviewed By:	<u>Lahm Peng / EMC Manager</u>
Approved & Authorized By:	<u>Jandy so / PSQ Manager</u>
Prepared By:	SEM.Test Compliance Service Co., Ltd 3/F, Jinbao Commerce Building, Xin'an Fanshen Road, Bao'an District, Shenzhen, P.R.C. (518101) Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permission by SEM.Test Compliance Service Co., Ltd

TABLE OF CONTENTS

1. GENERAL INFORMATION	3
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	3
1.2 TEST STANDARDS.....	4
1.3 TEST METHODOLOGY.....	4
1.4 TEST FACILITY	4
1.5 EUT SETUP AND TEST MODE.....	5
2. SUMMARY OF TEST RESULTS	6
3. ANTENNA REQUIREMENTS.....	7
3.1 STANDARD APPLICABLE.....	7
3.2 TEST RESULT.....	7
4. RADIATED EMISSIONS.....	8
4.1 MEASUREMENT UNCERTAINTY	8
4.2 STANDARD APPLICABLE.....	8
4.3 TEST EQUIPMENT LIST AND DETAILS	8
4.4 TEST PROCEDURE.....	9
4.5 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	9
4.6 ENVIRONMENTAL CONDITIONS	9
4.7 SUMMARY OF TEST RESULTS/PLOTS	10
5. OUT OF BAND EMISSIONS.....	18
5.1 STANDARD APPLICABLE.....	18
5.2 TEST EQUIPMENT LIST AND DETAILS	18
5.3 TEST PROCEDURE.....	18
5.4 ENVIRONMENTAL CONDITIONS	18
5.5 SUMMARY OF TEST RESULTS/PLOTS	18
6. EMISSION BANDWIDTH.....	21
6.1 STANDARD APPLICABLE.....	21
6.2 TEST EQUIPMENT LIST AND DETAILS	21
6.3 TEST PROCEDURE.....	21
6.4 ENVIRONMENTAL CONDITIONS	21
6.5 SUMMARY OF TEST RESULTS/PLOTS	21

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: Fashion Star Technology Limited
Address of applicant: A-2305, Cyber Times, Tian'an Cyber Park Futian District, Shenzhen, China
Manufacturer: Zhongshan WATA Electronics Co., Ltd
Address of manufacturer: No.142, South Tanshen Road, Tanzhou, Zhongshan City, Guangdong, China

General Description of EUT	
Product Name:	2.4G Radio Control System
Trade Name:	Fashion Star
Model No.:	F-2
Adding Model(s):	F-2A, F-2B, F-3, FT-2, FT-3, BT-T2A, BT-T2B
Rated Voltage:	DC 4-6V
Power Adapter Model:	/
<i>Note: The test data is gathered from a production sample, provided by the manufacturer. The others models listed in the report have different appearance only of F-2 without circuit and electronic construction changed, declared by the manufacturer.</i>	

Technical Characteristics of EUT	
Frequency Range:	2404-2470MHz
Max. Field Strength:	113.83 dBuV/m (at 3m distance)
Data Rate:	/
Modulation:	GFSK, FSK
Quantity of Channels:	16
Channel Separation:	Max. 5MHz
Antenna Type:	Integral Antenna
Antenna Gain:	3 dBi
Lowest Internal Frequency of EUT:	16MHz
Device Category:	Portable Device

1.2 Test Standards

The following report is prepared on behalf of the Fashion Star Technology Limited in accordance with FCC Part 15, Subpart B, Subpart C, and section 15.107, 15.203, 15.205, 15.209 and 15.249 of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC Part 15, Subpart C, and section 15.107, 15.203, 15.205, 15.209 and 15.249 of the Federal Communication Commissions rules.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which results in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

1.4 Test Facility

- **FCC – Registration No.: 994117**

SEM.Test Compliance Services Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files and the Registration is 994117.

- **Industry Canada (IC) Registration No.: 7673A**

The 3m Semi-anechoic chamber of SEM.Test Compliance Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 7673A.

- **CNAS Registration No.: L4062**

Shenzhen SEM.Test Electronics Service Co., Ltd. is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L4062. All measurement facilities used to collect the measurement data are located at 3/F, Jinbao Commerce Building, Xin'an Fanshen Road, Bao'an District, Shenzhen, P.R.C (518101)

1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List			
Test Mode	Description	Remark	
TM1	Low Channel	2404MHz	
TM2	Middle Channel	2439MHz	
TM3	High Channel	2470MHz	

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
/	/	/	/

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§ 15.203	Antenna Requirement	Compliant
§15.205	Restricted Band of Operation	Compliant
§ 15.207(a)	Conducted Emission	N/A
§ 15.209(a)(f)	Radiated Spurious Emissions	Compliant
§15.249(a)	Field Strength of Emissions	Compliant
§15.249(d)	Out of Band Emission	Compliant
§15.215 (c)	Emission Bandwidth	Compliant

3. Antenna Requirements

3.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.2 Test Result

This product has an integral antenna, fulfill the requirement of this section.

4. Radiated Emissions

4.1 Measurement Uncertainty

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement is ± 5.10 dB.

4.2 Standard Applicable

According to §15.249(a), the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental Frequency	Field strength of fundamental (milli-volts/meter)	Field strength of fundamental (micro-volts/meter)
902-928 MHz	50	500
2400-2483.5 MHz	50	500
5725-5875 MHz	50	500
24.0-24.25 GHz	250	2500

(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.

4.3 Test Equipment List and Details


Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	R&S	FSP	836079/035	2012-03-28	2013-03-27
EMI Test Receiver	R&S	ESVB	825471/005	2012-03-28	2013-03-27
Pre-amplifier	Agilent	8447F	3113A06717	2012-03-28	2013-03-27
Pre-amplifier	Compliance Direction	PAP-0118	24002	2012-03-28	2013-03-27
Trilog Broadband Antenna	SCHWARZBECK	VULB9163	9163-333	2012-02-25	2013-02-24
Horn Antenna	ETS	3117	00086197	2012-02-25	2013-02-24
Loop Antenna	SCHWARZECK	HFRA 5165	9365	2012-02-25	2013-02-24

4.4 Test Procedure

The setup of EUT is according with per ANSI C63.4-2003 measurement procedure. The specification used was with the FCC Part 15.205 15.249(a) and FCC Part 15.209 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

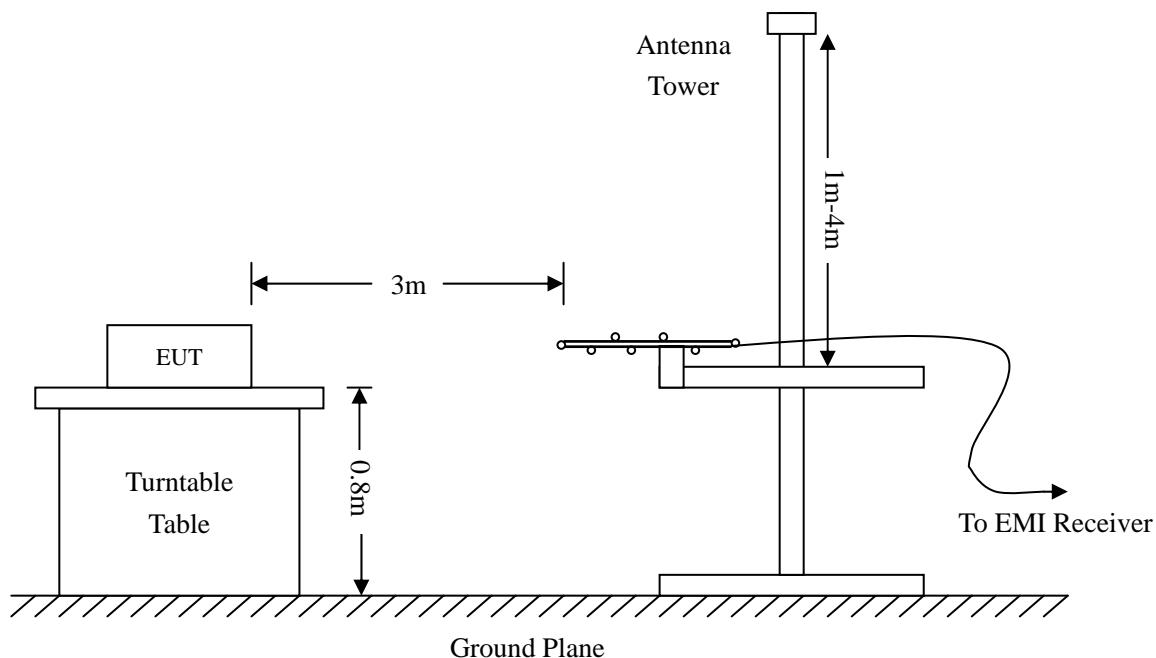

4.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB μ V means the emission is 6dB μ V below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15C Limit}$$

4.6 Environmental Conditions

Temperature:	24 °C
Relative Humidity:	60 %
ATM Pressure:	1012 mbar

4.7 Summary of Test Results/Plots


According to the data below, the FCC Part 15.205, 15.209 and 15.249 standards, and had the worst margin of:

-1.17 dB μ V at 2470 MHz in the **Vertical polarization, High Channel, 9 kHz to 25 GHz, 3Meters**

Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.


Plot of Radiated Emissions Test Data (30MHz to 1GHz)

EUT: 2.4G Radio Control System
 Tested Model: F-2
 Operating Condition: Transmitting Low Channel (2404MHz)
 Comment: DC 6V
 Test Specification: Horizontal

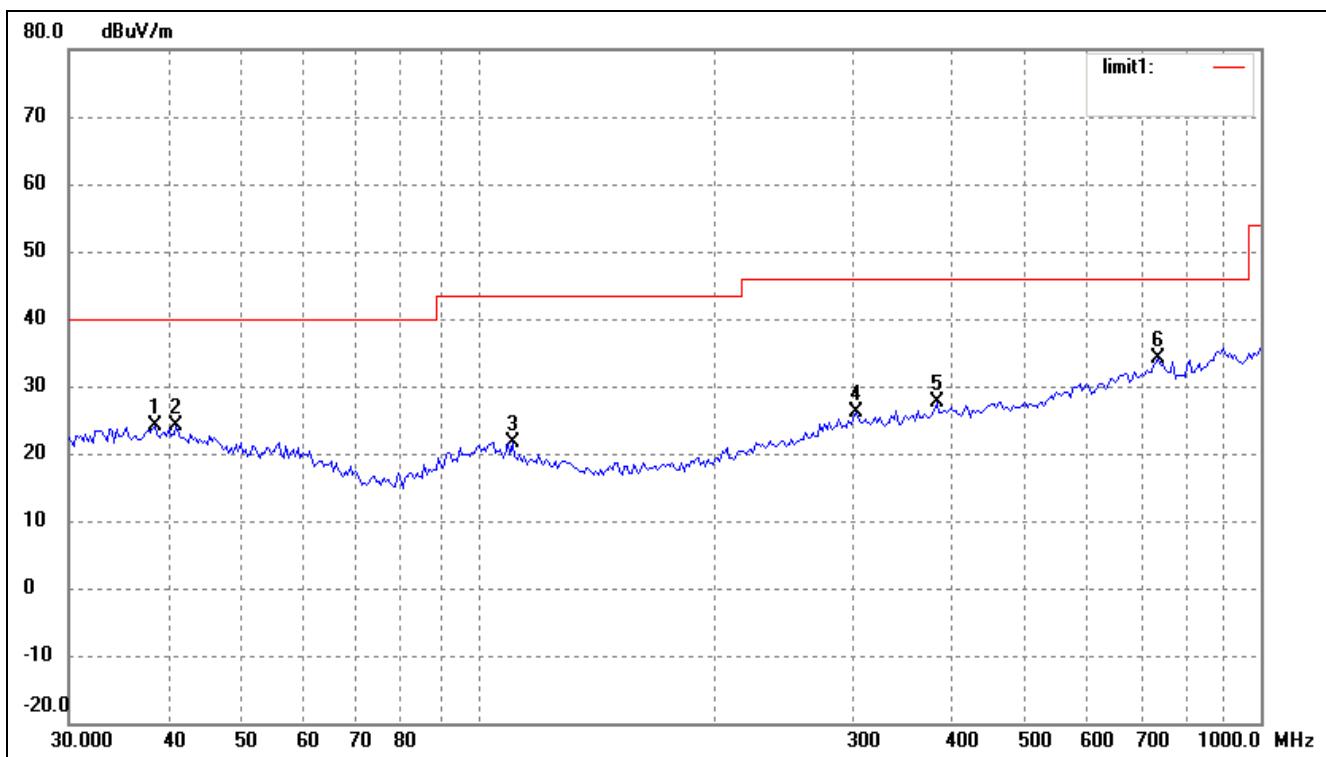

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dB μ V/m)	dB/m	(dB μ V/m)	(dB μ V/m)	(dB)	(°)	(cm)	
1	38.6161	14.69	9.46	24.15	40.00	-15.85	233	100	peak
2	41.1320	14.72	9.33	24.05	40.00	-15.95	147	100	peak
3	110.5687	15.91	5.80	21.71	43.50	-21.79	89	100	peak
4	303.5437	15.77	10.24	26.01	46.00	-19.99	60	100	peak
5	385.2805	16.69	10.87	27.56	46.00	-18.44	24	100	peak
6	739.6605	16.03	18.07	34.10	46.00	-11.90	65	100	peak


Test Specification: Vertical

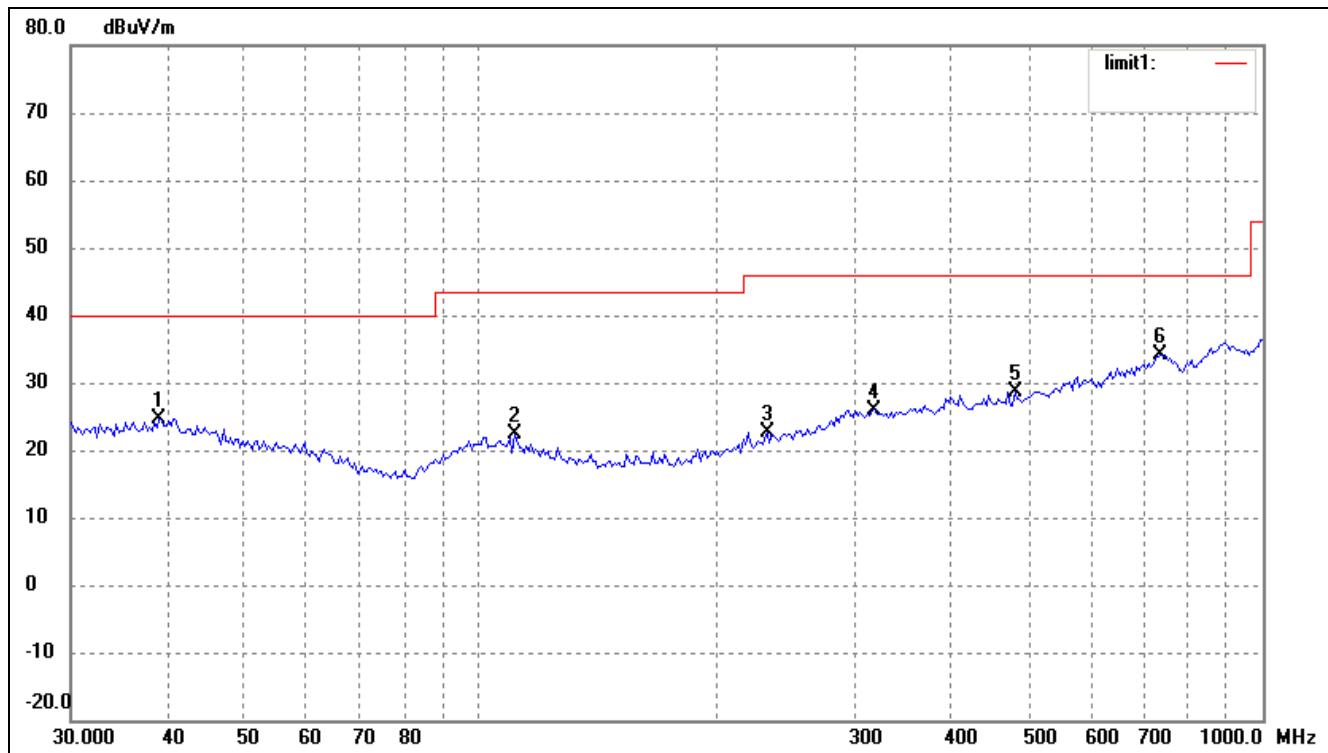

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	38.8879	15.18	9.50	24.68	40.00	-15.32	306	100	peak
2	110.5687	16.60	5.80	22.40	43.50	-21.10	31	100	peak
3	232.5318	16.15	6.59	22.74	46.00	-23.26	44	100	peak
4	318.8170	15.54	10.46	26.00	46.00	-20.00	255	100	peak
5	482.2156	17.16	11.49	28.65	46.00	-17.35	24	100	peak
6	739.6605	16.09	18.07	34.16	46.00	-11.84	57	100	peak


Operating Condition: Transmitting Middle Channel (2439MHz)
Comment: DC 6V

Test Specification: Horizontal

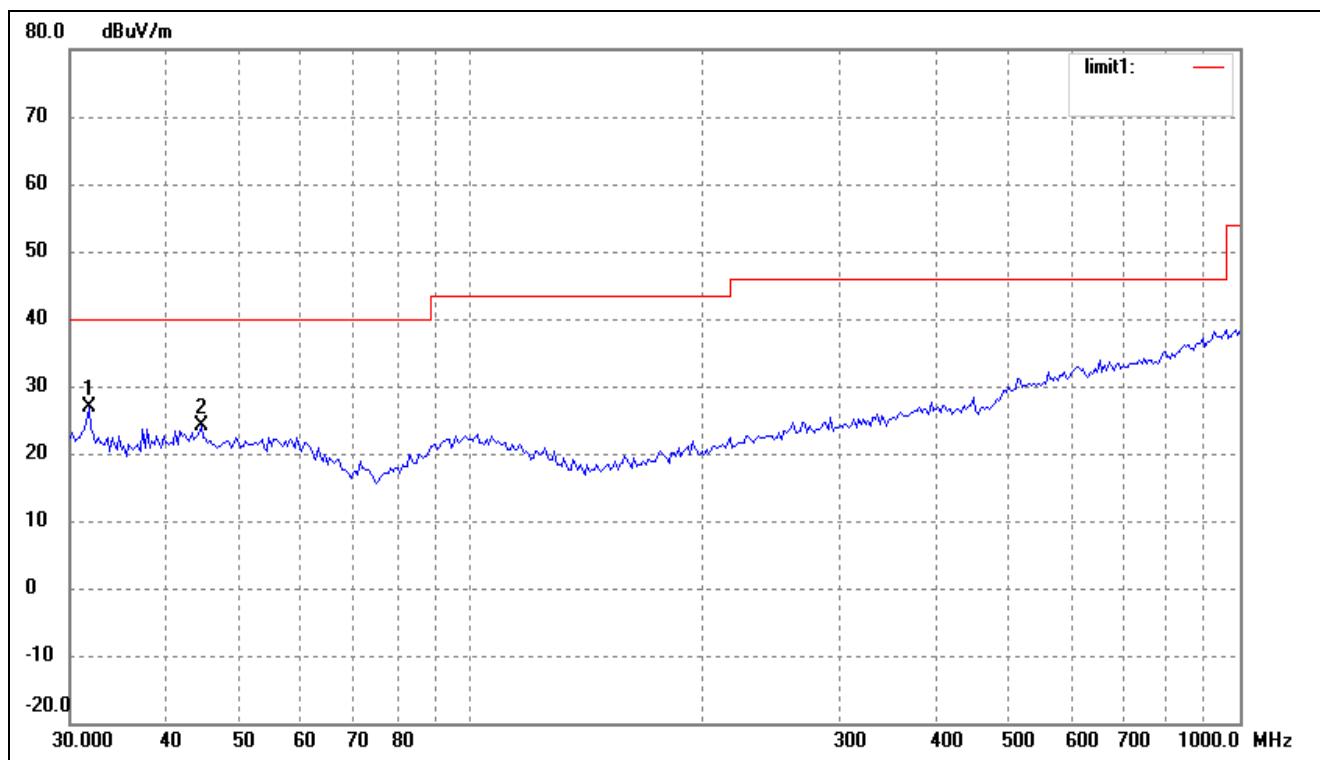

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (•)	Height (cm)	Remark
1	31.7313	20.09	6.77	26.86	40.00	-13.14	162	100	peak
2	44.4308	15.81	8.22	24.03	40.00	-15.97	200	100	peak


Test Specification: Vertical

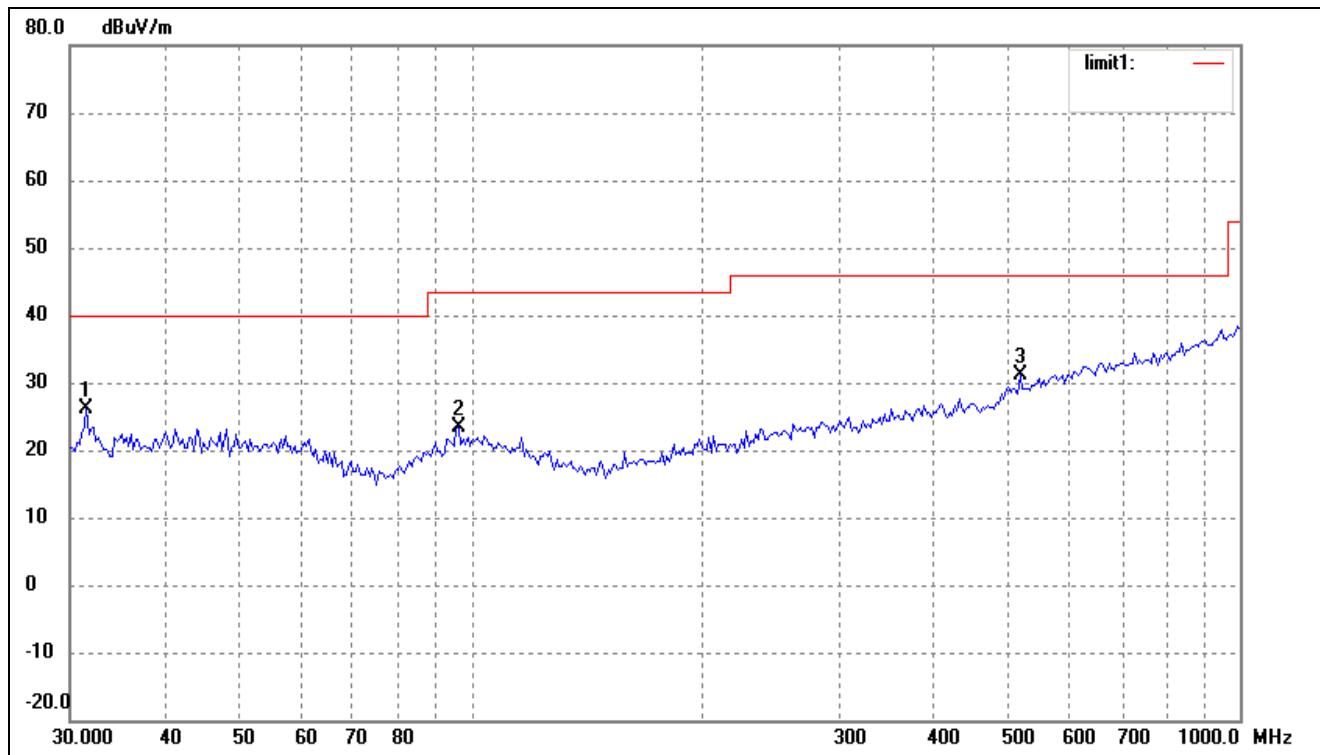

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (•)	Height (cm)	Remark
1	31.5095	19.46	6.77	26.23	40.00	-13.77	240	100	peak
2	96.0986	15.12	8.14	23.26	43.50	-20.24	187	100	peak
3	517.2480	16.25	14.80	31.05	46.00	-14.95	220	100	peak


Operating Condition: Transmitting High Channel (2470MHz)
Comment: DC 6V

Test Specification: Horizontal

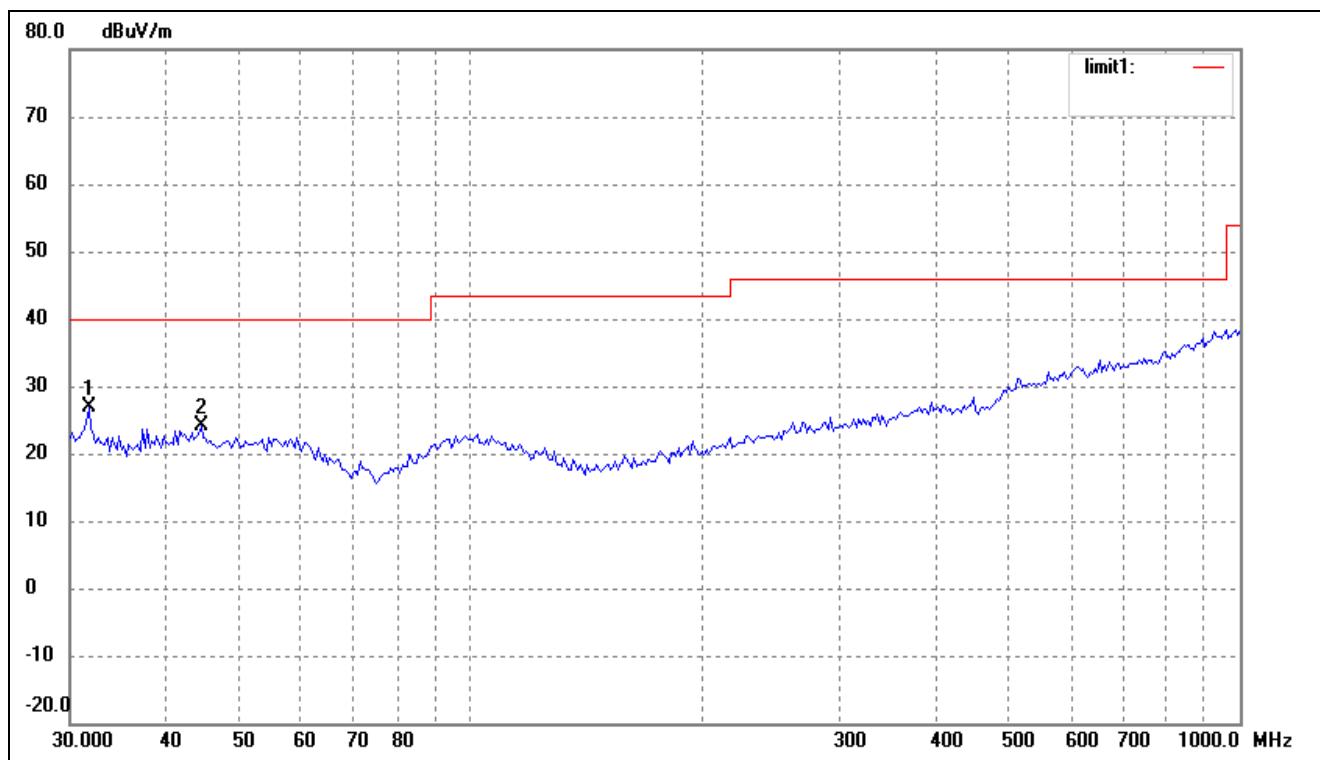

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (•)	Height (cm)	Remark
1	31.7313	20.09	6.77	26.86	40.00	-13.14	162	100	peak
2	44.4308	15.81	8.22	24.03	40.00	-15.97	200	100	peak

Test Specification: Vertical

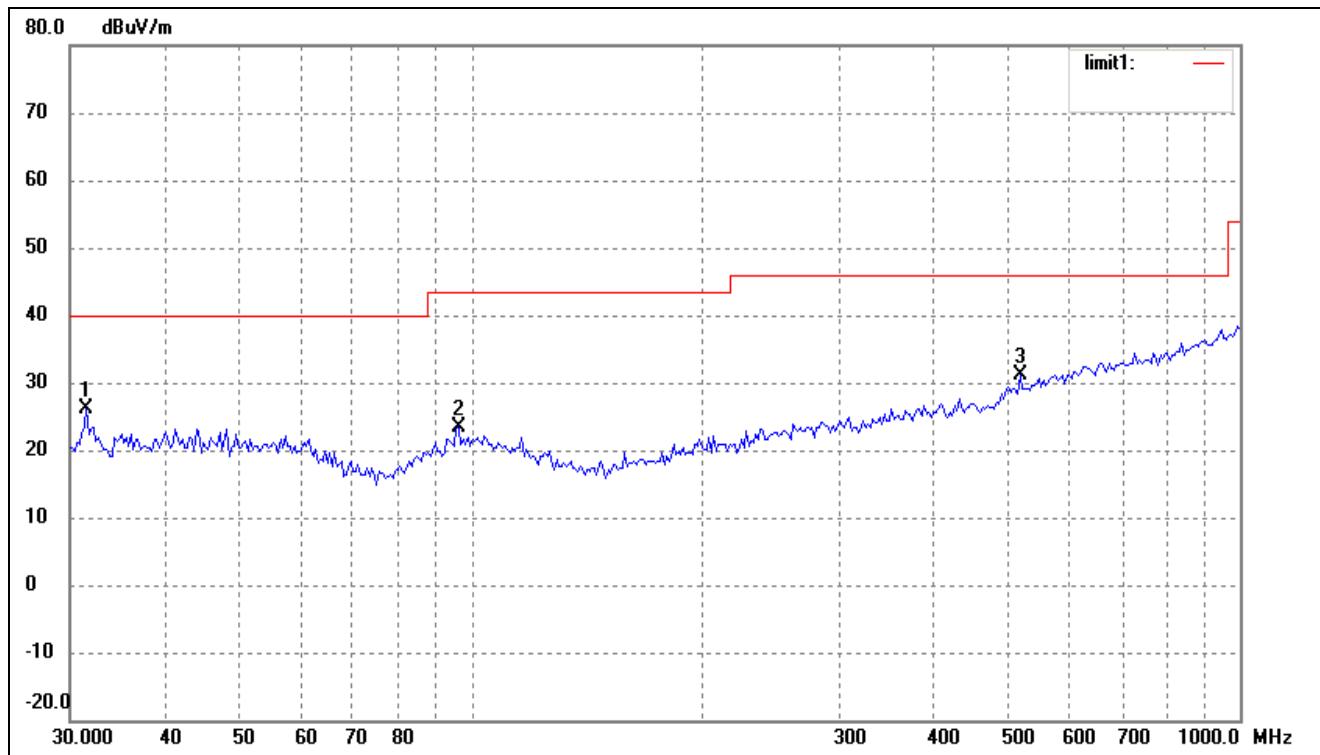

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (•)	Height (cm)	Remark
1	31.5095	19.46	6.77	26.23	40.00	-13.77	240	100	peak
2	96.0986	15.12	8.14	23.26	43.50	-20.24	187	100	peak
3	517.2480	16.25	14.80	31.05	46.00	-14.95	220	100	peak

Spurious Emissions Above 1GHz

Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polar H/V	Detector
Low Channel-2404MHz							
2404	111.38	-11.75	99.63	114.00	-14.37	H	PK
2404	68.26	-11.75	56.51	94.00	-37.49	H	AV
4808	50.85	-3.92	46.93	74.00	-27.07	H	PK
4808	35.65	-3.92	31.73	54.00	-22.27	H	AV
7212	59.36	1.00	60.36	74.00	-13.64	H	PK
7212	40.15	1.00	41.15	54.00	-12.85	H	AV
2404	121.52	-11.75	109.77	114.00	-4.23	V	PK
2404	70.29	-11.75	58.54	94.00	-35.46	V	AV
4808	56.51	-3.92	52.59	74.00	-21.41	V	PK
4808	38.83	-3.92	34.91	54.00	-19.09	V	AV
7212	61.33	1.00	62.33	74.00	-11.67	V	PK
7212	42.93	1.00	43.93	54.00	-10.07	V	AV
Middle Channel-2439MHz							
2439	112.41	-11.76	100.65	114.00	-13.35	H	PK
2439	61.62	-11.76	49.86	94.00	-44.14	H	AV
4878	51.81	-3.74	48.07	74.00	-25.93	H	PK
4878	36.84	-3.74	33.10	54.00	-20.90	H	AV
7317	57.32	1.49	58.81	74.00	-15.19	H	PK
7317	39.95	1.49	41.44	54.00	-12.56	H	AV
2439	123.63	-11.76	111.87	114.00	-2.13	V	PK
2439	72.11	-11.76	60.35	94.00	-33.65	V	AV
4878	59.92	-3.74	56.18	74.00	-17.82	V	PK
4878	41.49	-3.74	37.75	54.00	-16.25	V	AV
7317	57.89	1.49	59.38	74.00	-14.62	V	PK
7317	40.33	1.49	41.82	54.00	-12.18	V	AV

Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polar H/V	Detector
Low Channel-2470MHz							
2470	118.41	-11.78	106.63	114.00	-7.37	H	PK
2470	65.27	-11.78	53.49	94.00	-40.51	H	AV
4940	61.50	-3.55	57.95	74.00	-16.05	H	PK
4940	42.16	-3.55	38.61	54.00	-15.39	H	AV
7410	49.85	1.87	51.72	74.00	-22.28	H	PK
7410	36.10	1.87	37.97	54.00	-16.03	H	AV
2470	124.61	-11.78	112.83	114.00	-1.17	V	PK
2470	73.73	-11.78	61.95	94.00	-32.05	V	AV
4940	59.55	-3.55	56.00	74.00	-18.00	V	PK
4940	41.19	-3.55	37.64	54.00	-16.36	V	AV
7410	49.65	1.87	51.52	74.00	-22.48	V	PK
7410	36.07	1.87	37.94	54.00	-16.06	V	AV

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, which above 5th Harmonics are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured. The measurements greater than 20dB below the limit from 9kHz to 30MHz..

5. Out of Band Emissions

5.1 Standard Applicable

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

5.2 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	R&S	FSP	836079/035	2012-03-28	2013-03-27
EMI Test Receiver	R&S	ESVB	825471/005	2012-03-28	2013-03-27
Pre-amplifier	Agilent	8447F	3113A06717	2012-03-28	2013-03-27
Pre-amplifier	Compliance Direction	PAP-0118	24002	2012-03-28	2013-03-27
Trilog Broadband Antenna	SCHWARZBECK	VULB9163	9163-333	2012-02-25	2013-02-24
Horn Antenna	ETS	3117	00086197	2012-02-25	2013-02-24

5.3 Test Procedure

As the radiation test, set the Lowest and Highest Transmitting Channel, observed the outside band of 2400MHz to 2483.5MHz, than mark the higher-level emission for comparing with the FCC rules.

5.4 Environmental Conditions

Temperature:	24 °C
Relative Humidity:	60 %
ATM Pressure:	1012 mbar


5.5 Summary of Test Results/Plots

Test mode	Frequency	Limit	Result
	MHz	dBuV / dBc	
Lowest	2310.00	<54 dBuV	Pass
	2390.00	<54 dBuV	Pass
Highest	2483.50	<54 dBuV	Pass
	2500.00	<54 dBuV	Pass

The edge emissions are below the FCC 15.209 Limits or complies with the 15.247(d) requirements.


Please refer to the test plots as below.

Lowest Bandedge

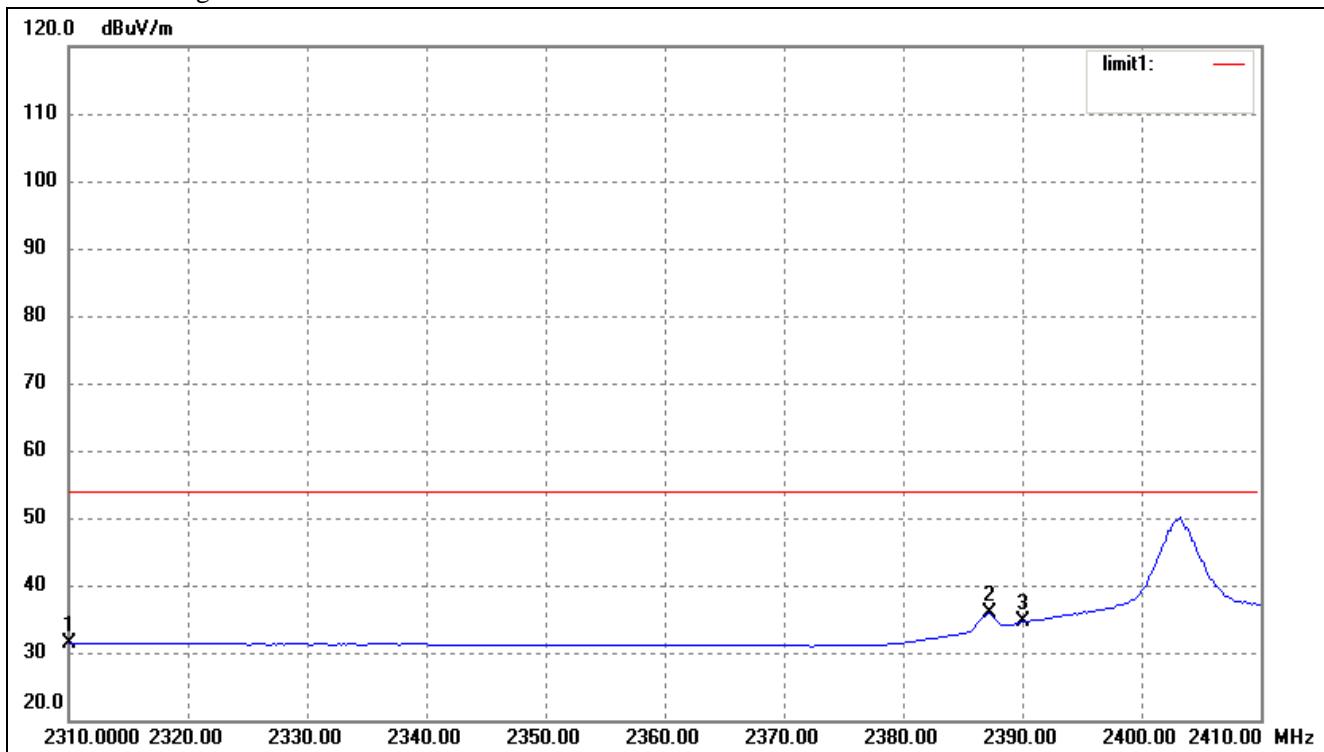

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	43.01	-11.72	31.29	54.00	-22.71	Ave Detector
	2310.000	58.21	-11.72	46.49	74.00	-27.51	Peak Detector
2	2387.200	47.55	-11.74	35.81	54.00	-18.19	Ave Detector
	2387.200	60.66	-11.74	48.92	74.00	-25.08	Peak Detector
3	2390.000	46.28	-11.75	34.53	54.00	-19.47	Ave Detector
	2390.000	80.22	-11.75	68.47	74.00	-5.53	Peak Detector

Highest Bandedge

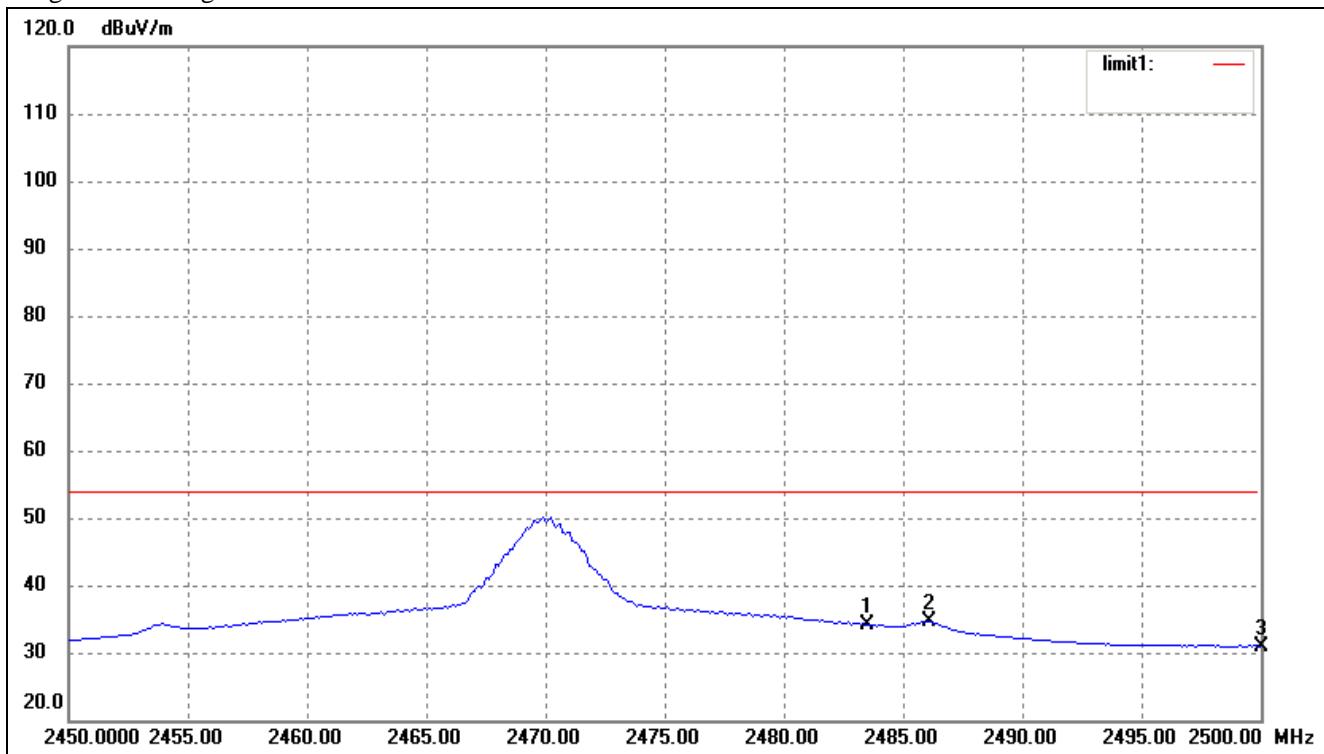

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	45.89	-11.78	34.11	54.00	-19.89	Ave Detector
	2483.500	79.65	-11.78	67.87	74.00	-6.13	Peak Detector
2	2486.100	46.36	-11.77	34.59	54.00	-19.41	Ave Detector
	2486.100	69.40	-11.77	57.63	74.00	-16.37	Peak Detector
3	2500.000	42.76	-11.78	30.98	54.00	-23.02	Ave Detector
	2500.000	74.59	-11.78	62.81	74.00	-11.19	Peak Detector

6. Emission Bandwidth

6.1 Standard Applicable

According to 15.215 (c), intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

6.2 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	Agilent	E4402B	US41192821	2012-03-28	2013-03-27
Attenuator	ATTEN	ATS100-4-20	/	2012-03-28	2013-03-27

6.3 Test Procedure

According to the ANSI 63.4-2003, the emission bandwidth test method as follows.

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

Set span = 1MHz, centered on a transmitting channel

RBW \geq 1% 20dB Bandwidth, VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

All the trace to stabilize, use the marker-to-peak function to set the marker to the peak of the emission, use the marker-delta function to measure and record the 20dB down and 99% bandwidth of the emission.

6.4 Environmental Conditions


Temperature:	25 °C
Relative Humidity:	53%
ATM Pressure:	1018 mbar

6.5 Summary of Test Results/Plots


Channel	Frequency MHz	20dB Bandwidth kHz	99% Bandwidth kHz
Low Channel	2404	997.706	933.1218
Middle Channel	2439	981.849	901.6771
High Channel	2470	974.356	892.1559

Please refer to the following test plots


Low Channel:

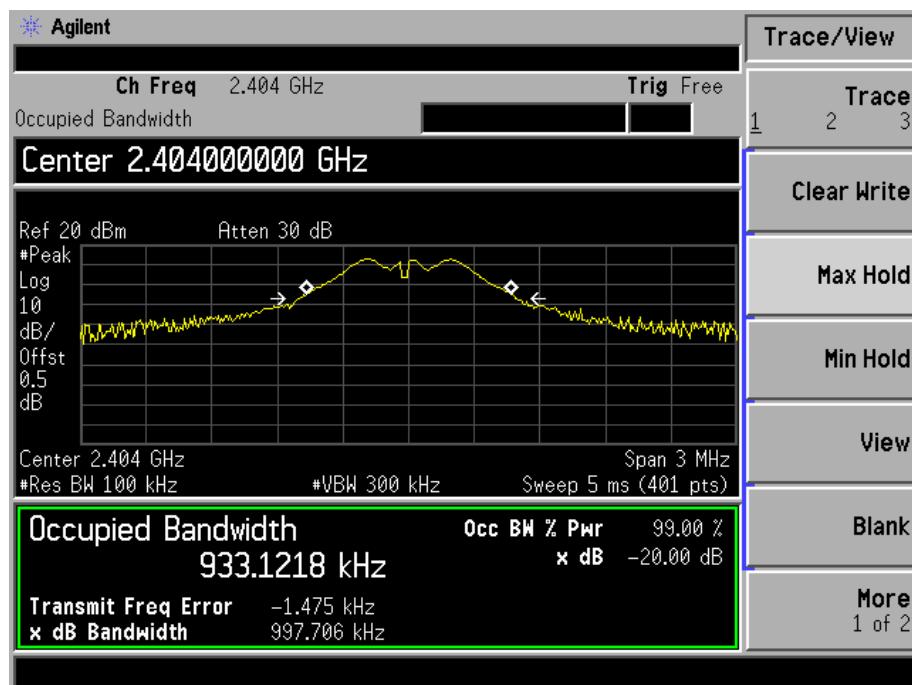

Middle Channel:

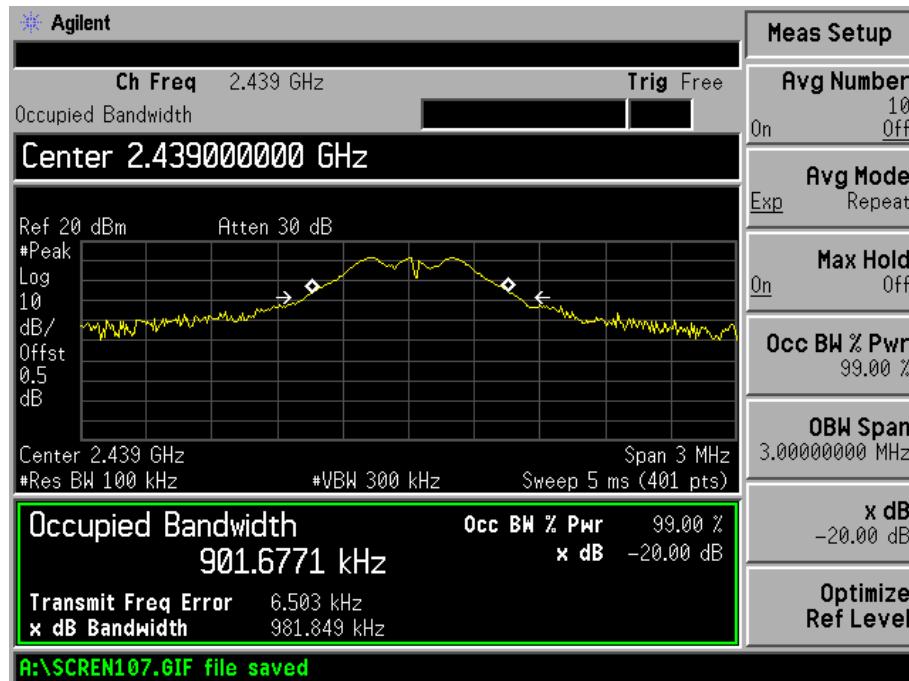

High Channel:

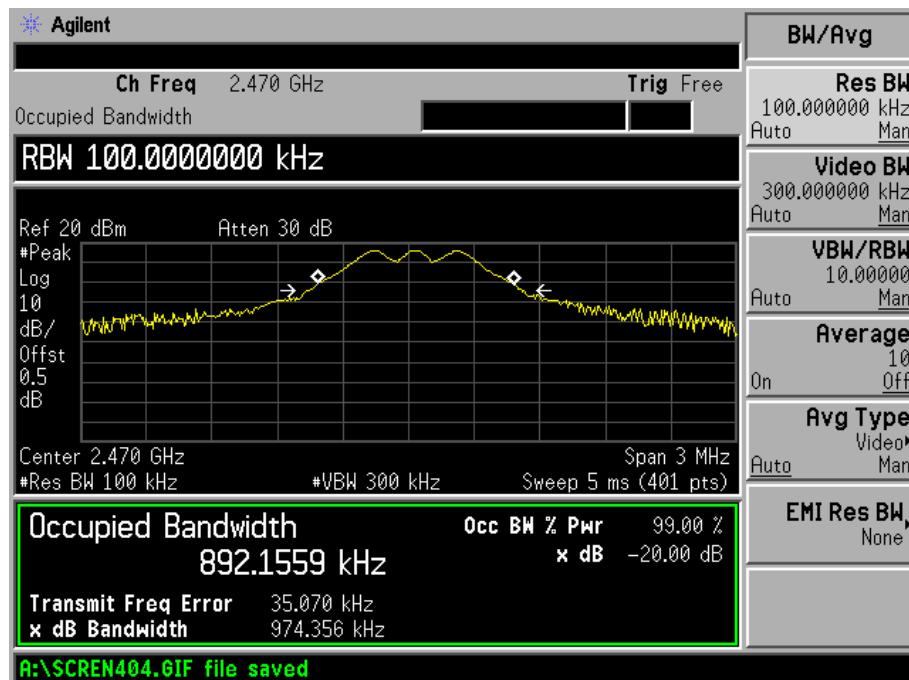

***** END OF REPORT *****