



SGS-CSTC Standards Technical Services Co., Ltd.

198 Kezhu Road, Scientech Park, Guangzhou Economic & Technology

Development District, Guangzhou, China 510663

Tel: +86 20 82155555 Fax: +86 20 82075059

Email: sgs_internet_operations@sgs.com

FEDERAL COMMUNICATIONS COMMISSION

Registration number: 282399

Report No.: GZEM120400105801

Page: 1 of 16

FCC ID: COXIHCPI14QF12

TEST REPORT

Application No.:	GZEM1204001058HS
Applicant:	DONGGUAN QIANFENG ELECTRONICS CO.,LTD.
Product Name:	INDUCTION COOKETOP
FCC ID:	COXIHCPI14QF12
Product Description:	INDUCTION COOKER
Model No.:	PIC-14, PIC-13SK ♣
♣	Please refer to section 3 of this report for more details.
Brand Name:	NESCO, Open Country
Standards:	FCC PART 18:2009
Date of Receipt:	2012-04-16
Date of Test:	2012-04-16
Date of Issue:	2012-04-19
Test Result :	Pass*

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

2 Version

Revision Record				
Version	Chapter	Date	Modifier	Remark
00		2012-04-19		Original

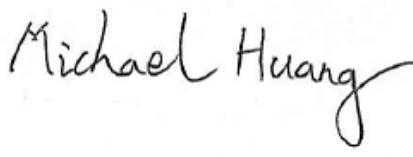Authorized for issue by:			
Tested By	 (Panny Liang) / Project Engineer		2012-04-16 Date
Prepared By	 (Millie Li) / Clerk		2012-04-19 Date
Checked By	 (Michael Huang) / Reviewer		2012-04-19 Date

3 Test Summary

Electromagnetic Interference (EMI)				
Test	Test Requirement	Test Method	Class / Severity	Result
Conducted Emission (9 kHz to 30 MHz)	FCC PART 18:2009	FCC OST/ MP-5:1986	18.307(a)	PASS
Radiated Emission (9 kHz to 30 MHz)	FCC PART 18:2009	FCC OST/ MP-5:1986	18.305(b)	PASS
Remark :				
EUT: In this whole report EUT means Equipment Under Test.				
• Model No.: PIC-14, PIC-13SK				
According to the declaration of the applicant, the electrical circuit design, layout, components used and internal wiring were identical for all models, except for the silk screen printing, color, packaging and brand name.				
Model No.	PIC-14	PIC-13SK		
Brand Name	NESCO	Open Country		

Therefore only one model **PIC-14** was tested in this report.

4 Contents

1 COVER PAGE	1
2 VERSION.....	2
3 TEST SUMMARY	3
4 CONTENTS.....	4
5 GENERAL INFORMATION	5
5.1 Client Information	5
5.2 General Description of E.U.T	5
5.1 Details of E.U.T	5
5.2 Description of Support Units	5
5.3 Deviation from Standards	5
5.4 Abnormalities from Standard Conditions	5
5.5 Test Location	5
5.6 Test Facility	6
6 EQUIPMENT USED DURING TEST.....	7
7 EMISSION TEST RESULTS.....	9
7.1 Conducted Emissions, 9 kHz to 30 MHz.....	9
7.2 Radiated Emissions, 9 kHz to 30 MHz.....	13

5 General Information

5.1 Client Information

Applicant: DONGGUAN QIANFENG ELECTRONICS CO.,LTD.
Address of Applicant: 308#, XINFENG ROAD, SHIJIE TOWN, DONGGUAN CITY, CHINA

5.2 General Description of E.U.T.

Product Name: INDUCTION COOKETOP
Product Description: INDUCTION COOKER
Model No.: PIC-14
Brand Name: NESCO

5.1 Details of E.U.T.

Power Supply: AC 120V 60Hz
Power Cable: 1.2m x 2 wires unscreened AC mains cable.

5.2 Description of Support Units

The EUT has been tested with a boiler with water as load (the boiler supplied by SGS).

5.3 Deviation from Standards

None.

5.4 Abnormalities from Standard Conditions

The EUT passed Radiated Emission (9 kHz to 30 MHz) after retest.

5.5 Test Location

All tests were performed at:
SGS-CSTC Standards Technical Services Co., Ltd., Guangzhou EMC Laboratory,
198 Kezhu Road, Scientech Park, Guangzhou Economic & Technology Development District,
Guangzhou, China 510663
Tel: +86 20 82155555 Fax: +86 20 82075059
No tests were sub-contracted.

5.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **NVLAP (Lab Code: 200611-0)**

SGS-CSTC Standards Technical Services Co., Ltd., Guangzhou EMC Laboratory is recognized under the National Voluntary Laboratory Accreditation Program (NVLAP/NIST). NVLAP Code: 200611-0.

- **ACMA**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory can also perform testing for the Australian C-Tick mark as a result of our NVLAP accreditation.

- **SGS UK(Certificate No.: 32), SGS-TUV SAARLAND and SGS-FIMKO**

Have approved SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory as a supplier of EMC TESTING SERVICES and SAFETY TESTING SERVICES.

- **CNAS (Lab Code: L0167)**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory has been assessed and in compliance with CNAS-CL01:2006 accreditation criteria for testing laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of Testing Laboratories.

- **FCC (Registration No.: 282399)**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 282399, May 31, 2002.

- **Industry Canada (Registration No.: 4620B-1)**

The 3m/10m Alternate Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd. has been registered by Certification and Engineering of Industry Canada for radio equipment testing with Registration No. 4620B-1.

- **VCCI (Registration No.: R-2460, C-2584, G-449 and T-1179)**

The 10m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-2460, C-2584, G-449 and T-1179 respectively.

- **CBTL (Lab Code: TL129)**

SGS-CSTC Standards Technical Services Co., Ltd., E&E Laboratory has been assessed and fully comply with the requirements of ISO/IEC 17025:2005, the Basic Rules, IEC6006-10 and Rules of procedure IEC6006-10, and the relevant IEC600 CB-Scheme Operational documents.

6 Equipment Used during Test

Conducted Emission						
No.	Test Equipment	Manufacturer	Model No.	Serial No.	Cal.Due date (YYYY-MM-DD)	Calibration Interval
EMC0306	Shielding Room	Zhong Yu	8 x 3 x 3.8 m ³	N/A	N/A	N/A
EMC0118	Two-line v-netwok	R&S	ENV216	100359	2012-08-29	1Y
EMC0102	LISN	SCHAFFNER CHASE	MN2050D/1	1421	2012-11-23	1Y
EMC2046	Artificial Mains Network (LISN)	AFJ Instruments	LT32C	S.N.32031120150	2012-05-18	1Y
EMC0506	EMI Test Receiver	Rohde & Schwarz	ESCS30	100085	2012-11-24	1Y
EMC0107	Coaxial Cable	SGS	2m	N/A	2012-07-18	1Y
EMC0106	Voltage Probe	SGS	N/A	N/A	N/A	1Y
EMC0120	8 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN-T8-02	20550	2012-11-11	1Y
EMC0121	4 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN-T4-02	20549	2012-11-11	1Y
EMC0122	2 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN-T2-02	20548	2012-11-11	1Y
EMC167	Conical metal housing	SGS-EMC	N/A	N/A	2013-2-16	1Y

RE in Chamber						
No.	Test Equipment	Manufacturer	Model No.	Serial No.	Cal.Due date (YYYY-MM-DD)	Calibration Interval
EMC0525	Compact Semi-Anechoic Chamber	ChangZhou ZhongYu	N/A	N/A	2012-09-06	2Y
EMC0522	EMI Test Receiver	Rohde & Schwarz	ESIB26	100283	2012-11-11	1Y
EMC0056	EMI Test Receiver	Rohde & Schwarz	ESCI	10036	2012-06-01	1Y
EMC0528	RI High frequency Cable	SGS	20 m	N/A	2012-06-09	1Y
EMC2025	Trilog Broadband Antenna 30-3000MHz	SCHWARZBECK MESS-ELEKTRONIK	VULB 9163	9163-450	2012-10-20	1Y
EMC0524	Bi-log Type Antenna	Schaffner -Chase	CBL6112B	2966	2012-11-28	1Y
EMC0519	Bilog Type Antenna	Schaffner -Chase	CBL6143	5070	2012-11-28	1Y
EMC2026	Horn Antenna 1-18GHz	R&S	BBHA 9120D	9120D-841	2012-10-20	1Y
EMC0518	Horn Antenna	Rohde & Schwarz	HF906	100096	2012-08-29	1Y
EMC0521	1-26.5 GHz Pre-Amplifier	Agilent	8449B	3008A01649	2012-08-29	1Y
EMC0049	Amplifier	Agilent	8447D	2944A10862	2013-03-12	1Y
EMC0075	310N Amplifier	Sonama	310N	272683	2012-08-29	1Y
EMC0523	Active Loop Antenna	EMCO	6502	42963	2012-11-17	1Y
EMC2041	Broad-Band Horn Antenna (14)15-26.5(40)GHz	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9170	9170-375	2012-06-01	1Y
EMC0530	10m Semi-Anechoic Chamber	ETS	N/A	N/A	2012-05-10	2Y

General used equipment						
No.	Test Equipment	Manufacturer	Model No.	Serial No.	Cal.Due date (YYYY-MM-DD)	Calibration Interval
EMC0006	DMM	Fluke	73	70681569	2012-11-14	1Y
EMC0007	DMM	Fluke	73	70671122	2012-11-14	1Y

7 Emission Test Results

7.1 Conducted Emissions, 9 kHz to 30 MHz

Test Requirement: FCC Part 18
Test Method: FCC OST/ MP-5
Test Date: 2012-04-16
Power Supply: AC 120V 60Hz
Frequency Range: 9 kHz to 30 MHz
Detector: Peak for pre-scan, Quasi-Peak and Average for the final result.
(200 Hz Resolution Bandwidth for 9 kHz to 150 kHz,
9 kHz Resolution Bandwidth for 150 kHz to 30 MHz)

Limit:

Frequency range MHz	AC mains terminals	
	Quasi-peak	Average
0.009 to 0.05	110	—
0.05 to 0.15	90 to 80 [*]	—
0.15 to 0.5	66 to 56 [*]	56 to 46 [*]
0.5 to 5	56	46
5 to 30	60	50

Note1: The limit decreases linearly with the logarithm of the frequency in the range 0.05 MHz to 0.5 MHz.

Note2: The lower limit is applicable at the transition frequency.

7.1.1 E.U.T. Operation


Operating Environment:

Temperature: 24 °C Humidity: 55 % RH Atmospheric Pressure: 1012 mbar

EUT Operation: A pre-test was performed on the EUT in cooking mode with max, mid and low power in order to find the worst case.

Test the EUT in cooking mode with low power for the compliance test as the worst case was found.

7.1.2 Test Setup and Procedure

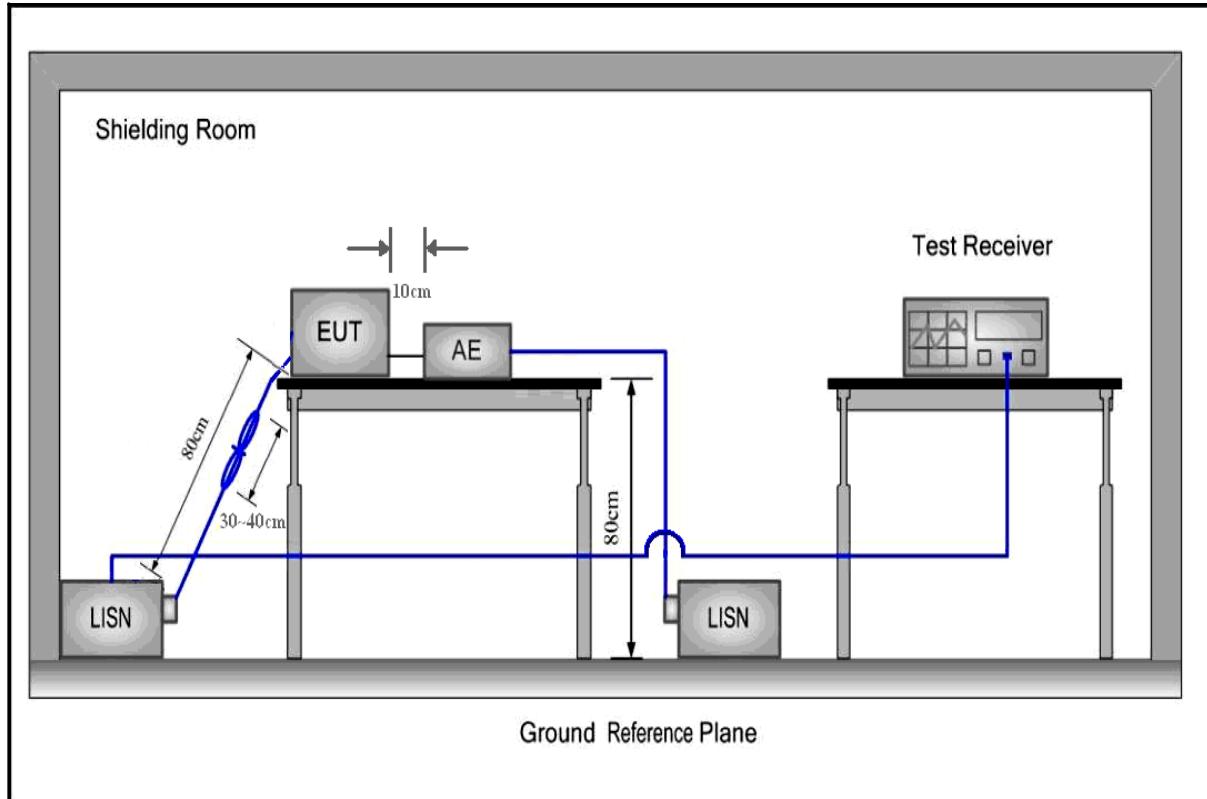

1. The mains terminal disturbance voltage test was conducted in a shielded room.
2. The EUT was connected to nominal power supply through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
3. The tabletop EUT was placed upon a non-metallic table 1 m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, but separated from metallic contact with the ground reference plane by 0.1m of insulation.
4. The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISN mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.


7.1.3 Measurement Data

Pre-scan was performed with peak detected on both live and neutral cable. Quasi-peak & average measurements were performed at the frequencies which maximum peak emission level was detected.

Please see the attached Quasi-peak and Average test results.

Live line:

Peak Scan

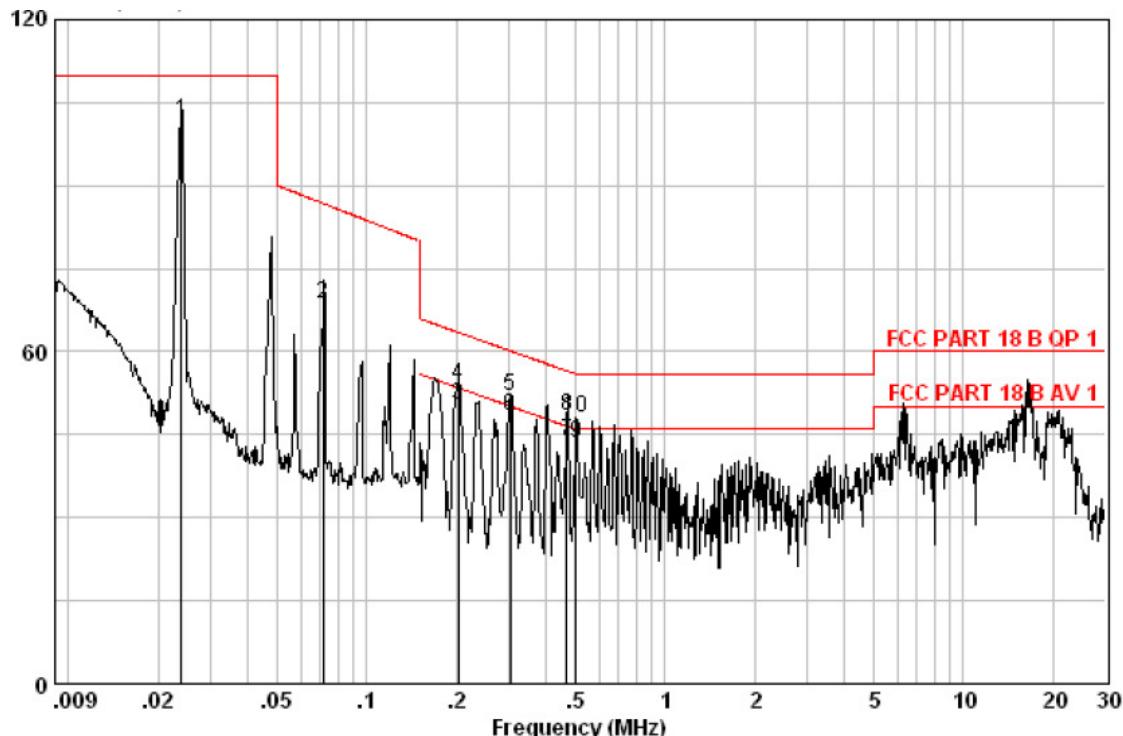


Quasi-peak and Average measurement:

Freq MHz	Read Level dBuV	Cable Loss dB	LISN Factor dB	Level dBuV	Limit Line dBuV	Over Limit dB	Over Limit Remark
							QP
0.024	91.76	0.00	9.85	101.61	110.00	-8.39	QP
0.072	59.08	0.00	9.67	68.75	86.74	-17.99	QP
0.203	40.47	0.13	9.62	50.22	53.49	-3.27	AVERAGE
0.203	44.35	0.13	9.62	54.10	63.49	-9.39	QP
0.303	42.24	0.08	9.64	51.96	60.15	-8.19	QP
0.303	38.52	0.08	9.64	48.24	50.15	-1.91	AVERAGE
0.470	34.24	0.05	9.63	43.92	46.52	-2.60	AVERAGE
0.470	38.64	0.05	9.63	48.32	56.52	-8.20	QP
0.505	33.93	0.05	9.63	43.61	46.00	-2.39	AVERAGE
0.505	38.34	0.05	9.63	48.02	56.00	-7.98	QP

Level = Read Level + Cable Loss + LISN Factor.

Neutral line:

Peak Scan

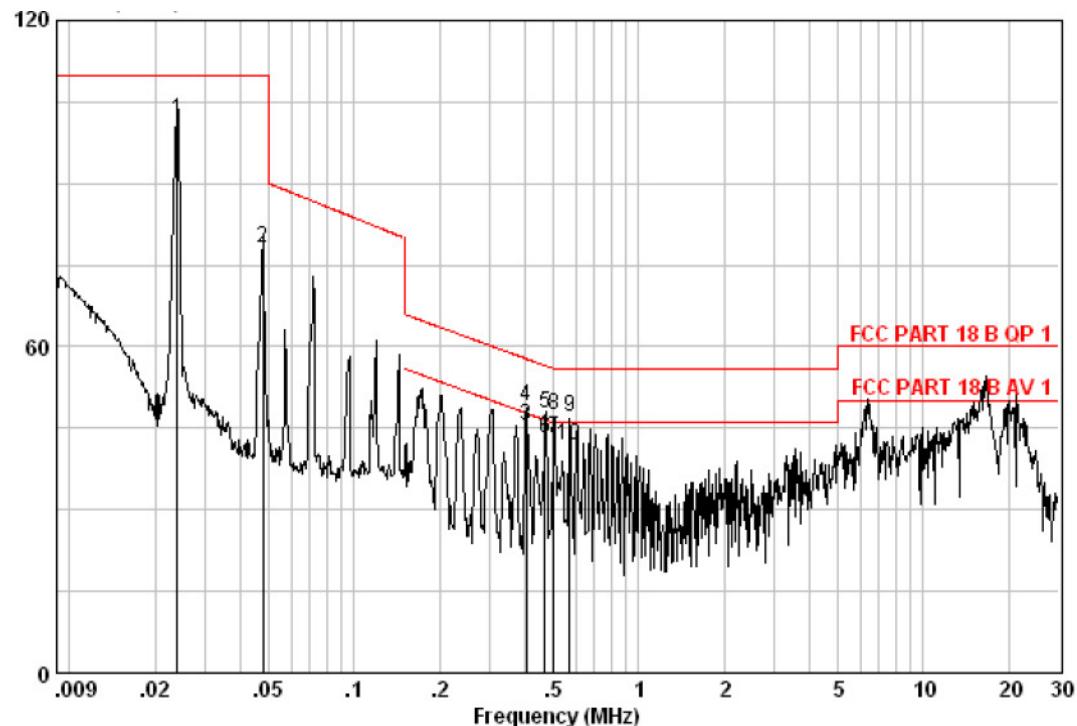

Quasi-peak and Average measurement:

Freq	Read Level	Cable Loss	LISN Factor	Level	Limit		Over Limit	Remark
					MHz	dBuV	dB	dB
0.024	91.76	0.00	9.85	101.61	110.00	110.00	-8.39	QP
0.048	68.34	0.00	9.71	78.05	110.00	110.00	-31.95	QP
0.403	35.83	0.04	9.63	45.50	47.79	47.79	-2.29	AVERAGE
0.403	39.46	0.04	9.63	49.13	57.79	57.79	-8.66	QP
0.470	37.95	0.05	9.63	47.63	56.52	56.52	-8.89	QP
0.470	33.41	0.05	9.63	43.09	46.52	46.52	-3.43	AVERAGE
0.504	33.35	0.05	9.63	43.03	46.00	46.00	-2.97	AVERAGE
0.504	37.75	0.05	9.63	47.43	56.00	56.00	-8.57	QP
0.572	37.35	0.05	9.63	47.03	56.00	56.00	-8.97	QP
0.572	32.32	0.05	9.63	42.00	46.00	46.00	-4.00	AVERAGE

Level = Read Level +Cable Loss + LISN Factor.

7.2 Radiated Emissions, 9 kHz to 30 MHz

Test Requirement: FCC Part 18
Test Method: FCC OST/ MP-5
Power Supply: AC 120V 60Hz
Test Date: 2012-04-16
Frequency Range: 9 kHz to 30 MHz
Measurement Distance: 10m
Detector: Peak for pre-scan, Average for the final result
(200 Hz Resolution Bandwidth for 9 kHz to 150 kHz
9 kHz Resolution Bandwidth for 150 kHz to 30 MHz)

Limit:

Equipment	Operating frequency	RF Power generated by equipment (watts)	Field strength limit (uV/m)	Distance (meters)
Induction cooking ranges	Below 90 kHz	Any	1,500	430
	On or above 90 kHz	Any	300	430

For Induction cooking ranges and the operating frequency is below 90 kHz, the field strength limit is 1,500 μ V/m@30m,
i.e. $20\lg(1500)+20\lg(30/10)=63.52+9.54=73.06\text{dBuV/m @ 10m distance.}$

7.2.1 E.U.T. Operation


Operating Environment:

Temperature: 24 °C Humidity: 53 % RH Atmospheric Pressure: 1012 mbar

EUT Operation: A pre-test was performed on the EUT in cooking mode with max, mid and low power in order to find the worst case.

Test the EUT in cooking mode with max power for the compliance test as the worst case was found.

7.2.2 Test Setup and Procedure

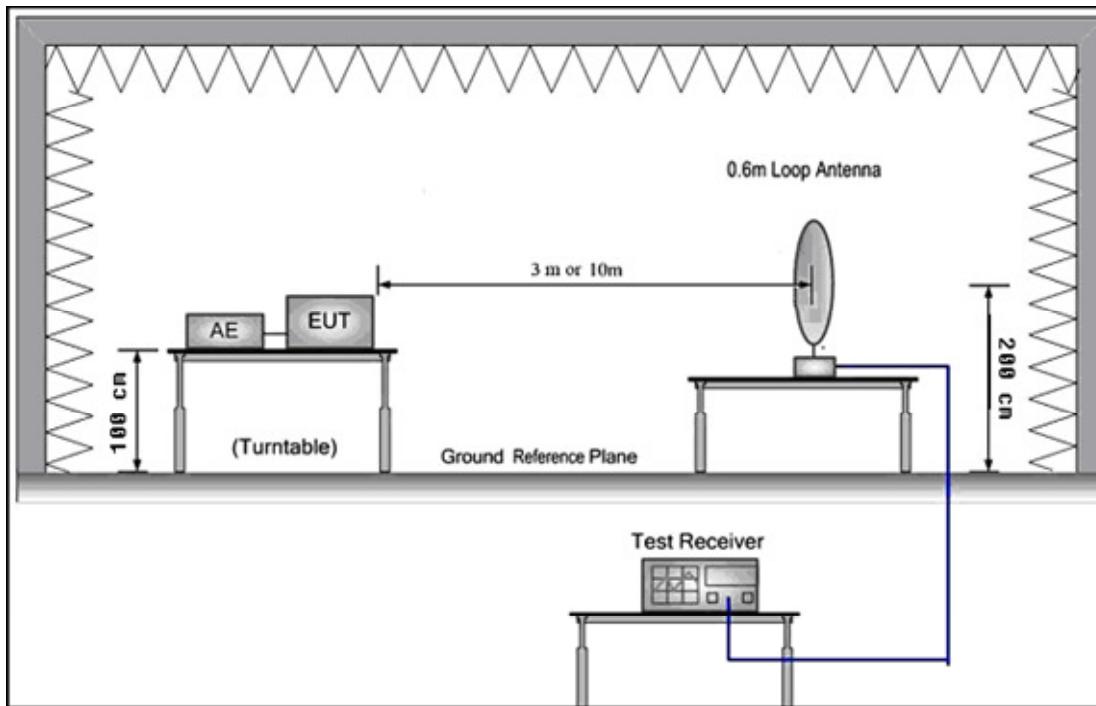


1. The magnetic emissions test was conducted in a semi-anechoic chamber.
2. The EUT was connected to AC power source through a mains power outlet which was bonded to the ground reference plane; The mains cables shall drape to the ground reference plane.
3. The tabletop EUT was placed upon a non-metallic table 1 m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, but separated from metallic contact with the ground reference plane by 0.1m of insulation.
4. Before final measurements of magnetic emissions, a pre-scan was performed in the spectrum mode with the peak detector to find out the maximum emission spectrum signature data plots of the EUT.

The frequencies of maximum emission were determined in the final magnetic emissions measurement. The physical arrangement of the test system and associated cabling was varied in order to determine the effect on the EUT's emissions in amplitude, direction and frequency. At each frequency, the EUT was rotated 360°, the antenna was supported in the vertical plane and be rotatable about a vertical axis. The antenna height was set at around 2 m above the ground reference plane.

7.2.3 Measurement Data

Vertical:

Peak scan

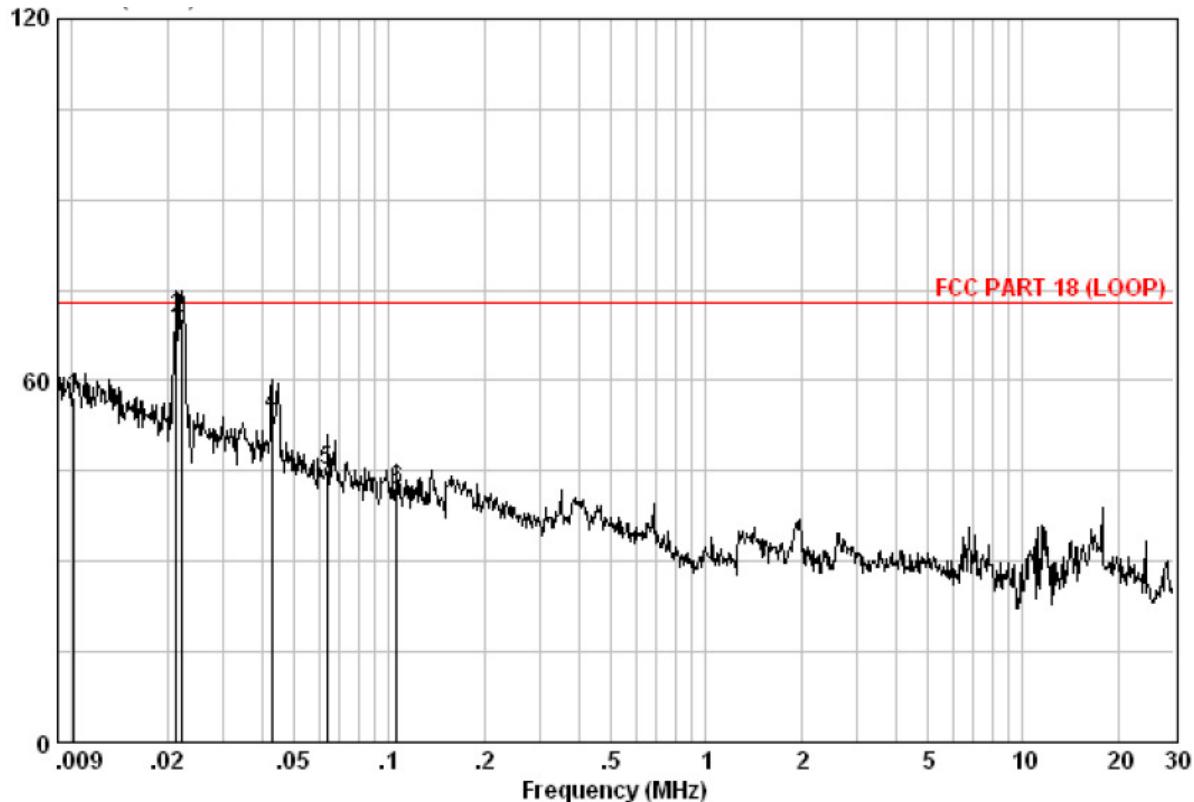


Frequency (MHz)	Transducer (dB)	Receiver AV Reading (dB μ V)	AV Level (dB μ V/m)	Limit (dB μ V/m)	Over Limit (dB)
0.01013	18.9	38.23	57.13	73.06	-15.93
0.02129	14.42	56.01	70.43	73.06	-2.63
0.02214	14.31	56.06	70.37	73.06	-2.69
0.04253	12.54	41.89	54.43	73.06	-18.63
0.06378	11.92	33.17	45.09	73.06	-27.97
0.10582	11.9	29.83	41.73	73.06	-31.33

Transducer= Antenna Factor + Cable Loss.**Level = Read Level + Transducer.**

Horizontal:

Peak scan

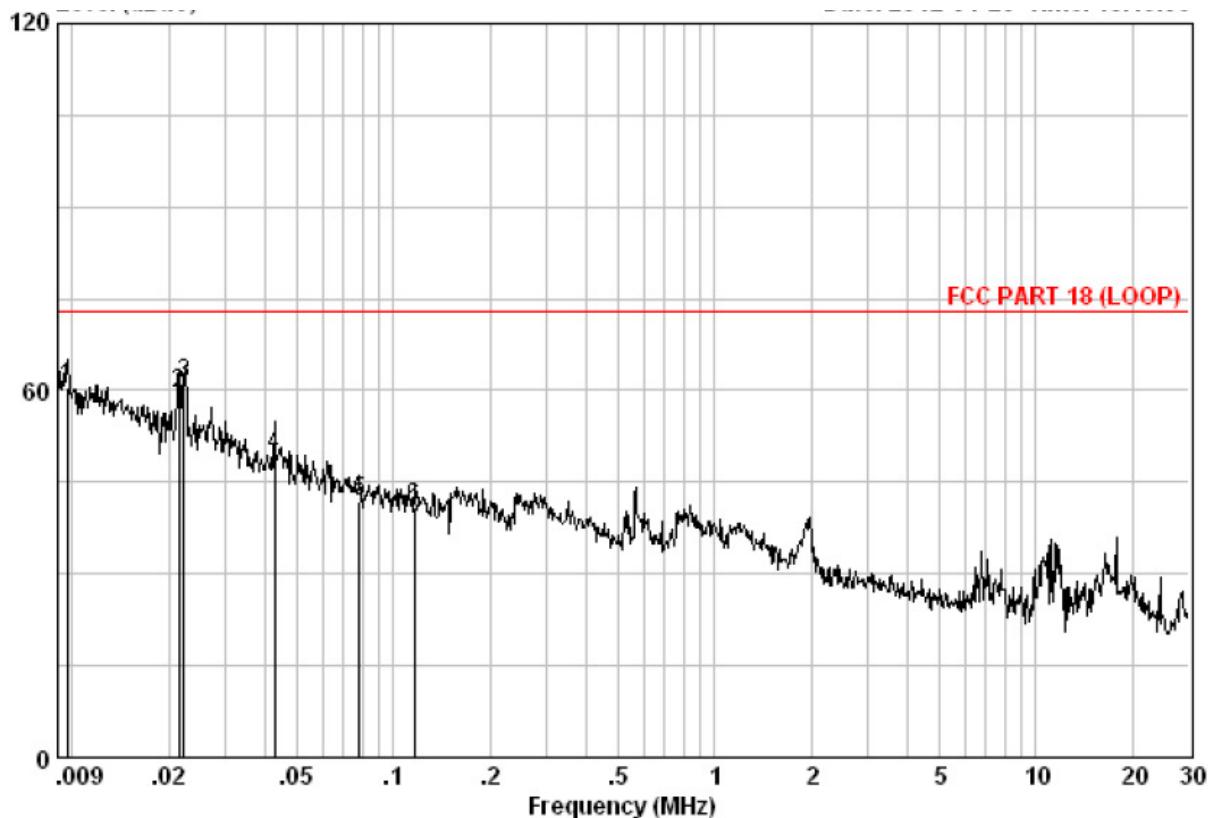

Average measurement

Frequency (MHz)	Transducer (dB)	Receiver AV Reading (dB μ V)	AV Level (dB μ V/m)	Limit (dB μ V/m)	Over Limit (dB)
0.00963	19.35	41.23	60.58	73.06	-12.48
0.02141	14.4	45.01	59.41	73.06	-13.65
0.02227	14.29	46.83	61.12	73.06	-11.94
0.04265	12.52	36.95	49.47	73.06	-23.59
0.07832	11.82	30.17	41.99	73.06	-31.07
0.11579	11.89	29.01	40.9	73.06	-32.16

Transducer= Antenna Factor + Cable Loss.**Level = Read Level + Transducer.****--End of Report--**