



FCC SAR TEST REPORT

Report No.: SET2014-08311

Product: Mobile phone

Model No.: innos i7,MN8 Wingtip

FCC ID: COYI7

Applicant: JSR Limited

Address: Room 8, 12/F, Lucida Industrial Building, No.43-47 Wang Lung Street, Tsuen Wan, New Territories 999077, Hong Kong.

Issued by: CCIC-SET

Lab Location: Electronic Testing Building, Shahe Road, Xili, Nanshan District, Shenzhen, 518055, P. R. China

Tel: 86 755 26627338 **Fax:** 86 755 26627238

Mail: manager@ccic-set.com **Website:** <http://www.ccic-set.com>

This test report consists of **157** pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CCIC-SET. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to CCIC-SET within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit.



Test Report

Product.: Mobile phone
Model No.: innos i7,MN8 Wingtip
Brand Name.....: innos
FCC ID.....: COYI7
Applicant.....: JSR Limited
Applicant Address.....: Room 8, 12/F, Lucida Industrial Building, No.43-47 Wang Lung Street, Tsuen Wan, NewTerroteris 999077,Hong Kong.

Manufacturer.....: Shenzhen JSR Technology Co.,Ltd.
Manufacturer Address: 2-3F,E building,Yu Jianfeng science and industry park,Huafan road,Tongheng community,Dalang,Baoan district,Shenzhen city,Guangdong,China. postcode:518109

Test Standards.....: **47CFR § 2.1093-** Radiofrequency Radiation Exposure Evaluation: Portable Devices;
FCC OET Bulletin 65 (Edition 97-01), Supplement C (Edition 01-01): Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields;
ANSI C95.1-1999: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz;
IEEE 1528-2013: Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices: Experimental Techniques;

Test Result.....: Pass

Tested by Mei Chun 2014-08-14
Chun Mei, Test Engineer

Reviewed by.....: Shuangwen Zhang 2014-08-14
Shuangwen Zhang, Senior Engineer

Approved by.....: Wu Lian 2014-08-14
Wu Li'an , Manager

Contents

1. GENERAL CONDITIONS	4
2. ADMINISTRATIVE DATA	5
2.1. Identification of the Responsible Testing Laboratory	5
2.2. Identification of the Responsible Testing Location(s)	5
2.3. Organization Item	5
2.4. Identification of Applicant	5
2.5. Identification of Manufacture	5
3. EQUIPMENT UNDER TEST (EUT)	6
4. OPERATIONAL CONDITIONS DURING TEST	7
4.1. Introduction	7
4.2. SAR Definition	7
4.3. Phantoms	8
4.4. Device Holder	8
4.5. Probe Specification	9
5. OPERATIONAL CONDITIONS DURING TEST	10
5.1. Schematic Test Configuration	10
5.2. SAR Measurement System	10
5.3. Equipments and results of validation testing	14
5.4. SAR measurement procedure	17
5.5. Antennas position and test position	18
6. CHARACTERISTICS OF THE TEST	19
6.1. Applicable Limit Regulations	19
6.2. Applicable Measurement Standards	19
7. LABORATORY ENVIRONMENT	20
8. CONDUCTED RF OUTPUT POWER	21
9. TEST RESULTS	28
10. MEASUREMENT UNCERTAINTY	35
11. MAIN TEST INSTRUMENTS	36

This Test Report consists of the following Annexes:

Annex A: Accreditation Certificate	37
Annex B: Test Layout	39
Annex C: Sample Photographs	46
Annex D: System Performance Check Data and Highest SAR Plots	48
Annex E: Calibration Certificate of Probe and Dipoles	102

1. GENERAL CONDITIONS

1.1 This report only refers to the item that has undergone the test.

1.2 This report standalone does not constitute or imply by its own an approval of the product by the certification Bodies or competent Authorities.

1.3 This document is only valid if complete; no partial reproduction can be made without written approval of CCIC-SET

1.4 This report cannot be used partially or in full for publicity and/or promotional purposes without previous written approval of CCIC-SET and the Accreditation Bodies, if it applies.



2. Administrative Date

2.1. Identification of the Responsible Testing Laboratory

Company Name: CCIC-SET

Department: EMC & RF Department

Address: Electronic Testing Building, Shahe Road, Nanshan District, Shenzhen, P. R. China

Telephone: +86-755-26629676

Fax: +86-755-26627238

Responsible Test Lab Managers: Mr. Wu Li'an

2.2. Identification of the Responsible Testing Location(s)

Company Name: CCIC-SET

Address: Electronic Testing Building, Shahe Road, Nanshan District, Shenzhen, P. R. China

2.3. Organization Item

CCIC-SET Report No.: SET2014-08311

CCIC-SET Project Leader: Mr. Li Sixiong

CCIC-SET Responsible for accreditation scope: Mr. Wu Li'an

Start of Testing: 2014-08-04

End of Testing: 2014-08-05

2.4. Identification of Applicant

Company Name: JSR Limited

Address: Room 8, 12/F, Lucida Industrial Building, No.43-47 Wang Lung Street, Tsuen Wan, New Territories 999077, Hong Kong.

2.5. Identification of Manufacture

Company Name: Shenzhen JSR Technology Co., Ltd.

Address: 2-3F, E building, Yu Jianfeng science and industry park, Huafan road, Tongheng community, Dalang, Baoan district, Shenzhen city, Guangdong, China. postcode: 518109

Notes: This data is based on the information by the applicant.

3. Equipment Under Test (EUT)

3.1. Identification of the Equipment under Test

Sample Name:		Mobile phone
Type Name:		innos i7,MN8 Wingtip
Brand Name:		innos
General description:	Support Band	GSM850MHz/1900MHz/900MHz/1800MHz WCDMA 850MHz/1700MHz/1900MHz Wi-Fi802.11b,802.11g,802.11n-20, Bluetooth
	Test Band	GSM 850MHz/ GSM 1900MHz WCDMA 850MHz/ WCDMA 1700MHz / WCDMA 1900MHz Wi-Fi 802.11b
	Multislot Class	GPRS: Class 12
	GPRS Class	Class B
	Development Stage	Identical Prototype
	Accessories	Power Supply
	Battery type	4.2V 1750mAh
	Antenna type	PIFA Antenna
	Operation mode	GSM / GPRS/WCDMA / Bluetooth / WIFI
	Modulation mode	GMSK, QPSK,DSSS, OFDM, GFSK/π /4-DQPSK/8-DPSK
	IMEI	863147020002403
	Max. RF Power	32.50dBm
	Max. SAR Value	Head:0.399w/kg; Body:1.282w/kg

NOTE:

- The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
- This device supports GPRS operation up to class12
(max.uplin:4, max.downlink:4, total timeslots:5)
- The differences between the original devices and the current ones as following: the applicant's name and the applicant's address, and the Model Number. All above differences describe will not effecting the test result of SAR, so in this report we keep all test data and test setup photos and photos of EUT innos i7.
- The EUT does not support 16QAM uplink function in HSPA+ mode.

4 Specific Absorption Rate (SAR)

4.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

4.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$\text{SAR} = C \frac{\delta T}{\delta t}$$

where C is the specific heat capacity, δT is the temperature rise and δt the exposure duration, or related to the electrical field in the tissue by

$$\text{SAR} = \frac{\sigma |E|^2}{\rho}$$

where σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the rms electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

4.3 Phantoms

The phantom used for all tests i.e. for both system checks and device testing, was the twin-headed "SAM Phantom", manufactured by SATIMO. The SAM twin phantom is a fiberglass shell phantom with 2mm shell thickness (except the ear region, where shell thickness increases to 6mm).

System checking was performed using the flat section, whilst Head SAR tests used the left and right head profile sections. Body SAR testing also used the flat section between the head profiles.




SAM Twin Phantom

4.4 Device Holder

The device was placed in the device holder (illustrated below) that is supplied by SATIMO as an integral part of the COMOSAR test system.

The device holder is designed to cope with the different positions given in the standard. It has two scales for device rotation (with respect to the body axis) and device inclination (with respect to the line between the ear reference points). The rotation centers for both scales is the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.

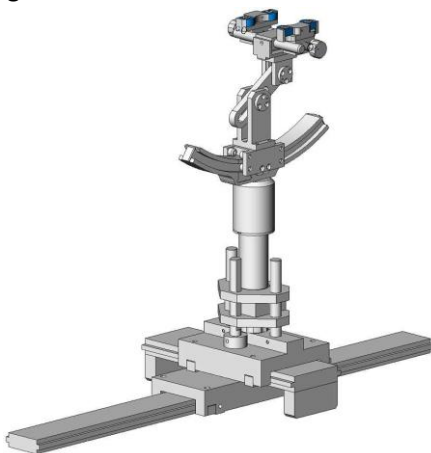

Device holder

4.5 Probe Specification




Construction	Symmetrical design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Calibration	ISO/IEC 17025 calibration service available.
Frequency	700 MHz to 3 GHz; Linearity: ± 0.5 dB (700 MHz to 3 GHz)
Directivity	± 0.25 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)
Dynamic Range	1.5 μ W/g to 100 mW/g; Linearity: ± 0.5 dB
Dimensions	Overall length: 330 mm (Tip: 20 mm) Tip diameter: 5 mm (Body: 8 mm) Distance from probe tip to dipole centers: <2.7 mm
Application	General dosimetry up to 3 GHz Dosimetry in strong gradient fields Compliance tests of mobile phones
Compatibility	COMOSAR

Isotropic E-Field Probe

The isotropic E-Field probe has been fully calibrated and assessed for isotropicity, and boundary effect within a controlled environment. Depending on the frequency for which the probe is calibrated the method utilized for calibration will change.

The E-Field probe utilizes a triangular sensor arrangement as detailed in the diagram below:

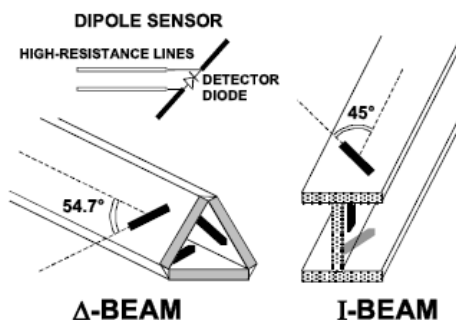

5 OPERATIONAL CONDITIONS DURING TEST

5.1 Schematic Test Configuration

During SAR test, EUT was operating in Traffic Mode (Channel Allocated) at Normal Voltage Condition. A communication link is set up with a System Simulator (SS) by air link, and a call is established.

The Absolute Radio Frequency Channel Number (ARFCN) was allocated to 128, 190 and 251 respectively in the case of GSM 850MHz, or to 512, 661 and 810 respectively in the case of PCS 1900MHz, or to 4132, 4183 and 4233 respectively in the case of WCDMA 850MHz, or to 9262, 9400 and 9538 respectively in the case of WCDMA 1900MHz, or to 1537, 1637 and 1738 respectively in the case of WCDMA 1700MHz, and WIFI 802.11b. The EUT was commanded to operate at maximum transmitting power.

The EUT should use its internal transmitter. The antenna(s), battery and accessories shall be those specified by the manufacturer. The EUT battery must be fully charged and checked periodically during the test to ascertain uniform power output. If a wireless link was used, the antenna connected to the output of the base station simulator shall be placed at least 50 cm away from the handset.

The signal transmitted by the simulator to the antenna feeding point should be lower than the output power level of the handset by at least 35 dB

5.2 SAR Measurement System

The SAR measurement system being used is the SATIMO system, the system is controlled remotely from a PC, which contains the software to control the robot and data acquisition equipment. The software also displays the data obtained from test scans.

In operation, the system first does an area (2D) scan at a fixed depth within the liquid from the inside wall of the phantom. When the maximum SAR point has been found, the system will then carry out a 3D scan centred at that point to determine volume averaged SAR level.

5.2.1 Tissue Dielectric Parameters for Head and Body Phantoms

The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 in P1528 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness Power drifts in a human head. Other head and body tissue parameters that have not been specified in P1528 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equations described in Reference [12] and extrapolated according to the head parameters specified in P1528.

Table 1: Recommended Dielectric Performance of Tissue

Ingredients (% by weight)	Frequency (MHz)									
	450		835		915		1900		2450	
Tissue Type	Head	Body	Head	Body	Head	Body	Head	Body	Head	Body
Water	38.56	51.16	41.46	52.4	41.05	56.0	54.9	40.4	62.7	73.2
Salt (Nacl)	3.95	1.49	1.45	1.4	1.35	0.76	0.18	0.5	0.5	0.04
Sugar	56.32	46.78	56.0	45.0	56.5	41.76	0.0	58.0	0.0	0.0
HEC	0.98	0.52	1.0	1.0	1.0	1.21	0.0	1.0	0.0	0.0
Bactericide	0.19	0.05	0.1	0.1	0.1	0.27	0.0	0.1	0.0	0.0
Triton x-100	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	36.8	0.0
DGBE	0.0	0.0	0.0	0.0	0.0	0.0	44.92	0.0	0.0	26.7
Dielectric Constant	43.42	58.0	42.54	56.1	42.0	56.8	39.9	54.0	39.8	52.5
Conductivity (s/m)	0.85	0.83	0.91	0.95	1.0	1.07	1.42	1.45	1.88	1.78

Table 2 Recommended Tissue Dielectric Parameters

Frequency (MHz)	Head Tissue		Body Tissue	
	ϵ_r	$\sigma(S/m)$	ϵ_r	$\sigma(S/m)$
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800-2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5800	35.3	5.27	48.2	6.00

5.2.2 Simulant liquids

For measurements against the phantom head, the “cheek” and “tilt” position on both the left hand and the right hand sides of the phantom. For body-worn measurements, the EUT was tested against flat phantom representing the user body. The EUT was put on in the belt holder. Simulant liquids that are used for testing at frequencies of GSM 850MHz, GSM 1900MHz, WCDMA 850MHz, WCDMA 1700MHz, WCDMA 1900MHz, and Wi-Fi 2.4GHz, which are made mainly of sugar, salt and water solutions may be left in the phantoms.

Table 3: Dielectric Performance of Head Tissue Simulating Liquid

Temperature: 23.2°C; Humidity: 64%;					
/	Frequency	Permittivity ϵ	Conductivity σ (S/m)	Deviation (%)	
Target value	835MHz	41.5	0.90	ϵ	σ
Validation value (August 4th, 2014)	835MHz	41.45	0.91	-0.1	1.1
Target value	1750 MHz	40.0	1.40	--	--
Validation value (August 4th, 2014)	1750 MHz	39.98	1.41	-0.1	0.7
Target value	1900MHz	40.0	1.40	--	--
Validation value (August 4th, 2014)	1900MHz	39.98	1.41	-0.1	0.7
Target value	2450MHz	39.2	1.80	--	--
Validation value (August 4th, 2014)	2450MHz	38.99	1.81	-0.5	0.6

Table 4: Dielectric Performance of Body Tissue Simulating Liquid

Temperature: 23.2°C; Humidity: 64%;					
/	Frequency	Permittivity ϵ	Conductivity σ (S/m)	Deviation (%)	
Target value	835MHz	55.2	0.97	ϵ	σ
Validation value (August 5th, 2014)	835MHz	55.26	0.98	0.1	1.0
Target value	1750 MHz	53.3	1.52	--	--
Validation value (August 5th, 2014)	1750 MHz	53.89	1.53	1.1	0.7
Target value	1900MHz	53.3	1.52	--	--
Validation value (August 5th, 2014)	1900MHz	53.28	1.53	0.0	-0.7
Target value	2450MHz	52.7	1.95	--	--
Validation value (August 5th, 2014)	2450MHz	52.65	1.96	-0.1	0.5

According to Annex F (IEC62209-2), the delta SAR refers to the percent change in SAR relative to the percent change in dielectric properties versus the target values. A negative delta SAR would translate to a lower measured SAR value than what would be measured if using dielectric properties equal to the target values. A positive delta SAR would translate to a higher measured SAR value than what would be measured if using dielectric properties equal to the target values. SAR correction shall not be made when the delta SAR has a positive sign to provide a conservative SAR value. The SAR is only corrected when delta SAR has a negative sign. The Δ SAR were given as follow:

Table 5: Δ SAR of each band

Frequency	SAR correction formula	Δ SAR	
		Head	Body
835MHz	$0.7530 \cdot \Delta \sigma(\%) - 0.2194 \cdot \Delta \epsilon(\%)$	>0	>0
1750MHz	$0.6256 \cdot \Delta \sigma(\%) - 0.2260 \cdot \Delta \epsilon(\%)$	>0	>0
1900MHz	$0.594 \cdot \Delta \sigma(\%) - 0.1556 \cdot \Delta \epsilon(\%)$	>0	>0
2450MHz	$0.4801 \cdot \Delta \sigma(\%) - 0.225 \cdot \Delta \epsilon(\%)$	>0	>0

Since each band has a positive Δ SAR, the SAR correction is not required.



Fig. 1 Configuration of body tissue


5.3 Equipments and results of validation testing

Table 6 Important equipments :

Equipment description	Manufacturer/Model	Identification No.
System Simulator	E5515C	GB 47200710
SAR Probe	SATIMO	SN 09/13 EP169
Dipole	SID835	SN 09/13 DIP 0G835-217
Dipole	SID1800	SN 09/13 DIP 1G800-216
Dipole	SID1900	SN 09/13 DIP 1G900-218
Dipole	SID2450	SN 09/13 DIP 2G450-220
Vector Network Analyzer	ZVB8	A0802530
Signal Generator	SMR27	A0304219
Amplifier	Nucletudes	143060
Power Meter	NRVS	1020.1809.02
Power Sensor	NRV-Z4	100069
Multimeter	Keithley-2000	4014020
Device Holder	SATIMO	SN 09/13 MSH80
SAM Phantom	SAM97	SN 09/13 SAM97

Prior to the assessment, the system validation kit was used to test whether the system was operating within its specifications of $\pm 10\%$. The validation results are tabulated below. And also the corresponding SAR plot is attached as well in the SAR plots files.

The following procedure, recommended for performing validation tests using box phantoms is based on the procedures described in the draft IEEE standard P1528. Setup according to the setup diagram below :

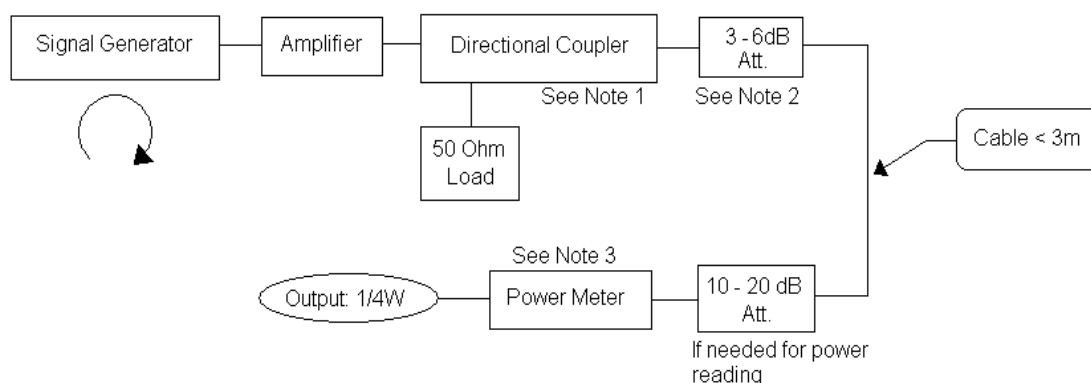

With the SG and Amp and with directional coupler in place, set up the source signal at the relevant frequency and use a power meter to measure the power at the end of the SMA cable that you intend to connect to the balanced dipole. Adjust the SG to make this, say, 0.25W (24 dBm). If this level is too high to read directly with the power meter sensor, insert a calibrated attenuator (e.g. 10 or 20 dB) and make a suitable correction to the power meter reading.

Note 1: In this method, the directional coupler is used for monitoring rather than setting the exact feed power level. If, however, the directional coupler is used for power measurement, you should

check the frequency range and power rating of the coupler and measure the coupling factor (referred to output) at the test frequency using a VNA.

Note 2: Remember that the use of a 3dB attenuator (as shown in Figure 8.1 of P1528) means that you need an RF amplifier of 2 times greater power for the same feed power. The other issue is the cable length. You might get up to 1dB of loss per meter of cable, so the cable length after the coupler needs to be quite short.

Note 3: For the validation testing done using CW signals, most power meters are suitable. However, if you are measuring the output of a modulated signal from either a signal generator or a handset, you must ensure that the power meter correctly reads the modulated signals.

The measured 1-gram averaged SAR values of the device against the phantom are provided in Tables 7 and Table 8. The humidity and ambient temperature of test facility were 64% and 23.2°C respectively. The body phantom were full of the body tissue simulating liquid. The EUT was supplied with full-charged battery for each measurement.

The distance between the back of the EUT and the bottom of the flat phantom is 10 mm (taking into account of the IEEE 1528 and the place of the antenna).

Table 7: Head SAR system validation (1g)

Frequency	Duty cycle	Target value (W/kg)	Test value (W/kg)	
			250 mW	1W
835MHz (August 4th, 2014)	1:1	9.72	2.45	9.80
1750MHz (August 4th, 2014)	1:1	39.96	9.88	39.52
1900MHz (August 4th, 2014)	1:1	40.95	9.77	39.08
2450MHz (August 4th, 2014)	1:1	53.33	13.17	52.68

Note: Target value was referring to the measured value in the calibration certificate of reference dipole.

Note: All SAR values are normalized to 1W forward power.


Table 8: Body SAR system validation (1g)

Frequency	Duty cycle	Target value (W/kg)	Test value (W/kg)	
			250 mW	1W
835MHz (August 5th, 2014)	1:1	9.92	2.44	9.76
1750MHz (August 5th, 2014)	1:1	39.19	9.78	39.12
1900MHz (August 5th, 2014)	1:1	40.29	9.98	39.92
2450MHz (August 5th, 2014)	1:1	51.99	13.08	52.32

*Note: All SAR values are normalized to 1W forward power.

5.4 SAR measurement procedure

The SAR test against the head phantom was carried out as follow:

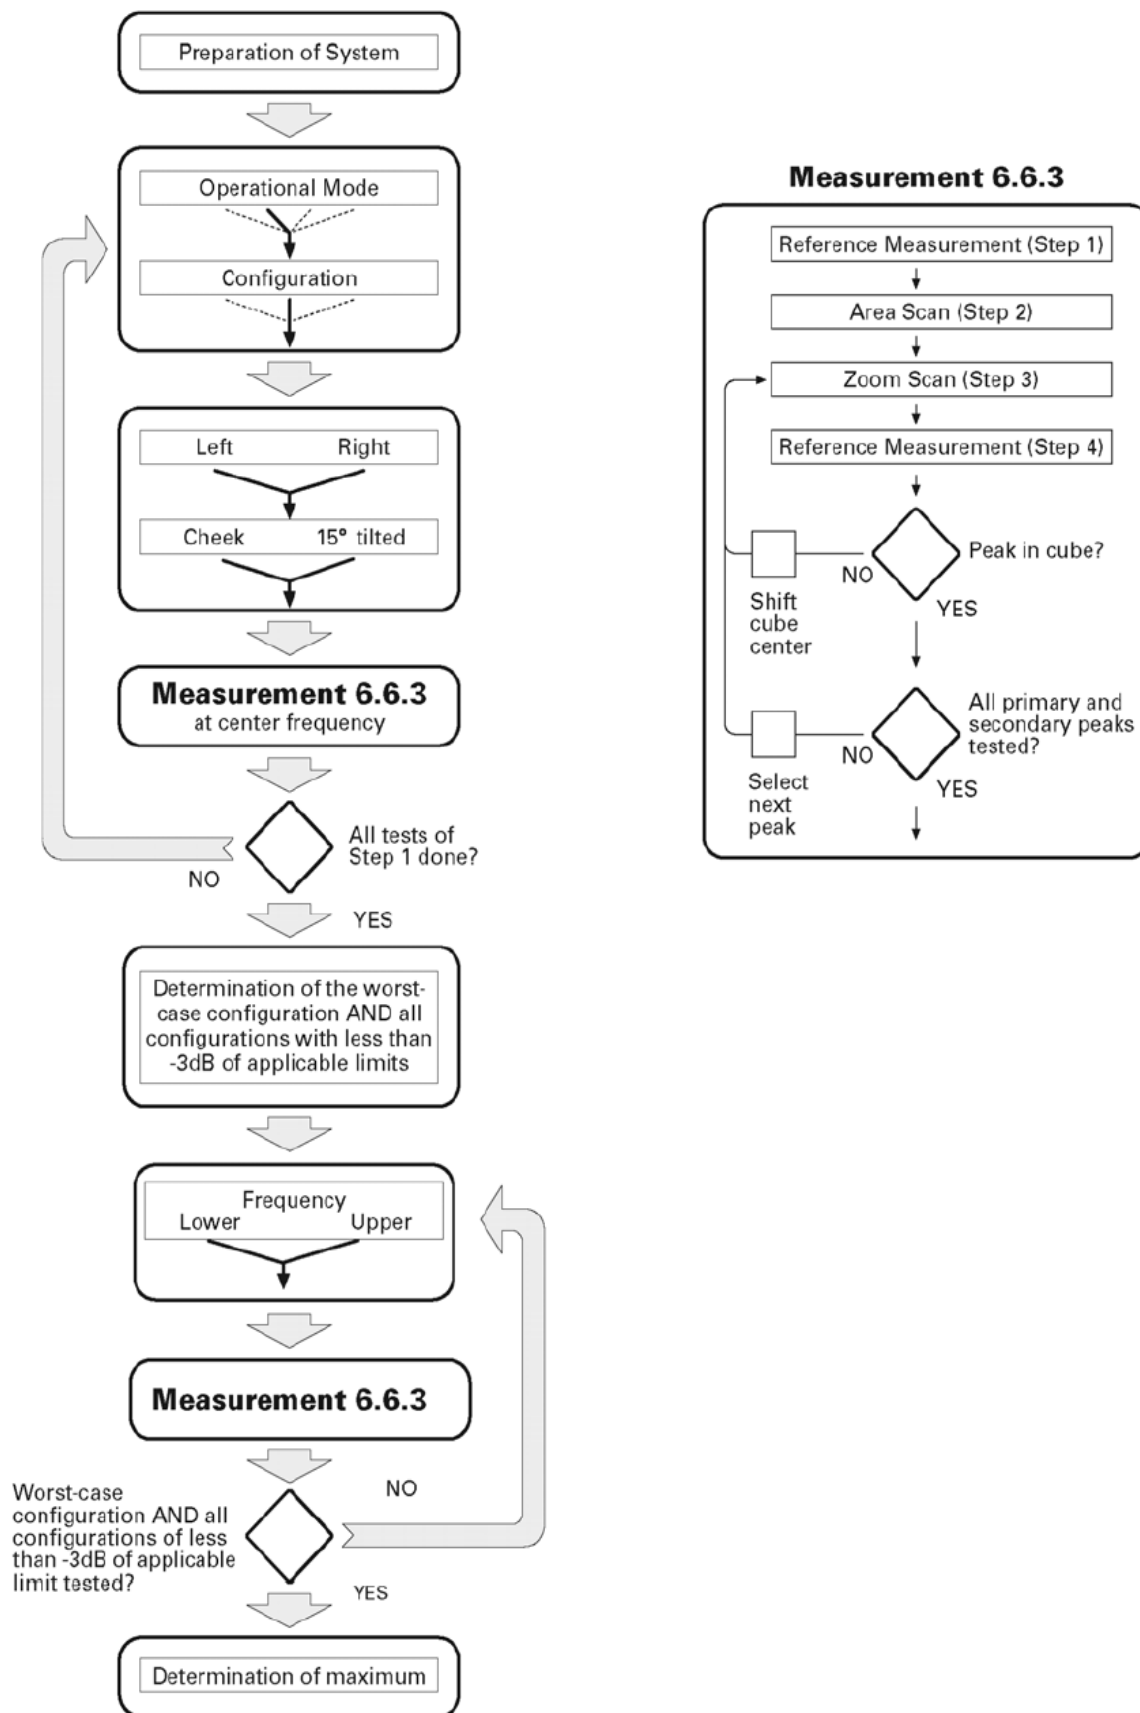

Establish a call with the maximum output power with a base station simulator, the connection between the EUT and the base station simulator is established via air interface.

After an area scan has been done at a fixed distance of 8mm from the surface of the phantom on the source side, a 3D scan is set up around the location of the maximum spot SAR. First, a point within the scan area is visited by the probe and a SAR reading taken at the start of testing. At the end of testing, the probe is returned to the same point and a second reading is taken. Comparison between these start and end readings enables the power drift during measurement to be assessed.

Above is the scanning procedure flow chart and table from the IEEE p1528 standard. This is the procedure for which all compliant testing should be carried out to ensure that all variations of the device position and transmission behaviour are tested.

For body-worn measurement, the EUT was tested under two position: face upward and back upward.

5.5 Transmitting antenna information

There are two antennas (GSM & WCDMA antenna, WIFI & BT antenna) inside the EUT, the former two antennas are the transmitting source, and they are a type of PIFA antenna.

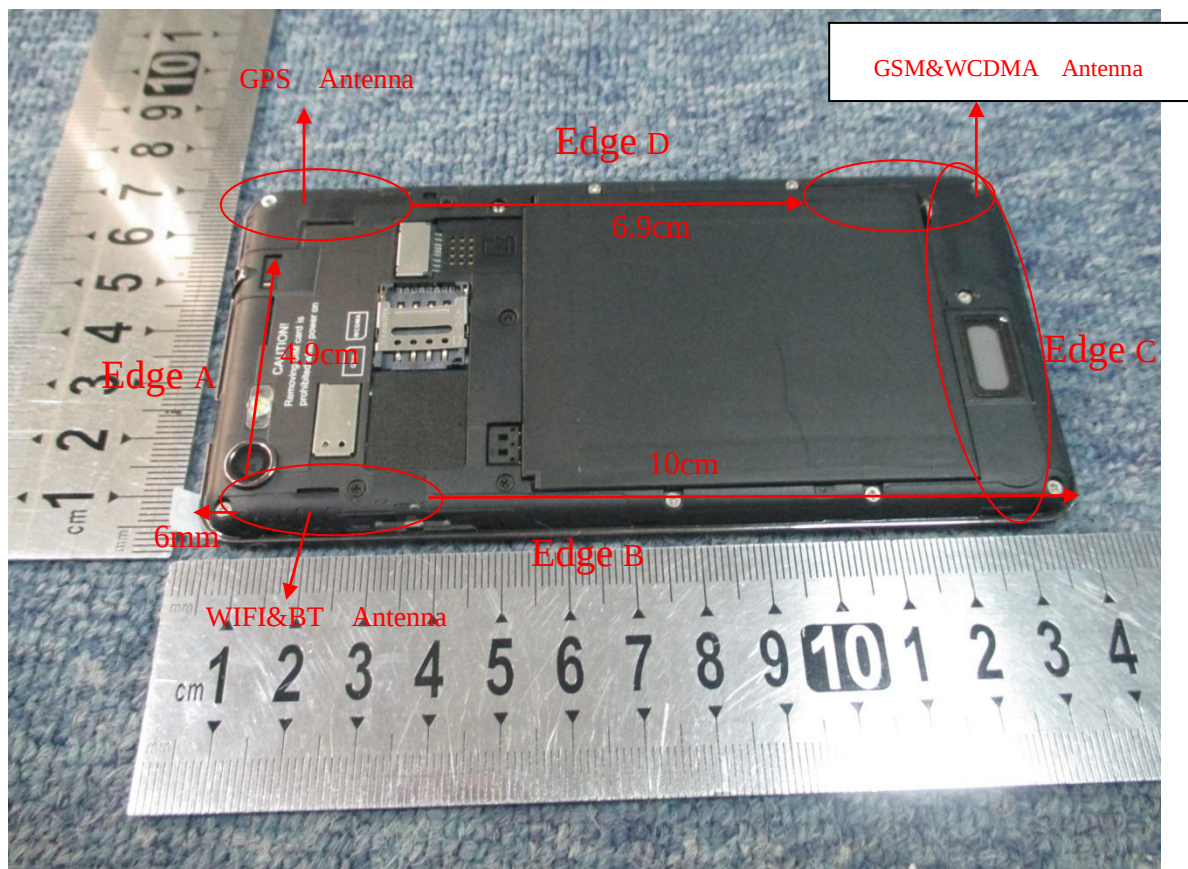


Fig. 3 Position of the antennas

HOTSPOT MODE EVALUATION PROCEDURE

The SAR evaluation procedures for Portable Devices with Wireless Router function is according to KDB 941225 D06 Hot Spot SAR v01.

SAR must be tested for all surfaces and edges(side) with a transmitting antenna with in 2.5cm from that surface or edge, at a test separation distance of 10mm, in the wireless modes that support wireless routing.

Assessment		Hotspot side for SAR				
		Test distance:10mm				
Antennas	Back	Front	Edge A	Edge B	Edge C	Edge D
GSM/WCDMA	Yes	Yes	No	Yes	Yes	Yes
WLAN/BT	Yes	Yes	Yes	Yes	No	No

6 CHARACTERISTICS OF THE TEST

6.1 Applicable Limit Regulations

47CFR § 2.1093- Radiofrequency Radiation Exposure Evaluation: Portable Devices;

FCC OET Bulletin 65 (Edition 97-01), Supplement C (Edition 01-01): Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields;

ANSI C95.1–1999: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz;

IEEE 1528–2013: Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices: Experimental Techniques;

It specifies the maximum exposure limit of **1.6 W/kg** as averaged over any 1 gram of tissue for portable devices being used within 20 cm of the user in the uncontrolled environment.

6.2 Applicable Measurement Standards

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this is in accordance with the following standards:

FCC 47 CFR Part2 (2.1093)

FCC OET Bulletin 65 (Edition 97-01), Supplement C (Edition 01-01)

ANSI/IEEE C95.1-1992

IEEE 1528-2003

IC RSS 102 Issue 4

FCC KDB 447498 D02 v01r01 Dipole Requirements for SAR System Validation and Verification

FCC KDB 447498 D01 v05r01 General RF Exposure Guidance v05r01

FCC KDB 648474 D04 v01r01 SAR Evaluation Considerations for Wireless Handsets

FCC KDB 248227 D01 v01r02 SAR Measurement Procedures-802.11a/b/g Transmitters

FCC KDB 865664 D01 v01r01 SAR Measurement 100MHz to 6GHz

FCC KDB 865664 D02 v01r01 SAR Reporting

FCC KDB 941225 D01 v02 SAR test for 3G devices

FCC KDB 941225 D03 v01 Recommended SAR Test Reduction Procedures for GSM/GPRS/EDGE

FCC KDB 941225 D04 v01 Evaluating SAR for GSM/(E)GPRS Dual Transfer Mode

FCC KDB 941225 D06 v01r01 Hot Spot SAR

7 LABORATORY ENVIRONMENT

7.1 The Ambient Conditions during SAR Test

Temperature	Min. = 15 ° C, Max. = 30 ° C
Atmospheric pressure	Min.=86 kPa, Max.=106 kPa
Relative humidity	Min. = 45%, Max. = 75%
Ground system resistance	< 0.5 Ω

Ambient noise is checked and found very low and in compliance with requirement of standards.

Reflection of surrounding objects is minimized and in compliance with requirement of standards.

8. Conducted RF Output Power

8.1 GSM Conducted Power

Band		Burst Average Power (dBm)			Frame-Average Power (dBm)		
GSM850	TX Channel	128	190	251	128	190	251
	Frequency(MHz)	824.2	836.4	848.8	824.2	836.4	848.8
	GSM	31.98	32.16	32.24	22.95	23.13	23.21
	GPRS (Slot 1)	30.12	30.08	30.11	21.09	21.05	21.08
	GPRS (Slot 2)	30.89	30.89	30.87	24.87	24.87	24.85
	GPRS (Slot 3)	31.47	31.45	31.48	27.21	27.19	27.22
	GPRS (Slot 4)	32.19	32.36	32.50	29.18	29.35	29.49
	EDGE (Slot 1)	29.12	29.08	29.13	20.09	20.05	20.1
	EDGE (Slot 2)	29.91	29.92	29.86	23.89	23.9	23.84
	EDGE (Slot 3)	30.87	30.91	30.93	26.61	26.65	26.67
	EDGE (Slot 4)	31.41	31.87	31.84	28.4	28.86	28.83
GSM1900	TX Channel	512	661	810	512	661	810
	Frequency(MHz)	1850.2	1880	1909.8	1850.2	1880	1909.8
	GSM	29.84	30.17	30.35	20.81	21.14	21.32
	GPRS (Slot 1)	26.87	26.93	26.94	17.84	17.9	17.91
	GPRS (Slot 2)	27.92	27.92	27.93	21.9	21.9	21.91
	GPRS (Slot 3)	28.87	28.85	28.88	24.61	24.59	24.62
	GPRS (Slot 4)	29.55	29.69	30.01	26.54	26.68	27
	EDGE (Slot 1)	27.20	27.19	27.21	18.17	18.16	18.18
	EDGE (Slot 2)	27.91	27.93	27.93	21.89	21.91	21.91
	EDGE (Slot 3)	28.84	28.85	28.85	24.58	24.59	24.59
	EDGE (Slot 4)	29.46	29.66	29.81	26.45	26.65	26.8

Note: Per KDB 447498 D01 v05r01, the maximum output power channel is used for SAR testing and for further SAR test reduction.

Timeslot consignations:

No. Of Slots	Slot 1	Slot 2	Slot 3	Slot 4
Slot Consignation	1Up4Down	2Up3Down	3Up2Down	4Up1Down
Duty Cycle	1:8	1:4	1:267	1:2
Crest Factor	-9.03dB	-6.02dB	-4.26dB	-3.01dB

8.2 WCDMA Conducted peak output Power

Item	band	WCDMA 850			WCDMA 1900		
	ARFCN	4132	4183	4233	9262	9400	9538
	subtest	dBm			dBm		
WCDMA		22.54	22.36	22.51	22.23	22.26	22.29
HSDPA	1	22.41	22.08	22.18	22.18	22.08	22.08
	2	22.19	22.01	22.09	22.07	22.01	22.00
	3	21.68	21.91	21.78	21.85	21.89	21.95
	4	21.79	21.54	21.61	21.77	21.94	21.83
HSUPA	1	22.04	22.07	22.17	22.14	22.07	21.97
	2	21.99	22.14	22.21	22.03	21.89	21.74
	3	21.86	22.09	22.08	22.17	22.01	22.08
	4	22..05	22.04	22.33	21.99	21.51	21.74
	5	22.23	22.16	22.11	22.05	22.25	22.08
HSPA+		22.23	22.18	22.25	22.01	22.05	22.07
Note:	The Conducted RF Output Power test of WCDMA /HSDPA /HSUPA /HSPA+ was tested by power meter.						

Item	band	WCDMA 1700		
	ARFCN	1537	1637	1738
	subtest	dBm		
WCDMA		22.41	22.54	22.39
HSDPA	1	22.25	22.14	22.24
	2	22.11	22.05	22.08
	3	21.89	21.89	21.97
	4	21.79	21.91	21.80
HSUPA	1	22.14	22.07	21.91
	2	22.23	21.82	21.79
	3	22.17	22.15	22.20
	4	21.97	21.81	21.74
	5	22.12	22.12	22.31
HSPA+		22.21	22.18	22.28
Note:	The Conducted RF Output Power test of WCDMA /HSDPA /HSUPA/HSPA+ was tested by power meter.			

Note:

1. WCDMA SAR was tested under PMC 12.2kbps with HSPA Inactive per KDB Publication 941225 D01.HSPA SAR was not requires since the average output power of the HSPA subtests was not more than 0.25dB higher than the RMC level and SAR was less than 1.2W/kg.
2. It is expected by the manufacturer that MPR for some HSPA subtests may be up to 2dB more than specified by 3GPP, but also as low as 0dB according to the chipset implementation in this model.

8.3 WLAN 2.4GHz Band Conducted Power

Channel	Frequency (MHz)	WIFI Output Power(dBm)		
		802.11b	802.11g	802.11n-20
CH 01	2412	17.56	16.53	15.84
CH 06	2437	17.44	16.48	15.73
CH 11	2462	17.38	16.37	15.62

Channel	Frequency (MHz)	WIFI Output Power(dBm)
		802.11n-40
CH 03	2422	14.69
CH 06	2437	14.56
CH 09	2452	14.62

Note:

1. Per KDB 248227 D01 v01r02, choose the highest output power channel to test SAR and determine further SAR exclusion
2. For each frequency band, testing at higher data rates and higher order modulations is not required when the maximum average output power for each of these configurations is less than 1/4dB higher than those measured at lowest data rate
3. Per KDB 248227 D01 v01r02, 802.11g /11n-HT20/11n-HT40 is not required, for the maximum average output power is less than 1/4dB higher than measured on the corresponding 802.11b mode. Thus the SAR can be excluded.

Bluetooth Conducted Power

Channel	Frequency (MHz)	BT3.0 Output Power(dBm)		
		GFSK	Π /4-DQPSK	8-DPSK
CH 0	2402	5.59	4.82	4.90
CH 39	2441	5.99	5.19	5.28
CH 78	2480	5.96	5.28	5.31

Channel	Frequency (MHz)	BT 4.0
CH 0	2402	0.25
CH 20	2442	0.23
CH 39	2480	0.24

Note:

- Per KDB 447498 D01v05r01, the 1-g and 10-g SAR test exclusion thresholds for 100MHz to 6GHz at test separation distances $\leq 50\text{mm}$ are determined by: $[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f} \text{ (GHz)}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR

(1) f(GHz) is the RF channel transmit frequency in GHz

(2) Power and distance are round to the nearest mW and mm before calculation

(3) The result is rounded to one decimal place for comparison

(4) If the test separation distance(antenna-user) is $< 5\text{mm}$, 5mm is used for excluded SAR calculation

Bluetooth Max Power (dBm)	mW	Test Distance (mm)	Frequency(GHz)	Exclusion Thresholds
6.5	4.467	5	2.48	1.407

- Per KDB 447498 D01v05r01 exclusion thresholds is $1.407 < 3$, RF exposure evaluation is not required.

General Note:

1. Per KDB 447498 D01v05r01, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power(mW)/EUT RF power(mW), where tune-up limit is the maximum rated power among all production units.
 - b. For SAR testing of WLAN signal with non-100% duty cycle , the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
 - c. For WWAN: Reported SAR(W/kg)=Measured SAR(W/kg)*Tune-up Scaling Factor
 - d. For WLAN: Reported SAR(W/kg)=Measured SAR(W/kg)*Duty Cycle scaling factor * Tune-up scaling factor
2. Per KDB 447498 D01v05r01, for each exposure position, if the highest output channel reported SAR≤0.8W/kg, other channels SAR testing is not necessary.
3. For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
4. Body-worn SAR testing was performed at 10mm separation, and this distance is determined by the handset manufacturer that there will be body-worn accessories with the required minimum separation.
5. Per KDB 648474 D04v01r01,when the reported SAR for a body-worn accessory measured without a headset connected to the handset is ≤1.2W/kg, SAR testing with a headset connected to the handset is not required.
6. Scaling Factor calculation

Operation Mode	Channel	Output Power(dBm)	Tune up Power in tolerance(dBm)	Scaling Factor
GSM 850	128	31.98	31.85 ± 0.5	1.089
	190	32.16	31.85 ± 0.5	1.045
	251	32.24	31.85 ± 0.5	1.026
GPRS 850(4Tx)	128	32.19	32.15 ± 0.5	1.112
	190	32.36	32.15 ± 0.5	1.069
	251	32.50	32.15 ± 0.5	1.035
GSM1900	512	29.84	30.00 ± 0.5	1.164
	661	30.17	30.00 ± 0.5	1.079
	810	30.35	30.00 ± 0.5	1.035
GPRS1900(4Tx)	512	29.55	29.65 ± 0.5	1.148
	661	29.69	29.65 ± 0.5	1.112
	810	30.01	29.65 ± 0.5	1.033
WCDMA850	4132	22.54	22.25 ± 0.5	1.050
	4183	22.36	22.25 ± 0.5	1.094
	4233	22.51	22.25 ± 0.5	1.057
WCDMA1700	1537	22.41	22.25 ± 0.5	1.081
	1637	22.54	22.25 ± 0.5	1.050
	1738	22.39	22.25 ± 0.5	1.086

WCDMA1900	9262	22.23	22.00 ± 0.5	1.064
	9400	22.26	22.00 ± 0.5	1.057
	9538	22.29	22.00 ± 0.5	1.050
802.11b	2412	17.56	17.25 ± 0.5	1.045
BT 3.0 GFSK	2441	5.99	6.00 ± 0.5	1.125

Simultaneous SAR

Description of Simultaneous Transmit Capabilities				
No.	Transmitter Combinations	Scenario Supported or not	Supported for Mobile Hotspot or not	Explanation
1	GSM(Voice)+GSM(Data)	No	No	Note1
2	WCDMA(Voice)+WCDMA(Data)	Yes	No	
3	GSM(Voice)+ WCDMA(Data)	No	No	
4	WCDMA(Voice)+GSM(Data)	No	No	
5	GSM(Voice)+ WCDMA(Voice)	No	No	
6	GSM(Voice)+Wifi(/BT)	Yes	Yes	Note 2
7	WCDMA(Voice) +Wifi(/BT)	Yes	Yes	
8	WCDMA(Voice)+WCDMA(Data)+ Wifi(/BT)	Yes	Yes	
9	GSM(Data)+wifi	Yes	Yes	
10	WCDMA(Data) +wifi	Yes	Yes	

Not applicable	Applicable	Head	Body-worn	Hotspot
1,3,4,5	2,6,7,8,9,10	2,6,7,8	2,6,7,8,9,10	6,7,8,9,10

Note :

1. EUT system architecture support simultaneous voice and data(except on WCDMA), multiple voice channels, or multiple data channels during a single session on the cellular net work.
2. Support for mobile hotspot operation.
3. When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WiFi transmitter and another licensed transmitter. Both transmitter often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions. The “Portable Hotspot” feature on the handset was not activated, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal.
4. The hotspot SAR result may overlap with the body-worn accessory SAR requirements, per KDB 941225 D06, the more conservative configurations can be considered, thus excluding some unnecessary body-worn accessory SAR tests.
5. WCDMA supports voice and data transmission simultaneously.

6. Simultaneous Transmission SAR evaluation is not required for BT and WiFi, because the software mechanism have been incorporated to guarantee that the WLAN and Bluetooth transmitters would not simultaneously operate.

7. For Scenario No.2,7,8,10 , WCDMA and WiFi is tested separately, the WCDMA mode is test with 12.2kbps RMC and TPC set to all "1", if maximum SAR for 12.2kbps RMC is $\leq 75\%$ of the SAR limit(i.e. 1.2W/kg 1g) and maximum average output of each RF channel with HSDPA/HSUPA active is less than 1/4 dB Middle than that measured without HSDPA/HSUPA using 12.2kbps RMC, according to KDB 941224 D01v02, SAR is not required for this handset with HSPA capabilities.

8. For Scenario No.6 to 10, GSM, WCDMA, BT and WiFi is tested separately, the GSM mode do not supports voice and data transmission simultaneously, voic (GSM) and data(GPRS) is tested separately.

Applicable Multiple Scenario Evaluation

Test Position	WCDMA&GSM SAR Max.(W/Kg)	Wifi SAR Max.(W/Kg)	Bluetooth Max.(W/Kg)	Σ 1-gSARMAX.(W/Kg)	
				BT&Main Ant	Wifi&Main Ant
Head SAR	0.399	0.030	0.188	0.587	0.429
Body SAR	1.282	0.043	0.094	1.376	1.325

Simultaneous Transmission SAR evaluation is not required for Wifi and WCDMA&GSM, because the sum of 1g SAR Max is 1.325W/Kg<1.6 W/Kg for Wifi and WCDMA&GSM.

Simultaneous Transmission SAR evaluation is not required for BT and WCDMA&GSM, because the sum of 1g SAR Max is 1.376W/Kg<1.6 W/Kg for BT and WCDMA&GSM.

(According to KDB 447498D01v05,the sum of the Highest reported SAR of each antenna does not exceed the limit, simultaneous transmission SAR evaluation is not required.)

9 TEST RESULTS

9.1 Summary of Power Measurement Results

According the description above, the measurements against the head phantom were executed on the operation mode: GSM850 /1900MHz, WCDMA850/1700/1900MHz and WIFI 802.11b, while the tests against the body-worn were carried out on the operation mode : GSM850/1900MHz, GPRS 850 /1900MHz, WCDMA850/1700/1900MHz,WIFI 802.11b.

Table 1: SAR Values of GSM 850MHz Band

Temperature: 23.0~23.5°C, humidity: 62~64%.					
Test Positions		Channel /Frequency (MHz)	SAR(W/Kg), 1.6 (1g average)		
			SAR(W/Kg1g Peak)	Scaled SAR(W/Kg),1g	
Right Side of Head	Cheek	190/836.6	0.324	0.338	
	Tilt 15 degrees	190/836.6	0.315	0.329	
Left Side of Head	Cheek	190/836.6	0.331	0.346	
	Tilt 15 degrees	190/836.6	0.283	0.296	
Body (10mm Separation)	GSM	Face Upward	190/836.6	0.364	0.380
		Back Upward	128/824.2	0.687	0.748
			190/836.6	0.692	0.723
			251/848.8	0.691	0.709
		Edge B	190/836.6	0.042	0.044
		Edge C	190/836.6	0.060	0.063
		Edge D	190/836.6	0.045	0.047
	GPRS (4Tx)	Face Upward	190/836.6	0.342	0.366
		Back Upward	128/824.2	0.587	0.653
			190/836.6	0.598	0.639
			251/848.8	0.593	0.614
		Edge B	190/836.6	0.034	0.036
		Edge C	190/836.6	0.048	0.051
		Edge D	190/836.6	0.032	0.034

Table 2: SAR Values of GSM1900 MHz Band

Temperature: 23.0~23.5°C, humidity: 62~64%.					
Test Positions		Channel /Frequency (MHz)	SAR(W/Kg), 1.6 (1g average)		
			SAR(W/Kg)1g Peak)	Scaled SAR(W/Kg),1g	
Right Side of Head	Cheek	661/1880.0	0.182	0.196	
	Tilt 15 degrees	661/1880.0	0.086	0.093	
Left Side of Head	Cheek	661/1880.0	0.230	0.248	
	Tilt 15 degrees	661/1880.0	0.187	0.202	
Body (10mm Separation)	GSM	Face Upward	661/1880.0	0.294	0.317
		Back Upward	512/1850.2	0.464	0.540
			661/1880.0	0.476	0.514
			810/1909.8	0.473	0.490
		Edge B	661/1880.0	0.122	0.132
		Edge C	661/1880.0	0.226	0.244
		Edge D	661/1880.0	0.131	0.141
	GPRS (4Tx)	Face Upward	661/1880.0	0.154	0.171
		Back Upward	512/1850.2	0.356	0.409
			661/1880.0	0.356	0.396
			810/1909.8	0.353	0.365
		Edge B	661/1880.0	0.087	0.097
		Edge C	661/1880.0	0.194	0.216
		Edge D	661/1880.0	0.092	0.102

Table 3: SAR Values of WCDMA850

Temperature: 23.0~23.5°C, humidity: 62~64%.				
Test Positions		Channel /Frequency (MHz)	SAR(W/Kg), 1.6 (1g average)	
			SAR(W/Kg1g Peak)	Scaled SAR(W/Kg),1g
Right Side of Head	Cheek	4183/836.6	0.362	0.396
	Tilt 15 degrees	4183/836.6	0.287	0.314
Left Side of Head	Cheek	4183/836.6	0.365	0.399
	Tilt 15 degrees	4183/836.6	0.291	0.318
Body (10mm Separation)	Face Upward	4132/826.4	0.456	0.479
		4183/836.6	0.457	0.500
		4233/846.6	0.452	0.478
	Back Upward	4132/826.4	0.759	0.797
		4183/836.6	0.772	0.845
		4183/836.6 (repeat measurement)	0.762	0.834
		4233/846.6	0.758	0.801
	Edge B	4183/836.6	0.217	0.237
	Edge C	4183/836.6	0.312	0.341
	Edge D	4183/836.6	0.208	0.228

Table 4: SAR Values of WCDMA1700

Temperature: 23.0~23.5°C, humidity: 62~64%.				
Test Positions		Channel /Frequency (MHz)	SAR(W/Kg), 1.6 (1g average)	
			SAR(W/Kg)1g Peak	Scaled SAR(W/Kg),1g
Right Side of Head	Cheek	1637/1732.4	0.306	0.321
	Tilt 15 degrees	1637/1732.4	0.175	0.184
Left Side of Head	Cheek	1637/1732.4	0.268	0.281
	Tilt 15 degrees	1637/1732.4	0.142	0.149
Body (10mm Separation)	Face Upward	1537/1712.4	0.716	0.774
		1637/1732.4	0.716	0.751
		1738/1752.6	0.714	0.776
	Back Upward	1537/1712.4	1.175	1.271
		1637/1732.4	1.188	1.247
		1637/1732.4 Repeated result1	1.196	1.255
		1637/1732.4 Repeated result2	1.192	1.251
		1738/1752.6	1.180	1.282
	Edge B	1637/1732.4	0.187	0.196
	Edge C	1637/1732.4	0.352	0.369
	Edge D	1637/1732.4	0.186	0.195

Table 5: SAR Values of WCDMA1900

Temperature: 23.0~23.5°C, humidity: 62~64%.				
Test Positions		Channel /Frequency (MHz)	SAR(W/Kg), 1.6 (1g average)	
			SAR(W/Kg1g Peak)	Scaled SAR(W/Kg),1g
Right Side of Head	Cheek	9400/1880.0	0.066	0.070
	Tilt 15 degrees	9400/1880.0	0.037	0.039
Left Side of Head	Cheek	9400/1880.0	0.067	0.071
	Tilt 15 degrees	9400/1880.0	0.039	0.041
Body (10mm Separation)	Face Upward	9262/1852.4	0.436	0.464
		9400/1880.0	0.432	0.457
		9538/1907.6	0.435	0.457
	Back Upward	9262/1852.4	0.785	0.835
		9400/1880.0	0.793	0.838
		9400/1880.0 Repeated result	0.807	0.853
		9538/1907.6	0.788	0.827
	Edge B	9400/1880.0	0.254	0.268
	Edge C	9400/1880.0	0.324	0.342
	Edge D	9400/1880.0	0.245	0.259

Table 6:SAR Values of Wi-Fi 802.11b

Temperature: 23.0~23.5°C, humidity: 62~64%.				
Test Positions		Channel /Frequency (MHz)	SAR(W/Kg), 1.6 (1g average)	
			SAR(W/Kg1g Peak)	Scaled SAR(W/Kg),1g
Right Side of Head	Cheek	1/2412	0.029	0.030
	Tilt 15 degrees	1/2412	0.019	0.020
Left Side of Head	Cheek	1/2412	0.023	0.024
	Tilt 15 degrees	1/2412	0.012	0.013



802.11b(10mm Separation)	Edge A	1/2412	0.007	0.007
	Edge B	1/2412	0.015	0.016
	Face Upward	1/2412	0.024	0.025
	Back Upward	1/2412	0.041	0.043

Note:

a) According to KDB 941225 D01, since the maximum average output of each RF channel with HSDPA/HSUPA active is less than that measured without HSDPA/HSUPA using 12.2 kbps RMC and the maximum SAR for 12.2 kbps RMC is less 1.2 W/kg, the measurement against HSDPA and HSUPA were ignored in this report.

b) When the 1-g SAR for the mid-band channel or the channel with the Highest output power satisfy the following conditions, testing of the other channels in the band is not required.(Per KDB 447498 D01 General RF Exposure Guidance v05)

- ≤ 0.8 W/kg, when the transmission band is ≤ 100 MHz
- ≤ 0.6 W/kg, when the transmission band is between 100 MHz and 200 MHz
- ≤ 0.4 W/kg, when the transmission band is ≥ 200 MHz

8.2 Conclusion

Localized Specific Absorption Rate (SAR) of this portable wireless device has been measured in all cases requested by the relevant standards cited in Clause 6 of this report. Maximum localized SAR is **below** exposure limits specified in the relevant standards.

10 Measurement Uncertainty

No.	Uncertainty Component	Type	Uncertainty Value (%)	Probability Distribution	k	ci	Standard Uncertainty (%) $u_i(\%)$	Degree of freedom v_{eff} or v_i
Measurement System								
1	—Probe Calibration	B	7	N	3	1	3.5	∞
2	—Axial isotropy	B	4.7	R	$\sqrt{3}$	0.5	4.3	∞
3	—Hemispherical Isotropy	B	9.4	R	$\sqrt{3}$	0.5	4.3	∞
4	—Boundary Effect	B	11.0	R	$\sqrt{3}$	1	6.4	∞
5	—Linearity	B	4.7	R	$\sqrt{3}$	1	2.7	∞
6	—System Detection Limits	B	1.0	R	$\sqrt{3}$	1	0.6	∞
7	—Readout Electronics	B	1.0	N	3	1	1.00	∞
8	—Response Time	B	0.00	R	$\sqrt{3}$	1	0.00	∞
9	—Integration Time	B	0.00	R	$\sqrt{3}$	1	0.00	∞
10	—RF Ambient Conditions	B	3.0	R	$\sqrt{3}$	1	1.73	∞
11	—Probe Position Mechanical tolerance	B	0.4	R	$\sqrt{3}$	1	0.2	∞
12	—Probe Position with respect to Phantom Shell	B	2.9	R	$\sqrt{3}$	1	1.7	∞
13	—Extrapolation, Interpolation and Integration Algorithms for Max. SAR evaluation	B	3.9	R	$\sqrt{3}$	1	2.3	∞
Uncertainties of the DUT								
14	—Position of the DUT	A	4.8	N	3	1	4.8	5
15	—Holder of the DUT	A	7.1	N	3	1	7.1	5

16	– Output Power Variation – SAR drift measurement	B	5.0	R	$\sqrt{3}$	1	2.9	∞
Phantom and Tissue Parameters								
17	– Phantom Uncertainty(shape and thickness tolerances)	B	1.0	R	$\sqrt{3}$	1	0.6	∞
18	– Liquid Conductivity Target – tolerance	B	5.0	R	$\sqrt{3}$	0.6	1.7	∞
19	– Liquid Conductivity – measurement Uncertainty)	B	0.23	N	3	1	0.23	9
20	– Liquid Permittivity Target tolerance	B	5.0	R	$\sqrt{3}$	0.6	1.7	∞
21	– Liquid Permittivity – measurement uncertainty	B	0.46	N	3	1	0.46	∞
Combined Standard Uncertainty				RSS			12.92	44.15
Expanded uncertainty (Confidence interval of 95 %)				K=2			25.84	

11 MAIN TEST INSTRUMENTS

No.	EQUIPMENT	TYPE	Series No.	Last Calibration	Due Date
1	System Simulator	E5515C	GB 47200710	2014/02/23	1 Year
2	SAR Probe	SATIMO	SN 09/13 EP169	2014/04/05	1 Year
3	Dipole	SID835	SN 09/13 DIP 0G835-217	2014/04/05	1 Year
4	Dipole	SID1800	SN 09/13 DIP 1G800-216	2014/04/05	1 Year
5	Dipole	SID1900	SN 09/13 DIP 1G900-218	2014/04/05	1 Year
6	Dipole	SID2450	SN 09/13 DIP 2G450-220	2014/04/05	1 Year
7	Vector Network Analyzer	ZVB8	A0802530	2014/06/13	1 Year
8	Signal Generator	SMR27	A0304219	2014/06/10	1 Year
9	Amplifier	Nucletudes	143060	2014/04/05	1 Year
10	Power Meter	NRVS	1020.1809.02	2014/06/13	1 Year
11	Power Sensor	NRV-Z4	100069	2014/06/10	1 Year
12	Multimeter	Keithley-2000	4014020	2014/01/29	1 Year
13	Device Holder	SATIMO	SN 09/13 MSH80	2014/04/05	1 Year
14	SAM Phantom	SAM97	SN 09/13 SAM97	2014/04/05	1 Year

ANNEX A

of

CCIC Southern Electronic Product Testing (Shenzhen) Co., Ltd.

CONFORMANCE TEST REPORT FOR

HUMAN EXPOSURE TO ELECTROMAGNETIC FIELDS

SET2014-08311

Shenzhen JSR Technology Co.,Ltd.

Mobile phone

Type Name: innos i7,MN8 Wingtip

Hardware Version: V1.0

Software Version: I7A_Nexlink_S_v1.0

Accreditation Certificate

This Annex consists of 2 pages

Date of Report: 2014-08-14



China National Accreditation Service for Conformity Assessment

LABORATORY ACCREDITATION CERTIFICATE

(Registration No. CNAS L1659)

CCIC Southern Electronic Product Testing (Shenzhen) Co., Ltd.

Building 28/29, Shigudong, Xili Industrial Area, Xili Street,

Nanshan District, Shenzhen, Guangdong, China

is accredited to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories(CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence of testing and calibration.

The scope of accreditation is detailed in the attached appendices bearing the same registration number as above. The appendices form an integral part of this certificate.

Date of Issue: 2012-09-29

Date of Expiry: 2015-09-28

Date of Initial Accreditation: 1999-08-03

Date of Update: 2012-09-29



Signed on behalf of China National Accreditation Service
for Conformity Assessment

China National Accreditation Service for Conformity Assessment (CNAS) is authorized by Certification and Accreditation Administration of the People's Republic of China (CNCA) to operate the national accreditation schemes for conformity assessment. CNAS is the signatory to International Laboratory Accreditation Cooperation Multilateral Recognition Arrangement (ILAC MRA) and Asia Pacific Laboratory Accreditation Cooperation Multilateral Recognition Arrangement (APLAC MRA).

No.CNAS AL 2

0005210



ANNEX B

of

CCIC-SET

CONFORMANCE TEST REPORT FOR

HUMAN EXPOSURE TO ELECTROMAGNETIC FIELDS

SET2014-08311

Shenzhen JSR Technology Co.,Ltd.

Mobile phone

Type Name: innos i7,MN8 Wingtip

Hardware Version: V1.0

Software Version: I7A_Nexlink_S_v1.0

TEST LAYOUT

This Annex consists of 7 pages

Date of Report: 2014-08-14

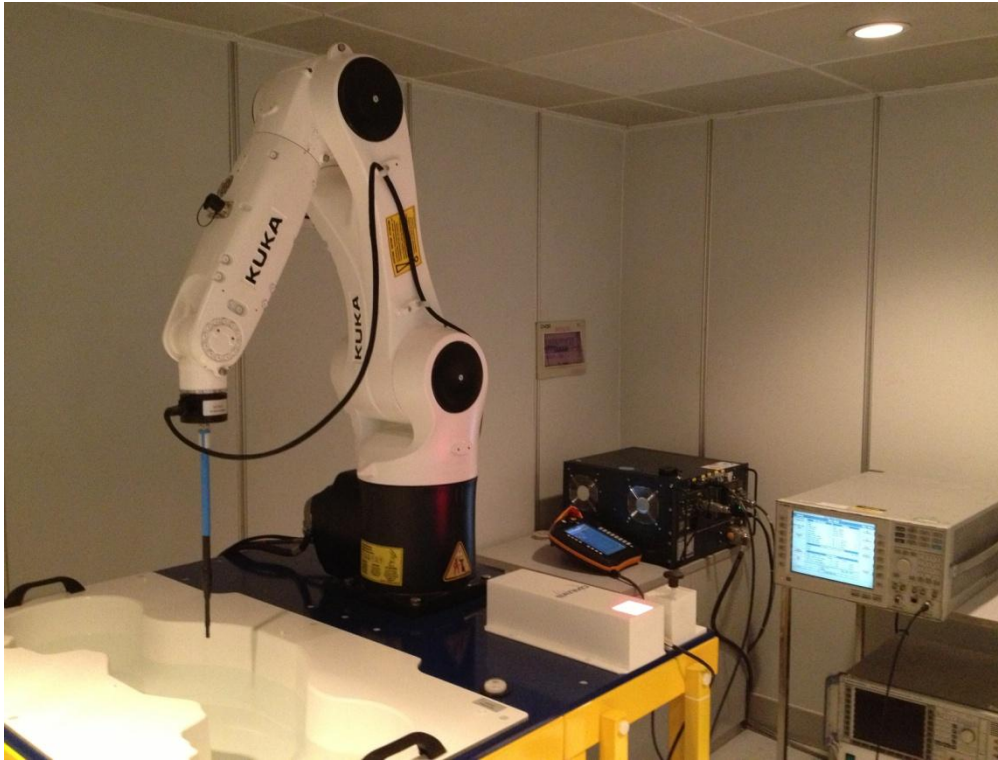


Fig.1 COMO SAR Test System

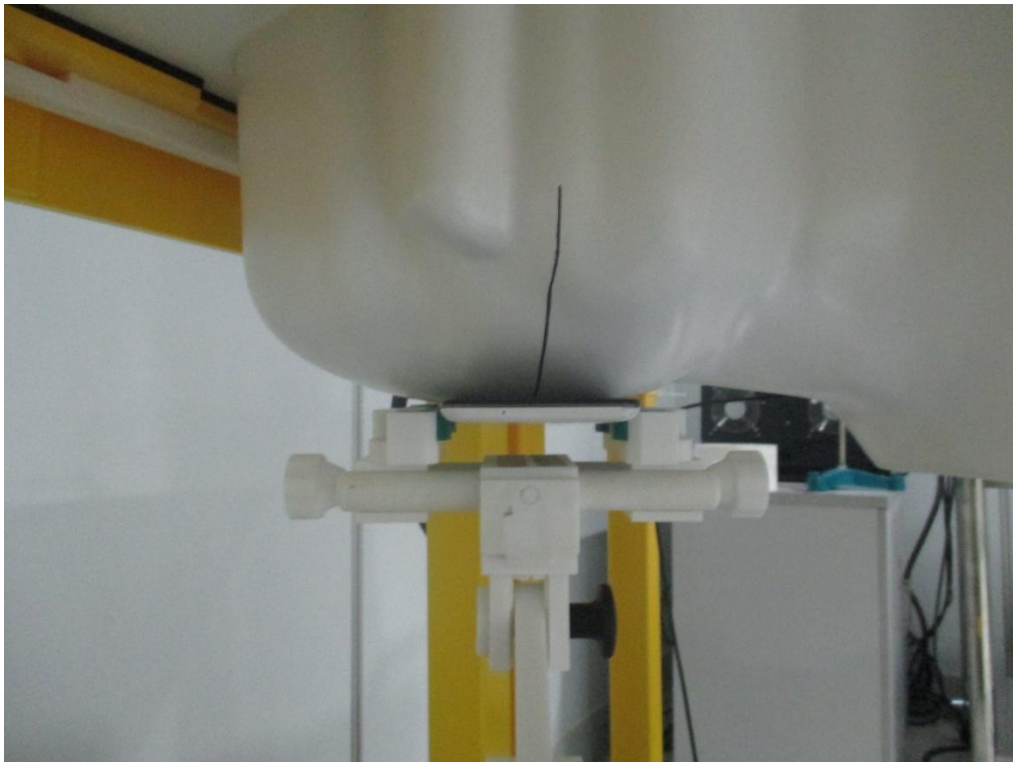


Fig.2 Right_Cheek

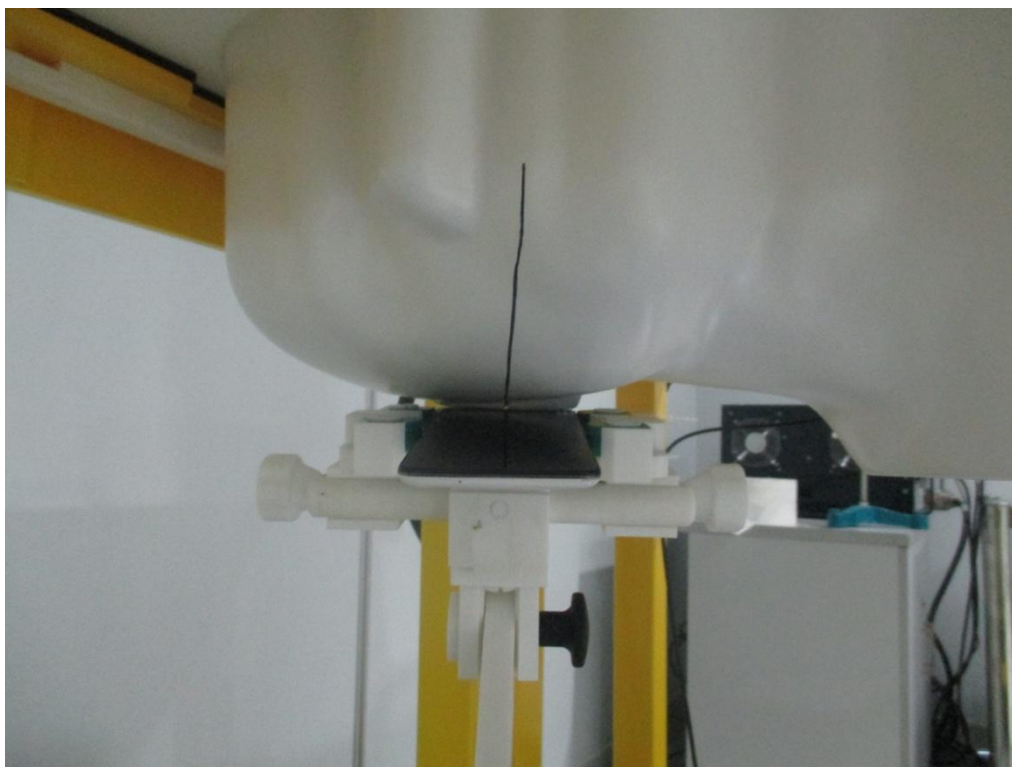


Fig.3 Right_Tilt

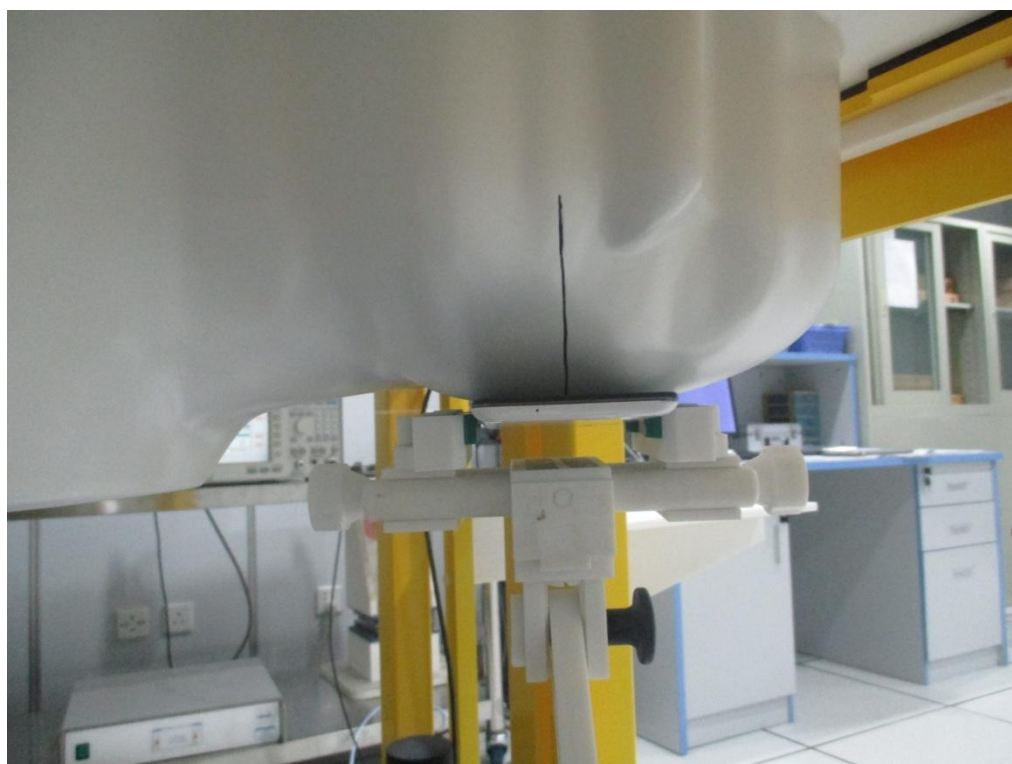


Fig.4 Left Cheek

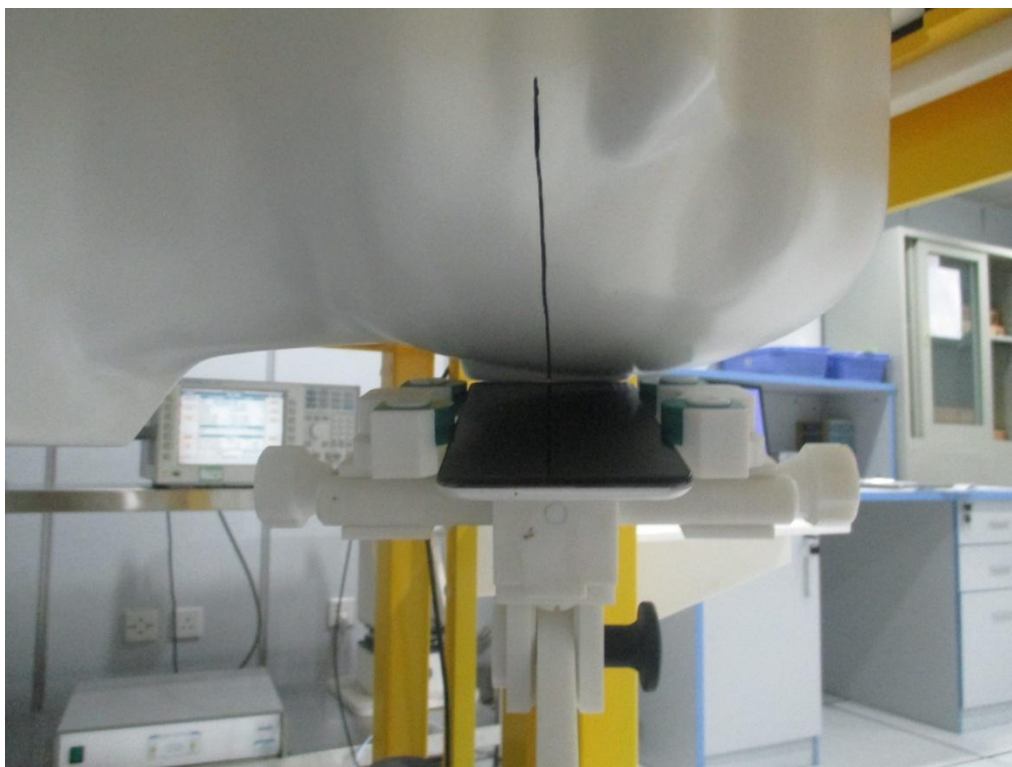


Fig.5 Left_Tilt



Fig.6 Body(Back upside,10mm separation)

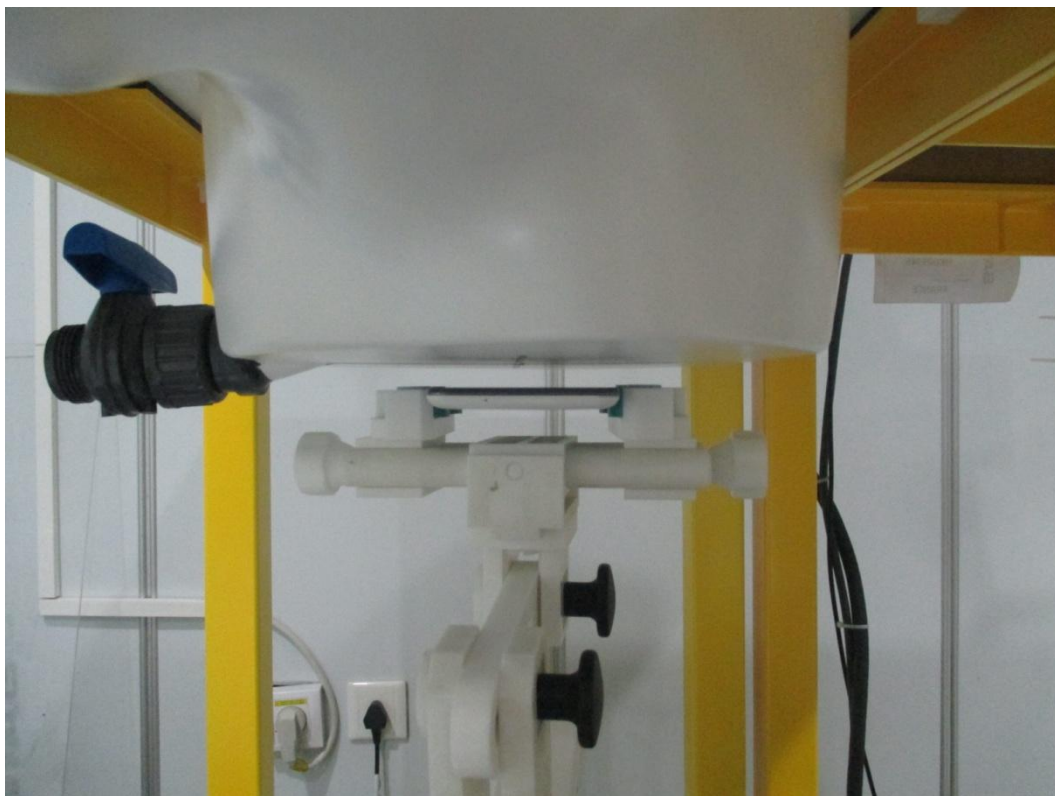


Fig.7 Body(Face upside,10mm separation)



Fig.8 Body Edge A(UP,10mm separation)



Fig.9 Body Edge B(Right upside,10mm separation)



Fig.10 Body Edge C(Down,10mm separation)



Fig.11 Body Edge D(Left upside,10mm separation)

ANNEX C

of

CCIC-SET

CONFORMANCE TEST REPORT FOR

HUMAN EXPOSURE TO ELECTROMAGNETIC FIELDS

SET2014-08311

Mobile phone

Type Name: innos i7,MN8 Wingtip

Hardware Version: V1.0

Software Version: I7A_Nexlink_S_v1.0

Sample Photographs

This Annex consists of 2 pages

Date of Report: 2014-08-14

1. Appearance



Appearance and size (obverse)



Appearance and size (reverse)

ANNEX D

of

CCIC-SET

CONFORMANCE TEST REPORT FOR

HUMAN EXPOSURE TO ELECTROMAGNETIC FIELDS

SET2014-08311

Mobile phone

Type Name: innos i7,MN8 Wingtip

Hardware Version: V1.0

Software Version: I7A_Nexlink_S_v1.0

System Performance Check Data and Highest SAR Plots

This Annex consists of 50 pages

Date of Report: 2014-08-14

GRAPH TEST RESULTS

BAND	PAPAMETERS
GSM 850	Left Head with Cheek device position on Middle Channel in GSM mode Flat Plane with Back Body device position on Low Channel in GSM mode Flat Plane with Back Body device position on Low Channel in GPRS mode
GSM 1900	Left Head with Cheek device position on Middle Channel in GSM mode Flat Plane with Back Body device position on Low Channel in GSM mode Flat Plane with Back Body device position on Low Channel in GPRS mode
WCDMA 850	Left Head with Cheek device position on Middle Channel in WCDMA mode Flat Plane with Back Body device position on Middle Channel in WCDMA mode Flat Plane with Back Body device position on Middle Channel in WCDMA mode (repeated measurement)
WCDMA 1700	Right Head with Cheek device position on Middle Channel in WCDMA mode Flat Plane with Back Body device position on Middle Channel in WCDMA mode Flat Plane with Back Body device position on Middle Channel in WCDMA mode (repeated measurement1) Flat Plane with Back Body device position on Middle Channel in WCDMA mode (repeated measurement2)
WCDMA 1900	Left Head with Cheek device position on Middle Channel in WCDMA mode Flat Plane with Back Body device position on Middle Channel in WCDMA mode Flat Plane with Back Body device position on Middle Channel in WCDMA mode (repeated measurement)
WIFI 802.11b	Right Head with Cheek device position on Low Channel in DSSS mode Flat Plane with Back Body device position on Low Channel in DSSS mode

System Performance Check (Head, 835MHz)

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement:04/08/2014

Measurement duration: 12 minutes 57 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Flat Plane
Device Position	
Band	835MHz
Channels	
Signal	CW

B. SAR Measurement Results

Band SAR

Frequency (MHz)	835.000000
Relative permittivity (real part)	41.45
Relative permittivity	15.07
Conductivity (S/m)	0.91
Power drift (%)	-0.230000
Ambient Temperature:	23.2 °C
Liquid Temperature:	23.5 °C
ConvF:	5.51
Duty factor:	1:1

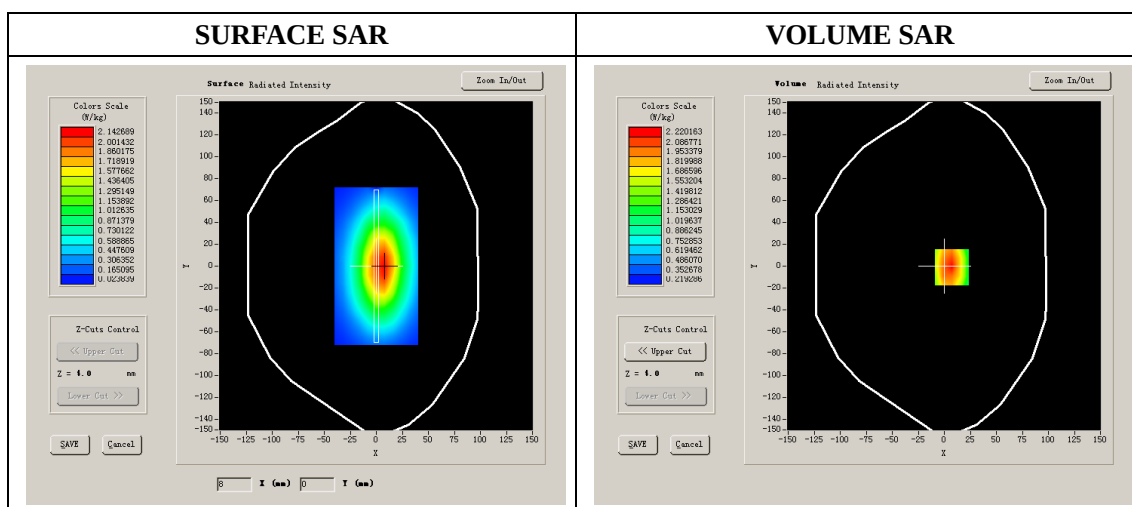


Maximum location: X=7.00, Y=-1.00

SAR 10g (W/Kg)	1.824256
SAR 1g (W/Kg)	2.454673


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	2.5214	1.6624	1.1451	0.8065	0.5875	0.4153


SAR, Z Axis Scan (X = 7, Y = -1)

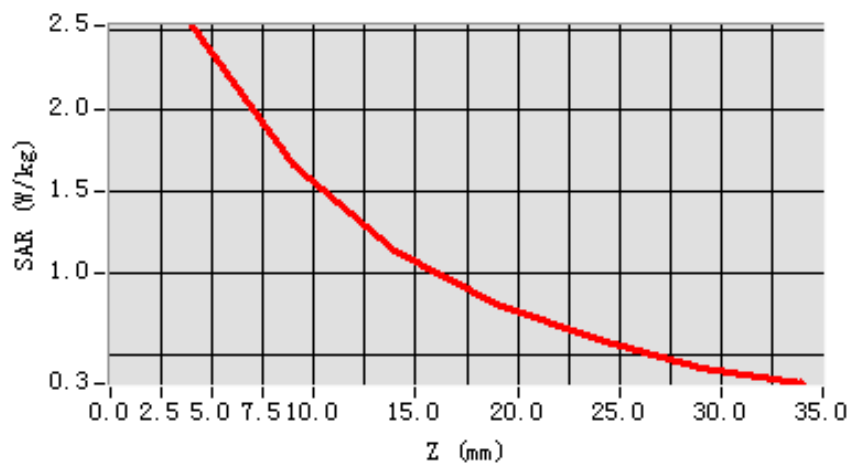

3D scene shot

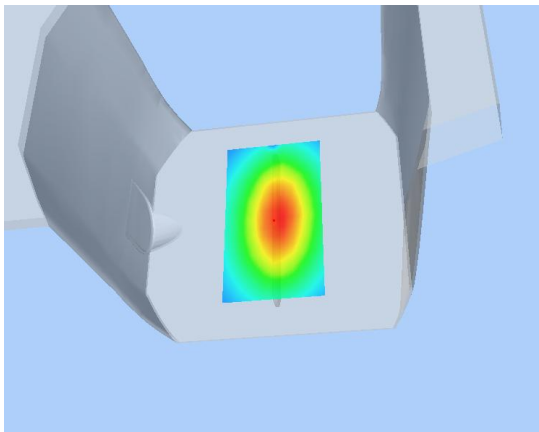

Hot spot position

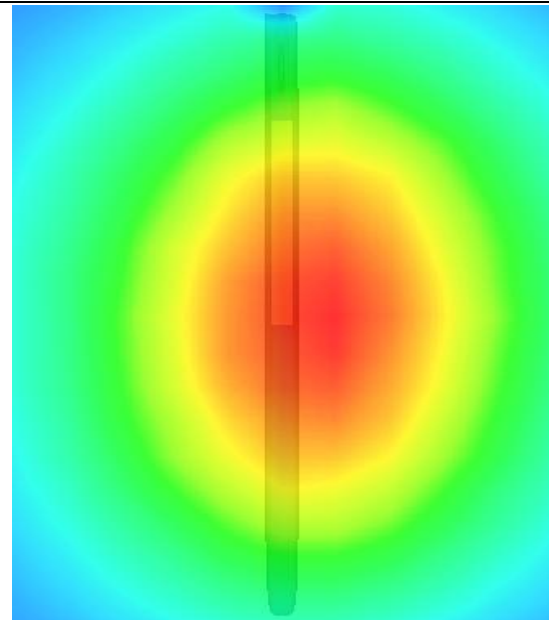

System Performance Check (Head, 1750MHz)

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 04/08/2014

Measurement duration: 12 minutes 52 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Flat Plane
Device Position	
Band	1750MHz
Channels	
Signal	CW

B. SAR Measurement Results

Band SAR

Frequency (MHz)	1750.000000
Relative permittivity (real part)	39.979347
Relative permittivity	15.067700
Conductivity (S/m)	1.413587
Power drift (%)	-0.140000
Ambient Temperature:	23.3 °C
Liquid Temperature:	23.6 °C
ConvF:	4.80
Crest factor:	1:1

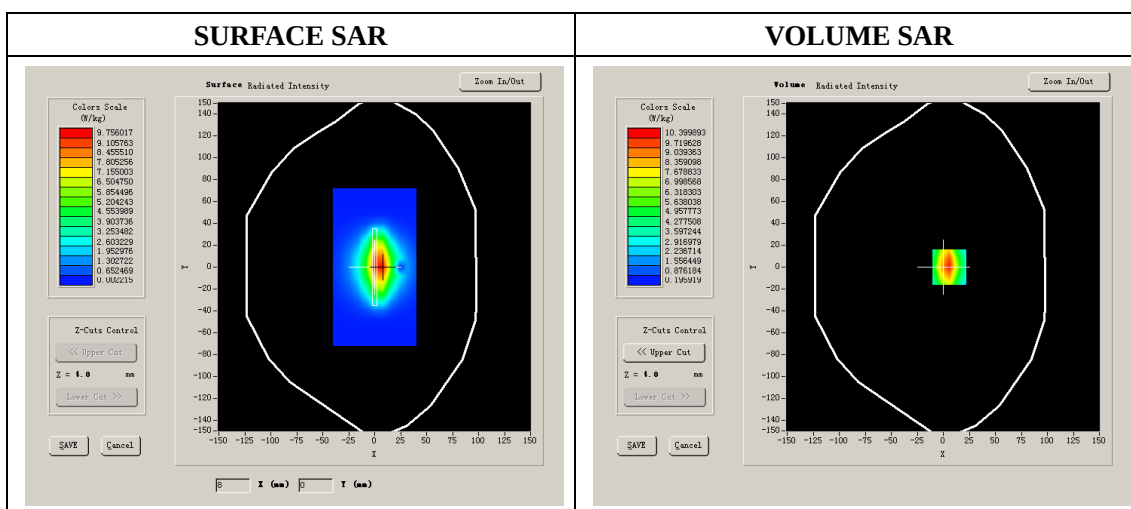


Maximum location: X=7.00, Y=0.00

SAR 10g (W/Kg)	5.079821
SAR 1g (W/Kg)	9.879545


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	10.6423	6.0038	3.7291	2.2612	1.5113	0.9788


SAR, Z Axis Scan (X = 7, Y = 0)

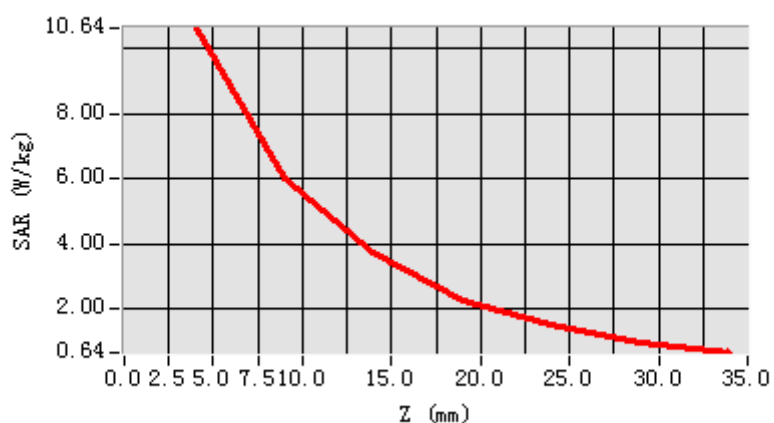

3D scene shot

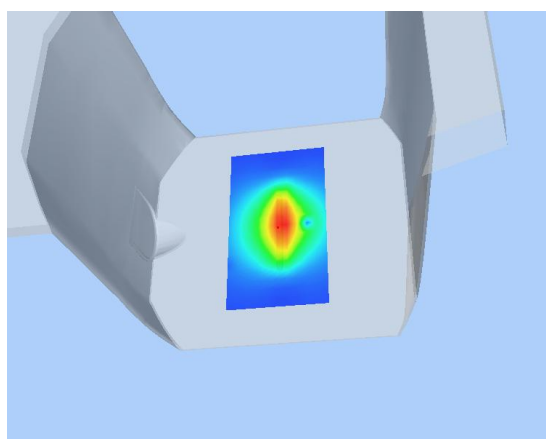

Hot spot position

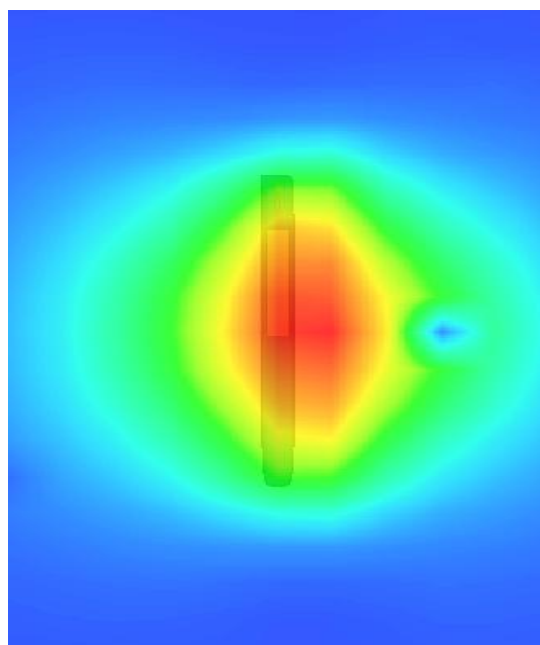

System Performance Check (Head, 1900MHz)

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 04/08/2014

Measurement duration: 12 minutes 57 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Flat Plane
Device Position	
Band	1900MHz
Channels	
Signal	CW

B. SAR Measurement Results

Band SAR

Frequency (MHz)	1900.000000
Relative permittivity (real part)	39.98
Relative permittivity	15.07
Conductivity (S/m)	1.41
Power drift (%)	-0.150000
Ambient Temperature:	22.3 °C
Liquid Temperature:	22.6 °C
ConvF:	5.49
Duty factor:	1:1

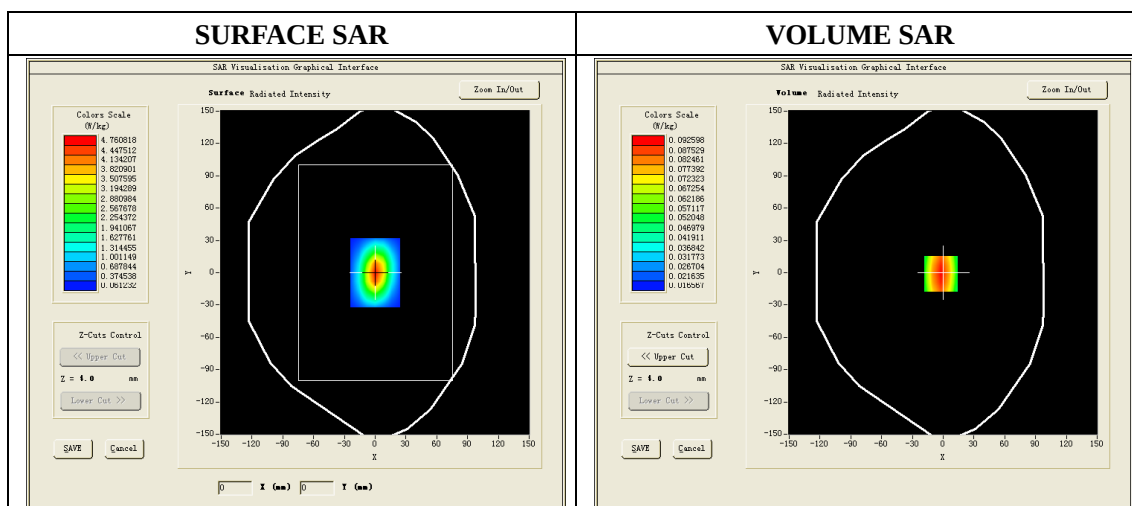




Maximum location: X=6.00, Y=0.00

SAR 10g (W/Kg)	5.134524
SAR 1g (W/Kg)	9.774631

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	10.6418	6.0044	3.7296	2.2605	1.5117	0.9790

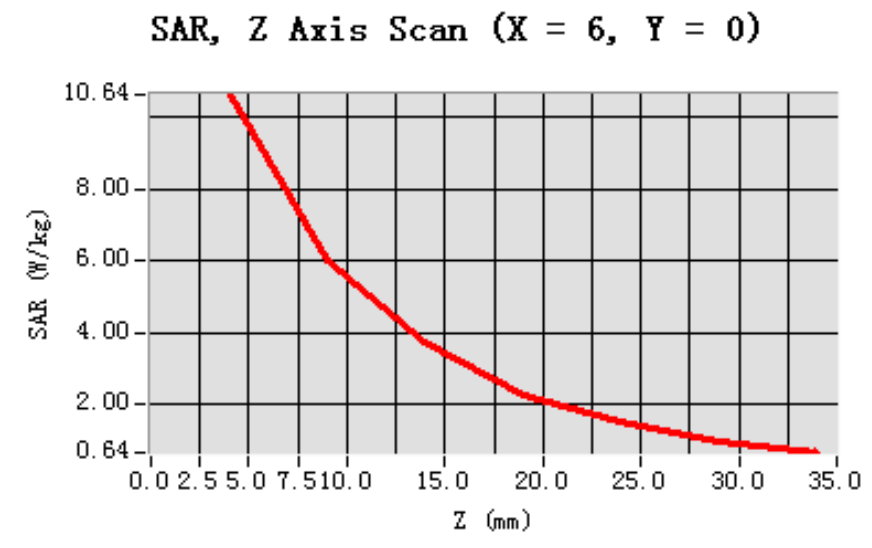

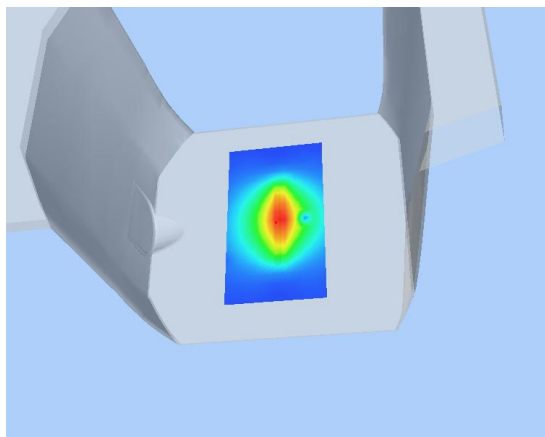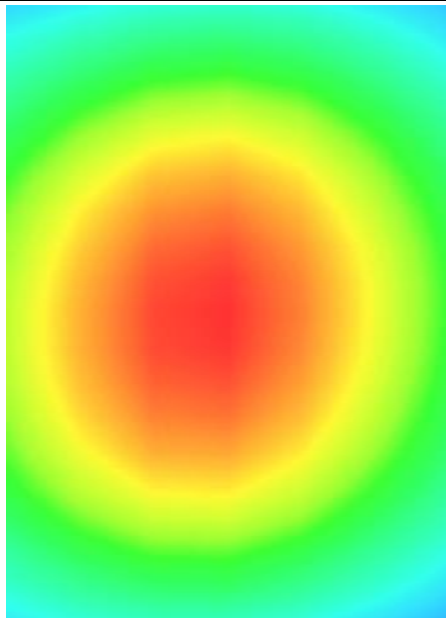3D scene shot	Hot spot position
	

System Performance Check (Head, 2450MHz)

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 04/08/2014

Measurement duration: 15 minutes 24 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Dipole
Band	2450MHz
Channels	
Signal	CW

B. SAR Measurement Results

Band SAR

Frequency (MHz)	2450.000000
Relative permittivity (real part)	38.99
Relative permittivity	13.19
Conductivity (S/m)	1.81
Power Drift (%)	0.420000
ConvF:	4.81
Duty factor:	1:1

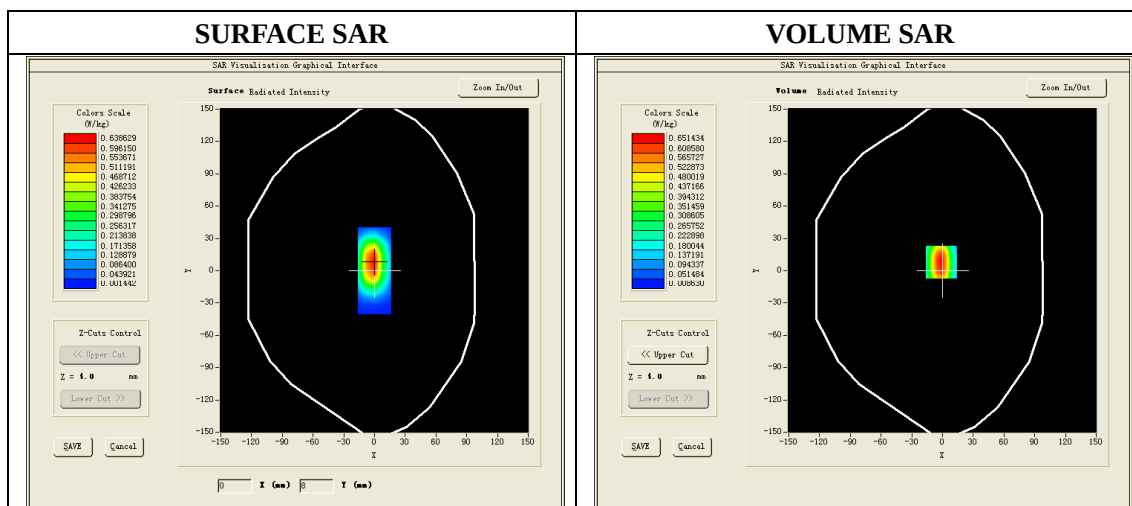


Maximum location: X=0.00, Y=8.00


SAR 10g (W/Kg)	5.900543
SAR 1g (W/Kg)	13.174632

Z Axis Scan


Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	20.3890	13.160218	3.8625	0.8019	0.2333

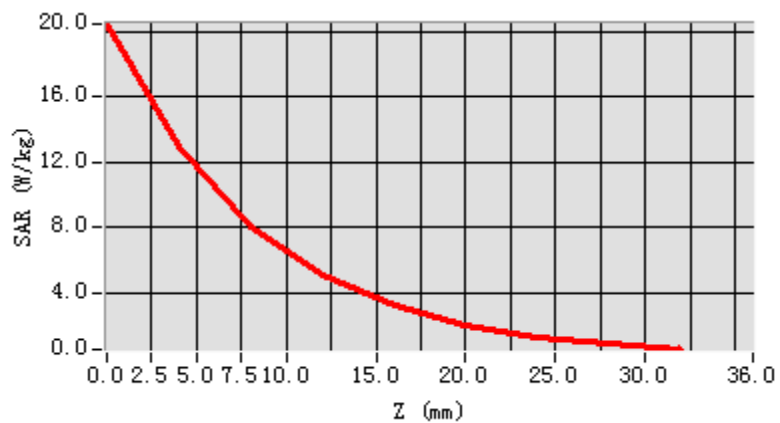

3D scene shot

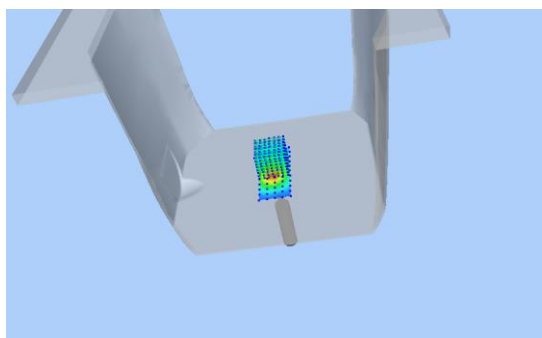

Hot spot position

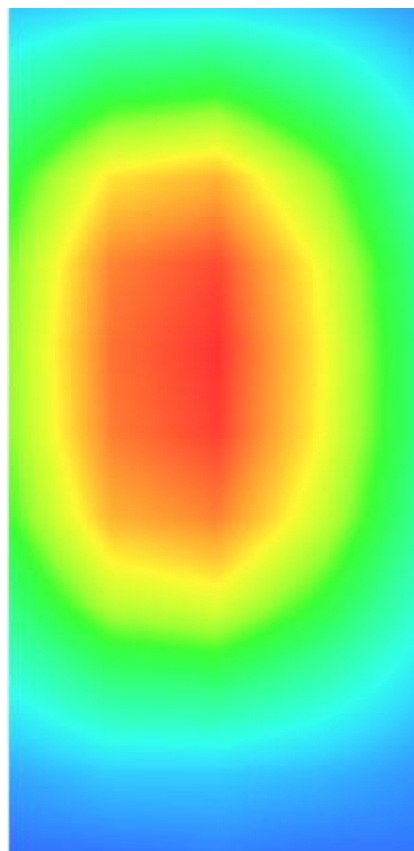

System Performance Check (Body, 835MHz)

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 05/08/2014

Measurement duration: 13 minutes 12 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Flat Plane
Device Position	
Band	835MHz
Channels	
Signal	CW

B. SAR Measurement Results

Band SAR

Frequency (MHz)	835.000000
Relative permittivity (real part)	55.26
Relative permittivity	21.71
Conductivity (S/m)	0.98
Power drift (%)	-0.270000
Ambient Temperature:	23.2 °C
Liquid Temperature:	23.5 °C
ConvF:	5.68
Duty factor:	1:1


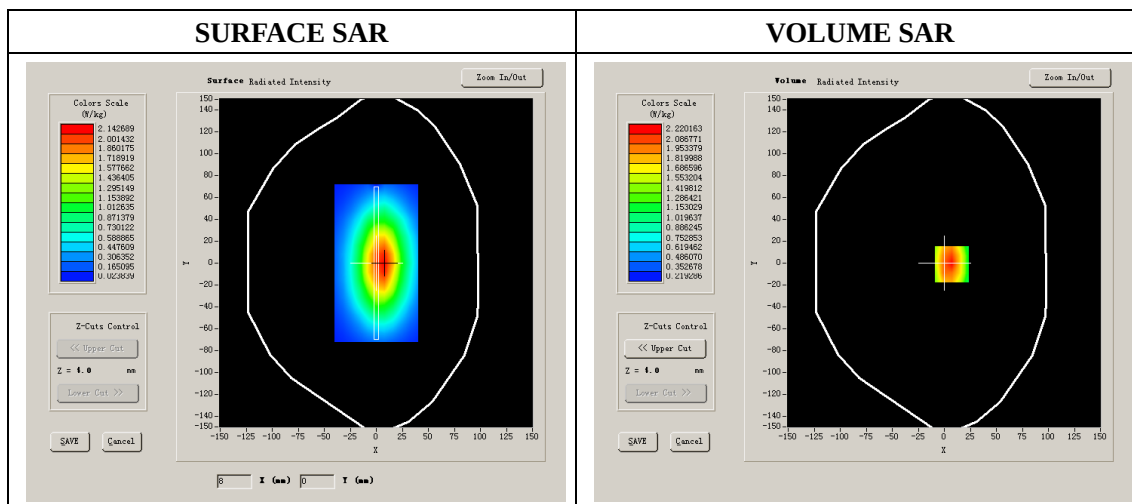


Maximum location: X=7.00, Y=-1.00

SAR 10g (W/Kg)	1.727546
SAR 1g (W/Kg)	2.437653

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	2.5212	1.6645	1.1443	0.8082	0.5893	0.4148

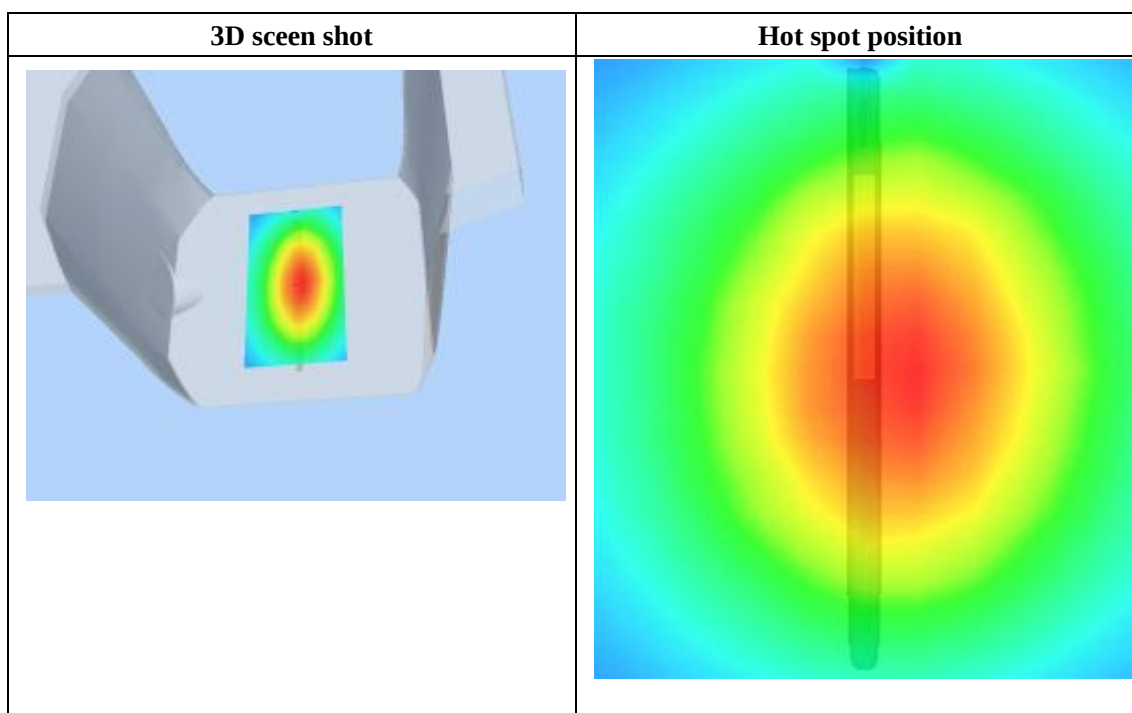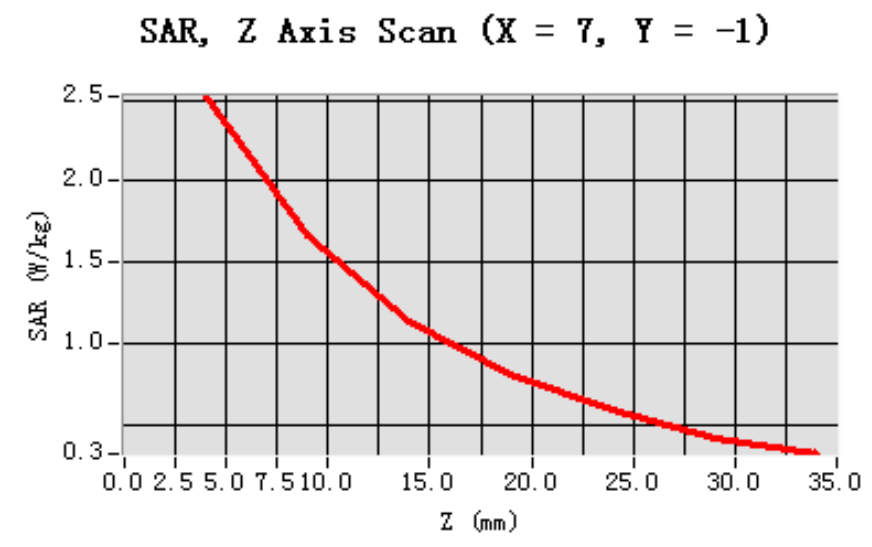

System Performance Check (Body, 1750MHz)

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 05/08/2014

Measurement duration: 13 minutes 06 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Flat Plane
Device Position	
Band	1750MHz
Channels	
Signal	CW

B. SAR Measurement Results

Band SAR

Frequency (MHz)	1750.000000
Relative permittivity (real part)	53.890442
Relative permittivity	14.070000
Conductivity (S/m)	1.529512
Power drift (%)	-0.330000
Ambient Temperature:	23.2 °C
Liquid Temperature:	23.6 °C
ConvF:	4.94
Crest factor:	1:1

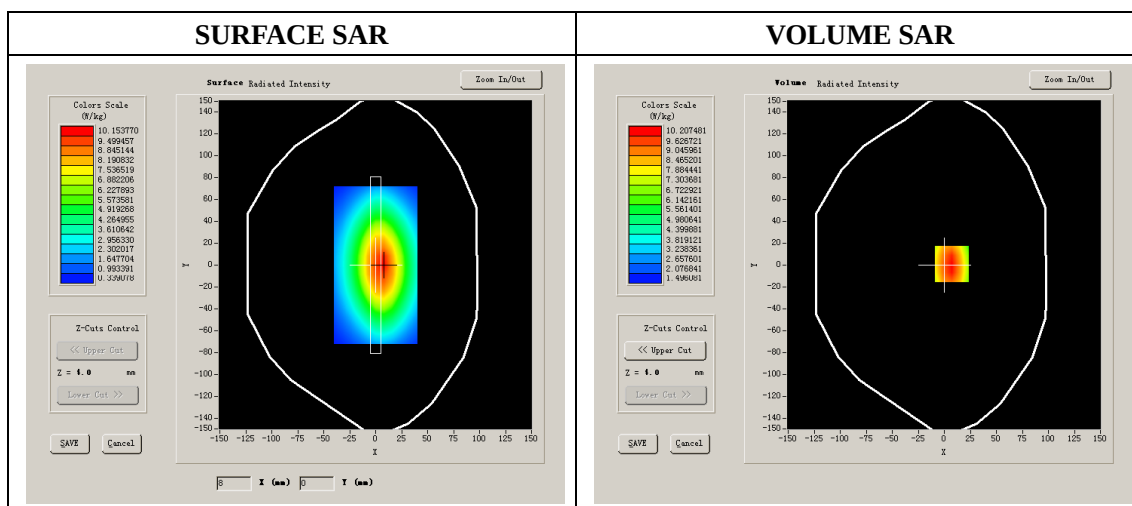


Maximum location: X=7.00, Y=1.00

SAR 10g (W/Kg)	5.110689
SAR 1g (W/Kg)	9.784177


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	10.2075	7.3996	5.4654	4.1101	3.1286	2.4128


SAR, Z Axis Scan (X = 7, Y = 1)

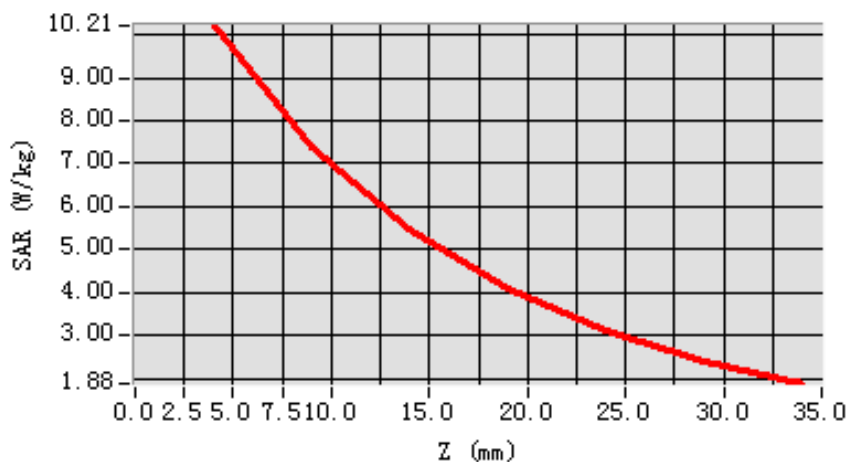

3D screen shot

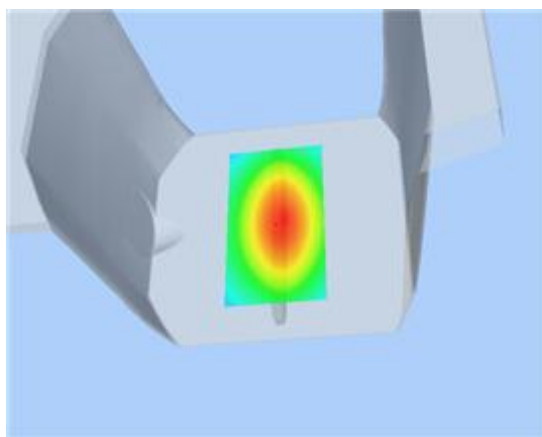

Hot spot position

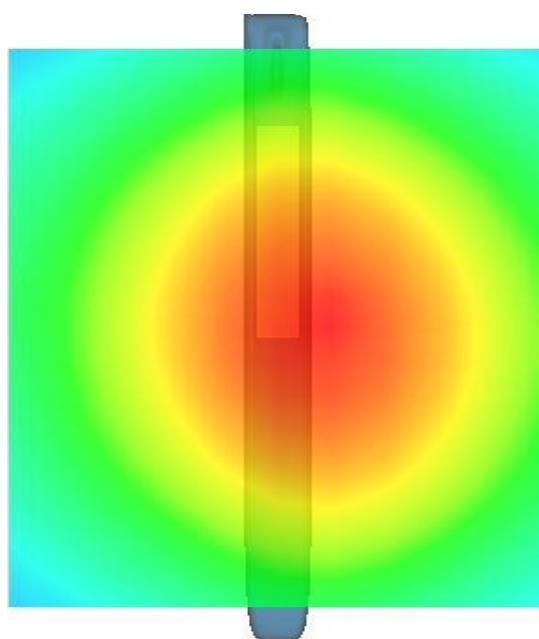

System Performance Check (Body, 1900MHz)

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 05/08/2014

Measurement duration: 13 minutes 12 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	
Band	1900MHz
Channels	
Signal	CW

B. SAR Measurement Results

Band SAR

Frequency (MHz)	1900.000000
Relative permittivity (real part)	53.28
Relative permittivity	12.99
Conductivity (S/m)	1.53
Power Drift (%)	0.410000
Ambient Temperature:	22.0 °C
Liquid Temperature:	21.8 °C
ConvF:	5.65
Duty factor:	1:1

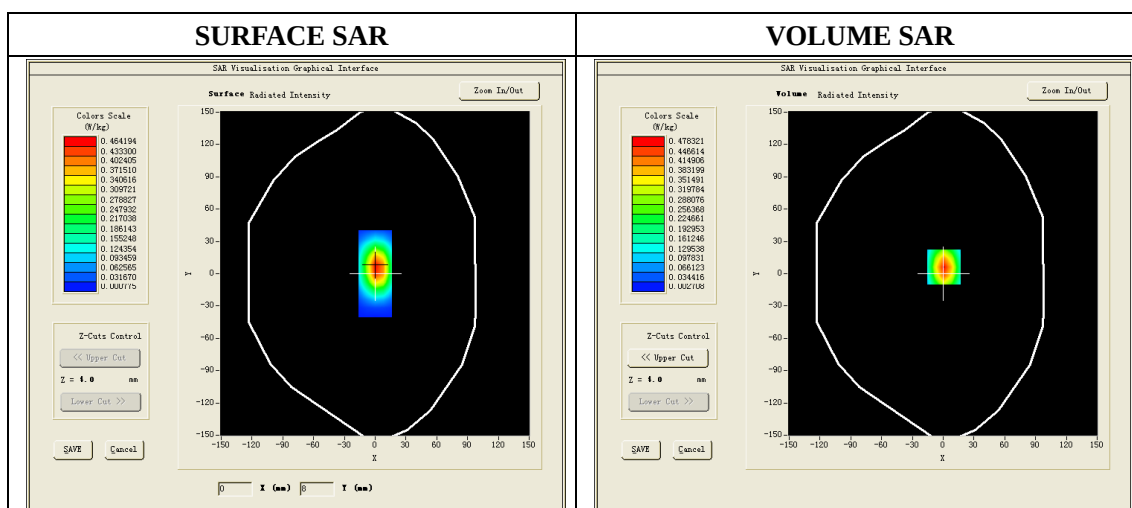


Maximum location: X=1.00, Y=6.00

SAR 10g (W/Kg)	5.215326
SAR 1g (W/Kg)	9.982523


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	10.0613	5.7282	3.6529	2.0314


SAR, Z Axis Scan (X = 1, Y = 6)

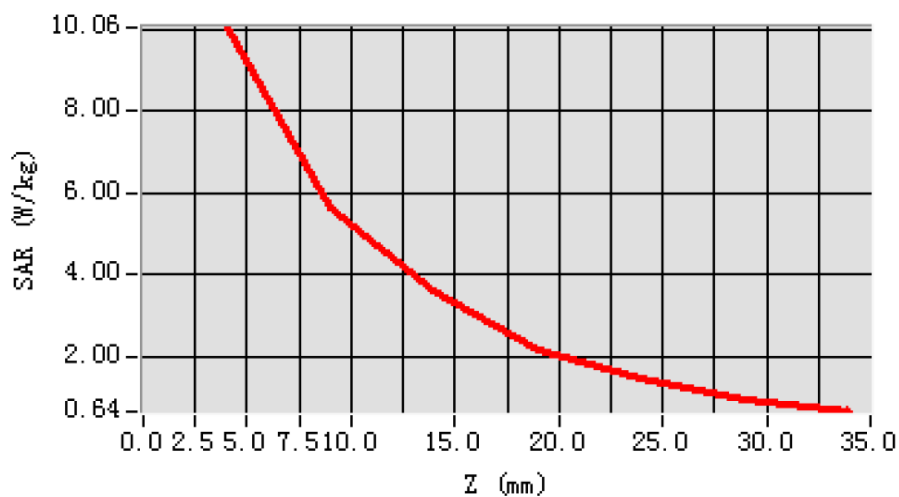

3D scene shot

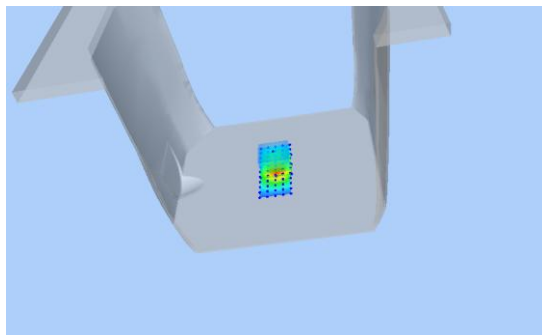

Hot spot position

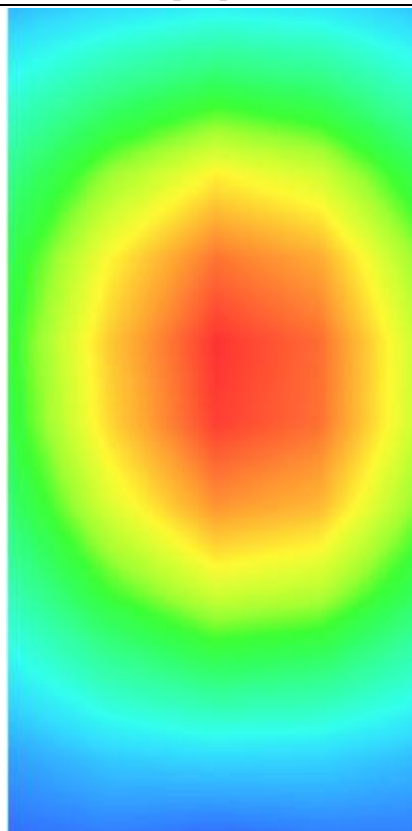

System Performance Check (Body, 2450MHz)

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 05/08/2014

Measurement duration: 13 minutes 21 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Dipole
Band	2450MHz
Channels	
Signal	CW

B. SAR Measurement Results

Band SAR

Frequency (MHz)	2450.000000
Relative permittivity (real part)	52.65
Relative permittivity	13.02
Conductivity (S/m)	1.96
Power Drift (%)	-0.310000
Duty factor:	1:1
ConvF:	4.91

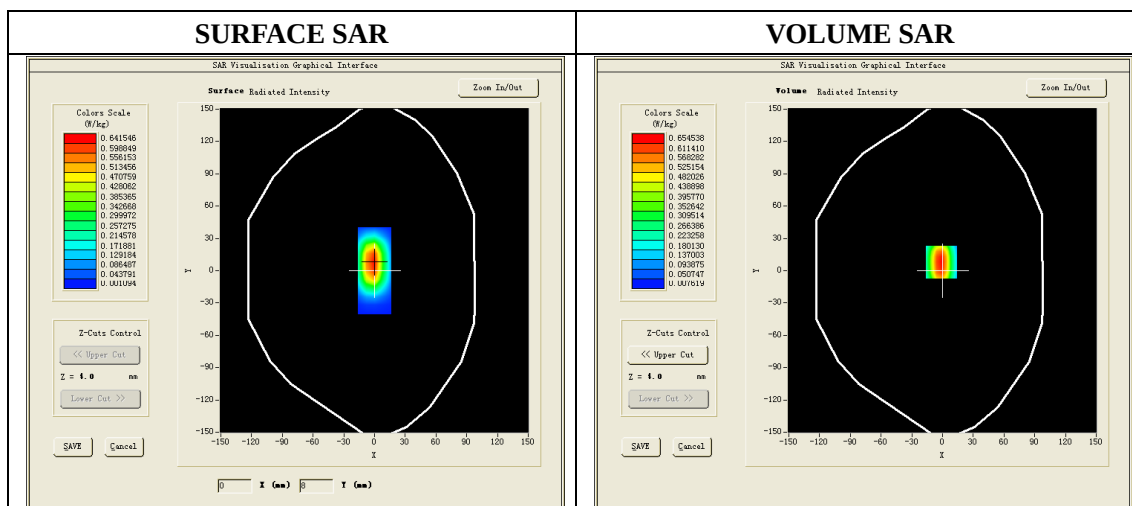


Maximum location: X=0.00, Y=8.00

SAR 10g (W/Kg)	6.032464
SAR 1g (W/Kg)	13.087432


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	13.3124	3.8627	0.8023	0.2335


SAR, Z Axis Scan (X = 0, Y = 8)

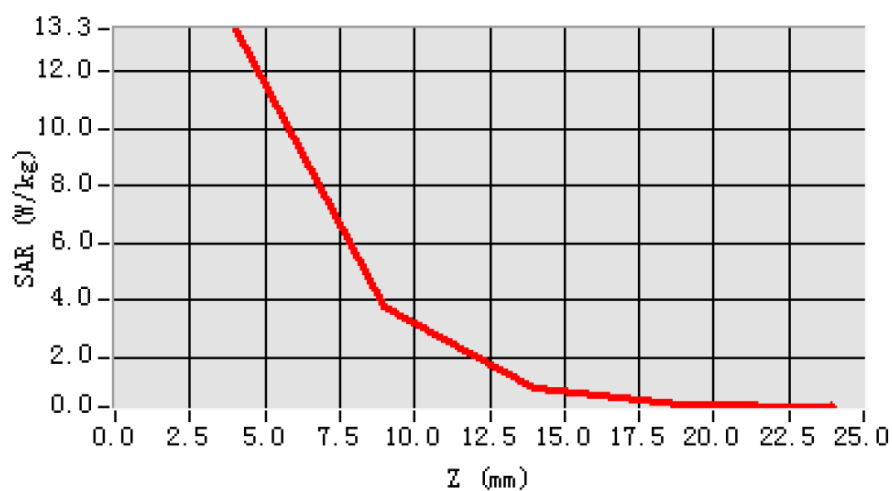

3D scene shot

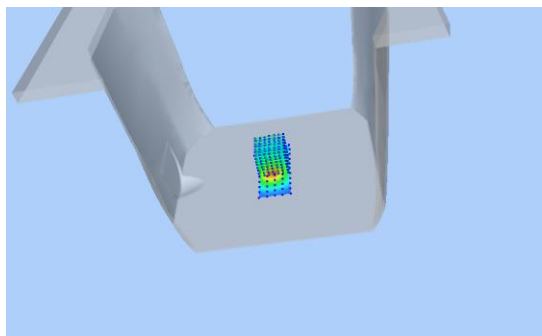

Hot spot position

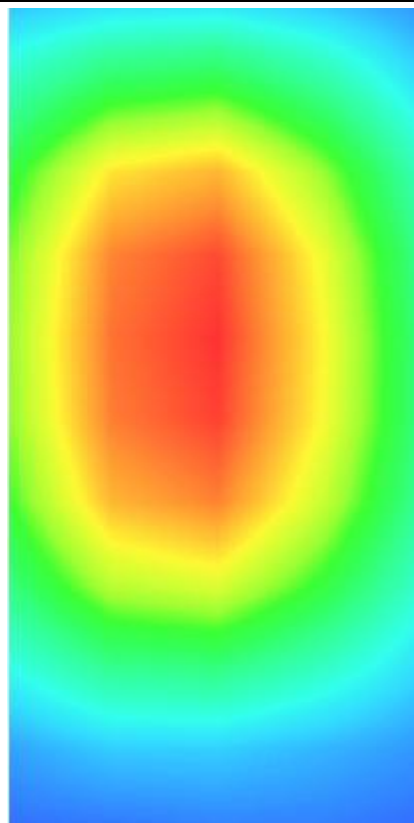

GSM850, Left Cheek, Middle

Type: Phone measurement (Very fast, 11 points in the volume)

Date of measurement: 04/08/2014

Measurement duration: 6 minutes 35 seconds


Mobile Phone IMEI number: --

A. Experimental conditions.

Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast
Phantom	Left head
Device Position	Cheek
Band	GSM850
Channels	190
Signal	GSM (Duty cycle: 1:8)

B. SAR Measurement Results


Frequency (MHz)	836.6
Relative permittivity (real part)	41.45
Relative permittivity (imaginary part)	15.07
Conductivity (S/m)	0.91
Variation (%)	2.720000
ConvF:	5.51


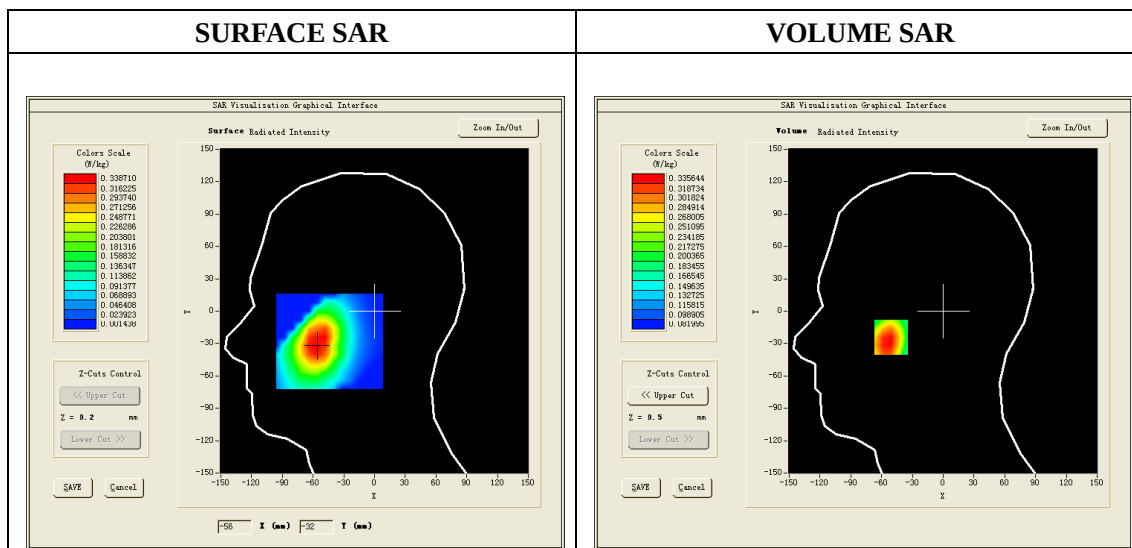


Maximum location: X=-51.00, Y=-24.00

SAR 10g (W/Kg)	0.261160
SAR 1g (W/Kg)	0.331307

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.3745	0.3356	0.2903	0.2485	0.2102

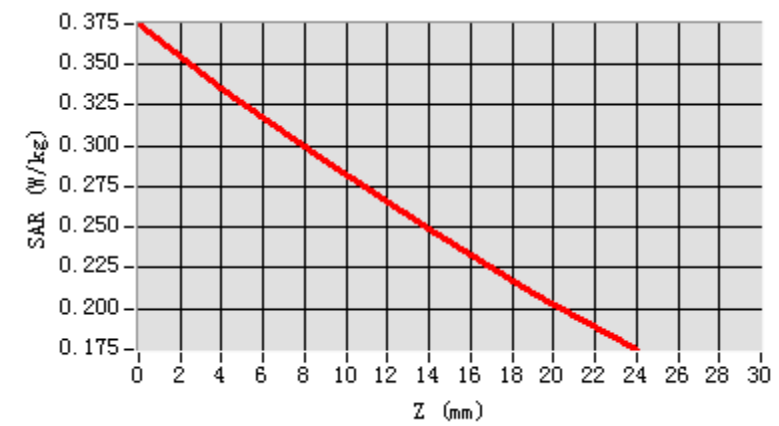

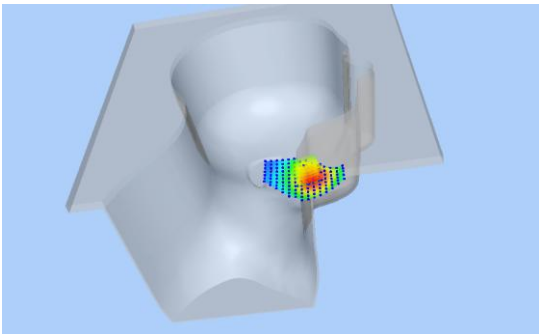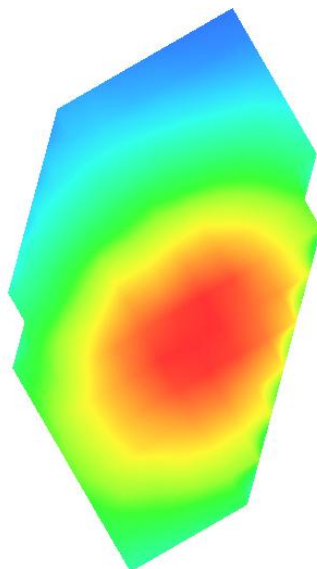3D screen shot	Hot spot position
	

GSM850, Back, Low

Type: Phone measurement (Very fast, 11 points in the volume)

Date of measurement: 05/08/2014

Measurement duration: 7 minutes 32 seconds


Mobile Phone IMEI number: --

A. Experimental conditions.

Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast
Phantom	Validation plane
Device Position	Back
Band	GSM850
Channels	128
Signal	GSM(Duty cycle: 1:8)

B. SAR Measurement Results


Frequency (MHz)	824.2
Relative permittivity (real part)	55.26
Relative permittivity (imaginary part)	21.71
Conductivity (S/m)	0.98
Variation (%)	-3.890000
ConvF:	5.68


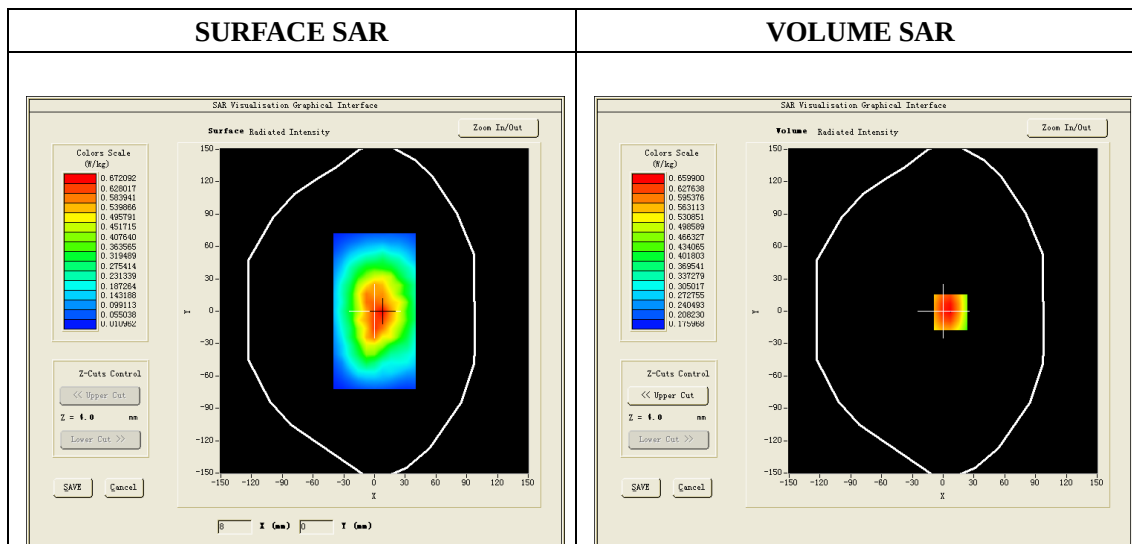


Maximum location: X=7.00, Y=-1.00

SAR 10g (W/Kg)	0.522912
SAR 1g (W/Kg)	0.686952

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.7774	0.6599	0.5334	0.4274	0.3384

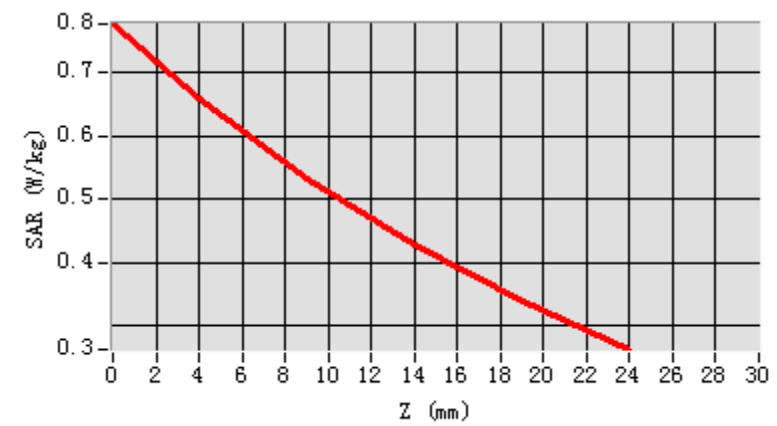

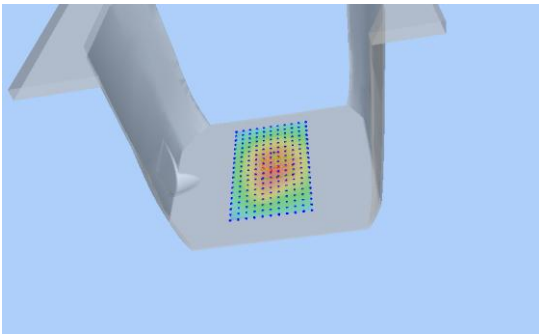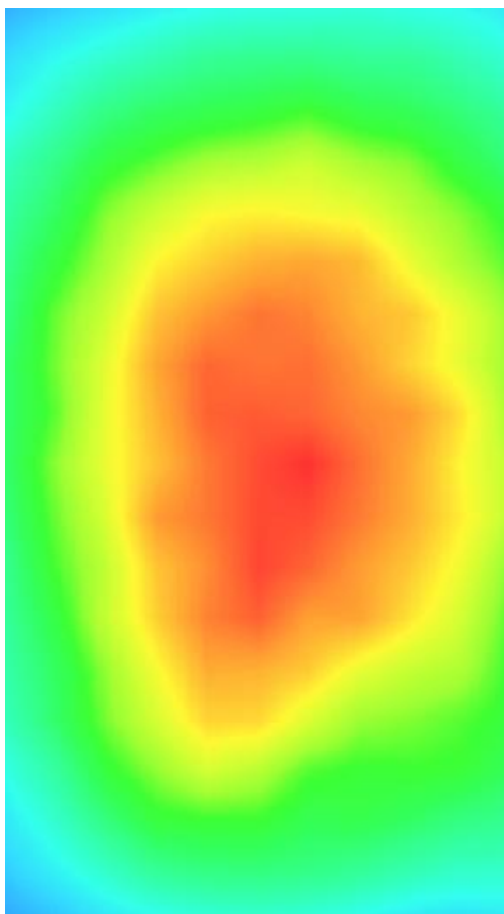3D screen shot	Hot spot position
	

GPRS 850, Back, Low

Type: Phone measurement (Very fast, 11 points in the volume)

Date of measurement: 05/08/2014

Measurement duration: 7 minutes 33 seconds


Mobile Phone IMEI number: --

A. Experimental conditions.

Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast
Phantom	Validation plane
Device Position	Back
Band	CUSTOM (GPRS850_4Tx)
Channels	128
Signal	GPRS(Duty cycle: 1:2)

B.SAR Measurement Results


Frequency (MHz)	824.2
Relative permittivity (real part)	55.26
Relative permittivity (imaginary part)	21.71
Conductivity (S/m)	0.98
Variation (%)	-0.600000
ConvF:	5.68


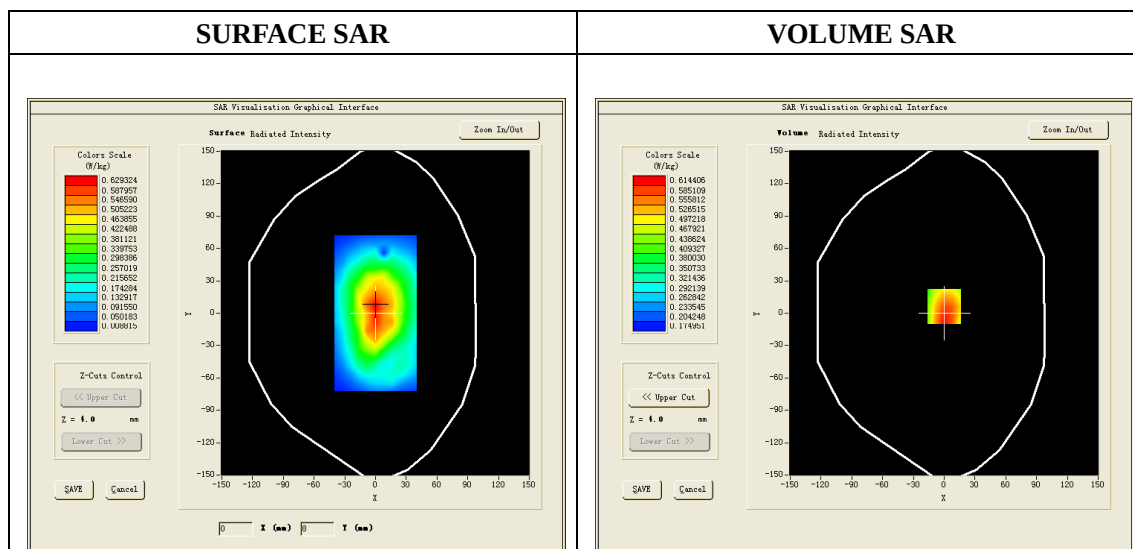


Maximum location: X=0.00, Y=6.00

SAR 10g (W/Kg)	0.441161
SAR 1g (W/Kg)	0.587025

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.7390	0.5840	0.4439	0.3519	0.2932

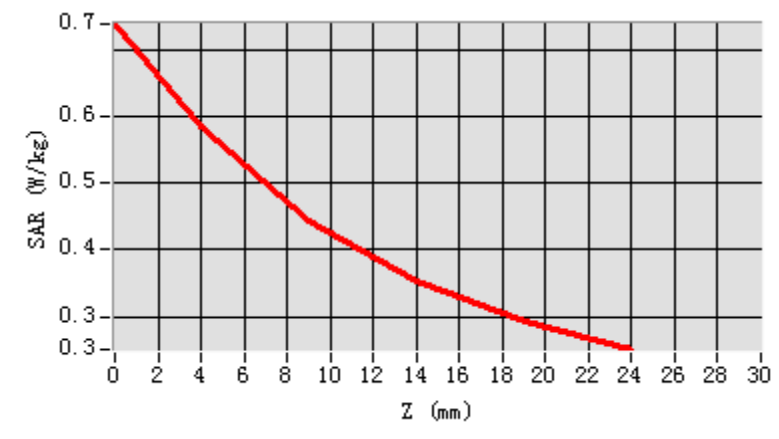

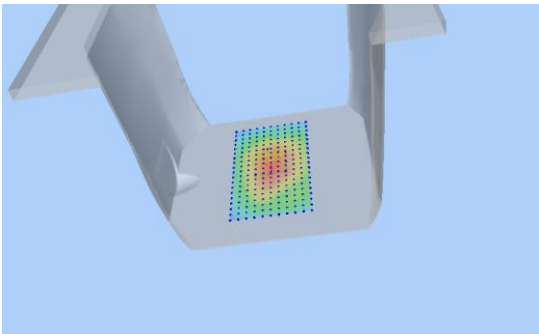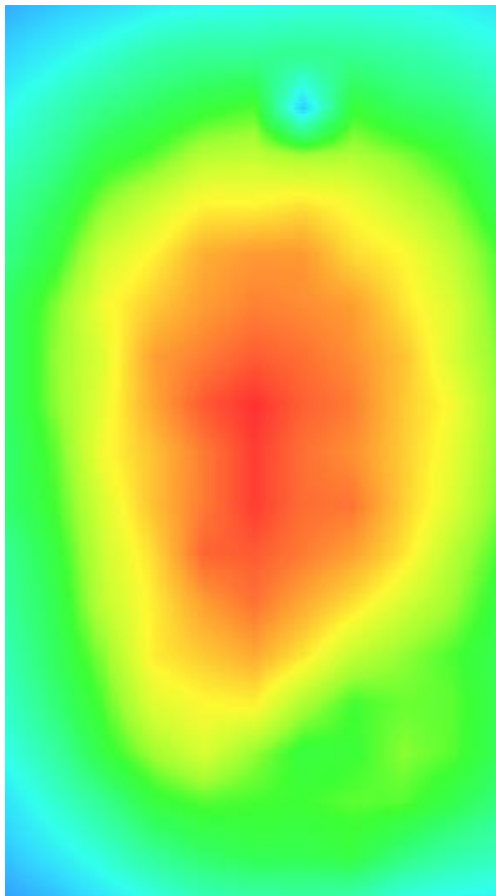3D screen shot	Hot spot position
	

GSM1900, Left Cheek, Middle

Type: Phone measurement (Very fast, 11 points in the volume)

Date of measurement: 04/08/2014

Measurement duration: 5 minutes 37 seconds


Mobile Phone IMEI number: --

A. Experimental conditions.

Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast
Phantom	Left head
Device Position	Cheek
Band	GSM1900
Channels	661
Signal	GSM (Duty cycle: 1:8)

B.SAR Measurement Results


Frequency (MHz)	1880.0
Relative permittivity (real part)	39.98
Relative permittivity (imaginary part)	15.07
Conductivity (S/m)	1.41
Variation (%)	-0.110000
ConvF:	5.49


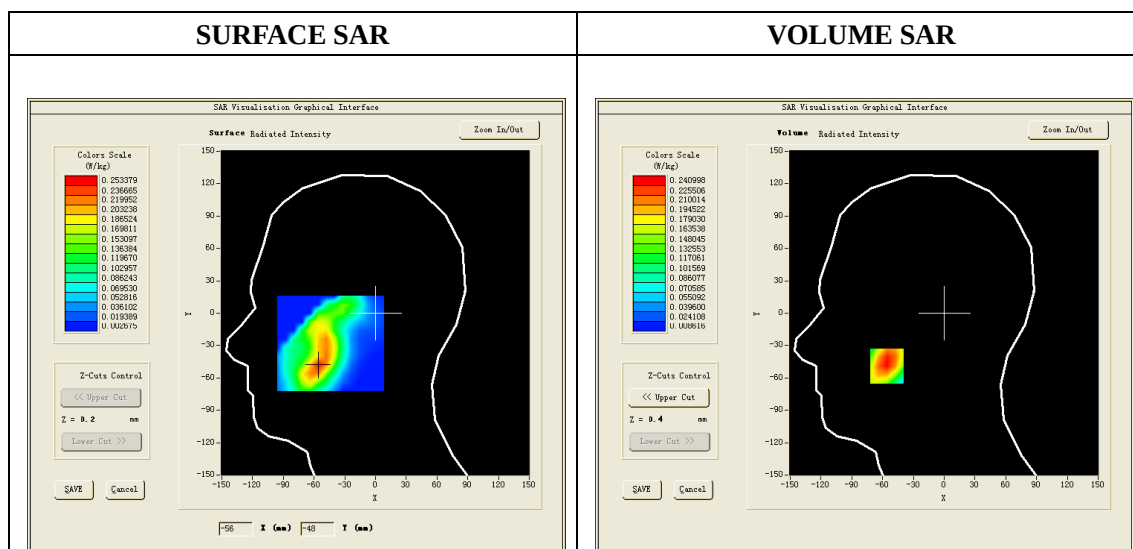


Maximum location: X=-56.00, Y=-49.00

SAR 10g (W/Kg)	0.139486
SAR 1g (W/Kg)	0.229989

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.3351	0.2410	0.1570	0.1012	0.0647

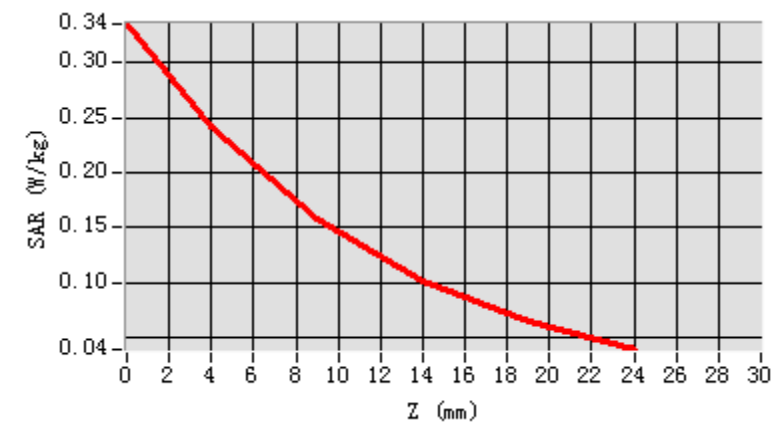

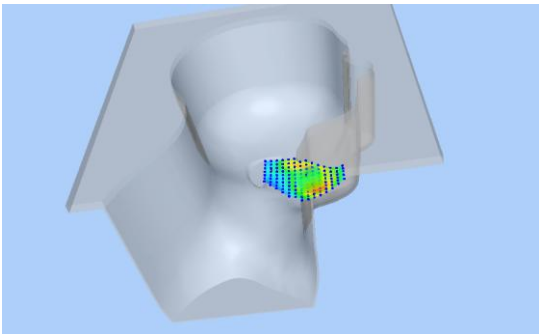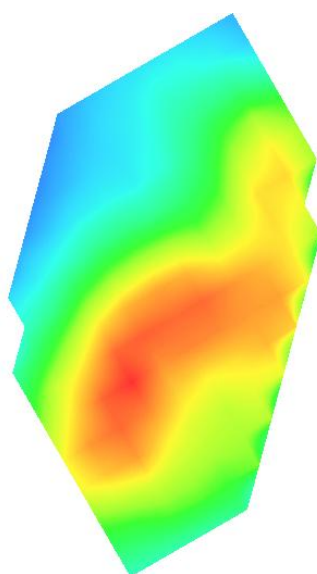3D screen shot	Hot spot position
	

GSM1900, Back, Low

Type: Phone measurement (Very fast, 11 points in the volume)

Date of measurement: 05/08/2014

Measurement duration: 6 minutes 52 seconds


Mobile Phone IMEI number: --

A. Experimental conditions.

Area Scan	dx=8mm dy=8mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast
Phantom	Validation plane
Device Position	Low
Band	GSM1900
Channels	512
Signal	GSM (Duty cycle: 1:8)

B. SAR Measurement Results


Frequency (MHz)	1850.2
Relative permittivity (real part)	53.28
Relative permittivity (imaginary part)	12.99
Conductivity (S/m)	1.53
Variation (%)	-1.900000
ConvF:	5.65


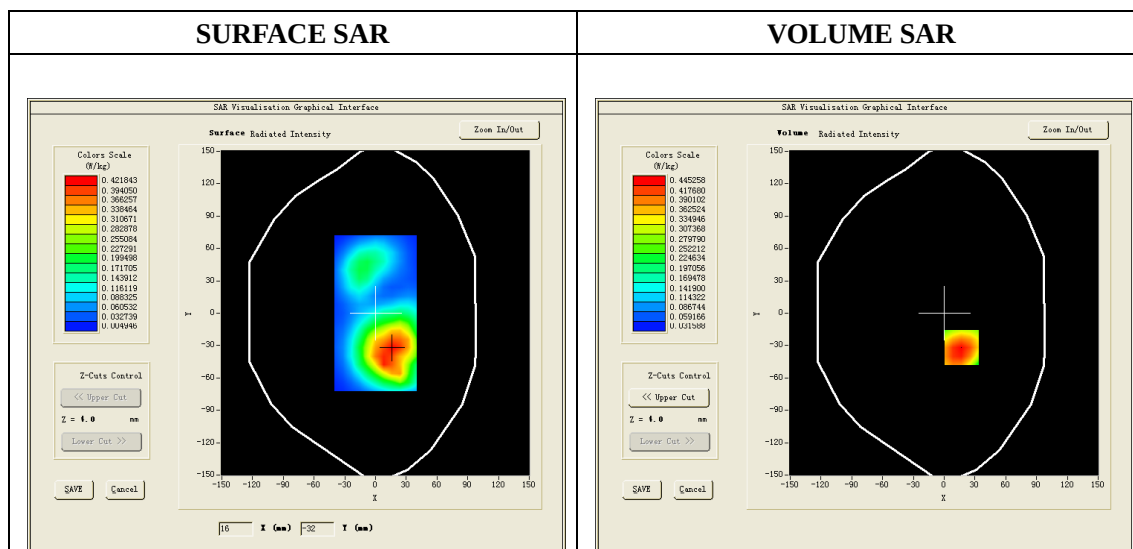


Maximum location: X=17.00, Y=-32.00

SAR 10g (W/Kg)	0.285316
SAR 1g (W/Kg)	0.464367

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.6675	0.4453	0.2641	0.1583	0.0986

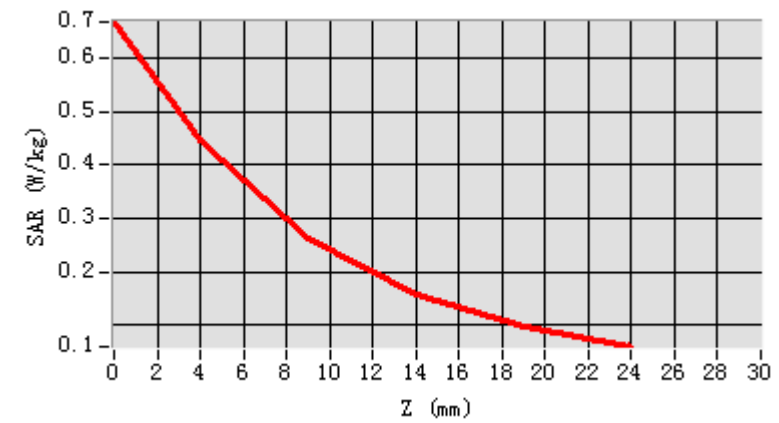

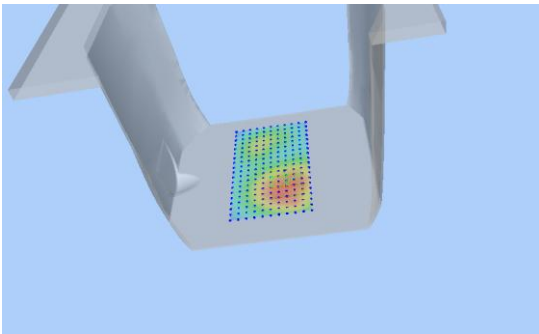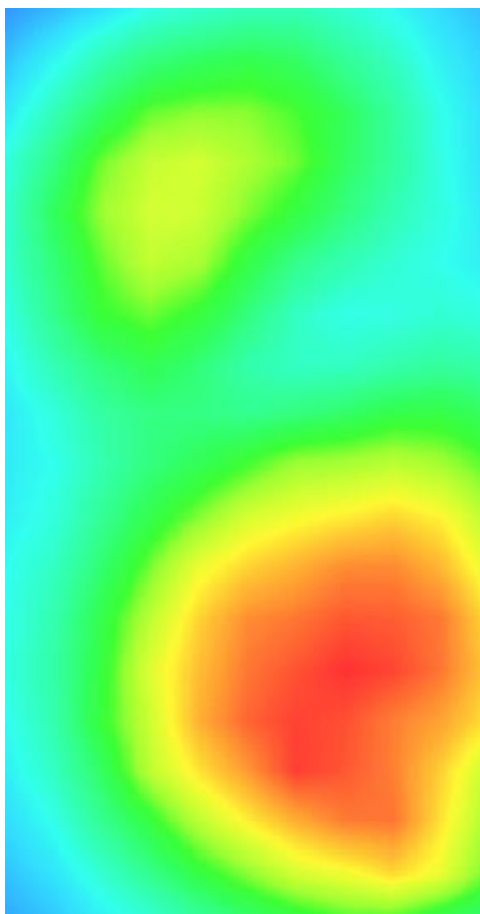3D screen shot	Hot spot position
	

GPRS1900, BACK, Low

Type: Phone measurement (Very fast, 11 points in the volume)

Date of measurement: 05/08/2014

Measurement duration: 7 minutes 31 seconds


Mobile Phone IMEI number: --

A. Experimental conditions.

Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast
Phantom	Validation plane
Device Position	Body
Band	CUSTOM (GPRS1900_4Tx)
Channels	512
Signal	GPRS (Duty cycle: 1:2)

B. SAR Measurement Results


Frequency (MHz)	1850.2
Relative permittivity (real part)	53.28
Relative permittivity (imaginary part)	12.99
Conductivity (S/m)	1.53
Variation (%)	0.260000
ConvF:	5.65


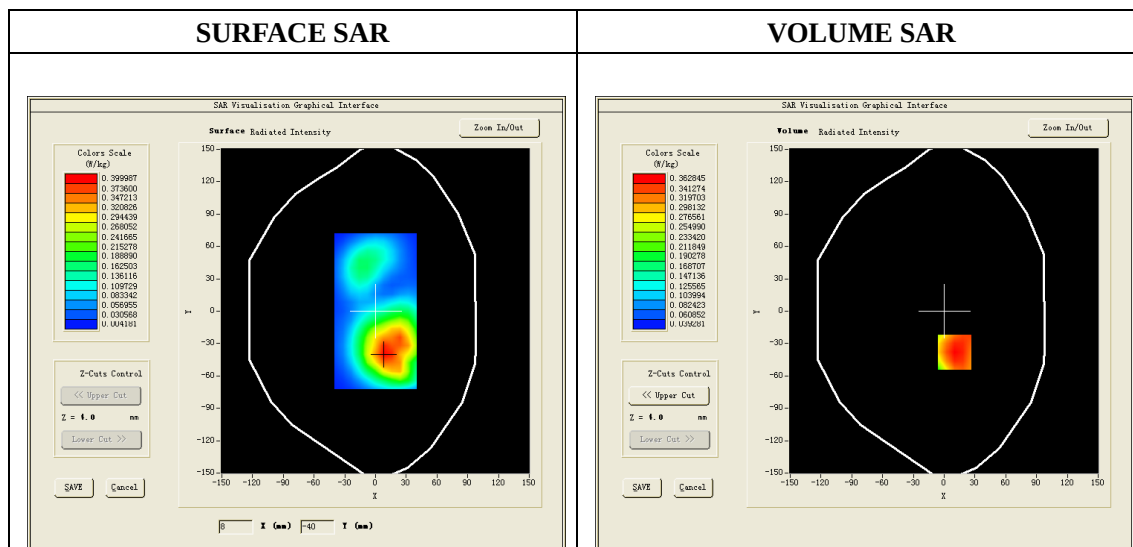


Maximum location: X=10.00, Y=-38.00

SAR 10g (W/Kg)	0.234980
SAR 1g (W/Kg)	0.355848

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.4669	0.3628	0.2574	0.1756	0.1132

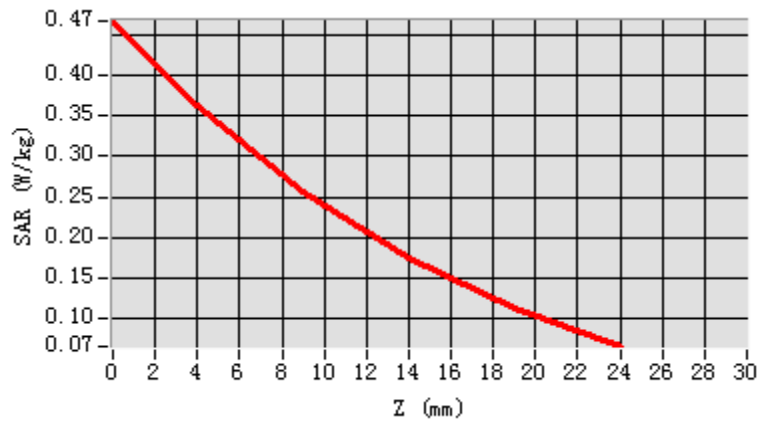

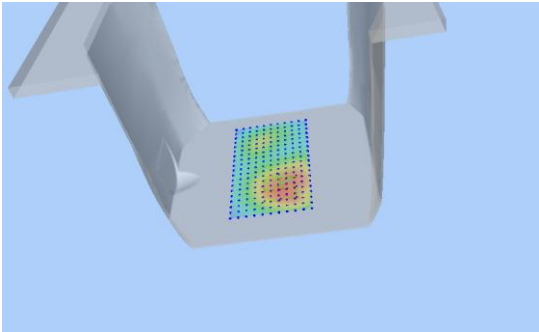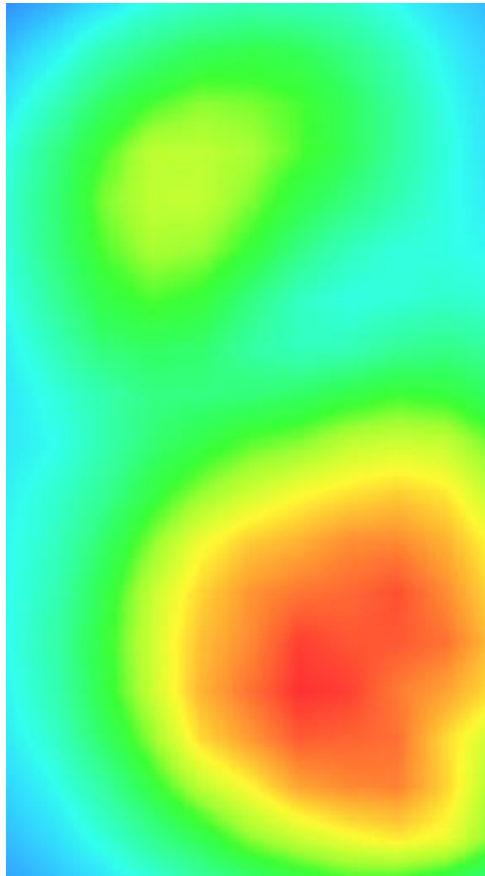3D screen shot	Hot spot position
	

WCDMA850, Left Cheek, Middle

Type: Phone measurement (Very fast, 11 points in the volume)

Date of measurement: 04/08/2014

Measurement duration: 5 minutes 19 seconds

Mobile Phone IMEI number: --


A. Experimental conditions.

Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast
Phantom	Left head
Device Position	Cheek
Band	Band5_WCDMA850
Channels	4183
Signal	WCDMA (Duty cycle: 1:1)


B. SAR Measurement Results

Frequency (MHz)	836.6
Relative permittivity (real part)	41.45
Relative permittivity (imaginary part)	15.07
Conductivity (S/m)	0.91
Variation (%)	-0.970000
ConvF:	5.51

SURFACE SAR

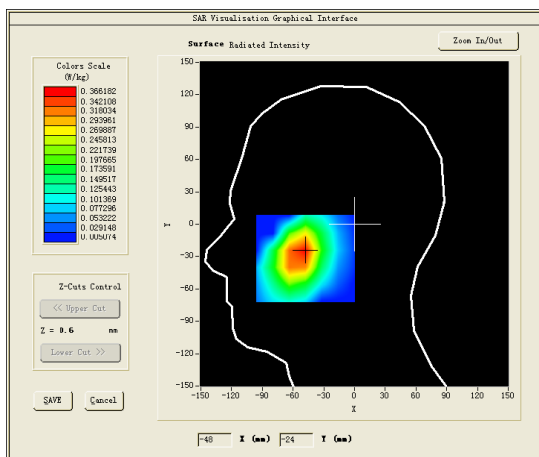


VOLUME SAR


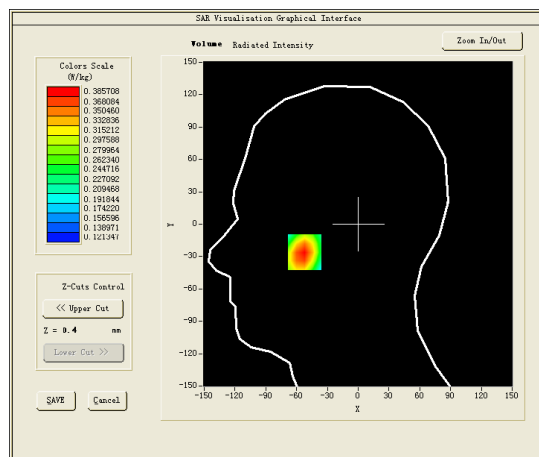


Maximum location: X=-52.00, Y=-26.00

SAR 10g (W/Kg)	0.317796
SAR 1g (W/Kg)	0.364882

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.3940	0.3857	0.3663	0.3369	0.3003

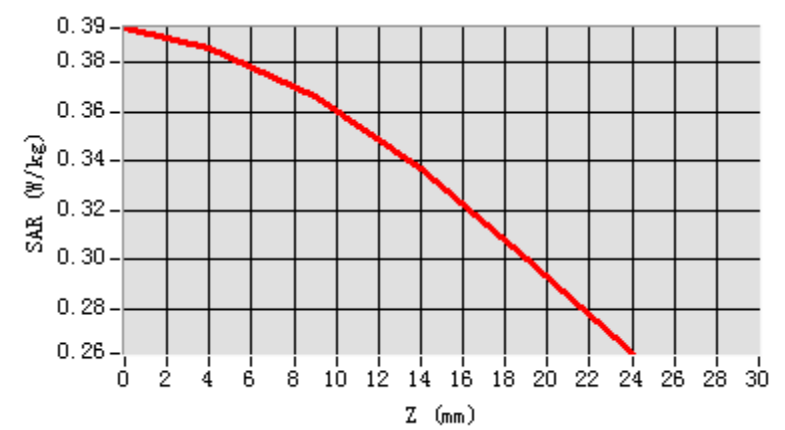

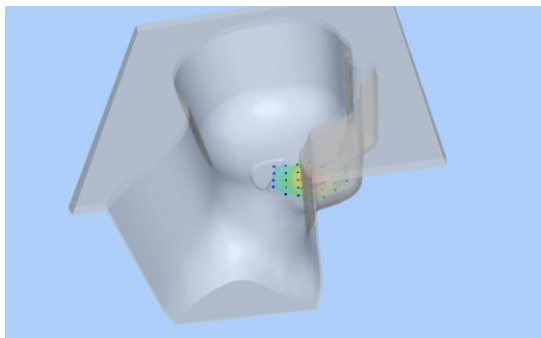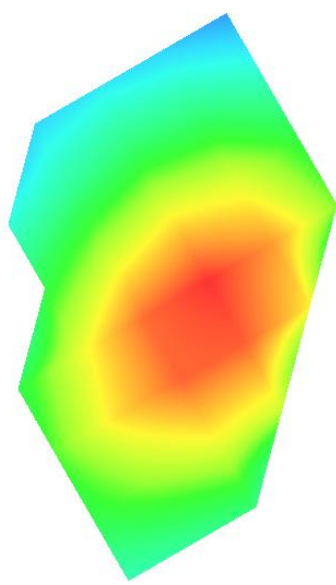3D screen shot	Hot spot position
	

WCDMA850, Back, Middle

Type: Phone measurement (Very fast, 11 points in the volume)

Date of measurement: 05/08/2014

Measurement duration: 7 minutes 26 seconds


Mobile Phone IMEI number: --

A. Experimental conditions.

Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast
Phantom	Validation plane
Device Position	Back
Band	Band5_WCDMA850
Channels	4183
Signal	WCDMA (Crest factor: 1:1)

B. SAR Measurement Results


Frequency (MHz)	836.6
Relative permittivity (real part)	55.26
Relative permittivity (imaginary part)	21.71
Conductivity (S/m)	0.98
Variation (%)	-3.820000
ConvF:	5.68


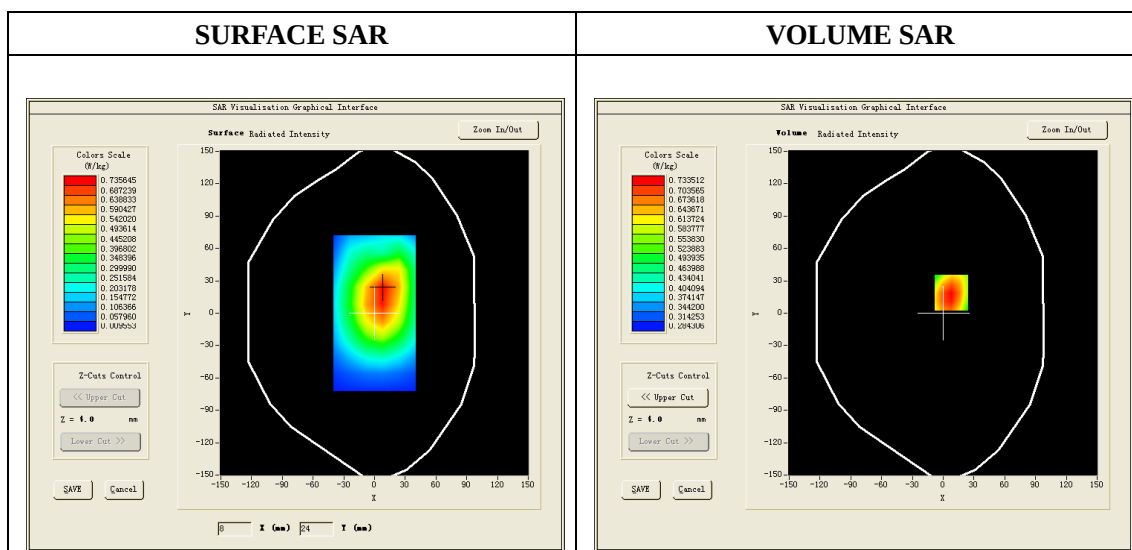


Maximum location: X=8.00, Y=19.00

SAR 10g (W/Kg)	0.636174
SAR 1g (W/Kg)	0.772471

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.8141	0.7335	0.6428	0.5624	0.4910

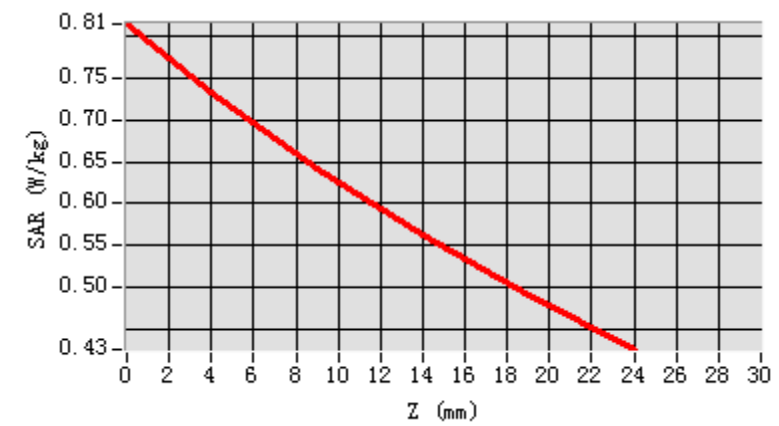

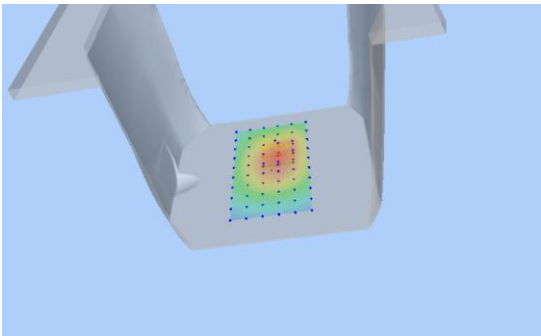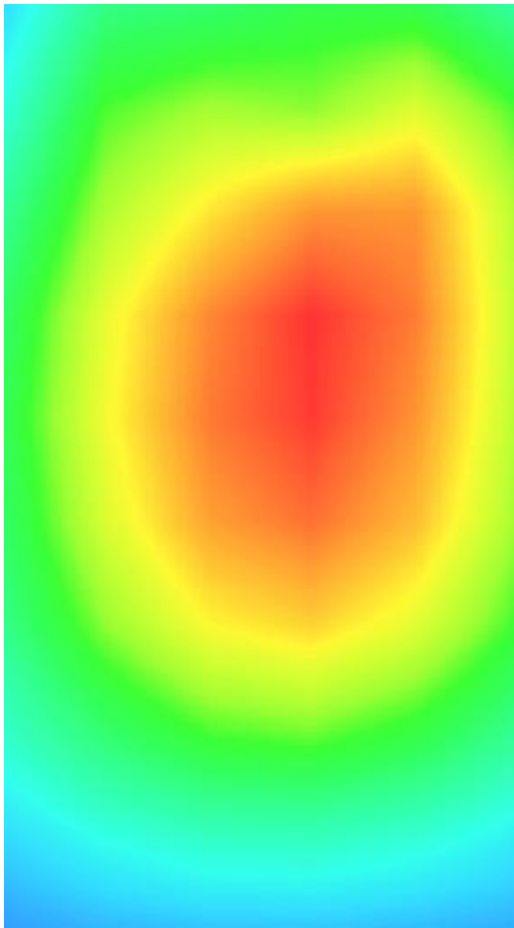3D screen shot	Hot spot position
	

WCDMA850, Back, Middle, Repeat Measurement

Type: Phone measurement (Very fast, 11 points in the volume)

Date of measurement: 05/08/2014

Measurement duration: 7 minutes 26 seconds


Mobile Phone IMEI number: --

A. Experimental conditions.

Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast
Phantom	Validation plane
Device Position	Back
Band	Band5_WCDMA850
Channels	4183
Signal	WCDMA (Crest factor: 1:1)

B. SAR Measurement Results


Frequency (MHz)	836.6
Relative permittivity (real part)	55.26
Relative permittivity (imaginary part)	21.71
Conductivity (S/m)	0.98
Variation (%)	-1.250000
ConvF:	5.68


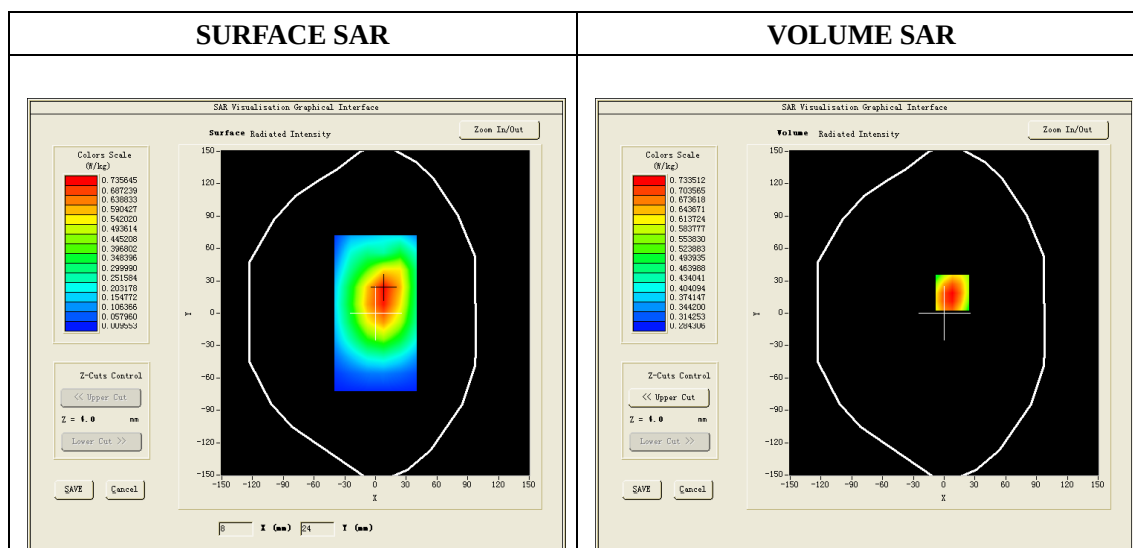


Maximum location: X=8.00, Y=19.00

SAR 10g (W/Kg)	0.635173
SAR 1g (W/Kg)	0.762471

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.8140	0.7335	0.6426	0.5623	0.4910

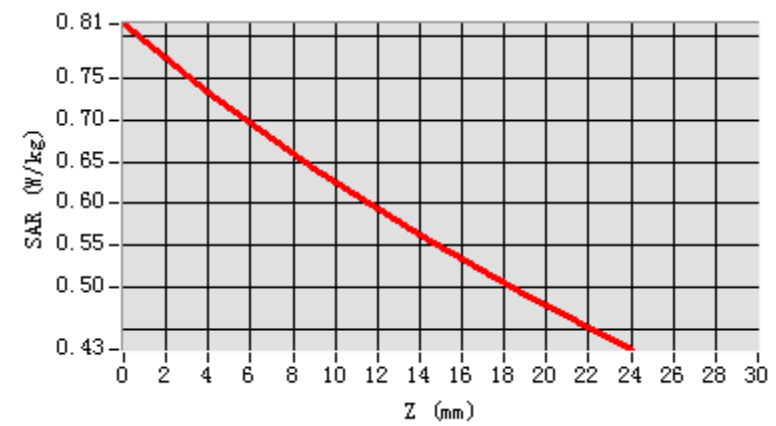

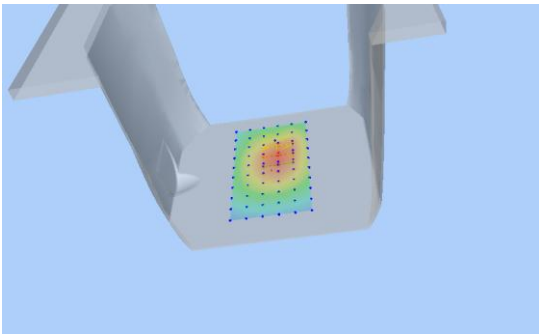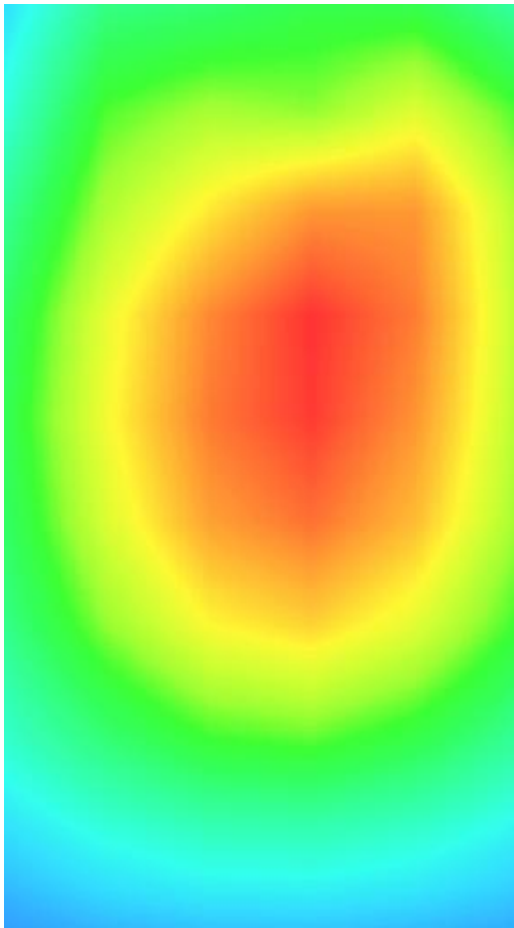3D screen shot	Hot spot position
	

WCDMA1700, Right Cheek, Middle

Type: Phone measurement (Very fast, 11 points in the volume)

Date of measurement: 04/08/2014

Measurement duration: 6 minutes 6 seconds


Mobile Phone IMEI number: --

A. Experimental conditions.

Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast
Phantom	Right head
Device Position	Cheek
Band	Band2_WCDMA1700
Channels	1673
Signal	WCDMA (Duty cycle: 1:1)



B. SAR Measurement Results

Frequency (MHz)	1712.4
Relative permittivity (real part)	39.979347
Relative permittivity (imaginary)	15.067700
Conductivity (S/m)	1.413587
Variation (%)	4.800000
ConvF:	4.80

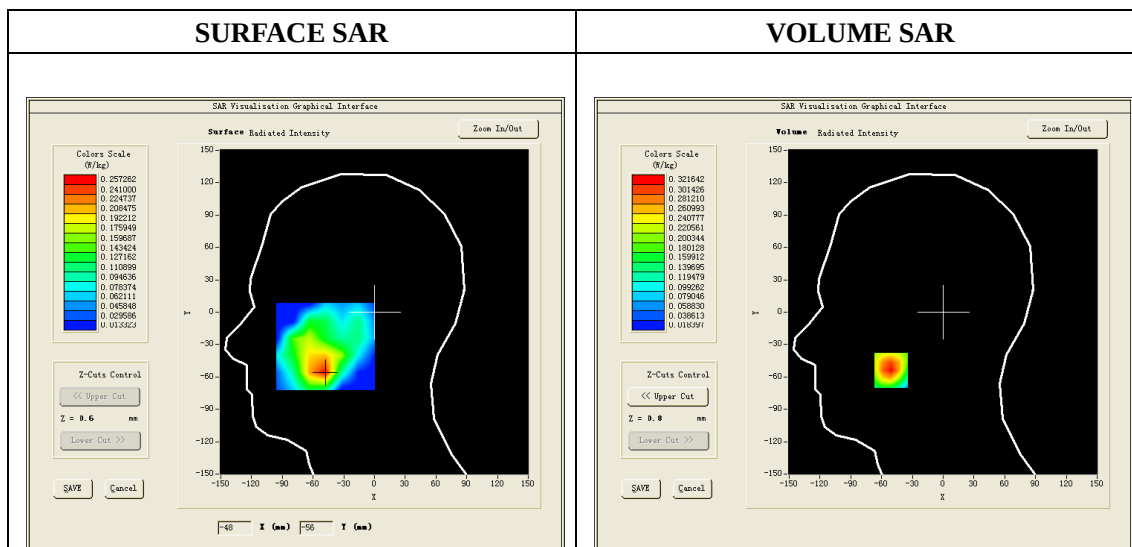

Maximum location: X=-51.00, Y=-54.00

SAR 10g (W/Kg)	0.202789
SAR 1g (W/Kg)	0.305978

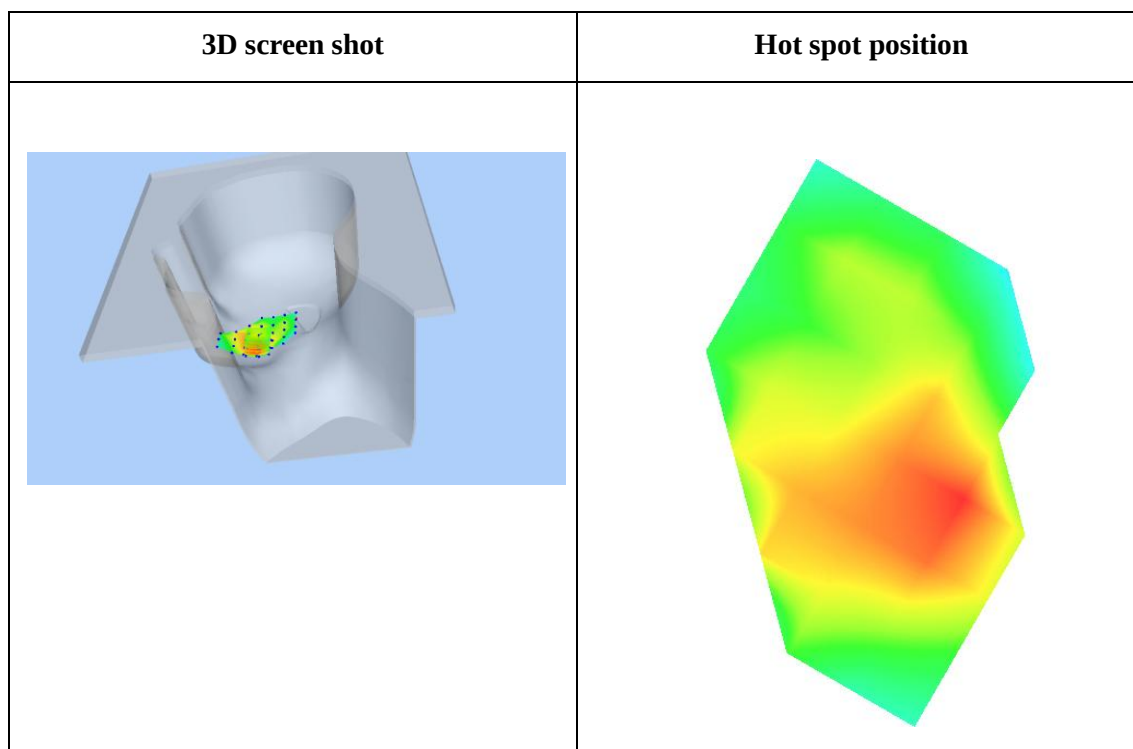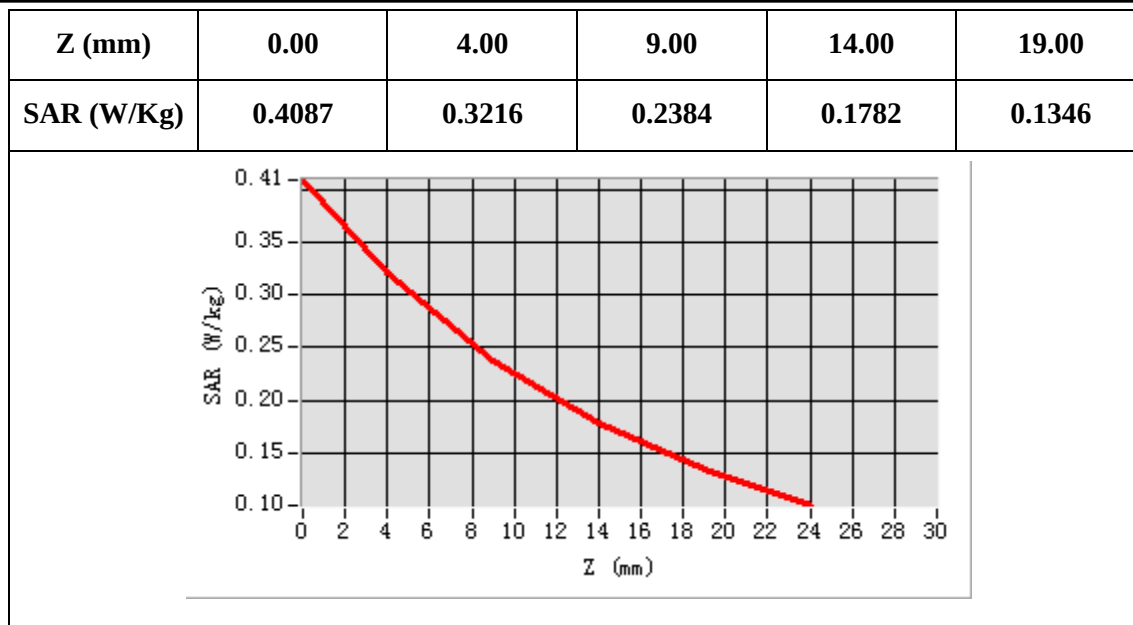

WCDMA1700, Back, Middle

Type: Phone measurement (Very fast, 11 points in the volume)

Date of measurement: 05/08/2014

Measurement duration: 7 minutes 37 seconds


Mobile Phone IMEI number: --

A. Experimental conditions.

Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast
Phantom	Validation plane
Device Position	Back
Band	Band2_WCDMA1700
Channels	1637
Signal	WCDMA (Duty cycle: 1:1)

B. SAR Measurement Results


Frequency (MHz)	1732.4
Relative permittivity (real part)	53.890442
Relative permittivity (imaginary)	14.070000
Conductivity (S/m)	1.529512
Variation (%)	-0.800000
ConvF:	4.94


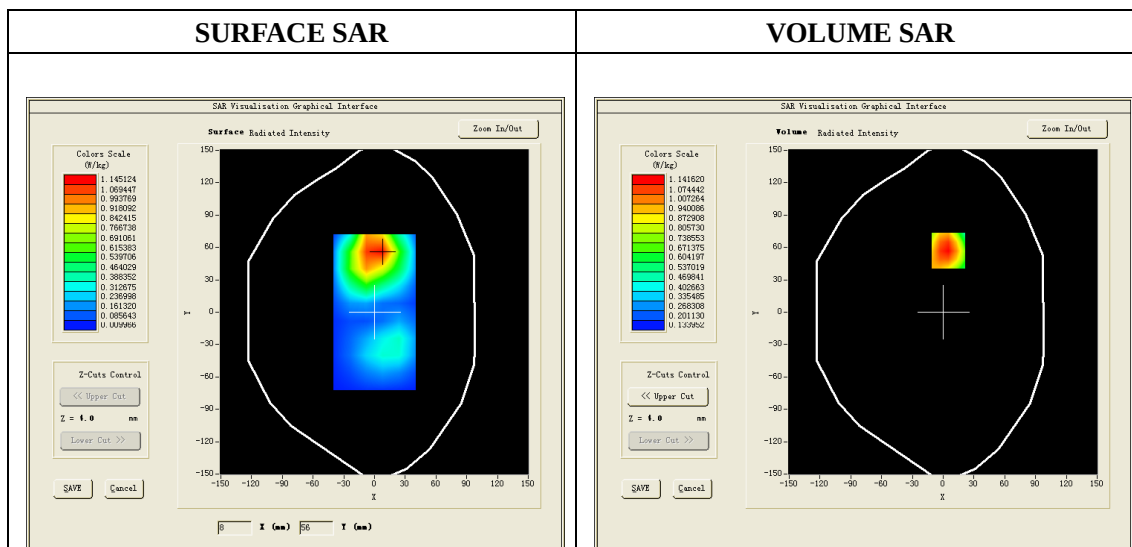


Maximum location: X=5.00, Y=57.00

SAR 10g (W/Kg)	0.817050
SAR 1g (W/Kg)	1.187756

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.4085	1.1416	0.8643	0.6415	0.4636

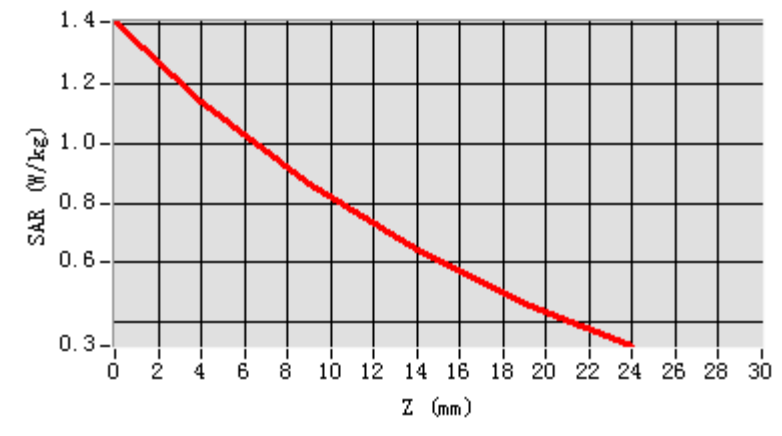

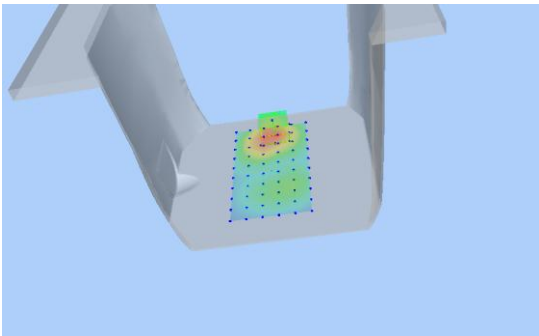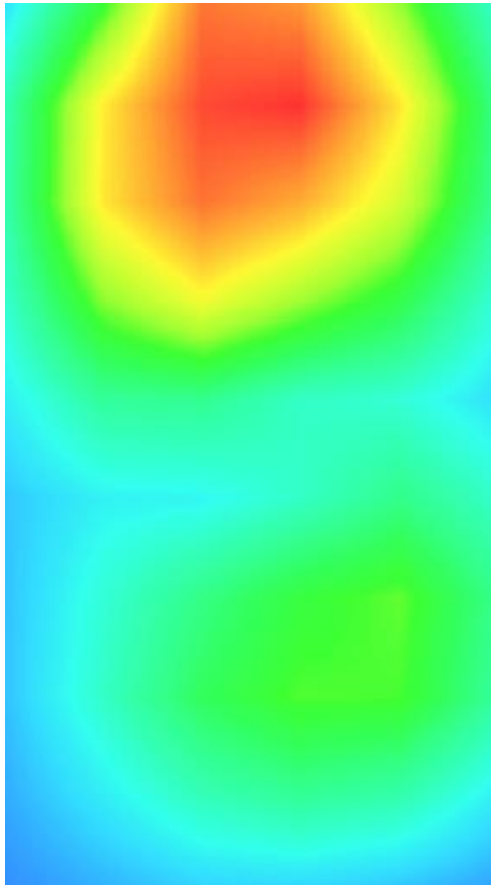3D screen shot	Hot spot position
	

WCDMA1700, Back, Middle, Repeated test1

Type: Phone measurement (Very fast, 11 points in the volume)

Date of measurement: 05/08/2014

Measurement duration: 7 minutes 37 seconds


Mobile Phone IMEI number: --

A. Experimental conditions.

Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast
Phantom	Validation plane
Device Position	Back
Band	Band2_WCDMA1700
Channels	1637
Signal	WCDMA (Duty cycle: 1:1)

B. SAR Measurement Results


Frequency (MHz)	1732.4
Relative permittivity (real part)	53.890442
Relative permittivity (imaginary)	14.070000
Conductivity (S/m)	1.529512
Variation (%)	1.140000
ConvF:	4.94


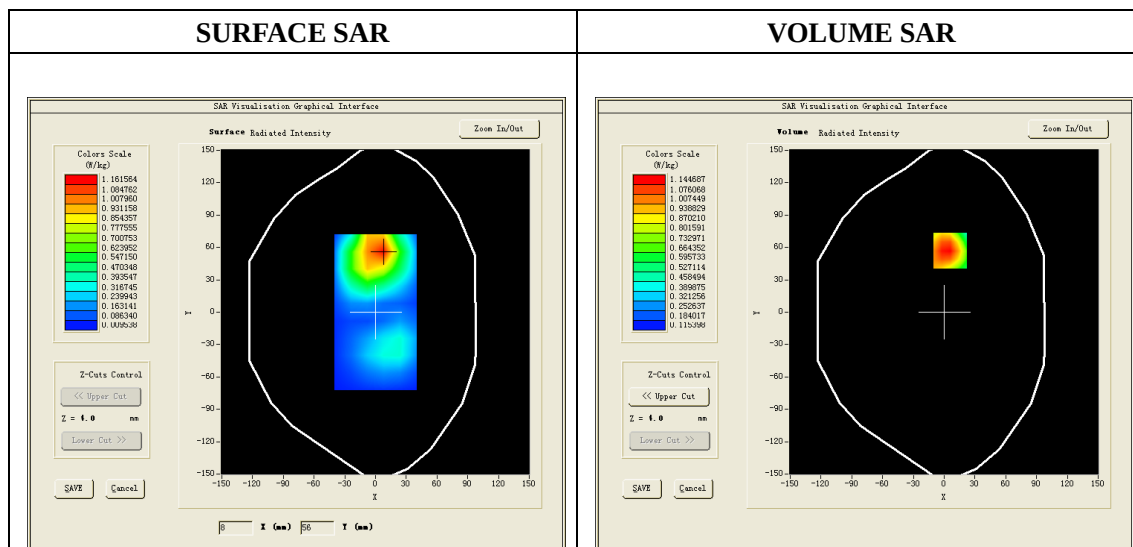


Maximum location: X=6.00, Y=57.00

SAR 10g (W/Kg)	0.808041
SAR 1g (W/Kg)	1.195706

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.4651	1.1447	0.8351	0.6077	0.4409

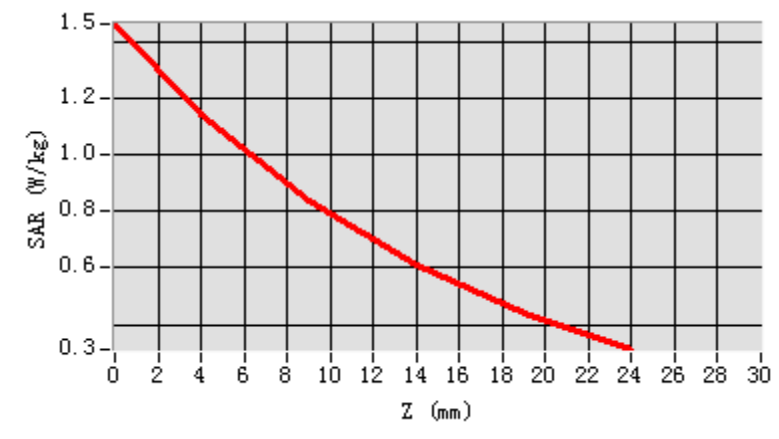

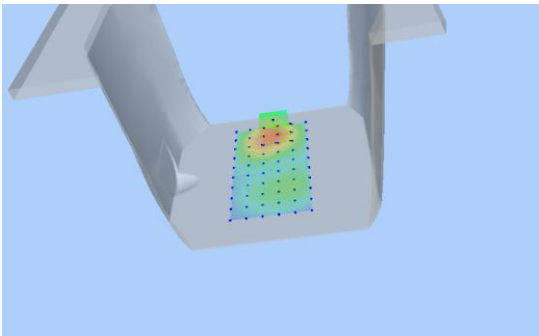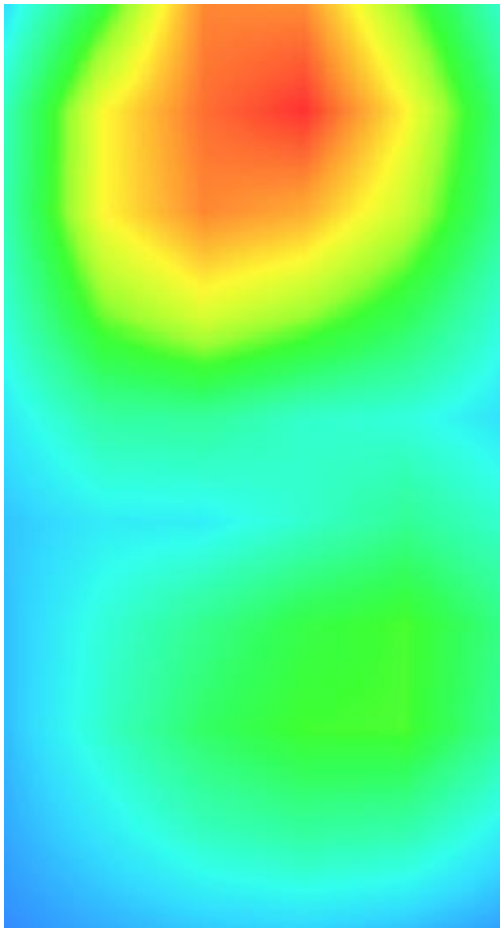3D screen shot	Hot spot position
	

WCDMA1700, Back, Middle, Repeated test2

Type: Phone measurement (Very fast, 11 points in the volume)

Date of measurement: 05/08/2014

Measurement duration: 7 minutes 37 seconds


Mobile Phone IMEI number: --

A. Experimental conditions.

Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast
Phantom	Validation plane
Device Position	Back
Band	Band2_WCDMA1700
Channels	1637
Signal	WCDMA (Duty cycle: 1:1)



B. SAR Measurement Results

Frequency (MHz)	1732.4
Relative permittivity (real part)	53.890442
Relative permittivity (imaginary)	14.070000
Conductivity (S/m)	1.529512
Variation (%)	-0.120000
ConvF:	4.94

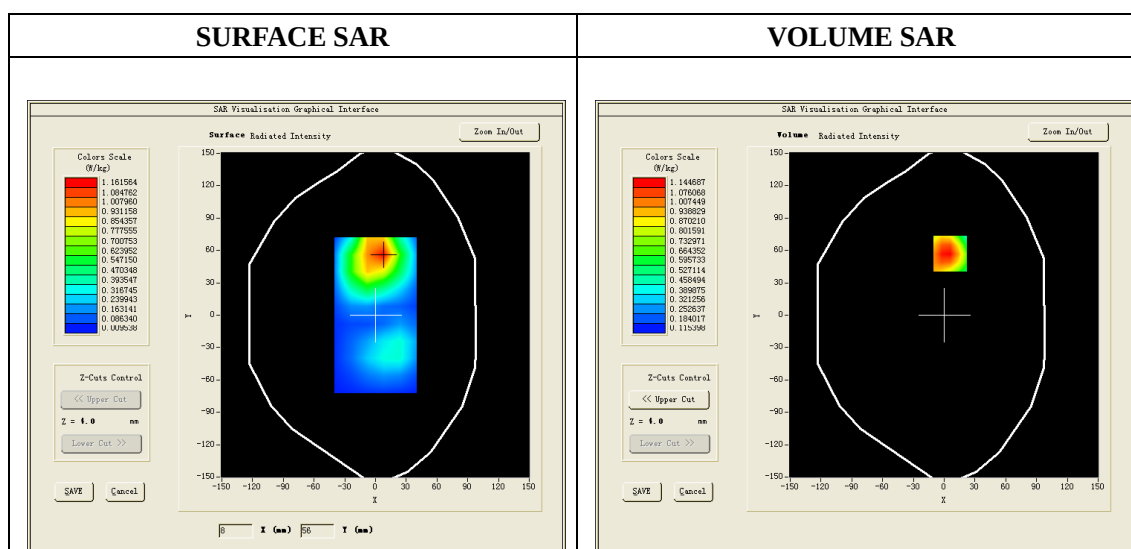

Maximum location: X=6.00, Y=57.00

SAR 10g (W/Kg)	0.805253
SAR 1g (W/Kg)	1.192351

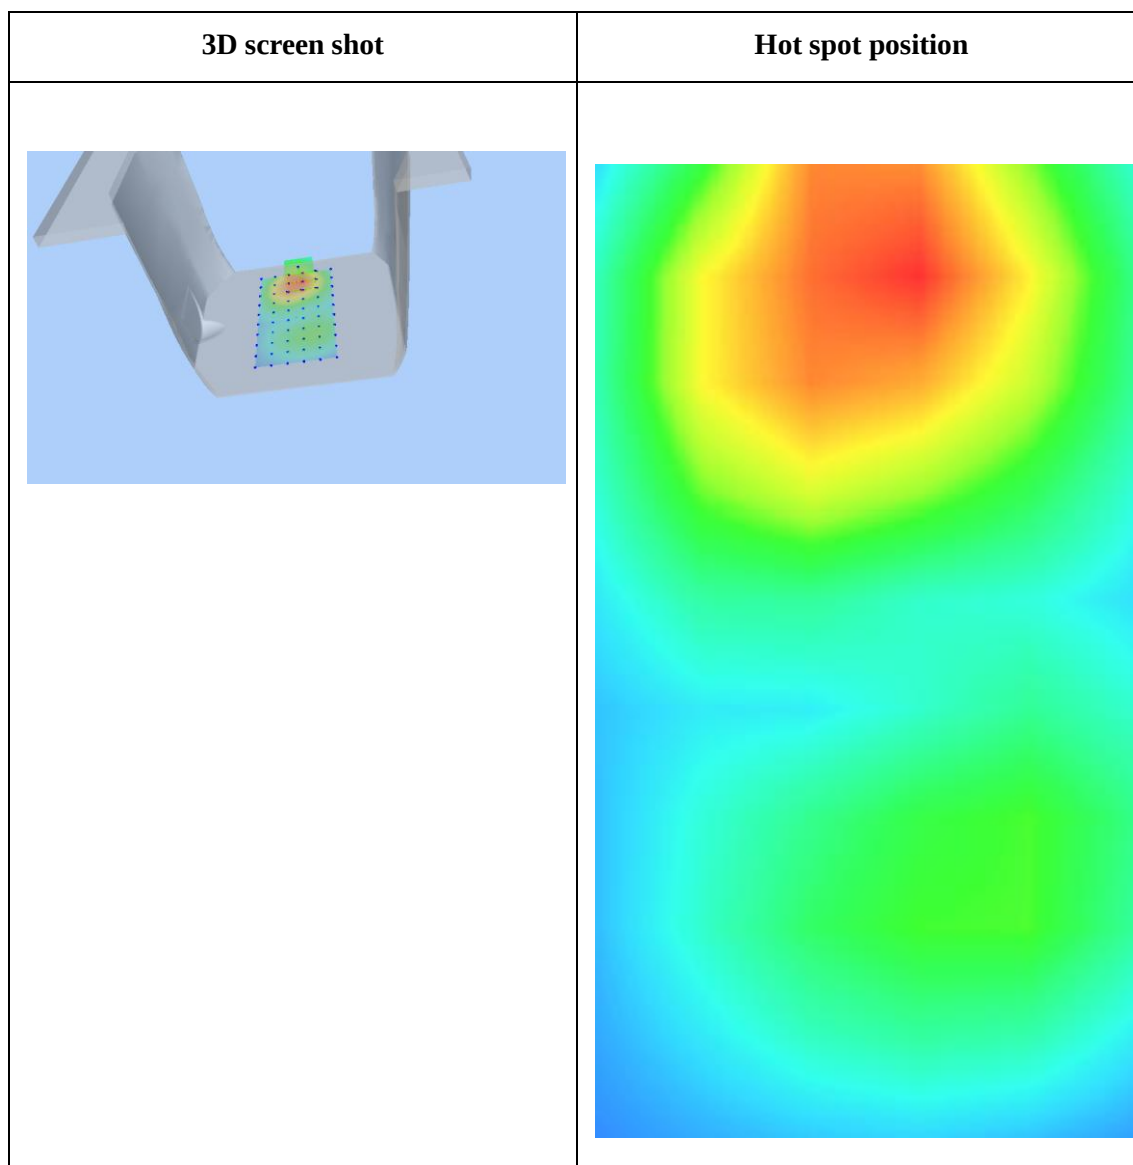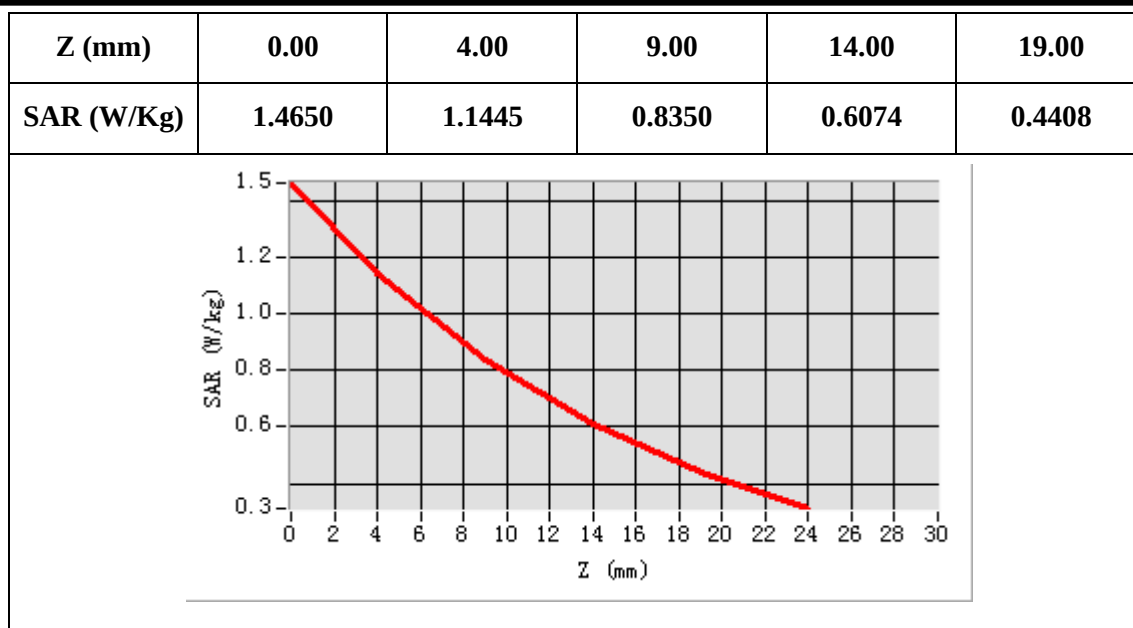

WCDMA1900, Left Cheek, Middle

Type: Phone measurement (Very fast, 11 points in the volume)

Date of measurement: 04/08/2014

Measurement duration: 6 minutes 6 seconds


Mobile Phone IMEI number: --

A. Experimental conditions.

Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast
Phantom	Left head
Device Position	Cheek
Band	Band2_WCDMA1900
Channels	9400
Signal	WCDMA (Duty cycle: 1:1)

B. SAR Measurement Results


Frequency (MHz)	1880.0
Relative permittivity (real part)	39.98
Relative permittivity (imaginary)	15.07
Conductivity (S/m)	1.41
Variation (%)	-4.920000
ConvF:	5.49


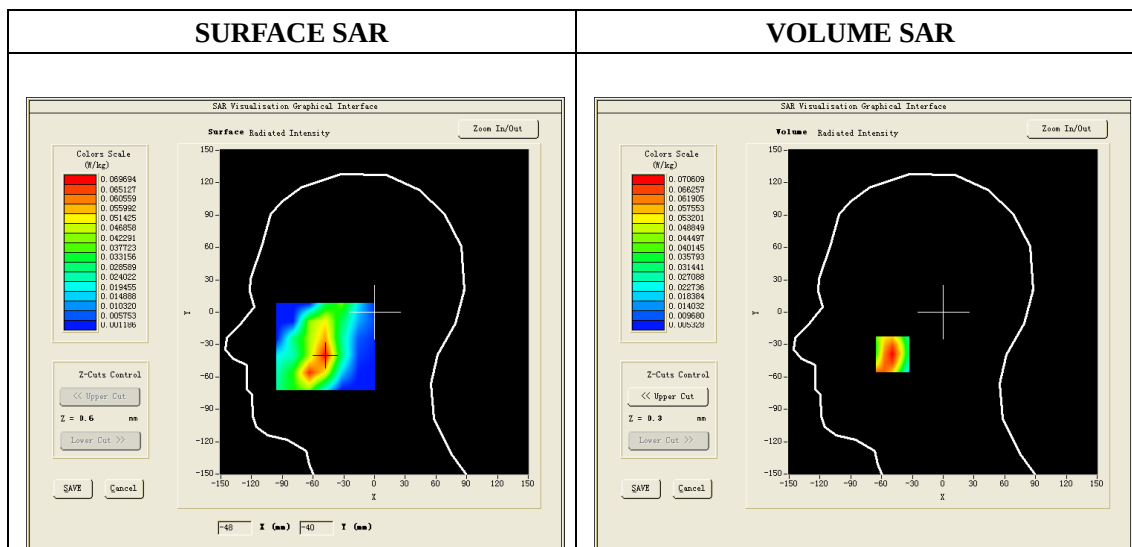


Maximum location: X=-49.00, Y=-39.00

SAR 10g (W/Kg)	0.044532
SAR 1g (W/Kg)	0.066870

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0901	0.0706	0.0520	0.0385	0.0288

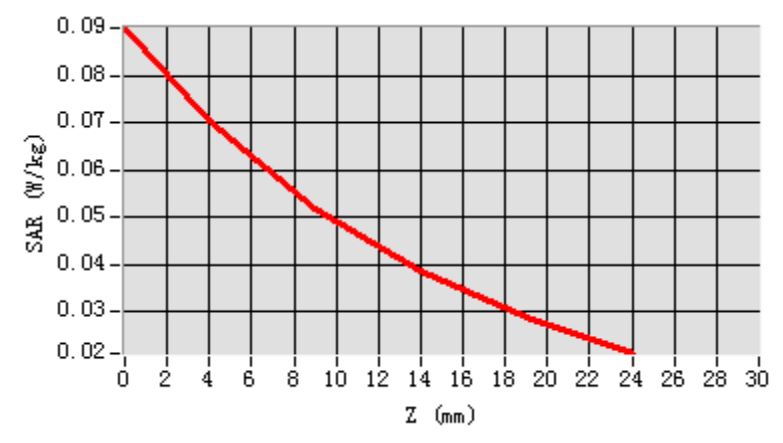

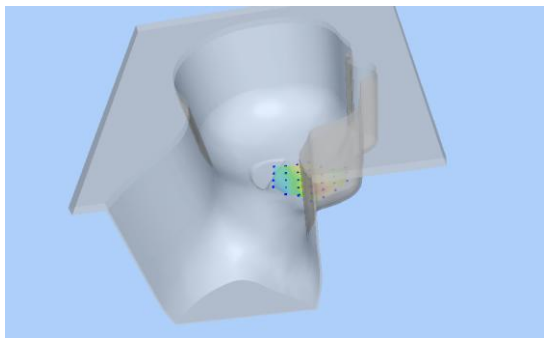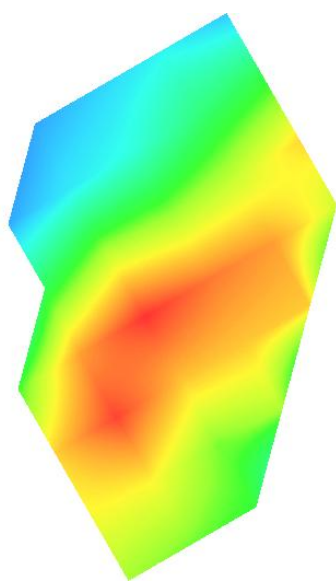3D screen shot	Hot spot position
	

WCDMA1900, Back, Middle

Type: Phone measurement (Very fast, 11 points in the volume)

Date of measurement: 05/08/2014

Measurement duration: 7 minutes 37 seconds


Mobile Phone IMEI number: --

A. Experimental conditions.

Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast
Phantom	Validation plane
Device Position	Back
Band	Band2_WCDMA1900
Channels	9400
Signal	WCDMA (Duty cycle: 1:1)



B. SAR Measurement Results

Frequency (MHz)	1880.0
Relative permittivity (real part)	53.28
Relative permittivity (imaginary)	12.99
Conductivity (S/m)	1.53
Variation (%)	-0.160000
ConvF:	5.65

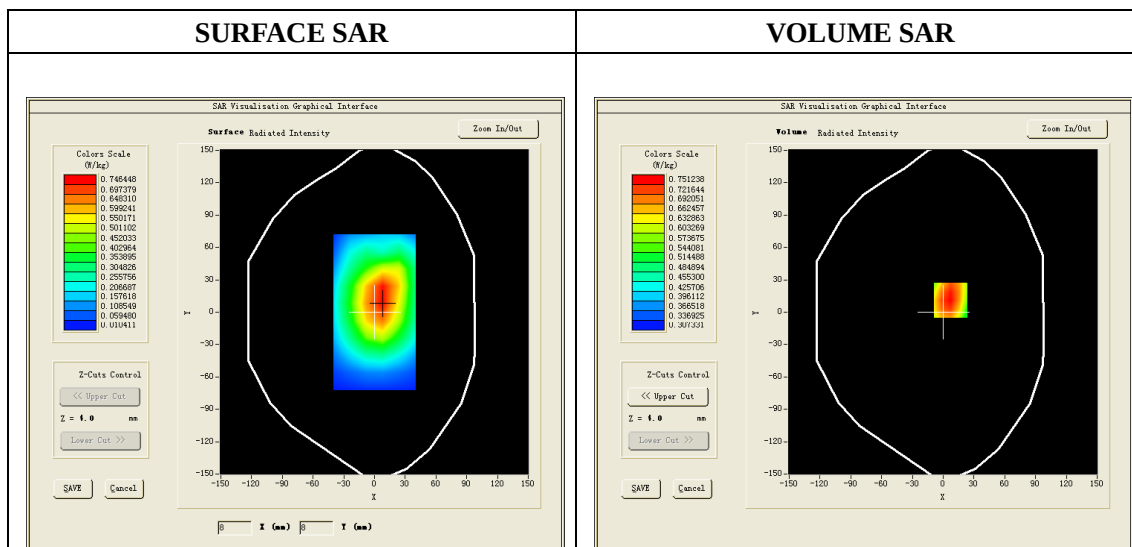

Maximum location: X=7.00, Y=11.00

SAR 10g (W/Kg)	0.668295
SAR 1g (W/Kg)	0.792819

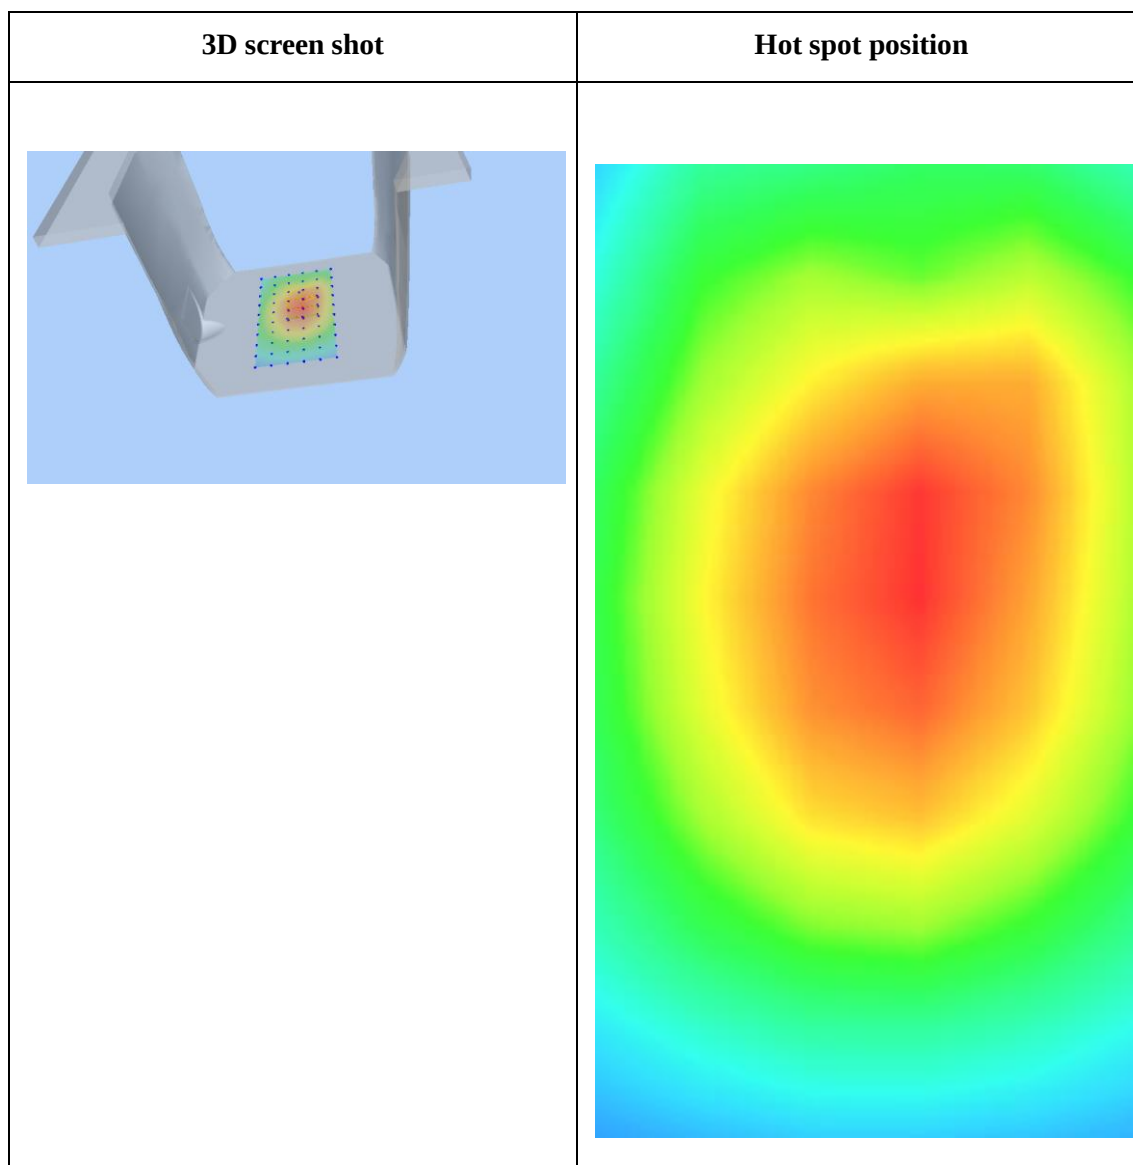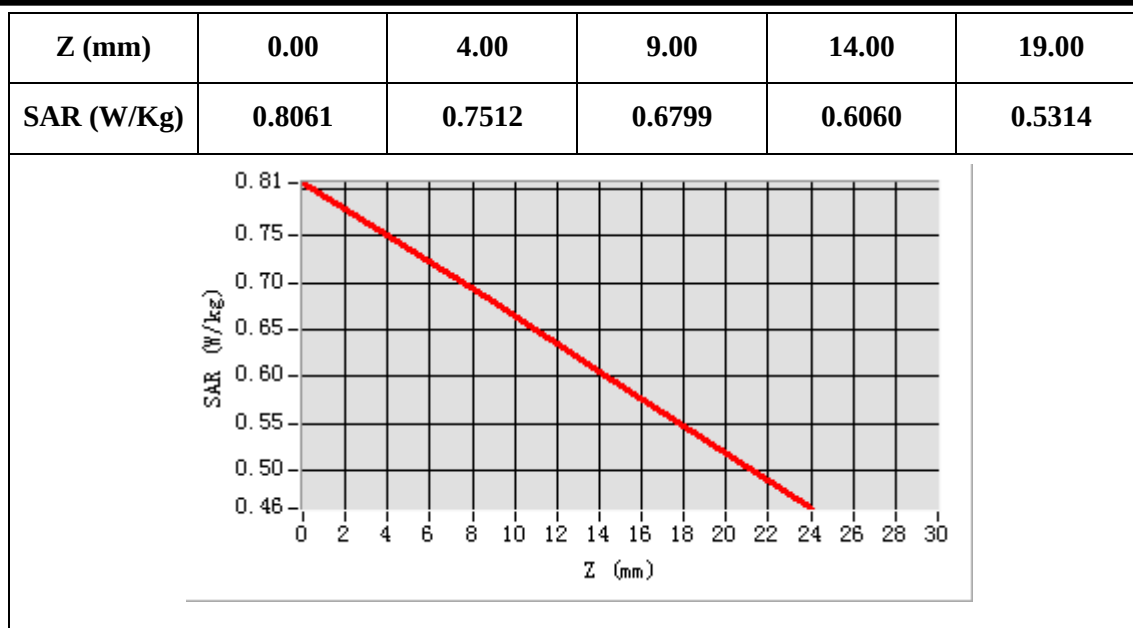

WCDMA1900, Back, Middle, Repeated test

Type: Phone measurement (Very fast, 11 points in the volume)

Date of measurement: 05/08/2014

Measurement duration: 7 minutes 37 seconds

Mobile Phone IMEI number: --


A. Experimental conditions.

Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast
Phantom	Validation plane
Device Position	Back
Band	Band2_WCDMA1900
Channels	9400
Signal	WCDMA (Duty cycle: 1:1)


B. SAR Measurement Results

Frequency (MHz)	1880.0
Relative permittivity (real part)	53.28
Relative permittivity (imaginary)	12.99
Conductivity (S/m)	1.53
Variation (%)	0.350000
ConvF:	5.65

SURFACE SAR


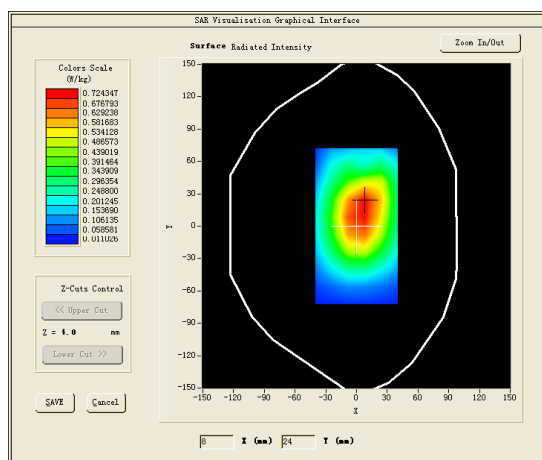


VOLUME SAR

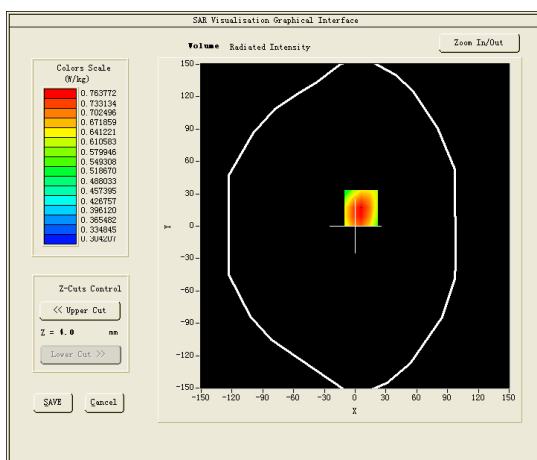

Maximum location: X=6.00, Y=17.00

SAR 10g (W/Kg)	0.677156
SAR 1g (W/Kg)	0.806954

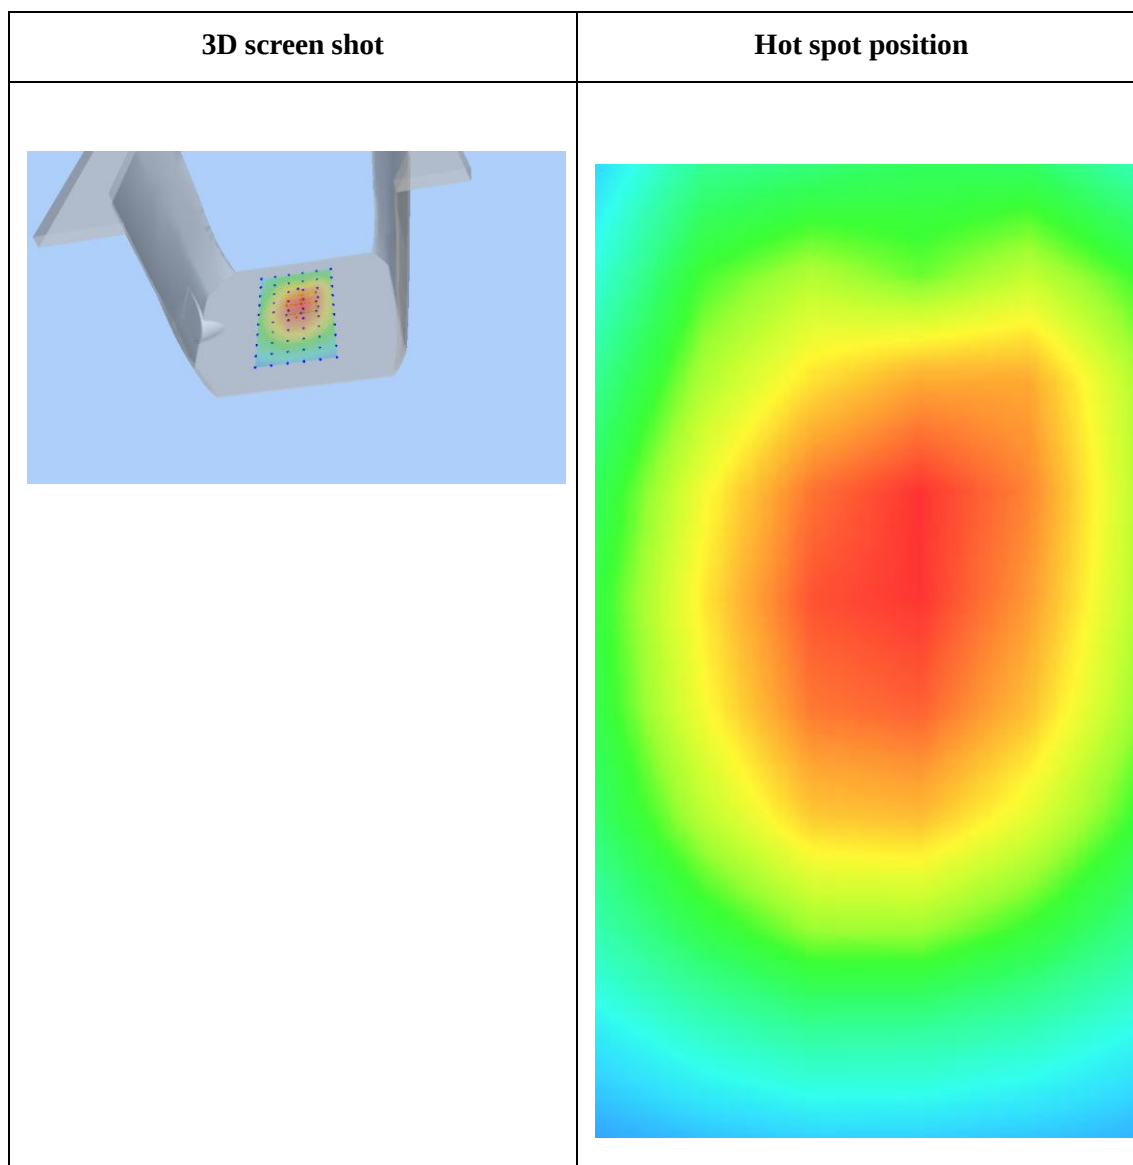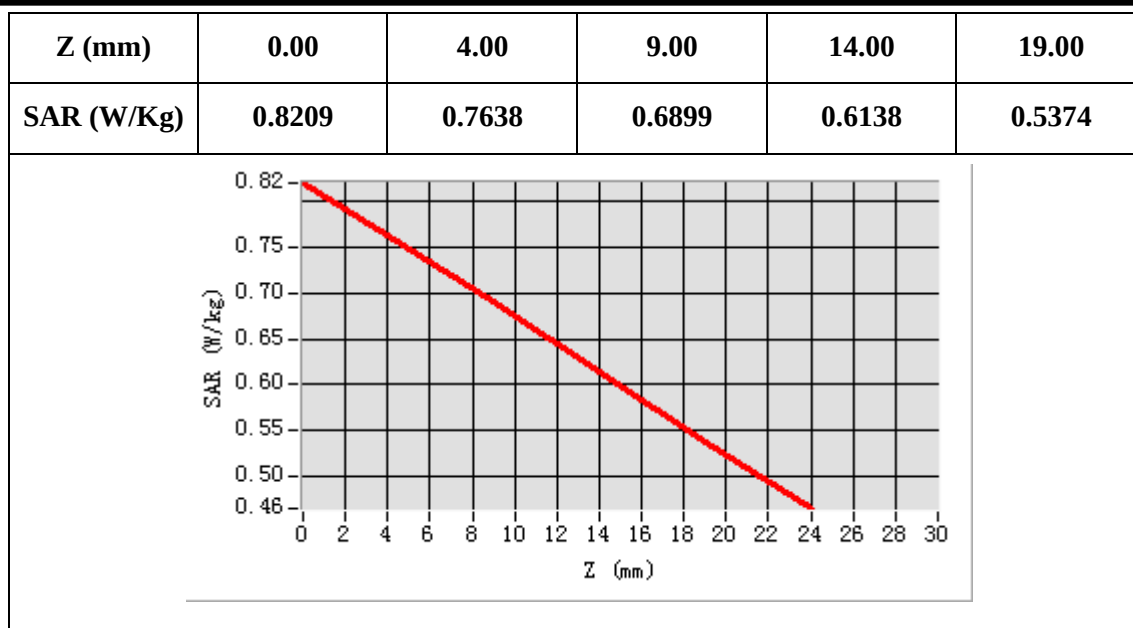

Wi-Fi 802.11b ,Right Cheek, Low

Type: Phone measurement (Very fast, 11 points in the volume)

Date of measurement: 04/08/2014

Measurement duration: 7 minutes 21 seconds

Mobile Phone IMEI number: --


A. Experimental conditions.

Area Scan	dx=8mm dy=8mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast
Phantom	Right head
Device Position	Cheek
Band	IEEE 802.11b ISM
Channels	1
Signal	DSSS (Crest factor: 1:1)


B. SAR Measurement Results

Frequency (MHz)	2412
Relative permittivity (real part)	38.99
Relative permittivity (imaginary part)	13.19
Conductivity (S/m)	1.81
Variation (%)	4.060000
ConvF:	4.81

SURFACE SAR

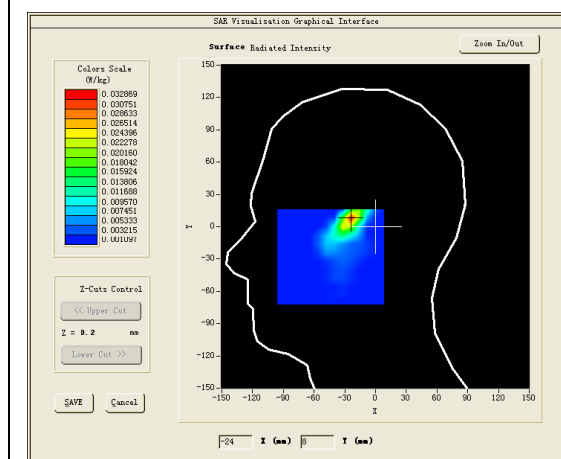


VOLUME SAR

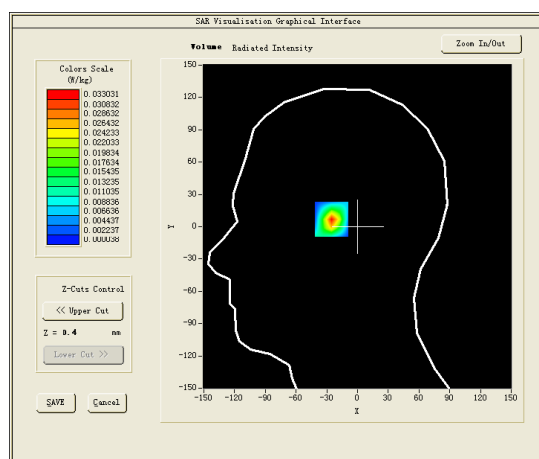


Maximum location: X=-24.00, Y=8.00

SAR 10g (W/Kg)	0.011458
SAR 1g (W/Kg)	0.029436


Z axis scan

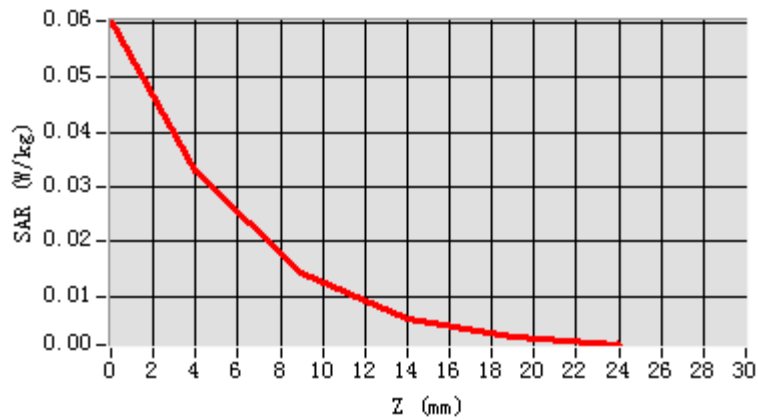

3D screen shot

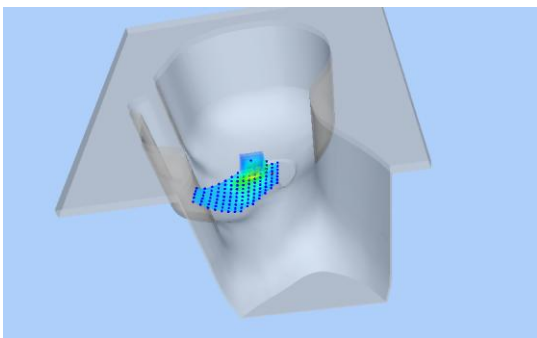

Hot spot position

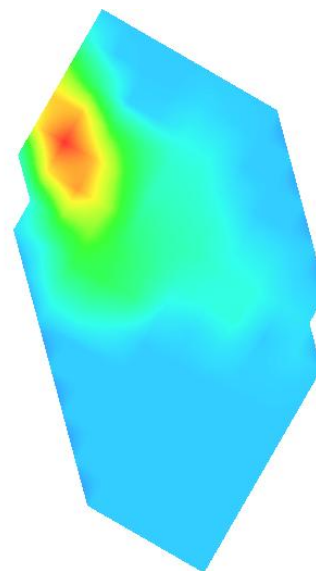

Wi-Fi 802.11b , Back, Middle

Type: Phone measurement (Very fast, 11 points in the volume)

Date of measurement: 05/08/2014

Measurement duration: 7 minutes 11 seconds

Mobile Phone IMEI number: --


A. Experimental conditions.

Area Scan	dx=8mm dy=8mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast
Phantom	Validation plane
Device Position	Back
Band	IEEE 802.11b ISM
Channels	1
Signal	DSSS (Crest factor: 1:1)


B. SAR Measurement Results

Frequency (MHz)	2412
Relative permittivity (real part)	52.65
Relative permittivity (imaginary part)	13.02
Conductivity (S/m)	1.96
Variation (%)	0.230000
ConvF:	4.91

SURFACE SAR

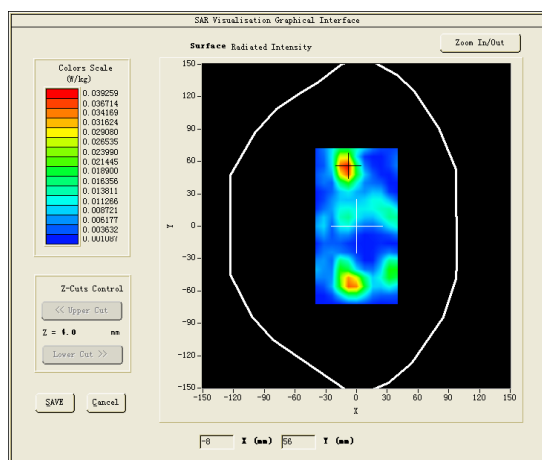


VOLUME SAR

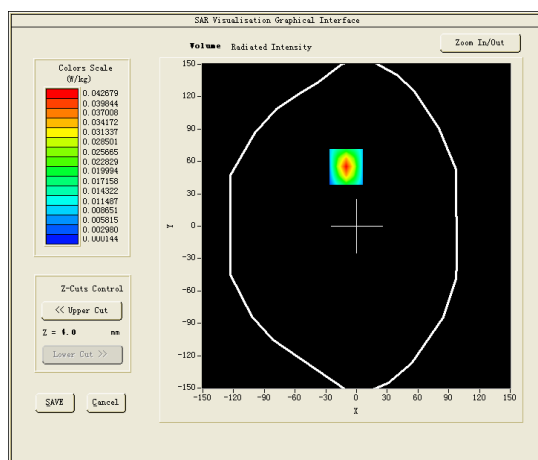


Maximum location: X=-10.00, Y=55.00

SAR 10g (W/Kg)	0.018467
SAR 1g (W/Kg)	0.041356


Z axis scan

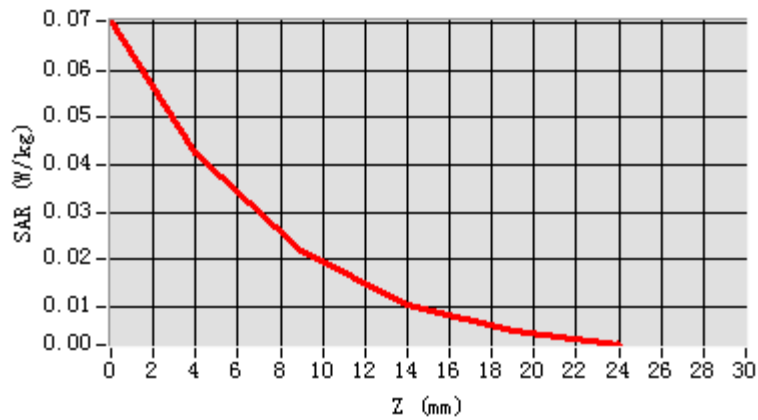

3D screen shot

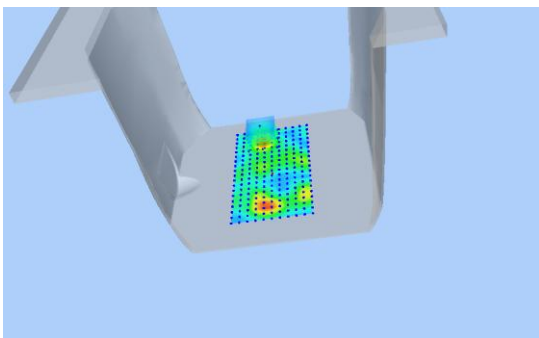

Hot spot position

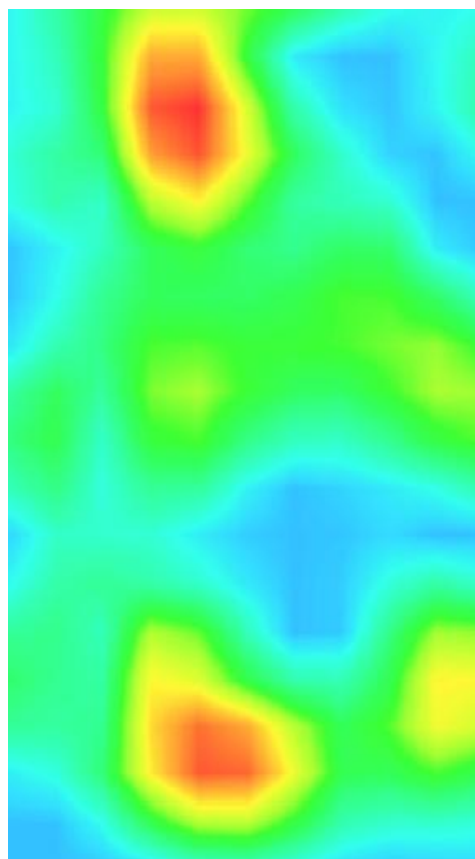

ANNEX E

of

CCIC-SET

CONFORMANCE TEST REPORT FOR

HUMAN EXPOSURE TO ELECTROMAGNETIC FIELDS

SET2014-08311

Mobile phone

Type Name: innos i7,MN8 Wingtip

Hardware Version: V1.0

Software Version: I7A_Nexlink_S_v1.0

Calibration Certificate of Probe and Dipoles

This Annex consists of 45 pages

Date of Report: 2014-08-14

Probe Calibration Certificate**COMOSAR E-Field Probe Calibration Report**

Ref : ACR.96.2.14.SATU.A

**CCIC SOUTHERN ELECTRONIC PRODUCT
TESTING (SHENZHEN) Co., Ltd**
ELECTRONIC TESTING BUILDING, SHAHE ROAD, XILI
TOWN, SHENZHEN, P.R. CHINA (POST CODE:518055)
SATIMO COMOSAR DOSIMETRIC E-FIELD PROBE
SERIAL NO.: SN 09/13 EP169

Calibrated at SATIMO US
2105 Barrett Park Dr. - Kennesaw, GA 30144



04/05/14

Summary:

This document presents the method and results from an accredited COMOSAR Dosimetric E-Field Probe calibration performed in SATIMO USA using the CALISAR / CALIBAIR test bench, for use with a SATIMO COMOSAR system only. All calibration results are traceable to national metrology institutions.



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.96.2.14.SATU.A

	Name	Function	Date	Signature
Prepared by :	Jérôme LUC	Product Manager	04/05/2014	<i>JS</i>
Checked by :	Jérôme LUC	Product Manager	04/05/2014	<i>JS</i>
Approved by :	Kim RUTKOWSKI	Quality Manager	04/08/2014	<i>Kim Rutkowski</i>

	Customer Name
Distribution :	CCIC Southern Electronic Product Testing (Shenzhen) Co., Ltd

Issue	Date	Modifications
A	04/08/2014	Initial release

Page: 2/10

This document shall not be reproduced, except in full or in part, without the written approval of SATIMO.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of SATIMO.



TABLE OF CONTENTS

1	Device Under Test	4
2	Product Description	4
2.1	General Information	4
3	Measurement Method	4
3.1	Linearity	4
3.2	Sensitivity	5
3.3	Lower Detection Limit	5
3.4	Isotropy	5
3.5	Boundary Effect	5
4	Measurement Uncertainty	5
5	Calibration Measurement Results	6
5.1	Sensitivity in air	6
5.2	Linearity	7
5.3	Sensitivity in liquid	7
5.4	Isotropy	8
6	List of Equipment	10

Page: 3/10

*This document shall not be reproduced, except in full or in part, without the written approval of SATIMO.
The information contained herein is to be used only for the purpose for which it is submitted and is not to
be released in whole or part without written approval of SATIMO.*



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR-96.2.14.SATUA

1 DEVICE UNDER TEST

Device Under Test	
Device Type	COMOSAR DOSIMETRIC E FIELD PROBE
Manufacturer	Satimo
Model	SSE5
Serial Number	SN 09/13 EP169
Product Condition (new / used)	new
Frequency Range of Probe	0.7 GHz-3GHz
Resistance of Three Dipoles at Connector	Dipole 1: R1=0.223 MΩ Dipole 2: R2=0.233 MΩ Dipole 3: R3=0.222 MΩ

A yearly calibration interval is recommended.

2 PRODUCT DESCRIPTION

2.1 GENERAL INFORMATION

Satimo's COMOSAR E field Probes are built in accordance to the IEEE 1528, OET 65 Bulletin C and CEI/IEC 62209 standards.



Figure 1 – Satimo COMOSAR Dosimetric E field Dipole

Probe Length	330 mm
Length of Individual Dipoles	4.5 mm
Maximum external diameter	8 mm
Probe Tip External Diameter	5 mm
Distance between dipoles / probe extremity	2.7 mm

3 MEASUREMENT METHOD

The IEEE 1528, OET 65 Bulletin C, CENELEC EN50361 and CEI/IEC 62209 standards provide recommended practices for the probe calibrations, including the performance characteristics of interest and methods by which to assess their affect. All calibrations / measurements performed meet the fore mentioned standards.

3.1 LINEARITY

The evaluation of the linearity was done in free space using the waveguide, performing a power sweep to cover the SAR range 0.01W/kg to 100W/kg.

Page: 4/10

*This document shall not be reproduced, except in full or in part, without the written approval of SATIMO.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of SATIMO.*



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.96.2.14.SATU.A

3.2 SENSITIVITY

The sensitivity factors of the three dipoles were determined using a two step calibration method (air and tissue simulating liquid) using waveguides as outlined in the standards.

3.3 LOWER DETECTION LIMIT

The lower detection limit was assessed using the same measurement set up as used for the linearity measurement. The required lower detection limit is 10 mW/kg.

3.4 ISOTROPY

The axial isotropy was evaluated by exposing the probe to a reference wave from a standard dipole with the dipole mounted under the flat phantom in the test configuration suggested for system validations and checks. The probe was rotated along its main axis from 0 - 360 degrees in 15 degree steps. The hemispherical isotropy is determined by inserting the probe in a thin plastic box filled with tissue-equivalent liquid, with the plastic box illuminated with the fields from a half wave dipole. The dipole is rotated about its axis (0°–180°) in 15° increments. At each step the probe is rotated about its axis (0°–360°).

3.5 BOUNDARY EFFECT

The boundary effect is defined as the deviation between the SAR measured data and the expected exponential decay in the liquid when the probe is oriented normal to the interface. To evaluate this effect, the liquid filled flat phantom is exposed to fields from either a reference dipole or waveguide. With the probe normal to the phantom surface, the peak spatial average SAR is measured and compared to the analytical value at the surface.

4 MEASUREMENT UNCERTAINTY

The guidelines outlined in the IEEE 1528, OET 65 Bulletin C, CENELEC EN50361 and CEI/IEC 62209 standards were followed to generate the measurement uncertainty associated with an E-field probe calibration using the waveguide technique. All uncertainties listed below represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$, traceable to the Internationally Accepted Guides to Measurement Uncertainty.

Uncertainty analysis of the probe calibration in waveguide					
ERROR SOURCES	Uncertainty value (%)	Probability Distribution	Divisor	ci	Standard Uncertainty (%)
Incident or forward power	3.00%	Rectangular	$\sqrt{3}$	1	1.733%
Reflected power	3.00%	Rectangular	$\sqrt{3}$	1	1.733%
Liquid conductivity	5.00%	Rectangular	$\sqrt{3}$	1	2.886%
Liquid permittivity	4.00%	Rectangular	$\sqrt{3}$	1	2.310%
Field homogeneity	3.00%	Rectangular	$\sqrt{3}$	1	1.733%
Field probe positioning	5.00%	Rectangular	$\sqrt{3}$	1	2.886%
Field probe linearity	3.00%	Rectangular	$\sqrt{3}$	1	1.733%

Page: 5/10

This document shall not be reproduced, except in full or in part, without the written approval of SATIMO.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of SATIMO.



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.96.2.14.SATU.A

Combined standard uncertainty					5.832%
Expanded uncertainty 95 % confidence level k = 2					12.1%

5 CALIBRATION MEASUREMENT RESULTS

Calibration Parameters	
Liquid Temperature	23 °C
Lab Temperature	23 °C
Lab Humidity	58 %

5.1 SENSITIVITY IN AIR


Normx dipole 1 ($\mu\text{V}/(\text{V}/\text{m})^2$)	Normy dipole 2 ($\mu\text{V}/(\text{V}/\text{m})^2$)	Normz dipole 3 ($\mu\text{V}/(\text{V}/\text{m})^2$)
7.23	6.10	5.74

DCP dipole 1 (mV)	DCP dipole 2 (mV)	DCP dipole 3 (mV)
93.2	93.1	90.2

Calibration curves $e_i=f(V)$ ($i=1,2,3$) allow to obtain H-field value using the formula:

$$E = \sqrt{E_1^2 + E_2^2 + E_3^2}$$

Calibration curves

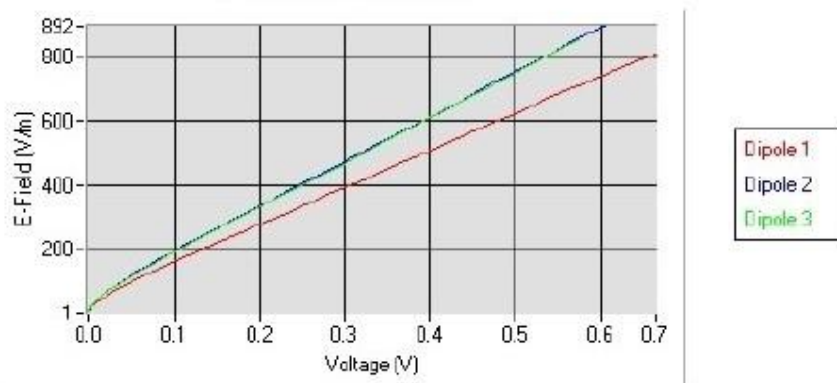

Page: 6/10


This document shall not be reproduced, except in full or in part, without the written approval of SATIMO.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of SATIMO.



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.96.2.14.SATU.A

5.2 LINEARITY

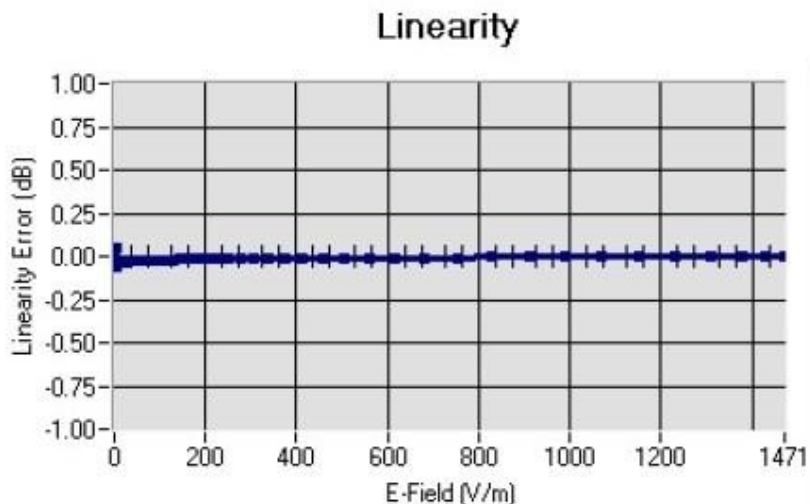

Linearity: $\pm 1.42\%$ ($\pm 0.06\text{dB}$)

5.3 SENSITIVITY IN LIQUID

Liquid	Frequency (MHz $\pm$ 100MHz)	Permittivity	Epsilon (S/m)	ConvF
HL850	835	42.56	0.87	5.51
BL850	835	55.26	0.97	5.68
HL900	900	41.79	0.97	5.20
BL900	900	55.98	1.05	5.33
HL1800	1750	40.17	1.39	4.80
BL1800	1750	52.05	1.49	4.94
HL1900	1880	39.80	1.45	5.49
BL1900	1880	52.55	1.52	5.65
HL2000	1950	38.93	1.42	4.80
BL2000	1950	53.12	1.50	5.02
HL2450	2450	38.64	1.83	4.81
BL2450	2450	52.02	1.95	4.91

LOWER DETECTION LIMIT: 9mW/kg

Page: 7/10

*This document shall not be reproduced, except in full or in part, without the written approval of SATIMO.
The information contained herein is to be used only for the purpose for which it is submitted and is not to
be released in whole or part without written approval of SATIMO.*