



Radio Test Report

FCC ID: DIJGFZM-T5321

This report concerns (check one) : Original Grant Class I Change

Issued Date : Apr. 22, 2010

Project No. : R1004002

Equipment : ZigBee

Model Name : GFZM-T5321

Applicant : Galaxy Far East Corp.

Address : 14F, 207-5, Sec3, Peihsin Rd., Hsintien,
Taipei County 231, Taiwan, R.O.C.

Tested by: Neutron Engineering Inc. EMC Laboratory

Date of Receipt: Apr. 02, 2010

Date of Test: Apr. 02, 2010 ~ Apr. 14, 2010

Testing Engineer

: Rush Kao
(Rush Kao)

Technical Manager

: Jeff Yang
(Jeff Yang)

Authorized Signatory

: Andy Chiu
(Andy Chiu)

Neutron Engineering Inc.

B1, No. 37, Lane 365, YangGuang St.,

NeiHu District 114, Taipei, Taiwan.

TEL: +886-2-2657-3299

FAX: +886-2-2657-3331





Declaration

Neutron represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with the standards traceable to National Measurement Laboratory (**NML**) of **R.O.C.**, or National Institute of Standards and Technology (**NIST**) of **U.S.A.**

Neutron's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **Neutron** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **Neutron** issued reports.

Neutron's reports must not be used by the client to claim product endorsement by the authorities or any agency of the Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **Neutron-self**, extracts from the test report shall not be reproduced except in full with **Neutron**'s authorized written approval.

Neutron's laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.



Table of Contents	Page
1 . CERTIFICATION	5
2 . SUMMARY OF TEST RESULTS	6
2.1 TEST FACILITY	7
2.2 MEASUREMENT UNCERTAINTY	7
3 . GENERAL INFORMATION	8
3.1 GENERAL DESCRIPTION OF EUT	8
3.2 DESCRIPTION OF TEST MODES	9
3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF RADIATED EMISSION TESTED	10
3.4 DESCRIPTION OF SUPPORT UNITS	11
4 . EMC EMISSION TEST	12
4.1 RADIATED EMISSION MEASUREMENT	12
4.1.1 RADIATED EMISSION LIMITS	12
4.1.2 MEASUREMENT INSTRUMENTS LIST	13
4.1.3 TEST PROCEDURE	13
4.1.4 DEVIATION FROM TEST STANDARD	13
4.1.5 TEST SETUP	14
4.1.6 EUT OPERATING CONDITIONS	14
4.1.7 TEST RESULTS-BETWEEN 30MHz – 1000MHz	15
4.1.8 TEST RESULTS-ABOVE 1000MHz	17
4.1.9 TEST RESULTS-RESTRICTED BANDS REQUIREMENTS	29
5 . BANDWIDTH TEST	33
5.1 APPLIED PROCEDURES / LIMIT	33
5.1.1 MEASUREMENT INSTRUMENTS LIST	33
5.1.2 TEST PROCEDURE	33
5.1.3 DEVIATION FROM STANDARD	33
5.1.4 TEST SETUP	33
5.1.5 EUT OPERATION CONDITIONS	33
5.1.6 TEST RESULTS	34
6 . PEAK OUTPUT POWER TEST	36
6.1 APPLIED PROCEDURES / LIMIT	36
6.1.1 MEASUREMENT INSTRUMENTS LIST	36
6.1.2 TEST PROCEDURE	36
6.1.3 DEVIATION FROM STANDARD	36
6.1.4 TEST SETUP	36



Table of Contents	Page
6.1.5 EUT OPERATION CONDITIONS	36
6.1.6 TEST RESULTS	37
7 . ANTENNA CONDUCTED SPURIOUS EMISSION	38
7.1 APPLIED PROCEDURES / LIMIT	38
7.1.1 MEASUREMENT INSTRUMENTS LIST	38
7.1.2 TEST PROCEDURE	38
7.1.3 DEVIATION FROM STANDARD	38
7.1.4 TEST SETUP	38
7.1.5 EUT OPERATION CONDITIONS	38
7.1.6 TEST RESULTS	39
8 . POWER SPECTRAL DENSITY TEST	41
8.1 APPLIED PROCEDURES / LIMIT	41
8.1.1 MEASUREMENT INSTRUMENTS LIST	41
8.1.2 TEST PROCEDURE	41
8.1.3 DEVIATION FROM STANDARD	41
8.1.4 TEST SETUP	41
8.1.5 EUT OPERATION CONDITIONS	41
8.1.6 TEST RESULTS	42
9 . RF EXPOSURE TEST	44
9.1 APPLIED PROCEDURES / LIMIT	44
9.1.1 MEASUREMENT INSTRUMENTS LIST	44
9.1.2 MPE CALCULATION METHOD	44
9.1.3 DEVIATION FROM STANDARD	45
9.1.4 TEST SETUP	45
9.1.5 EUT OPERATION CONDITIONS	45
9.1.6 TEST RESULTS	45
10 . EUT TEST PHOTO	46



1. CERTIFICATION

Equipment: ZigBee

Brand Name: GFEC

Model No.: GFZM-T5321

Applicant: Galaxy Far East Corp.

Date of Test: Apr. 02, 2010 ~ Apr. 14, 2010

Test Item: ENGINEERING SAMPLE

Standards: FCC Part15, Subpart C(15.247) / ANCI C63.4 : 2003

The above equipment has been tested and found compliance with the requirement of the relative standards by Neutron Engineering Inc. EMC Laboratory.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. NEI-FCCP-1-R1004002) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of NVLAP and TAF according to the ISO-17025 quality assessment standard and technical standard(s).



2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15, Subpart C			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	N/A	
15.247 (c)	Antenna conducted Spurious Emission	PASS	
15.247 (a)(2)	6dB Bandwidth	PASS	
15.247 (b)	Peak Output Power	PASS	
15.247 (c)	Radiated Spurious Emission	PASS	
15.247 (d)	Power Spectral Density	PASS	
15.203	Antenna Requirement	PASS	
1.1307 1.1310 2.1091 2.1093	RF Exposure Compliance	PASS	

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report



2.1 TEST FACILITY

The test facilities used to collect the test data in this report is **CB08 (FCC R.N.: 95335)** at the location of 1F., No. 61, Ln. 77, Sing-ai Rd., Neihu Dist., Taipei City 114, Taiwan (R.O.C.) Neutron's test firm number is 95335

2.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty **U** is based on a standard uncertainty multiplied by a coverage factor of **k=2** , providing a level of confidence of approximately **95 %** .

A. Conducted Measurement :

Test Site	Method	Measurement Frequency Range	U , (dB)	NOTE
C01	ANSI	150 KHz ~ 30MHz	1.94	

B. Radiated Measurement :

Test Site	Method	Measurement Frequency Range	Ant. H / V	U , (dB)	NOTE
OS-01	ANSI	30MHz ~ 200MHz	V	2.86	
		30MHz ~ 200MHz	H	2.56	
		200MHz ~ 1,000MHz	V	2.88	
		200MHz ~ 1,000MHz	H	2.98	
OS-02	ANSI	30MHz ~ 200MHz	V	2.48	
		30MHz ~ 200MHz	H	2.16	
		200MHz ~ 1,000MHz	V	2.50	
		200MHz ~ 1,000MHz	H	2.66	



3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	ZigBee												
Brand Name	GFEC												
Model No.	GFZM-T5321												
OEM Brand/Model No.	N/A												
Model Difference	N/A												
Product Description	<p>The EUT is a ZigBee.</p> <table border="1"><tr><td>Operation Frequency:</td><td>2405~2475MHz</td></tr><tr><td>Modulation Type:</td><td>O-QPSK</td></tr><tr><td>Number Of Channel</td><td>15CH</td></tr><tr><td>Antenna Designation:</td><td>Please refer to the Note 3.</td></tr><tr><td>Antenna Gain(Peak)</td><td>Please refer to the Note 3.</td></tr><tr><td>Output Power:</td><td>1.12dBm (Max.)</td></tr></table> <p>Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.</p>	Operation Frequency:	2405~2475MHz	Modulation Type:	O-QPSK	Number Of Channel	15CH	Antenna Designation:	Please refer to the Note 3.	Antenna Gain(Peak)	Please refer to the Note 3.	Output Power:	1.12dBm (Max.)
Operation Frequency:	2405~2475MHz												
Modulation Type:	O-QPSK												
Number Of Channel	15CH												
Antenna Designation:	Please refer to the Note 3.												
Antenna Gain(Peak)	Please refer to the Note 3.												
Output Power:	1.12dBm (Max.)												
Channel List	Please refer to the Note 2.												
Power Source	DC Voltage supplied from DC Power Supply.												
Power Rating	DC 3.3V												
Connecting I/O Port(s)	Please refer to the User's Manual												
Products Covered	NA												

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2.

Channel List					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2405	06	2430	11	2455
02	2410	07	2435	12	2460
03	2415	08	2440	13	2465
04	2420	09	2445	14	2470
05	2425	10	2450	15	2475

3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	ACX	AT7020-E3R0HBA	CHIP Antenna	N/A	1.3



3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.


Pretest Test Mode	Description
Mode 1	2405MHz
Mode 2	2440MHz
Mode 3	2475MHz

For Radiated Test (30 -1000MHz)	
Final Test Mode	Description
Mode 2	2440MHz

For Radiated Test (Above 1000MHz)	
Final Test Mode	Description
Mode 1	2405MHz
Mode 2	2440MHz
Mode 3	2475MHz



3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF RADIATED EMISSION TESTED

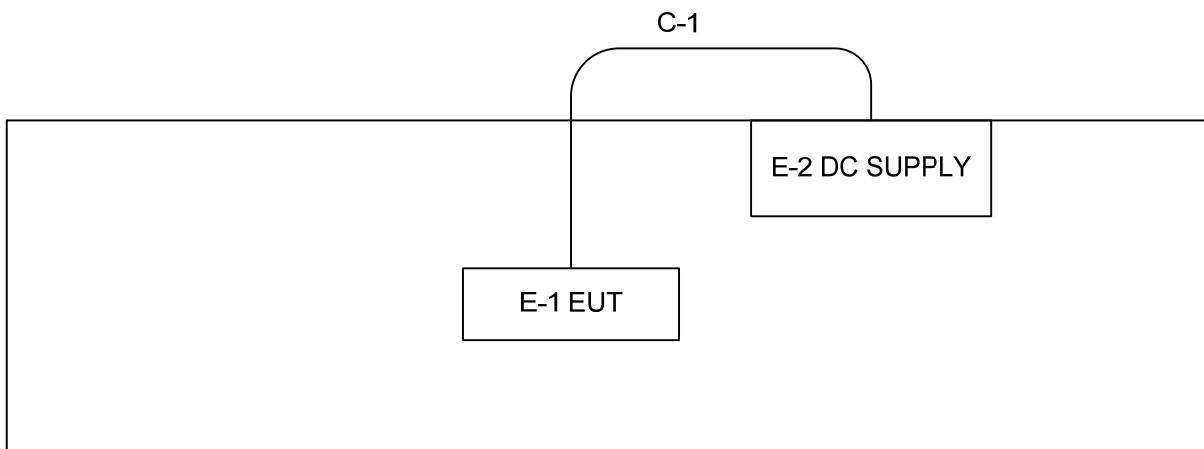

C-1 Power Cable



3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.	Note
E-1	ZigBee	GFEC	GFZM-T5321	DIJGFZM-T5321	N/A	EUT

Item	Shielded Type	Ferrite Core	Length	Note
	N/A	N/A	N/A	

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.



4. EMC EMISSION TEST

4.1 RADIATED EMISSION MEASUREMENT

4.1.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Class B (dBuV/m) (at 3m)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

**4.1.2 MEASUREMENT INSTRUMENTS LIST**

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP-40	100129	Sep. 10, 2010
2	Horn Antenna	Schwarzbeck	BBHA 9120 D	9120D-546	Mar. 18, 2011
3	Microwave Pre_amplifier	Agilent	8449B	3008A01714	Apr. 20, 2010
4	Microflex Cable	N/A	N/A	1m	May. 20, 2010
5	Microflex Cable	AISI	S104-SMAP-1	10m	Aug. 23, 2010
6	Microflex Cable	N/A	N/A	3m	Aug. 23, 2010
7	Test Cable	N/A	LMR-400	966_12m	Jun. 18, 2010
8	Test Cable	N/A	LMR-400	966_3m	Jun. 18, 2010
9	Pre-Amplifier	EMC	EMC-330	980001	Jun. 03, 2010
10	Log-Bicon Antenna	Schwarzbeck	VULB9168-35 2	9168-352	Jun. 17, 2010

Remark: " N/A" denotes No Model No. / Serial No. and No Calibration specified.

4.1.3 TEST PROCEDURE


- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3m meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.4 DEVIATION FROM TEST STANDARD


No deviation

4.1.5 TEST SETUP

(A) Radiated Emission Test Set-Up, Frequency Below 1000MHz

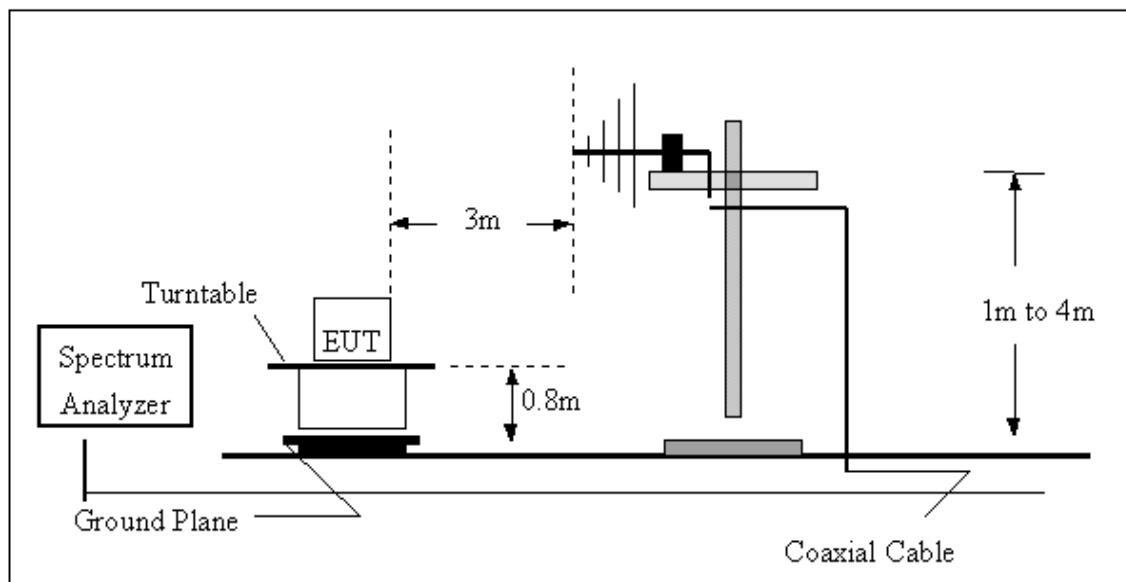

(B) Radiated Emission Test Set-Up Frequency Above 1 GHz

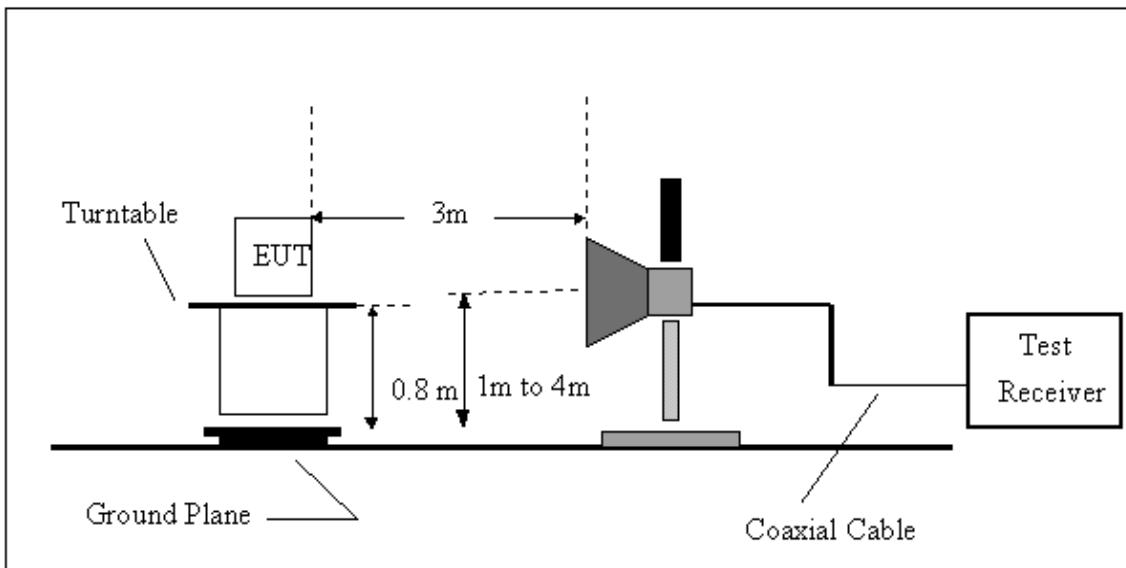

4.1.6 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operation condition was tested and used to collect the included data.


**4.1.7 TEST RESULTS-BETWEEN 30MHz – 1000MHz**

EUT :	ZigBee	Model No. :	GFZM-T5321
Temperature :	25 °C	Relative Humidity :	44%
Test Power :	DC 3.3V		
Test Mode :	2440MHz		

Freq. (MHz)	Ant. H/V	Reading(RA) (dBuV)	Corr.Factor(CF) (dB)	Measured(FS) (dBuV/m)	Limits(QP) (dBuV/m)	Margin (dB)	Note
113.42	V	39.59	-21.36	18.23	43.50	- 25.27	
189.08	V	43.12	-21.86	21.26	43.50	- 22.24	
243.40	V	38.75	-20.93	17.82	46.00	- 28.18	
352.04	V	40.44	-18.19	22.25	46.00	- 23.75	
458.74	V	34.76	-15.47	19.29	46.00	- 26.71	
513.06	V	34.06	-14.68	19.38	46.00	- 26.62	

Remark :

- (1) Reading in which marked as QP or Peak means measurements by using are Quasi-Peak Mode or Peak Mode with Detector BW=120KHz ; SPA setting in RBW=120KHz, VBW =120KHz, Swp. Time = 0.3 sec./MHz .
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform .
- (3) Measuring frequency range from 30MHz to 1000MHz .
- (4) If the peak scan value is under the limit for more than 20dB, the signal will not show in table .

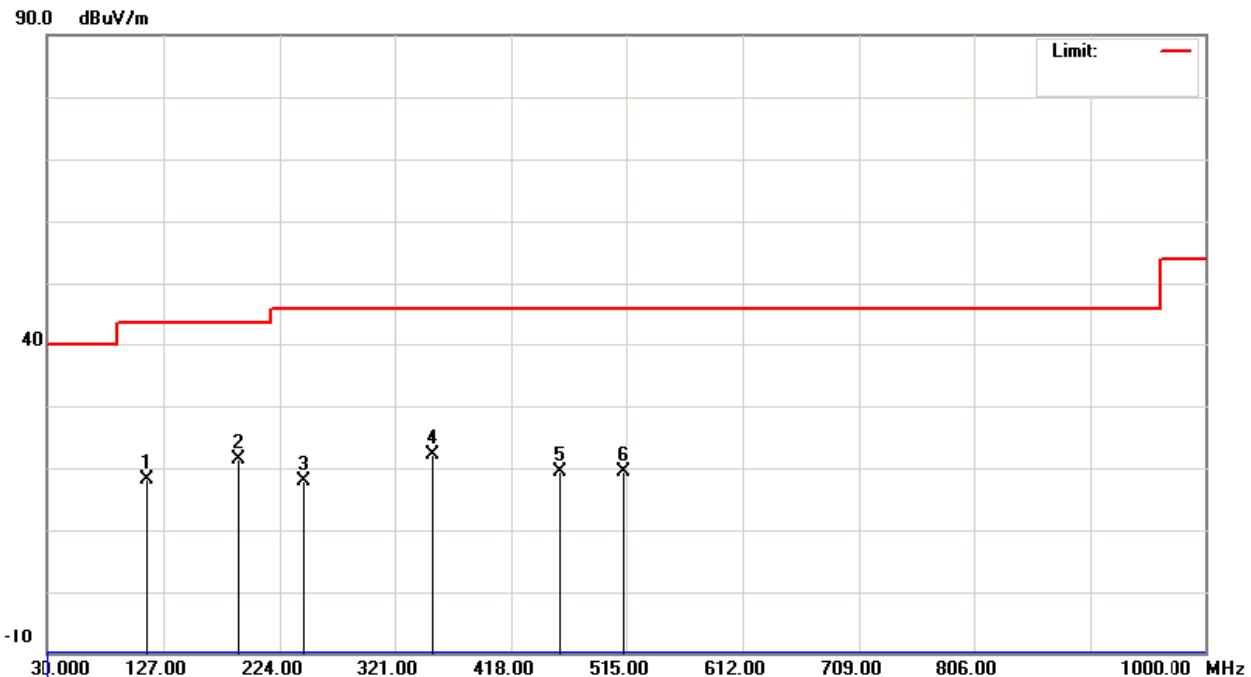




EUT :	ZigBee	Model No. :	GFZM-T5321
Temperature :	25 °C	Relative Humidity :	44%
Test Power :	DC 3.3V		
Test Mode :	2440MHz		

Freq. (MHz)	Ant. H/V	Reading(RA) (dBuV)	Corr.Factor(CF) (dB)	Measured(FS) (dBuV/m)	Limits(QP) (dBuV/m)	Margin (dB)	Note
159.98	H	31.36	-18.44	12.92	43.50	- 30.58	
295.78	H	33.49	-19.55	13.94	46.00	- 32.06	
423.82	H	31.78	-16.36	15.42	46.00	- 30.58	
540.22	H	31.32	-14.10	17.22	46.00	- 28.78	
703.18	H	32.12	-10.95	21.17	46.00	- 24.83	
862.26	H	31.35	-9.21	22.14	46.00	- 23.86	

Remark :

- (1) Reading in which marked as QP or Peak means measurements by using are Quasi-Peak Mode or Peak Mode with Detector BW=120KHz ; SPA setting in RBW=120KHz, VBW =120KHz, Swp. Time = 0.3 sec./MHz.
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz.
- (4) If the peak scan value is under the limit for more than 20dB, the signal will not show in table.

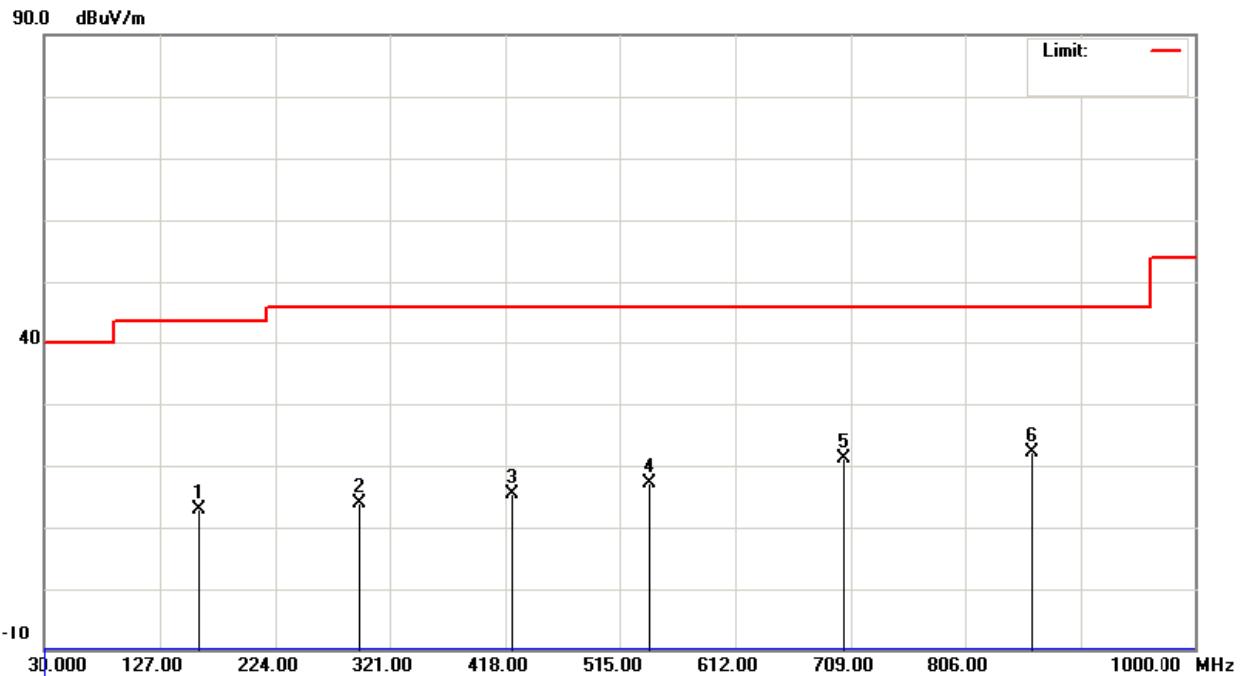

**4.1.8 TEST RESULTS-ABOVE 1000MHz**

EUT :	ZigBee	Model No. :	GFZM-T5321
Temperature :	25°C	Relative Humidity :	44%
Test Power :	DC 3.3V		
Test Mode :	2405MHz		

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
2390.00	V	24.26	11.91	32.38	56.64	44.29	74.00	54.00	X/E
2405.00	V	52.56	51.29	32.44	85.00	83.73			X/F
4811.00	V	56.03	47.81	4.41	60.44	52.22	74.00	54.00	X/H
7213.70	V	48.37	37.89	10.70	59.07	48.59	74.00	54.00	X/H



Remark :

- (1) Spectrum Setting :
QP: 30MHz – 1000MHz: RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms.
Peak: 1GHz- 25GHz: RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
AV: 1GHz- 25GHz: RBW= 1MHz, VBW= 10Hz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform ◦
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency◦“F” denotes fundamental frequency; “H” denotes spurious frequency. “E” denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission ◦
- (5) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
“X” - denotes Laid on Table ; “Y” - denotes Vertical Stand ; “Z” - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axes : X

2405MHz (Above 1000 MHz, Vertical)

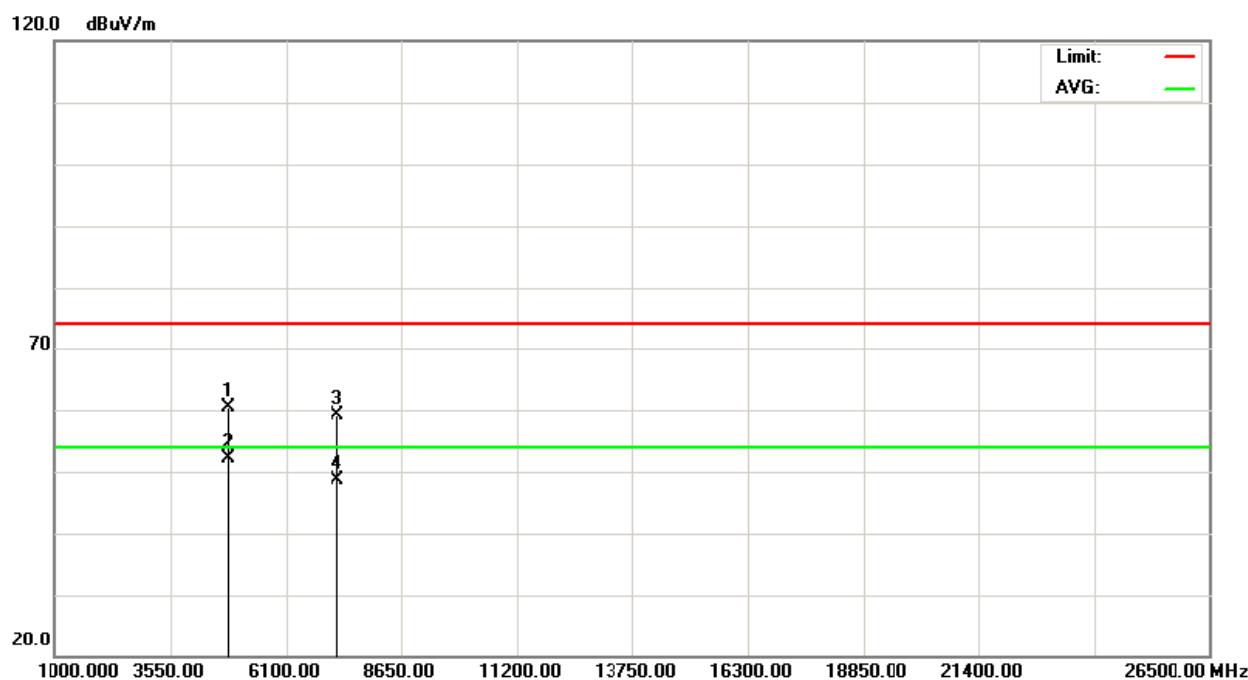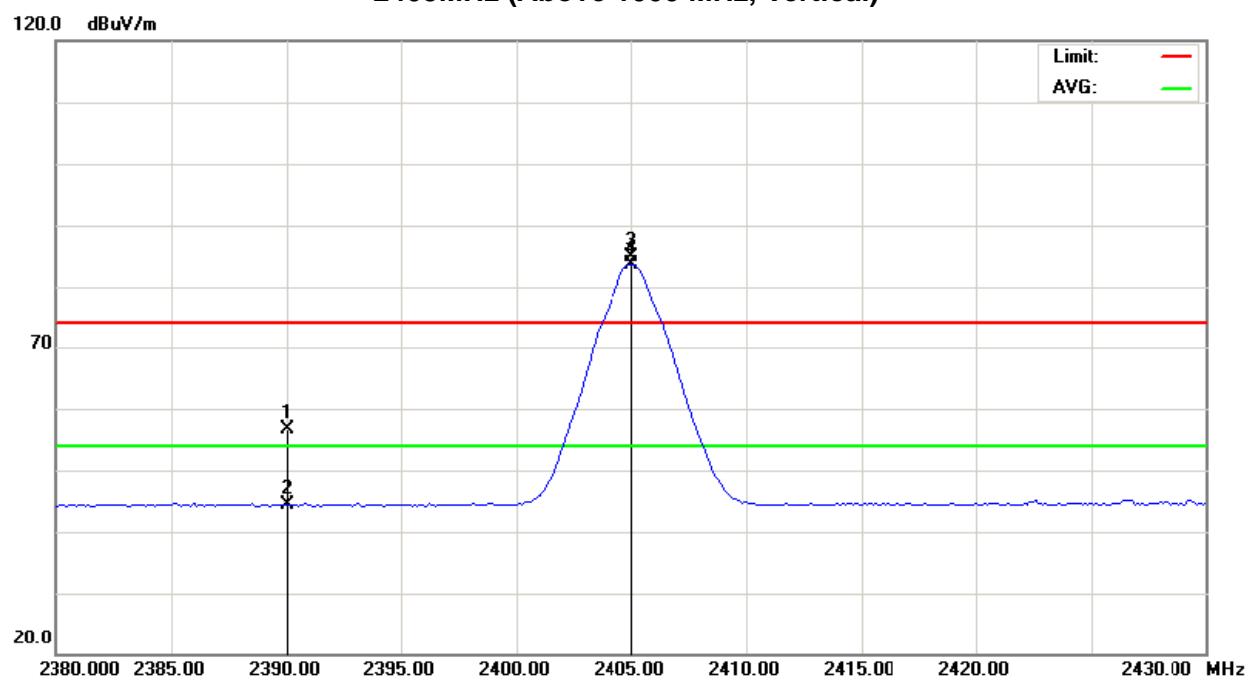



EUT :	ZigBee	Model No. :	GFZM-T5321
Temperature :	25 °C	Relative Humidity :	44%
Test Power :	DC 3.3V		
Test Mode :	2405MHz		

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
2390.00	H	23.08	11.89	32.38	55.46	44.27	74.00	54.00	X/E
2405.00	H	57.58	56.15	32.44	90.02	88.59			X/F
4810.82	H	52.83	45.10	4.41	57.24	49.51	74.00	54.00	X/H
7213.56	H	47.44	37.36	10.70	58.14	48.06	74.00	54.00	X/H



Remark :

- (1) Spectrum Setting :
QP: 30MHz – 1000MHz: RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms.
Peak: 1GHz- 25GHz: RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
AV: 1GHz- 25GHz: RBW= 1MHz, VBW= 10Hz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform .
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axes : X

2405MHz (Above 1000 MHz, Horizontal)

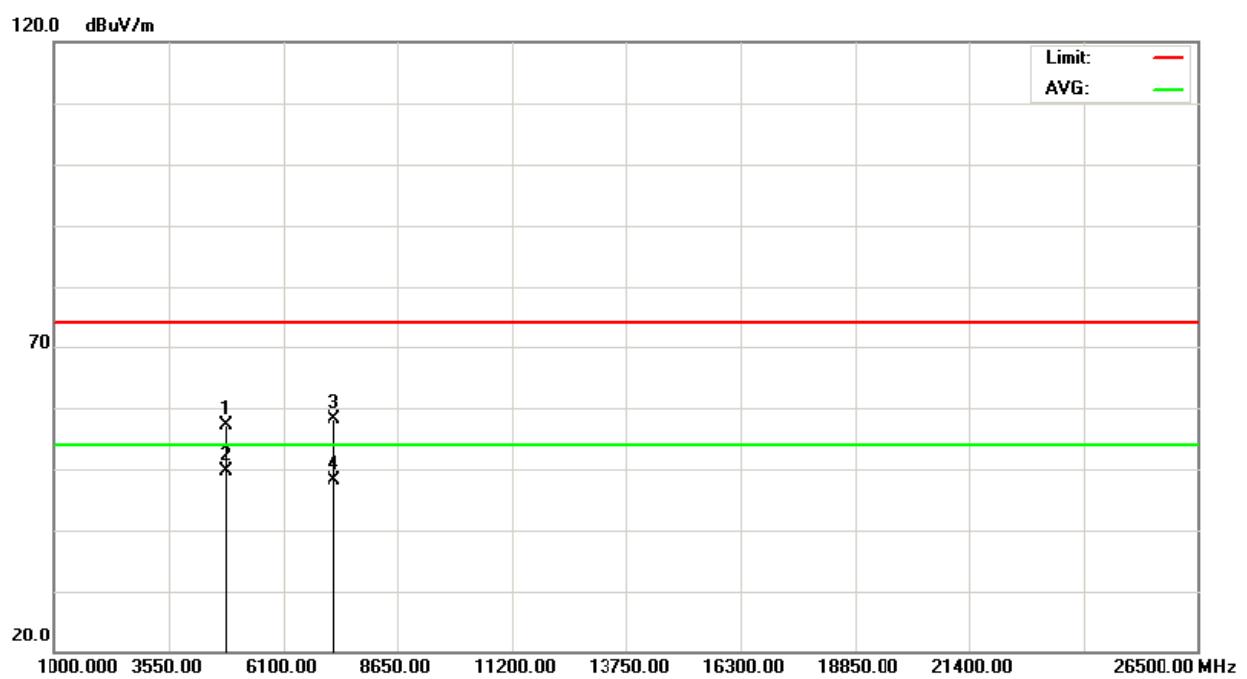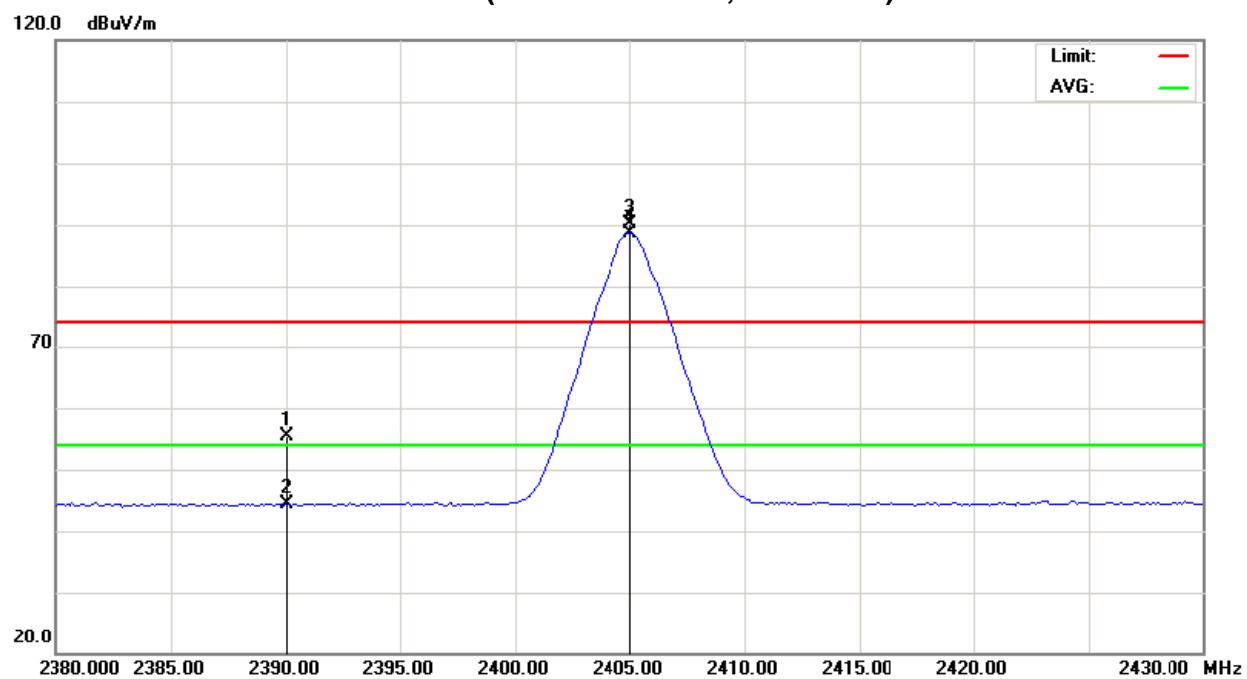



EUT :	ZigBee	Model No. :	GFZM-T5321
Temperature :	25 °C	Relative Humidity :	44%
Test Power :	DC 3.3V		
Test Mode :	2440MHz		

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
2440.00	V	52.96	51.36	32.57	85.53	83.93			X/F
4878.98	V	54.24	46.40	4.59	58.83	50.99	74.00	54.00	X/H
318.54	V	47.46	36.97	10.99	58.45	47.96	66.00	46.00	X/H



Remark :

- (1) Spectrum Setting :
QP: 30MHz – 1000MHz: RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms.
Peak: 1GHz- 25GHz: RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
AV: 1GHz- 25GHz: RBW= 1MHz, VBW= 10Hz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform .
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency . "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axes : X

2440MHz(Above 1000 MHz, Vertical)

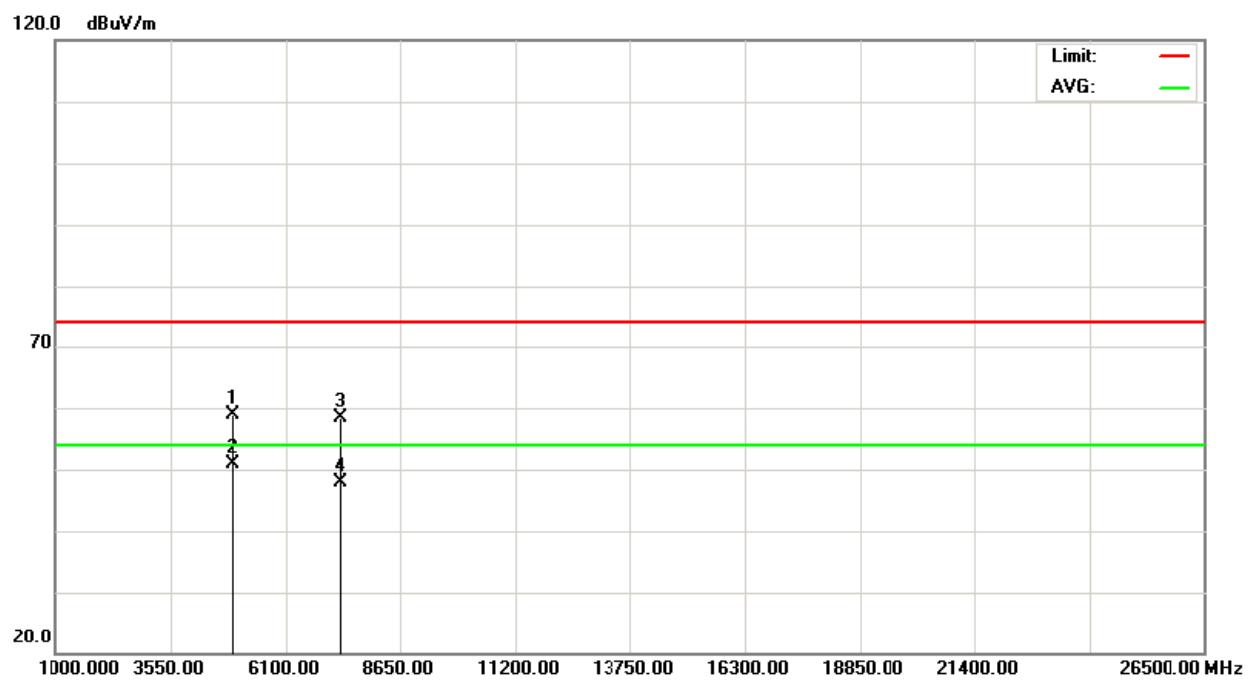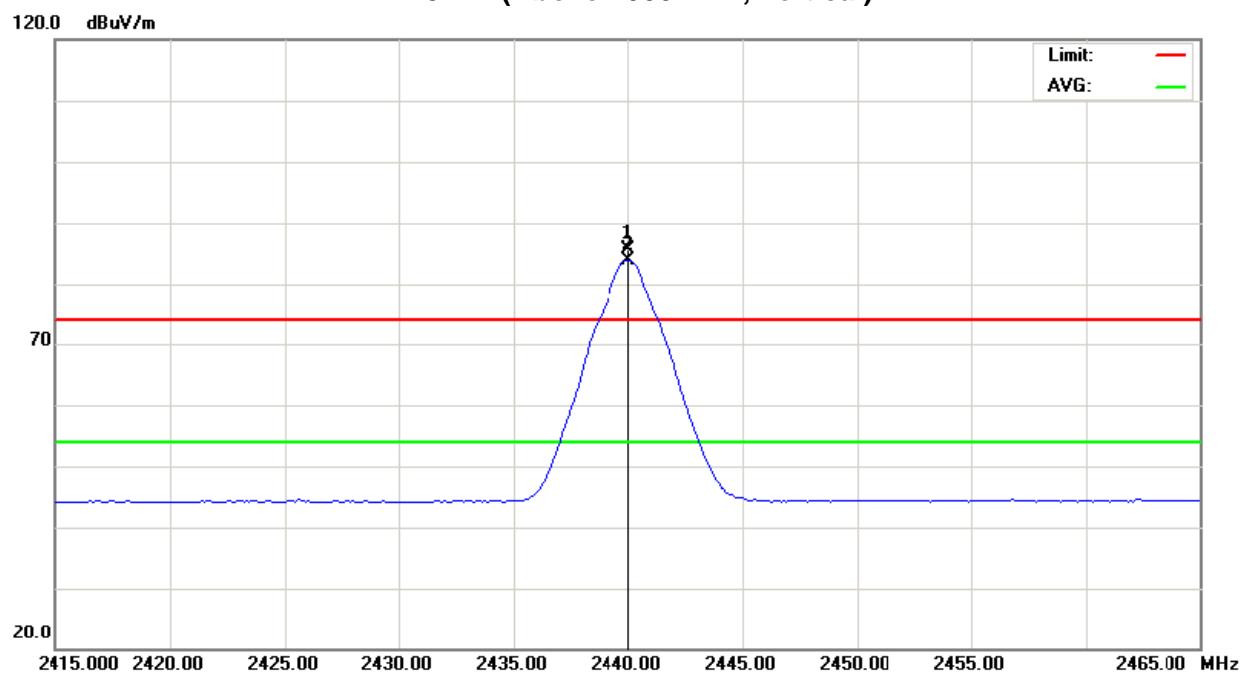



EUT :	ZigBee	Model No. :	GFZM-T5321
Temperature :	25 °C	Relative Humidity :	44%
Test Power :	DC 3.3V		
Test Mode :	2440MHz		

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
2440.00	H	58.74	57.21	32.57	91.31	89.78			X/F
4881.02	H	52.54	44.10	4.59	57.13	48.69	74.00	54.00	X/H
7318.38	H	46.15	35.21	10.99	57.14	46.20	74.00	54.00	X/H



Remark :

- (1) Spectrum Setting :
QP: 30MHz – 1000MHz: RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms.
Peak: 1GHz- 25GHz: RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
AV: 1GHz- 25GHz: RBW= 1MHz, VBW= 10Hz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform .
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axes : X

2440MHz(Above 1000 MHz, Horizontal)

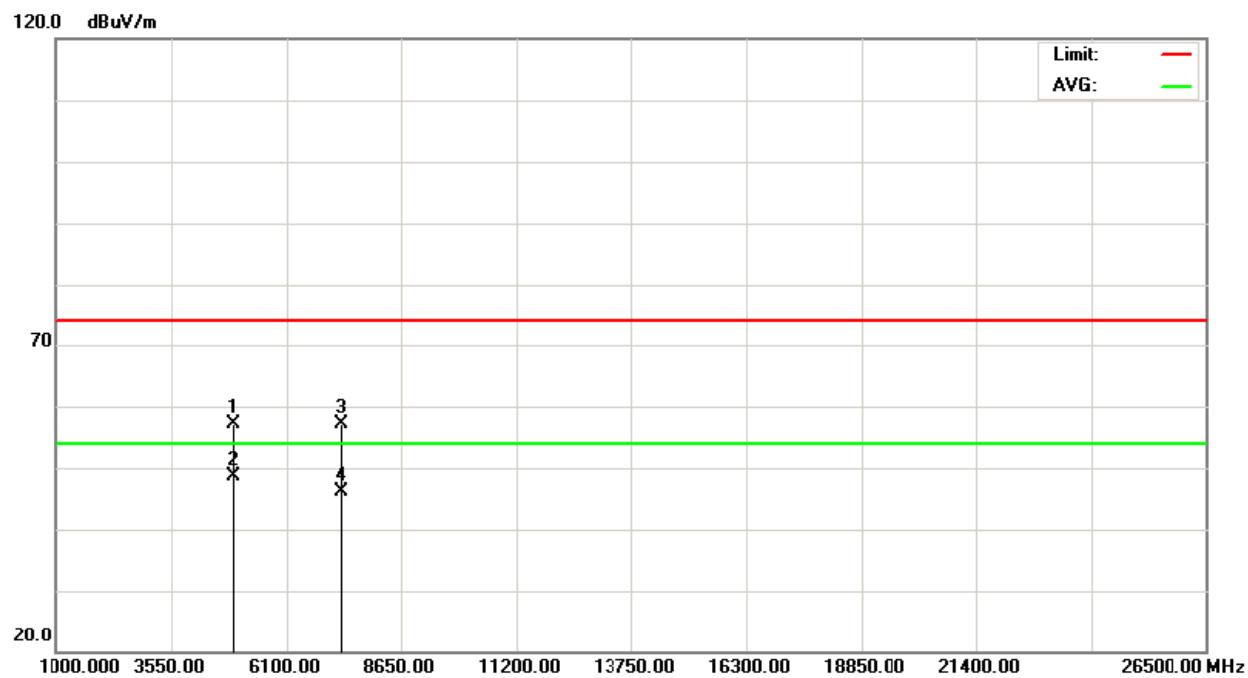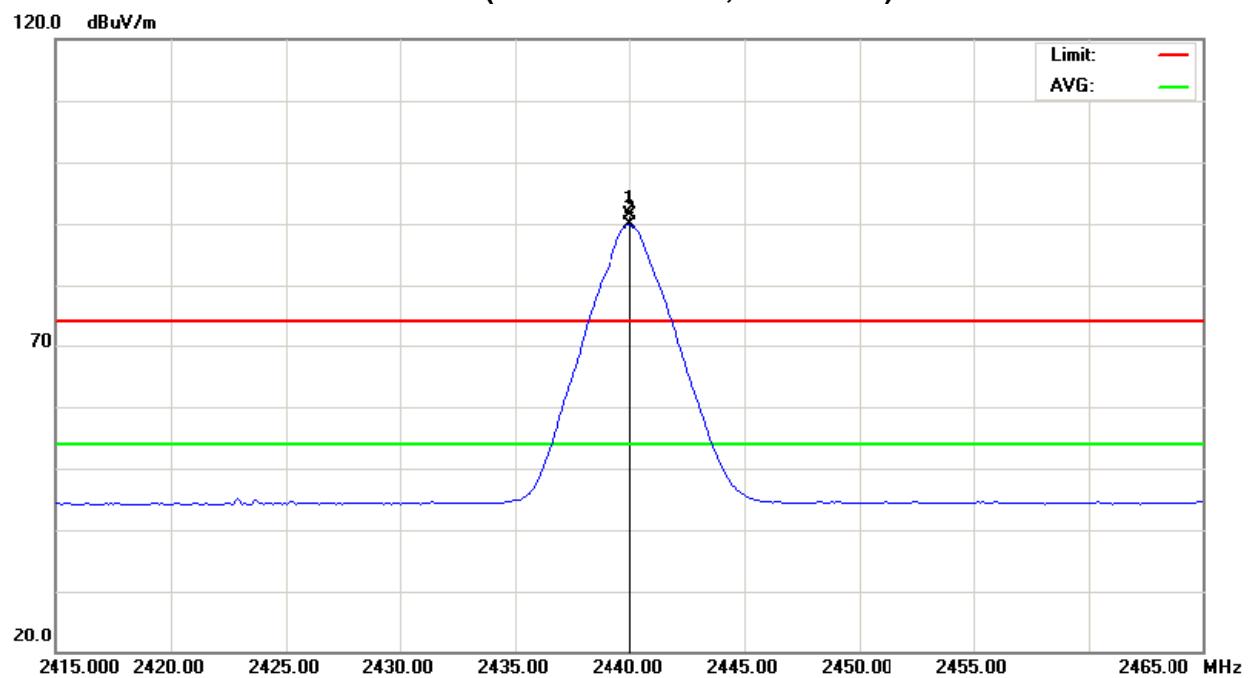



EUT :	ZigBee	Model No. :	GFZM-T5321
Temperature :	25 °C	Relative Humidity :	44%
Test Power :	DC 3.3V		
Test Mode :	2475MHz		

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
2475.00	V	54.68	53.15	32.70	87.38	85.85			X/F
2483.50	V	23.50	11.80	32.74	56.24	44.54	74.00	54.00	X/E
4950.92	V	50.17	41.24	4.77	54.94	46.01	74.00	54.00	X/H
7423.52	V	44.60	32.55	11.29	55.89	43.84	74.00	54.00	X/H



Remark :

- (1) Spectrum Setting :
QP: 30MHz – 1000MHz: RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms.
Peak: 1GHz- 25GHz: RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
AV: 1GHz- 25GHz: RBW= 1MHz, VBW= 10Hz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform .
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axes : X

2475MHz (Above 1000 MHz, Vertical)

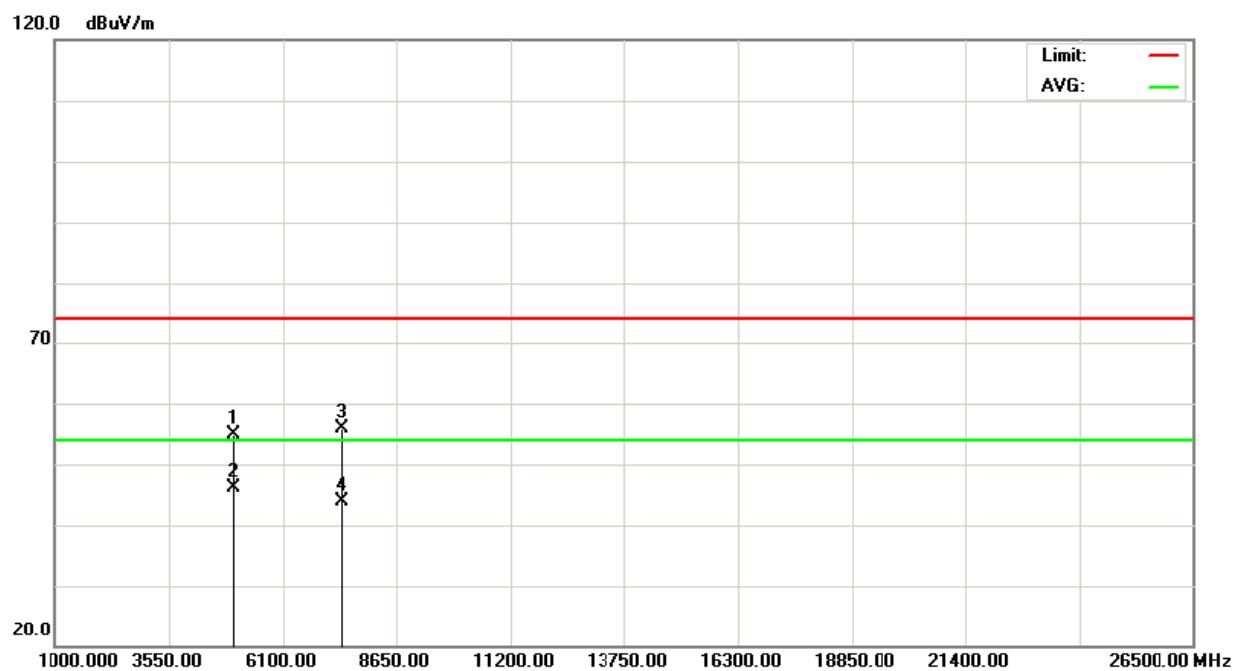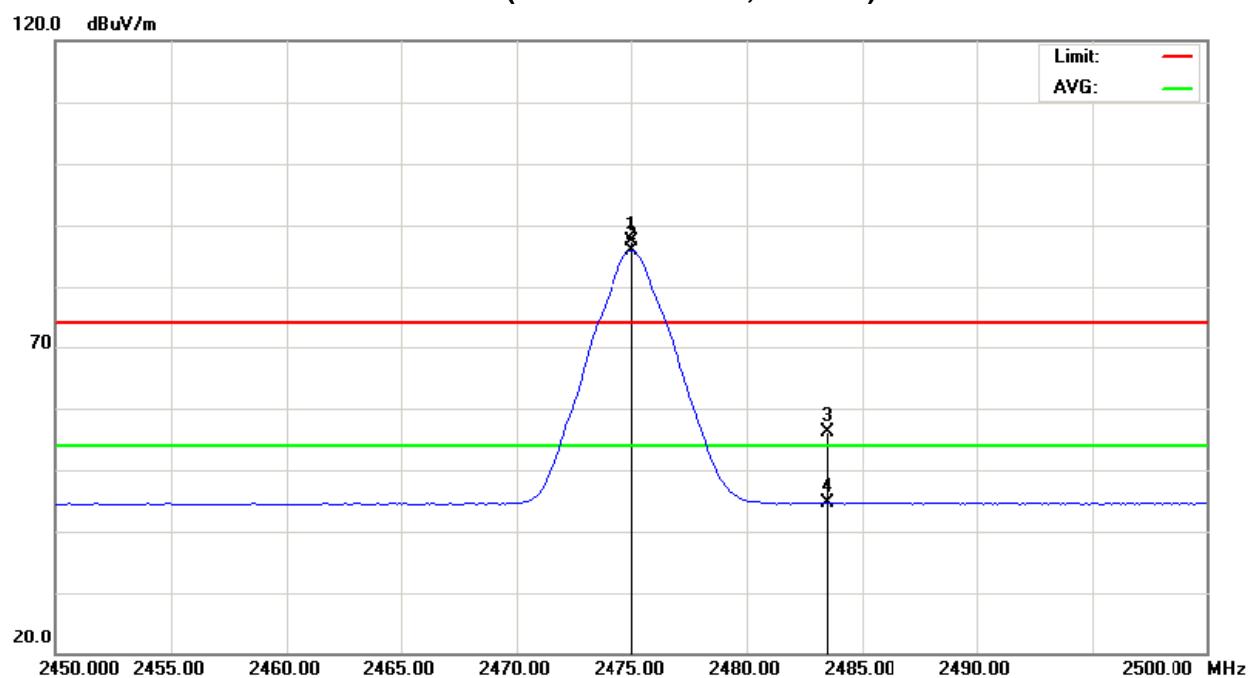



EUT :	ZigBee	Model No. :	GFZM-T5321
Temperature :	25 °C	Relative Humidity :	44%
Test Power :	DC 3.3V		
Test Mode :	2475MHz		

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
2475.00	H	56.85	55.43	32.70	89.55	88.13			X/F
2483.50	H	22.02	11.82	32.74	54.76	44.56	74.00	54.00	X/E
4949.06	H	48.81	38.85	4.77	53.58	43.62	74.00	54.00	X/H
7423.46	H	44.29	32.52	11.29	55.58	43.81	74.00	54.00	X/H



Remark :

- (1) Spectrum Setting :
QP: 30MHz – 1000MHz: RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms.
Peak: 1GHz- 25GHz: RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
AV: 1GHz- 25GHz: RBW= 1MHz, VBW= 10Hz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform .
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axes : X

2475MHz (Above 1000 MHz, Horizontal)

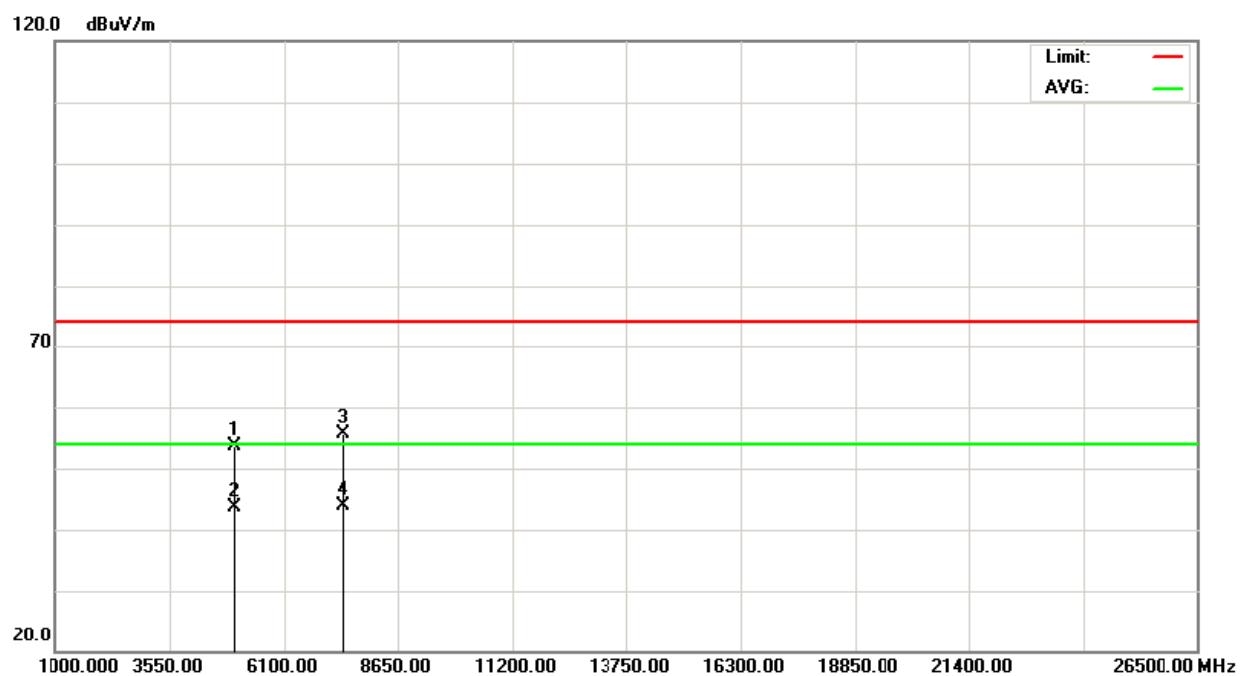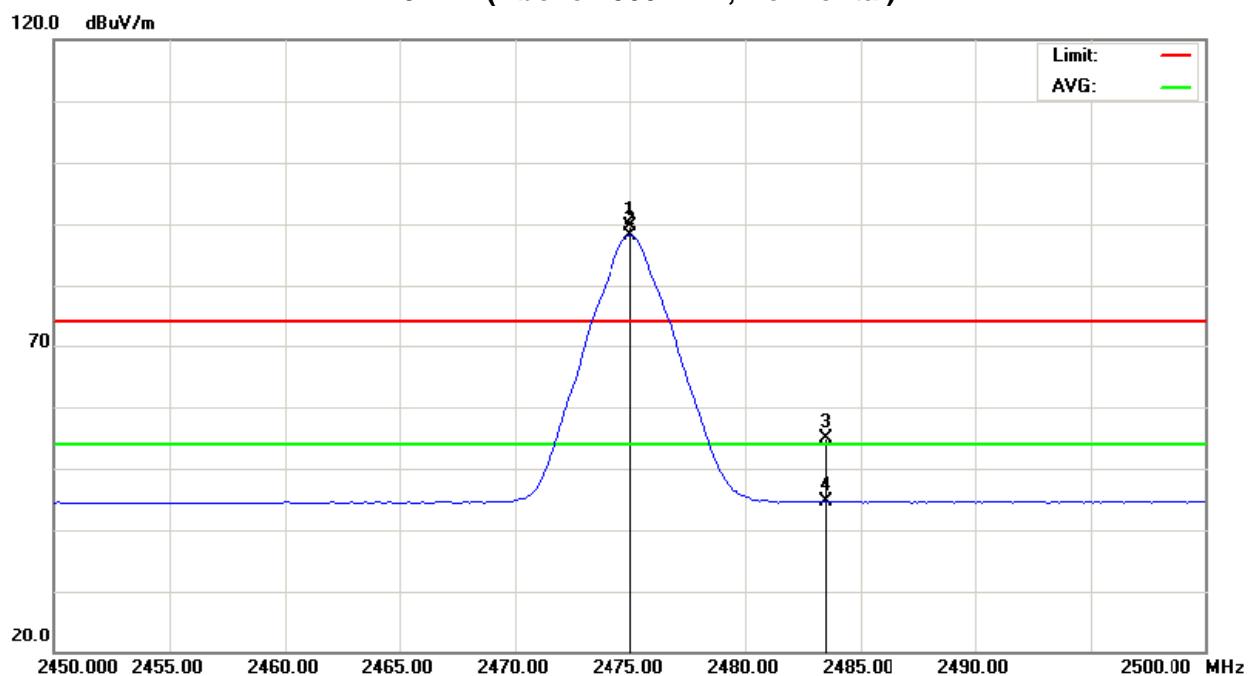

**4.1.9 TEST RESULTS-RESTRICTED BANDS REQUIREMENTS**

EUT :	ZigBee	Model No. :	GFZM-T5321
Temperature :	25 °C	Relative Humidity :	44%
Test Power :	DC 3.3V		
Test Mode :	TX CH 2405MHz/2475MHz(Vertical)		
Note :	<p>The emission of the carrier radiated field strength is measured for (Peak and AV) as following:</p> <ol style="list-style-type: none">1. The transmitter was then configured with the worst case antenna and setup to transmit at the lowest channel (2405MHz). Then the field strength was measured at 2310-2390 MHz.2. The transmitter was configured with the worst case antenna and setup to transmit at the highest channel (2475MHz). Then the field strength was measured at 2483.5-2500 MHz.		


Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
2390.00	V	24.26	11.91	32.38	56.64	44.29	74.00	54.00	CH01
2483.50	V	23.50	11.80	32.74	56.24	44.54	74.00	54.00	CH15

Remark :


- (1) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission °.
- (2) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand



TX 2405MHz (Restricted Bands Requirements, Vertical)

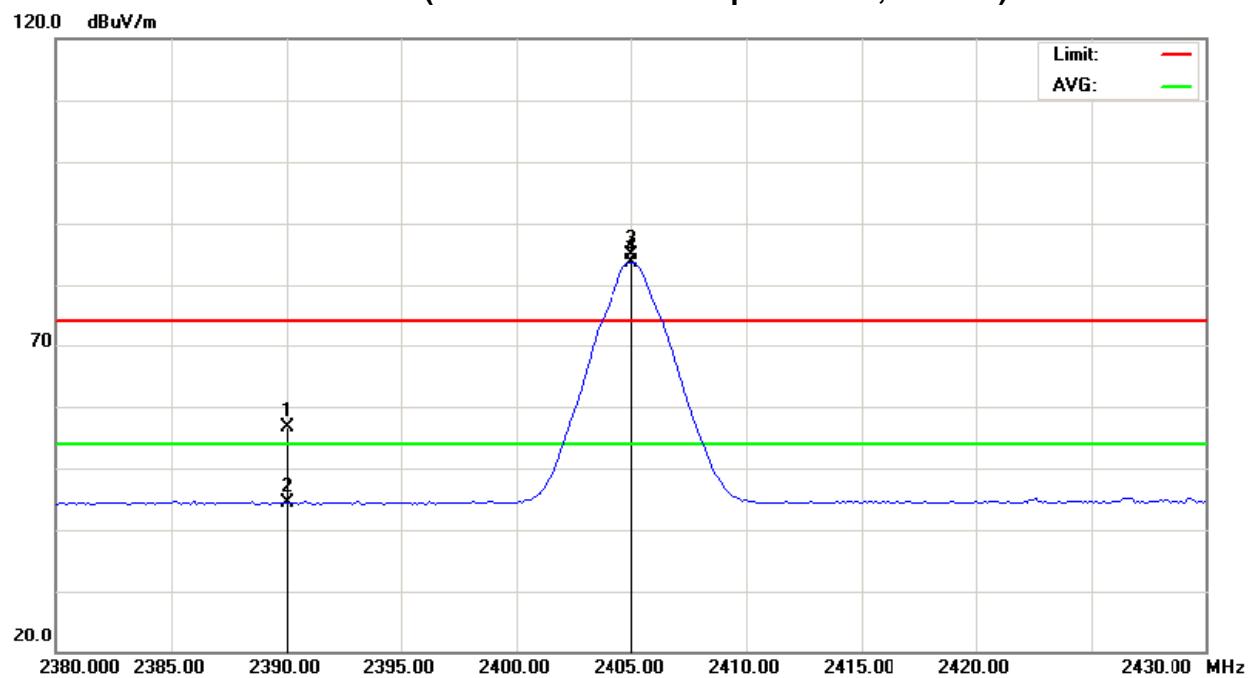

TX 2475MHz (Restricted Bands Requirements, Vertical)

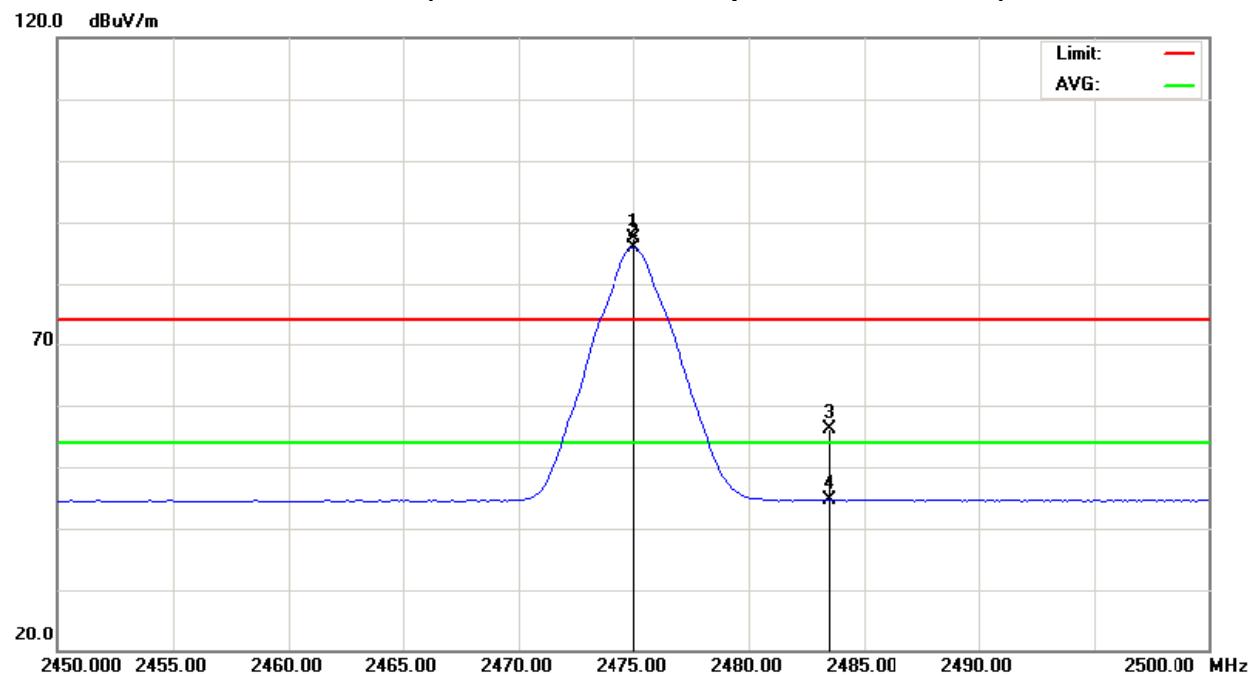



EUT :	ZigBee	Model No. :	GFZM-T5321
Temperature :	25 °C	Relative Humidity :	44%
Test Power :	DC 3.3V		
Test Mode :	TX CH 2405MHz/2475MHz (Horizontal)		
Note :	<p>The emission of the carrier radiated field strength is measured for (Peak and AV) as following:</p> <ol style="list-style-type: none">1. The transmitter was then configured with the worst case antenna and setup to transmit at the lowest channel (2405MHz). Then the field strength was measured at 2310-2390 MHz.2. The transmitter was configured with the worst case antenna and setup to transmit at the highest channel (2475MHz). Then the field strength was measured at 2483.5-2500 MHz.		


Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
2390.00	H	23.08	11.89	32.38	55.46	44.27	74.00	54.00	CH01
2483.50	H	22.02	11.82	32.74	54.76	44.56	74.00	54.00	CH15

Remark :


- (1) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission °
- (2) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand



TX 2405MHz (Restricted Bands Requirements, Horizontal)

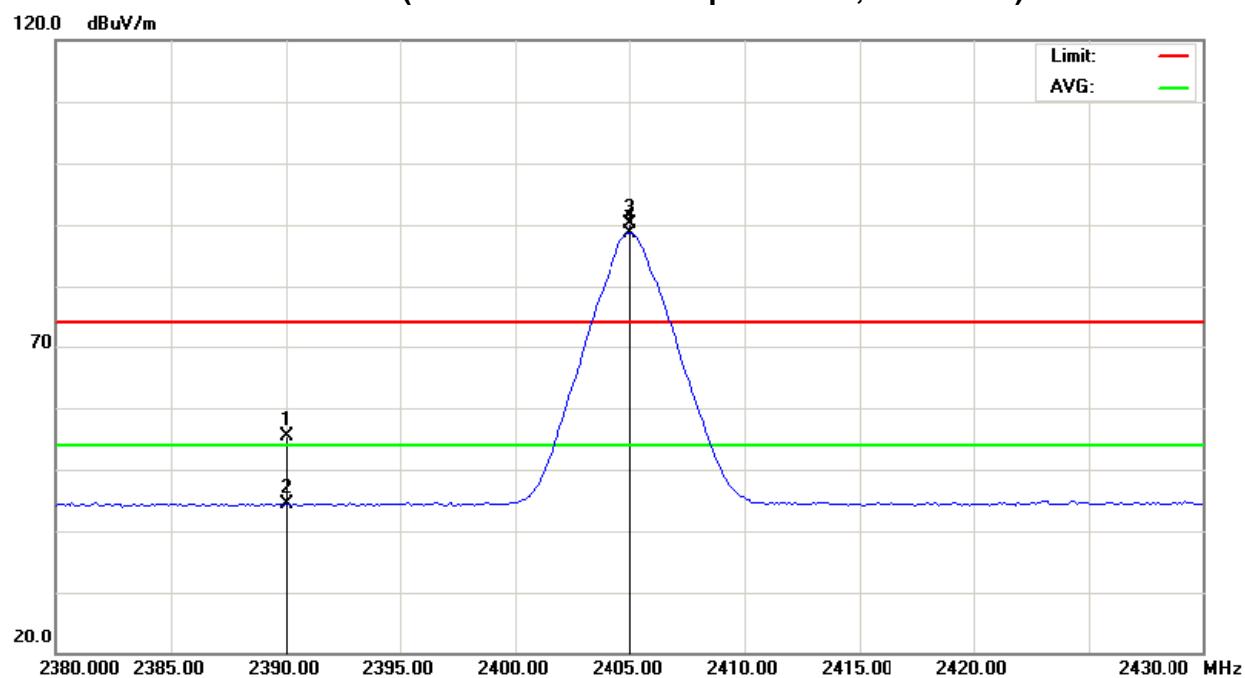

TX 2475MHz (Restricted Bands Requirements, Horizontal)

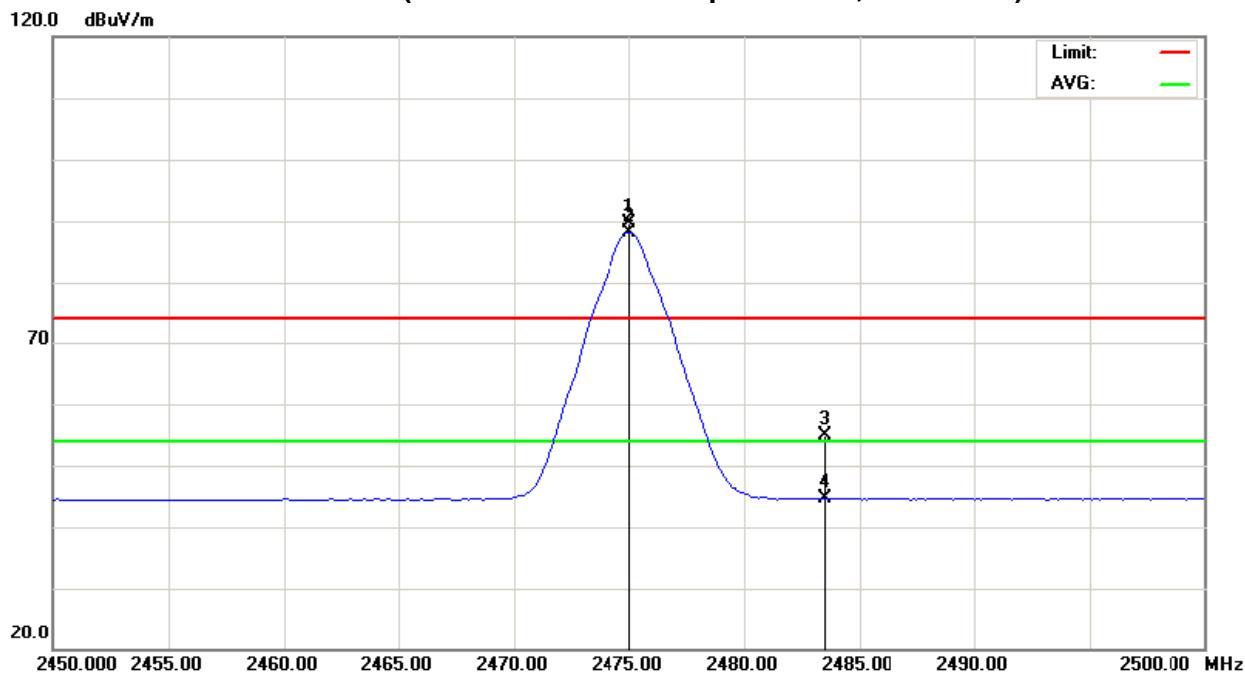



5. BANDWIDTH TEST

5.1 APPLIED PROCEDURES / LIMIT

FCC Part15, Subpart C			
Test Item	Limit	Frequency Range (MHz)	Result
Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

5.1.1 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP-40	100129	Sep. 10, 2010

Remark: " N/A" denotes No Model No. , Serial No. or No Calibration specified.


5.1.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting : RBW= 100KHz, VBW=100KHz, Sweep time = Auto.

5.1.3 DEVIATION FROM STANDARD

No deviation.

5.1.4 TEST SETUP

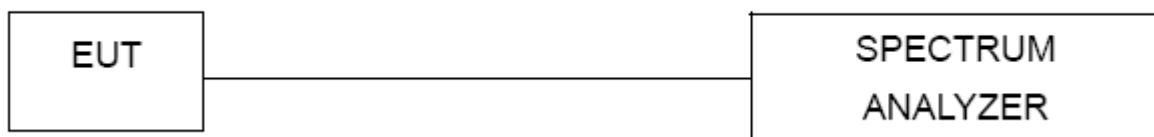

5.1.5 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.





5.1.6 TEST RESULTS

EUT :	ZigBee	Model No. :	GFZM-T5321
Temperature :	29 °C	Relative Humidity :	71%
Test Power :	AC 120V/60Hz		
Test Mode :	2405MHz/2440MHz/2475MHz		

Frequency (MHz)	Bandwidth (MHz)	99% Occupied BW (MHz)	LIMIT (MHz)
2405	1.63	2.62	>=500KHz
2440	1.64	2.63	>=500KHz
2475	1.62	2.70	>=500KHz

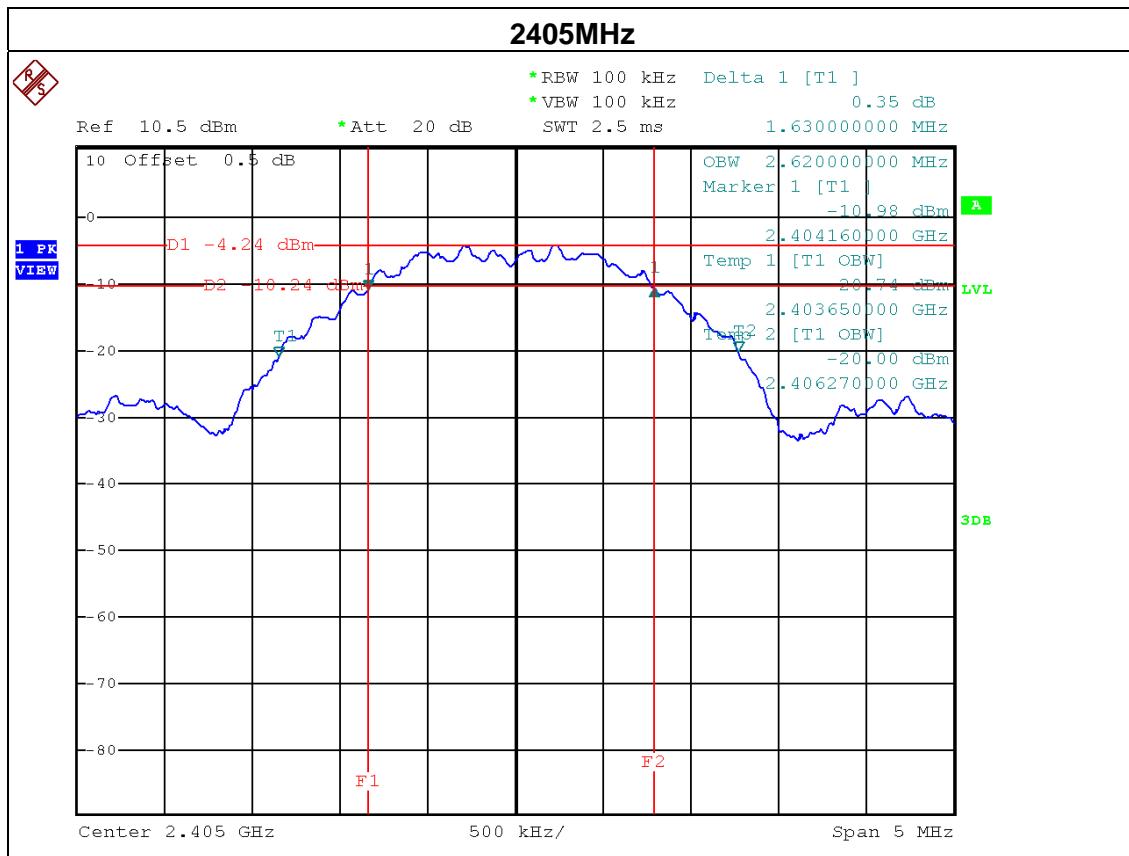

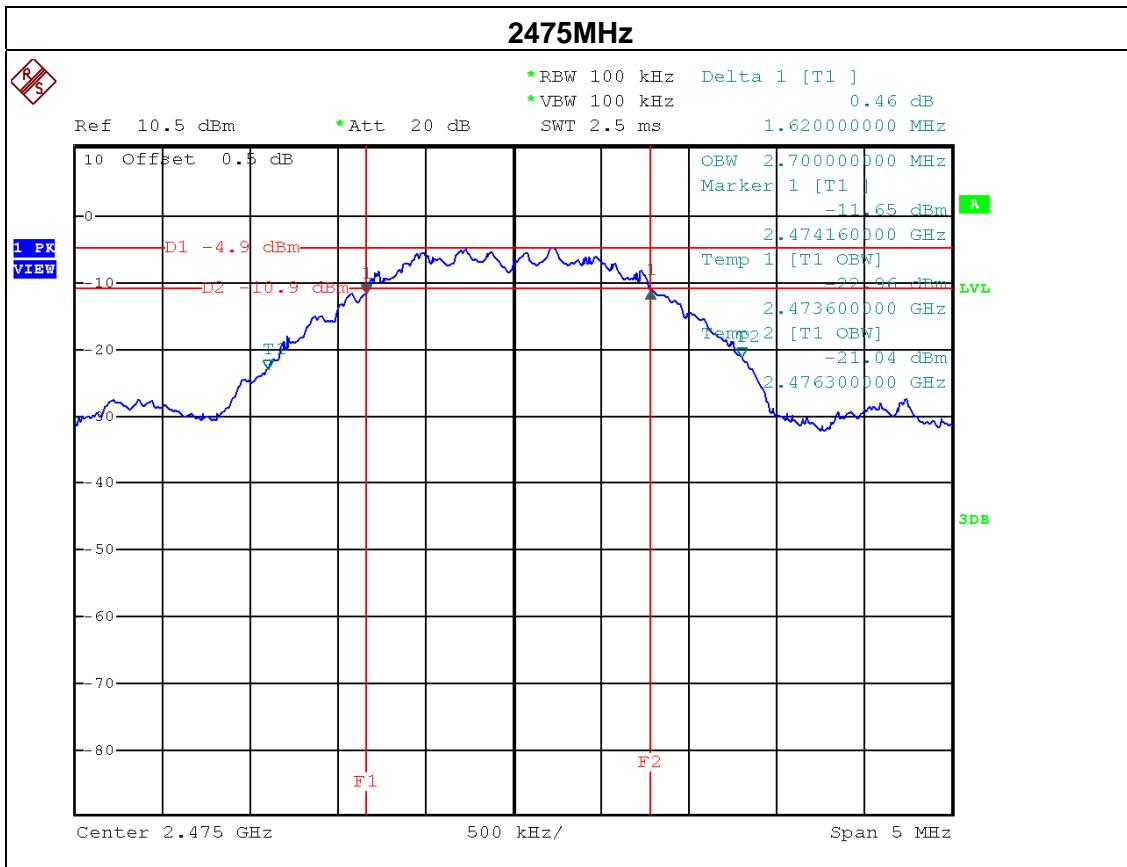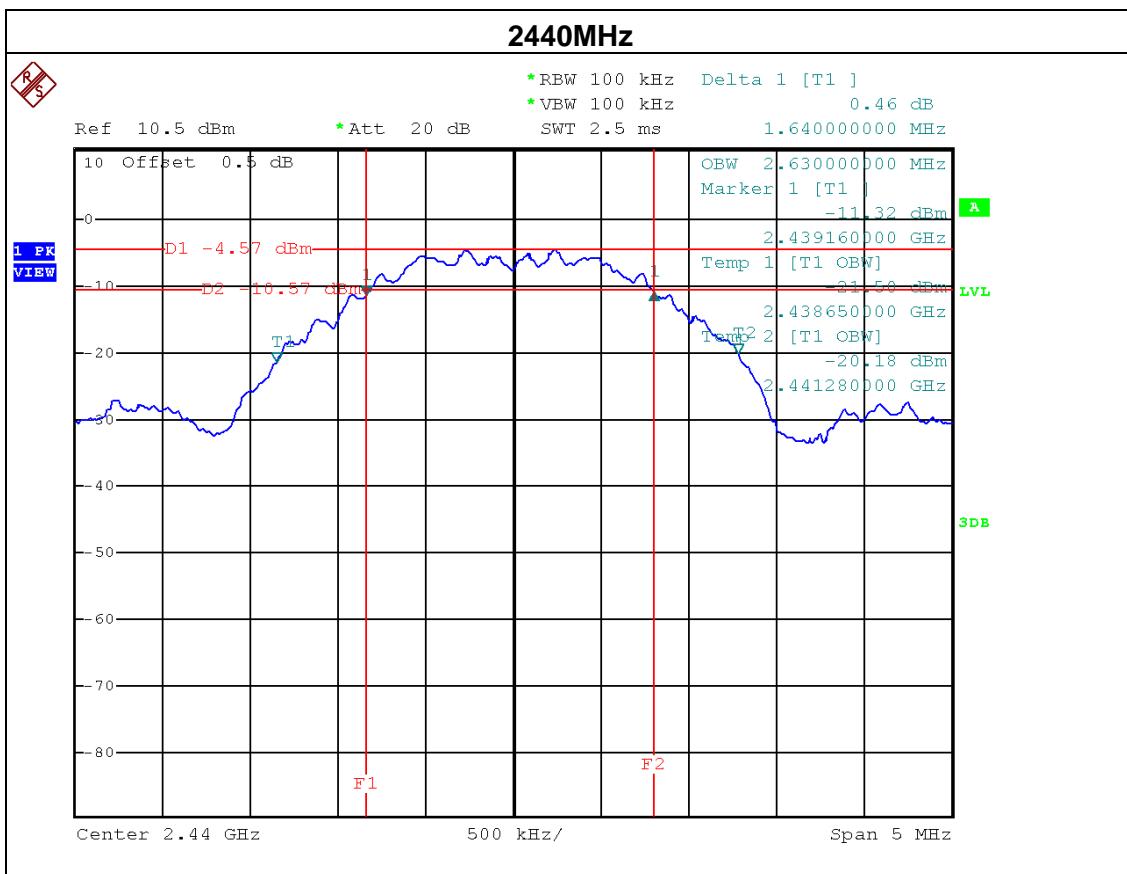



6. PEAK OUTPUT POWER TEST

6.1 APPLIED PROCEDURES / LIMIT

FCC Part15, Subpart C			
Test Item	Limit	Frequency Range (MHz)	Result
Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS

6.1.1 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Power Meter	Anritsu	ML2487A	6K00004714	Feb. 10, 2011
2	Power Meter Sensor	Anritsu	MA2491A	34138	Feb. 10, 2011

Remark: " N/A" denotes No Model No. , Serial No. or No Calibration specified.


6.1.2 TEST PROCEDURE

The EUT was directly connected to the power meter and antenna output port as show in the block diagram below,

6.1.3 DEVIATION FROM STANDARD

No deviation.

6.1.4 TEST SETUP

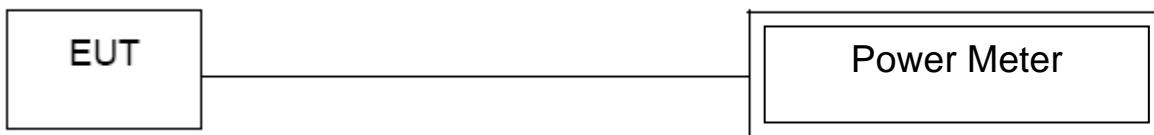

6.1.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.



6.1.6 TEST RESULTS

EUT :	ZigBee	Model No. :	GFZM-T5321
Temperature :	29 °C	Relative Humidity :	71%
Test Power :	AC 120V/60Hz		
Test Mode :	2405MHz/2440MHz/2475MHz		

Frequency (MHz)	Peak Output Power (dBm)	LIMIT (dBm)	LIMIT (W)
2405	1.12	30	1
2440	0.82	30	1
2475	0.46	30	1



7. ANTENNA CONDUCTED SPURIOUS EMISSION

7.1 APPLIED PROCEDURES / LIMIT

FCC Part15, Subpart C			
Test Item	Limit	Frequency Range (MHz)	Result
Antenna conducted Spurious Emission	20dB less than the peak value of fundamental frequency	30-25000	PASS

7.1.1 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP-40	100129	Sep. 10, 2010

Remark: " N/A" denotes No Model No. , Serial No. or No Calibration specified.

7.1.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting : RBW= 100KHz, VBW=100KHz, Sweep time = Auto.

7.1.3 DEVIATION FROM STANDARD

No deviation.

7.1.4 TEST SETUP



7.1.5 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.




7.1.6 TEST RESULTS

EUT :	ZigBee	Model No. :	GFZM-T5321
Temperature :	29 °C	Relative Humidity :	71%
Test Power :	AC 120V/60Hz		
Test Mode :	2405MHz/2475MHz		

Channel of Worst Data: 2405MHz,2475MHz			
The max. radio frequency power in any 100kHz bandwidth outside the frequency band		The max. radio frequency power in any 100 kHz bandwidth within the frequency band.	
FREQUENCY(MHz)	POWER(dBm)	FREQUENCY(MHz)	POWER(dBm)
2357.80	-57.07	2483.90	-56.73
Result			
In any 100kHz bandwidth outside the frequency band, the radio frequency power is at least 20dB below that in the 100kHz bandwidth within the band that contains the highest lever of the desired power.			

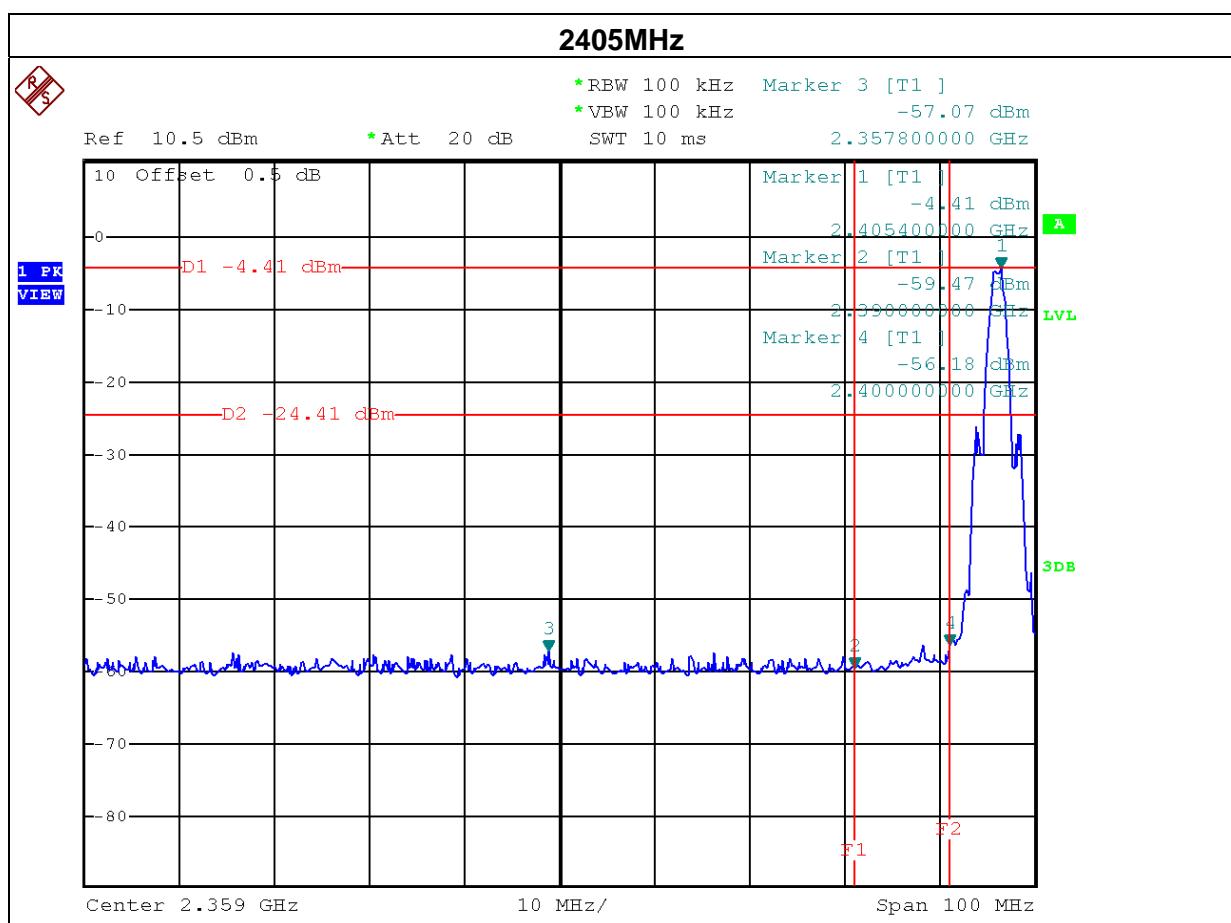

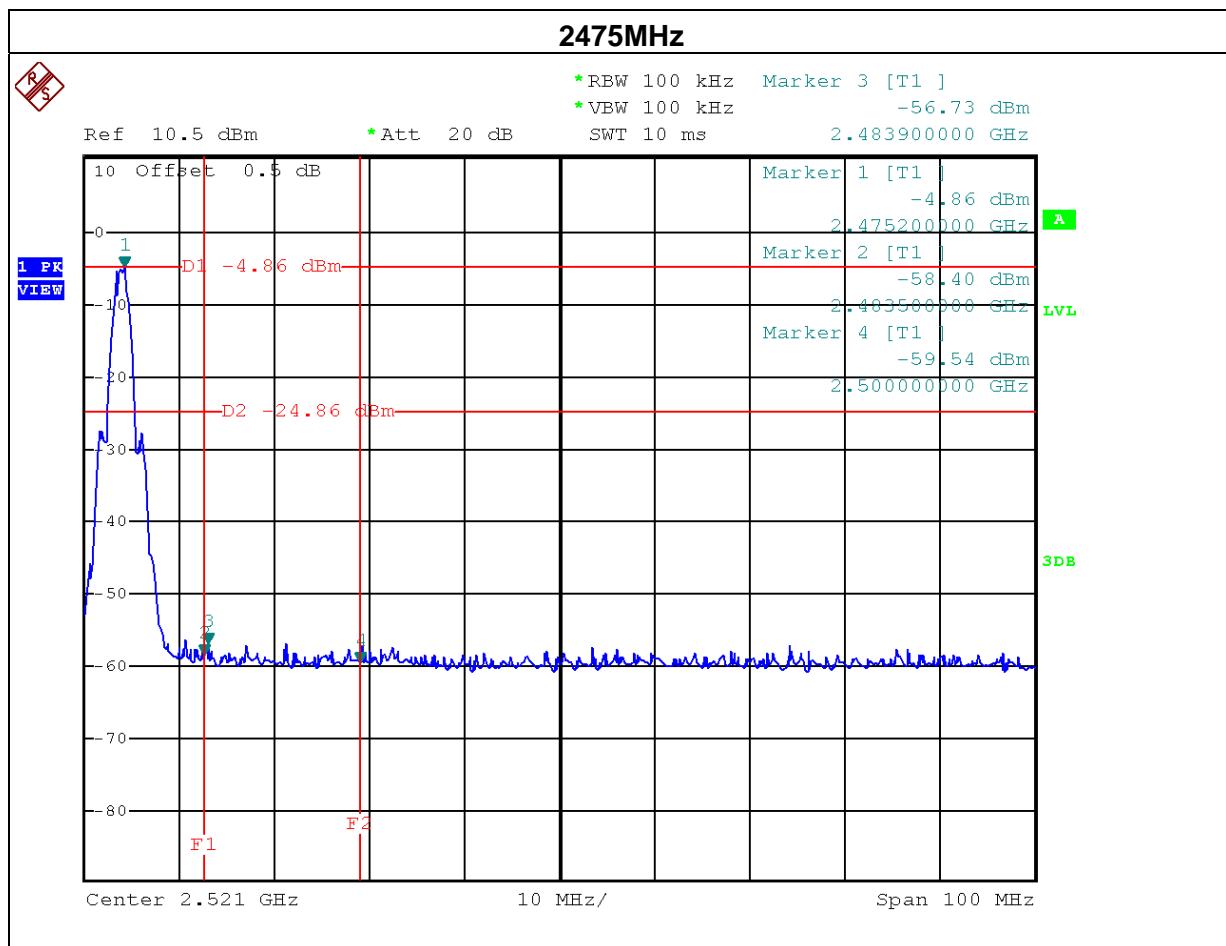



8. POWER SPECTRAL DENSITY TEST

8.1 APPLIED PROCEDURES / LIMIT

FCC Part15, Subpart C			
Test Item	Limit	Frequency Range (MHz)	Result
Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS

8.1.1 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP-40	100129	Sep. 10, 2010

Remark: " N/A" denotes No Model No. , Serial No. or No Calibration specified.

8.1.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting : RBW=3KHz, VBW=30KHz, Sweep time = 500s.

8.1.3 DEVIATION FROM STANDARD

No deviation.

8.1.4 TEST SETUP



8.1.5 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.





8.1.6 TEST RESULTS

EUT :	ZigBee	Model No. :	GFZM-T5321
Temperature :	29 °C	Relative Humidity :	71%
Test Power :	AC 120V/60Hz		
Test Mode :	2405MHz/2440MHz/2475MHz		

Frequency (MHz)	Power Density (dBm)	LIMIT (dBm)
2405	-16.10	8
2440	-16.55	8
2475	-16.71	8

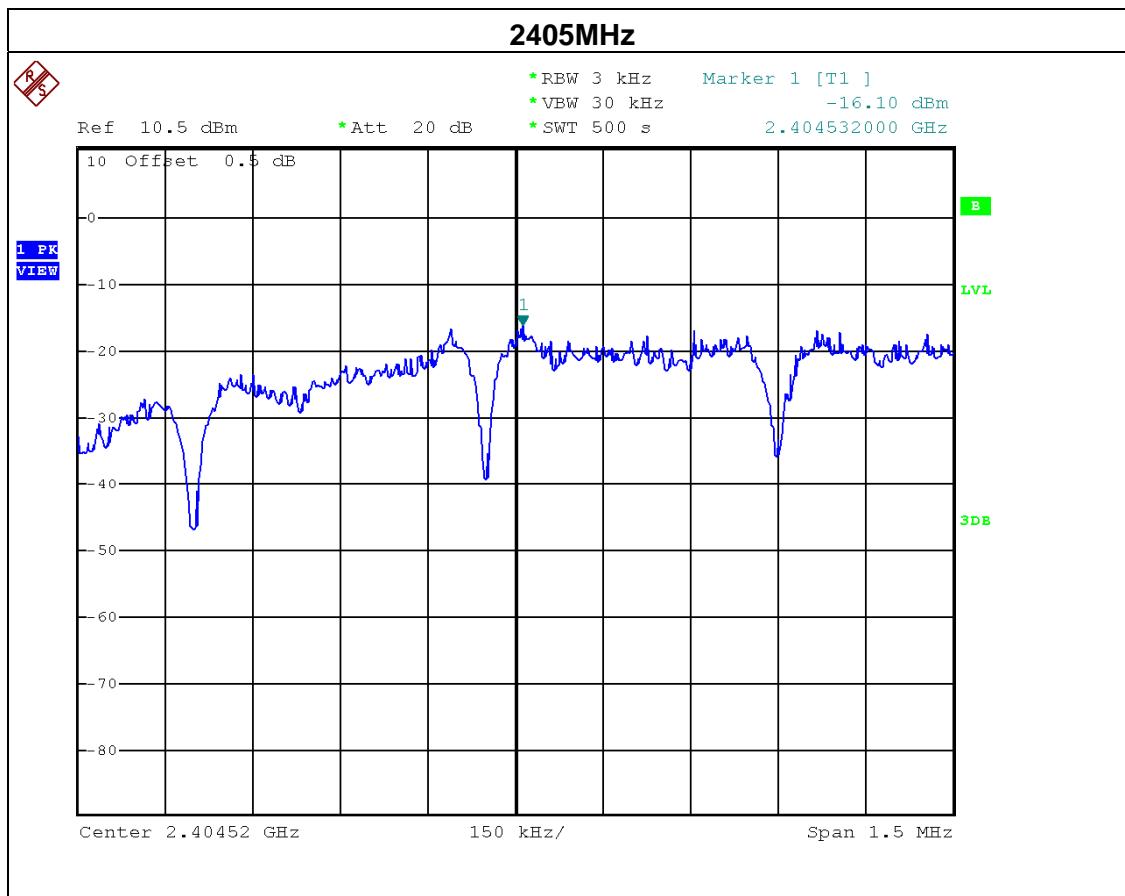

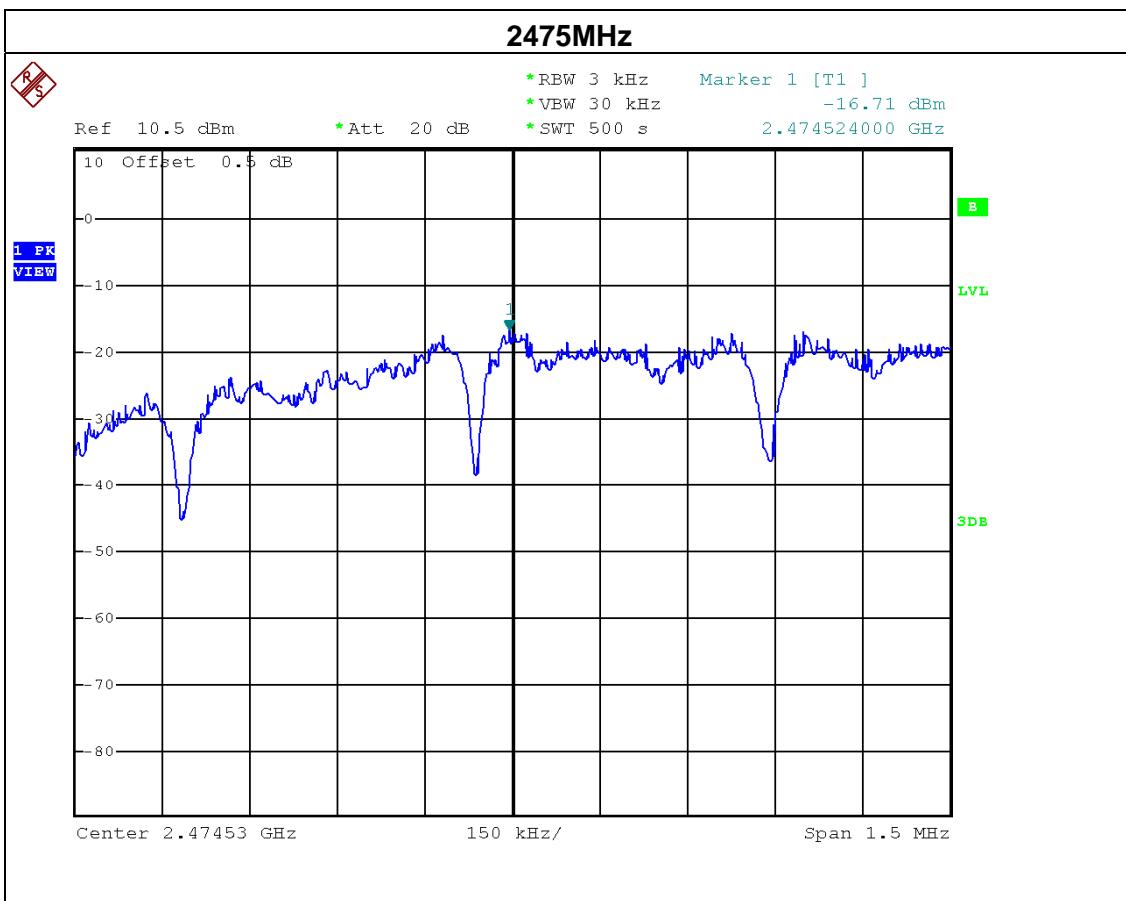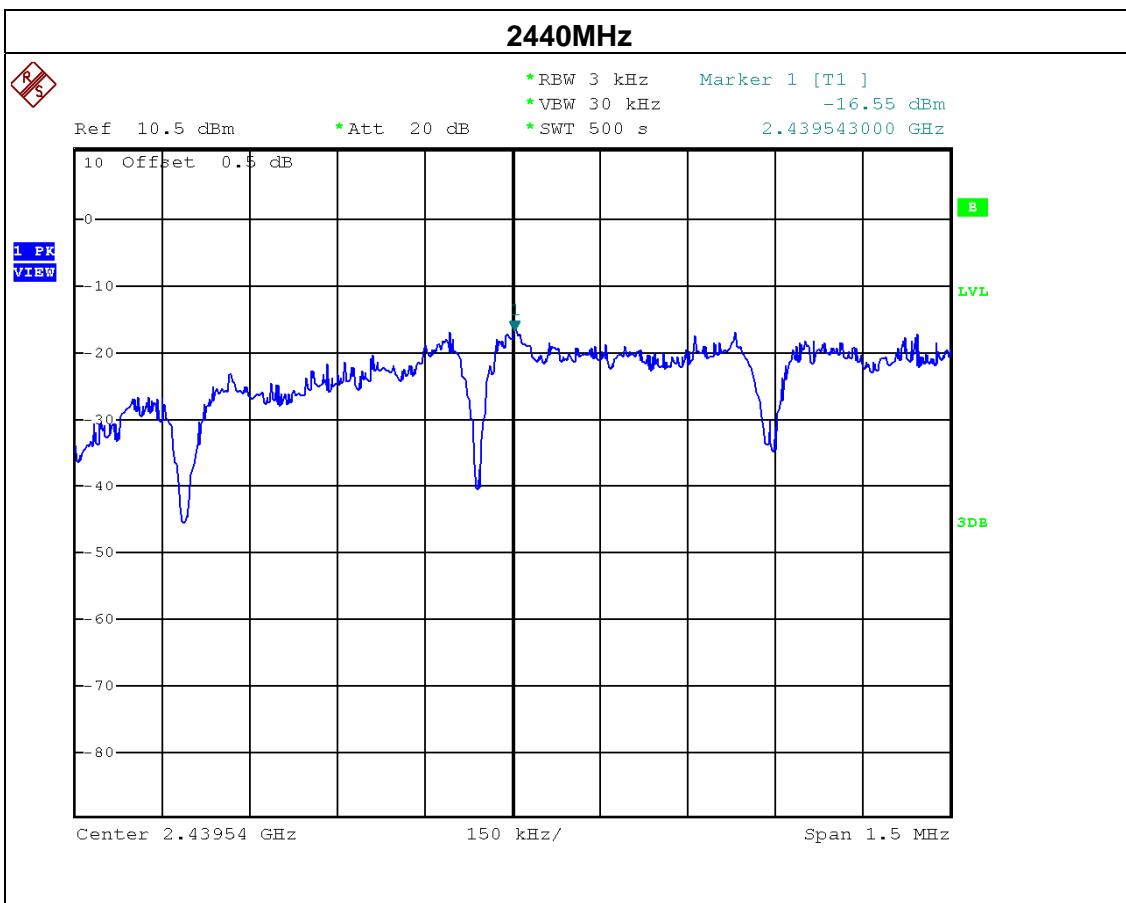



9. RF EXPOSURE TEST

9.1 APPLIED PROCEDURES / LIMIT

Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess limit for maximum permissible exposure.

(A) Limits for Occupational / Controlled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842 / f	4.89 / f	(900 / f)*	6
30-300	61.4	0.163	1.0	6
300-1500			F/300	6
1500-100,000			5	6

(B) Limits for General Population / Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f)*	30
30-300	27.5	0.073	0.2	30
300-1500			F/1500	30
1500-100,000			1.0	30

Note: f = frequency in MHz ; *Plane-wave equivalent power density

9.1.1 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Power Meter	Anritsu	ML2487A	6K00004714	Feb. 10, 2011
2	Power Meter Sensor	Anritsu	MA2491A	34138	Feb. 10, 2011

Remark: " N/A" denotes No Model Name , Serial No. or No Calibration specified.

9.1.2 MPE CALCULATION METHOD

$$E \text{ (V/m)} = \frac{\sqrt{30 \times P \times G}}{d}$$

$$\text{Power Density: } Pd \text{ (W/m}^2\text{)} = \frac{E^2}{377}$$

E = Electric field (V/m)

P = Peak RF output power (W)

G = EUT Antenna numeric gain (numeric)

d = Separation distance between radiator and human body (m)


The formula can be changed to

$$Pd = \frac{30 \times P \times G}{377 \times d^2}$$

From the peak EUT RF output power, the minimum mobile separation distance, d=0.2m, as well as the gain of the used antenna, the RF power density can be obtained

**9.1.3 DEVIATION FROM STANDARD**

No deviation.

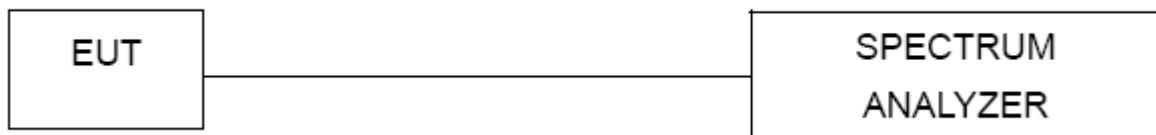9.1.4 TEST SETUP**9.1.5 EUT OPERATION CONDITIONS**

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.

9.1.6 TEST RESULTS

EUT :	ZigBee	Model No. :	GFZM-T5321
Temperature :	29°C	Relative Humidity :	71%
Test Power :	AC 120V/60Hz		
Test Mode :	2405MHz/2440MHz/2475MHz		

Antenna Gain (dBi)	Antenna Gain (numeric)	Peak Output Power (dBm)	Peak Output Power (mW)	Power Density (S) (mW/cm ²)	Limit of Power Density (S) (mW/cm ²)	Test Result
1.30	1.3490	1.1200	1.2942	0.000347	1	PASS