

Tested By:Hong, Report No.:0609721

Scan Settings (1 Range)

Frequencies				Receiver Settings			
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp OpRge
150k	30M	5k	10k	PK+AV	10ms	AUTO	LN OFF 60dB


Final Measurement: x QP / + AV

Meas Time: 1 s

Subranges: 16

Acc Margin: 20dB

Transducer No.	Start	Stop	Name
2 1	9k	30M	EW0699
12	9k	30M	EW0192

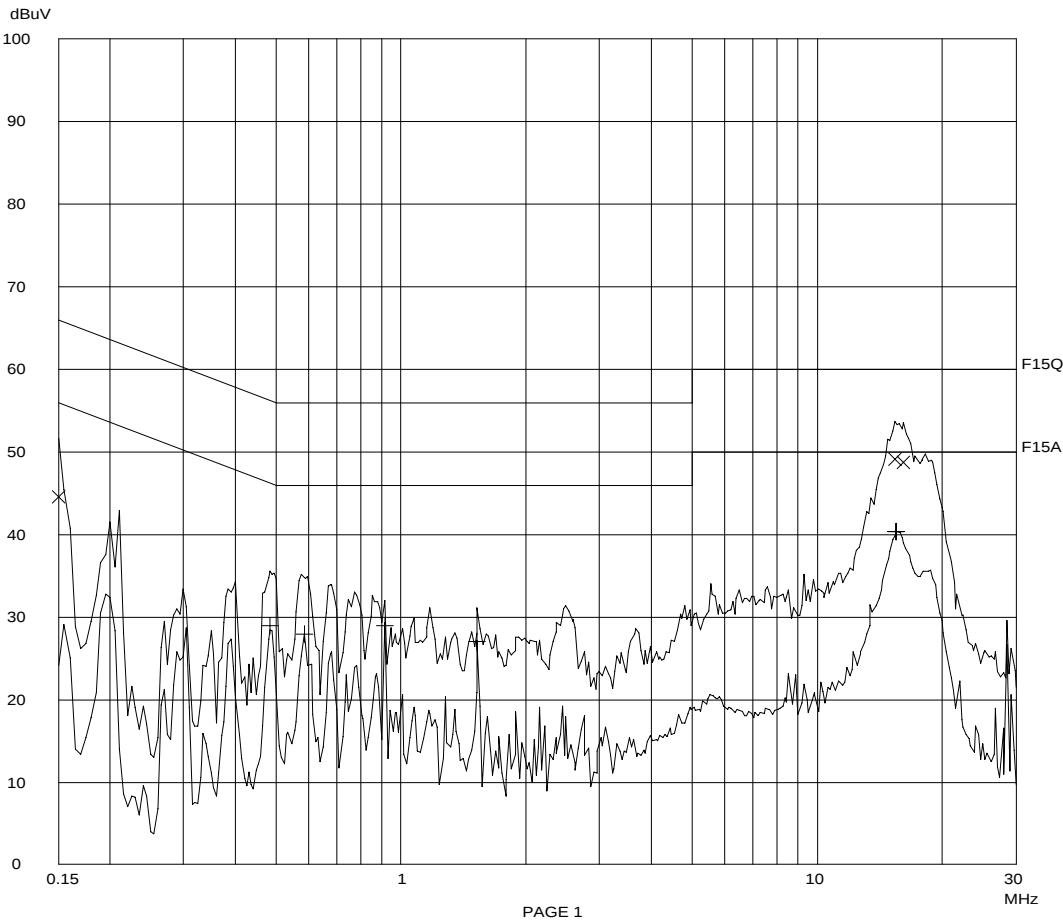

Report No.: 0609721
PC Live Mode
AC Mains "L"

Tested By: Hong, Report No.: 0609721

Scan Settings (1 Range)

----- Frequencies -----			Receiver Settings -----					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150k	30M	5k	10k	PK+AV	10ms	AUTO	LN OFF	60dB

Final Measurement Results:

Frequency	QP Level	QP Limit
MHz	dBuV	dBuV
0.15000	44.5	66.0
15.37500	49.1	60.0
16.12500	48.6	60.0

Frequency	AV Level	AV Limit
MHz	dBuV	dBuV
0.48500	28.9	46.3
0.58500	27.9	46.0
0.91500	29.0	46.0
1.52500	27.1	46.0
15.45000	40.4	50.0
15.51000	40.3	50.0

* limit

Report No.: 0609721
PC Live Mode
AC Mains "N"

Tested By: Hong, Report No.: 0609721

Scan Settings (1 Range)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150k	30M	5k	10k	PK+AV	10ms	AUTO	LN OFF	60dB


Final Measurement: x QP / + AV

Meas Time: 1 s

Subranges: 16

Acc Margin: 20dB

Transducer No.	Start	Stop	Name
2 1	9k	30M	EW0699
12	9k	30M	EW0192

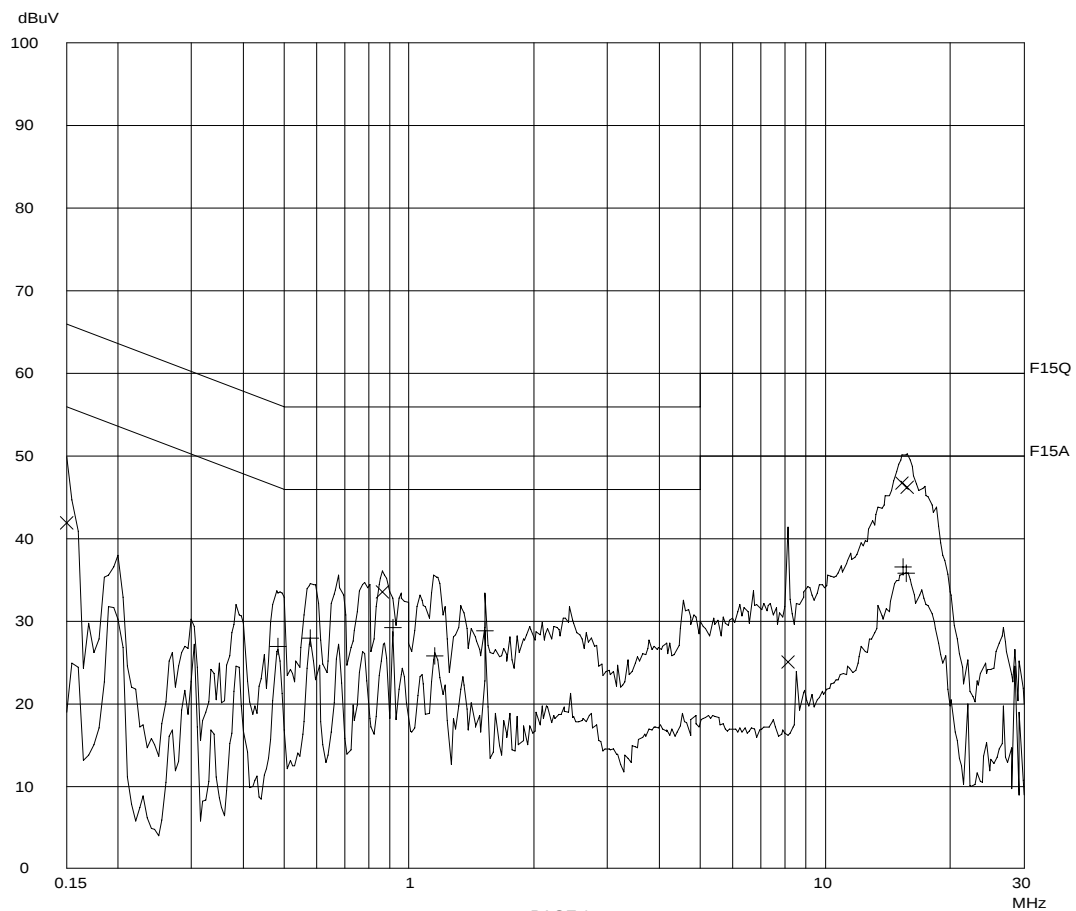

PAGE 1

Ctrl No.: N/A

Report No.: 0609721
PC Live Mode
AC Mains "N"

Tested By: Hong, Report No.: 0609721

Scan Settings (1 Range)

|----- Frequencies -----||----- Receiver Settings -----|

Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150k	30M	5k	10k	PK+AV	10ms	AUTO	LN OFF	60dB

Final Measurement Results:

Frequency	QP Level	QP Limit
MHz	dBuV	dBuV

0.15000	41.8	66.0
0.86500	33.5	56.0
8.14000	24.9	60.0
15.33500	46.7	60.0
15.74000	46.1	60.0

Frequency	AV Level	AV Limit
MHz	dBuV	dBuV

0.48500	26.9	46.3
0.58000	27.9	46.0
0.91500	29.2	46.0
1.15500	25.8	46.0
1.52500	28.8	46.0
15.40500	36.5	50.0
15.60500	35.8	50.0

* limit