
TEST REPORT

Limited FCC Part 15C Testing in support of an Application for Grant of Equipment
Authorisation of an Intermec 730 Handheld Computer Terminal with 802.11b Radio
Module
FCC ID: EHA-802CFI3

Report Number: OR612087-01

December 2003

REPORT ON

Limited FCC Part 15C Testing in support of an Application for Grant of Equipment Authorisation of an Intermec 730 Handheld Computer Terminal with 802.11b Radio Module

FCC ID: EHA-802CFI3
Report No OR612087-01

December 2003

EQUIPMENT:

Intermec 730 Handheld Computer Terminal with 802.11b Radio Module

FCC ID:

EHA-802CFI3

SPECIFICATION:

47 CFR 15.247

PREPARED FOR:

Intermec Technologies Corporation
550 Second Street S.E
Cedar Rapids
IOWA 52401
USA

**MANUFACTURERS
REPRESENTATIVE:**

Mr Scott Holub



C H GOULD
EMC Signatory

DATED:

17th December 2003

DISTRIBUTION

Intermec Technologies

Copy 1 (CD)

TÜV Product Service

Copy 2

Copy No
Total No of Pages 31
(Inclusive of Annex A)

ENGINEERING STATEMENT

The measurements shown in this report were made in accordance with the procedures described on test pages. All reported testing was carried out on a sample equipment to demonstrate limited compliance with FCC CFR 47: Part 15. The sample tested was found to comply with the requirements defined in the applied rules.

Test Engineers:



J Holcombe





CONTENTS

	Page No
1 REPORT SUMMARY	
1.1 Status	4
1.2 Introduction	5
1.3 Location of Testing	5
1.4 Brief Summary of Results.....	5
1.5 Product Information	6
1.6 Deviations from the Standard.....	7
1.7 Modification Record	8
2 TEST DETAILS	
2.1 Spurious Radiated Emissions	10
2.2 Band Edge Measurements – Bottom Channel	15
2.3 Band Edge Measurements – Top Channel.....	16
2.4 Maximum Peak Output Power (EIRP Method)	17
3 TEST EQUIPMENT	
3.1 Test Equipment and Ancillaries Used	19
3.2 Measurement Uncertainty	20
4 PHOTOGRAPHS OF TEST SAMPLE	
4.1 Photographs of test sample.....	22
5 ACCREDITATION, DISCLAIMERS AND COPYRIGHT	
5.1 Accreditation, Disclaimers and Copyright	29
ANNEX A	
FCC Compliance Letter	A.2



SECTION 1

REPORT SUMMARY

Limited FCC Part 15C Testing in support of an Application for Grant of Equipment Authorisation of an Intermec 730 Handheld Computer Terminal with 802.11b Radio Module
FCC ID: EHA-802CFI3



1.1 STATUS

OBJECTIVE	To undertake measurements to determine the Equipment Under Test's (EUT's) compliance with the specification.
MANUFACTURING DESCRIPTION	Intermec 730 Handheld Computer Terminal with 802.11b Radio Module
APPLICANT	Intermec Technologies Norand Mobile Systems Division 550 Second Street S.E Cedar Rapids IOWA 52401 USA
MANUFACTURERS TYPE NUMBER	730
MANUFACTURERS PART NUMBER	730
HARDWARE REVISION	730A1E4004001
TEST SPECIFICATION NUMBER	FCC Part 15 Subpart C
REGISTRATION NUMBER	OR612087
QUANTITY OF ITEMS TESTED	One
SECURITY CLASSIFICATION OF EUT	Unclassified
INCOMING RELEASE	Declaration of Build Status
SERIAL NUMBER	OR612087
DATE	
DISPOSAL	Held pending disposal
REFERENCE NUMBER	N/A
DATE	N/A
START OF TEST	10 December 2003
FINISH OF TEST	12 December 2003
TEST ENGINEERS	J Holcombe
RELATED DOCUMENTS	ANSI C63.4 2001. Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz. FCC Public Notice document (DA 00-705 released 30 March 2000)



1.2 INTRODUCTION

The information contained within this report is intended to show verification of compliance of the Intermec Technologies Inc Intermec 730 Handheld Computer Terminal with 802.11b Radio Module to the requirements of FCC Specification Part 15.

FCC ID EHA-802CF13

1.3 LOCATION OF TESTING

TUV Product Service Engineer Jason Holcombe conducted all testing at the premises TUV Product Service, Segensworth Road, Fareham, Hampshire, PO15 5RH. Spurious Radiated Emissions measurements were performed in a 3 metre Anechoic Chamber. A complete site description is on file with the FCC Laboratory Division, Registration Number: 90987. See Annex A.

1.4 BRIEF SUMMARY OF RESULTS

A brief summary of the tests carried out is shown below.

Test	Spec Clause	Test Description	Result	Levels/Comments
2.1	FCC: Part 15.247(c)	Spurious Radiated Emissions	PASS	
2.2	FCC: Part 15.247(c)	Band Edge Measurements (Bottom Channel)	PASS	
2.3	FCC: Part 15.247(c)	Band Edge Measurements (Top Channel)	PASS	
2.4	FCC: Part 15.247(b)(3)	Maximum Peak Power Output (EIRP Method)	PASS	



1.5 PRODUCT INFORMATION

1.5.1 Technical Description

The Equipment Under Test (EUT) was an Intermec 730 Handheld Computer Terminal with 802.11b Radio Module, which offers 2.4GHz Wireless connectivity with other radio devices.

An Intermec Technologies 730 Handheld Computer Terminal was supplied as the host unit, this was used to control the EUT during test. The EUT was outside of the host unit during test.

Manufacturing Description: Intermec 730 Handheld Computer Terminal with 802.11b Radio Module

Manufacturer: Intermec Technologies

Model No: 730

Serial No: 27910300035

1.5.2 Modes of Operation

The test software in the EUT enabled the Test Engineer to select full power and continuous transmit on the following channels;

2.4GHz RLAN functionality

Bottom Channel: 2412MHz

Middle Channel: 2437MHz

Top Channel: 2462MHz

The EUT was set at the Maximum Output Power during testing.



1.6 DEVIATIONS FROM THE STANDARD

No deviations from the standard were made during testing.



1.7 MODIFICATION RECORD

No modifications were made to the test sample.



SECTION 2

TEST DETAILS

Limited FCC Part 15C Testing in support of an Application for Grant of Equipment Authorisation of an Intermec 730 Handheld Computer Terminal with 802.11b Radio Module
FCC ID: EHA-802CFI3



2.1 SPURIOUS RADIATED EMISSIONS

2.1.1 Specification Reference

FCC Part 15.247(c)

2.1.2 Equipment Under Test

Intermec 730 Handheld Computer Terminal with 802.11b Radio Module

2.1.3 Date of Test

10 - 12 December 2003

2.1.4 Test Equipment Used

The following major items of test equipment identified in Section 3.1 were used for the above tests.

Items: 1 – 10.



2.1 SPURIOUS RADIATED EMISSIONS - Continued

2.1.5 Test Procedure

Test Performed in accordance with ANSI C63.4.

A preliminary profile of the Spurious Radiated Emissions was obtained by operating the EUT on a remotely controlled turntable within a semi-anechoic chamber. Measurements of emissions from the EUT were obtained with the Measurement Antenna in both Horizontal and Vertical Polarisations. The profiling produced a list of the worst-case emissions together with the EUT azimuth and antenna polarisation.

Using the information from the preliminary profiling of the EUT. The list of emissions was then confirmed or updated under Alternative Open Site conditions. Emission levels were maximised by adjusting the antenna height, antenna polarisation and turntable azimuth.

Emissions identified within the range 30MHz – 1GHz were then formally measured using a CISPR Quasi-Peak detector.

The measurements were performed at a 3m distance unless otherwise stated.

The EUT was operating via the internal power supply of the Host.

Measurements were made with the EUT transmitting on the following channels.

Channel 1: 2412MHz
Channel 6: 2437MHz
Channel 11: 2462MHz

Performed by J Holcombe, EMC Engineer.



2.1.6 Test Results

Measurement of radiated carrier field strength on top, middle and bottom channels are detailed in the table below.

Freq MHz	Res BW kHz	Vid BW kHz	Ant Pol V/H	Ant Hgt cm	EUT Arc Deg	Raw PEAK dB μ V	Cable loss dB	Antenna Factor dB	Result Peak dB μ V/m
2412	100	300	V	136	0	75.4	4.6	28.6	108.6
2437	100	300	V	136	0	73.1	4.6	28.6	106.3
2462	100	300	V	137	0	72.7	4.6	28.6	105.9

EUT Tx on Bottom Channel (2412MHz)

30MHz – 1GHz Test Site Results: The levels of the six highest emissions measured in accordance with the specification are presented below: -

Emission Frequency	Pol	Hgt	Azm	Field Strength at 3m		Specification Limit			
				MHz	H/V	cm	deg	dB μ V/m	μ V/m
63.50	V	100	279	26.6	21.4	40.0	100		
136.85	V	100	100	29.6	30.2	43.5	150		
140.14	V	100	100	27.8	24.5	43.5	150		
143.07	V	100	65	28.2	25.7	43.5	150		
895.78	V	121	278	35.0	56.2	46.0	200		
895.78	H	228	0	34.5	53.1	46.0	200		

EUT Tx on Middle Channel (2437MHz)

30MHz – 1GHz Test Site Results: The levels of the six highest emissions measured in accordance with the specification are presented below: -

Emission Frequency	Pol	Hgt	Azm	Field Strength at 3m		Specification Limit			
				MHz	H/V	Cm	deg	dB μ V/m	μ V/m
63.50	V	100	280	26.8	21.9	40.0	100		
136.85	V	100	100	29.4	29.5	43.5	150		
140.14	V	100	100	27.3	23.2	43.5	150		
143.07	V	100	65	27.9	24.8	43.5	150		
895.70	V	121	276	35.4	58.9	46.0	200		
895.70	H	228	0	34.6	53.7	46.0	200		



2.1.6 Test Results - Continued

EUT Tx on Top Channel (2462MHz)

30MHz – 1GHz Test Site Results: The levels of the six highest emissions measured in accordance with the specification are presented below: -

Emission Frequency	Pol	Hgt	Azm	Field Strength at 3m		Specification Limit					
				MHz	H/V	cm	deg	dB μ V/m	μ V/m	dB μ V/m	μ V/m
63.90	V	100	278	26.8		21.9		40.0		100	
136.90	V	100	100	29.5		29.9		43.5		150	
140.15	V	100	100	27.5		23.7		43.5		150	
143.10	V	100	65	28.0		25.1		43.5		150	
895.76	V	122	276	35.1		56.9		46.0		200	
895.70	H	229	0	34.9		55.6		46.0		200	

ABBREVIATIONS FOR ABOVE TABLES

H	Horizontal Polarisation	V	Vertical Polarisation
Pol	Polarisation	Hgt	Height
deg	degree	Azm	Azimuth



2.1.6 Test Results - Continued

EUT Tx on Bottom Channel (2412MHz)

1GHz – 25GHz Test Site Results : The levels of the highest emissions measured in accordance with the specification are presented below: -

Frequency	Antenna		Turntable	Peak Field Strength	Peak Limit	Average Field Strength	Average Limit
	Polarisation	Height					
GHz	H/V	Cm	Deg	dB μ V/m	dB μ V/m	dB μ V/m	dB μ V/m
2.374	V	136	0	58.9	74.0	49.1	54.0

EUT Tx on Middle Channel (2437MHz)

1GHz – 25GHz Test Site Results : No emissions attributable to the EUT were detected within 20dB below the specification limit therefore no table for this channel is presented.

2.1.6 Test Results - Continued

EUT Tx on Top Channel (2462MHz)

1GHz – 25GHz Test Site Results : The levels of the highest emissions measured in accordance with the specification are presented below: -

Frequency	Antenna		Turntable	Peak Field Strength	Peak Limit	Average Filed Strength	Average Limit
	Polarisation	Height					
GHz	H/V	cm	Deg	dB μ V/m	dB μ V/m	dB μ V/m	dB μ V/m
2.499	V	136	0	57.8	74.0	47.6	54.0



2.2 BAND EDGE MEASUREMENTS – Bottom Channel

2.2.1 Specification Reference

FCC Part 15.247(c)

2.2.2 Equipment Under Test

Intermec 730 Handheld Computer Terminal with 802.11b Radio Module

2.2.3 Date of Test

10 – 12 December 2003

2.2.4 Test Equipment Used

The following major items of test equipment identified in Section 3.1 were used for the above tests.

Items: 5 – 10.

2.2.5 Test Procedure

Testing to the requirements of FCC CFR 47: Part 15 Subpart C, Section 15.205, for Restricted Bands of Operation was carried out on the Measurement Test Facility detailed in Annex A.

EUT was operating at maximum power on the bottom Channel.

Measurement was made at the 2.390GHz Band Edge

Performed by: J Holcombe, EMC Engineer

2.2.6 Test Results

Measurement Peak value at 2.390GHz were 56.1dB μ V/m

Measurement Average value at 2.390GHz were 42.7dB μ V/m



2.3 BAND EDGE MEASUREMENTS – Top Channel

2.3.1 Specification Reference

FCC Part 15.247(c)

2.3.2 Equipment Under Test

Intermec 730 Handheld Computer Terminal with 802.11b Radio Module

2.3.3 Date of Test

10 – 12 December 2003

2.3.4 Test Equipment Used

The following major items of test equipment identified in Section 3.1 were used for the above tests.

Items: 5 – 10

2.3.5 Test Procedure

Testing to the requirements of FCC CFR 47: Part 15 Subpart C, Section 15.205, for Restricted Bands of Operation was carried out on the Measurement Test Facility detailed in Annex A.

EUT was operating at maximum power on the top channel

Measurement made at the 2.4835GHz Band Edge.

Performed by: J Holcombe, EMC Engineer

2.3.6 Test Results

Measurement Peak value at 2.4835GHz were 55.8dB μ V/m

Measurement Average value at 2.4835GHz were 41.8dB μ V/m



2.4 MAXIMUM PEAK OUTPUT POWER (EIRP Method)

2.4.1 Specification Reference

FCC CFR 47: Part 15 Subpart C, Section 15.247(b)(3)

2.4.2 Equipment Under Test

Intermec 730 Handheld Computer Terminal with 802.11b Radio Module

2.4.3 Date of Test

10 – 12 Decemebr 2003

2.4.4 Test Equipment Used

The following major items of test equipment identified in Section 3.1 were used for the above tests.

Items: 5 – 11

2.4.5 Test Procedure

Test Performed in accordance with FCC CFR 47: Part 15.247(b)(1).

The EUT contains an integral antenna and therefore the Maximum Peak Output Power was made using the EIRP method.


The Spectrum Analyser was tuned to the test frequency. The device Output Power setting was controlled as specified in the Product Information, Section 1.5 of this document. The device was then rotated through 360 degrees until the highest power level was observed in both horizontal and vertical polarisation. The device was then replaced with a substitution antenna, who's input signal level into the antenna was adjusted until the received level matched that of the previously detected emission.

2.4.6 Test Results

The EUT met the requirements of FCC CFR 47: Part 15 Subpart C, Section 15.247(b)(3) for Maximum Peak Output Power.

Measurements were made with the EUT in RLAN Mode.

Frequency (MHz)	Result EIRP (dBm)	Result EIRP (mW)
2412	19.0	79.4
2437	19.8	95.5
2462	20.2	104.7
Limit	<+36dBm or <4W	



SECTION 3

TEST EQUIPMENT USED & MEASUREMENT UNCERTAINTIES



3.1 TEST EQUIPMENT USED

Item	Instrument	Manufacturer	Type No	EMC / INV No	Cal. Due
1	Spectrum Analyser	Hewlett Packard	8542E	2286	03/12/2003
2	Bilog Antenna	Chase	CBL6143	2860	11/04//2004
3	Turntable Controller	HD GmbH	HD 050	2528	TU
4	Screened Room 5	SIE	EAC54300	2533	TU
5	Low Noise Amplifier	Miteq	AMF-3d-001080-18-13P	2457	TU
6	HF Amplifier	Miteq	AMF-4F-080180	2430	TU
7	EMCO RG Antenna	EMC	3115	2297	07/04/2004
8	EMCO RG Antenna	EMC	3115	2397	07/04//2004
9	Signal Generator	Rohde & Schwarz	SMR 40	2768	18/09/2004
10	EMI Test Receiver	Rohde & Schwarz	ESIB40	2917	04/02/2004
11	HP8990a Peak Power	Hewlett Packard	8990A	1670	14/08/2004

TU – Traceability Unscheduled



3.2 MEASUREMENT UNCERTAINTY

For a 95% confidence level, the measurement uncertainties for defined systems are:-

IN THE FREQUENCY RANGE 30MHz TO 1000MHz		
TEST	FREQUENCY	AMPLITUDE
For Radiated Emissions, Quasi-Peak Measurements taken in Zero Span using the Hewlett Packard EMI Receiver and Bilog Antenna	$\pm 2 \times 10^{-7} \times$ Centre Frequency	5.15dB calculated in accordance with CISPR 16-4
IN THE FREQUENCY RANGE 1GHz TO 25GHz		
TEST	FREQUENCY	AMPLITUDE
For Spurious Radiated Emissions measurements	$\pm 2 \times 10^{-7} \times$ Centre Frequency	± 3.4 dB
For Effective Radiated Power (ERP) measurements	Not Applicable	± 1.45 dBm



SECTION 4

PHOTOGRAPHS OF TEST SAMPLE



4.1 PHOTOGRAPHS OF EQUIPMENT





4.1 PHOTOGRAPHS OF EQUIPMENT - Continued






4.1 PHOTOGRAPHS OF EQUIPMENT - Continued





4.1 PHOTOGRAPHS OF EQUIPMENT - Continued

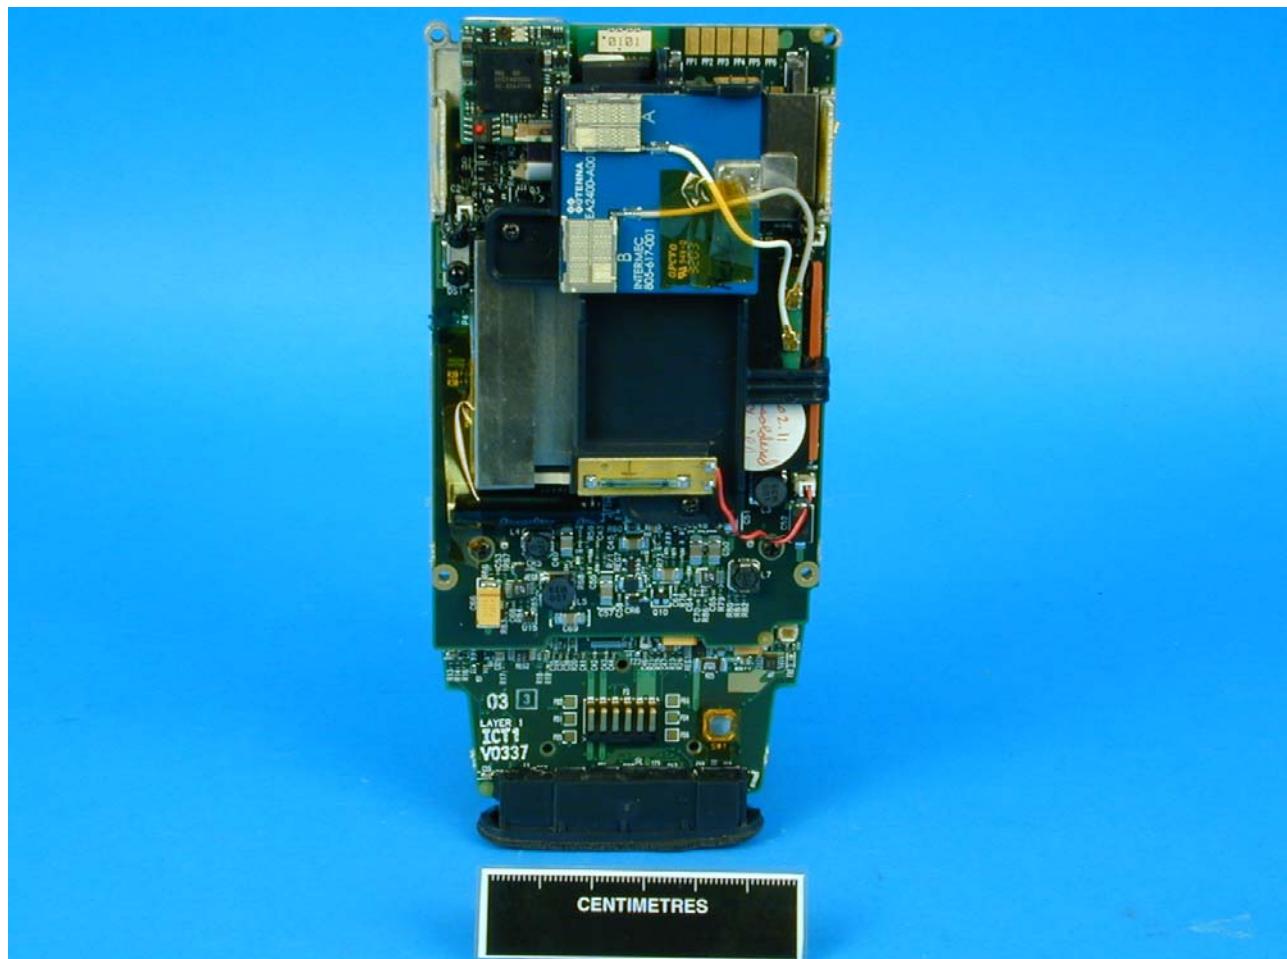




4.1 PHOTOGRAPHS OF EQUIPMENT - Continued





4.1 PHOTOGRAHS OF EQUIPMENT - Continued

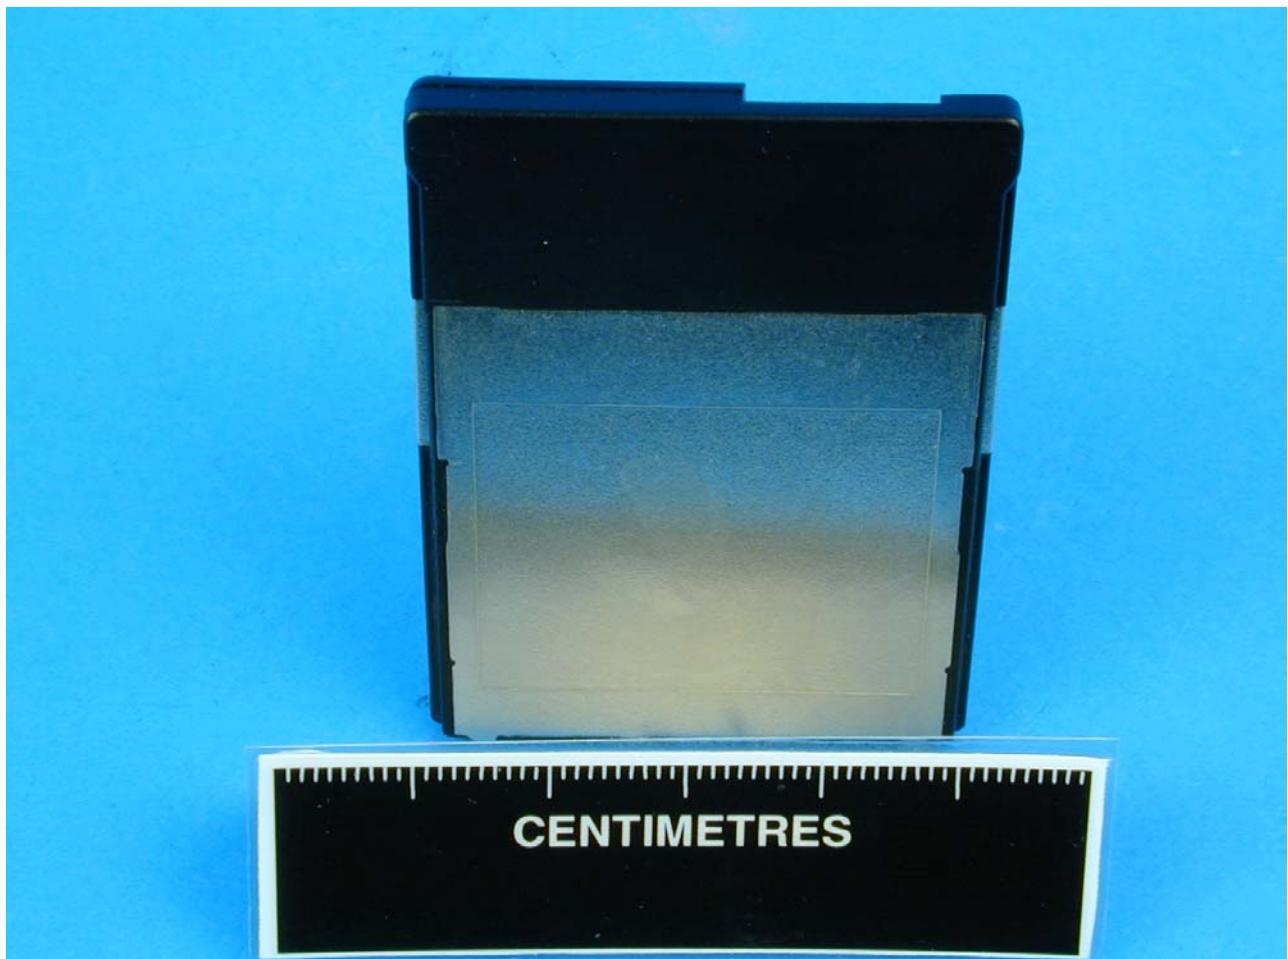



SECTION 5

ACCREDITATION, DISCLAIMERS AND COPYRIGHT



5.1 ACCREDITATION, DISCLAIMERS AND COPYRIGHT



This report relates only to the actual item/items tested.

Our UKAS Accreditation does not cover opinions and interpretations and any expressed are outside the scope of our UKAS Accreditation.

Results of tests not covered by our UKAS Accreditation Schedule are marked NUA
(Not UKAS Accredited).

This report must not be reproduced without the written permission of TÜV Product Service Limited

© 2003 TÜV Product Service Limited

ANNEX A
FCC SITE COMPLIANCE LETTER



FEDERAL COMMUNICATIONS COMMISSION

Laboratory Division
7435 Oakland Mills Road
Columbia, MD 21046

October 18, 2002

Registration Number: 90987

TUV Product Service Ltd
Segensworth Road
Titchfield
Fareham, Hampshire, PO15 5RH
United Kingdom
Attention: Kevan Asetts

Re: Measurement facility located at Titchfield
Anechoic chamber (3 meters) and 3 & 10 meter OATS
Date of Listing: October 18, 2002

Gentlemen:

Your request for registration of the subject measurement facility has been reviewed and found to be in compliance with the requirements of Section 2.948 of the FCC rules. The information has, therefore, been placed on file and the name of your organization added to the list of facilities whose measurement data will be accepted in conjunction with applications for Certification under Parts 15 or 18 of the Commission's Rules. Please note that the file must be updated for any changes made to the facility and the registration must be renewed at least every three years.

Measurement facilities that have indicated that they are available to the public to perform measurement services on a fee basis may be found on the FCC website www.fcc.gov under E-Filing, OET Equipment Authorization Electronic Filing, Test Firms.

Sincerely,

A handwritten signature in black ink that reads "Thomas W. Phillips".

Thomas W Phillips
Electronics Engineer