



FCC TEST REPORT

REPORT NO.: RF960125A06

MODEL NO.: N101P-401B, 00052491, 98505

RECEIVED: Jan. 25, 2007

TESTED: Jan. 25 ~ Feb. 2, 2007

ISSUED: Feb. 6, 2007

APPLICANT: PRIMAX ELECTRONICS LTD.

ADDRESS: No. 669, Ruey Kuang Road, Neihu, Taipei,
Taiwan, R.O.C.

ISSUED BY: Advance Data Technology Corporation

LAB LOCATION: No. 47, 14th Ling, Chia Pau Tsuen, Lin Kou
Hsiang 244, Taipei Hsien, Taiwan, R.O.C.

This test report consists of 36 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, A2LA or any government agencies. The test results in the report only apply to the tested sample.



Table of Contents

1.	CERTIFICATION	4
2.	SUMMARY OF TEST RESULTS	5
2.1	MEASUREMENT UNCERTAINTY	5
3.	GENERAL INFORMATION	6
3.1	GENERAL DESCRIPTION OF EUT	6
3.2	DESCRIPTION OF TEST MODES	7
3.2.1	CONFIGURATION OF SYSTEM UNDER TEST	8
3.2.2	TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL:	9
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS	10
3.4	DESCRIPTION OF SUPPORT UNITS	10
4.	TEST TYPES AND RESULTS	11
4.1	CONDUCTED EMISSION MEASUREMENT	11
4.2	RADIATED EMISSION Measurement	11
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT	11
4.2.2	TEST INSTRUMENTS	12
4.2.3	TEST PROCEDURES	13
4.2.4	DEVIATION FROM TEST STANDARD	13
4.2.5	TEST SETUP	14
4.2.6	EUT OPERATING CONDITIONS	14
4.2.7	TEST RESULTS	15
4.3	6dB BANDWIDTH MEASUREMENT	19
4.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT	19
4.3.2	TEST INSTRUMENTS	19
4.3.3	TEST PROCEDURE	19
4.3.4	DEVIATION FROM TEST STANDARD	19
4.3.5	TEST SETUP	19
4.3.6	EUT OPERATING CONDITIONS	19
4.3.7	TEST RESULTS	20
4.4	MAXIMUM PEAK OUTPUT POWER	22
4.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	22
4.4.2	INSTRUMENTS	22
4.4.3	TEST PROCEDURES	22
4.4.4	DEVIATION FROM TEST STANDARD	22
4.4.5	TEST SETUP	23
4.4.6	EUT OPERATING CONDITIONS	23
4.4.7	TEST RESULTS	23
4.5	POWER SPECTRAL DENSITY MEASUREMENT	26
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	26
4.5.2	TEST INSTRUMENTS	26
4.5.3	TEST PROCEDURE	26
4.5.4	DEVIATION FROM TEST STANDARD	26
4.5.5	TEST SETUP	26
4.5.6	EUT OPERATING CONDITION	26



4.5.7	TEST RESULTS	27
4.6	BAND EDGES MEASUREMENT	29
4.6.1	LIMITS OF BAND EDGES MEASUREMENT	29
4.6.2	TEST INSTRUMENTS	29
4.6.3	TEST PROCEDURE	29
4.6.4	DEVIATION FROM TEST STANDARD	29
4.6.5	EUT OPERATING CONDITION	29
4.6.6	TEST RESULTS	30
4.7	ANTENNA REQUIREMENT	34
4.7.1	STANDARD APPLICABLE	34
4.7.2	ANTENNA CONNECTED CONSTRUCTION	34
5.	INFORMATION ON THE TESTING LABORATORIES	35
	APPENDIX-A	A-1



1. CERTIFICATION

PRODUCT: Mouse
MODEL NO.: N101P-401B (Brand Name: PRIMAX)
00052491 (Brand Name: HAMA)
98505 (Brand Name: GE)
APPLICANT: PRIMAX ELECTRONICS LTD.
TESTED: Jan. 25 ~ Feb. 2, 2007
TEST SAMPLE: ENGINEERING SAMPLE
STANDARDS: FCC Part 15, Subpart C (Section 15.247),
ANSI C63.4-2003

The above equipment (model: N101P-401B) has been tested by **Advance Data Technology Corporation**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : *Jessica Cheng* , **DATE:** Feb. 6, 2007
(Jessica Cheng)

TECHNICAL ACCEPTANCE : *Jamison Chan* , **DATE:** Feb. 6, 2007
Responsible for RF (Jamison Chan)

APPROVED BY : *Ken Liu* , **DATE:** Feb. 6, 2007
(Ken Liu / Deputy Manager)

2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C (Section 15.247)			
Standard Section	Test Type and Limit	Result	Remark
15.207	AC Power Conducted Emission	N/A	Power supply is 1.5 Vdc from battery
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit: min. 500kHz	PASS	Meet the requirement of limit.
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit.
15.247(d)	Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit. Minimum passing margin is -5.98dB at 48.88MHz
15.247(e)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit.
15.247(d)	Band Edge Measurement Limit: 20dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Measurement	Uncertainty
Radiated emissions	3.42dB

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

EUT	Mouse
MODEL NO.	N101P-401B, 00052491, 98505
FCC ID	EMJM2AX01
POWER SUPPLY	1.5Vdc from battery
MODULATION TYPE	GFSK
RADIO TECHNOLOGY	DSSS
FREQUENCY RANGE	2402MHz ~2474MHz
NUMBER OF CHANNEL	73
ANTENNA TYPE	monopole antenna with -3.18dBi Gain
DATA CABLE	N/A
I/O PORT	N/A

NOTE:

1. The EUT is a wireless Mouse, which has following models:

Brand	Model no.	Differentiation
PRIMAX	N101P-401B	Marketing differentiation
HAMA	00052491	
GE	98505	

For the test, model no.: **N101P-401B** was selected as the representative model for the test and its data was recorded in this report.


3. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

3.2 DESCRIPTION OF TEST MODES

Seventy-three channels are provided to this EUT:

CHANNEL	FREQ. (MHZ)						
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2431	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455		
14	2416	34	2436	54	2456		
15	2417	35	2437	55	2457		
16	2418	36	2438	56	2458		
17	2419	37	2439	57	2459		
18	2420	38	2440	58	2460		
19	2421	39	2441	59	2461		

3.2.1 CONFIGURATION OF SYSTEM UNDER TEST

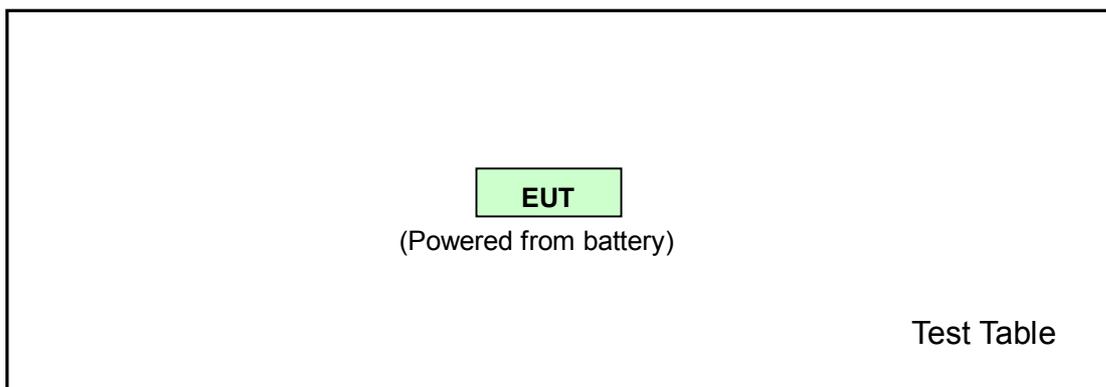

3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL:

EUT configure mode	Applicable to				Description
	PLC	RE<1G	RE≥1G	APCM	
-	Note	√	√	√	-

Where PLC: Power Line Conducted Emission RE<1G RE: Radiated Emission below 1GHz
 RE≥1G: Radiated Emission above 1GHz APCM: Antenna Port Conducted Measurement

Note: No need to concern of Conducted Emission due to the EUT is powered by battery.

RADIATED EMISSION TEST (BELOW 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

Available Channel	Tested Channel	Modulation Type
0 to 72	72	GFSK

RADIATED EMISSION TEST (ABOVE 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

Available Channel	Tested Channel	Modulation Type
0 to 72	0, 42, 72	GFSK

BANDEDGE MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

Available Channel	Tested Channel	Modulation Type
0 to 72	0, 72	GFSK

ANTENNA PORT CONDUCTED MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

Available Channel	Tested Channel	Modulation Type
0 to 72	0, 42, 72	GFSK



3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C. (15.247)

ANSI C63.4-2003

All test items have been performed and recorded as per the above standards.

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit.

4. TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

N/A

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
HP Preamplifier	8447D	2432A03504	May 21, 2007
HP Preamplifier	8449B	3008A01924	Sep. 05, 2007
HP Preamplifier	8449B	3008A01638	Sep. 17, 2007
ROHDE & SCHWARZ TEST RECEIVER	ESI7	836697/012	Oct. 24, 2007
Schwarzbeck Antenna	VULB 9168	137	Feb. 21, 2007
Schwarzbeck Antenna	VHBA 9123	480	Mar. 30, 2007
EMCO Horn Antenna	3115	6714	Oct. 24, 2007
EMCO Horn Antenna	3115	9312-4192	Mar. 14, 2007
ADT. Turn Table	TT100	0306	NA
ADT. Tower	AT100	0306	NA
Software	ADT_Radiated_V7.6.011	NA	NA
SUHNER RF cable	SF104-26.5	CABLE-CH6-17m-01	Dec. 11, 2007
ROHDE & SCHWARZ Spectrum Analyzer	FSP 40	100036	Mar. 16. 2007

- NOTE:**
1. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.
 2. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 3. The test was performed in ADT Chamber No. 6.
 4. The Industry Canada Reference No. IC 3789-6.

4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi- anechoic. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak method or average method as specified and then reported in data sheet.


NOTE:

1. The resolution bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth is 1MHz and video bandwidth of test receiver/spectrum analyzer is 3MHz for Peak detection at frequency above 1GHz. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz for Average detection (AV) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation

4.2.5 TEST SETUP

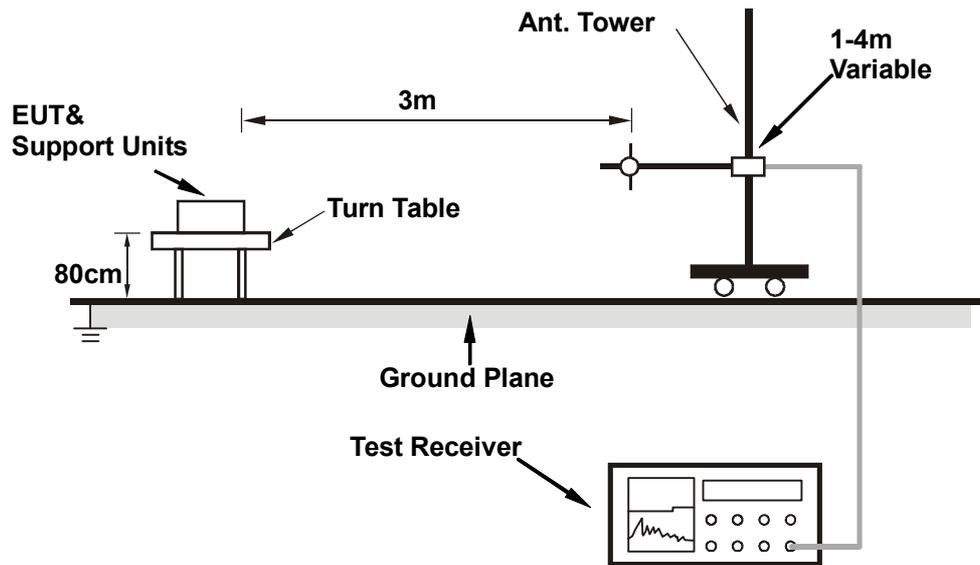

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.6 EUT OPERATING CONDITIONS

Set the EUT under transmission condition continuously at specific channel frequency.

4.2.7 TEST RESULTS

RADIATED WORST CASE DATA: BELOW 1GHz

MODULATION TYPE	GFSK	CHANNEL	72
INPUT POWER	1.5Vdc	FREQUENCY RANGE	Below 1 GHz
ENVIRONMENTAL CONDITIONS	19deg. C, 75% RH, 1008hPa	DETECTOR FUNCTION	Quasi-Peak
TESTED BY	Jun Wu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	30.00	23.67 QP	40.00	-16.33	1.48 H	265	11.16	12.51
2	741.46	26.11 QP	46.00	-19.89	1.32 H	94	-1.32	27.43
3	758.96	26.58 QP	46.00	-19.42	1.28 H	115	-1.26	27.84
4	811.44	27.31 QP	46.00	-18.69	1.42 H	187	-0.83	28.14
5	825.05	26.35 QP	46.00	-19.65	1.24 H	184	-1.90	28.25
6	865.87	26.98 QP	46.00	-19.02	1.19 H	97	-1.82	28.80
7	904.75	28.22 QP	46.00	-17.78	1.20 H	151	-1.43	29.65
8	928.08	28.35 QP	46.00	-17.65	1.07 H	268	-1.83	30.18

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	47.49	30.72 QP	40.00	-9.28	1.00 V	37	15.54	15.19
2	747.29	27.12 QP	46.00	-18.88	1.52 V	190	-0.56	27.68
3	811.44	27.15 QP	46.00	-18.85	1.32 V	355	-0.99	28.14
4	834.77	27.33 QP	46.00	-18.67	1.46 V	61	-1.00	28.33
5	881.42	28.13 QP	46.00	-17.87	1.39 V	319	-1.01	29.14
6	914.47	28.72 QP	46.00	-17.28	1.44 V	1	-1.15	29.87

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

RADIATED WORST CASE DATA: ABOVE 1GHz

MODULATION TYPE	GFSK	CHANNEL	0
INPUT POWER	1.5Vdc	FREQUENCY RANGE	1 ~ 25 GHz
ENVIRONMENTAL CONDITIONS	19deg. C, 75% RH, 1008hPa	DETECTOR FUNCTION	Peak (PK) Average (AV)
TESTED BY	Jun Wu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	58.20 PK	74.00	-15.80	1.05 H	177	23.50	34.70
2	2390.00	45.68 AV	54.00	-8.32	1.05 H	177	10.98	34.70
3	*2402.00	87.46 PK			1.05 H	177	52.74	34.72
4	*2402.00	59.86 AV			1.05 H	177	25.14	34.72
5	4804.00	65.77 PK	74.00	-8.23	1.00 H	171	24.07	41.69
6	4804.00	38.17 AV	54.00	-15.83	1.00 H	171	-3.53	41.69

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	58.09 PK	74.00	-15.91	1.34 V	18	23.39	34.70
2	2390.00	45.86 AV	54.00	-8.14	1.34 V	18	11.16	34.70
3	*2402.00	83.24 PK			1.34 V	18	48.52	34.72
4	*2402.00	55.64 AV			1.34 V	18	20.92	34.72
5	4804.00	67.02 PK	74.00	-6.98	1.11 V	163	25.32	41.69
6	4804.00	39.42 AV	54.00	-14.58	1.11 V	163	-2.28	41.69

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “ : Fundamental frequency

MODULATION TYPE	GFSK	CHANNEL	42
INPUT POWER	1.5Vdc	FREQUENCY RANGE	1 ~ 25 GHz
ENVIRONMENTAL CONDITIONS	19deg. C, 75% RH, 1008hPa	DETECTOR FUNCTION	Peak (PK) Average (AV)
TESTED BY	Jun Wu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2444.00	89.35 PK			1.05 H	188	54.53	34.82
2	*2444.00	61.75 AV			1.05 H	188	26.93	34.82
3	4888.00	66.65 PK	74.00	-7.35	1.00 H	171	24.74	41.91
4	4888.00	39.05 AV	54.00	-14.95	1.00 H	171	-2.86	41.91

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2444.00	83.19 PK			1.03 V	220	48.37	34.82
2	*2444.00	55.59 AV			1.03 V	220	20.77	34.82
3	4888.00	68.02 PK	74.00	-5.98	1.10 V	165	26.11	41.91
4	4888.00	40.42 AV	54.00	-13.58	1.10 V	165	-1.49	41.91

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “ : Fundamental frequency

MODULATION TYPE	GFSK	CHANNEL	72
INPUT POWER	1.5Vdc	FREQUENCY RANGE	1 ~ 25 GHz
ENVIRONMENTAL CONDITIONS	19deg. C, 75% RH, 1008hPa	DETECTOR FUNCTION	Peak (PK) Average (AV)
TESTED BY	Jun Wu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2474.00	90.99 PK			1.03 H	180	56.11	34.88
2	*2474.00	63.39 AV			1.03 H	180	28.51	34.88
3	2483.50	58.57 PK	74.00	-15.43	1.03 H	180	23.67	34.90
4	2483.50	46.03 AV	54.00	-7.97	1.03 H	180	11.13	34.90
5	4948.00	61.86 PK	74.00	-12.14	1.10 H	165	19.80	42.07
6	4948.00	34.26 AV	54.00	-19.74	1.10 H	165	-7.80	42.07

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2474.00	86.93 PK			1.03 V	222	52.05	34.88
2	*2474.00	59.33 AV			1.03 V	222	24.45	34.88
3	2483.50	57.52 PK	74.00	-16.48	1.03 V	222	22.62	34.90
4	2483.50	46.22 AV	54.00	-7.78	1.03 V	222	11.32	34.90
5	4948.00	64.17 PK	74.00	-9.83	1.10 V	157	22.11	42.07
6	4948.00	36.57 AV	54.00	-17.43	1.10 V	157	-5.49	42.07

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “ : Fundamental frequency

4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSP 40	100036	Mar. 16. 2007

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100kHz RBW and 100kHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation

4.3.5 TEST SETUP



4.3.6 EUT OPERATING CONDITIONS


The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.

4.3.7 TEST RESULTS


MODULATION TYPE	GFSK	CHANNEL	0, 42, 72
INPUT POWER	1.5Vdc	ENVIRONMENTAL CONDITIONS	16deg. C, 63%RH, 1013hPa
TESTED BY	Jun Wu		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
0	2402	0.52	0.5	PASS
42	2444	0.92	0.5	PASS
72	2474	0.99	0.5	PASS


CH 0

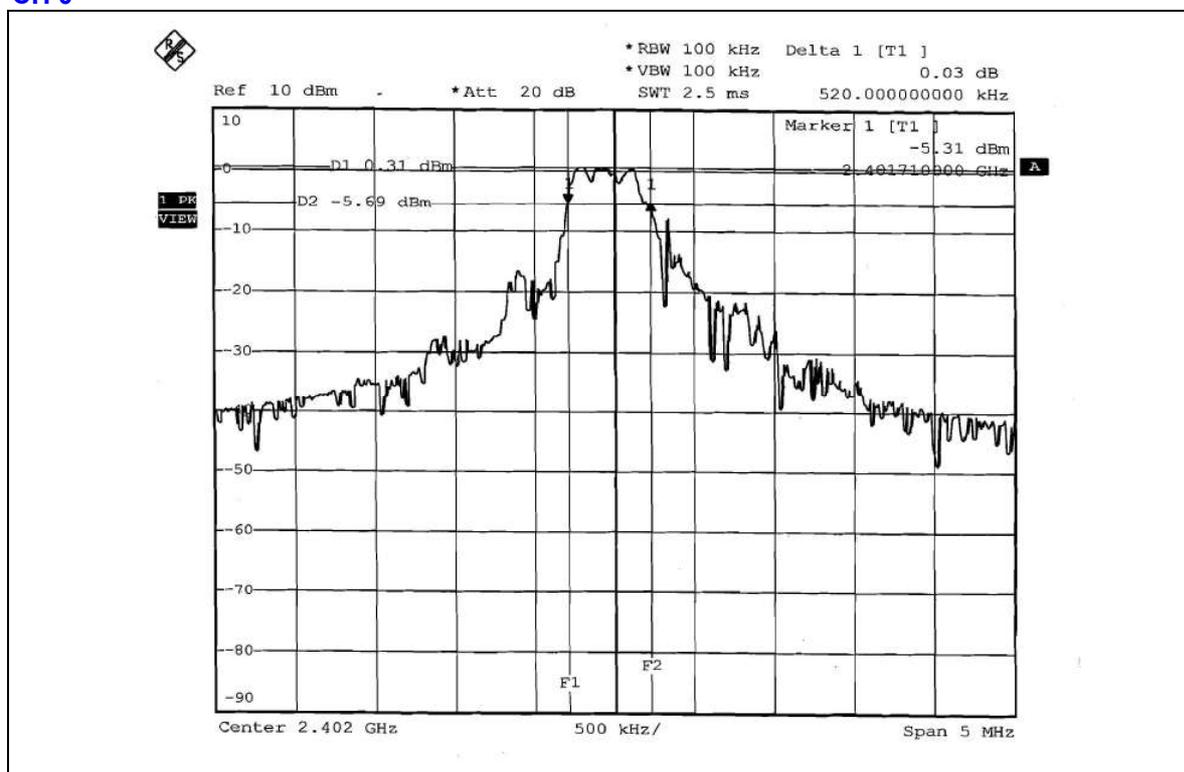

CH 42

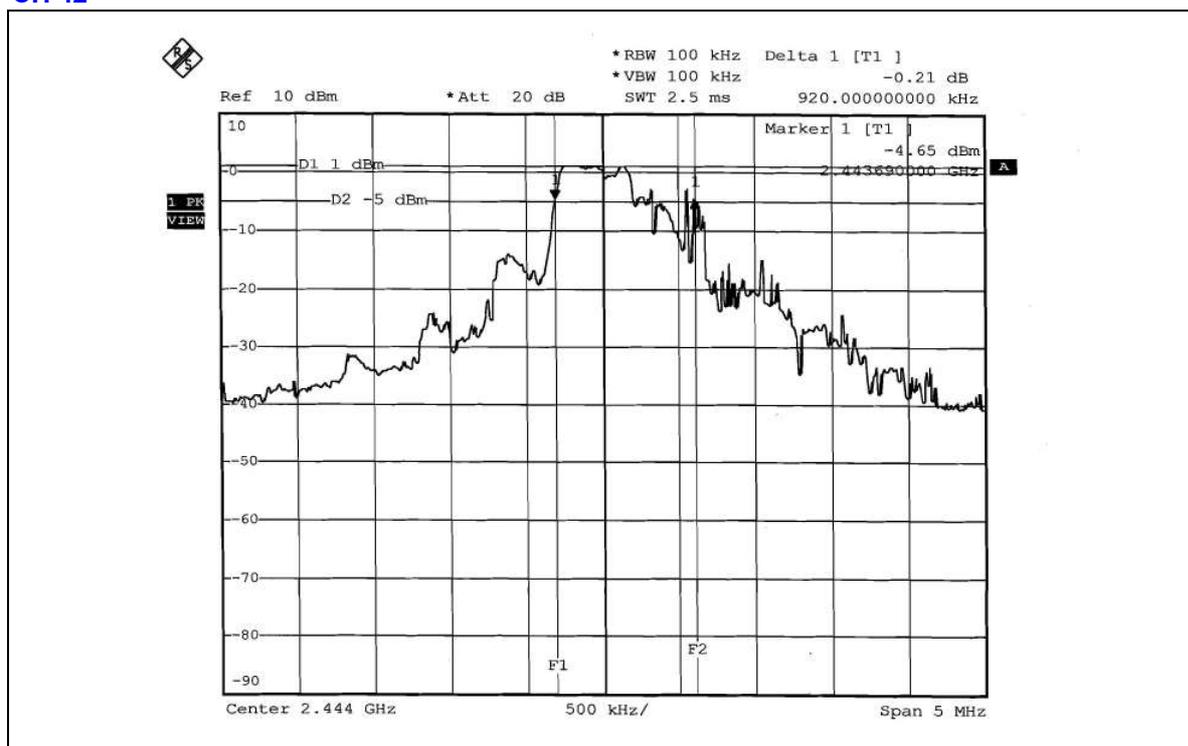

CH 72

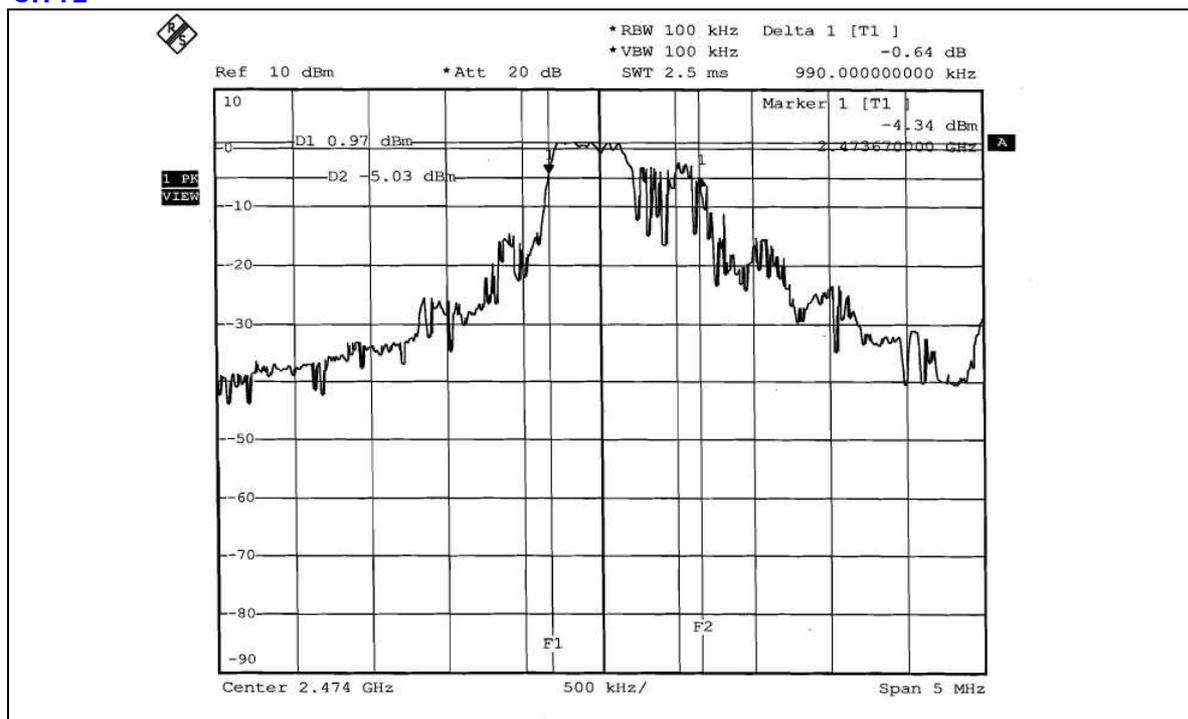



4.4 MAXIMUM PEAK OUTPUT POWER

4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

4.4.2 INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSP 40	100036	Mar. 16. 2007

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.4.3 TEST PROCEDURES


1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. The center frequency of the spectrum analyzer is set to the fundamental frequency and using 1 MHz RBW and 3 MHz VBW, the peak value was measured and recorded.
4. Repeat above procedures until all frequencies measured were complete.

Note: The spectrum plots are attached on following pages.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation

4.4.5 TEST SETUP

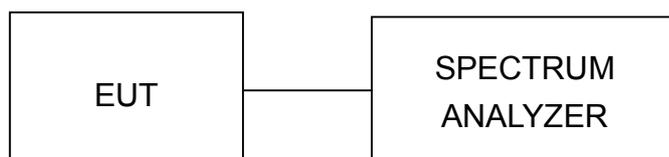

4.4.6 EUT OPERATING CONDITIONS


Same as Item 4.3.6

4.4.7 TEST RESULTS


MODULATION TYPE	GFSK	CHANNEL	0, 42, 72
INPUT POWER	1.5Vdc	ENVIRONMENTAL CONDITIONS	16deg. C, 63%RH, 1013hPa
TESTED BY	Jun Wu		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER OUTPUT (mW)	PEAK POWER LIMIT (dBm)	PASS/FAIL
0	2402	0.24	1.057	30	PASS
42	2444	0.94	1.242	30	PASS
72	2474	0.90	1.230	30	PASS


CH 0

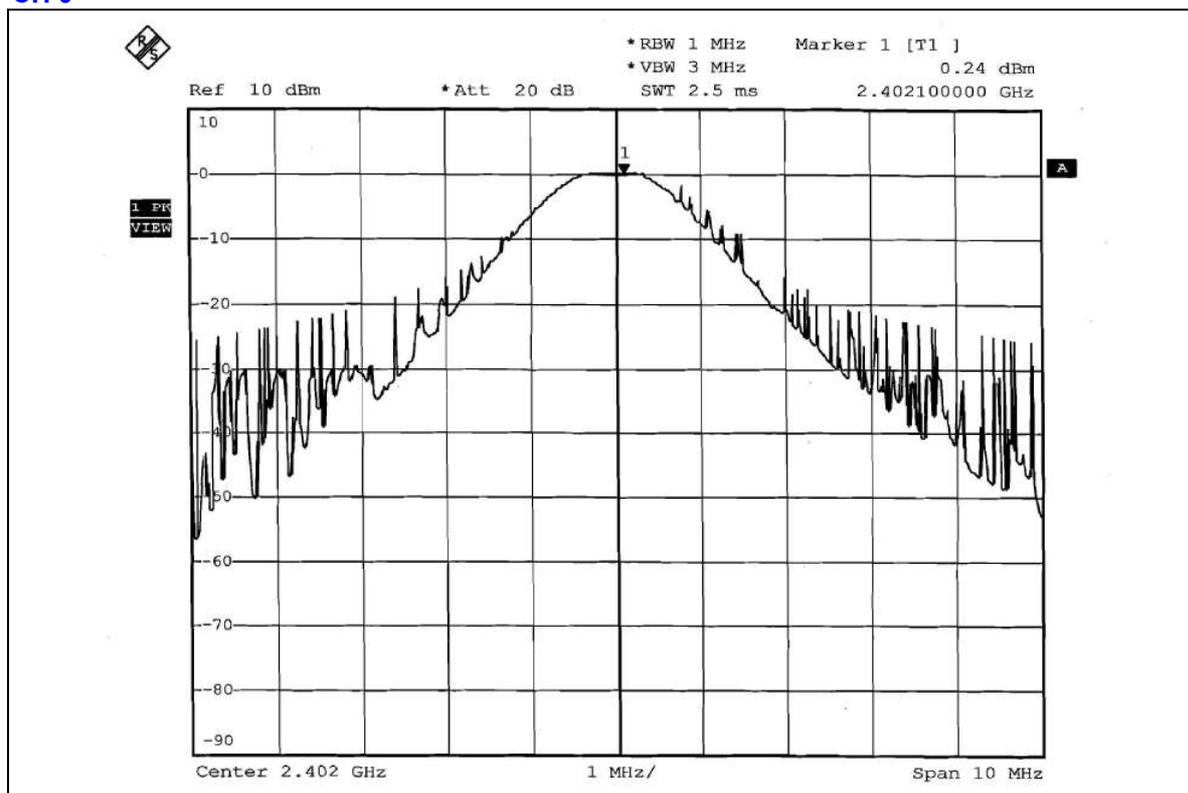

CH 42

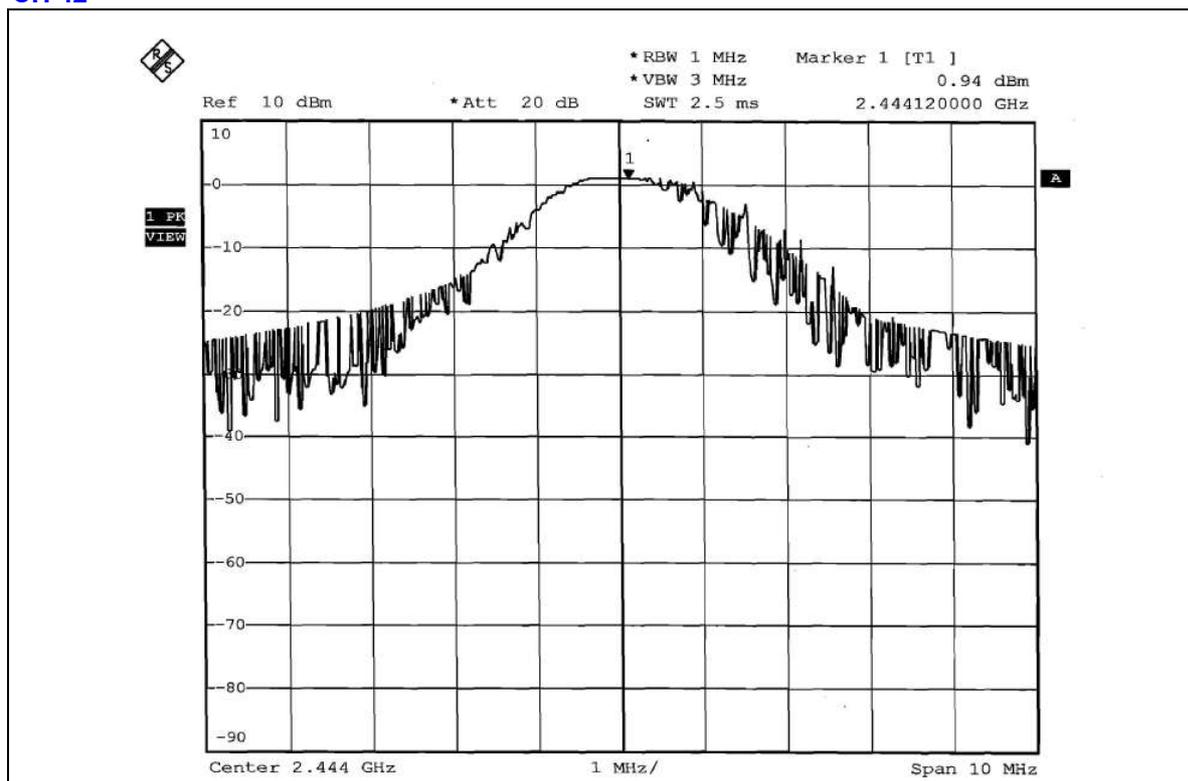

CH 72

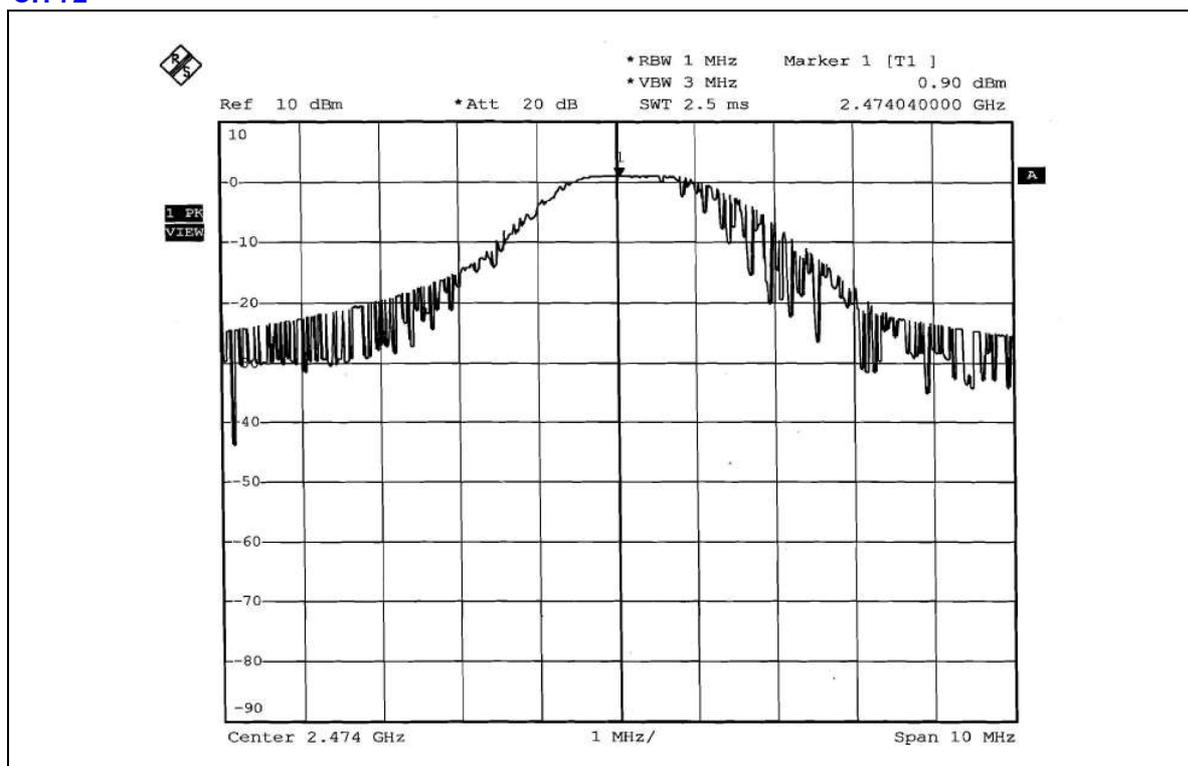

4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSP 40	100036	Mar. 16. 2007

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.5.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3kHz RBW and 30kHz VBW, set sweep time = span/3kHz.


The power spectral density was measured and recorded.

The sweep time is allowed to be longer than span/3kHz for a full response of the mixer in the spectrum analyzer.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation


4.5.5 TEST SETUP

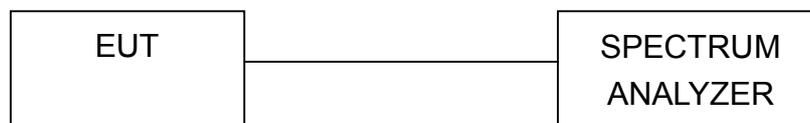


4.5.6 EUT OPERATING CONDITION

Same as Item 4.3.6

CH 42

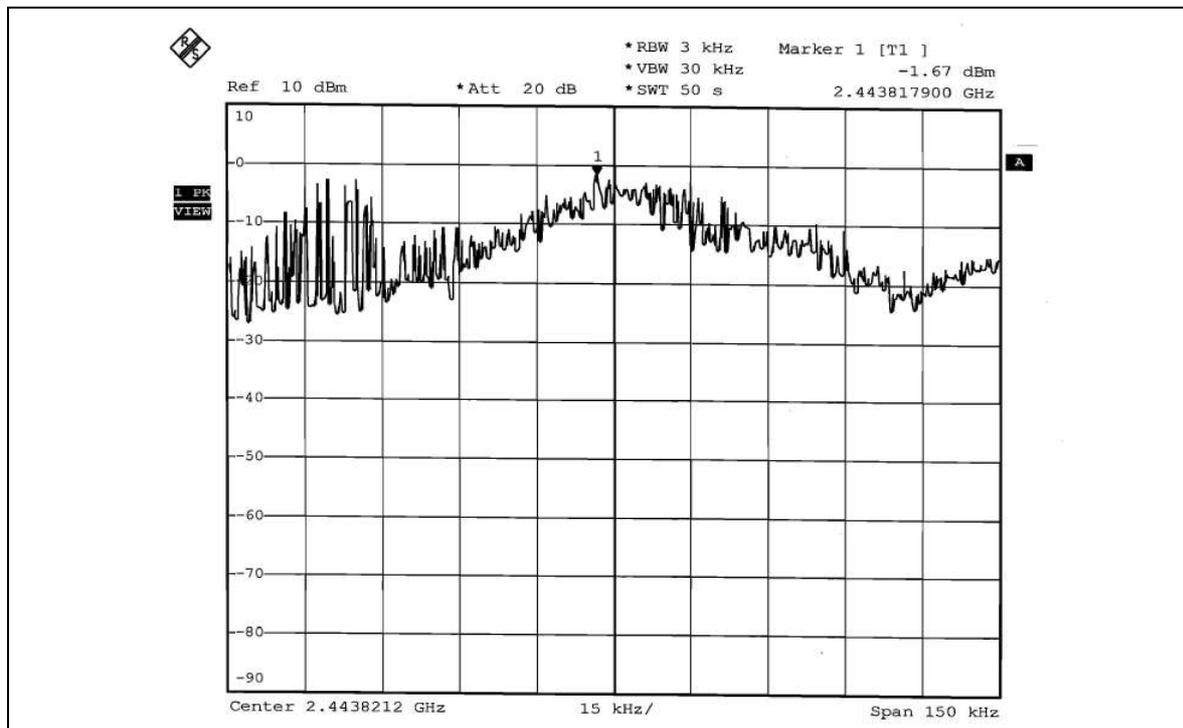

CH 72

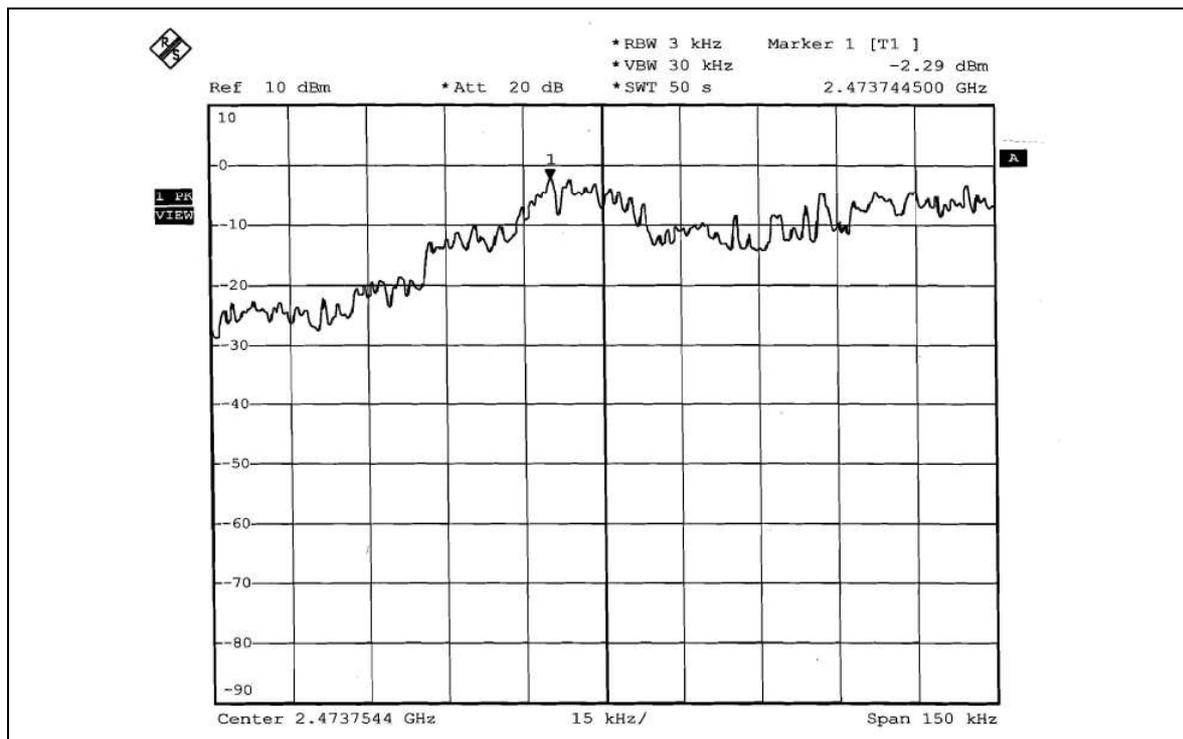

4.6 BAND EDGES MEASUREMENT

4.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSP 40	100036	Mar. 16. 2007

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low loss cable. Set both RBW and VBW of spectrum analyzer to 100 kHz and 100 kHz suitable frequency span including 100 MHz bandwidth from band edge. The band edges was measured and recorded.

The spectrum plots (Peak RBW=VBW=100kHz) are attached on the following pages.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation

4.6.5 EUT OPERATING CONDITION

Same as Item 4.3.6

4.6.6 TEST RESULTS

The spectrum plots are attached on the following 6 images. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(d).

Note 1:



The band edge emission plot on page 31 shows 29.65dBc between carrier maximum power and local maximum emission in restrict band (2.339GHz). The emission of carrier strength list in the test result of channel 0 at the item 4.2.7 is 87.46dBuV/m (Peak), so the maximum field strength in restrict band is $87.46 - 29.65 = 57.81$ dBuV/m which is under 74dBuV/m limit.



The band edge emission plot of on page 31 shows 68.85dBc between carrier maximum power and local maximum emission in restrict band (2.390GHz). The emission of carrier strength list in the test result of channel 0 at the item 4.2.7 is 59.86dBuV/m (Average), so the maximum field strength in restrict band is $59.86 - 68.85 = -8.99$ dBuV/m which is under 54dBuV/m limit.



Note 2:

The band edge emission plot on page 32 shows 49.25dBc between carrier maximum power and local maximum emission in restrict band (2.4847GHz). The emission of carrier strength list in the test result of channel 72 at the item 4.2.7 is 90.99dBuV/m (Peak), so the maximum field strength in restrict band is $90.99 - 49.25 = 41.74$ dBuV/m which is under 74dBuV/m limit.

The band edge emission plot of on page 33 shows 70.3dBc between carrier maximum power and local maximum emission in restrict band (2.4837GHz). The emission of carrier strength list in the test result of channel 72 at the item 4.2.7 is 63.39dBuV/m (Average), so the maximum field strength in restrict band is $63.39 - 70.3 = -6.91$ dBuV/m which is under 54dBuV/m limit.

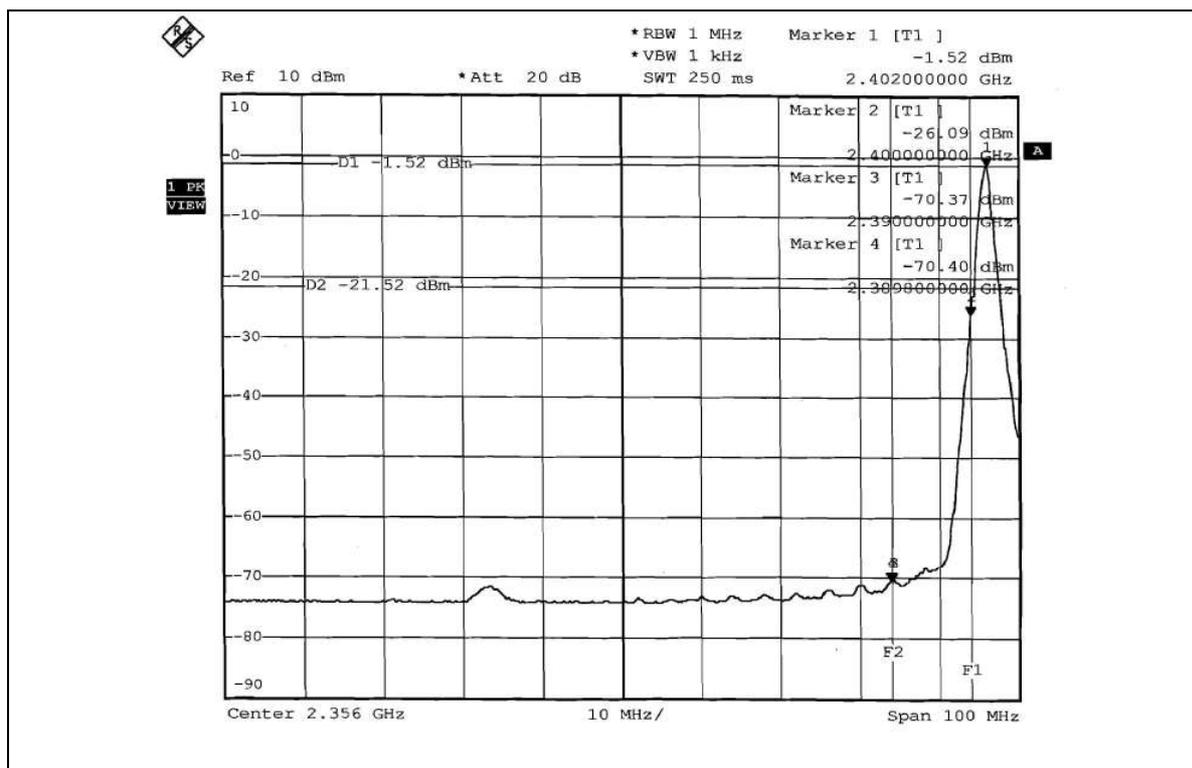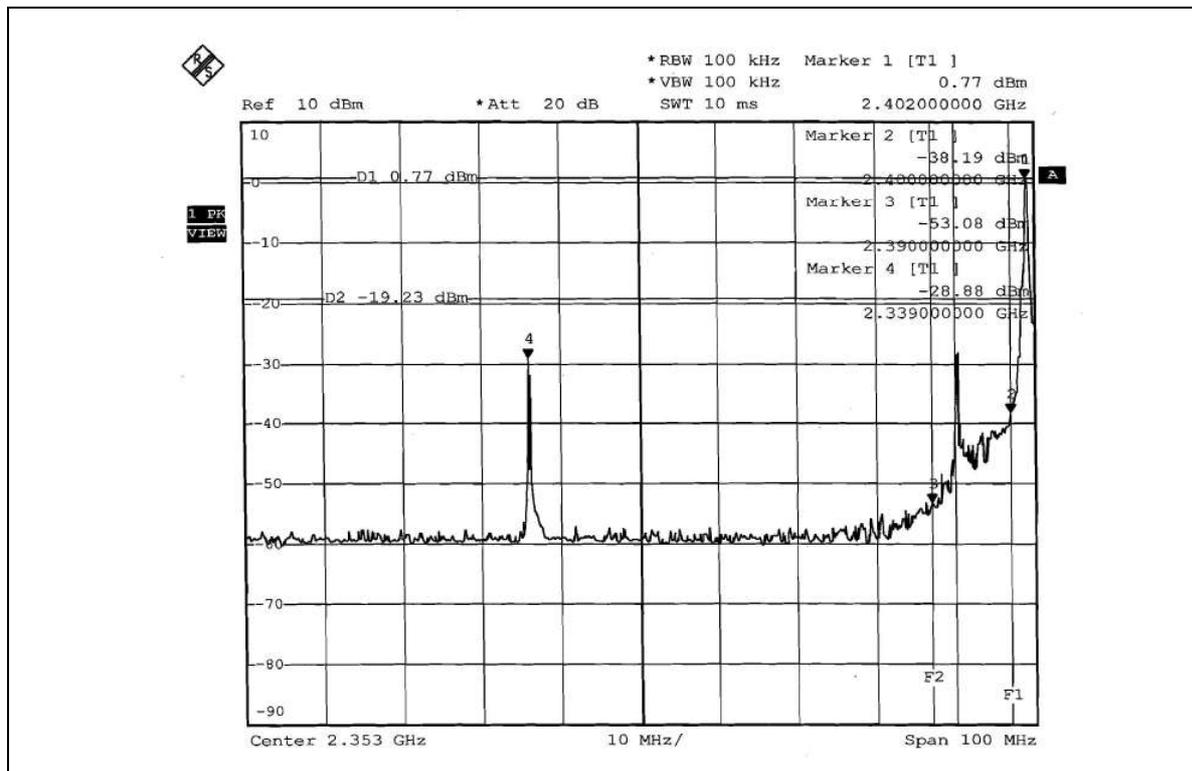

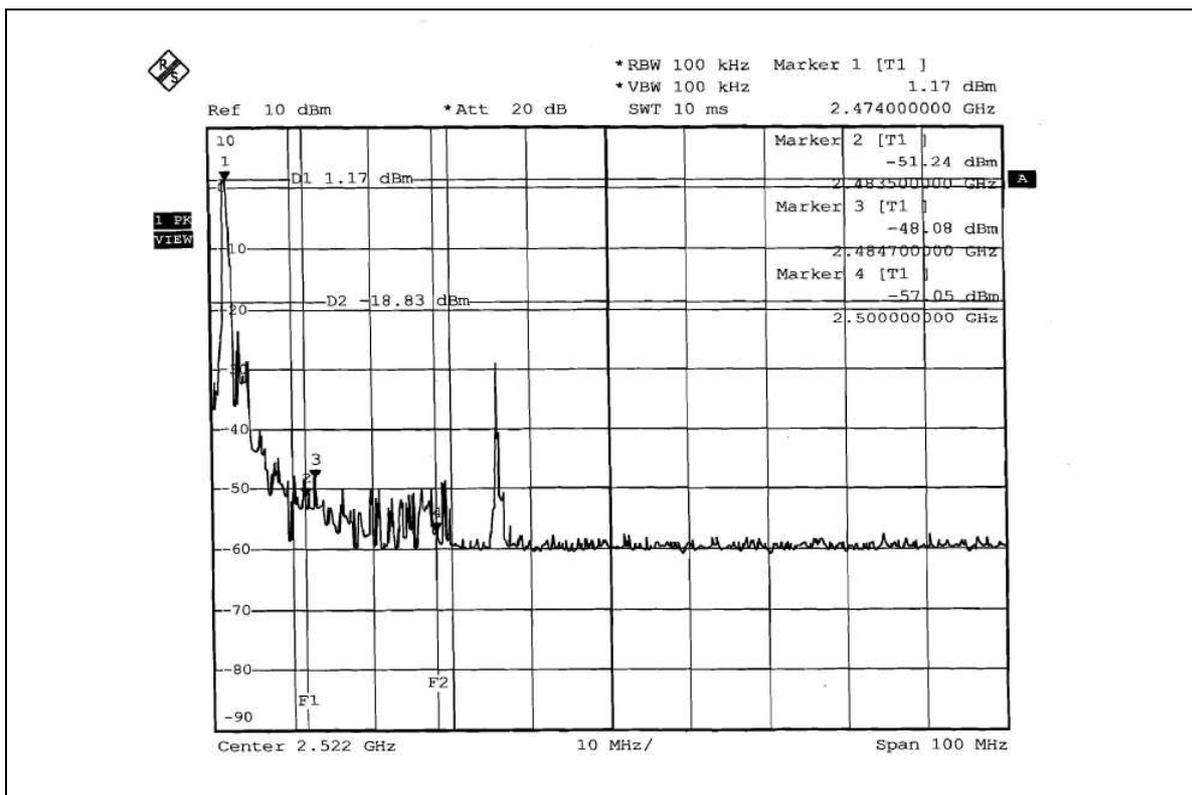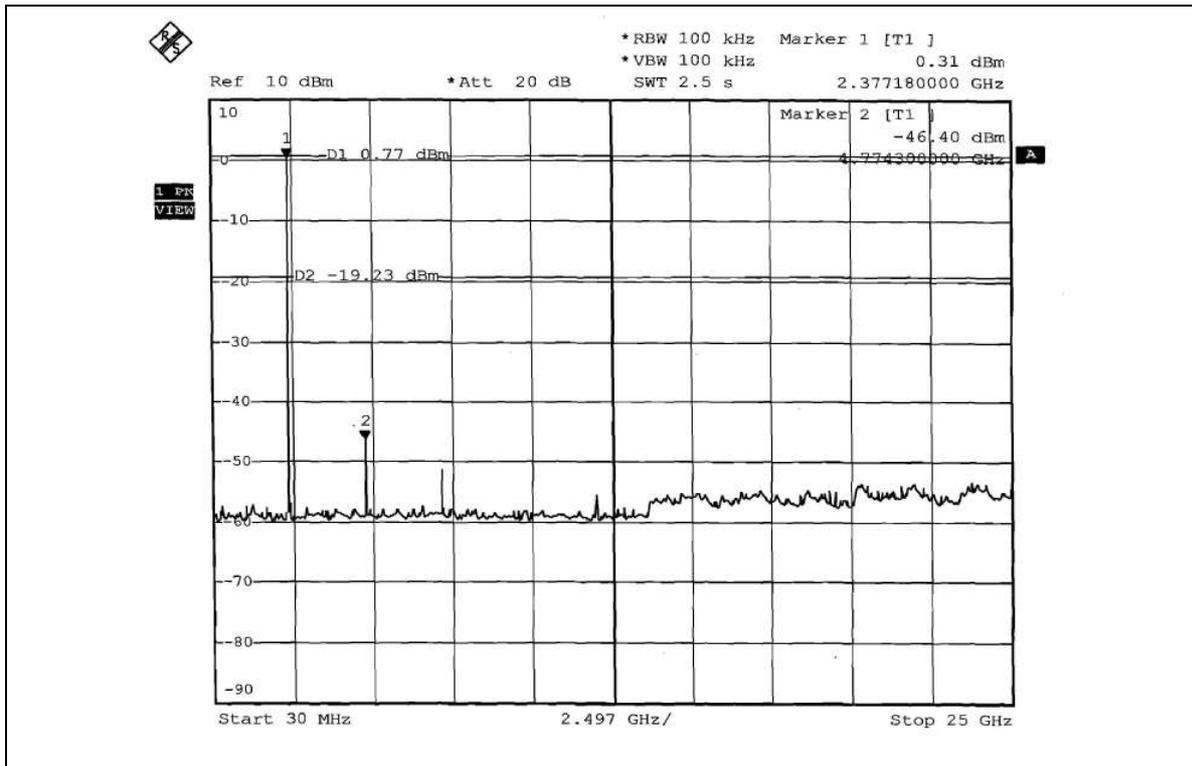

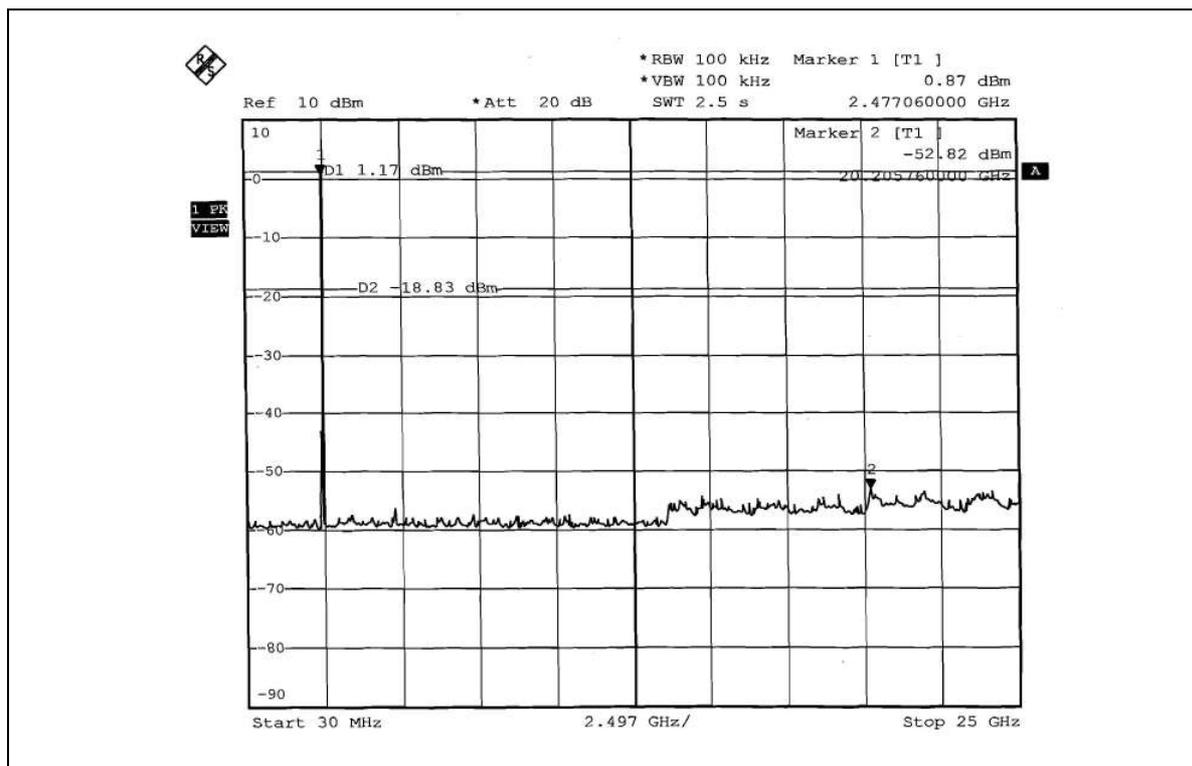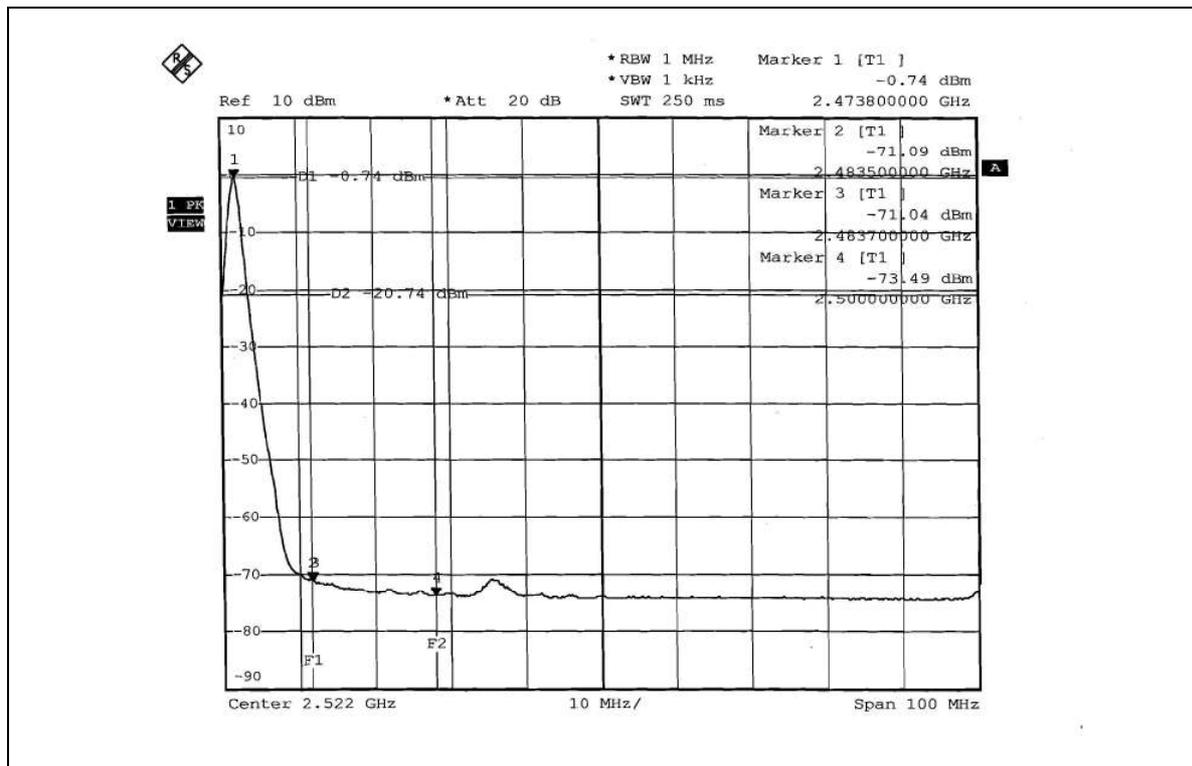

4.7 ANTENNA REQUIREMENT

4.7.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.7.2 ANTENNA CONNECTED CONSTRUCTION

The antenna used in this product is monopole antenna without connector. The maximum Gain of the antenna is -3.18dBi .



5. INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

USA	FCC, UL, A2LA
Germany	TUV Rheinland
Japan	VCCI
Norway	NEMKO
Canada	INDUSTRY CANADA , CSA
R.O.C.	CNLA, BSMI, NCC
Netherlands	Telefication
Singapore	PSB, GOST-ASIA(MOU)
Russia	CERTIS(MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site:

www.adt.com.tw/index.5/phtml. If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:
Tel: 886-2-26052180
Fax: 886-2-26051924

Hsin Chu EMC/RF Lab:
Tel: 886-3-5935343
Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety Telecom Lab:
Tel: 886-3-3183232
Fax: 886-3-3185050

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also



APPENDIX-A

MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.