



FCC TEST REPORT

REPORT NO.: RF970721A11

MODEL NO.: VGP-BMS77

RECEIVED: July 21, 2008

TESTED: July 24 ~ Aug. 4, 2008

ISSUED: Aug. 5, 2008

APPLICANT: PRIMAX ELECTRONICS LTD.

ADDRESS: No. 669, Ruey Kuang Road, Neihu, Taipei, Taiwan,
R.O.C.

ISSUED BY: Advance Data Technology Corporation

LAB LOCATION: No. 47, 14th Ling, Chia Pau Tsuen, Lin Kou Hsiang
244, Taipei Hsien, Taiwan, R.O.C.

This test report consists of 52 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by TAF or any government agencies. The test results in the report only apply to the tested sample.





TABLE OF CONTENTS

1.	CERTIFICATION	4
2.	SUMMARY OF TEST RESULTS	5
2.1	MEASUREMENT UNCERTAINTY	6
3.	GENERAL INFORMATION	7
3.1	GENERAL DESCRIPTION OF EUT	7
3.2	DESCRIPTION OF TEST MODES	8
3.2.1	CONFIGURATION OF SYSTEM UNDER TEST	9
3.2.2	TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL	10
3.3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS	11
3.3.4	DESCRIPTION OF SUPPORT UNITS	11
4.	TEST TYPES AND RESULTS	12
4.1	CONDUCTED EMISSION MEASUREMENT	12
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	12
4.1.2	TEST INSTRUMENTS	12
4.1.3	TEST PROCEDURES	13
4.1.4	DEVIATION FROM TEST STANDARD	13
4.1.5	TEST SETUP	14
4.1.6	EUT OPERATING CONDITIONS	14
4.1.7	TEST RESULTS	15
4.2	RADIATED EMISSION MEASUREMENT	17
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT	17
4.2.2	TEST INSTRUMENTS	18
4.2.3	TEST PROCEDURES	19
4.2.4	DEVIATION FROM TEST STANDARD	19
4.2.5	TEST SETUP	20
4.2.6	EUT OPERATING CONDITIONS	20
4.2.7	TEST RESULTS	21
4.3	NUMBER OF HOPPING FREQUENCY USED	26
4.3.1	LIMIT OF HOPPING FREQUENCY USED	26
4.3.2	TEST INSTRUMENTS	26
4.3.3	TEST PROCEDURES	26
4.3.4	DEVIATION FROM TEST STANDARD	27
4.3.5	TEST SETUP	27
4.3.6	TEST RESULTS	27
4.4	DWELL TIME ON EACH CHANNEL	29
4.4.1	LIMIT OF DWELL TIME USED	29
4.4.2	TEST INSTRUMENTS	29
4.4.3	TEST PROCEDURES	29
4.4.4	DEVIATION FROM TEST STANDARD	29
4.4.5	TEST SETUP	30
4.4.6	TEST RESULTS	30
4.5	CHANNEL BANDWIDTH	33
4.5	CHANNEL BANDWIDTH	33
4.5.1	LIMITS OF CHANNEL BANDWIDTH	33
4.5.2	TEST INSTRUMENTS	33
4.5.3	TEST PROCEDURE	33



4.5.4	DEVIATION FROM TEST STANDARD	34
4.5.5	TEST SETUP	34
4.5.6	EUT OPERATING CONDITION	34
4.5.7	TEST RESULTS.....	34
4.6	HOPPING CHANNEL SEPARATION	37
4.6.1	LIMIT OF HOPPING CHANNEL SEPARATION	37
4.6.2	TEST INSTRUMENTS	37
4.6.3	TEST PROCEDURES.....	37
4.6.4	DEVIATION FROM TEST STANDARD	38
4.6.5	TEST SETUP	38
4.6.6	TEST RESULTS.....	38
4.7	MAXIMUM PEAK OUTPUT POWER	41
4.7.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	41
4.7.2	TEST INSTRUMENTS	41
4.7.3	TEST PROCEDURES.....	41
4.7.4	DEVIATION FROM TEST STANDARD	41
4.7.5	TEST SETUP	42
4.7.6	EUT OPERATING CONDITION	42
4.7.7	TEST RESULTS.....	42
4.8	BAND EDGES MEASUREMENT	45
4.8.1	LIMITS OF BAND EDGES MEASUREMENT	45
4.8.2	TEST INSTRUMENTS	45
4.8.3	TEST PROCEDURE	45
4.8.4	DEVIATION FROM TEST STANDARD	45
4.8.5	EUT OPERATING CONDITION	45
4.8.6	TEST RESULTS.....	46
4.9	ANTENNA REQUIREMENT	49
4.9.1	STANDARD APPLICABLE	49
4.9.2	ANTENNA CONNECTED CONSTRUCTION.....	49
5.	PHOTOGRAPHS OF THE TEST CONFIGURATION.....	50
6.	INFORMATION ON THE TESTING LABORATORIES	51
7	APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB.....	52



1. CERTIFICATION

PRODUCT: BLUETOOTH LASER MOUSE
BRAND NAME: SONY
MODEL NO.: VGP-BMS77
APPLICANT: PRIMAX ELECTRONICS LTD.
TESTED: July 24 ~ Aug. 4, 2008
TEST SAMPLE: ENGINEERING SAMPLE
STANDARDS: FCC Part 15, Subpart C (Section 15.247)
ANSI C63.4-2003

The above equipment has been tested by **Advance Data Technology Corporation**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : *Jessica Cheng* , **DATE:** Aug. 5, 2008
(Jessica Cheng / Specialist)

TECHNICAL ACCEPTANCE : *Jamison Chan* , **DATE:** Aug. 5, 2008
Responsible for RF (Jamison Chan / Supervisor)

APPROVED BY : *Ken Liu* , **DATE:** Aug. 5, 2008
(Ken Liu / Deputy Manager)

2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -26.59dB at 0.150MHz.
15.247(a)(1)(iii)	Number of Hopping Frequency Used Spec.: At least 15 channels	PASS	Meet the requirement of limit.
15.247(a)(1)(iii)	Dwell Time on Each Channel Spec.: Max. 0.4 second within 31.6 second	PASS	Meet the requirement of limit.
15.247(a)(1)	1. Hopping Channel Separation Spec.: Min. 25 kHz or 20 dB bandwidth, whichever is greater 2. Spectrum Bandwidth of a Frequency Hopping Sequence Spread Spectrum System	PASS	Meet the requirement of limit.
15.247(b)	Maximum Peak Output Power Spec.: max. 30dBm	PASS	Meet the requirement of limit.
15.247(d)	Transmitter Radiated Emissions Spec.: Table 15.209	PASS	Meet the requirement of limit. Minimum passing margin is -7.71 dB at 1654.000MHz.
15.247(d)	Band Edge Measurement	PASS	Meet the requirement of limit.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz ~ 30MHz	2.44 dB
Radiated emissions	30MHz ~ 1GHz	3.72 dB
	1GHz ~ 40GHz	2.86 dB

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	BLUETOOTH LASER MOUSE
MODEL NO.	VGP-BMS77
FCC ID	EMJMVGP-BMS77
POWER SUPPLY	3.7Vdc from batteries
MODULATION TYPE	GFSK
RADIO TECHNOLOGY	FHSS
TRANSFER RATE	585.6Kbps
FREQUENCY RANGE	2402 ~ 2480 MHz
NUMBER OF CHANNEL	79
OUTPUT POWER	0.238mW
ANTENNA TYPE	Printed antenna with -2.36dBi gain
DATA CABLE	N/A
I/O PORTS	N/A
ASSOCIATED DEVICES	N/A

NOTE:

1. The EUT is wireless mouse with Bluetooth technology.
2. The EUT equipped the following accessories (for charging mode only):

Item	Brand	Model	Rating
Adapter	SONY	VGP-AC5V1	AC I/P: 100-240V, 0.5A, 50/60Hz DC O/P: 5.2V, 2.9A Non-shielded DC (1.8m) with one core Non-shielded AC (0.7m) 2-pin
Cradle	SONY	VGP-BMS77C	5.2Vdc
Battery	SONY	SP60BITA9C	3.7Vdc

※The EUT could not transmit or receive under charging mode.

3. For more detailed features description, please refer to the manufacturer's specifications or User's Manual.


3.2 DESCRIPTION OF TEST MODES

79 channels are provided to this EUT:


CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461		

3.2.1 CONFIGURATION OF SYSTEM UNDER TEST

FOR Mode A:

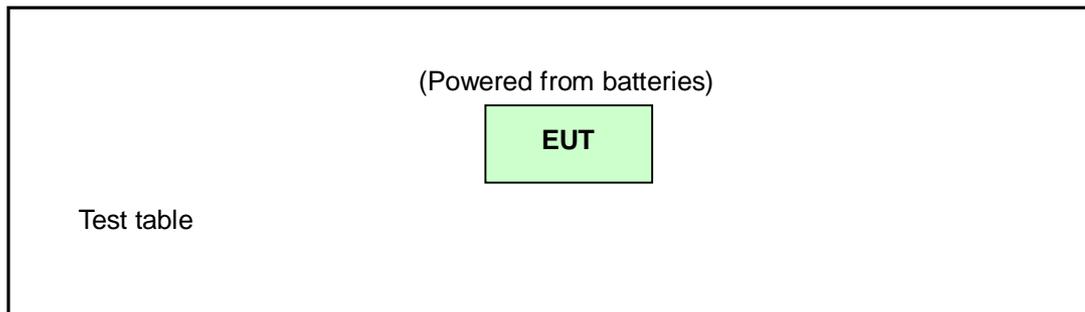

FOR Mode B:

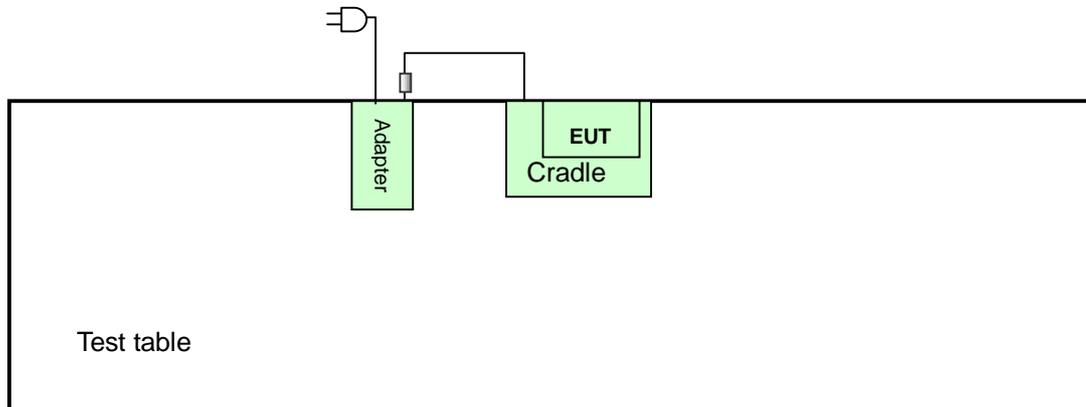

3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE MODE	Applicable to				Description
	PLC	RE<1G	RE [≥] 1G	APCM	
A	Note	√	√	√	EUT only
B	√	√	-	-	EUT under charge mode

Where **PLC:** Power Line Conducted Emission

RE<1G: Radiated Emission below 1GHz

RE[≥]1G: Radiated Emission above 1GHz

APCM: Antenna Port Conducted Measurement

NOTE: No need to concern of Conducted Emission due to the EUT is powered by battery.

POWER LINE CONDUCTED EMISSION TEST:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and packet types.
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE
B	0 to 78	-	FHSS	GFSK	DH3

RADIATED EMISSION TEST (BELOW 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and packet types.
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE
A	0 to 78	78	FHSS	GFSK	DH3
B	0 to 78	-	FHSS	GFSK	DH3

RADIATED EMISSION TEST (ABOVE 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and packet types.
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE
A	0 to 78	0, 39, 78	FHSS	GFSK	DH3



BANDEDGE MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and packet types.
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE
A	0 to 78	0, 78	FHSS	GFSK	DH3

ANTENNA PORT CONDUCTED MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and packet types.
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE
A	0 to 78	0, 39, 78	FHSS	GFSK	DH3

3.3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (Section 15.247)
ANSI C63.4-2003

All test items have been performed and recorded as per the above standards.

3.3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together without any necessary accessory or support unit.

4. TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
ROHDE & SCHWARZ Test Receiver	ESCS 30	838251/021	Dec. 19, 2008
ROHDE & SCHWARZ Artificial Mains Network (for EUT)	ESH3-Z5	100218	Nov. 20, 2008
LISN With Adapter (for EUT)	AD10	C10Ada-001	Nov. 21, 2008
ROHDE & SCHWARZ Artificial Mains Network (for peripherals)	ESH3-Z5	100219	Nov. 08, 2008
ROHDE & SCHWARZ Artificial Mains Network (for peripherals)	ESH3-Z5	100220	Oct. 25, 2008
Software	ADT_Cond_V7.3.5	NA	NA
Software	ADT_ISN_V7.3.5	NA	NA
RF cable (JYEBAO)	5D-FB	Cable-C10.01	Feb. 26, 2009
SUHNTER Terminator (For ROHDE & SCHWARZ LISN)	65BNC-5001	E1-010773	Feb. 13, 2009

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in ADT Shielded Room No. 10.
 3. The VCCI Site Registration No. C-1852.


4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

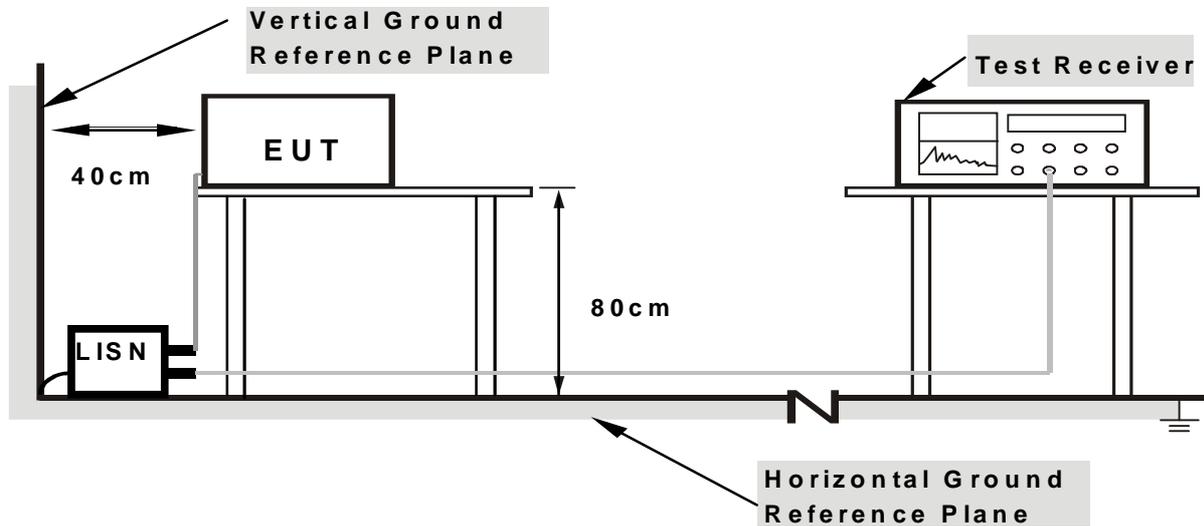

Note: 1.Support units were connected to second LISN.
 2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes support units.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.1.6 EUT OPERATING CONDITIONS


- a. Connected the EUT with cradle and AC adapter placed on testing table.
- b. Set the EUT under charging condition

4.1.7 TEST RESULTS

TEST MODE	B		
MODULATION TYPE	GFSK	6dB BANDWIDTH	9 kHz
INPUT POWER	120Vac, 60 Hz	PHASE	Line 1
ENVIRONMENTAL CONDITIONS	26deg. C, 70%RH, 995Pa	TESTED BY	Jun Wu

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.17	39.07	-	39.24	-	66.00	56.00	-26.76	-
2	0.302	0.23	23.92	-	24.15	-	60.18	50.18	-36.03	-
3	0.525	0.23	16.78	-	17.01	-	56.00	46.00	-38.99	-
4	1.027	0.25	15.08	-	15.33	-	56.00	46.00	-40.67	-
5	19.063	1.35	12.21	-	13.56	-	60.00	50.00	-46.44	-
6	29.586	1.70	8.93	-	10.63	-	60.00	50.00	-49.37	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

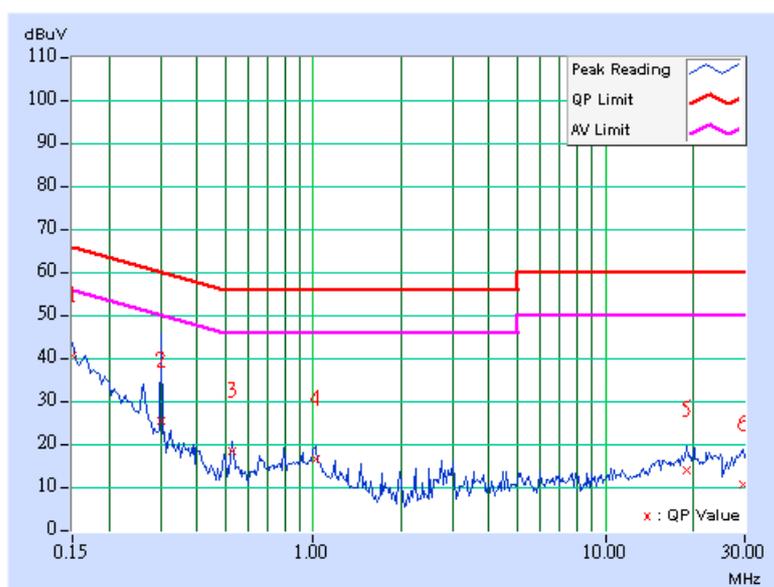

TEST MODE	B		
MODULATION TYPE	GFSK	6dB BANDWIDTH	9 kHz
INPUT POWER	120Vac, 60 Hz	PHASE	Line 2
ENVIRONMENTAL CONDITIONS	26deg. C, 70%RH, 995Pa	TESTED BY	Jun Wu

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.16	39.25	-	39.41	-	66.00	56.00	-26.59	-
2	0.291	0.22	28.34	-	28.56	-	60.51	50.51	-31.95	-
3	0.791	0.23	15.26	-	15.49	-	56.00	46.00	-40.51	-
4	0.998	0.24	14.64	-	14.88	-	56.00	46.00	-41.12	-
5	18.680	1.06	15.39	-	16.45	-	60.00	50.00	-43.55	-
6	21.578	1.19	8.32	-	9.51	-	60.00	50.00	-50.49	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

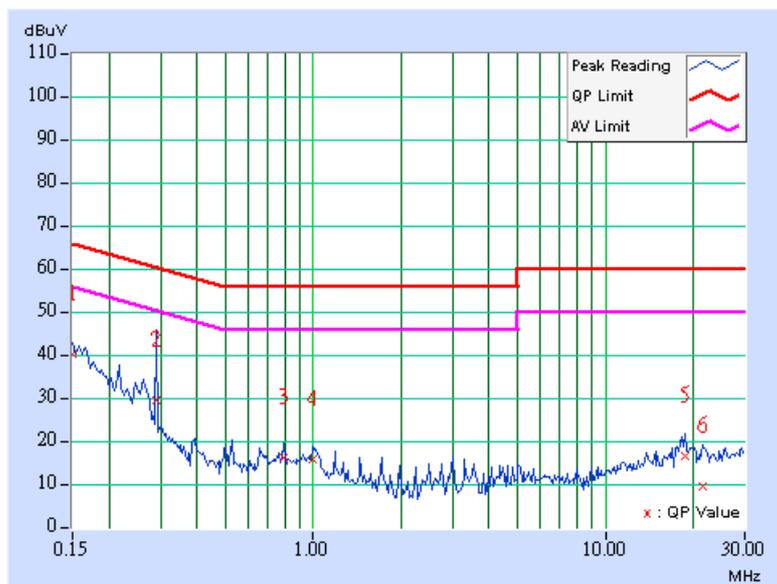

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
HP Preamplifier	8447D	2432A03504	May 08, 2009
HP Preamplifier	8449B	3008A01201	Oct. 01, 2008
HP Preamplifier	8449B	3008A01292	Aug. 05, 2008
ROHDE & SCHWARZ TEST RECEIVER	ES17	836697/012	Dec. 05, 2008
Schwarzbeck Antenna	VULB 9168	137	May 01, 2009
Schwarzbeck Antenna	VHBA 9123	480	Apr. 22, 2009
EMCO Horn Antenna	3115	6714	Oct. 18, 2008
EMCO Horn Antenna	3115	9312-4192	Apr. 20, 2009
ADT. Turn Table	TT100	0306	NA
ADT. Tower	AT100	0306	NA
Software	ADT_Radiated_V 7.6.15	NA	NA
SUHNER RF cable	SF104-26.5	CABLE-CH6-17m-01	Nov. 04, 2008
ROHDE & SCHWARZ Spectrum Analyzer	FSP 40	100035	Mar. 25, 2009

- NOTE:**
1. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.
 2. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 3. The test was performed in ADT Chamber No. 6.
 4. The Industry Canada Reference No. IC 3789-6.

4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth is 1MHz and video bandwidth of test receiver/spectrum analyzer is 3MHz for Peak detection at frequency above 1GHz. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz for Average detection (AV) at frequency above 1GHz.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation

4.2.5 TEST SETUP

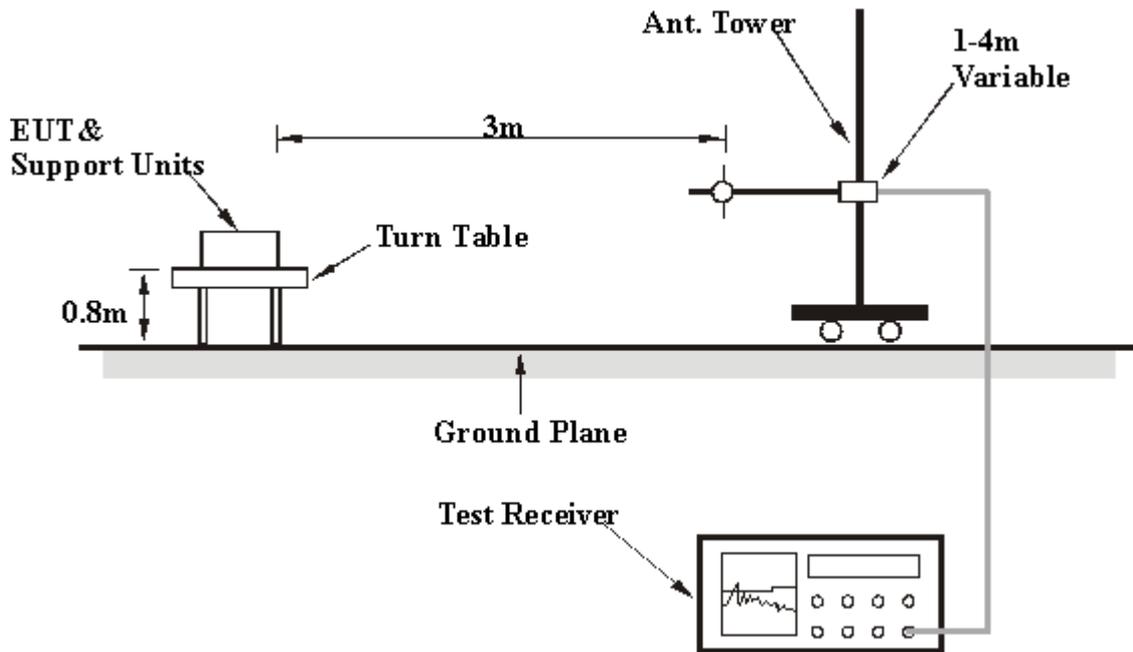

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.6 EUT OPERATING CONDITIONS

For Mode A:

Set the EUT under transmission/receiving condition continuously at specific channel frequency.

For Mode B:

- Connected the EUT with cradle and AC adapter placed on testing table.
- Set the EUT under charging condition



4.2.7 TEST RESULTS

RADIATED WORST CASE DATA: BELOW 1GHz

TEST MODE	A		
MODULATION TYPE	GFSK	CHANNEL	78
INPUT POWER	3.7Vdc	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	25deg. C, 60% RH, 996Pa	DETECTOR FUNCTION	Quasi-Peak
TESTED BY	Jun Wu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	33.888	25.46 QP	40.00	-14.54	1.42 H	88	11.08	14.38
2	552.906	27.24 QP	46.00	-18.76	1.28 H	106	4.82	22.42
3	587.896	29.16 QP	46.00	-16.84	1.20 H	94	5.89	23.27
4	601.503	31.80 QP	46.00	-14.20	1.16 H	100	8.22	23.58
5	636.493	28.00 QP	46.00	-18.00	1.14 H	250	4.12	23.88
6	937.796	28.65 QP	46.00	-17.35	1.10 H	61	-0.26	28.91

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	103.868	24.75 QP	43.50	-18.75	1.00 V	46	13.05	11.70
2	834.770	26.15 QP	46.00	-19.85	1.00 V	82	-1.35	27.50
3	871.703	27.72 QP	46.00	-18.28	1.12 V	160	-0.28	28.00
4	891.142	28.03 QP	46.00	-17.97	1.19 V	10	-0.25	28.28
5	928.076	28.52 QP	46.00	-17.48	1.24 V	136	-0.26	28.78
6	953.347	27.76 QP	46.00	-18.24	1.26 V	46	-1.34	29.10

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.



TEST MODE	B		
MODULATION TYPE	GFSK	FREQUENCY RANGE	Below 1000MHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	25deg. C, 60% RH, 996Pa	TESTED BY	Jun Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	92.204	32.33 QP	43.50	-11.17	1.44 H	28	22.03	10.30
2	96.092	31.02 QP	43.50	-12.48	1.38 H	16	20.21	10.81
3	140.802	32.90 QP	43.50	-10.60	1.35 H	310	18.66	14.24
4	263.267	35.20 QP	46.00	-10.80	1.26 H	76	19.80	15.40
5	360.461	33.93 QP	46.00	-12.07	1.17 H	70	16.25	17.68
6	912.525	34.76 QP	46.00	-11.24	1.12 H	55	6.19	28.57

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	30.000	26.17 QP	40.00	-13.83	1.00 V	10	13.10	13.07
2	90.261	37.63 QP	43.50	-5.87	1.00 V	283	27.59	10.04
3	96.092	34.18 QP	43.50	-9.32	1.00 V	70	23.37	10.81
4	142.745	28.13 QP	43.50	-15.37	1.00 V	31	13.81	14.32
5	360.461	30.16 QP	46.00	-15.84	1.00 V	145	12.48	17.68
6	889.198	31.52 QP	46.00	-14.48	1.12 V	184	3.27	28.25
7	953.347	32.48 QP	46.00	-13.52	1.21 V	325	3.38	29.10

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.



RADIATED DATA: ABOVE 1GHz

TEST MODE	A		
MODULATION TYPE	GFSK	CHANNEL	0
INPUT POWER	3.7Vdc	FREQUENCY RANGE	1 ~ 25GHz
ENVIRONMENTAL CONDITIONS	25deg. C, 79% RH, 996Pa	DETECTOR FUNCTION	Peak (PK) Average (AV)
TESTED BY	Jun Wu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1600.000	48.72 PK	74.00	-25.28	1.00 H	271	17.45	31.27
2	1600.000	44.91 AV	54.00	-9.09	1.00 H	271	13.64	31.27
3	2390.000	56.89 PK	74.00	-17.11	1.00 H	13	23.59	33.30
4	2390.000	22.39 AV	54.00	-31.61	1.00 H	13	-10.91	33.30
5	*2402.000	92.52 PK			1.00 H	13	59.17	33.35
6	*2402.000	58.02 AV			1.00 H	13	24.67	33.35
7	4804.000	50.40 PK	74.00	-23.60	1.17 H	65	10.01	40.39
8	4804.000	15.90 AV	54.00	-38.10	1.17 H	65	-24.49	40.39

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1600.000	43.85 PK	74.00	-30.15	1.07 V	115	12.58	31.27
2	1600.000	36.61 AV	54.00	-17.39	1.07 V	115	5.34	31.27
3	2390.000	56.14 PK	74.00	-17.86	1.00 V	8	22.84	33.30
4	2390.000	21.64 AV	54.00	-32.36	1.00 V	8	-11.66	33.30
5	*2402.000	90.71 PK			1.00 V	8	57.36	33.35
6	*2402.000	56.21 AV			1.00 V	8	22.86	33.35
7	4804.000	52.14 PK	74.00	-21.86	1.00 V	160	11.75	40.39
8	4804.000	17.64 AV	54.00	-36.36	1.00 V	160	-22.75	40.39

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The DH3 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 3 per 247 ms per channel. Therefore, the duty cycle be equal to: $20\log(1.875/100) = -34.5$ dB.
 6. Average value = peak reading + $20\log(\text{duty cycle})$.



TEST MODE	A		
MODULATION TYPE	GFSK	CHANNEL	39
INPUT POWER	3.7Vdc	FREQUENCY RANGE	1 ~ 25GHz
ENVIRONMENTAL CONDITIONS	25deg. C, 79% RH, 996Pa	DETECTOR FUNCTION	Peak (PK) Average (AV)
TESTED BY	Jun Wu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1627.000	48.57 PK	74.00	-25.43	1.00 H	272	17.28	31.29
2	1627.000	44.94 AV	54.00	-9.06	1.00 H	272	13.65	31.29
3	*2441.000	91.85 PK			1.00 H	32	58.32	33.53
4	*2441.000	57.35 AV			1.00 H	32	23.82	33.53
5	4882.000	51.28 PK	74.00	-22.72	1.09 H	279	10.70	40.57
6	4882.000	16.78 AV	54.00	-37.22	1.09 H	279	-23.80	40.57

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1627.000	48.41 PK	74.00	-25.59	1.00 V	113	17.12	31.29
2	1627.000	40.21 AV	54.00	-13.79	1.00 V	113	8.92	31.29
3	*2441.000	91.42 PK			1.00 V	19	57.89	33.53
4	*2441.000	56.92 AV			1.00 V	19	23.39	33.53
5	4882.000	54.50 PK	74.00	-19.50	1.00 V	160	13.92	40.57
6	4882.000	20.00 AV	54.00	-34.00	1.00 V	160	-20.58	40.57

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The DH3 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 3 per 247 ms per channel. Therefore, the duty cycle be equal to: $20\log(1.875/100) = -34.5$ dB.
 6. Average value = peak reading + $20\log(\text{duty cycle})$.



TEST MODE	A		
MODULATION TYPE	GFSK	CHANNEL	78
INPUT POWER	3.7Vdc	FREQUENCY RANGE	1 ~ 25GHz
ENVIRONMENTAL CONDITIONS	25deg. C, 79% RH, 996Pa	DETECTOR FUNCTION	Peak (PK) Average (AV)
TESTED BY	Jun Wu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1654.000	49.52 PK	74.00	-24.48	1.00 H	292	18.21	31.31
2	1654.000	46.29 AV	54.00	-7.71	1.00 H	292	14.98	31.31
3	*2480.000	92.21 PK			1.00 H	31	58.51	33.70
4	*2480.000	57.71 AV			1.00 H	31	24.01	33.70
5	2483.500	59.76 PK	74.00	-14.24	1.00 H	31	26.04	33.72
6	2483.500	25.26 AV	54.00	-28.74	1.00 H	31	-8.46	33.72
7	4960.000	51.56 PK	74.00	-22.44	1.00 H	143	10.79	40.76
8	4960.000	17.06 AV	54.00	-36.94	1.00 H	143	-23.71	40.76

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1654.000	44.47 PK	74.00	-29.53	1.00 V	112	13.16	31.31
2	1654.000	37.76 AV	54.00	-16.24	1.00 V	112	6.45	31.31
3	*2480.000	92.74 PK			1.00 V	30	59.04	33.70
4	*2480.000	58.24 AV			1.00 V	30	24.54	33.70
5	2483.500	59.69 PK	74.00	-14.31	1.00 V	30	25.97	33.72
6	2483.500	25.19 AV	54.00	-28.81	1.00 V	30	-8.53	33.72
7	4960.000	53.99 PK	74.00	-20.01	1.00 V	158	13.22	40.76
8	4960.000	19.49 AV	54.00	-34.51	1.00 V	158	-21.28	40.76

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The DH3 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 3 per 247 ms per channel. Therefore, the duty cycle be equal to: $20\log(1.875/100) = -34.5$ dB.
 6. Average value = peak reading + $20\log(\text{duty cycle})$.



4.3 NUMBER OF HOPPING FREQUENCY USED

4.3.1 LIMIT OF HOPPING FREQUENCY USED

At least 15 channels frequencies, and should be equally spaced.

4.3.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
SPECTRUM ANALYZER	FSP 40	100035	Mar. 25, 2009

NOTE: The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.

4.3.3 TEST PROCEDURES

- a. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- c. Set the SA on MaxHold Mode, and then keep the EUT in hopping mode. Record all the signals from each channel until each one has been recorded.
- d. Set the SA on View mode and then plot the result on SA screen.
- e. Repeat above procedures until all frequencies measured were complete.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation.

4.3.5 TEST SETUP





4.3.6 TEST RESULTS

There are 79 hopping frequencies in the hopping mode. Please refer to next two pages for the test result. On the plots, it shows that the hopping frequencies are equally spaced.



TEST MODE: A

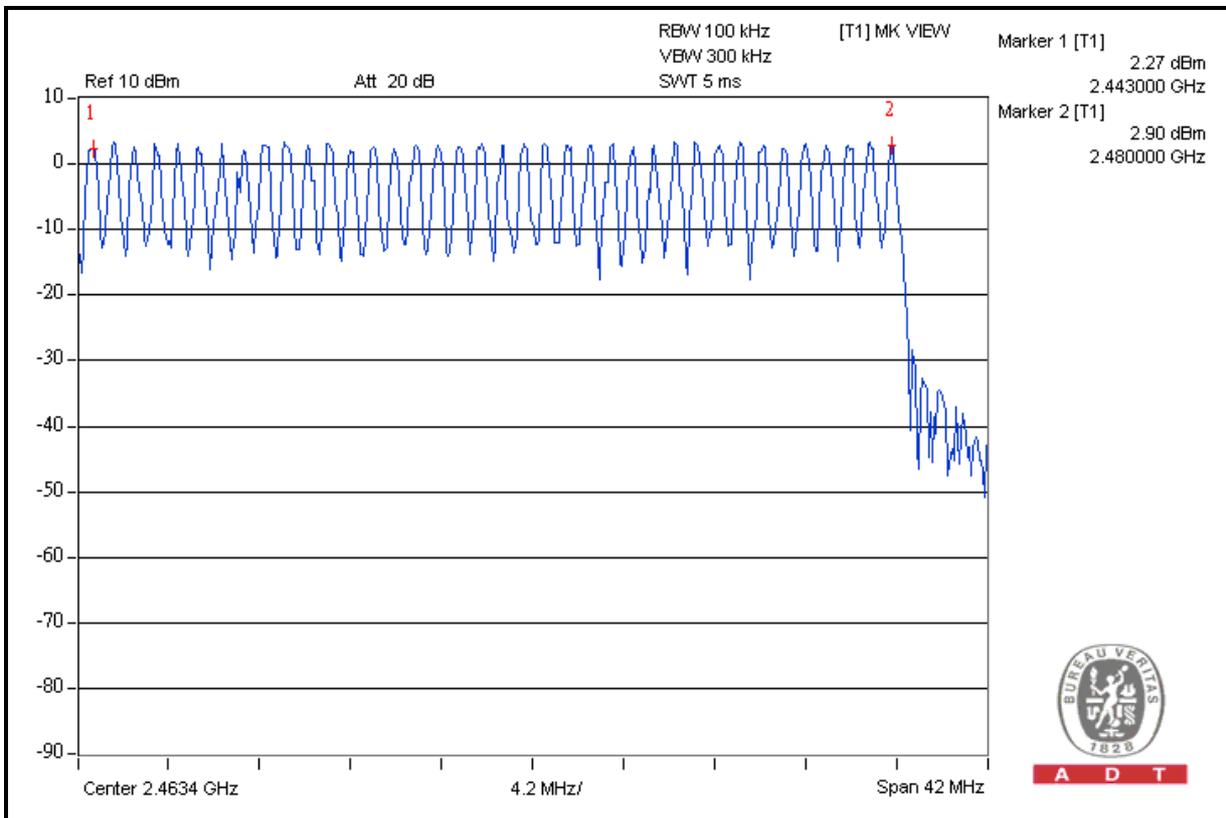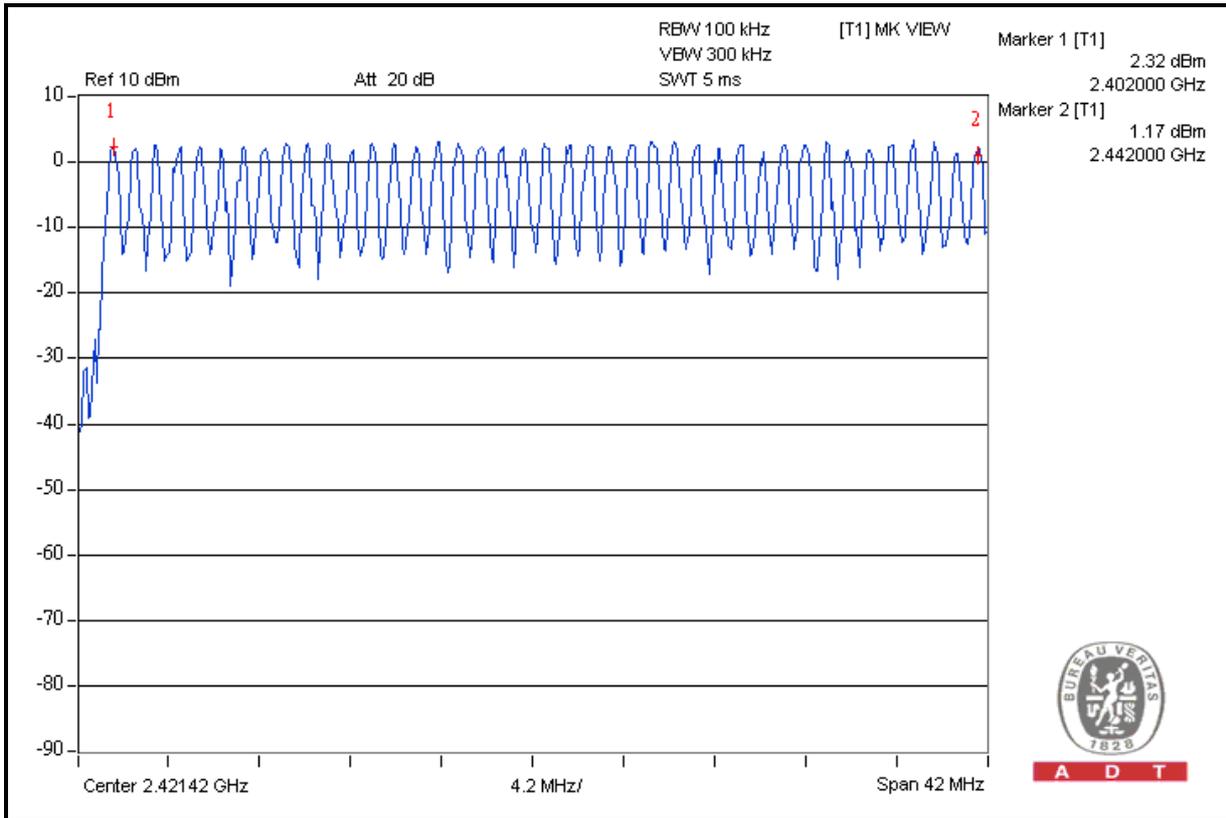



4.4 DWELL TIME ON EACH CHANNEL

4.4.1 LIMIT OF DWELL TIME USED

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

4.4.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
SPECTRUM ANALYZER	FSP 40	100035	Mar. 25, 2009

NOTES: The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.


4.4.3 TEST PROCEDURES

- a. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- c. Adjust the center frequency of SA on any frequency be measured and set SA to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
- d. Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
- e. Repeat above procedures until all different time-slot modes have been completed.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation.

4.4.5 TEST SETUP

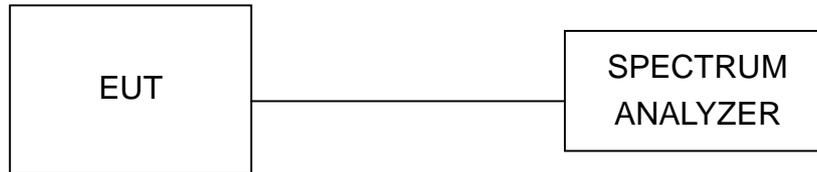



4.4.6 TEST RESULTS

TEST MODE: A



Mode	Number of transmission in a 31.6 (79Hopping*0.4)	Length of transmission time (msec)	Result (msec)	Limit (msec)
DH1	50 (times / 5 sec) *6.32=316.00 times	0.516	163.056	400
DH3	26 (times / 5 sec) *6.32=164.32 times	1.8	295.776	400

NOTE: Test plots of the transmitting time slot are shown on next 2 pages.

DH1

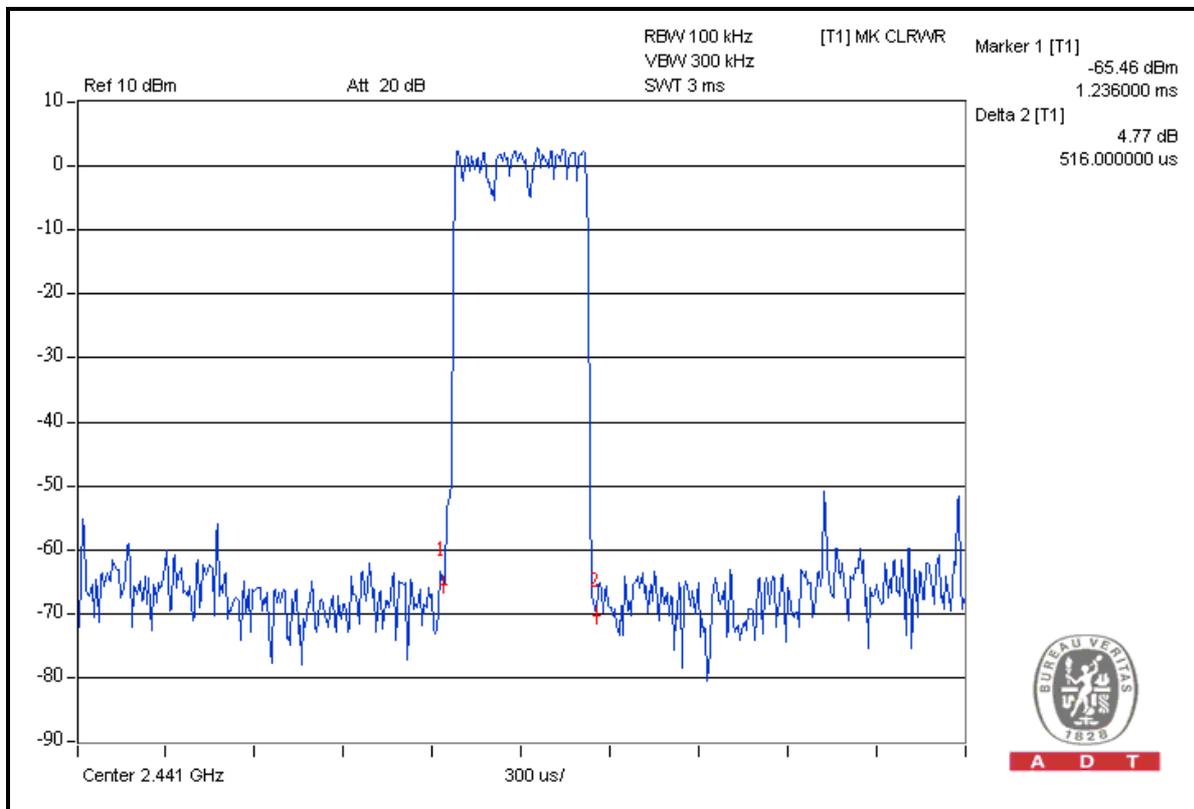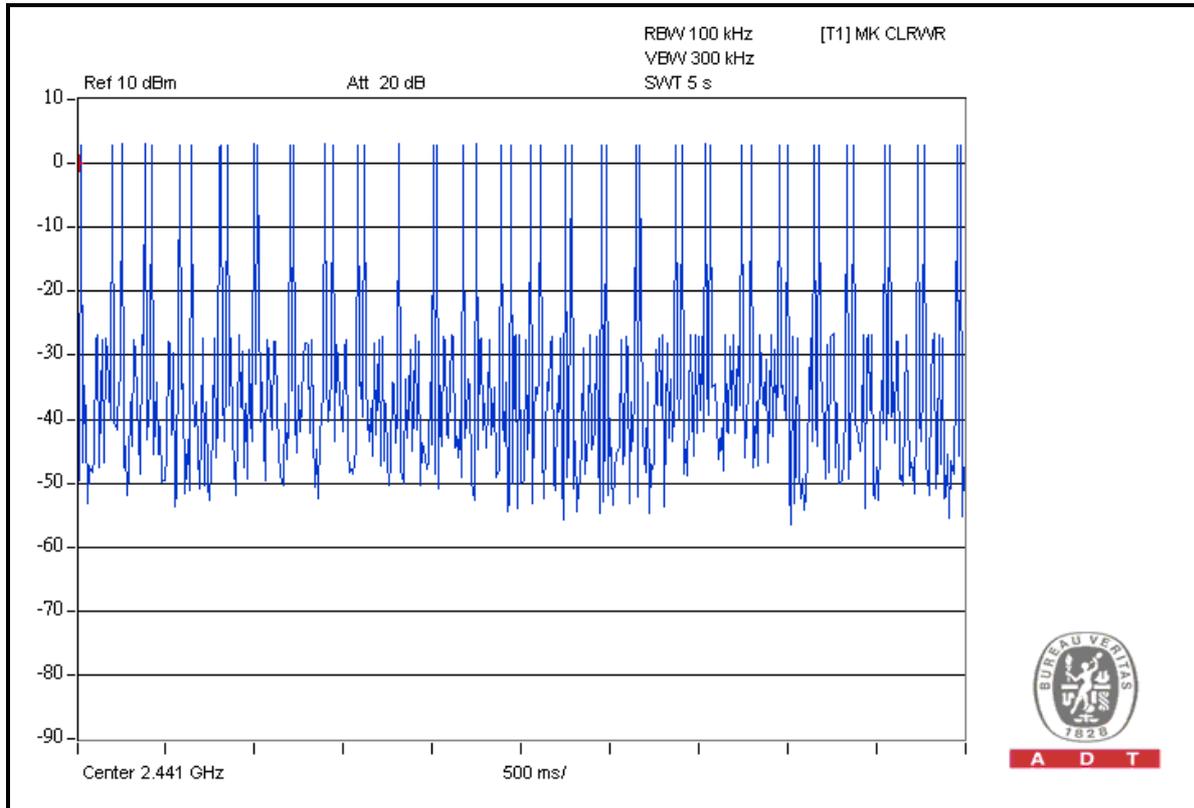

DH3

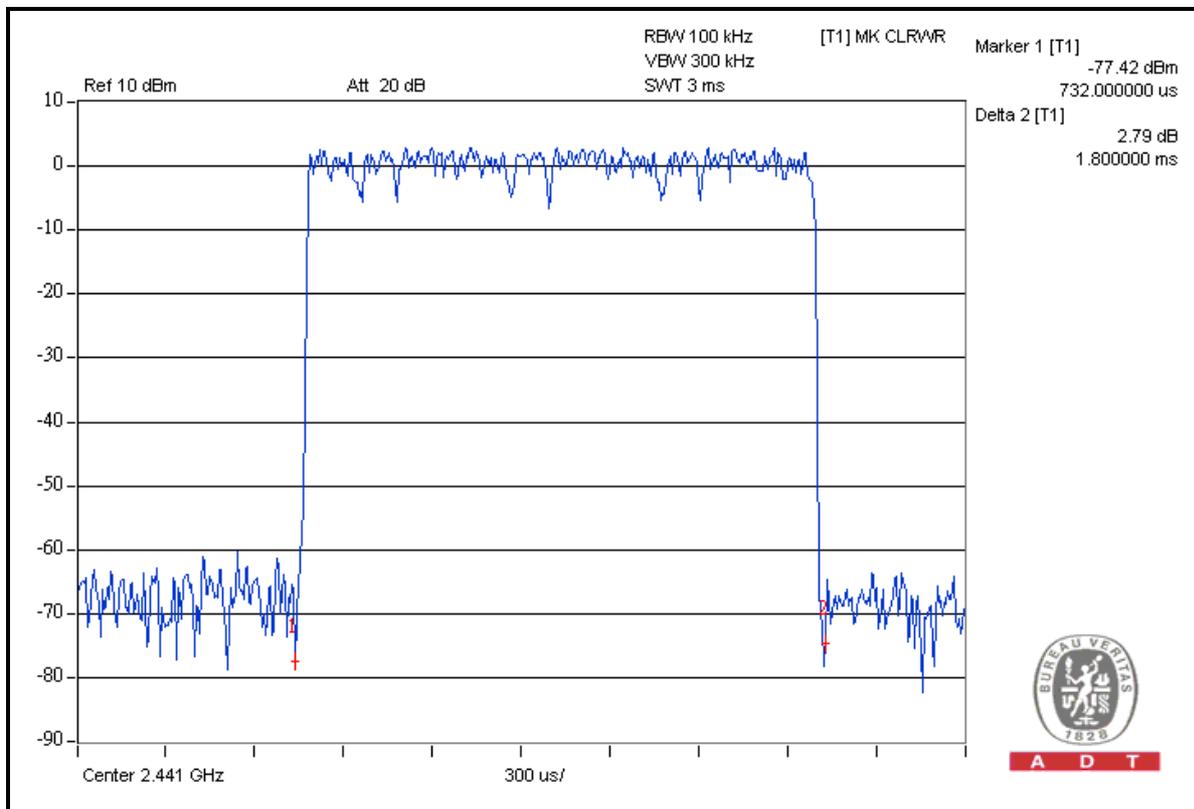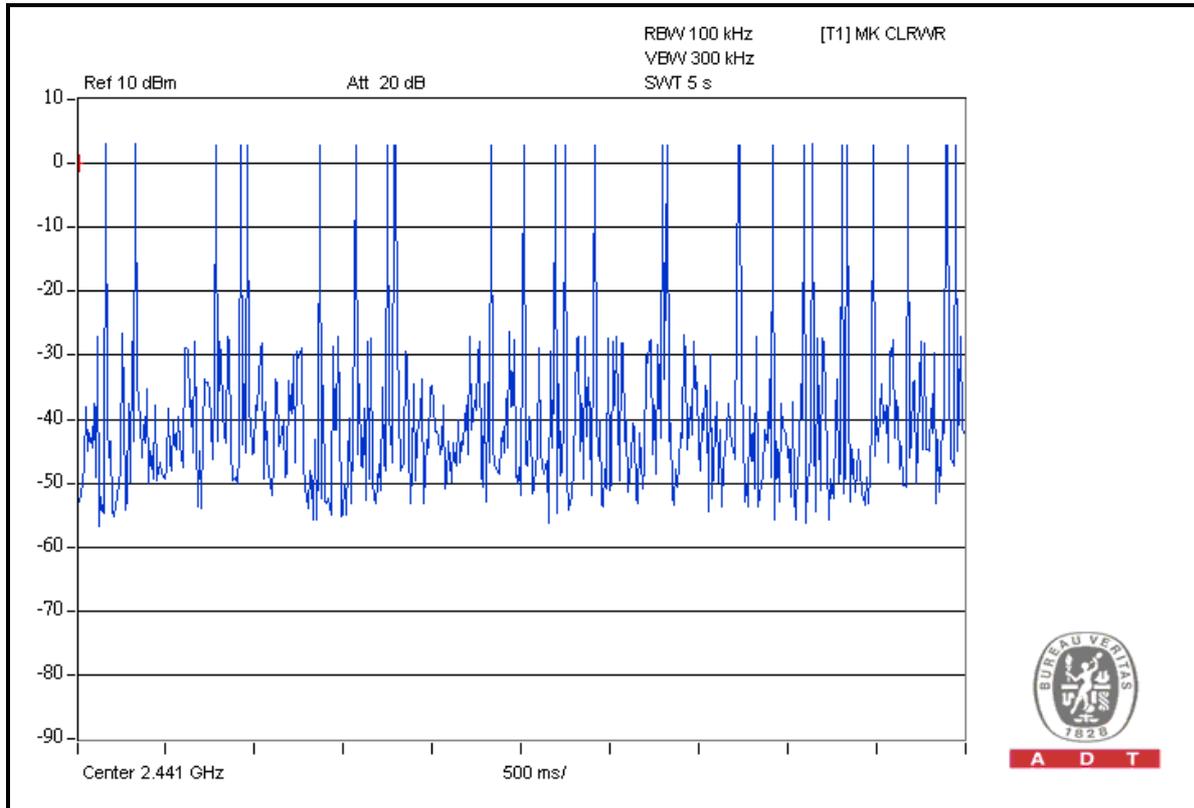



4.5 CHANNEL BANDWIDTH

4.5.1 LIMITS OF CHANNEL BANDWIDTH

For frequency hopping system operating in the 2400-2483.5MHz, If the 20dB bandwidth of hopping channel is greater than 25kHz, 20dB bandwidth of hopping channel shall be a minimum limit for the hopping channel separation.

4.5.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
SPECTRUM ANALYZER	FSP 40	100035	Mar. 25, 2009

NOTE: The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.

4.5.3 TEST PROCEDURE

- a. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- c. Measure the frequency difference of two frequencies that were attenuated 20dB from the reference level. Record the frequency difference as the emission bandwidth.
- d. Repeat above procedures until all frequencies measured were complete.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation.

4.5.5 TEST SETUP



4.5.6 EUT OPERATING CONDITION


The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.

4.5.7 TEST RESULTS


TEST MODE	A		
MODULATION TYPE	GFSK	CHANNEL	0, 39, 78
INPUT POWER	3.7Vdc	ENVIRONMENTAL CONDITIONS	25deg. C, 65% RH, 994hPa
TESTED BY	Jamison Chan		

CHANNEL	CHANNEL FREQUENCY (MHz)	20dB BANDWIDTH (MHz)
0	2402	0.960
39	2441	0.958
78	2480	0.965


CH 0

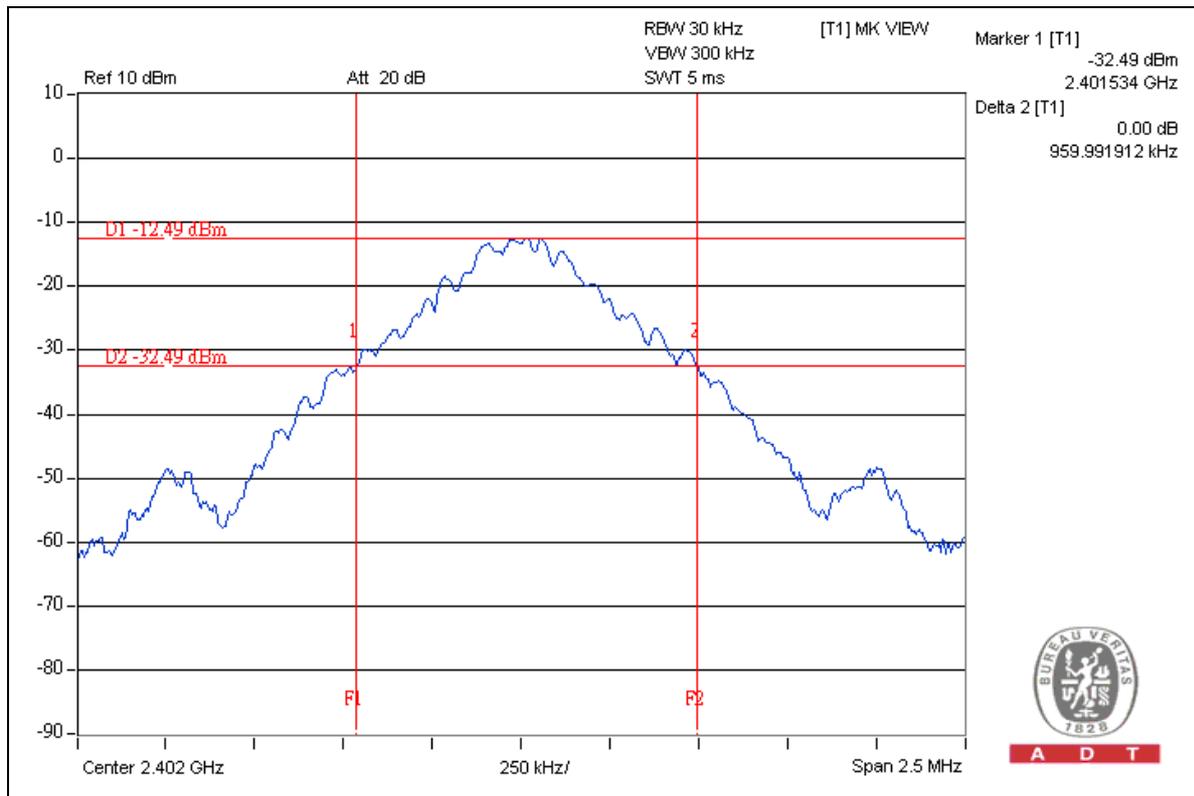

CH 39

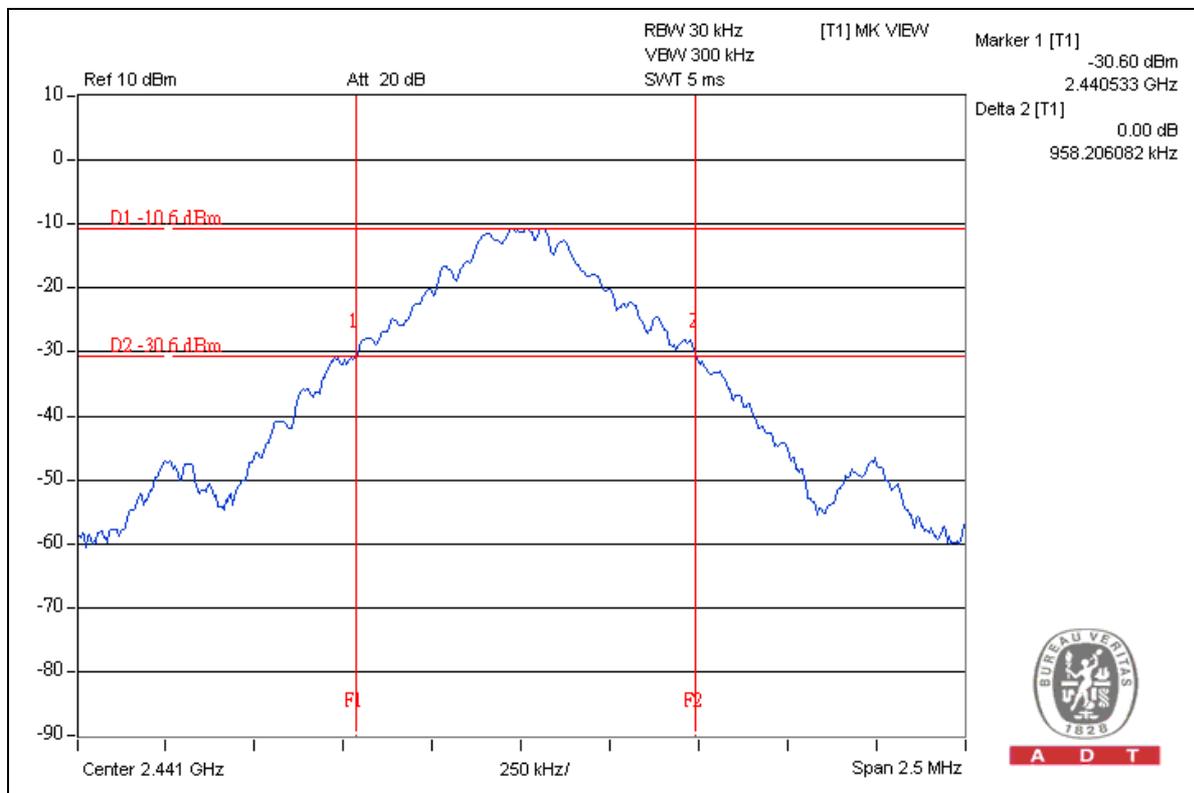

CH 78

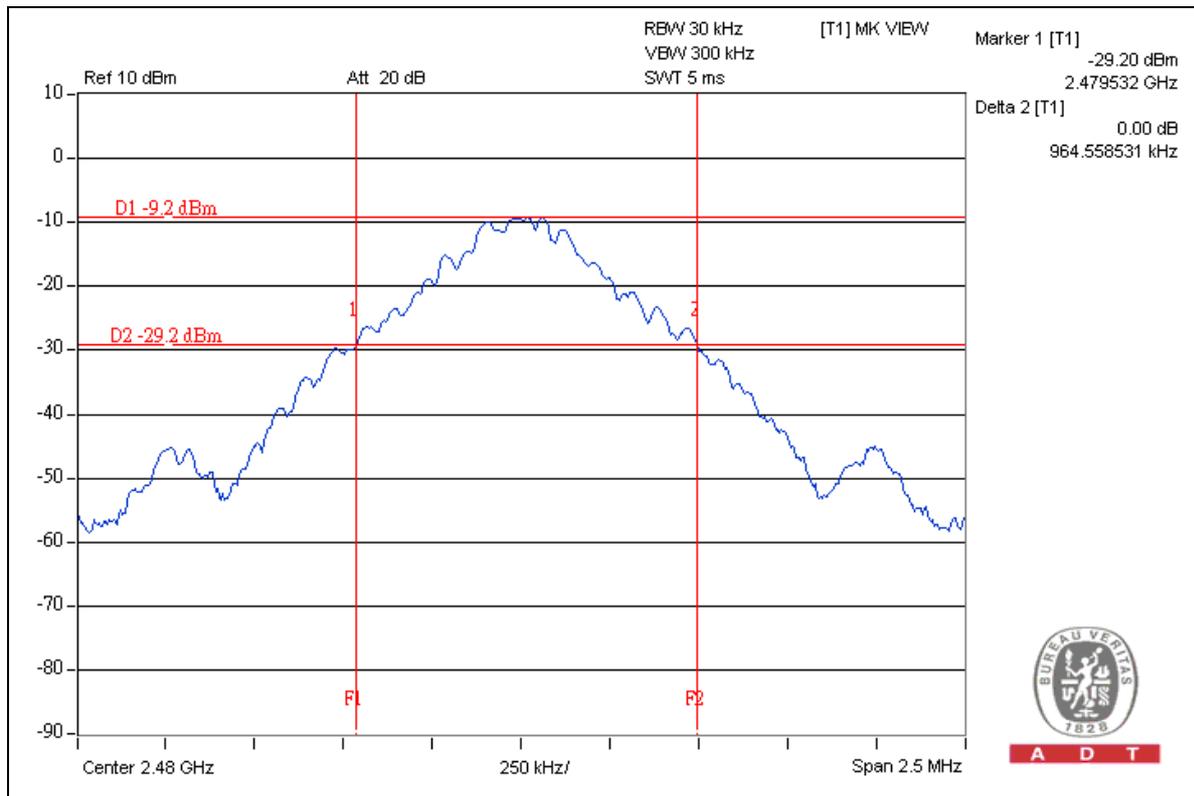



4.6 HOPPING CHANNEL SEPARATION

4.6.1 LIMIT OF HOPPING CHANNEL SEPARATION

At least 25kHz or 20dB hopping channel bandwidth (whichever is greater).

4.6.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
SPECTRUM ANALYZER	FSP 40	100035	Mar. 25, 2009

NOTES: The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.

4.6.3 TEST PROCEDURES

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range.
3. By using the MaxHold function record the separation of two adjacent channels.
4. Measure the frequency difference of these two adjacent channels by SA MARK function. And then plot the result on SA screen.
5. Repeat above procedures until all frequencies measured were complete.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation.

4.6.5 TEST SETUP




4.6.6 TEST RESULTS

TEST MODE	A		
MODULATION TYPE	GFSK	CHANNEL	0, 39, 78
INPUT POWER	3.7Vdc	ENVIRONMENTAL CONDITIONS	25deg. C, 65% RH, 994hPa
TESTED BY	Jamison Chan		


CHANNEL	FREQUENCY (MHz)	ADJACENT CHANNEL SEPARATION (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
0	2402	1.003	0.960	PASS
39	2441	1.003	0.958	PASS
78	2480	1.002	0.965	PASS

NOTE: The minimum limit is 20dB bandwidth. Test results please refer to next two pages.

CH 0

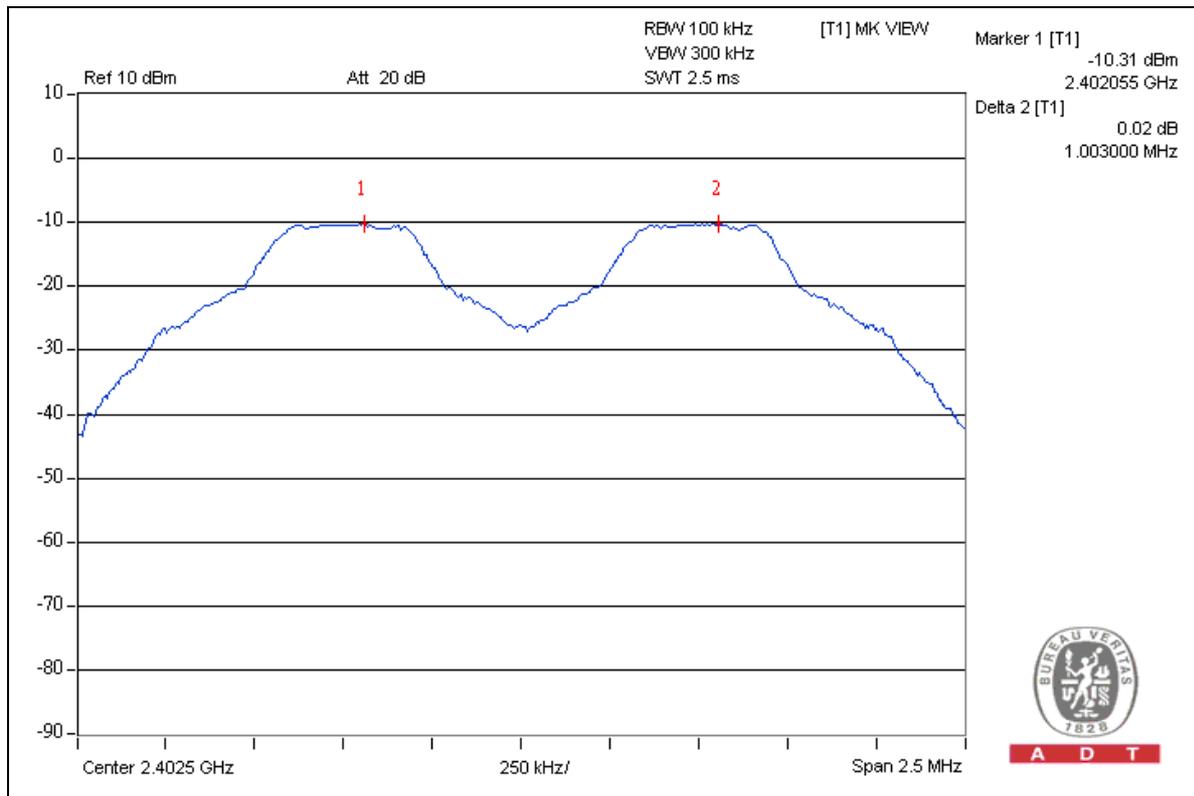

CH 39

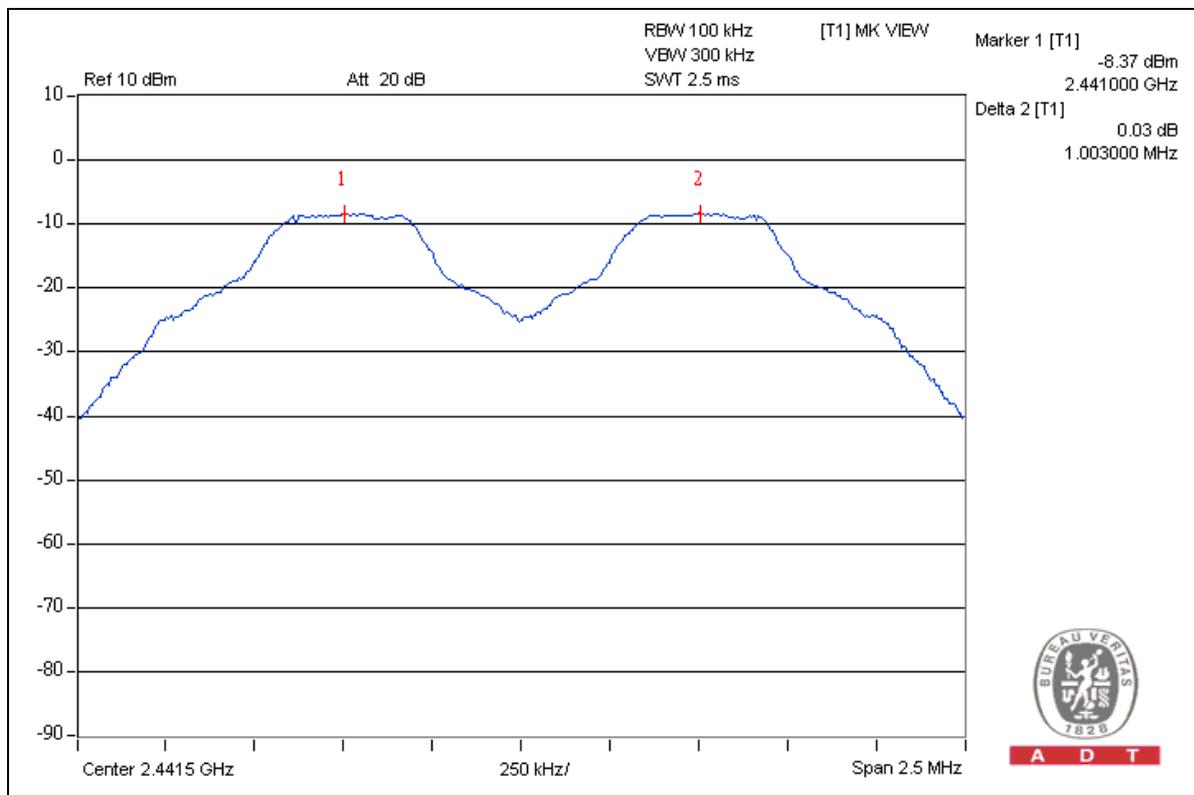



4.7 MAXIMUM PEAK OUTPUT POWER

4.7.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

4.7.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
SPECTRUM ANALYZER	FSP 40	100035	Mar. 25, 2009

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.7.3 TEST PROCEDURES

- a. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- c. The center frequency of the spectrum analyzer is set to the fundamental frequency and using 3 MHz RBW and 10 MHz VBW.
- d. Measure the captured power within the band and recording the plot.
- e. Repeat above procedures until all frequencies required were complete.

4.7.4 DEVIATION FROM TEST STANDARD

No deviation

4.7.5 TEST SETUP



For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

4.7.6 EUT OPERATING CONDITION


The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.

4.7.7 TEST RESULTS


TEST MODE	A		
MODULATION TYPE	GFSK	CHANNEL	0, 39, 78
INPUT POWER	3.7Vdc	ENVIRONMENTAL CONDITIONS	25deg. C, 65% RH, 994hPa
TESTED BY	Jamison Chan		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
0	2402	0.109	-9.62	30	PASS
39	2441	0.176	-7.55	30	PASS
78	2480	0.238	-6.24	30	PASS


CH 0

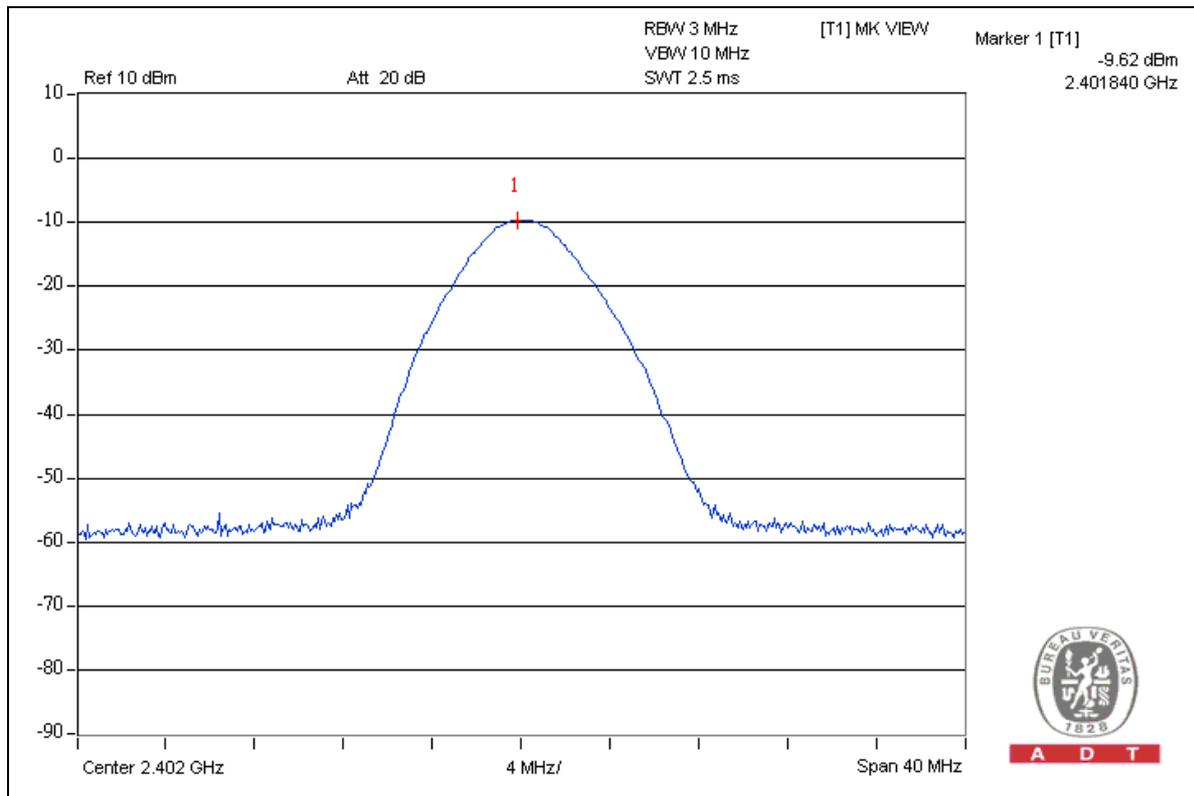

CH 39

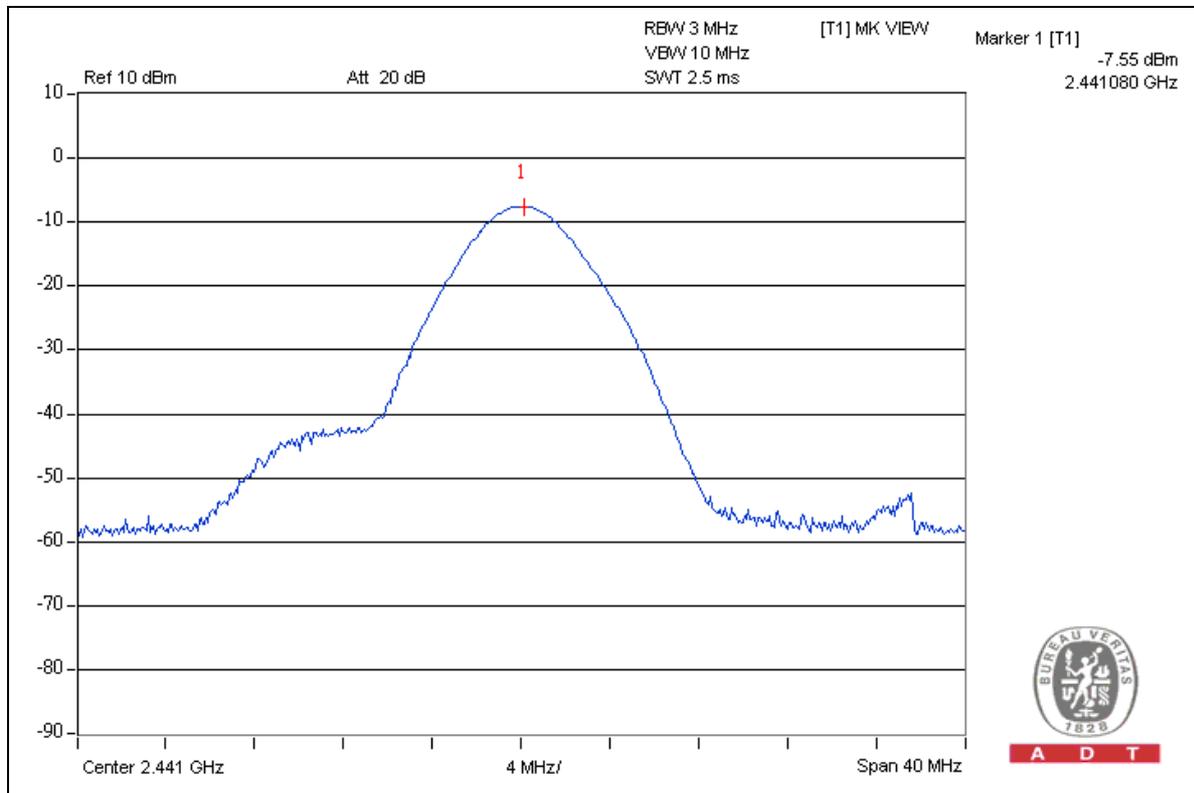

CH 78

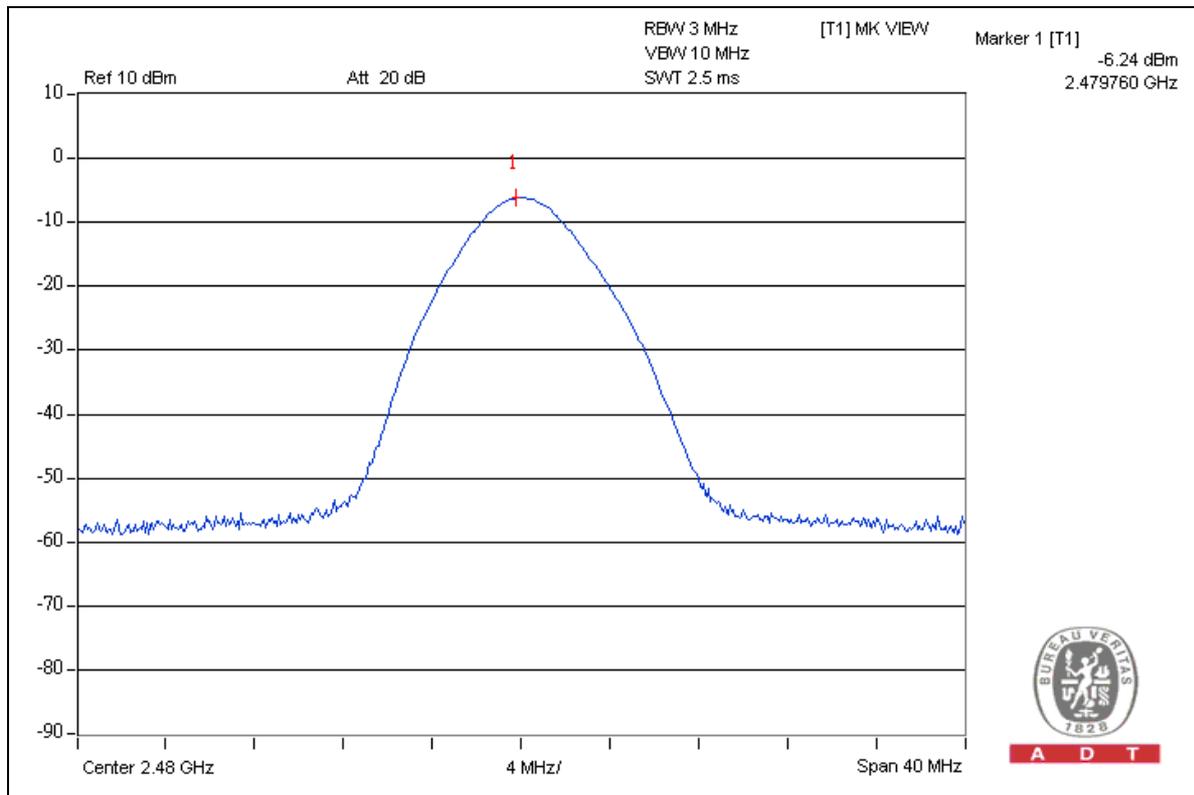



4.8 BAND EDGES MEASUREMENT

4.8.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100KHz RBW).

4.8.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
SPECTRUM ANALYZER	FSP 40	100035	Mar. 25, 2009

NOTES: The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.

4.8.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low loss cable. Set both RBW and VBW of spectrum analyzer to 100 kHz and 300 kHz with suitable frequency span including 100 MHz bandwidth from band edge. The band edges was measured and recorded.

The spectrum plots are attached on the following pages.

4.8.4 DEVIATION FROM TEST STANDARD

No deviation.

4.8.5 EUT OPERATING CONDITION

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.

4.8.6 TEST RESULTS

The spectrum plots are attached on the following 4 images. D1 line indicates the highest level, D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(d).

TEST MODE: A

NOTE 1:

The band edge emission plot on the next page shows 48.54dBc between carrier maximum power and local maximum emission in restrict band (2.3572GHz). The emission of carrier strength list in the test result of channel 0 at the item 4.2.7 is 92.52dBuV/m (Peak), so the maximum field strength in restrict band is $92.52 - 48.54 = 43.98$ dBuV/m, which is under 74 dBuV/m limit.

Average value = $43.98 - 34.50 = 9.48$ dBuV/m, which is under 54dBuV/m limit.

*The DH3 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on $0.625 * 3$ per 247 ms per channel. Therefore, the duty cycle be equal to: $20\log(1.875/100) = -34.5$ dB.

Average value = peak reading - 34.5.



NOTE 2:



The band edge emission plot on the next second page shows 52.1dBc between carrier maximum power and local maximum emission in restrict band (2.487GHz). The emission of carrier strength list in the test result of channel 78 at the item 4.2.7 is 92.74dBuV/m (Peak), so the maximum field strength in restrict band is $92.74 - 51.1 = 40.64$ dBuV/m, which is under 74 dBuV/m limit.

Average value = $40.64 - 34.50 = 6.14$ dBuV/m, which is under 54dBuV/m limit.

*The DH3 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on $0.625 * 3$ per 247 ms per channel. Therefore, the duty cycle be equal to: $20\log(1.875/100) = -34.5$ dB.

Average value = peak reading - 34.5.

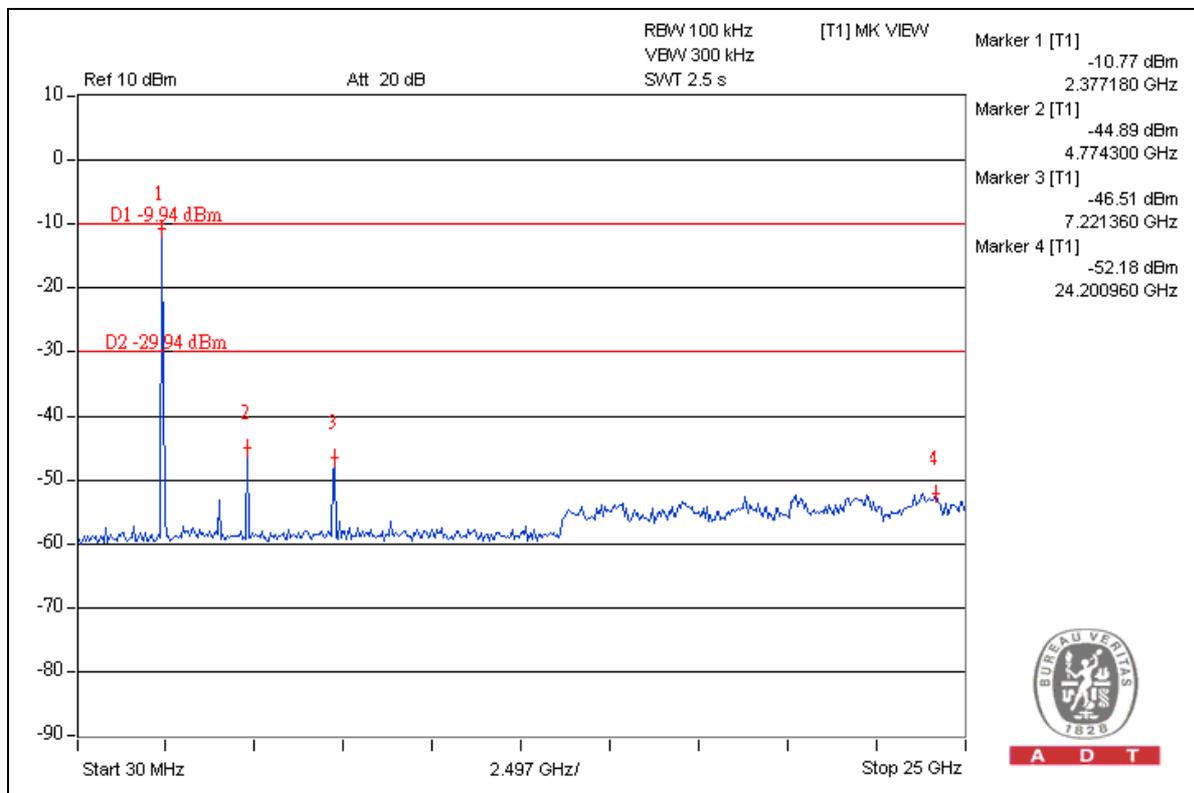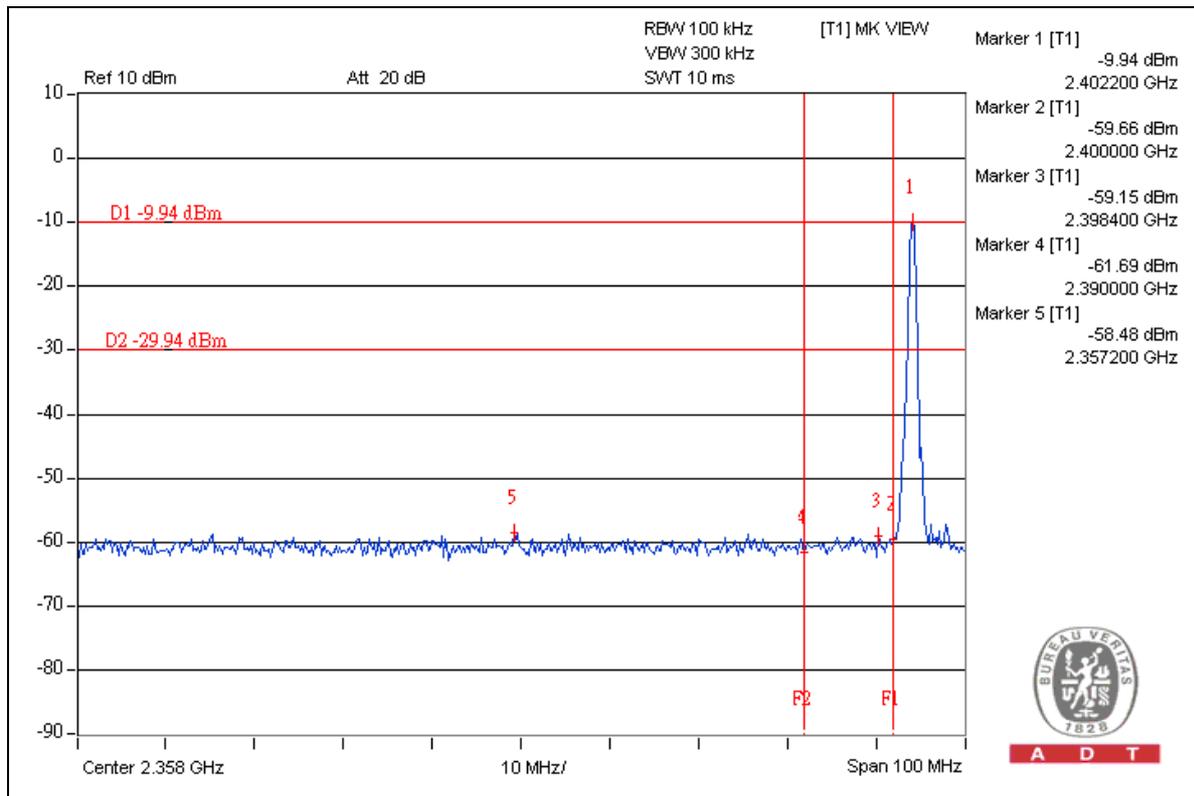

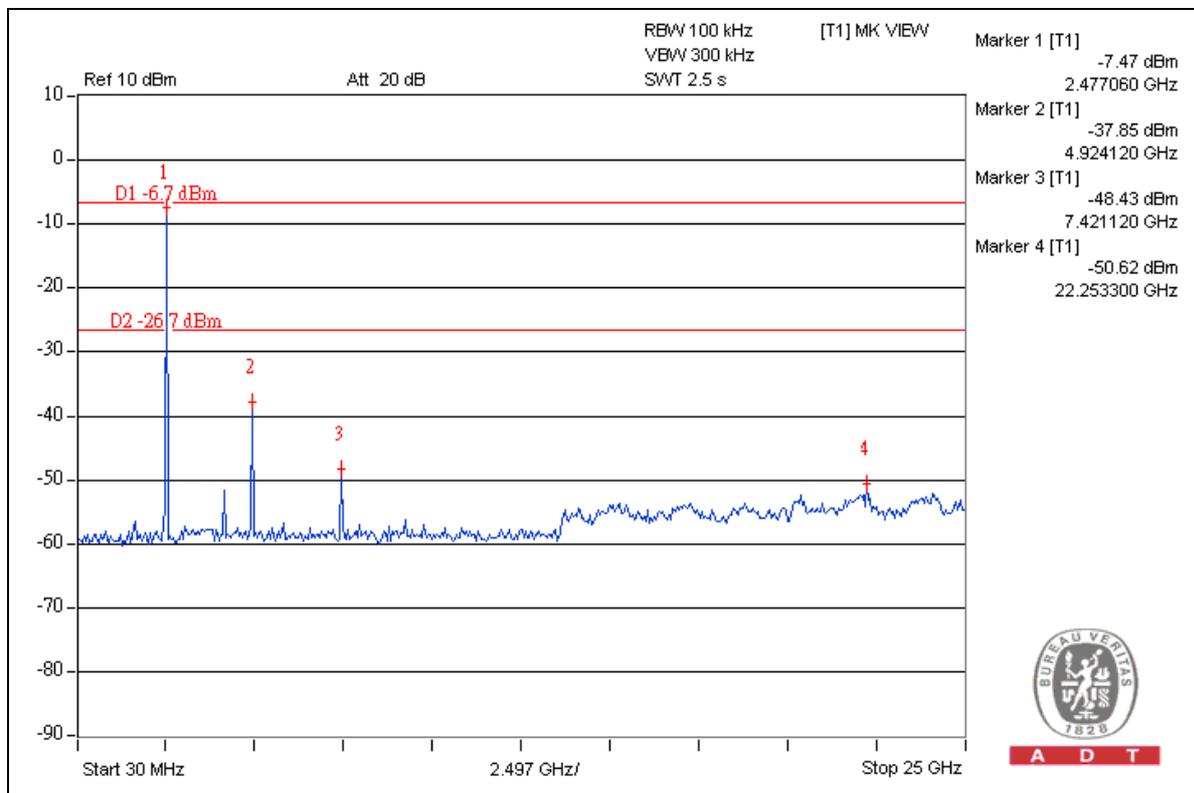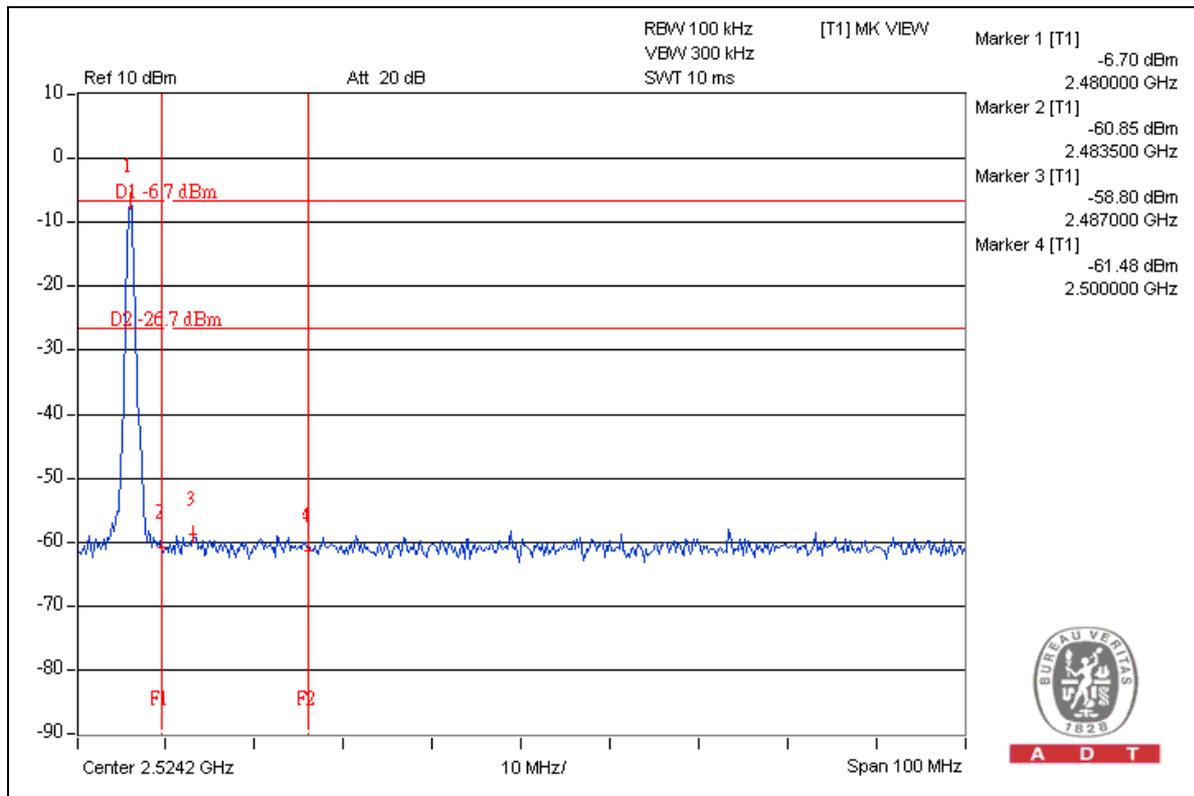



4.9 ANTENNA REQUIREMENT

4.9.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

4.9.2 ANTENNA CONNECTED CONSTRUCTION

The antenna used in this product is Printed antenna without antenna connector. The maximum gain of this antenna is -2.36dBi.



5. PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



6. INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

USA	FCC, UL
Germany	TUV Rheinland
Japan	VCCI
Norway	NEMKO
Canada	INDUSTRY CANADA, CSA
R.O.C.	TAF, BSMI, NCC
Netherlands	Telefication
Singapore	GOST-ASIA(MOU)
Russia	CERTIS(MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site:

www.adt.com.tw/index.5/phtml. If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:
Tel: 886-2-26052180
Fax: 886-2-26051924

Hsin Chu EMC/RF Lab:
Tel: 886-3-5935343
Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety Telecom Lab:
Tel: 886-3-3183232
Fax: 886-3-3185050

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.



7. APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

---END---