

**ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT
INTENTIONAL RADIATOR CERTIFICATION TO
FCC PART 15 SUBPART C REQUIREMENT**

OF

GlowTunes Bluetooth Rechargeable Mini Speaker

Model No.: iBT73, iBT73N, iBT73X, iBT73XC (X denotes as color of cabinet)

Trade Mark: iHome

FCC ID: EMOIBT73N

Report No.: KAD150423117E

Issue Date: June 30, 2015

Prepared for

**SDI Technologies Inc
1299, Main Street, Rahway, NJ 07065, U.S.A.**

Prepared by

DONGGUAN EMTEK CO., LTD.

**No.281, Guantai Road, Nancheng District,
Dongguan, Guangdong, China
TEL: 86-769-22807078
FAX: 86-769-22807079**

**This report shall not be reproduced, except in full, without the written approval of
DONGGUAN EMTEK CO., LTD.**


VERIFICATION OF COMPLIANCE

Applicant:	SDI Technologies Inc 1299, Main Street, Rahway, NJ 07065, U.S.A.
Manufacturer:	SDI Technologies Inc 1299, Main Street, Rahway, NJ 07065, U.S.A.
Product Description:	GlowTunes Bluetooth Rechargeable Mini Speaker
Trade Mark:	iHome
Model Number:	iBT73, iBT73N, iBT73X, iBT73XC (X denotes as color of cabinet) (Note: The samples are the same except model number. So iBT73 was selected for full test.)

We hereby certify that:

The above equipment was tested by DONGGUAN EMTEK CO., LTD. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10-2013 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.247(2014).

Date of Test : April 23, 2015 to June 17, 2015

Prepared by : 
Ivy Huang/Editor

Reviewer : 
Hong Yang/Supervisor

Approved & Authorized Signer : 
Sam Lv/Manager

Modified Information

Version	Summary	Revision Date	Report No.
Ver.1.0	Original Report	/	KAD150423117E

Table of Contents

1. GENERAL INFORMATION	6
1.1 PRODUCT DESCRIPTION.....	6
1.2 TEST FACILITY	7
2. SYSTEM TEST CONFIGURATION.....	8
2.1 EUT CONFIGURATION.....	8
2.2 EUT EXERCISE	8
2.3 TEST PROCEDURE	8
2.4 LIMITATION.....	9
2.5 CONFIGURATION OF TESTED SYSTEM	12
3. SUMMARY OF TEST RESULTS	13
4. DESCRIPTION OF TEST MODES	14
5. TEST SYSTEM UNCERTAINTY	15
6. CONDUCTED EMISSIONS TEST	16
6.1 MEASUREMENT PROCEDURE:	16
6.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	16
6.3 MEASUREMENT EQUIPMENT USED:	16
6.4 MEASUREMENT RESULT:.....	16
6.5 CONDUCTED MEASUREMENT PHOTOS:	19
7. RADIATED EMISSION TEST.....	20
7.1 MEASUREMENT PROCEDURE	20
7.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	22
7.3 MEASUREMENT EQUIPMENT USED:	23
7.4 MEASUREMENT RESULT	24
7.5 RADIATED MEASUREMENT PHOTOS:	36
8. CHANNEL SEPARATION TEST.....	37
8.1 MEASUREMENT PROCEDURE	37
8.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	37
8.3 MEASUREMENT EQUIPMENT USED:	37
8.4 MEASUREMENT RESULTS:.....	37
9. 20DB BANDWIDTH TEST	44
9.1 MEASUREMENT PROCEDURE	44
9.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	44
9.3 MEASUREMENT EQUIPMENT USED:	44
9.4 MEASUREMENT RESULTS:.....	44
10. QUANTITY OF HOPPING CHANNEL TEST	51

10.1 MEASUREMENT PROCEDURE	51
10.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	51
10.3 MEASUREMENT EQUIPMENT USED:.....	51
10.4 MEASUREMENT RESULTS:.....	51
11. TIME OF OCCUPANCY (DWELL TIME) TEST	52
11.1 TEST DESCRIPTION.....	52
11.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	52
11.3 MEASUREMENT EQUIPMENT USED:.....	52
11.2 TEST REQUIREMENTS / LIMITS	52
11.3 TEST RESULT	53
12. MAXIMUM PEAK OUTPUT POWER TEST	55
12.1 MEASUREMENT PROCEDURE	55
12.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	55
12.3 MEASUREMENT EQUIPMENT USED:.....	55
12.4 MEASUREMENT RESULTS:.....	55
13. BAND EDGE TEST	62
13.1 MEASUREMENT PROCEDURE	62
13.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	62
12.3 MEASUREMENT EQUIPMENT USED:.....	63
12.4 MEASUREMENT RESULTS:.....	64
13. ANTENNA APPLICATION	66
13.1 ANTENNA REQUIREMENT	66
13.2 RESULT	66

Appendix I (Photos of EUT) (4 pages)

1. GENERAL INFORMATION

1.1 Product Description

Characteristics	Description
Product Name	GlowTunes Bluetooth Rechargeable Mini Speaker
Model number	iBT73
Power Supply	DC 5V, 1A OR DC 3.7V, 500mA Lithium Battery
Kind of Device	Bluetooth Ver. 4.1+EDR
Modulation	GFSK, $\pi/4$ -DQPSK, 8DPSK
Operating Frequency Range	2402-2480MHz
Number of Channels	79
Transmit Power Max	5.54 dBm
Antenna Type	Internal PCB antenna
Antenna Gain	0 dBi
Product Hardware version	BT073-AB1511-C
Product Software version	V1.0
Radio Hardware Version	V1.0
Radio Software Version	V1.0
Test Software Version	V1.3.0.0

1.2 Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10-2013 and FCC Public Notice DA 00-705. Radiated testing was performed at an antenna to EUT distance 3 meters.

1.3 Test Facility

Site Description

EMC Lab. : Registered on FCC, June 18, 2014
The Certificate Number is 247565

Registered on Industry Canada, February 19, 2014
The Certificate Number is 9444A.

Name of Firm : DONGGUAN EMTEK CO., LTD.

Site Location : No.281, Guantai Road, Nancheng District,
Dongguan, Guangdong, China

2. System Test Configuration

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

The Transmitter was operated in the normal operating mode. The Tx frequency was fixed which was for the purpose of the measurements.

2.3 Test Procedure

2.3.1 Conducted Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.10-2013. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak and average detector mode.

2.3.2 Radiated Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of EUT was rotated through three orthogonal axes according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013.

2.4 Limitation

(1) Channel Separation test

FCC Part 15, Subpart C Section 15.247(a)(1). Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or the 20 Bandwidth of the hopping channel, whichever is greater.

Frequency Range (MHz)	Limit(kHz)
902-928	>25kHz
2400-2483.5	>25kHz
5725-5850	>25kHz

(2) 20dB Bandwidth

Frequency Range(MHz)	Quantity of Hopping Channel	Limit(kHz)			
		50	25	15	75
902-928		<250	>250	NA	NA
2400-2483.5		NA	NA	>1000	<1000

(3) Quantity of Hopping Channel

FCC Part 15, Subpart C Section 15.247

Frequency Range (MHz)	Limit(Quantity of Hopping Channel)			
	20dB bandwidth <250kHz	20dB bandwidth >25 0kHz	20dB bandwidth <1MHz	20dB bandwidth >1 MHz
902-928	50	25	NA	NA
2400-2483.5	NA	NA	15	15
5725-5850	NA	NA	75	NA

(4) Time of Occupancy(Dwell Time)

FCC Part 15, Subpart C Section 15.247

Frequency Range (MHz)	LIMIT(rms)		
	20dB bandwidth <250kHz(50Channel)	20dB bandwidth >250kHz(2 5Channel)	20dB bandwidth <1MHz(75Channel)
902-928	400(20S)	400(10S)	NA
2400-2483.5	NA	NA	400(30S)
5725-5850	NA	NA	400(30S)

Note: The “()”is all channel’s average time of occupancy.

(5) Maximum Peak Output Power

FCC Part 15, Subpart C Section 15.247

Frequency Range (MHz)	Quantity of Hopping Channel	LIMIT(W)			
		50	25	15	75
902-928		1(30dBm)	0.125(21dBm)	NA	NA
2400-2483.5		NA	NA	0.125(21dBm)	1(30dBm)
5725-5850		NA	NA	NA	1(30dBm)

(6) Band edge

FCC Part15, Subpart C Section 15.247, In any 100kHz bandwidth outside the frequency band in with the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, attenuation below the general limits specified in section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in section 15.205(a), must also comply with the radiated emission limits specified in section 15.209(a).

Operating Frequency Range(MHz)	Spurious emission frequency	Peak power ration to emission(dBc)	Limit
			Emission level(dBuV/m)
902-928	<902	>20	NA
	>928	>20	NA
	960-1240	NA	54
2400-2483.5	<2400	>20	NA
	>2483.5-2500	NA	54
5725-5850	<5350-5460	NA	54
	<5725	>20	NA
	>5850	>20	NA

(7) Conducted Emission

Frequency(MHz)	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

Note:

1. The lower limit shall apply at the transition frequencies
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

(8) Radiated Emission

FCC Part 15, Subpart C Section 15.209 limit of radiated emission for frequency below 1000MHz. The emissions from an intentional radiator shall not exceed the field strength level specified in the following table:

Frequency (MHz)	Field strength $\mu\text{V/m}$	Distance(m)	Field strength at 3m $\text{dB}\mu\text{V/m}$
0.009-0.490	2400/F(kHz)	300	/
0.490-1.705	24000/F(kHz)	30	/
1.705-30.0	30	30	/
30-88	100	3	40
88-216	150	3	43.5
216-960	200	3	46
Above 960	500	3	54

Remark 1. Emission level in $\text{dB}\mu\text{V/m} = 20 \log(\mu\text{V/m})$
: 2. Measurement was performed at an antenna to the closed point of EUT distance of meters.

FCC Part 15, Section 15.35(b) limit of radiated emission for frequency above 1000MHz

Frequency(MHz)	Class A($\text{dB}\mu\text{V/m}$)(at 3m)		Class B($\text{dB}\mu\text{V/m}$)(at 3m)	
	PEAK	AVERAGE	PEAK	AVERAGE
Above 1000	80.0	60.0	74.0	54.0

FCC Part 15, Subpart C Section 15.249. The field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Frequency(MHz)	Filed Strength of Fundamental(at 3m)		Filed Strength of Harmonics(at 3m)	
	PEAK	AVERAGE	PEAK	AVERAGE
902-928	114	94	74.0	54.0
2400-2483.5	114	94	74.0	54.0
5725-5875	114	94	74.0	54.0
24000-24250	128	108	88.0	68.0

2.5 Configuration of Tested System

Fig. 2-1 Configuration of Tested System




Table 2-1 Equipment Used in Tested System

Item	Equipment	Trade Mark	Model No.	FCC ID	Note
1.	GlowTunes Bluetooth Rechargeable Mini Speaker	iHome	iBT73	EMOIBT73N	<i>EUT</i>
2	Adapter	N/A	YSV6-0501000 US Input: AC 100-240V, 50/60Hz Output: DC 5V, 1000mA	N/A	<i>Support Equipment</i>

Note:

- (1) Unless otherwise denoted as EUT in 『Remark』 column , device(s) used in tested system is a support equipment.

3. Summary of Test Results

FCC Rules	Description Of Test	Result
§15.207	AC Power Conducted Emission	Compliant
§15.247(d),§15.209	Radiated Emission	Compliant
§15.247(a)(1)	Channel Separation test	Compliant
§15.247(a)(1)	20dB Bandwidth	Compliant
§15.247(a)(1)(iii)	Quantity of Hopping Channel	Compliant
§15.247(a)(1)(iii)	Time of Occupancy(Dwell Time)	Compliant
§15.247(b)	Max Peak output Power test	Compliant
§15.247(d)	Band edge test	Compliant
§15.203	Antenna Requirement	Compliant

4. Description of test modes

The EUT has been tested under its typical operating condition. Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting. Only the worst case data were reported.

The EUT has been associated with peripherals pursuant to ANSI C63.10-2013 and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiation (9 KHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).

For Radiated: The EUT's antenna was pre-tested under the following modes:

Test Mode	Description
Mode A	X-Y axis
Mode B	Y-Z axis
Mode C	X-Z axis

From the above modes, the worst case was found in Mode A. Therefore only the test data of the mode was recorded in this report.

This EUT is a FHSS system, were conducted to determine the final configuration from all possible combinations. We use software control the EUT, Let EUT hopping on and transmit with highest power, all the modes GFSK, $\pi/4$ -DQPSK, 8DPSK have been tested. 79 Channels are provided by EUT.

The EUT fixed at the lowest, middle, or highest channel and below 3 channels were chosen for test.

Channel	Frequency(MHz)
1	2402
40	2441
79	2480

5. TEST SYSTEM UNCERTAINTY

The following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-5}$
Maximum Peak Output Power Test	$\pm 1.0\text{dB}$
Conducted Emissions Test	$\pm 2.0\text{dB}$
Radiated Emission Test	$\pm 2.0\text{dB}$
Power Density	$\pm 2.0\text{dB}$
Occupied Bandwidth Test	$\pm 1.0\text{dB}$
Band Edge Test	$\pm 3\text{dB}$
All emission, radiated	$\pm 3\text{dB}$
Antenna Port Emission	$\pm 3\text{dB}$
Temperature	$\pm 0.5^\circ\text{C}$
Humidity	$\pm 3\%$


Measurement Uncertainty for a level of Confidence of 95%

6. Conducted Emissions Test

6.1 Measurement Procedure:

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured was complete.

6.2 Test SET-UP (Block Diagram of Configuration)

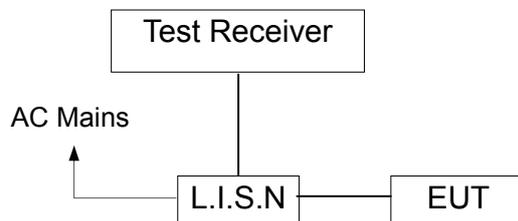

6.3 Measurement Equipment Used:


Conducted Emission Test Site						
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	Characteristics	Last Cal.	Due date
Test Receiver	Rohde & Schwarz	ESCS30	100018	9kHz~3GHz	03/15/2015	03/14/2016
L.I.S.N	Rohde & Schwarz	ENV216	100017	9KHz-300MHz	03/15/2015	03/14/2016
RF Switching Unit	CDS	RSU-M2	38401	9KHz-300MHz	03/15/2015	03/14/2016
Coaxial Cable	CDS	79254	46107086	9kHz~3GHz	03/15/2015	03/14/2016

6.4 Measurement Result:

Pass.

All the modulation modes were tested the data of the worst mode (GFSK TX 2402MHz) are recorded in the following pages and the others modulation methods do not exceed the limits.


Please refer to the following data.

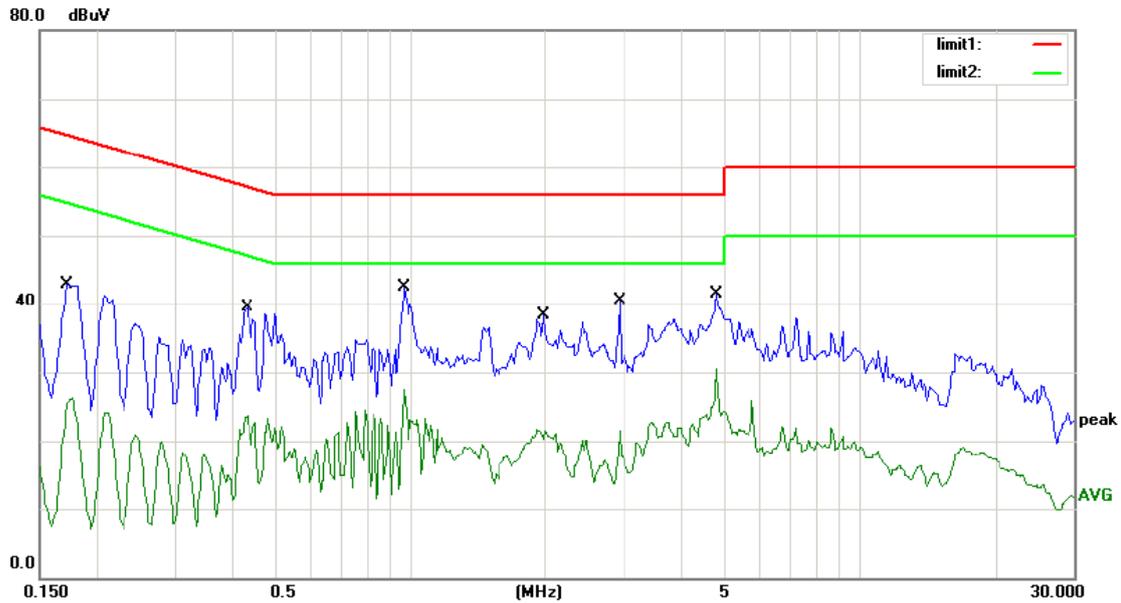

Site site #1 Phase: **L1** Temperature: 24
 Limit: (CE)FCC PART 15 class B_QP Power: AC 120V/60Hz Humidity: 55 %
 Mode: TX
 Note:

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Over dB	Detector	Comment
1	0.1725	42.95	0.00	42.95	64.84	-21.89	QP	
2	0.1725	26.38	0.00	26.38	54.84	-28.46	AVG	
3	0.4335	39.48	0.00	39.48	57.19	-17.71	QP	
4	0.4335	23.64	0.00	23.64	47.19	-23.55	AVG	
5 *	0.9735	42.41	0.00	42.41	56.00	-13.59	QP	
6	0.9735	27.52	0.00	27.52	46.00	-18.48	AVG	
7	1.9905	38.30	0.00	38.30	56.00	-17.70	QP	
8	1.9905	21.72	0.00	21.72	46.00	-24.28	AVG	
9	2.9300	40.41	0.00	40.41	56.00	-15.59	QP	
10	2.9300	21.59	0.00	21.59	46.00	-24.41	AVG	
11	4.8200	41.42	0.00	41.42	56.00	-14.58	QP	
12	4.8200	30.41	0.00	30.41	46.00	-15.59	AVG	

*:Maximum data x:Over limit !:over margin Comment: Factor build in receiver.

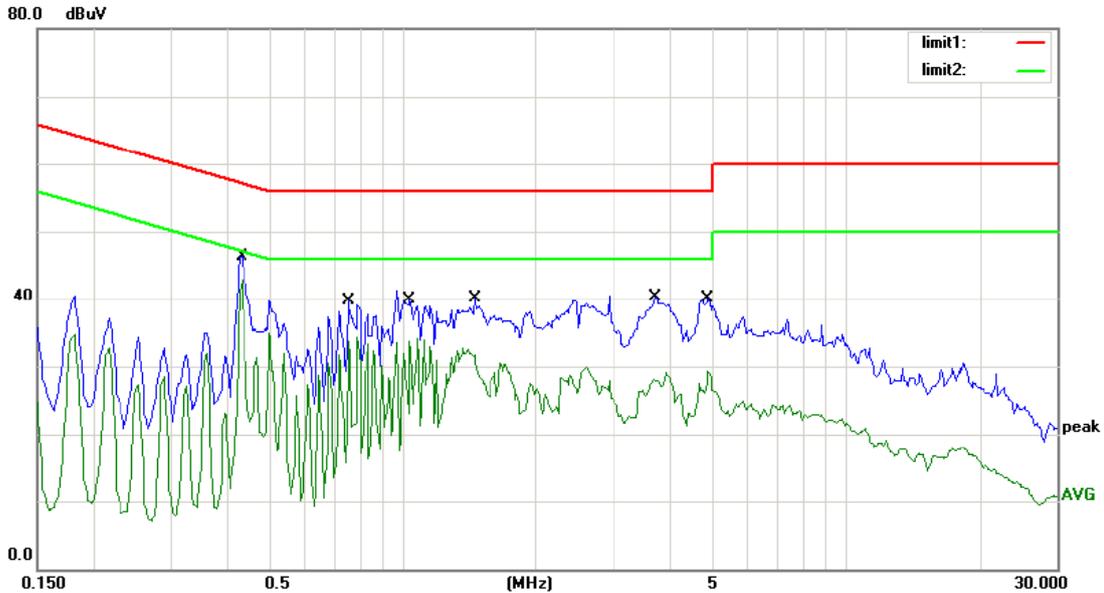

Site site #1 Phase: **N** Temperature: 24
 Limit: (CE)FCC PART 15 class B_QP Power: AC 120V/60Hz Humidity: 55 %
 Mode: TX
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.4335	43.50	0.00	43.50	57.19	-13.69	QP	
2	*	0.4335	42.88	0.00	42.88	47.19	-4.31	AVG	
3		0.7530	37.60	0.00	37.60	56.00	-18.40	QP	
4		0.7530	34.22	0.00	34.22	46.00	-11.78	AVG	
5		1.0410	39.90	0.00	39.90	56.00	-16.10	QP	
6		1.0410	34.03	0.00	34.03	46.00	-11.97	AVG	
7		1.4505	40.14	0.00	40.14	56.00	-15.86	QP	
8		1.4505	32.71	0.00	32.71	46.00	-13.29	AVG	
9		3.7300	40.38	0.00	40.38	56.00	-15.62	QP	
10		3.7300	29.14	0.00	29.14	46.00	-16.86	AVG	
11		4.8900	40.09	0.00	40.09	56.00	-15.91	QP	
12		4.8900	29.25	0.00	29.25	46.00	-16.75	AVG	

*:Maximum data x:Over limit !:over margin Comment: Factor build in receiver.

6.5 Conducted Measurement Photos:



7. Radiated Emission Test

7.1 Measurement Procedure

1. The testing follows the guidelines in Spurious Radiated Emissions of FCC Public Notice DA 00-705 Measurement Guidelines.
2. Below 1000MHz, The EUT was placed on a turn table which is 0.8m above ground plane. And above 1000MHz, The EUT was placed on a styrofoam table which is 1.5m above ground plane.
3. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (From 1m to 4m) and turntable (from 0 degree to 360 degree) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Final measurement (Above 1GHz): The frequency range will be divided into different sub ranges depending of the frequency range of the used horn antenna. The EMI Receiver set to peak and average mode and a resolution bandwidth of 1MHz. The measurement will be performed in horizontal and vertical polarization of the measuring antenna and while rotating the EUT in its vertical axis in the range of 0 degree to 360 degree in order to have the antenna inside the cone of radiation.
7. Test Procedure of measurement (For Above 1GHz):
 - 1) Monitor the frequency range at horizontal polarization and move the antenna over all sides of the EUT(if necessary move the EUT to another orthogonal axis).
 - 2) Change the antenna polarization and repeat 1) with vertical polarization.
 - 3) Make a hardcopy of the spectrum.
 - 4) Measure the frequency of the detected emissions with a lower span and resolution bandwidth to increase the accuracy and note the frequency value.
 - 5) Change the analyser mode to Clear/ Write and found the cone of emission.
 - 6) Rotate and move the EUT, so that the measuring distance can be enlarged to 3m and the antenna will be still inside the cone of emission.
 - 7) Measure the level of the detected frequency with the correct resolution bandwidth, with the antenna polarization and azimuth and the peak and average detector, which causes the maximum emission.
 - 8) Repeat steps 1) to 7) for the next antenna spot if the EUT is larger than the antenna beamwidth.

When spectrum scanned from 30MHz to 1GHz setting resolution bandwidth 120KHz and video bandwidth 300KHz:

EMI Test Receiver	Setting
Attenuation	Auto
RB	120KHz
VB	300KHz
Detector	QP
Trace	Max hold

When spectrum scanned above 1GHz setting resolution bandwidth 1MHz, video bandwidth 3MHz:


EMI Test Receiver	Setting
Attenuation	Auto
RB	1MHz
VB	3MHz
Detector	Peak
Trace	Max hold

When spectrum scanned above 1GHz setting resolution bandwidth 1MHz, video bandwidth 10Hz:


EMI Test Receiver	Setting
Attenuation	Auto
RB	1MHz
VB	10Hz
Detector	Peak
Trace	Max hold

7.2 Test SET-UP (Block Diagram of Configuration)


(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

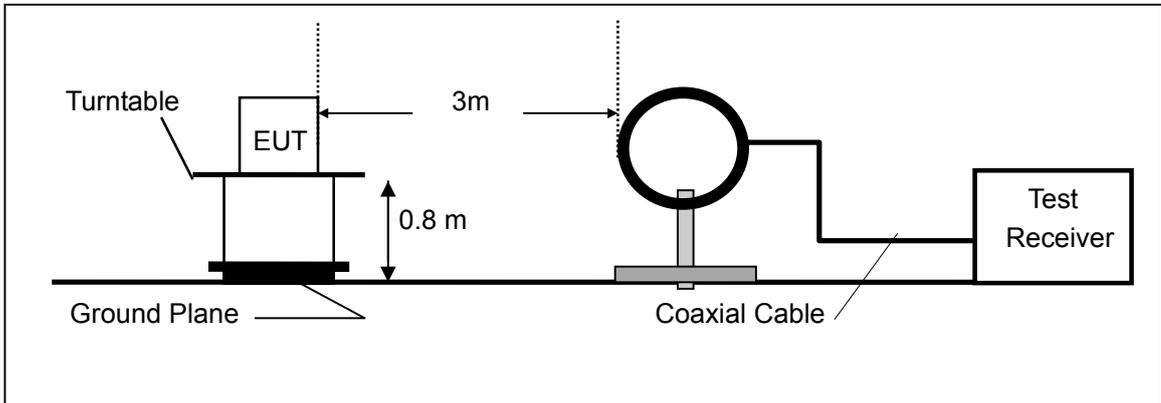

(B) Radiated Emission Test Set-Up, Frequency Below 1000MHz

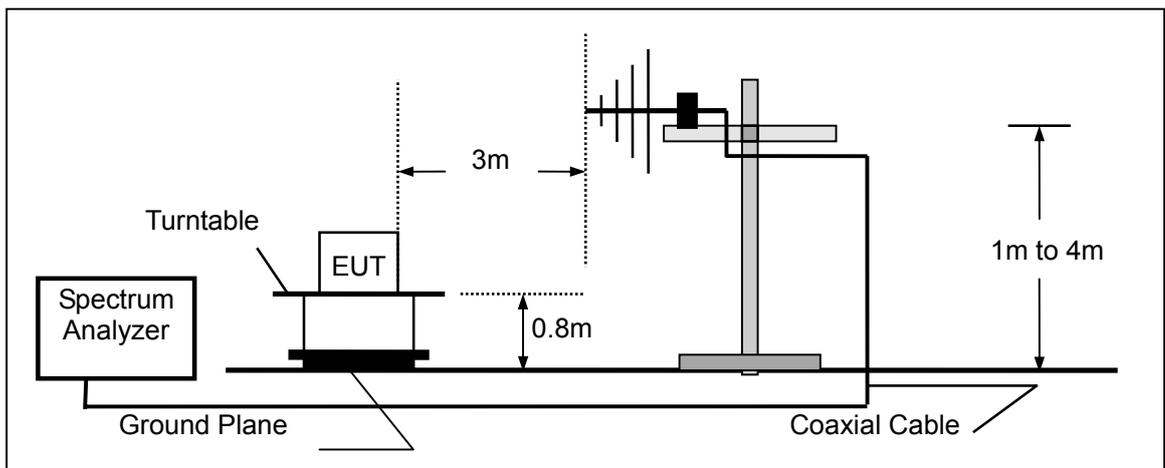

(C) Radiated Emission Test Set-Up, Frequency above 1000MHz

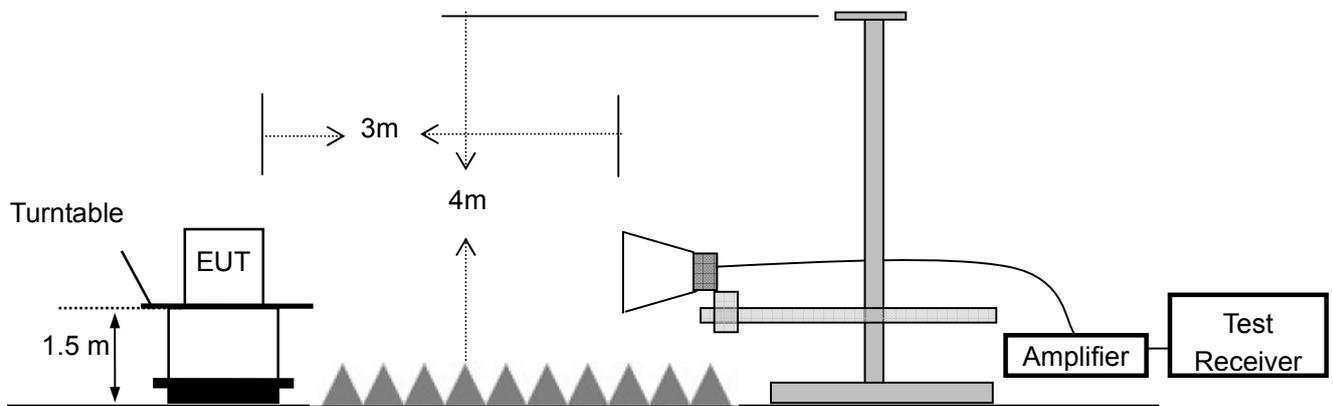

7.3 Measurement Equipment Used:

Item	Equipment	Manufacturer	Model No.	Serial No.	Characteristics	Last Cal.	Cal. Interval
1.	Test Receiver	Rohde & Schwarz	ESCI	1166.5950.03	9KHz-3GHz	3/15/2015	1 Year
2.	Loop Antenna	Schwarzbeck	FMZB 1519	012	9 KHz -30MHz	12/29/2014	1 Year
3.	Bilog Antenna	Schwarzbeck	VULB9163	000141	25MHz-2GHz	3/15/2015	1 Year
4.	Power Amplifier	CDS	RSU-M352	818	1MHz-1GHz	3/15/2015	1 Year
5.	Power Amplifier	HP	8447F	OPT H64	1GHz-26.5GHz	3/15/2015	1 Year
6.	Color Monitor	SUNSP0	SP-140A	N/A	--	3/15/2015	1 Year
7.	Single Line Filter	JIANLI	XL-3	N/A	--	3/15/2015	1 Year
8.	Single Phase Power Line Filter	JIANLI	DL-2X100B	N/A	--	3/15/2015	1 Year
9.	3 Phase Power Line Filter	JIANLI	DL-4X100B	N/A	--	3/15/2015	1 Year
10.	DC Power Filter	JIANLI	DL-2X50B	N/A	--	3/15/2015	1 Year
11.	Cable	Schwarzbeck	PLF-100	549489	9KHz-3GHz	3/15/2015	1 Year
12.	Cable	Rosenberger	CIL02	A0783566	9KHz-3GHz	3/15/2015	1 Year
13.	Cable	Rosenberger	RG 233/U	525178	9KHz-3GHz	3/15/2015	1 Year
14.	Signal Analyzer	Rohde & Schwarz	FSV30	103040	9KHz-40GHz	12/29/2014	1 Year
15.	Horn Antenna	Schwarzbeck	BBHA9120D	9120D-1272	1GHz-18GHz	12/29/2014	1 Year
16.	Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170399	14GHz -26.5GHz	12/29/2014	1 Year
17.	Power Amplifier	LUNAR EM	LNA1G18-40	J10100000081	1GHz-26.5GHz	12/29/2014	1 Year
18.	Cable	H+S	CBL-26	N/A	1GHz-26.5GHz	12/29/2014	1 Year
19.	Cable	H+S	CBL-26	N/A	1GHz-26.5GHz	12/29/2014	1 Year
20.	Cable	H+S	CBL-26	N/A	1GHz-26.5GHz	12/29/2014	1 Year

7.4 Measurement Result

Below 30MHz:

Operation Mode:	TX	Test Date :	May 09, 2015
Frequency Range:	9KHz~30MHz	Temperature :	28°C
Test Result:	PASS	Humidity :	65 %
Measured Distance:	3m	Test By:	Andy

Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV/m)	Limit 3m (dBuV/m)	Over (dB)
--	--	--	--	--


Note: the amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

Below 1000MHz:

Pass.

All the modulation modes were tested the data of the worst mode (TX 2402MHz) are recorded in the following pages and the others modulation methods do not exceed the limits.

Please refer to the following data.

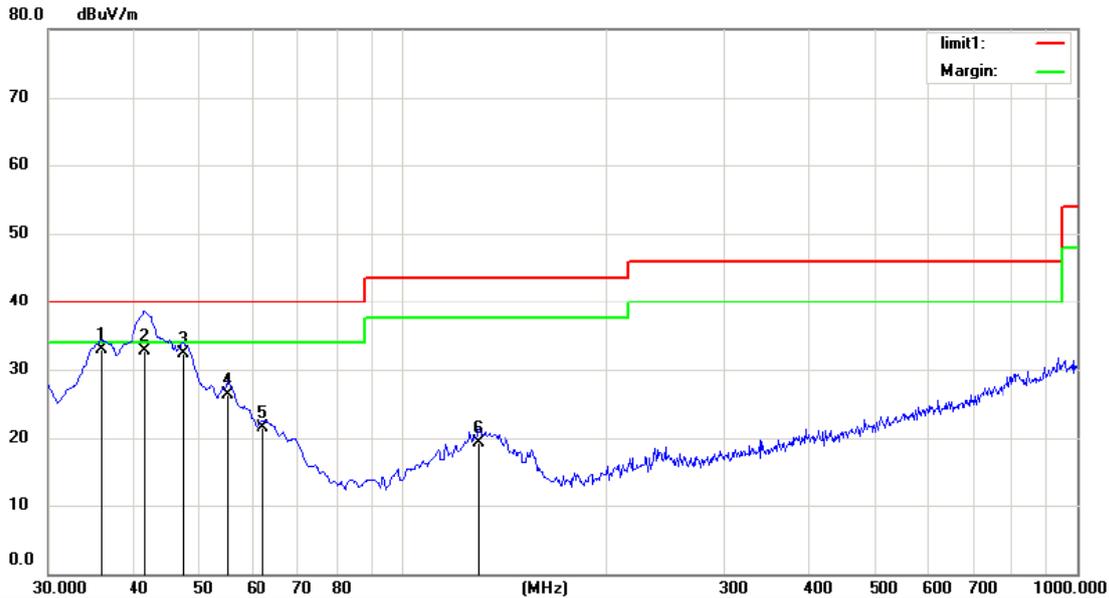


Site Chamber #1 Polarization: **Vertical** Temperature: 24
 Limit: (RE)FCC PART 15 class B 3m Power: AC 120V/60Hz Humidity: 55 %
 Mode: TX2402(GFSK)
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1	*	35.8200	46.93	-14.08	32.85	40.00	-7.15	QP		
2		41.6400	46.20	-13.58	32.62	40.00	-7.38	QP		
3		47.4600	46.76	-14.38	32.38	40.00	-7.62	QP		
4		55.2200	43.75	-17.46	26.29	40.00	-13.71	QP		
5		62.0100	41.57	-19.98	21.59	40.00	-18.41	QP		
6		129.9100	35.74	-16.35	19.39	43.50	-24.11	QP		

*:Maximum data x:Over limit !:over margin

Operator: Snake

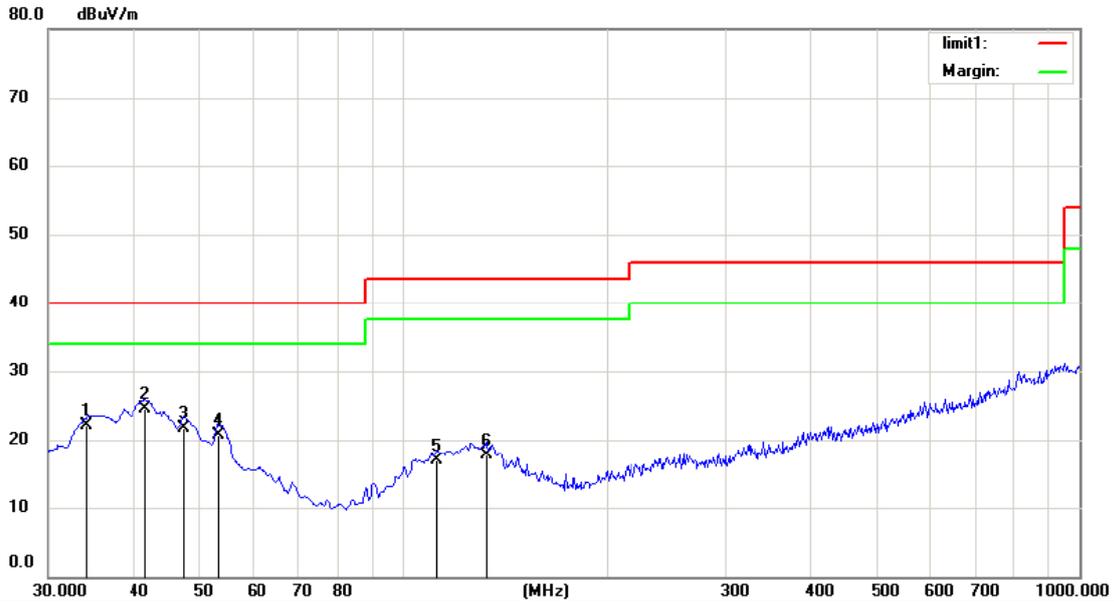

Site Chamber #1

Polarization: **Horizontal**

Temperature: 24

Limit: (RE)FCC PART 15 class B 3m

Power: AC 120V/60Hz

Humidity: 55 %


Mode: TX2402(Pi/4-DQPSK)

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		33.9174	36.42	-14.30	22.12	40.00	-17.88	QP		
2	*	41.6400	38.05	-13.58	24.47	40.00	-15.53	QP		
3		47.4600	35.99	-14.38	21.61	40.00	-18.39	QP		
4		53.2800	37.41	-16.70	20.71	40.00	-19.29	QP		
5		112.4500	34.38	-17.43	16.95	43.50	-26.55	QP		
6		132.8200	34.08	-16.39	17.69	43.50	-25.81	QP		

*:Maximum data x:Over limit !:over margin

Operator: Snake

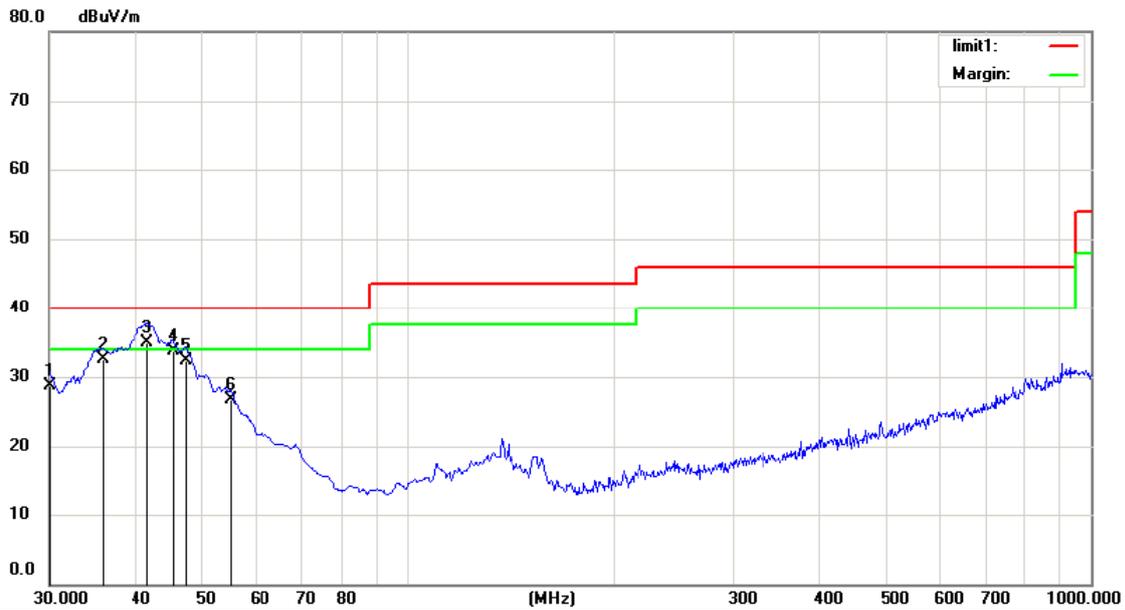


Site Chamber #1 Polarization: **Vertical** Temperature: 24
 Limit: (RE)FCC PART 15 class B 3m Power: AC 120V/60Hz Humidity: 55 %
 Mode: TX2402(Pi/4-DQPSK)
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		30.0000	43.86	-15.15	28.71	40.00	-11.29	QP		
2		35.8200	46.65	-14.08	32.57	40.00	-7.43	QP		
3	*	41.6400	48.50	-13.58	34.92	40.00	-5.08	QP		
4		45.5200	47.47	-13.76	33.71	40.00	-6.29	QP		
5		47.4600	46.73	-14.38	32.35	40.00	-7.65	QP		
6		55.2200	44.07	-17.46	26.61	40.00	-13.39	QP		

*:Maximum data x:Over limit !:over margin

Operator: Snake

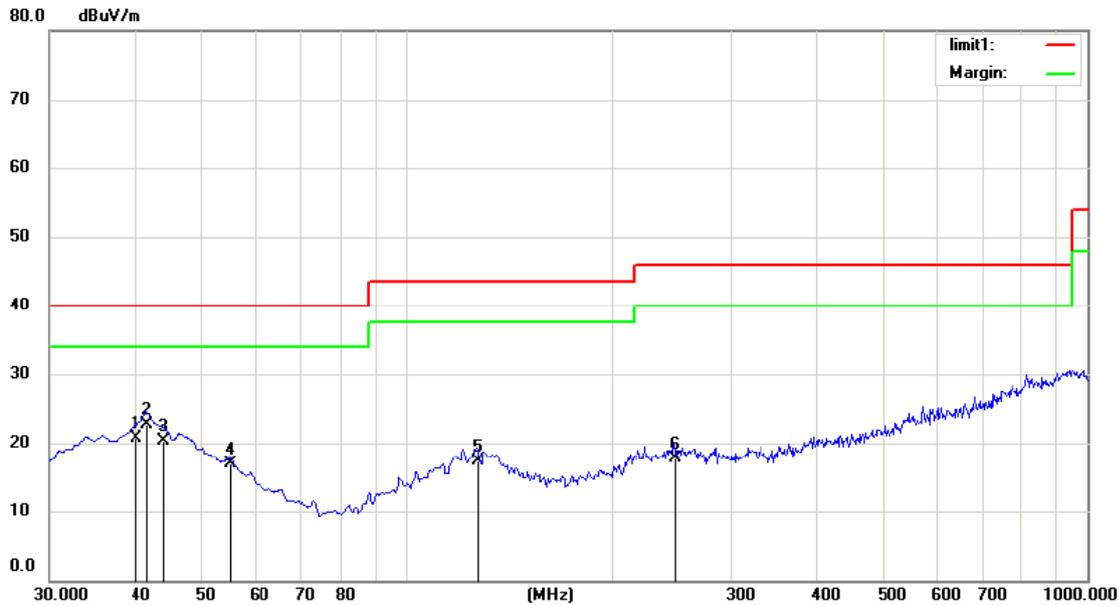


Site Chamber #1 Polarization: **Horizontal** Temperature: 24
 Limit: (RE)FCC PART 15 class B 3m Power: AC 120V/60Hz Humidity: 55 %
 Mode: TX2402(8DPSK)
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		40.1347	34.36	-13.67	20.69	40.00	-19.31			QP
2	*	41.6400	36.23	-13.58	22.65	40.00	-17.35			QP
3		44.1202	33.64	-13.36	20.28	40.00	-19.72			QP
4		55.2200	34.44	-17.46	16.98	40.00	-23.02			QP
5		127.0000	33.63	-16.34	17.29	43.50	-26.21			QP
6		248.2500	33.21	-15.52	17.69	46.00	-28.31			QP

*:Maximum data x:Over limit !:over margin

Operator: Snake

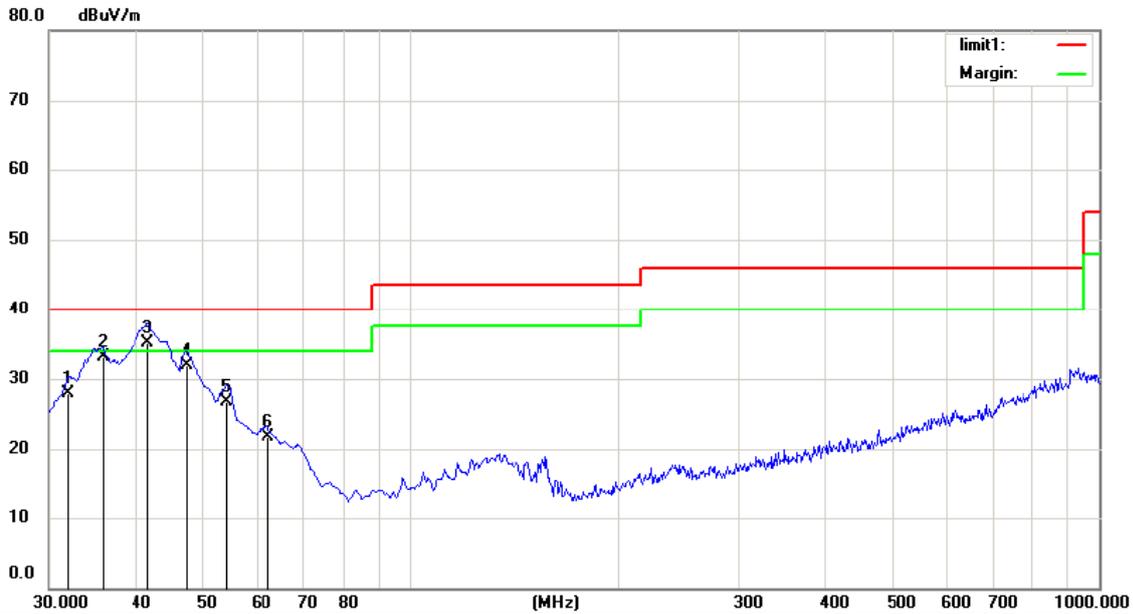

Site Chamber #1 Polarization: **Vertical** Temperature: 24
 Limit: (RE)FCC PART 15 class B 3m Power: AC 120V/60Hz Humidity: 55 %
 Mode: TX2402(8DPSK)
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1		31.9545	42.48	-14.63	27.85	40.00	-12.15	QP			
2		35.8200	47.11	-14.08	33.03	40.00	-6.97	QP			
3	*	41.6400	48.70	-13.58	35.12	40.00	-4.88	QP			
4		47.4600	46.34	-14.38	31.96	40.00	-8.04	QP			
5		54.2500	43.69	-17.08	26.61	40.00	-13.39	QP			
6		62.0100	41.73	-19.98	21.75	40.00	-18.25	QP			

*:Maximum data x:Over limit !:over margin

Operator: Snake

Above 1000MHz~10th Harmonics:

Operation Mode: GFSK (CH1: 2402MHz) Test Date : May 09, 2015

Freq. (MHz)	Ant. Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
4804	V	65.13	44.13	74	54	-8.87	-9.87
7206	V	64.05	43.06	74	54	-9.95	-10.94
9608	V	63.42	42.61	74	54	-10.58	-11.39
12010	V	62.09	41.85	74	54	-11.91	-12.15
14412	V	61.74	40.23	74	54	-12.26	-13.77
16814	V	60.05	39.56	74	54	-13.95	-14.44
4804	H	64.15	45.62	74	54	-9.85	-8.38
7206	H	63.29	44.51	74	54	-10.71	-9.49
9608	H	62.92	43.62	74	54	-11.08	-10.38
12010	H	61.04	42.05	74	54	-12.96	-11.95
14412	H	60.25	41.92	74	54	-13.75	-12.08
16814	H	58.72	40.36	74	54	-15.28	-13.64

Operation Mode: GFSK (CH40: 2441MHz) Test Date : May 09, 2015

Freq. (MHz)	Ant. Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
4882	V	65.33	44.11	74	54	-8.67	-9.89
7323	V	64.01	43.32	74	54	-9.99	-10.68
9764	V	63.25	42.05	74	54	-10.75	-11.95
12205	V	62.74	41.92	74	54	-11.26	-12.08
14646	V	61.95	40.24	74	54	-12.05	-13.76
17087	V	60.35	39.24	74	54	-13.65	-14.76
4882	H	64.25	45.62	74	54	-9.75	-8.38
7323	H	63.2	44.15	74	54	-10.8	-9.85
9764	H	62.13	43.62	74	54	-11.87	-10.38
12205	H	61.42	42.92	74	54	-12.58	-11.08
14646	H	60.39	41.42	74	54	-13.61	-12.58
17087	H	59.56	40.55	74	54	-14.44	-13.45

Operation Mode: GFSK (CH79: 2480MHz) Test Date : May 09, 2015

Freq. (MHz)	Ant. Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
4960	V	64.22	45.32	74	54	-9.78	-8.68
7440	V	63.15	44.12	74	54	-10.85	-9.88
9920	V	62.45	43.62	74	54	-11.55	-10.38
12400	V	61.69	42.08	74	54	-12.31	-11.92
14880	V	60.38	41.62	74	54	-13.62	-12.38
17360	V	59.74	40.33	74	54	-14.26	-13.67
4960	H	65.35	45.95	74	54	-8.65	-8.05
7440	H	64.15	44.13	74	54	-9.85	-9.87
9920	H	63.22	43.52	74	54	-10.78	-10.48
12400	H	62.9	42.69	74	54	-11.1	-11.31
14880	H	61.24	41.72	74	54	-12.76	-12.28
17360	H	59.43	40.69	74	54	-14.57	-13.31

Operation Mode: Pi/4-DQPSK (CH1: 2402MHz) Test Date : May 09, 2015

Freq. (MHz)	Ant. Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
4804	V	64.22	45.32	74	54	-9.78	-8.68
7206	V	63.01	44.05	74	54	-10.99	-9.95
9608	V	62.65	43.62	74	54	-11.35	-10.38
12010	V	61.85	42.18	74	54	-12.15	-11.82
14412	V	60.42	41.04	74	54	-13.58	-12.96
16814	V	58.46	40.36	74	54	-15.54	-13.64
4804	H	65.36	44.22	74	54	-8.64	-9.78
7206	H	64.15	43.62	74	54	-9.85	-10.38
9608	H	62.33	42.59	74	54	-11.67	-11.41
12010	H	61.42	41.72	74	54	-12.58	-12.28
14412	H	59.63	40.62	74	54	-14.37	-13.38
16814	H	58.03	38.49	74	54	-15.97	-15.51

Operation Mode: Pi/4-DQPSK (CH40: 2441MHz) Test Date : May 09, 2015

Freq. (MHz)	Ant. Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
4882	V	64.13	44.11	74	54	-9.87	-9.89
7323	V	63.05	43.25	74	54	-10.95	-10.75
9764	V	62.74	42.05	74	54	-11.26	-11.95
12205	V	61.22	41.62	74	54	-12.78	-12.38
14646	V	60.35	40.49	74	54	-13.65	-13.51
17087	V	58.74	38.76	74	54	-15.26	-15.24
4882	H	65.25	45.15	74	54	-8.75	-8.85
7323	H	64.13	44.05	74	54	-9.87	-9.95
9764	H	63.62	43.62	74	54	-10.38	-10.38
12205	H	62.55	42.15	74	54	-11.45	-11.85
14646	H	61.48	41.04	74	54	-12.52	-12.96
17087	H	59.69	40.69	74	54	-14.31	-13.31

Operation Mode: Pi/4-DQPSK (CH79: 2480MHz) Test Date : May 09, 2015

Freq. (MHz)	Ant. Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
4960	V	65.33	45.13	74	54	-8.67	-8.87
7440	V	64.15	44.05	74	54	-9.85	-9.95
9920	V	63.25	43.62	74	54	-10.75	-10.38
12400	V	62.41	42.55	74	54	-11.59	-11.45
14880	V	61.04	41.01	74	54	-12.96	-12.99
17360	V	60.92	40.36	74	54	-13.08	-13.64
4960	H	64.72	46.35	74	54	-9.28	-7.65
7440	H	63.59	45.25	74	54	-10.41	-8.75
9920	H	62.42	44.69	74	54	-11.58	-9.31
12400	H	61.59	43.62	74	54	-12.41	-10.38
14880	H	60.36	42.13	74	54	-13.64	-11.87
17360	H	59.76	40.56	74	54	-14.24	-13.44

Operation Mode: 8DPSK (CH1: 2402MHz) Test Date : May 09, 2015

Freq. (MHz)	Ant. Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
4804	V	65.14	45.15	74	54	-8.86	-8.85
7206	V	64.25	44.32	74	54	-9.75	-9.68
9608	V	63.92	43.62	74	54	-10.08	-10.38
12010	V	62.85	42.08	74	54	-11.15	-11.92
14412	V	61.72	41.92	74	54	-12.28	-12.08
16814	V	60.59	40.25	74	54	-13.41	-13.75
4804	H	64.05	44.15	74	54	-9.95	-9.85
7206	H	63.51	43.62	74	54	-10.49	-10.38
9608	H	62.92	42.01	74	54	-11.08	-11.99
12010	H	61.72	41.62	74	54	-12.28	-12.38
14412	H	60.05	40.92	74	54	-13.95	-13.08
16814	H	59.72	39.58	74	54	-14.28	-14.42

Operation Mode: 8DPSK (CH40: 2441MHz) Test Date : May 09, 2015

Freq. (MHz)	Ant. Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
4882	V	65.03	46.33	74	54	-8.97	-7.67
7323	V	64.15	45.05	74	54	-9.85	-8.95
9764	V	63.59	44.13	74	54	-10.41	-9.87
12205	V	62.34	43.69	74	54	-11.66	-10.31
14646	V	61.05	42.05	74	54	-12.95	-11.95
17087	V	60.58	41.42	74	54	-13.42	-12.58
4882	H	66.33	45.25	74	54	-7.67	-8.75
7323	H	65.42	44.15	74	54	-8.58	-9.85
9764	H	64.85	43.69	74	54	-9.15	-10.31
12205	H	63.92	42.05	74	54	-10.08	-11.95
14646	H	62.15	41.33	74	54	-11.85	-12.67
17087	H	60.36	40.7	74	54	-13.64	-13.3



Operation Mode: 8DPSK (CH79: 2480MHz) Test Date : May 09, 2015

Freq. (MHz)	Ant. Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
4960	V	68.42	47.85	74	54	-5.58	-6.15
7440	V	67.95	46.36	74	54	-6.05	-7.64
9920	V	66.36	45.15	74	54	-7.64	-8.85
12400	V	65.95	44.25	74	54	-8.05	-9.75
14880	V	64.12	43.25	74	54	-9.88	-10.75
17360	V	63.24	41.95	74	54	-10.76	-12.05
4960	H	67.95	46.95	74	54	-6.05	-7.05
7440	H	66.33	44.25	74	54	-7.67	-9.75
9920	H	65.01	43.15	74	54	-8.99	-10.85
12400	H	64.35	42.05	74	54	-9.65	-11.95
14880	H	63.95	40.13	74	54	-10.05	-13.87
17360	H	60.59	39.55	74	54	-13.41	-14.45

Other harmonics emissions are lower than 20dB below the allowable limit.

- Note:**
- (1) All Readings are Peak Value and AV.
 - (2) Emission Level= Reading Level+ Probe Factor +Cable Loss.
 - (3) The average measurement was not performed when the peak measured data under the limit of average detection.

7.5 Radiated Measurement Photos:

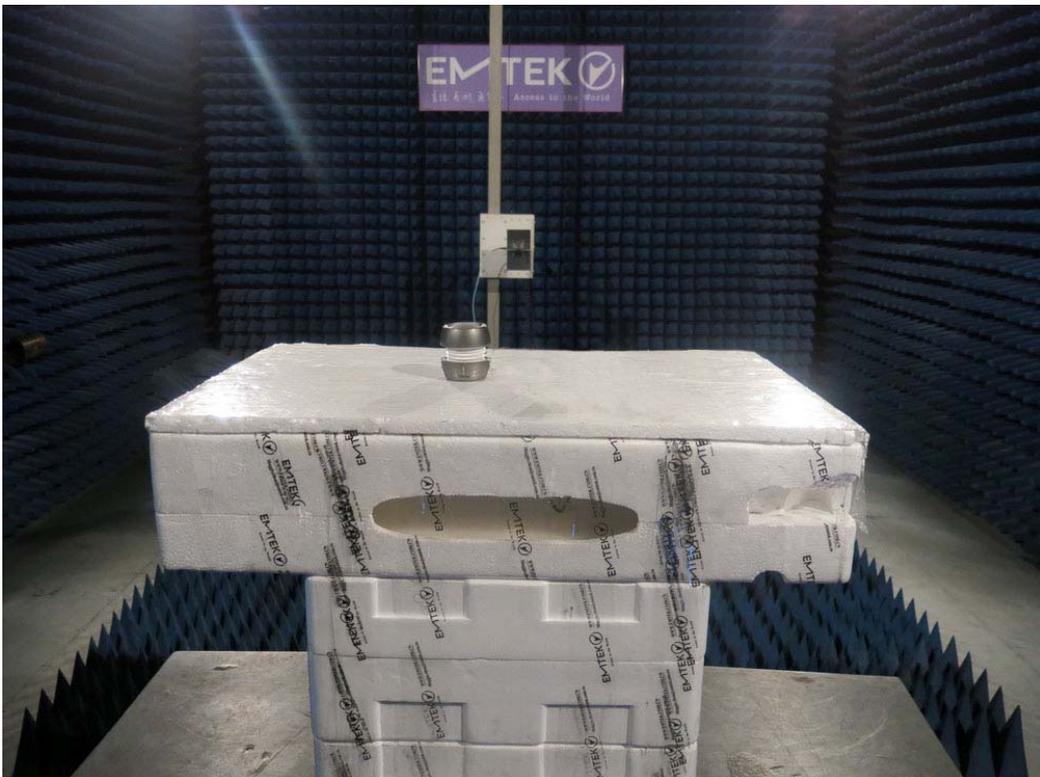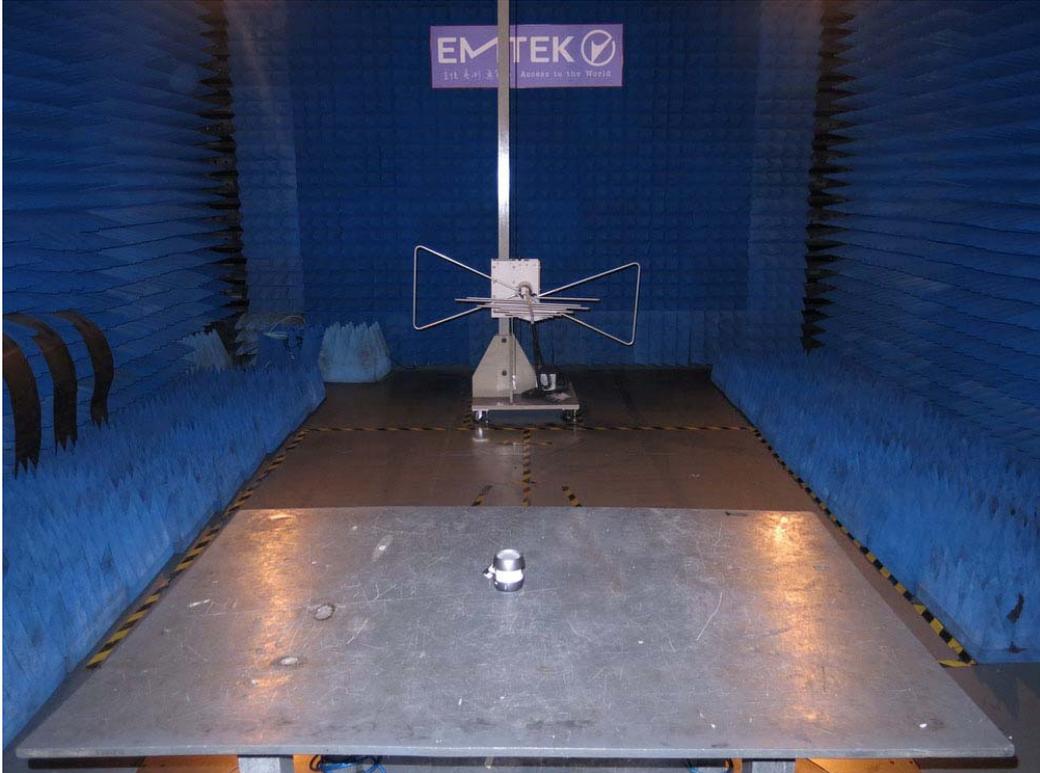


8. Channel Separation test

8.1 Measurement Procedure

The EUT was operating in hopping mode or could be controlled its channel. Printed out the test result from the spectrum by hard copy function.

8.2 Test SET-UP (Block Diagram of Configuration)



8.3 Measurement Equipment Used:

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	Characteristics	LAST CAL.	CAL DUE.
Spectrum Analyzer	Rohde & Schwarz	FSV30	1321.3008K	10Hz-30GHz	03/15/2015	03/14/2016
Coaxial Cable	CDS	79254	46107086	10Hz-30GHz	03/15/2015	03/14/2016
Antenna Connector	ARTHUR-YANG	2244-N1TG1	N/A	10Hz-30GHz	03/15/2015	03/14/2016



Remark: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.


8.4 Measurement Results:

Refer to attached data chart.

Spectrum Detector:	PK	Test Date :	May 09, 2015
Test By:	Andy	Temperature :	25 °C
Test Result:	PASS	Humidity :	50 %
Modulation:	GFSK		



Channel number	Channel frequency (MHz)	Separation Read Value (kHz)	Separation Limit (kHz)
1	2402	1001	>815
40	2441	1001	>815
79	2480	1001	>815

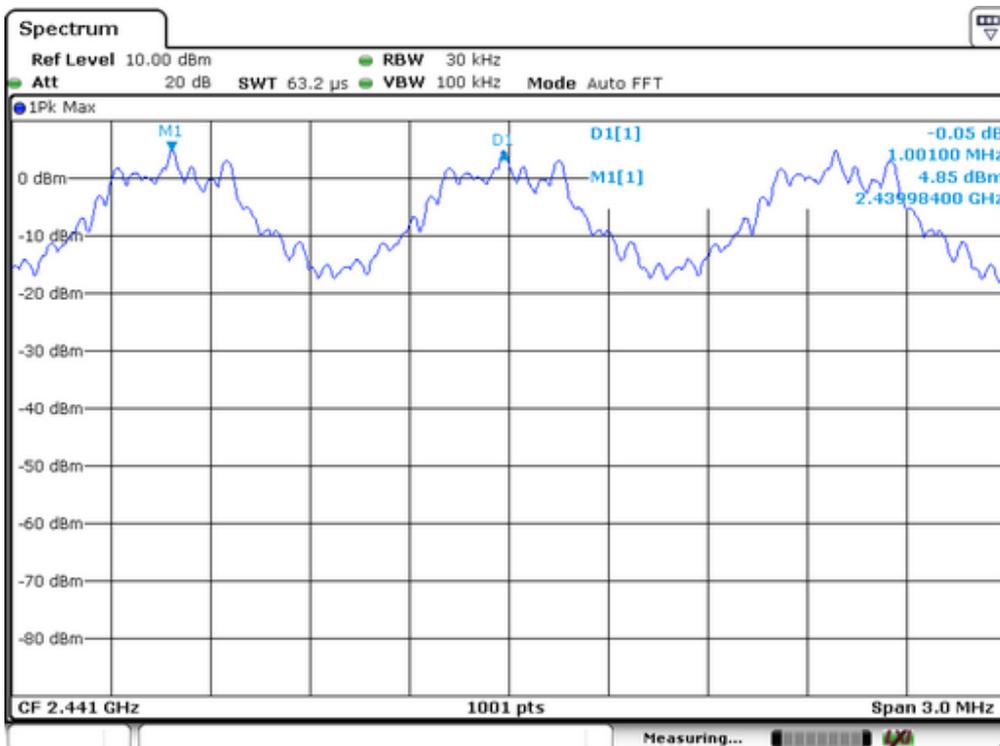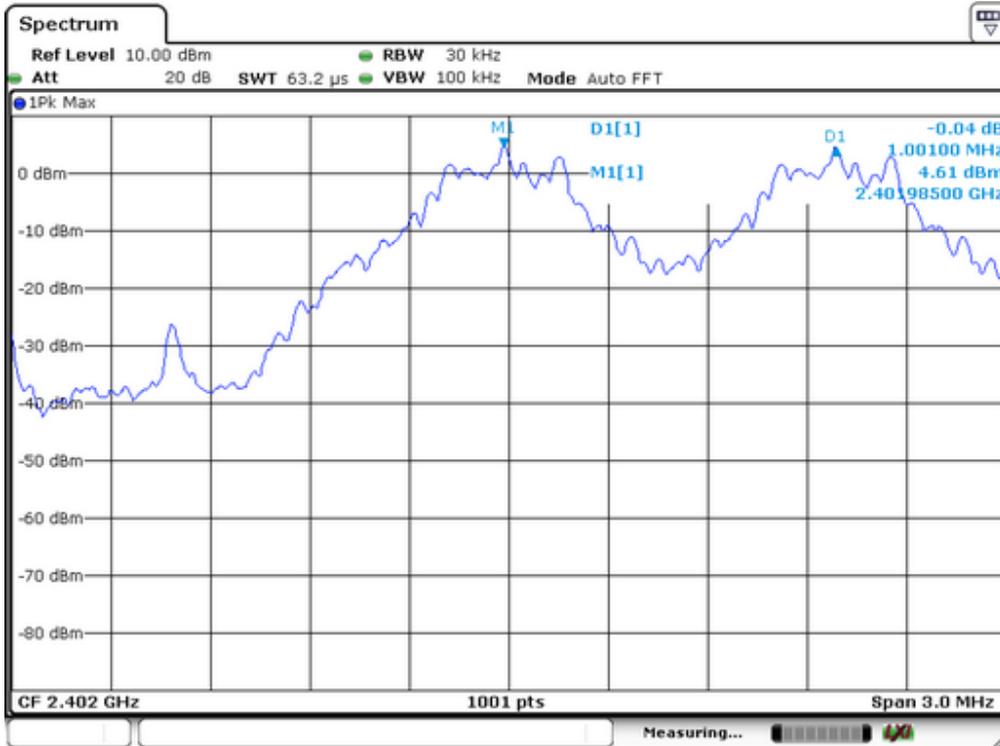


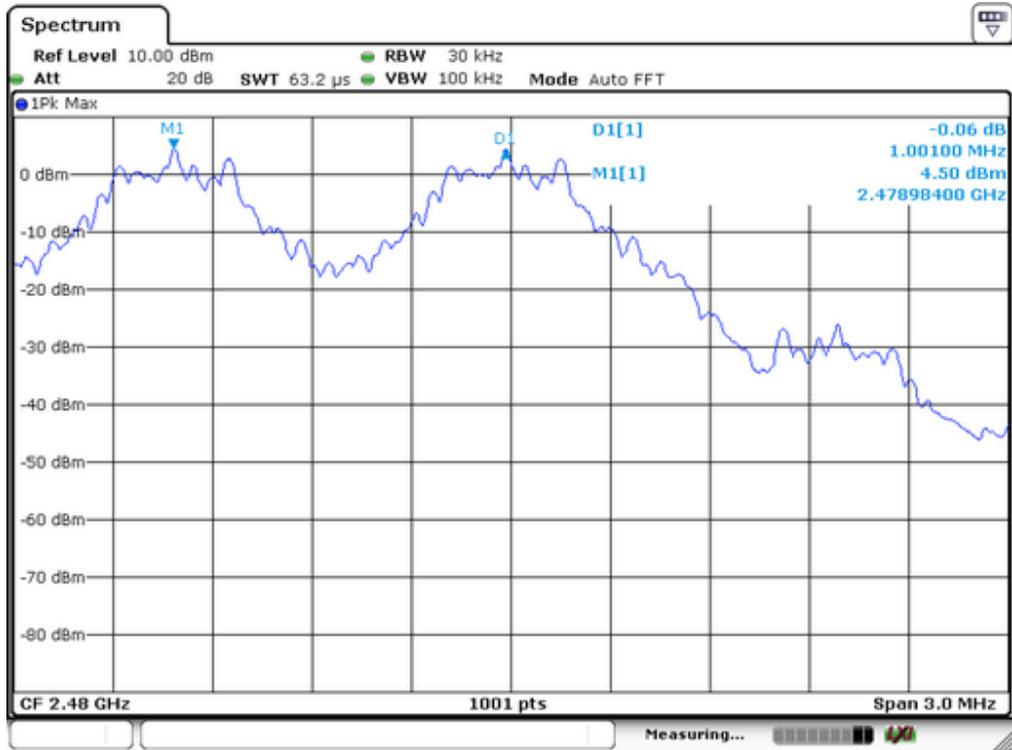

Spectrum Detector: PK Test Date : May 09, 2015
 Test By: Andy Temperature : 24°C
 Test Result: PASS Humidity : 53 %
 Modulation: $\Pi/4$ -DQPSK


Channel number	Channel frequency (MHz)	Separation Read Value (kHz)	Separation Limit 2/3 20dB Down BW(kHz)
1	2402	1001	>833
40	2441	1001	>851
79	2480	1001	>863

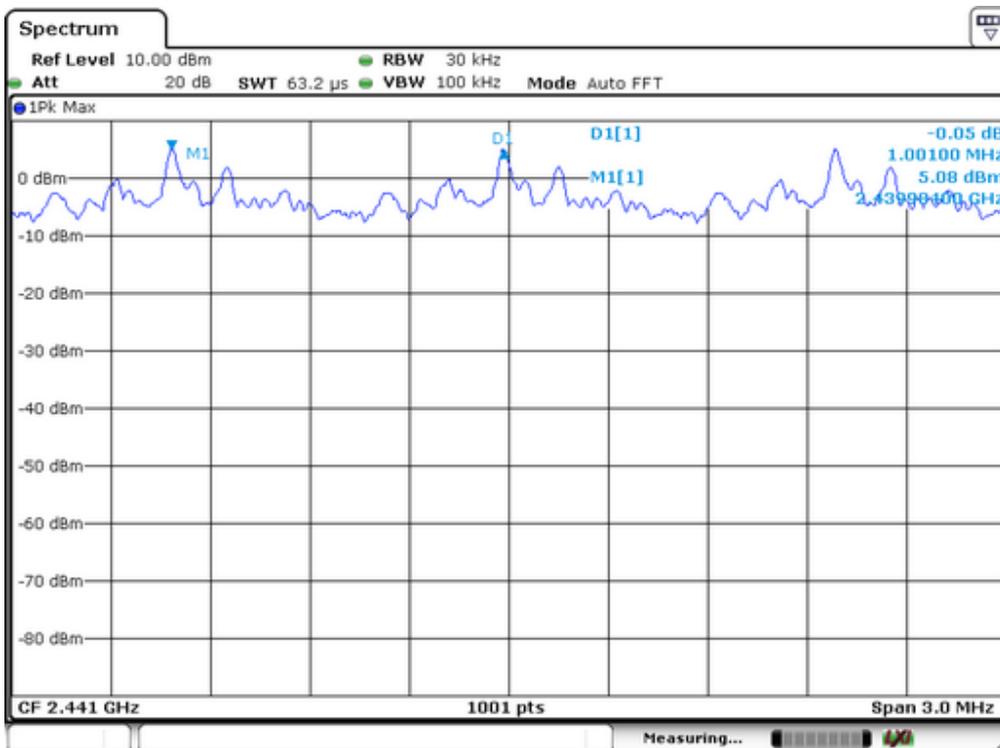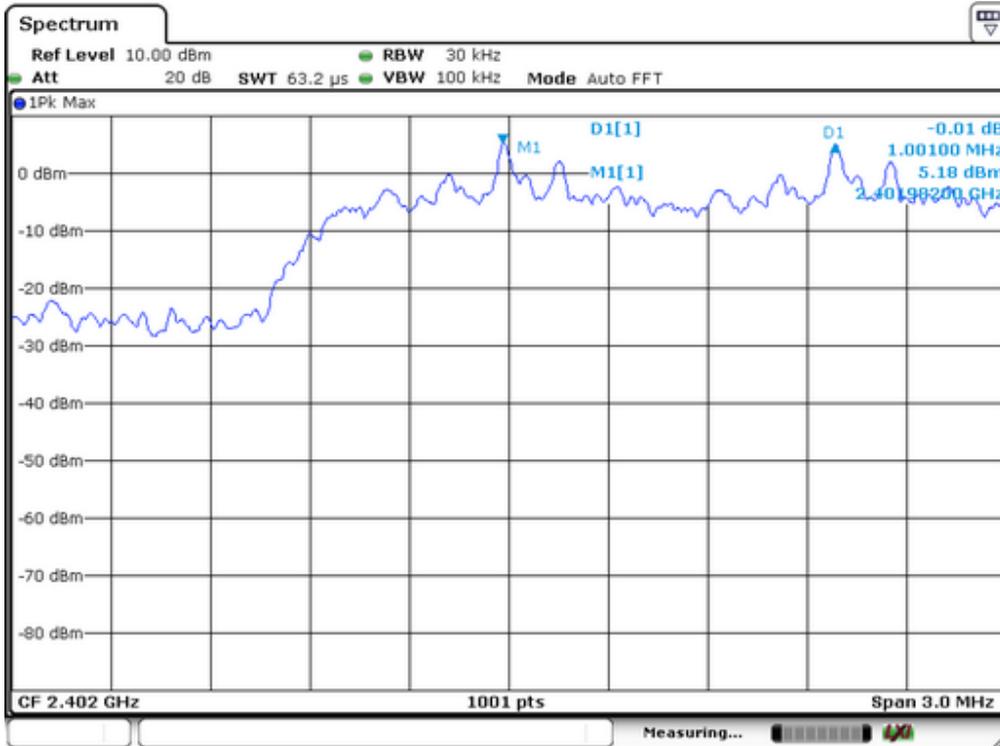


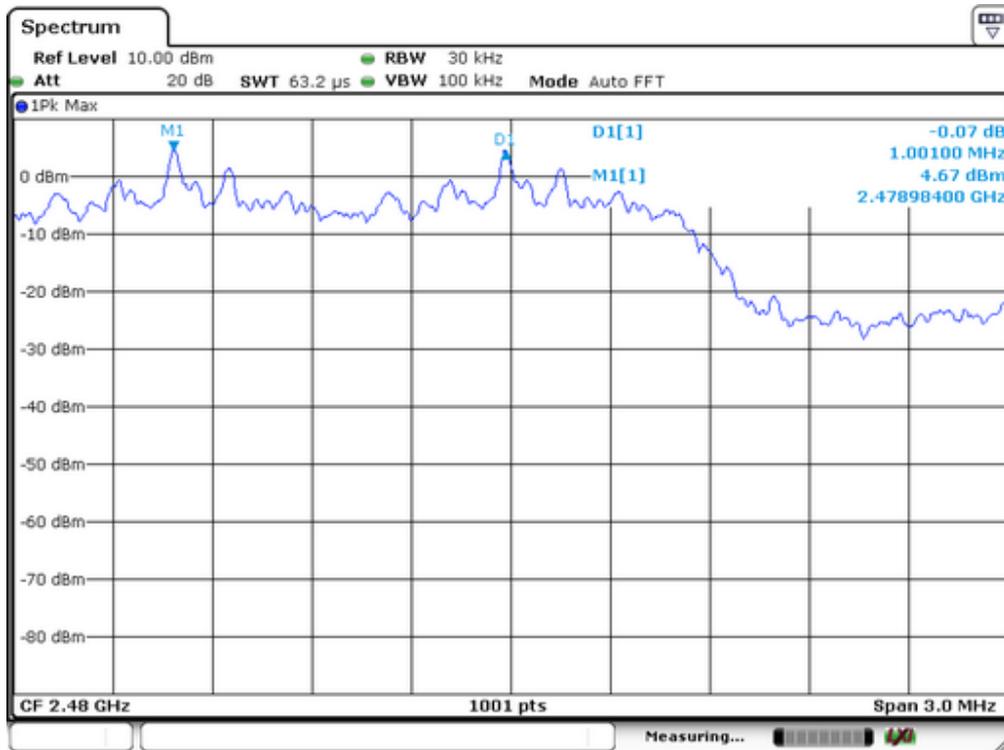

Spectrum Detector: PK Test Date : May 09, 2015
 Test By: Andy Temperature : 24°C
 Test Result: PASS Humidity : 53 %
 Modulation: 8DPSK

Channel number	Channel frequency (MHz)	Separation Read Value (kHz)	Separation Limit 2/3 20dB Down BW(kHz)
1	2402	1001	>845
40	2441	1001	>863
79	2480	1001	>865

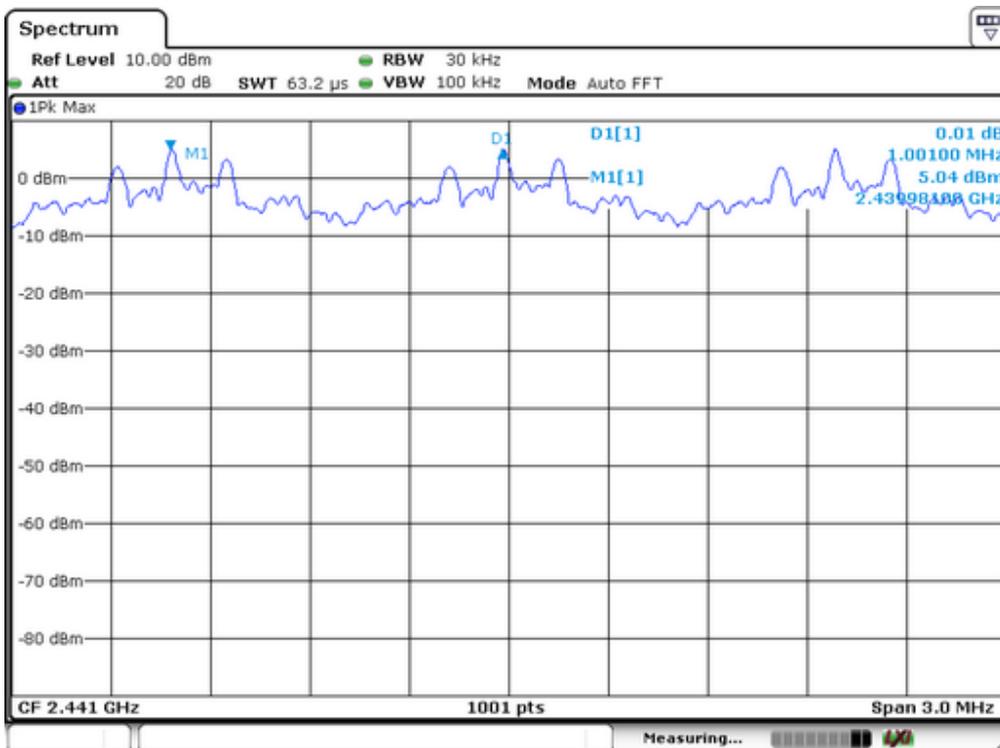

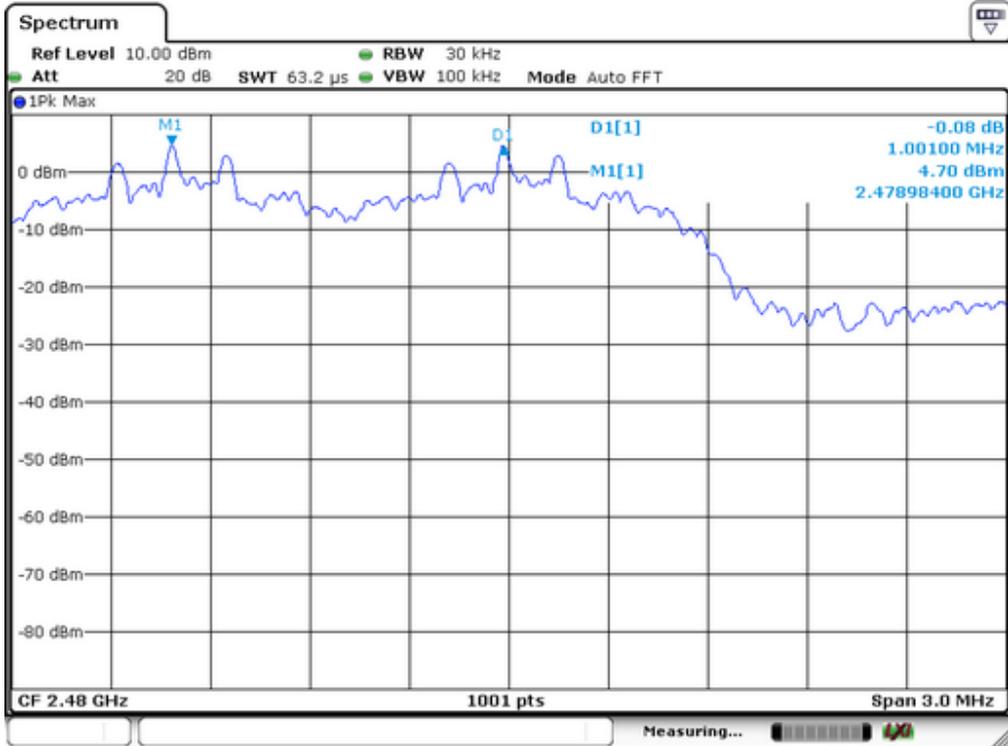

9. 20dB Bandwidth test

9.1 Measurement Procedure

The EUT was operating in hopping mode or could be controlled its channel. Printed out the test result from the spectrum by hard copy function.

9.2 Test SET-UP (Block Diagram of Configuration)



9.3 Measurement Equipment Used:

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	Characteristics	LAST CAL.	CAL DUE.
Spectrum Analyzer	Rohde & Schwarz	FSV30	1321.3008K	10Hz-30GHz	03/15/2015	03/14/2016
Coaxial Cable	CDS	79254	46107086	10Hz-30GHz	03/15/2015	03/14/2016
Antenna Connector	ARTHUR-YANG	2244-N1TG1	N/A	10Hz-30GHz	03/15/2015	03/14/2016



Remark: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.


9.4 Measurement Results:

Refer to attached data chart.

Spectrum Detector:	PK	Test Date :	May 09, 2015
Test By:	Andy	Temperature :	24°C
Test Result:	PASS	Humidity :	53 %
Modulation:	GFSK		



Channel number	Channel frequency (MHz)	20dB Down BW(kHz)
1	2402	815
40	2441	815
79	2480	815

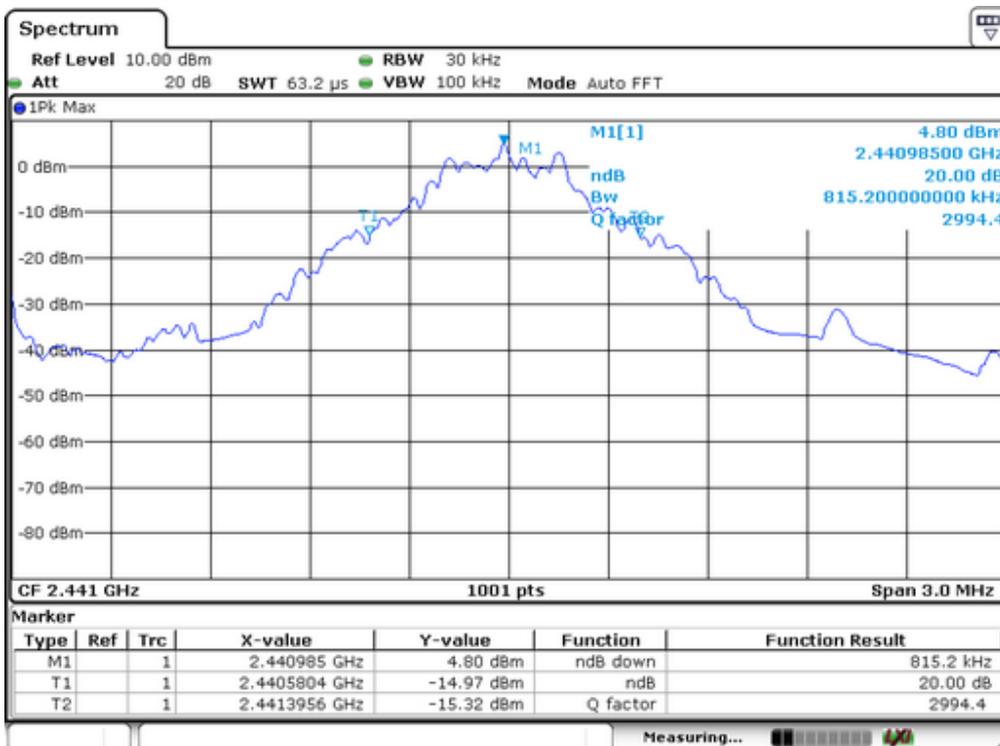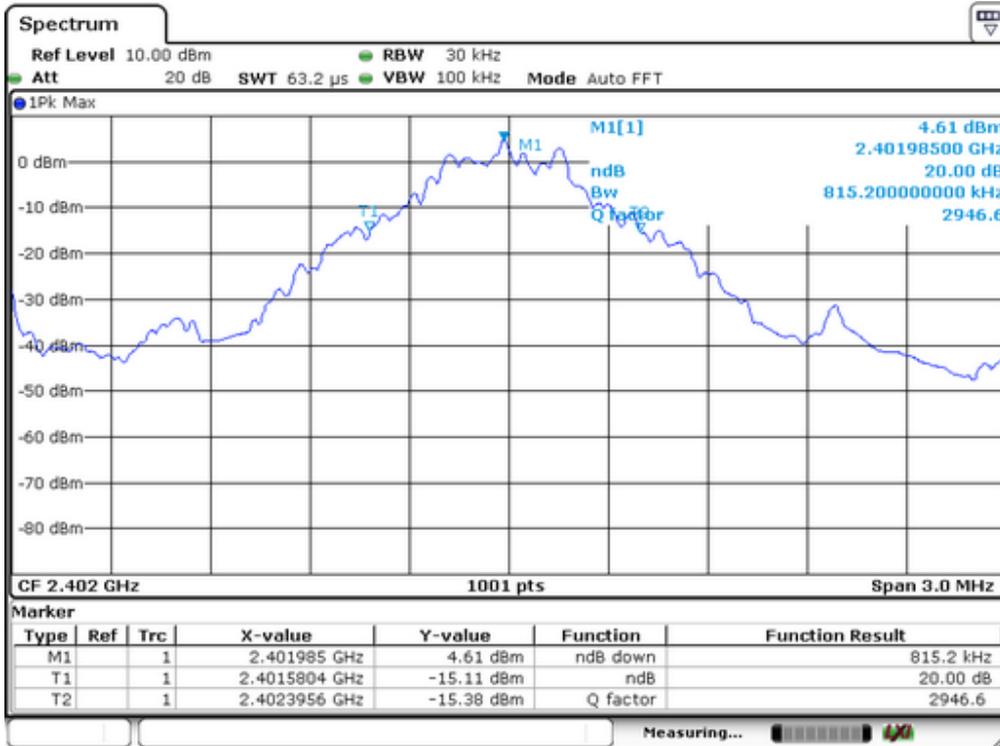


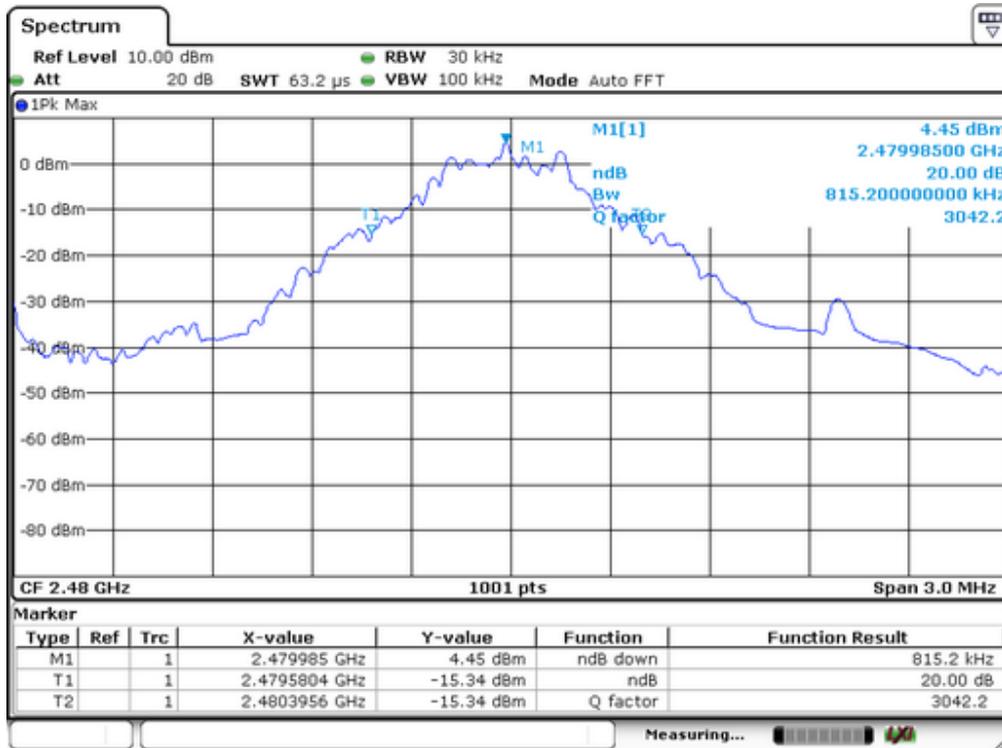

Spectrum Detector:	PK	Test Date :	May 09, 2015
Test By:	Andy	Temperature :	24°C
Test Result:	PASS	Humidity :	53 %
Modulation:	$\Pi/4$ -DQPSK		



Channel number	Channel frequency (MHz)	20dB Down BW(kHz)
1	2402	1250
40	2441	1277
79	2480	1295

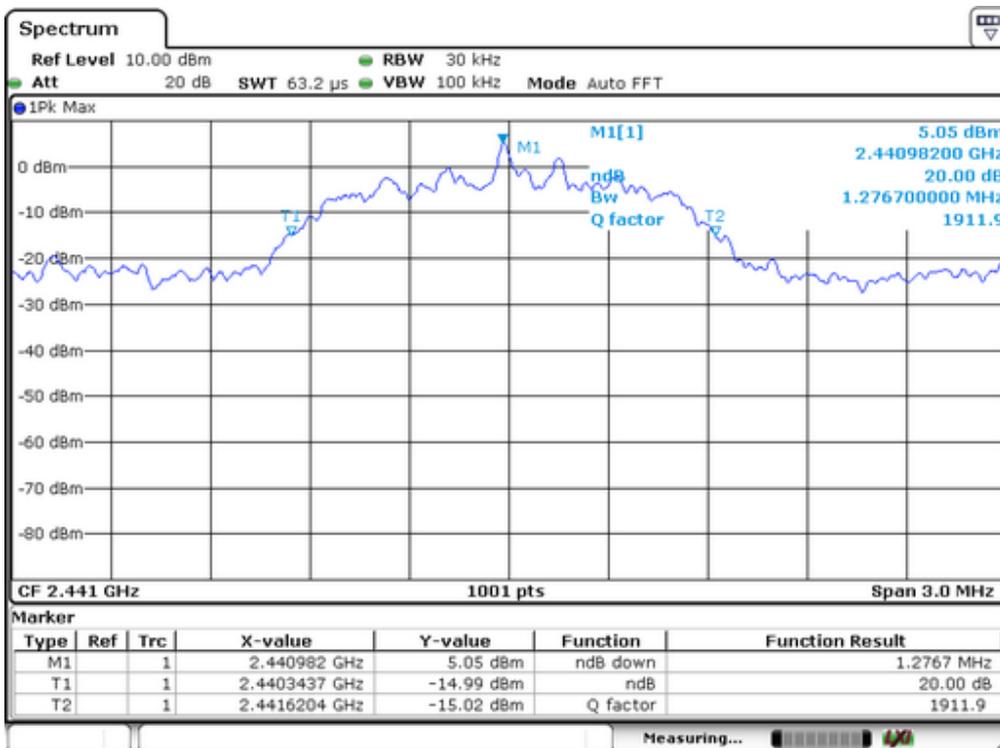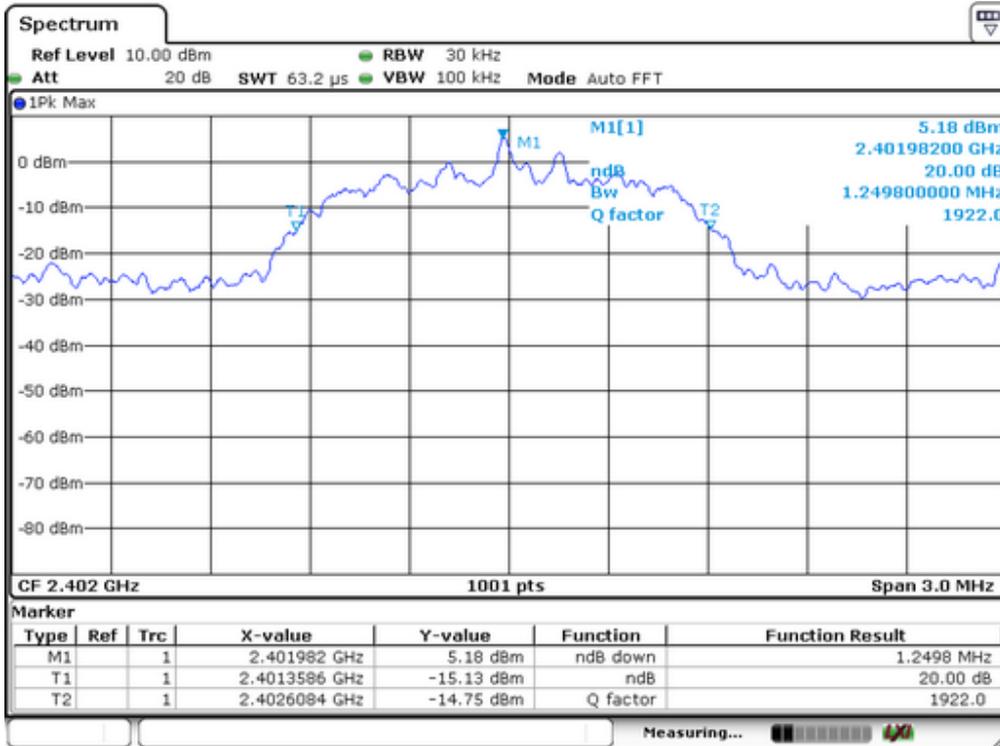

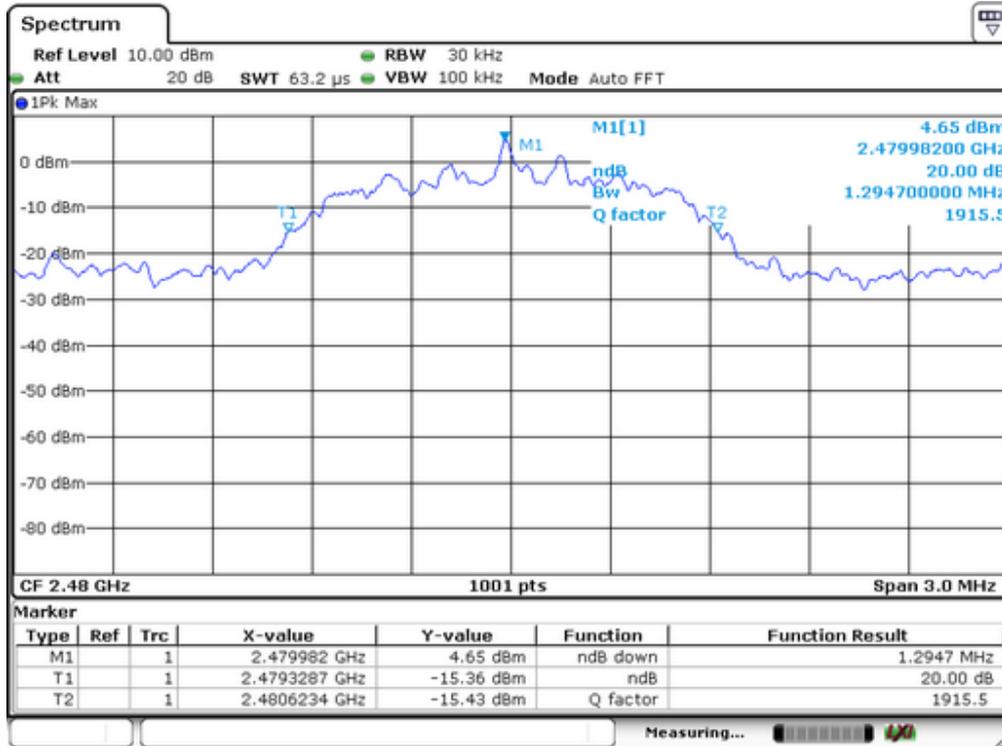

Spectrum Detector: PK Test Date : May 09, 2015
 Test By: Andy Temperature : 24°C
 Test Result: PASS Humidity : 53 %
 Modulation: 8DPSK

Channel number	Channel frequency (MHz)	20dB Down BW(kHz)
1	2402	1268
40	2441	1295
79	2480	1298

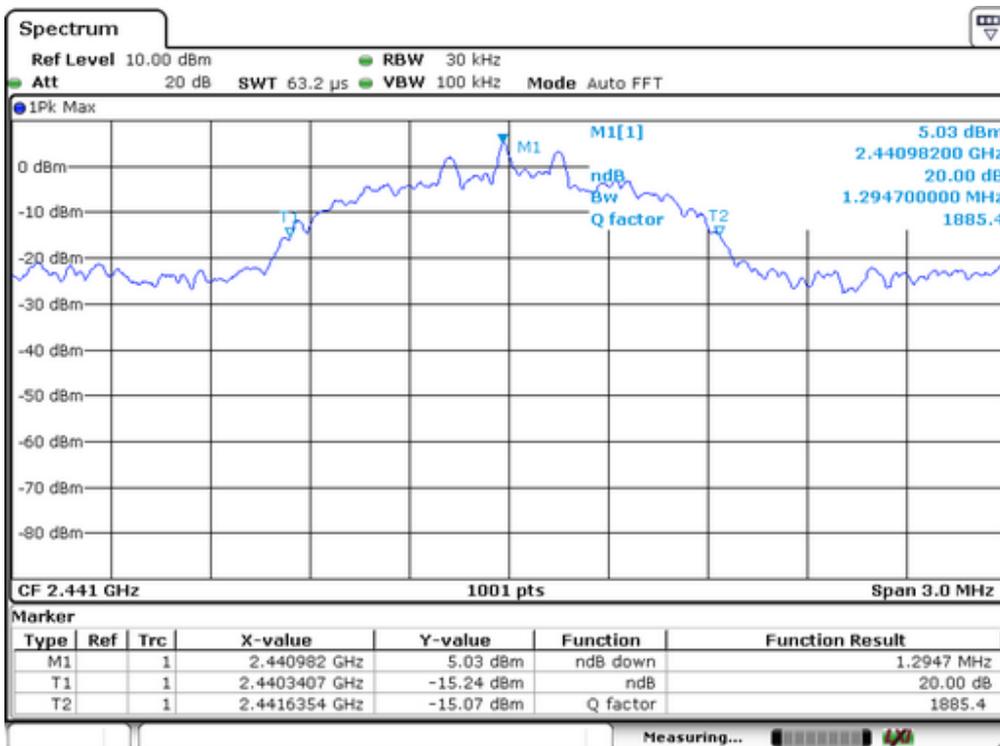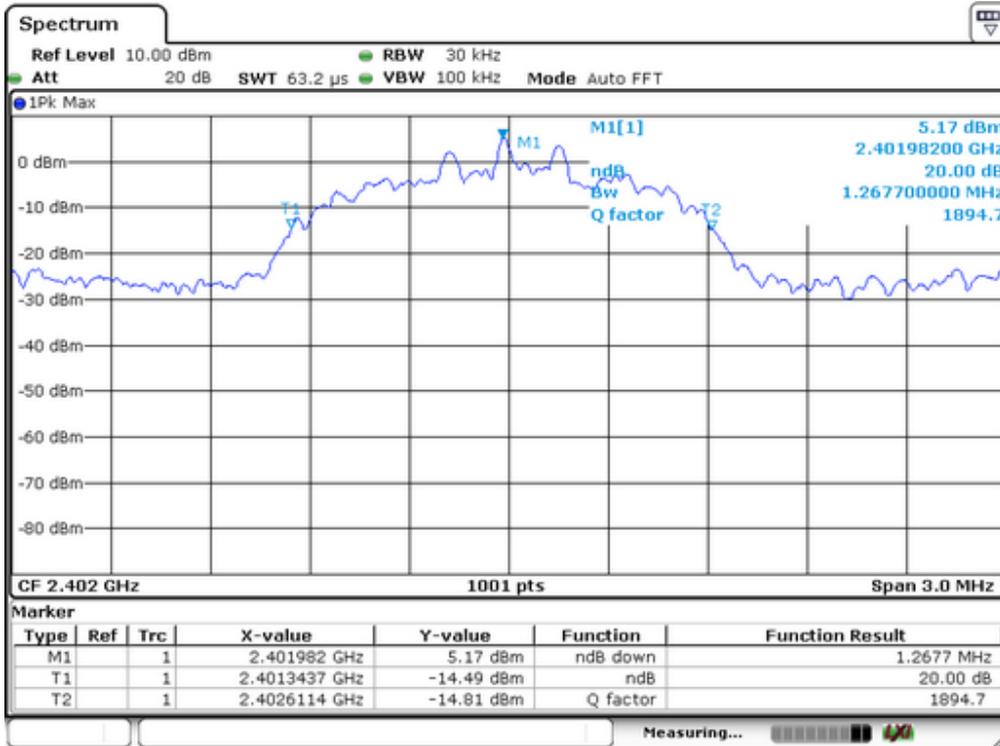




10. Quantity of Hopping Channel Test

10.1 Measurement Procedure

The EUT was operating in hopping mode or could be controlled its channel. Printed out the test result from the spectrum by hard copy function.

10.2 Test SET-UP (Block Diagram of Configuration)



10.3 Measurement Equipment Used:


EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	Characteristics	LAST CAL.	CAL DUE.
Spectrum Analyzer	Rohde & Schwarz	FSV30	1321.3008K	10Hz-30GHz	03/15/2015	03/14/2016
Coaxial Cable	CDS	79254	46107086	10Hz-30GHz	03/15/2015	03/14/2016
Antenna Connector	ARTHUR-YANG	2244-N1TG1	N/A	10Hz-30GHz	03/15/2015	03/14/2016

Remark: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

10.4 Measurement Results:

Worst Test Mode	GFSK	Test Date :	May 09, 2015
Test By:	Andy	Temperature :	25 °C
Test Result:	PASS	Humidity :	50 %

Hopping Channel Frequency Range	Quantity of Hopping Channel	Quantity of Hopping Channel
2402-2480	79	> 15

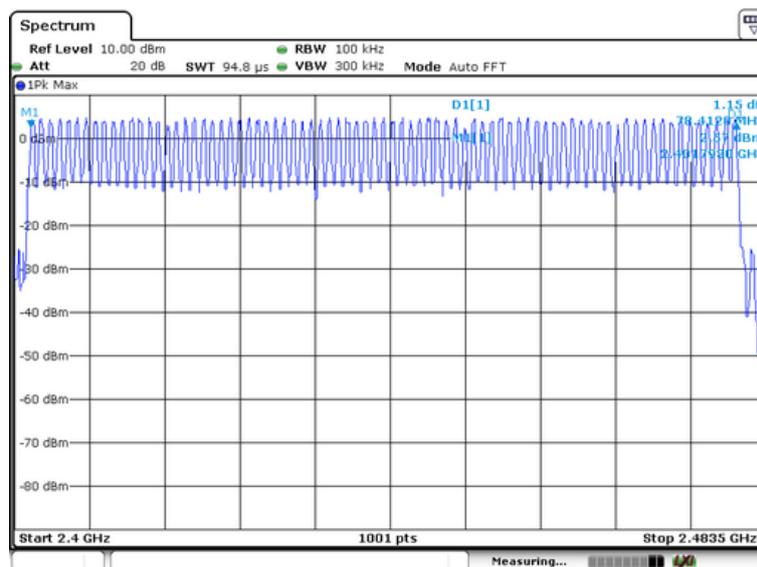

11. Time of Occupancy (Dwell Time) test

11.1 Test Description

The Equipment Under Test (EUT) was set up to perform the dwell time measurements. The EUT was connected to the spectrum analyzer via a short coax cable. The dwell time is calculated by:


$$\text{Dwell time} = \text{time slot length} * \text{hop rate} / \text{number of hopping channels} * 31.6\text{s}$$

with:

- hop rate = $1600 * 1/\text{s}$ for DH1 packets = 1600 s^{-1}
- hop rate = $1600/3 * 1/\text{s}$ for DH3 packets = 533.33 s^{-1}
- number of hopping channels = 79
- $31.6 \text{ s} = 0.4 \text{ seconds multiplied by the number of hopping channels} = 0.4 \text{ s} * 79$

The highest value of the dwell time is reported.

11.2 Test SET-UP (Block Diagram of Configuration)



11.3 Measurement Equipment Used:

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	Characteristics	LAST CAL.	CAL DUE.
Spectrum Analyzer	Rohde & Schwarz	FSV30	1321.3008K	10Hz-30GHz	03/15/2015	03/14/2016
Coaxial Cable	CDS	79254	46107086	10Hz-30GHz	03/15/2015	03/14/2016
Antenna Connector	ARTHUR-YANG	2244-N1TG1	N/A	10Hz-30GHz	03/15/2015	03/14/2016

Remark: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

11.2 Test Requirements / Limits

FCC Part 15, Subpart C, §15.247 (a) (1) (iii)


Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Since the Bluetooth technology uses 79 channels this period is calculated to be 31.6seconds. Refer to attached data chart.

11.3 Test result


Mode	Number of transmission in a 31.6(79 Hopping*0.4)	Length of transmissions time(msec)	Result (msec)	Limit (msec)
DH1	$1600/(2*79) \times 31.6 = 320$	0.438	140.16	400
DH3	$1600/(4*79) \times 31.6 = 160$	1.695	271.20	400
DH5	$1600/(6*79) \times 31.6 = 106.67$	2.945	314.14	400

Remark: The results of worst cased was recorded.


DH1:

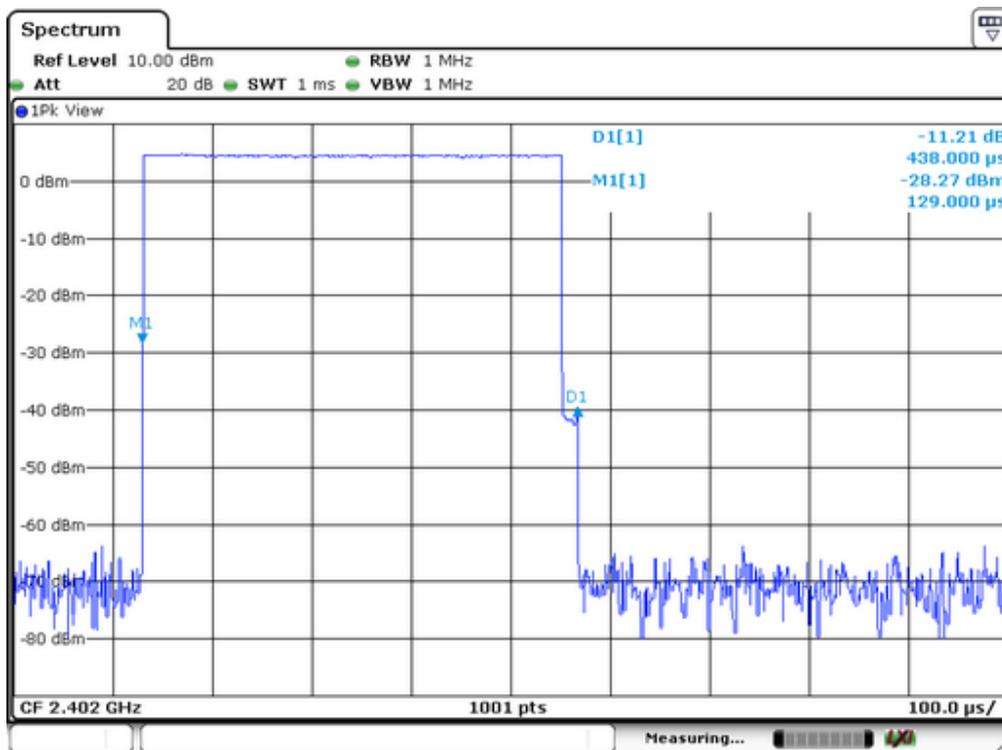

DH3:

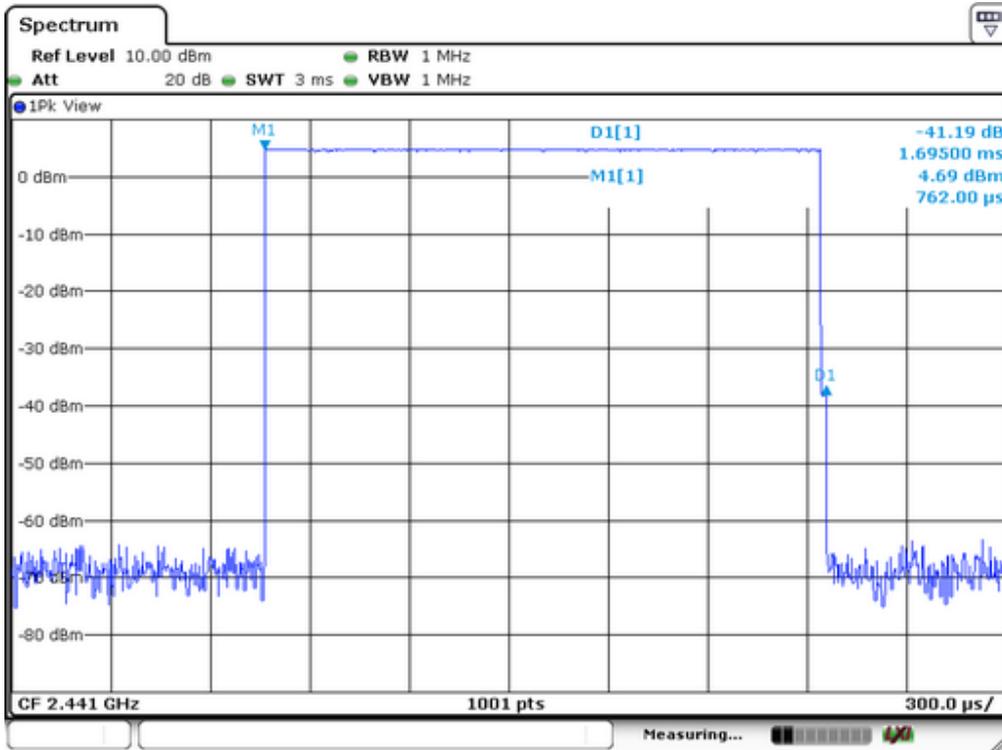

DH5:

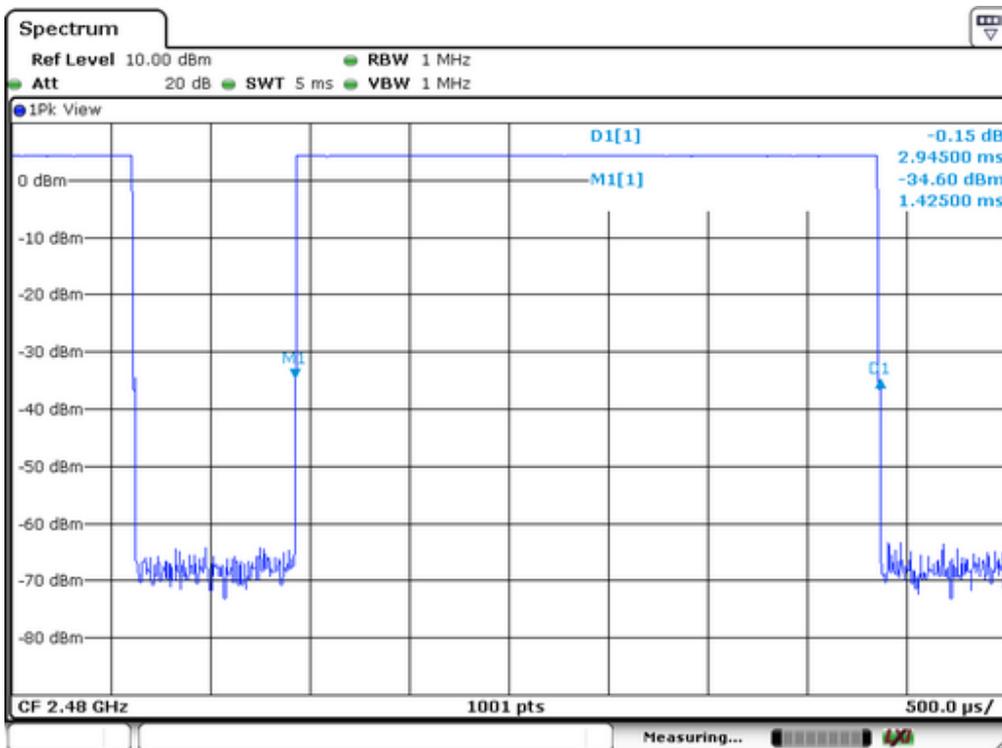


12. MAXIMUM PEAK OUTPUT POWER TEST

12.1 Measurement Procedure

- a. Check the calibration of the measuring instrument(SA) using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- c. The center frequency of the spectrum analyzer is set to the fundamental frequency and using proper RBW and VBW setting.
- d. Measure the captured power within the band and recording the plot.
- e. Repeat above procedures until all frequencies required were complete.

12.2 Test SET-UP (Block Diagram of Configuration)



12.3 Measurement Equipment Used:

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	Characteristics	LAST CAL.	CAL DUE.
Spectrum Analyzer	Rohde & Schwarz	FSV30	1321.3008K	10Hz-30GHz	03/15/2015	03/14/2016
Coaxial Cable	CDS	79254	46107086	10Hz-30GHz	03/15/2015	03/14/2016
Antenna Connector	ARTHUR-YANG	2244-N1TG1	N/A	10Hz-30GHz	03/15/2015	03/14/2016


Remark: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.



12.4 Measurement Results:

Refer to attached data chart.

Spectrum Detector:	PK	Test Date :	May 09, 2015
Test By:	Andy	Temperature :	25 °C
Test Result:	PASS	Humidity :	50 %
Modulation:	GFSK		


Channel number	Channel Frequency (MHz)	Peak Power output(dBm)	Peak Power output(mW)	Peak Power Limit(mW)	Pass/Fail
01	2402	4.66	2.924	1000	PASS
40	2441	4.83	3.041	1000	PASS
79	2480	4.46	2.793	1000	PASS


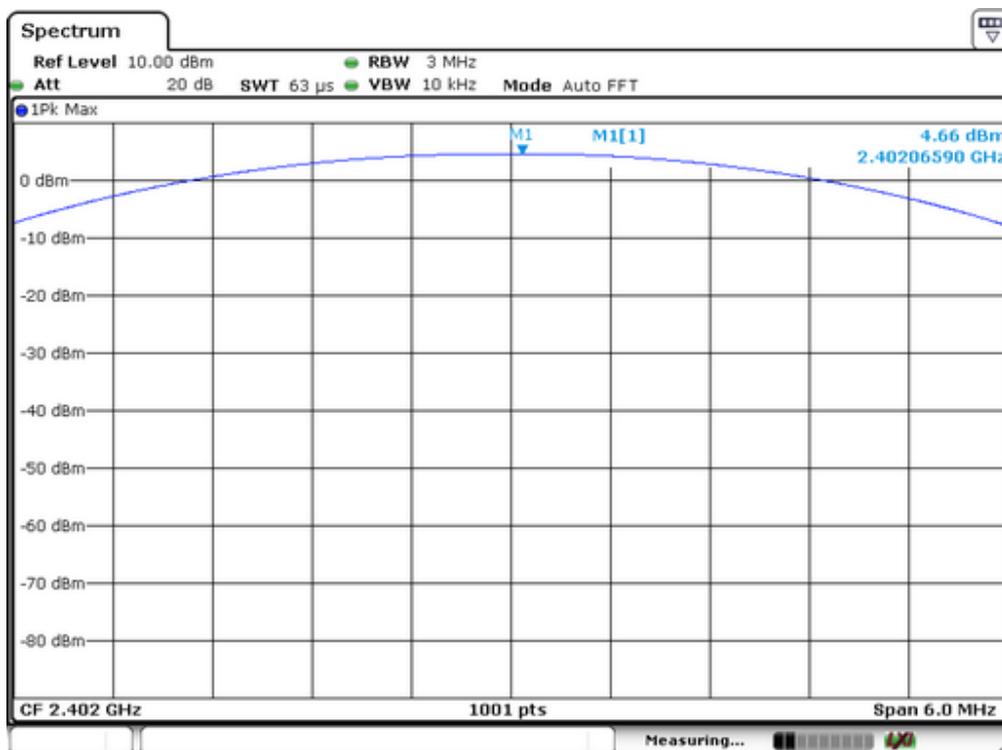


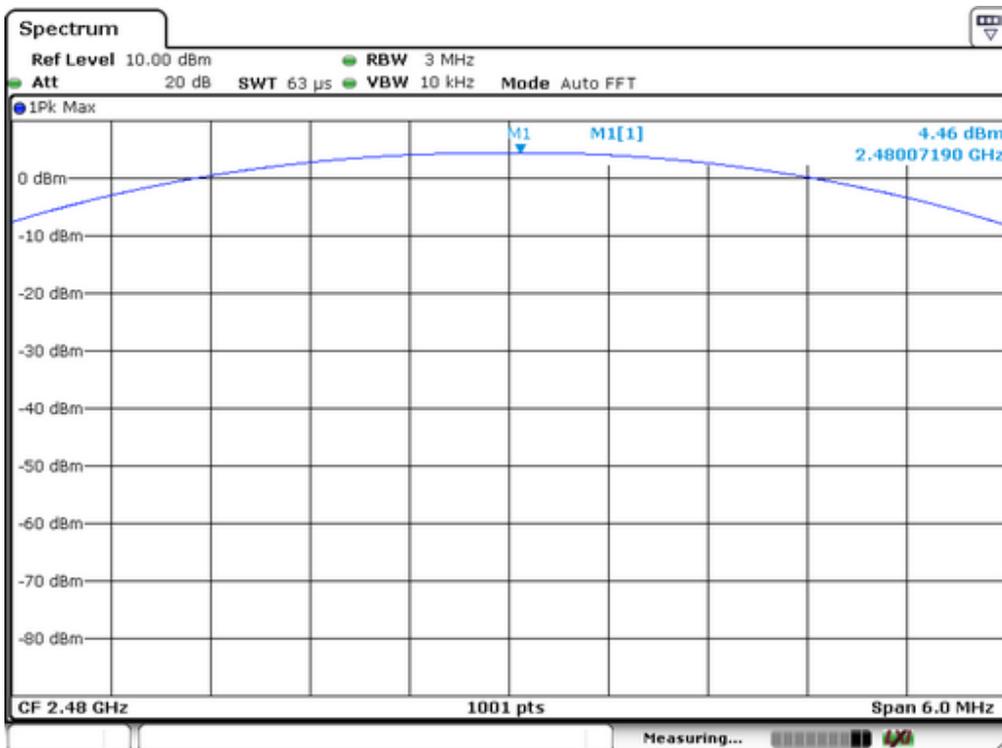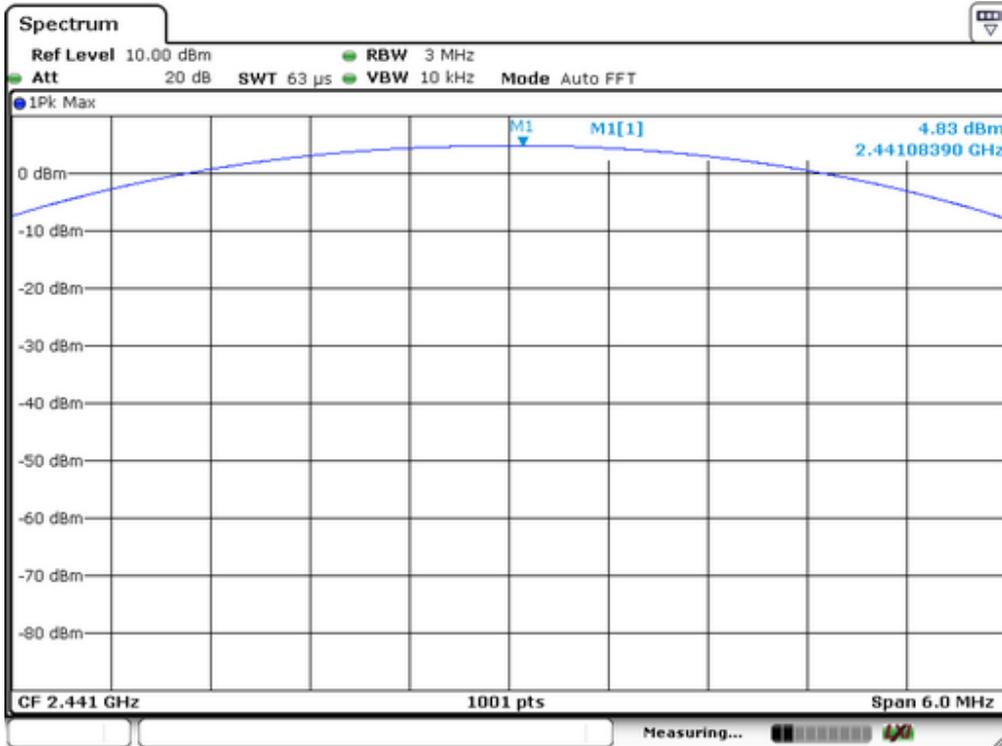

Spectrum Detector: PK Test Date : May 09, 2015
 Test By: Andy Temperature : 25 °C
 Test Result: PASS Humidity : 50 %
 Modulation: Π/4-DQPSK


Channel number	Channel Frequency (MHz)	Peak Power output(dBm)	Peak Power output(mW)	Peak Power Limit(mW)	Pass/Fail
01	2402	5.5	3.548	125	PASS
40	2441	5.26	3.357	125	PASS
79	2480	4.89	3.083	125	PASS


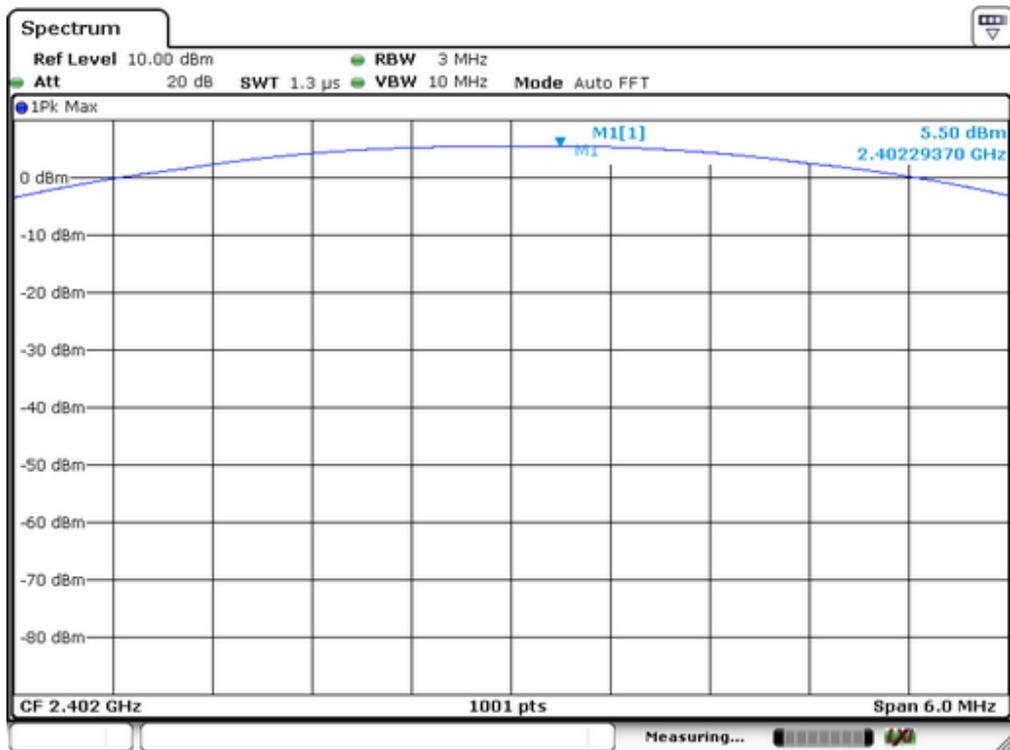


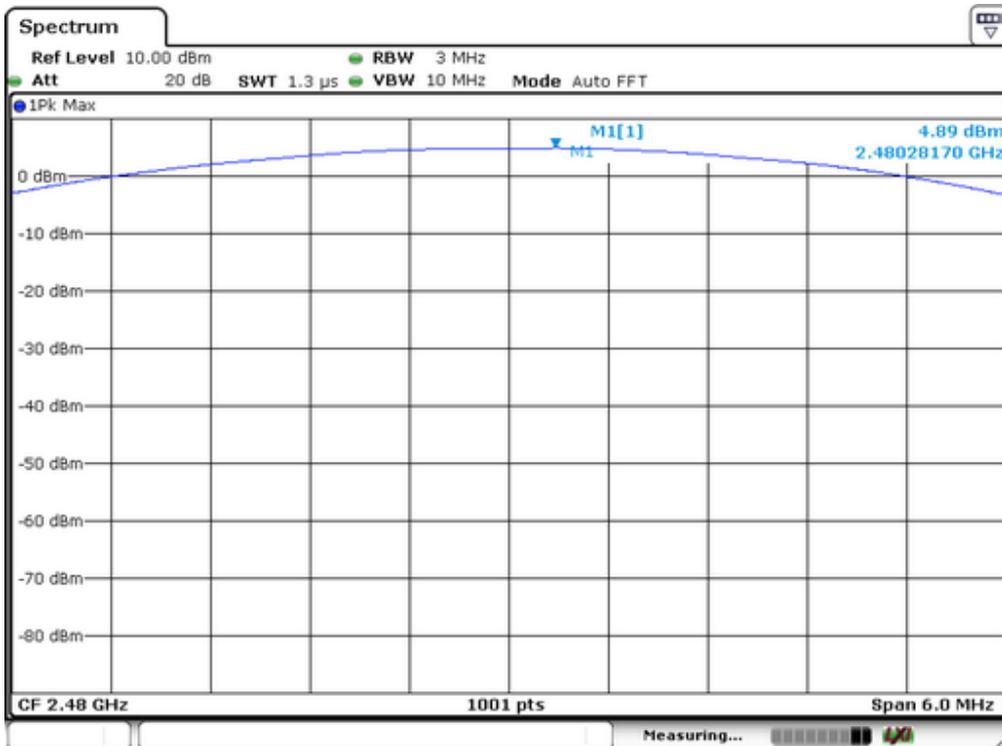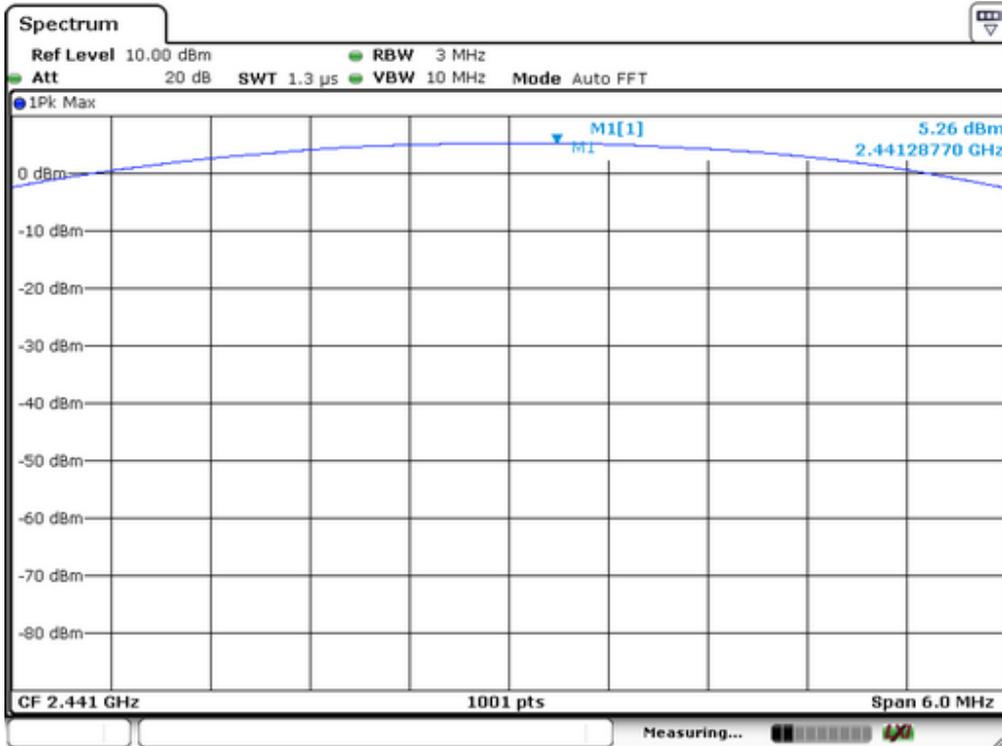

Spectrum Detector:	PK	Test Date :	May 09, 2015
Test By:	Andy	Temperature :	25 °C
Test Result:	PASS	Humidity :	50 %
Modulation:	8DPSK		

Channel number	Channel Frequency (MHz)	Peak Power output(dBm)	Peak Power output(mW)	Peak Power Limit(mW)	Pass/Fail
01	2402	5.54	3.581	125	PASS
40	2441	5.26	3.357	125	PASS
79	2480	4.83	3.041	125	PASS

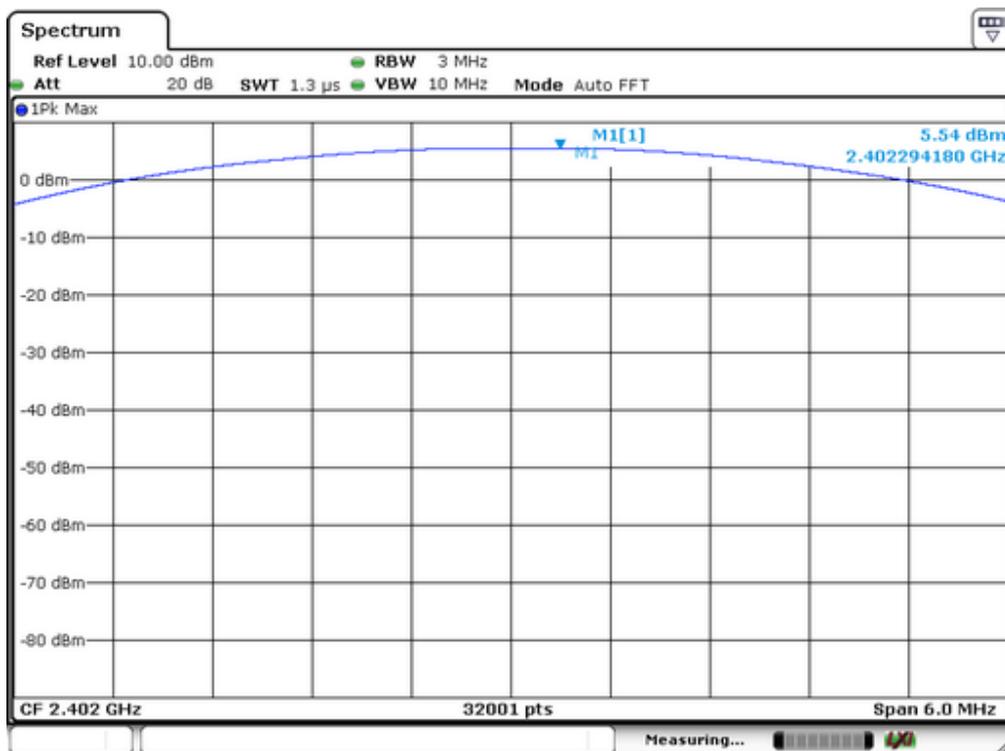

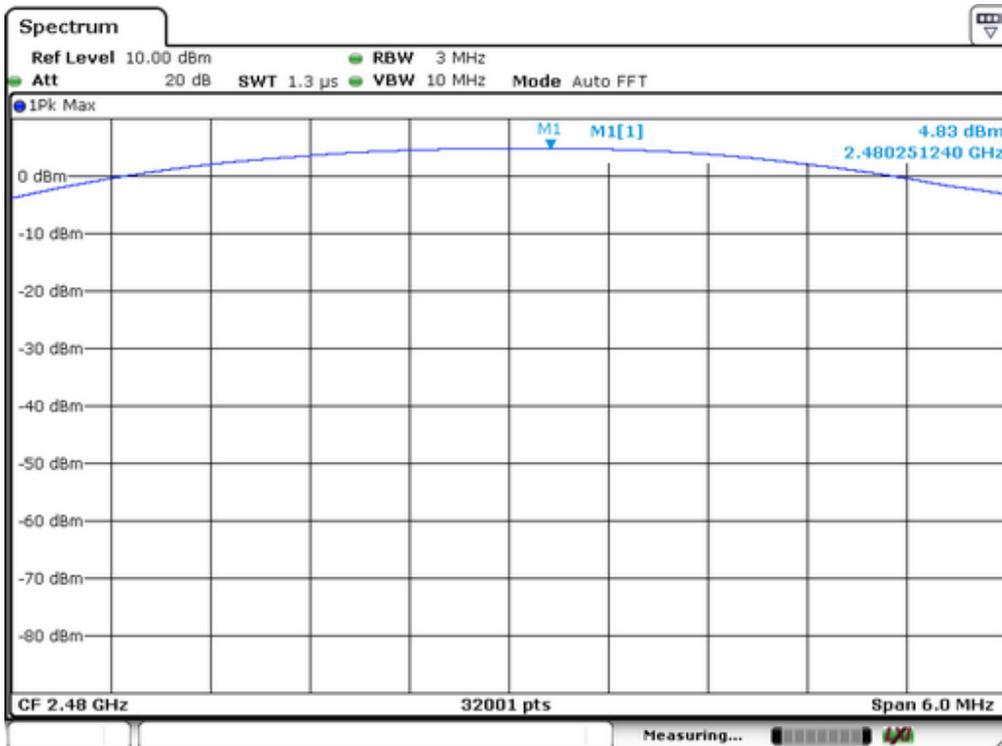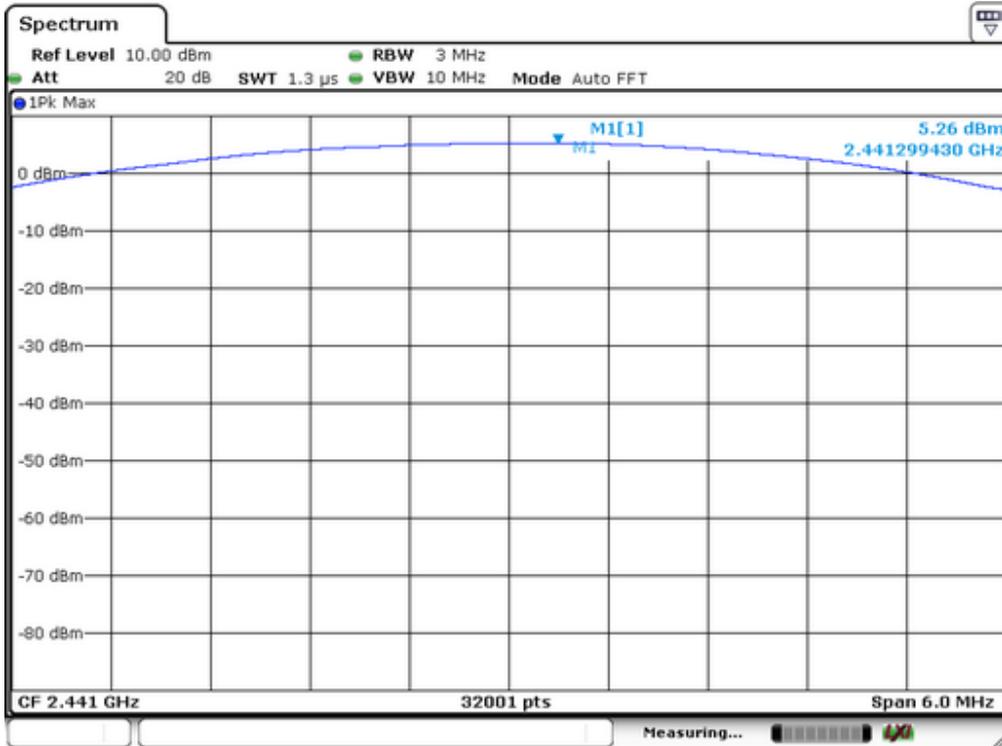

13. Band EDGE test

13.1 Measurement Procedure

For Conducted Test

1. The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100KHz. The video bandwidth is set to 300KHz.
2. The spectrum from 30MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.
3. Preliminary tests on individual chains, and on all chains with a combiner, were performed. The worst-case configuration was with a combiner, therefore final test were performed with all chains feeding a combiner.

For Radiated emission Test

The EUT was placed on a styrofoam table which is 1.5m above ground plane.

The measurement procedure at the ban edges was simplified by performing the measurement in just one plot. Both, the in-band-emission and the unwanted emission were be encompassed by the span. After trace stabilization, the maximum peak was be determined by a peak detector and the value was marked by an appropriate limit line. The second limit line, which is 20dB below the first, marks the limit for the emissions in the unrestricted band. A maximum-peak-detector marks the highest emission in the unrestricted band next to the band edge.

The measurements were performed at the lower end of the 2.4GHz band. Use the following spectrum analyzer settings:

When spectrum scanned above 1GHz setting resolution bandwidth 1MHz, video bandwidth 3MHz:


EMI Test Receiver	Setting
Attenuation	Auto
RB	1MHz
VB	3MHz
Detector	Peak
Trace	Max hold

When spectrum scanned above 1GHz setting resolution bandwidth 1MHz, video bandwidth 10Hz:


EMI Test Receiver	Setting
Attenuation	Auto
RB	1MHz
VB	10Hz
Detector	Peak
Trace	Max hold

13.2 Test SET-UP (Block Diagram of Configuration)

For Conducted Test



For Radiated emission Test

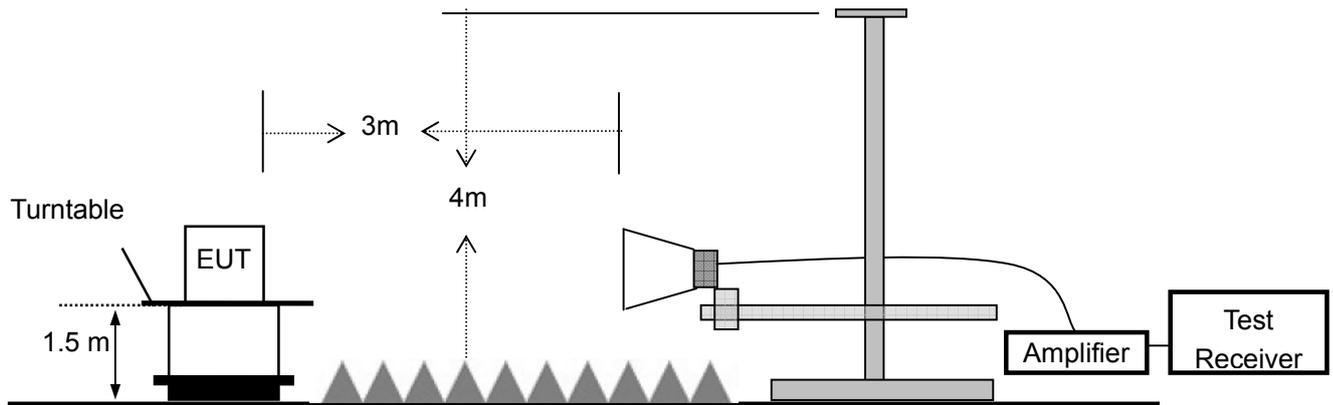

12.3 Measurement Equipment Used:

For Conducted Test

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	Characteristics	LAST CAL.	CAL DUE.
Spectrum Analyzer	Rohde & Schwarz	FSV30	1321.3008K	10Hz-30GHz	03/15/2015	03/14/2016
Coaxial Cable	CDS	79254	46107086	10Hz-30GHz	03/15/2015	03/14/2016
Antenna Connector	ARTHUR-YANG	2244-N1TG1	N/A	10Hz-30GHz	03/15/2015	03/14/2016

Remark: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

For Radiated emission Test

Item	Equipment	Manufacturer	Model No.	Serial No.	Characteristics	Last Cal.	Cal. Interval
1	Signal Analyzer	Rohde & Schwarz	FSV30	103040	9KHz-40GHz	12/29/2014	1 Year
2	Horn Antenna	Schwarzbeck	BBHA9120D	9120D-1272	1GHz-18GHz	12/29/2014	1 Year
3	Power Amplifier	LUNAR EM	LNA1G18-40	J10100000081	1GHz-26.5GHz	12/29/2014	1 Year
4	Cable	H+S	CBL-26	N/A	1GHz-26.5GHz	12/29/2014	1 Year
5	Cable	H+S	CBL-26	N/A	1GHz-26.5GHz	12/29/2014	1 Year
6	Cable	H+S	CBL-26	N/A	1GHz-26.5GHz	12/29/2014	1 Year

12.4 Measurement Results:

Refer to attached data chart.

Spectrum Detector: PK Test Date : May 09, 2015
 Test By: Andy Temperature : 25 °C
 Test Result: PASS Humidity : 50 %

1. Conducted Test

For Non-Hopping Mode:

Frequency (MHz)	Modulation	Peak Power Output(dBm)	Emission read Value(dBm)	Result of Band edge(dBc)	Band edge Limit(dBc)
2399.98	GFSK	4.65	-30.86	35.51	>20dBc
2399.98	pi/4-DQPSK	5.19	-28.63	33.82	>20dBc
2399.98	8DPSK	5.19	-28.65	33.84	>20dBc
2483.52	GFSK	4.48	-43.09	47.57	>20dBc
2483.53	pi/4-DQPSK	4.72	-42.58	47.3	>20dBc
2484.31	8DPSK	4.72	-40.58	45.3	>20dBc

For Hopping Mode:

Frequency (MHz)	Modulation	Peak Power Output(dBm)	Emission read Value(dBm)	Result of Band edge(dBc)	Band edge Limit(dBc)
2399.99	GFSK	4.68	-31.06	35.74	>20dBc
2399.97	pi/4-DQPSK	5.22	-28.84	34.06	>20dBc
2399.98	8DPSK	5.21	-28.76	33.97	>20dBc
2483.53	GFSK	4.47	-43.55	48.02	>20dBc
2483.52	pi/4-DQPSK	4.71	-45.72	50.43	>20dBc
2484.31	8DPSK	4.67	-40.5	45.17	>20dBc

2. Radiated emission Test

Worst test modulation GFSK

For Non-Hopping Mode:

Frequency (MHz)	Antenna polarization (H/V)	Emission (dBuV/m)		Band edge Limit (dBuV/m)		Margin (dB)	
		PK	AV	PK	AV	PK	AV
2399.84	H	65.32	45.05	74	54	-8.68	-8.95
2398.76	V	60.15	38.79	74	54	-13.85	-15.21
2483.69	H	64.72	44.15	74	54	-9.28	-9.85
2484.13	V	59.48	38.95	74	54	-14.52	-15.05

For Hopping Mode:

Frequency (MHz)	Antenna polarization (H/V)	Emission (dBuV/m)		Band edge Limit (dBuV/m)		Margin (dB)	
		PK	AV	PK	AV	PK	AV
2399.86	H	65.05	45.15	74	54	-8.95	-8.85
2398.75	V	60.25	40.28	74	54	-13.75	-13.72
2384.01	H	64.15	46.35	74	54	-9.85	-7.65
2483.98	V	60.36	39.58	74	54	-13.64	-14.42

13. Antenna Application

13.1 Antenna requirement

The EUT'S antenna is met the requirement of FCC part 15C section 15.203 and 15.247.

FCC part 15C section 15.247 requirements:

Systems operating in the 2402-2480MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum peak output power of the intentional radiator is reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

13.2 Result

The EUT's antenna, permanent attached antenna, used a PCB antenna and integrated on PCB, The antenna's gain is 0 dBi and meets the requirement.

APPENDIX I (Photos of EUT)



