

FCC&IC Radio Test Report

FCC ID: EMOIBT80

IC: 986B-IBT80

This report concerns (check one): Original Grant Class I Change Class II Change

Project No. : 1605C097
Equipment : Color Changing Rechargeable Bluetooth Speaker
with Speakerphone
Model Name for FCC : iBT80, iBT80X, iBT80BC, iBT76, iBT80XC ("X" =A -
Z, denote as color of cabinet)
Model Name for IC : iBT80, iBT76
Applicant : SDI TECHNOLOGIES INC.
Address : 1299 Main Street, Rahway, NJ 07065, U.S.A

Date of Receipt : May 12, 2016
Date of Test : May 12, 2016 ~ May 19, 2016
Issued Date : May 20, 2016
Tested by : BTL Inc.

Testing Engineer : Shawn Xiao
(Shawn Xiao)

Technical Manager : David Mao
(David Mao)

Authorized Signatory : Steven Lu
(Steven Lu)

B T L I N C .

No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan,
Guangdong, China.

TEL: +86-769-8318-3000 FAX: +86-769-8319-6000

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

BTL's report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL's** authorized written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Table of Contents	Page
1 . CERTIFICATION	7
2 . SUMMARY OF TEST RESULTS	8
2.1 TEST FACILITY	9
2.2 MEASUREMENT UNCERTAINTY	9
3 . GENERAL INFORMATION	10
3.1 GENERAL DESCRIPTION OF EUT	10
3.2 DESCRIPTION OF TEST MODES	12
3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING	12
3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	13
3.5 DESCRIPTION OF SUPPORT UNITS	13
4 . EMC EMISSION TEST	14
4.1 CONDUCTED EMISSION MEASUREMENT	14
4.1.1 POWER LINE CONDUCTED EMISSION LIMITS	14
4.1.2 TEST PROCEDURE	14
4.1.3 DEVIATION FROM TEST STANDARD	14
4.1.4 TEST SETUP	15
4.1.5 EUT OPERATING CONDITIONS	15
4.1.6 EUT TEST CONDITIONS	15
4.1.7 TEST RESULTS	15
4.2 RADIATED EMISSION MEASUREMENT	16
4.2.1 RADIATED EMISSION LIMITS	16
4.2.2 TEST PROCEDURE	17
4.2.3 DEVIATION FROM TEST STANDARD	17
4.2.4 TEST SETUP	18
4.2.5 EUT OPERATING CONDITIONS	19
4.2.6 EUT TEST CONDITIONS	19
4.2.7 TEST RESULTS (9KHZ TO 30MHZ)	19
4.2.8 TEST RESULTS (30MHZ TO 1000 MHZ)	20
4.2.9 TEST RESULTS (ABOVE 1000 MHZ)	20
5 . NUMBER OF HOPPING CHANNEL	21
5.1 APPLIED PROCEDURES	21
5.1.1 TEST PROCEDURE	21
5.1.2 DEVIATION FROM STANDARD	21
5.1.3 TEST SETUP	21
5.1.4 EUT OPERATION CONDITIONS	21
5.1.5 EUT TEST CONDITIONS	21
5.1.6 TEST RESULTS	21

Table of Contents	Page
6 . AVERAGE TIME OF OCCUPANCY	22
6.1 APPLIED PROCEDURES / LIMIT	22
6.1.1 TEST PROCEDURE	22
6.1.2 DEVIATION FROM STANDARD	22
6.1.3 TEST SETUP	22
6.1.4 EUT OPERATION CONDITIONS	23
6.1.5 EUT TEST CONDITIONS	23
6.1.6 TEST RESULTS	23
7 . HOPPING CHANNEL SEPARATION MEASUREMENT	24
7.1 APPLIED PROCEDURES / LIMIT	24
7.1.1 TEST PROCEDURE	24
7.1.2 DEVIATION FROM STANDARD	24
7.1.3 TEST SETUP	24
7.1.4 EUT TEST CONDITIONS	24
7.1.5 TEST RESULTS	24
8 . BANDWIDTH TEST	25
8.1 APPLIED PROCEDURES	25
8.1.1 TEST PROCEDURE	25
8.1.2 DEVIATION FROM STANDARD	25
8.1.3 TEST SETUP	25
8.1.4 EUT OPERATION CONDITIONS	25
8.1.5 EUT TEST CONDITIONS	25
8.1.6 TEST RESULTS	25
9 . PEAK OUTPUT POWER TEST	26
9.1 APPLIED PROCEDURES / LIMIT	26
9.1.1 TEST PROCEDURE	26
9.1.2 DEVIATION FROM STANDARD	26
9.1.3 TEST SETUP	26
9.1.4 EUT OPERATION CONDITIONS	26
9.1.5 EUT TEST CONDITIONS	26
9.1.6 TEST RESULTS	26
10 . ANTENNA CONDUCTED SPURIOUS EMISSION	27
10.1 APPLIED PROCEDURES / LIMIT	27
10.1.1 TEST PROCEDURE	27
10.1.2 DEVIATION FROM STANDARD	27
10.1.3 TEST SETUP	27
10.1.4 EUT OPERATION CONDITIONS	27
10.1.5 EUT TEST CONDITIONS	27
10.1.6 TEST RESULTS	27
11 . MEASUREMENT INSTRUMENTS LIST	28

Table of Contents	Page
12 . EUT TEST PHOTO	30
ATTACHMENT A - CONDUCTED EMISSION	36
ATTACHMENT B - RADIATED EMISSION (9KHZ-30MHZ)	39
ATTACHMENT C - RADIATED EMISSION (30MHZ TO 1000MHZ)	41
ATTACHMENT D - RADIATED EMISSION (ABOVE 1000MHZ)	48
ATTACHMENT E - NUMBER OF HOPPING CHANNEL	76
ATTACHMENT F - AVERAGE TIME OF OCCUPANCY	78
ATTACHMENT G - HOPPING CHANNEL SEPARATION MEASUREMENT	91
ATTACHMENT H - BANDWIDTH	96
ATTACHMENT I - PEAK OUTPUT POWER	101
ATTACHMENT J - ANTENNA CONDUCTED SPURIOUS EMISSION	106

REPORT ISSUED HISTORY

Issued No.	Description	Issued Date
BTL-FICP-1-1605C097	Original Issue.	May 20, 2016

1. CERTIFICATION

Equipment : Color Changing Rechargeable Bluetooth Speaker with Speakerphone
Brand Name : iHome
Model Name : iBT80, iBT80X, iBT80BC, iBT76, iBT80XC ("X" =A - Z, denote as color of
for FCC cabinet)
Model Name : iBT80, iBT76
for IC
Applicant : SDI TECHNOLOGIES INC.
Manufacturer: SDI TECHNOLOGIES INC.
Address : 1299 Main Street, Rahway, NJ 07065, U.S.A
Factory : Dongguan Homania Electronic Products Co., Ltd.
Address : Chung Kou Manage Area, Shijie Town, Dongguan City, Guangdong, China
Date of Test : May 12, 2016 ~ May 19, 2016
Test Sample : Engineering Sample
Standard(s) : FCC Part15, Subpart C (15.247)/ ANSI C63.10-2013
RSS-247 Issue 1, May 2015
RSS-GEN Issue 4, Nov 2014

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FICP-1-1605C097) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

Applied Standard(s): 47 CFR Part 15, Subpart C, RSS-247 Issue 1, May 2015, RSS-GEN Issue 4, Nov				
Standard(s) Section		Test Item	Judgment	Remark
FCC	IC			
15.207	RSS-GEN 8.8	Conducted Emission	PASS	
15.247(d)	RSS-247 5.5	Antenna conducted Spurious Emission	PASS	
15.247 (a)(1)	RSS-247 5.1 (2)	Hopping Channel Separation	PASS	
15.247(a)(1)	RSS-247 5.1 (1)	Bandwidth	PASS	
15.247 (b)(1)	RSS-247 5.4 (2)	Peak Output Power	PASS	
15.247(d) 15.209	RSS-247 5.5	Radiated Spurious Emission	PASS	
15.247 (a)(1)(iii)	RSS-247 5.1 (4)	Number of Hopping Frequency	PASS	
15.247 (a)(1)(iii)	RSS-247 5.1 (4)	Dwell Time	PASS	
15.205	RSS-GEN 8.10	Restricted Bands	PASS	
15.203	-	Antenna Requirement	PASS	

Note:

(1) "N/A" denotes test is not applicable in this test report

2.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.

BTL's test firm number for FCC: 319330

BTL's test firm number for IC: 4428B-1

2.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. The measurement instrumentation uncertainty considerations contained in CISPR 16-4-2.

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95 %**.

A. Conducted Measurement :

Test Site	Method	Measurement Frequency Range	U, (dB)
DG-C02	CISPR	150 KHz ~ 30MHz	2.32

B. Radiated Measurement :

Test Site	Method	Measurement Frequency Range	Ant. H / V	U, (dB)
DG-CB03	CISPR	9KHz~30MHz	V	3.79
		9KHz~30MHz	H	3.57
		30MHz ~ 200MHz	V	3.82
		30MHz ~ 200MHz	H	3.78
		200MHz ~ 1,000MHz	V	4.10
		200MHz ~ 1,000MHz	H	4.06
		1GHz~18GHz	V	3.12
		1GHz~18GHz	H	3.68
		18GHz~40GHz	V	4.15
		18GHz~40GHz	H	4.14

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	Color Changing Rechargeable Bluetooth Speaker with Speakerphone	
Brand Name	iHome	
Model Name for FCC	iBT80, iBT80X, iBT80BC, iBT76, iBT80XC	
Model Name for IC	iBT80, iBT76	
Model Difference	"X" =A - Z, denote as color of cabinet	
Output Power (Max.)	Operation Frequency	2402~2480 MHz
	Modulation Technology	GFSK(1Mbps) $\pi/4$ -DQPSK(2Mbps)
	Bit Rate of Transmitter	8-DPSK(3Mbps)
	Output Power Max.	4.02 dBm(1Mbps) 3.90 dBm(3Mbps)
Power Source	#1 Supplied from USB port. #2 Li-ion battery supplied.	
Power Rating	#1 EUT I/P: DC 5V #2 DC 3.7V 2200mAh 8.14Wh	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

2. Channel List:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	27	2429	54	2456
01	2403	28	2430	55	2457
02	2404	29	2431	56	2458
03	2405	30	2432	57	2459
04	2406	31	2433	58	2460
05	2407	32	2434	59	2461
06	2408	33	2435	60	2462
07	2409	34	2436	61	2463
08	2410	35	2437	62	2464
09	2411	36	2438	63	2465
10	2412	37	2439	64	2466
11	2413	38	2440	65	2467
12	2414	39	2441	66	2468
13	2415	40	2442	67	2469
14	2416	41	2443	68	2470
15	2417	42	2444	69	2471
16	2418	43	2445	70	2472
17	2419	44	2446	71	2473
18	2420	45	2447	72	2474
19	2421	46	2448	73	2475
20	2422	47	2449	74	2476
21	2423	48	2450	75	2477
22	2424	49	2451	76	2478
23	2425	50	2452	77	2479
24	2426	51	2453	78	2480
25	2427	52	2454		
26	2428	53	2455		

3 Table for Filed Antenna:

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	N/A	N/A	PCB	N/A	0

3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	TX Mode Note (1)

The EUT system operated these modes were found to be the worst case during the pre-scanning test as following:

For Conducted Emission	
Final Test Mode	Description
Mode 1	TX Mode

For Radiated Emission	
Final Test Mode	Description
Mode 1	TX Mode Note (1)

Note:

- (1) The measurements are performed at the high, middle, low available channels.
- (2) The measurements for Hopping Channel Separation, Bandwidth and Peak Output Power were tested during 1Mbps, 2Mbps and 3Mbps, the worst case are 1Mbps and 3Mbps, only worst case was documented.


3.3 TABLE OF PARAMETERS OF TEST SOFTWARE SETTING

During testing, channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of FHSS

Test Software Version	Bluetest		
	2402 MHz	2441 MHz	2480 MHz
Frequency	2402 MHz	2441 MHz	2480 MHz
Parameters(1Mbps)	48.00	32.00	32.00
Parameters(3Mbps)	57.00	47.00	47.00

3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

TX MODE



3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.
-	-	-	-	-	-

Item	Shielded Type	Ferrite Core	Length	Note
-	-	-	-	-

4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 POWER LINE CONDUCTED EMISSION LIMITS (Frequency Range 150KHz-30MHz)

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 -0.50	66 to 56*	56 to 46*
0.50 -5.0	56	46
5.0 -30.0	60	50

Note:

- (1) The limit of " * " decreases with the logarithm of the frequency
- (2) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor(if use)
 Margin Level = Measurement Value - Limit Value

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz


4.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation

4.1.4 TEST SETUP

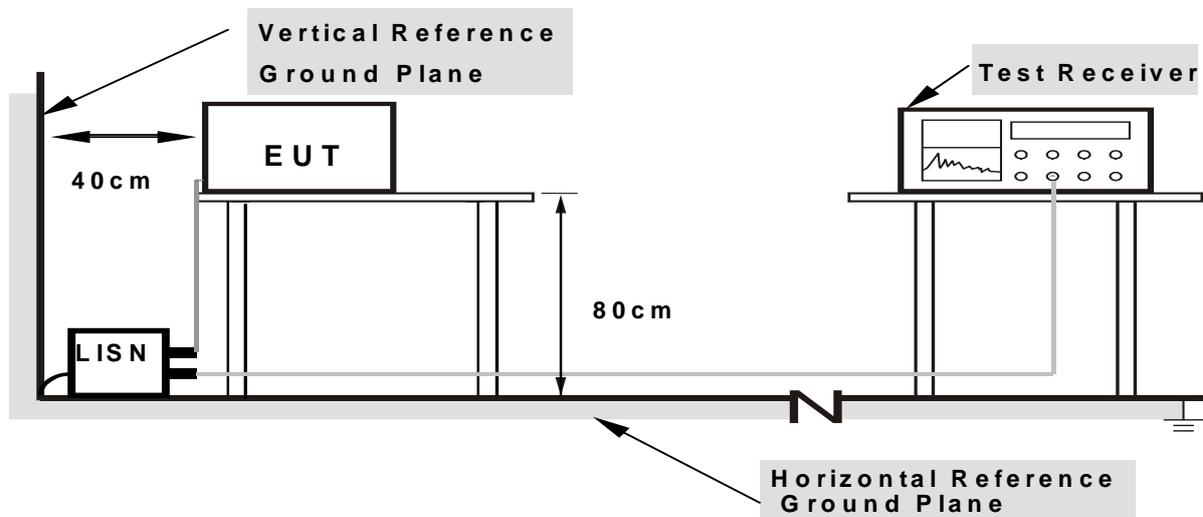

- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical function (as a customer would normally use it), EUT was programmed to be in continuously transmitting/receiving data or hopping on mode.

4.1.6 EUT TEST CONDITIONS

Temperature: 25°C
 Relative Humidity: 55%
 Test Voltage: AC 120V/60Hz

4.1.7 TEST RESULTS

Please refer to the Attachment A.

Remark:

- (1) All readings are QP Mode value unless otherwise stated AVG in column of 'Note'. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform in this case, a "*" marked in AVG Mode column of Interference Voltage Measured.
- (2) Measuring frequency range from 150KHz to 30MHz.

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 RADIATED EMISSION LIMITS (Frequency Range 9KHz -1000MHz)

In case the emission fall within the restricted band specified on 15.205(a) & RSS-247 5.5, then the 15.209(a) & RSS-Gen limit in the table below has to be followed.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

Frequency (MHz)	dB(uV/m) (at 3 meters)	
	Peak	Average
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m) = 20log Emission level (uV/m).
- (4) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)
 Margin Level = Measurement Value - Limit Value

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Spectrum Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9KHz ~90KHz for PK/AVG detector
Start ~ Stop Frequency	90KHz ~110KHz for QP detector
Start ~ Stop Frequency	110KHz ~490KHz for PK/AVG detector
Start ~ Stop Frequency	490KHz ~30MHz for QP detector
Start ~ Stop Frequency	30MHz~1000MHz for QP detector

4.2.2 TEST PROCEDURE


- a. The measuring distance of at 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The measuring distance of at 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8 m or 1.5 m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- i. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.2.3 DEVIATION FROM TEST STANDARD


No deviation

4.2.4 TEST SETUP


(A) Radiated Emission Test Set-Up Frequency Below 1 GHz

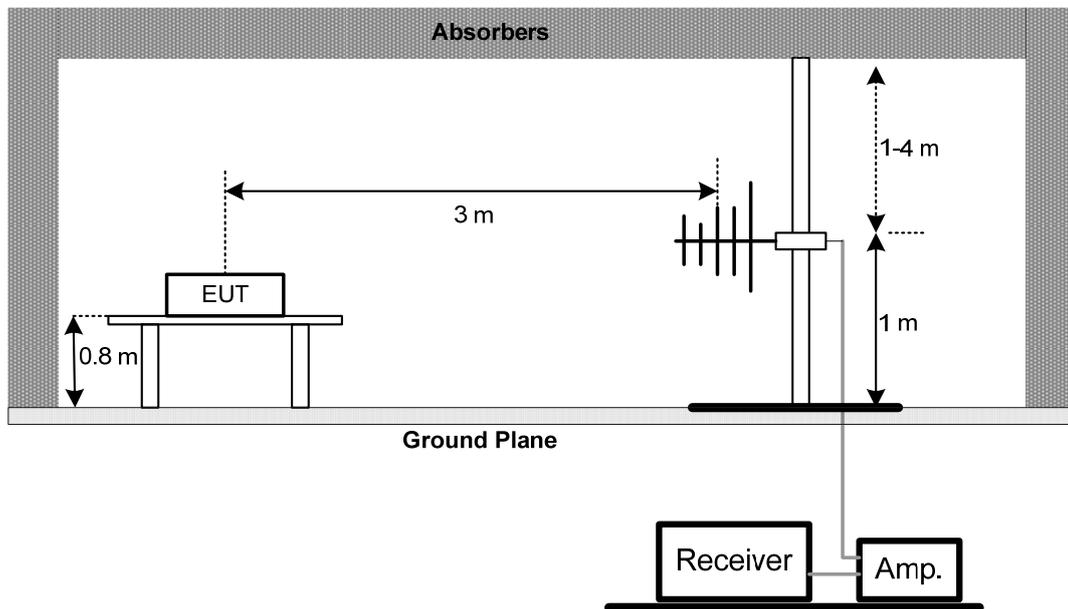

(B) Radiated Emission Test Set-Up Frequency Above 1 GHz

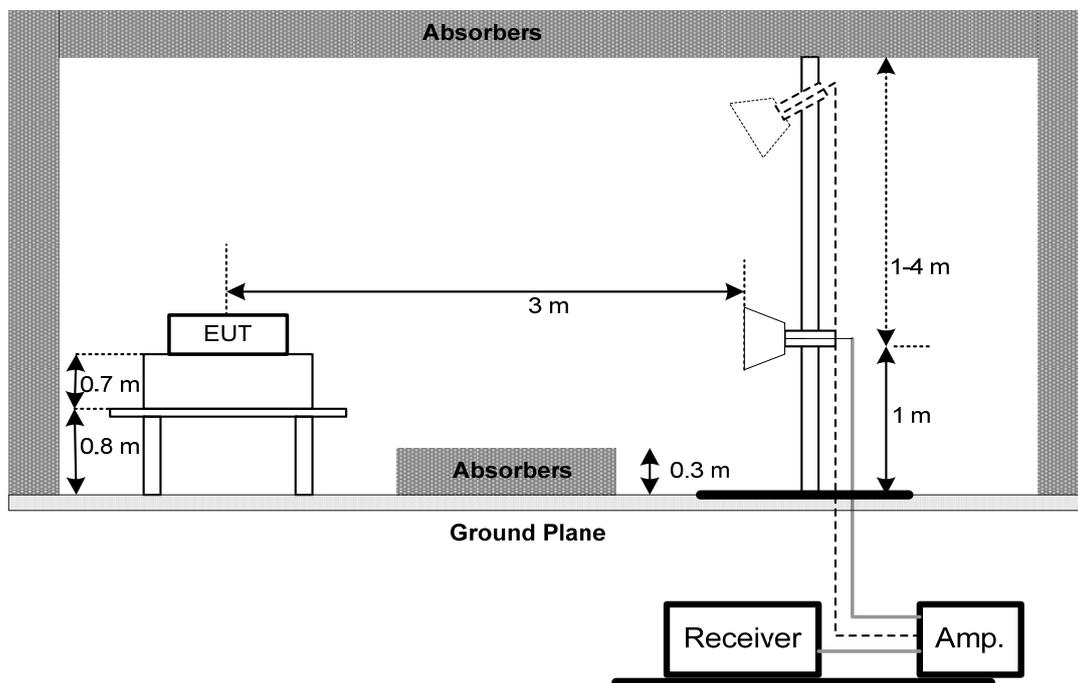

(C) For Radiated Emissions Below 30MHz

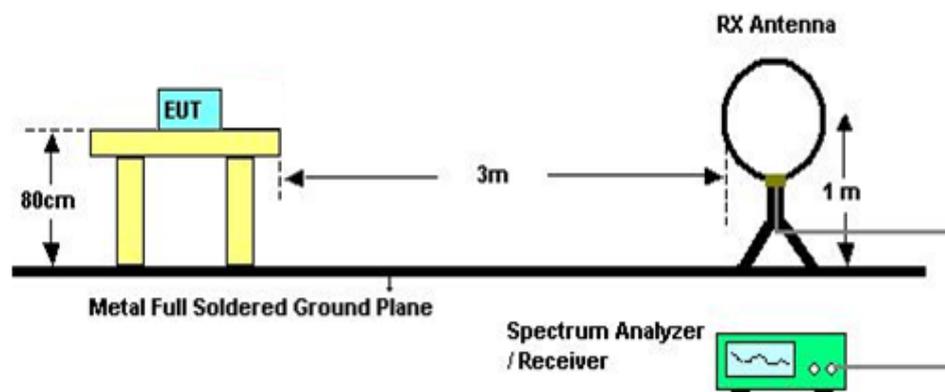

4.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing

4.2.6 EUT TEST CONDITIONS

Temperature: 25°C

Relative Humidity: 55%

Test Voltage: DC 3.7V

4.2.7 TEST RESULTS (9KHZ TO 30MHZ)

Please refer to the Attachment B

Remark:

- (1) The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.
- (2) Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB).
- (3) Limit line = specific limits (dBuV) + distance extrapolation factor.

4.2.8 TEST RESULTS (30MHZ TO 1000 MHZ)

Please refer to the Attachment C.

Remark:

- (1) All readings are Peak unless otherwise stated QP in column of 『Note』. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (2) Measuring frequency range from 30MHz to 1000MHz.
- (3) If the peak scan value lower limit more than 20dB, then this signal data does not show in table.

4.2.9 TEST RESULTS (ABOVE 1000 MHZ)

Please refer to the Attachment D.

Remark:

- (1) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission
- (2) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (3) EUT Orthogonal Axis:
"X" - denotes Laid on Table, "Y" - denotes Vertical Stand, "Z" - denotes Side Stand
- (4) During the measurements above 1 GHz it is taken care of that the EUT is always within the 3 dB cone of radiation BW of the used antenna
- (5) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

5. NUMBER OF HOPPING CHANNEL

5.1 APPLIED PROCEDURES

FCC Part15 (15.247) , Subpart C/ RSS-GEN and RSS-247			
Section	Test Item	Frequency Range (MHz)	Result
15.247(a)(1)(iii) RSS-247 5.1 (4)	Number of Hopping Channel	2400-2483.5	PASS

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> Operating Frequency Range
RBW	100 KHz
VBW	100 KHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto


5.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting: RBW=100KHz, VBW=100KHz, Sweep time = Auto.

5.1.2 DEVIATION FROM STANDARD

No deviation.

5.1.3 TEST SETUP

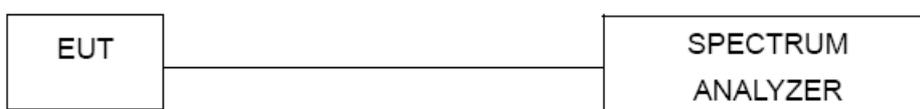

5.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

5.1.5 EUT TEST CONDITIONS

Temperature: 25°C
 Relative Humidity: 55%
 Test Voltage: DC 3.7V

5.1.6 TEST RESULTS

Please refer to the Attachment E

6. AVERAGE TIME OF OCCUPANCY

6.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C/ RSS-GEN and RSS-247				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(1)(iii) RSS-247 5.1 (4)	Average Time of Occupancy	0.4sec	2400-2483.5	PASS

6.1.1 TEST PROCEDURE

- a. The transmitter output (antenna port) was connected to the spectrum analyzer
- b. Set RBW of spectrum analyzer to 1MHz and VBW to 1MHz.
- c. Use a video trigger with the trigger level set to enable triggering only on full pulses.
- d. Sweep Time is more than once pulse time.
- e. Set the center frequency on any frequency would be measure and set the frequency span to zero span.
- f. Measure the maximum time duration of one single pulse.
- g. Set the EUT for DH5, DH3 and DH1 packet transmitting.
- h. Measure the maximum time duration of one single pulse.
- i. DH5 Packet permit maximum $1600 / 79 / 6 = 3.37$ hops per second in each channel (5 time slots TX, 1 time slot RX). So, the dwell time is the time duration of the pulse times $3.37 \times 31.6 = 106.6$ within 31.6 seconds.
- j. DH3 Packet permit maximum $1600 / 79 / 4 = 5.06$ hops per second in each channel (3 time slots TX, 1 time slot RX). So, the dwell time is the time duration of the pulse times $5.06 \times 31.6 = 160$ within 31.6 seconds.
- k. DH1 Packet permit maximum $1600 / 79 / 2 = 10.12$ hops per second in each channel (1 time slot TX, 1 time slot RX). So, the dwell time is the time duration of the pulse times $10.12 \times 31.6 = 320$ within 31.6 seconds.

6.1.2 DEVIATION FROM STANDARD

No deviation.

6.1.3 TEST SETUP



6.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

6.1.5 EUT TEST CONDITIONS

Temperature: 25°C

Relative Humidity: 55%

Test Voltage: DC 3.7V

6.1.6 TEST RESULTS

Please refer to the Attachment F

7. HOPPING CHANNEL SEPARATION MEASUREMENT

7.1 APPLIED PROCEDURES / LIMIT

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 KHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> Measurement Bandwidth or Channel Separation
RBW	30 KHz
VBW	100 KHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto


7.1.1 TEST PROCEDURE

- a. The EUT must have its hopping function enabled
- b. Span = wide enough to capture the peaks of two adjacent channels
 - Resolution (or IF) Bandwidth (RBW) \geq 1% of the span
 - Video (or Average) Bandwidth (VBW) \geq RBW
 - Sweep = Auto
 - Detector function = Peak
 - Trace = Max Hold

7.1.2 DEVIATION FROM STANDARD

No deviation.

7.1.3 TEST SETUP

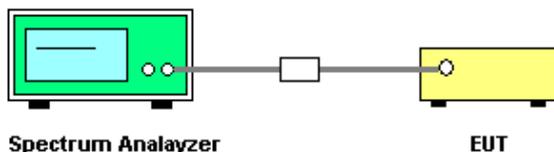

7.1.4 EUT TEST CONDITIONS

Temperature: 25°C
 Relative Humidity: 55%
 Test Voltage: DC 3.7V

7.1.5 TEST RESULTS

Please refer to the Attachment G

8. BANDWIDTH TEST

8.1 APPLIED PROCEDURES

FCC Part15 (15.247) , Subpart C/ RSS-GEN and RSS-247		
Section	Test Item	Frequency Range (MHz)
15.247(a)(2) RSS-GEN 6.6 RSS-247 5.1 (1)	Bandwidth	2400-2483.5

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> Measurement Bandwidth or Channel Separation
RBW	30 KHz (20dB Bandwidth) / 30 KHz (Channel Separation)
VBW	100 KHz (20dB Bandwidth) / 100 KHz (Channel Separation)
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

8.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting: RBW= 30KHz, VBW=100KHz, Sweep Time = Auto.

8.1.2 DEVIATION FROM STANDARD

No deviation.

8.1.3 TEST SETUP



8.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

8.1.5 EUT TEST CONDITIONS

Temperature: 25°C
Relative Humidity: 55%
Test Voltage: DC 3.7V

8.1.6 TEST RESULTS

Please refer to the Attachment H

9. PEAK OUTPUT POWER TEST

9.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C/ RSS-247				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(1) RSS-247 5.4 (2)	Peak Output Power	1 Watt or 30dBm (hopping channel >75) 0.125Watt or 21dBm (hopping channel <75)	2400-2483.5	PASS

9.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting: RBW= 1MHz/3MHz, VBW= 1MHz/3MHz, Sweep time = Auto.

9.1.2 DEVIATION FROM STANDARD

No deviation.

9.1.3 TEST SETUP



9.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

9.1.5 EUT TEST CONDITIONS

Temperature: 25°C
Relative Humidity: 55%
Test Voltage: DC 3.7V

9.1.6 TEST RESULTS

Please refer to the Attachment I

10. ANTENNA CONDUCTED SPURIOUS EMISSION

10.1 APPLIED PROCEDURES / LIMIT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits.

10.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting: RBW= 100KHz, VBW=100KHz, Sweep time = Auto.
- c. Offset=antenna gain+cable loss

10.1.2 DEVIATION FROM STANDARD

No deviation.

10.1.3 TEST SETUP



10.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

10.1.5 EUT TEST CONDITIONS

Temperature: 25°C
Relative Humidity: 55%
Test Voltage: DC 3.7V

10.1.6 TEST RESULTS

Please refer to the Attachment J

11. MEASUREMENT INSTRUMENTS LIST

Conducted Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	LISN	EMCO	3816/2	0052765	Mar. 27, 2017
2	LISN	R&S	ENV216	101447	Mar. 27, 2017
3	Test Cable	emci	RG223(9KHz-30 MHz)	C_17	Mar. 10, 2017
4	EMI Test Receiver	R&S	ESCI	100382	Mar. 27, 2017
5	50Ω Terminator	SHX	TF2-3G-A	08122901	Mar. 27, 2017
6	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Radiated Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Antenna	Schwarbeck	VULB9160	9160-3232	Mar. 27, 2017
2	Amplifier	HP	8447D	2944A09673	Nov. 09, 2016
3	Receiver	AGILENT	N9038A	MY52130039	Oct. 11, 2016
4	Test Cable	emci	LMR-400(30MHz-1GHz)	C-01	Jun. 28, 2016
5	Control	CT	SC100	N/A	N/A
6	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
7	Antenna	ETS	3115	00075789	Mar. 27, 2017
8	Amplifier	Agilent	8449B	3008A02274	Nov. 01, 2016
9	Receiver	AGILENT	N9038A	MY52130039	Oct. 11, 2016
10	Test Cable	emci	EMC104-SM-S M-10000(1GHz-26.5GHz)	C-68	Jun. 28, 2016
11	Controller	CT	SC100	N/A	N/A
12	Position Control	MF	MF-7802	MF780208416	N/A
13	Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170319	Apr. 23, 2017
14	Active Loop Antenna	R&S	HFH2-Z2	830749/020	Sep. 07, 2016

Number of Hopping Channel

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP 40	100185	Oct. 11, 2016

Average Time of Occupancy

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP 40	100185	Oct. 11, 2016

Hopping Channel Separation Measurement

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP 40	100185	Oct. 11, 2016

Bandwidth

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP 40	100185	Oct. 11, 2016

Peak Output Power

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP 40	100185	Oct. 11, 2016

Antenna Conducted Spurious Emission

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP 40	100185	Oct. 11, 2016

Remark: "N/A" denotes no model name, serial no. or calibration specified.
 All calibration period of equipment list is one year.


12. EUT TEST PHOTO

Conducted Measurement Photos





Radiated Measurement Photos

9KHz to 30MHz

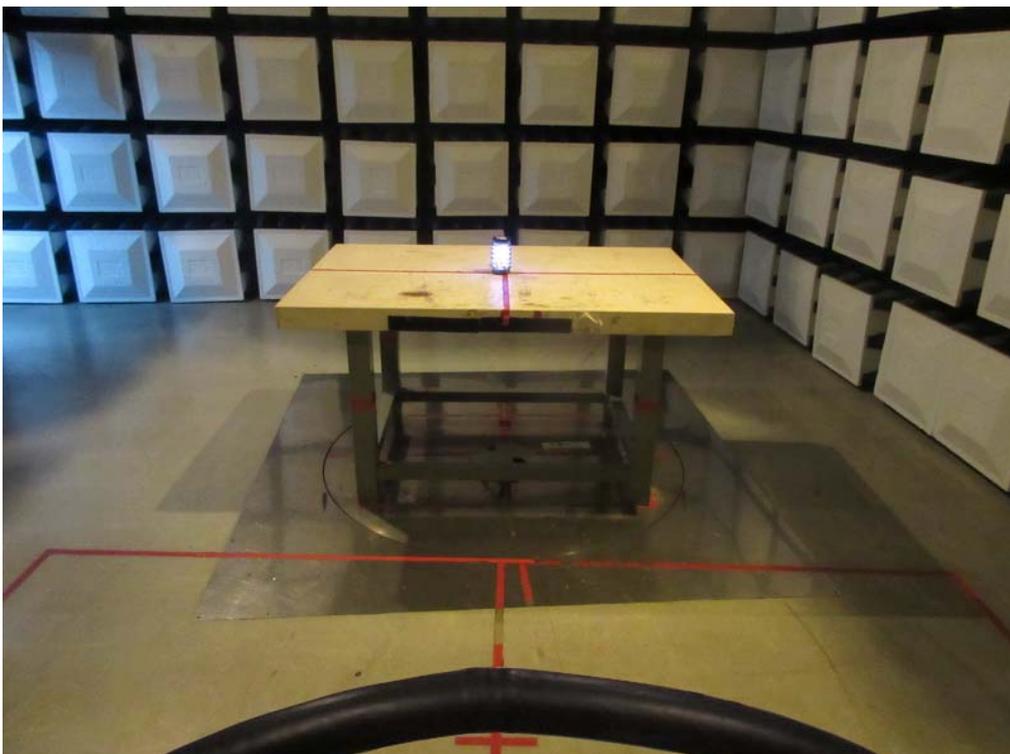

Radiated Measurement Photos

30MHz to 1000MHz

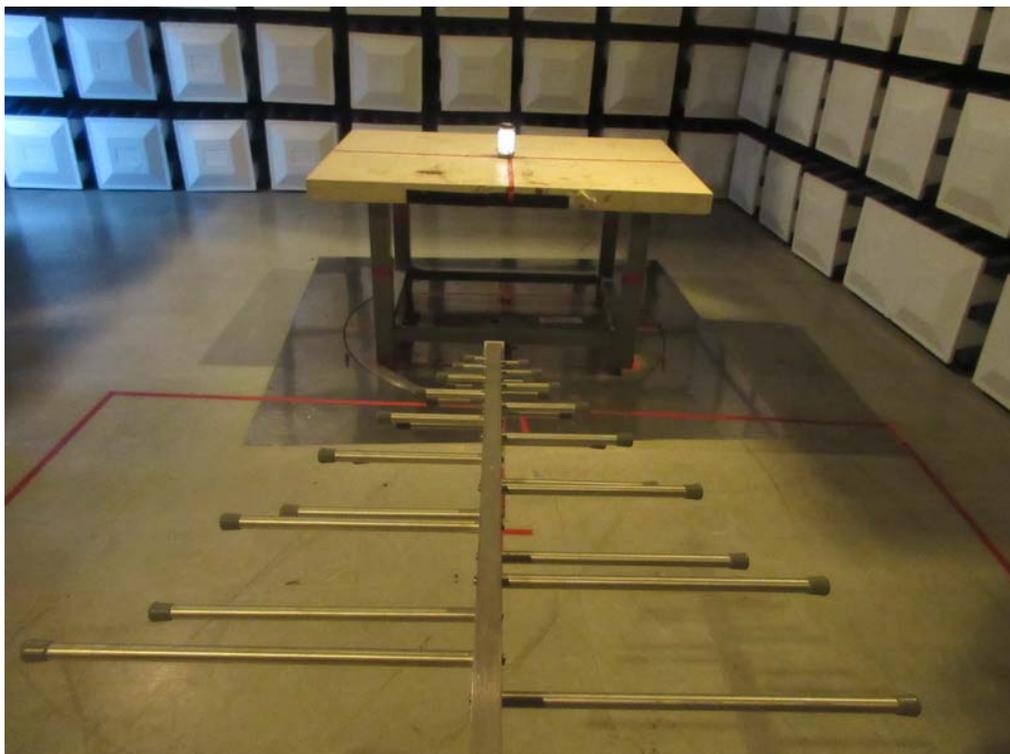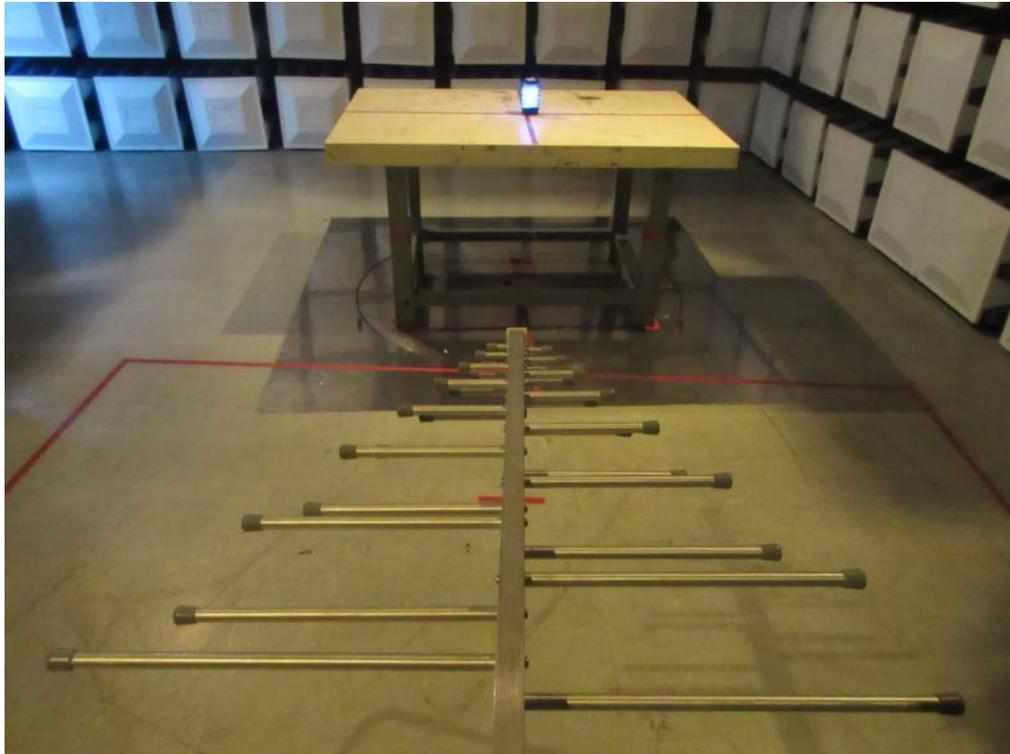


Radiated Measurement Photos

1GHz to 18 GHz



Radiated Measurement Photos

18GHz to 26.5 GHz

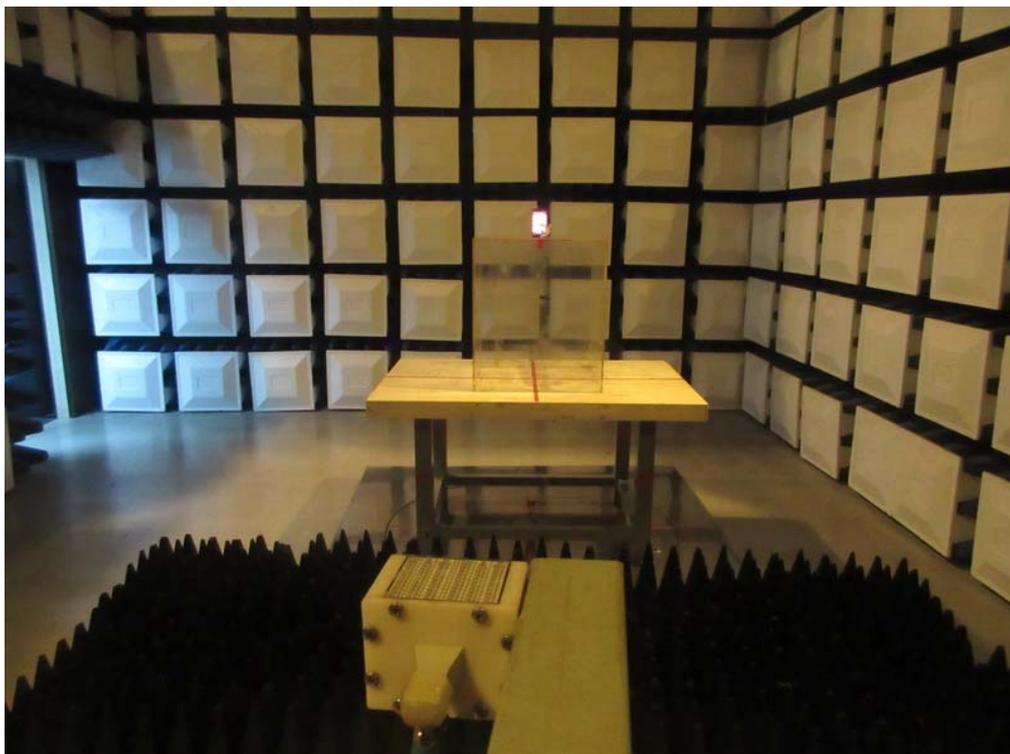


Conducted Measurement Photos



ATTACHMENT A - CONDUCTED EMISSION

Test Mode: TX Mode


Line

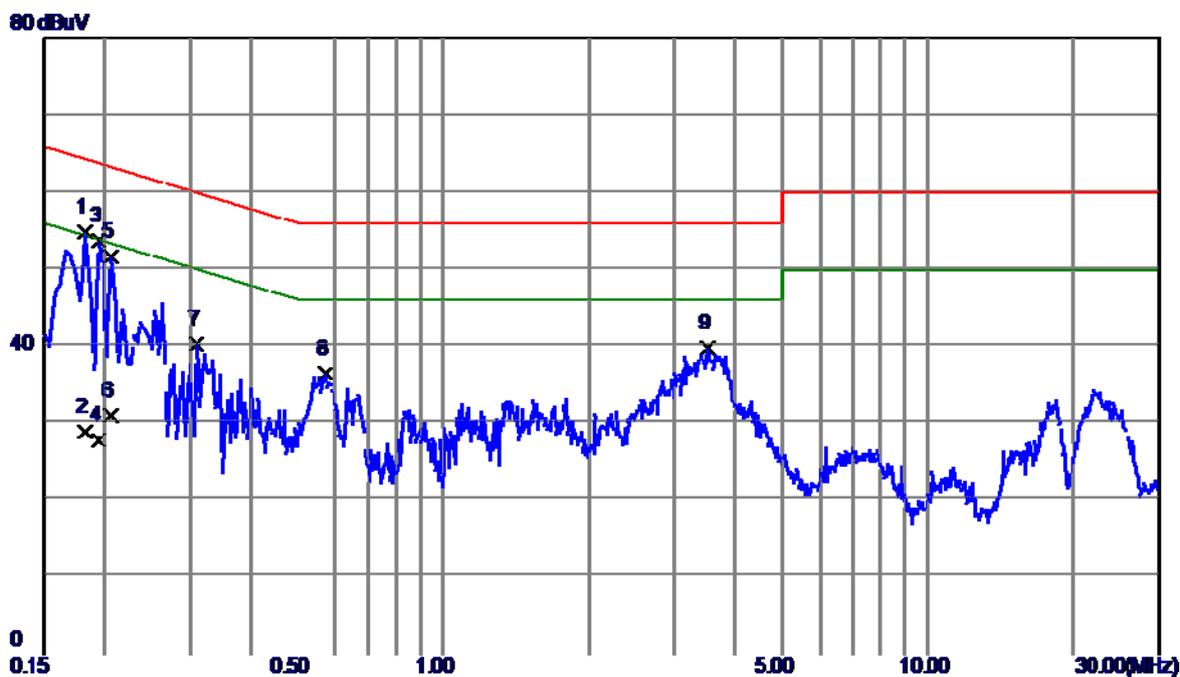

No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1 *	0.1819	45.32	9.53	54.85	64.40	-9.55	Peak	
2	0.1819	19.50	9.53	29.03	54.40	-25.37	AVG	
3	0.1940	44.24	9.53	53.77	63.86	-10.09	Peak	
4	0.1940	18.30	9.53	27.83	53.86	-26.03	AVG	
5	0.2060	42.19	9.53	51.72	63.37	-11.65	Peak	
6	0.2060	21.53	9.53	31.06	53.37	22.31	AVG	
7	0.3100	30.85	9.53	40.38	59.97	-19.59	Peak	
8	0.5700	26.78	9.64	36.42	56.00	-19.58	Peak	
9	3.5260	29.66	10.14	39.80	56.00	-16.20	Peak	

Test Mode: TX Mode

Neutral

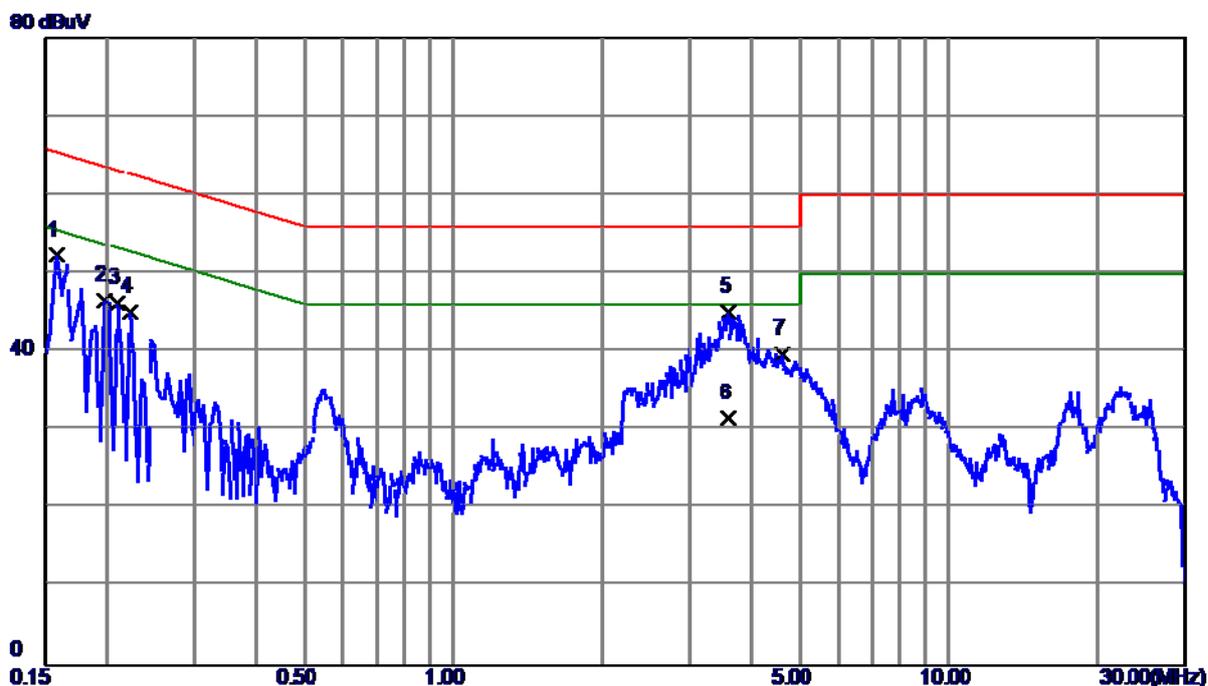

No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1580	42.77	9.48	52.25	65.57	-13.32	Peak	
2	0.1980	37.05	9.52	46.57	63.69	-17.12	Peak	
3	0.2100	36.67	9.53	46.20	63.21	-17.01	Peak	
4	0.2220	35.55	9.53	45.08	62.74	-17.66	Peak	
5 *	3.6020	35.33	9.85	45.18	56.00	-10.82	Peak	
6	3.6020	21.70	9.85	31.55	46.00	-14.45	AVG	
7	4.6140	29.77	9.95	39.72	56.00	-16.28	Peak	

ATTACHMENT B - RADIATED EMISSION (9KHZ-30MHZ)

Test Mode:	TX Mode
------------	---------


Frequency (MHz)	Ant 0°/90°	Read level dBuV/m	Factor (dB)	Measured(FS) (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Note
0.0092	0°	13.38	24.9840	38.3640	128.3285	-89.9645	AVG
0.0092	0°	14.24	24.9840	39.2240	148.3285	-109.1045	PEAK
0.0281	0°	6.7	23.7870	30.4870	118.6301	-88.1431	AVG
0.0281	0°	8.07	23.7870	31.8570	138.6301	-106.7731	PEAK
0.0359	0°	3.09	23.2930	26.3830	116.5023	-90.1193	AVG
0.0359	0°	5.47	23.2930	28.7630	136.5023	-107.7393	PEAK
0.0576	0°	1.15	22.2480	23.3980	112.3958	-88.9978	AVG
0.0576	0°	2.47	22.2480	24.7180	132.3958	-107.6778	PEAK
0.509	0°	19.3	19.8288	39.1288	73.4699	-34.3411	QP
1.9521	0°	23.67	19.5048	43.1748	69.5400	-26.3652	QP

Frequency (MHz)	Ant 0°/90°	Read level dBuV/m	Factor (dB)	Measured(FS) (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Note
0.0124	90°	13.14	24.3000	37.4400	125.7358	-88.2958	AVG
0.0124	90°	14.78	24.3000	39.0800	145.7358	-106.6558	PEAK
0.0258	90°	7.21	23.9327	31.1427	119.3718	-88.2292	AVG
0.0258	90°	8.9	23.9327	32.8327	139.3718	-106.5392	PEAK
0.0431	90°	5.19	22.8370	28.0270	114.9147	-86.8877	AVG
0.0431	90°	6.14	22.8370	28.9770	134.9147	-105.9377	PEAK
0.0583	90°	1.47	22.2340	23.7040	112.2909	-88.5869	AVG
0.0583	90°	2.8	22.2340	25.0340	132.2909	-107.2569	PEAK
0.6219	90°	22.15	20.1901	42.3401	71.7298	-29.3897	QP
2.0546	90°	24.52	19.4672	43.9872	69.5400	-25.5528	QP

ATTACHMENT C - RADIATED EMISSION (30MHZ TO 1000MHZ)

Test Mode: TX 2402MHz_CH00_1Mbps


Vertical

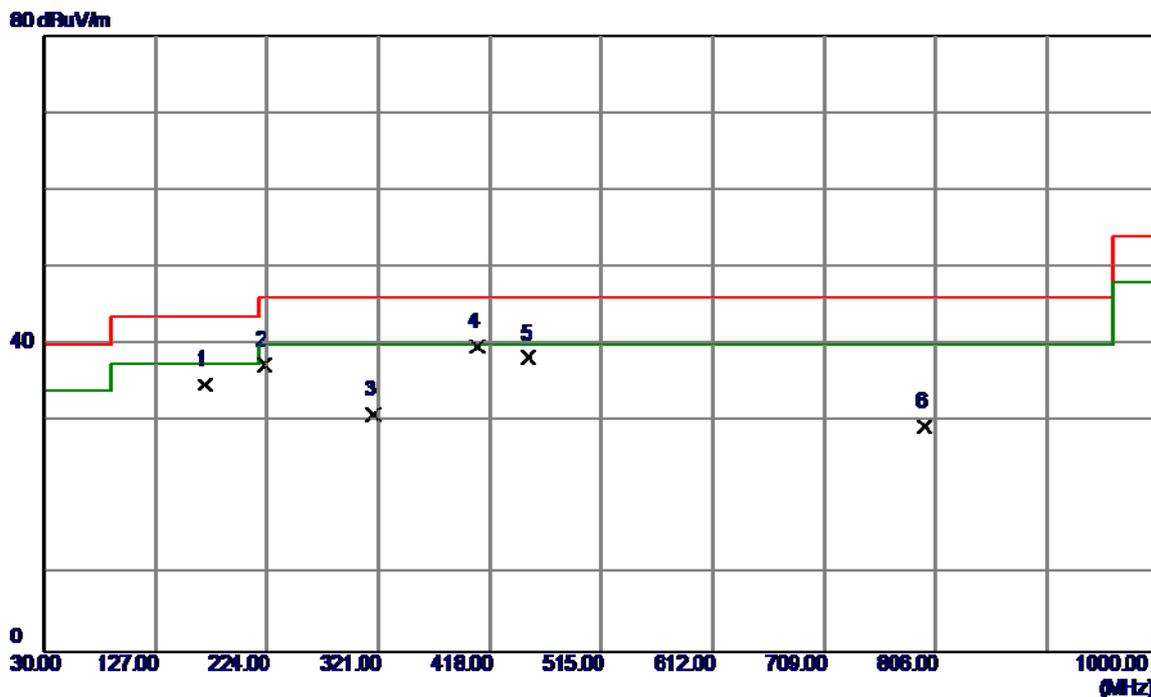

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	169.6799	47.02	-12.30	34.72	43.50	-8.78	Peak	
2	222.0600	51.56	-14.23	37.33	46.00	-8.67	Peak	
3	317.1200	41.68	-10.86	30.82	46.00	-15.18	Peak	
4 *	407.3299	48.04	-8.31	39.73	46.00	-6.27	Peak	
5	451.9500	46.81	-8.65	38.16	46.00	-7.84	Peak	
6	796.3000	30.23	-0.90	29.33	46.00	-16.67	Peak	

Test Mode: TX 2402MHz_CH00_1Mbps


Horizontal

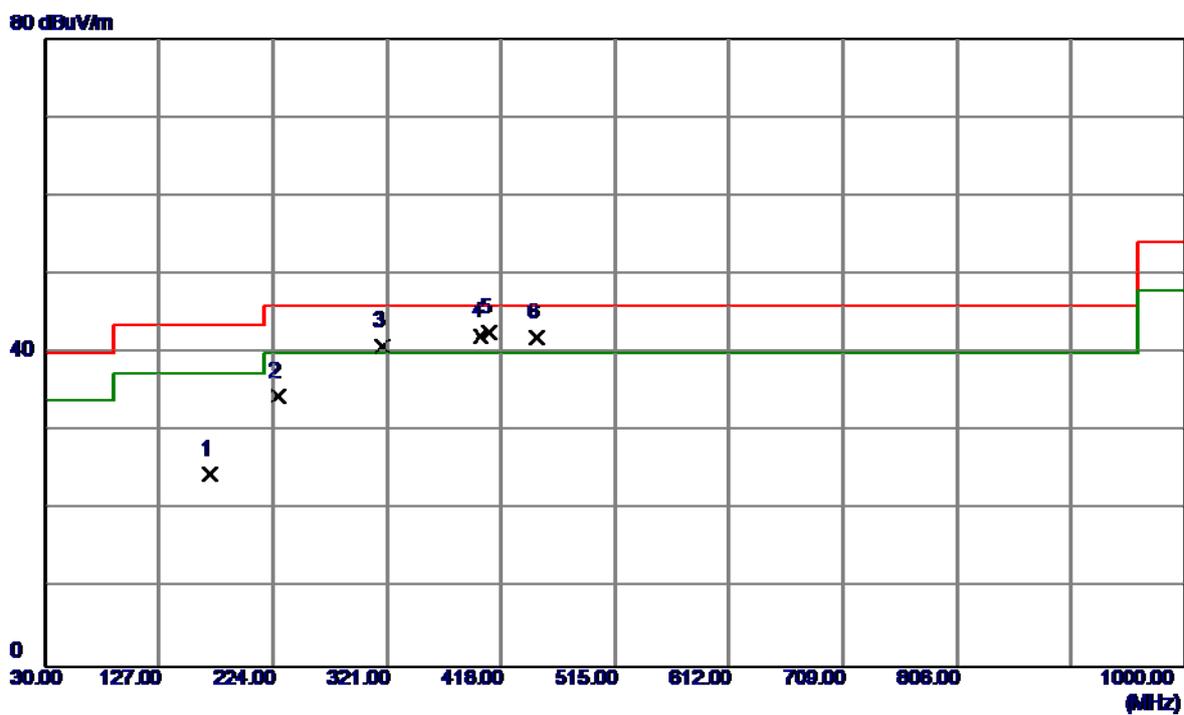

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	169.6799	36.81	-12.30	24.51	43.50	-18.99	Peak	
2	227.8800	48.08	-13.72	34.36	46.00	-11.64	Peak	
3	317.1200	51.68	-10.86	40.82	46.00	-5.18	Peak	
4	400.5400	50.40	-8.27	42.13	46.00	-3.87	QP	
5 *	408.3000	50.90	-8.32	42.58	46.00	-3.42	QP	
6	448.0700	50.54	-8.56	41.98	46.00	-4.02	Peak	

Test Mode: TX 2441MHz_CH39_1Mbps


Vertical

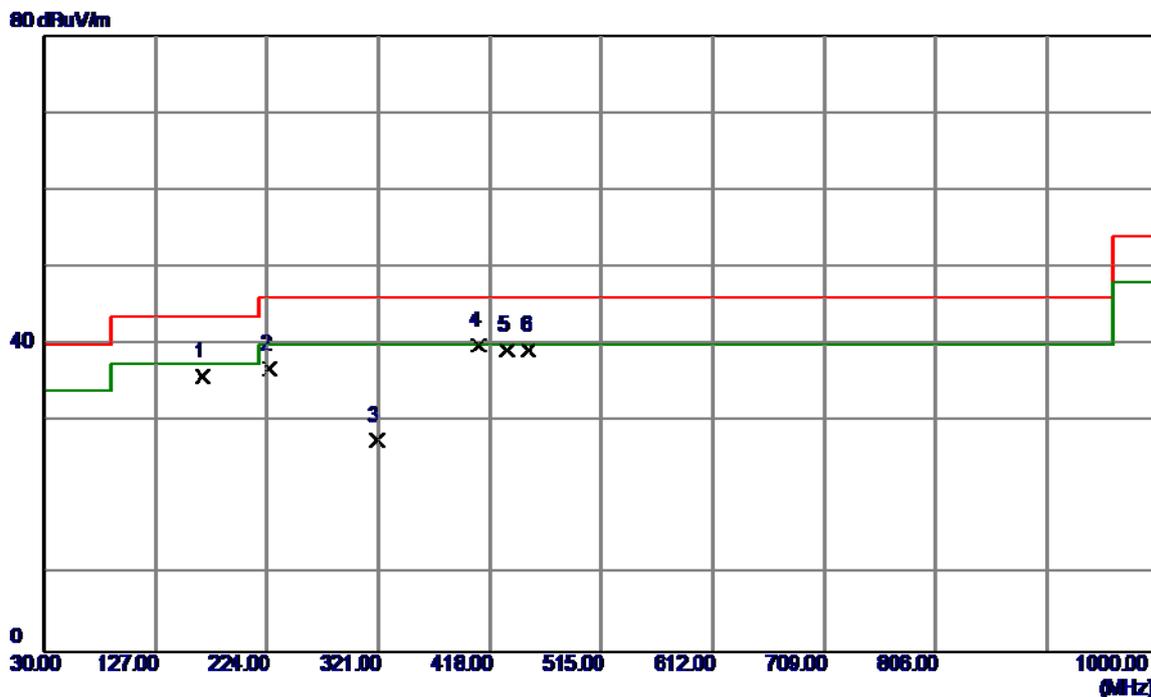

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	167.7400	48.05	-12.28	35.77	43.50	-7.73	Peak	
2	225.9400	50.65	-13.89	36.76	46.00	-9.24	Peak	
3	320.0300	38.43	-10.92	27.51	46.00	-18.49	Peak	
4 *	408.3000	48.19	-8.32	39.87	46.00	-6.13	Peak	
5	433.5200	47.68	-8.47	39.21	46.00	-6.79	Peak	
6	451.9500	47.81	-8.65	39.16	46.00	-6.84	Peak	

Test Mode: TX 2441MHz_CH39_1Mbps


Horizontal

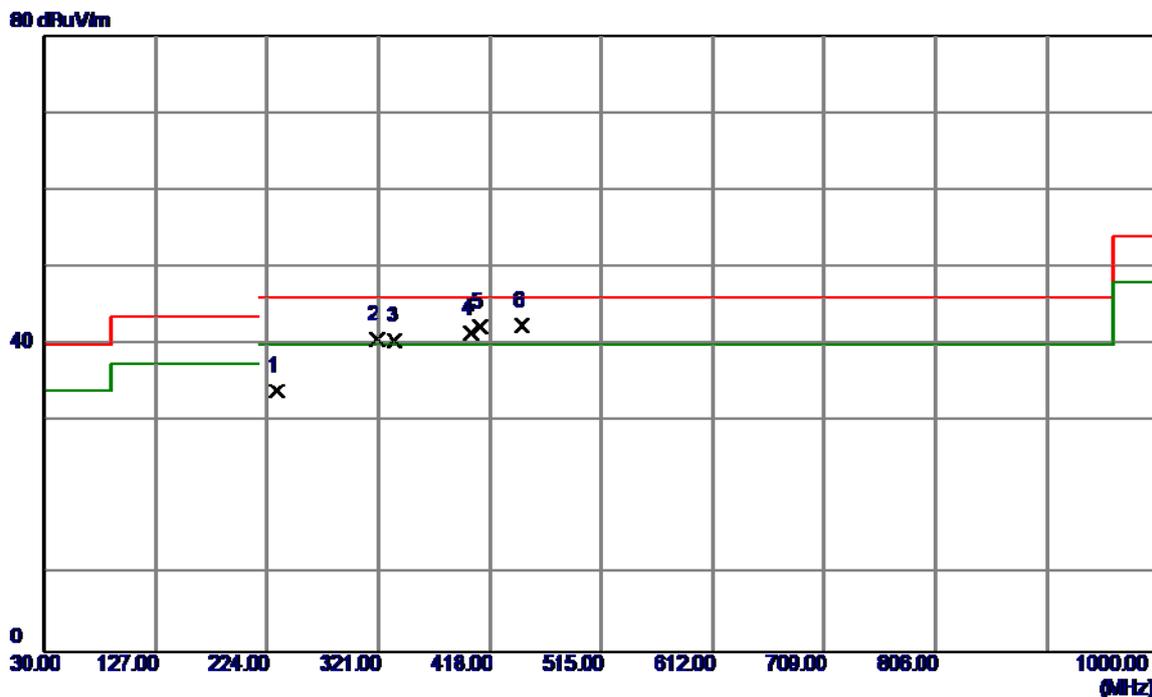

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	232.7300	47.63	-13.65	33.98	46.00	-12.02	Peak	
2	320.0300	51.54	-10.92	40.62	46.00	-5.38	Peak	
3	335.5500	51.82	-11.28	40.54	46.00	-5.46	Peak	
4	401.5100	49.70	-8.28	41.42	46.00	-4.58	QP	
5	409.2700	50.60	-8.33	42.27	46.00	-3.73	QP	
6 *	446.1300	50.94	-8.55	42.39	46.00	-3.61	Peak	

Test Mode: TX 2480MHz _CH78_ 1Mbps


Vertical

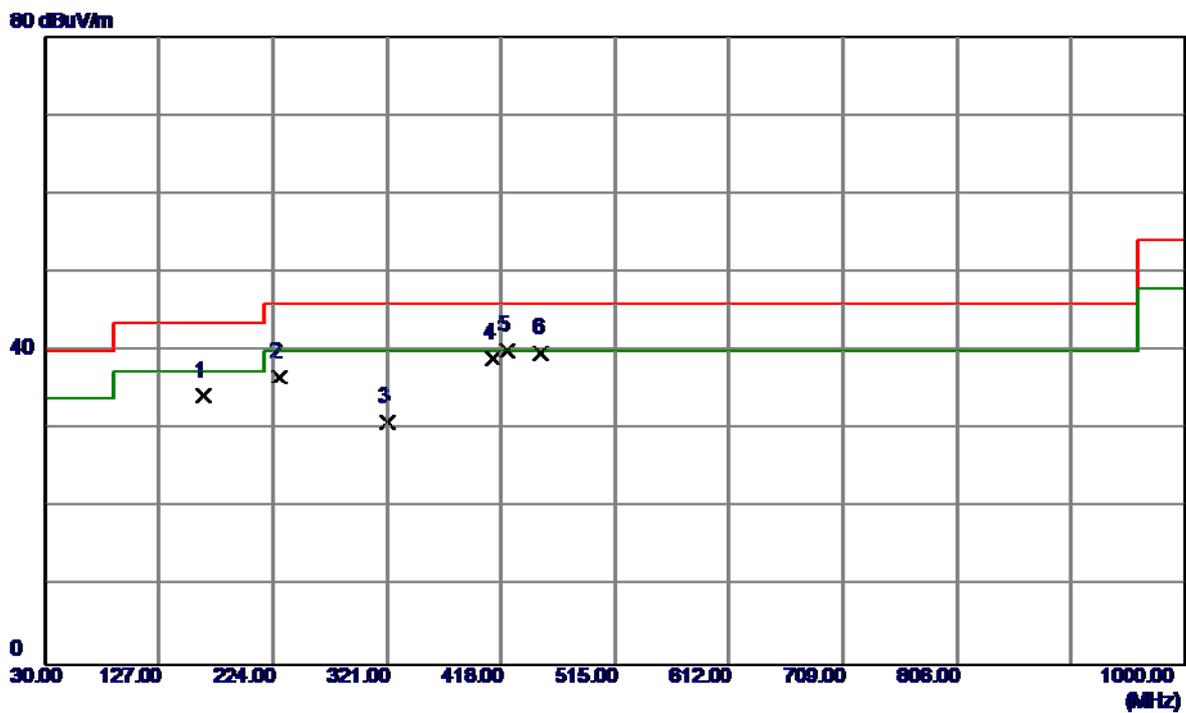

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	164.8300	46.52	-12.25	34.27	43.50	-9.23	Peak	
2	229.8200	50.25	-13.55	36.70	46.00	-9.30	Peak	
3	321.0000	41.76	-10.95	30.81	46.00	-15.19	Peak	
4	411.2100	47.32	-8.34	38.98	46.00	-7.02	Peak	
5 *	423.8200	48.41	-8.42	39.99	46.00	-6.01	Peak	
6	451.9500	48.34	-8.65	39.69	46.00	-6.31	Peak	

Test Mode: TX 2480MHz_CH78_1Mbps

Horizontal

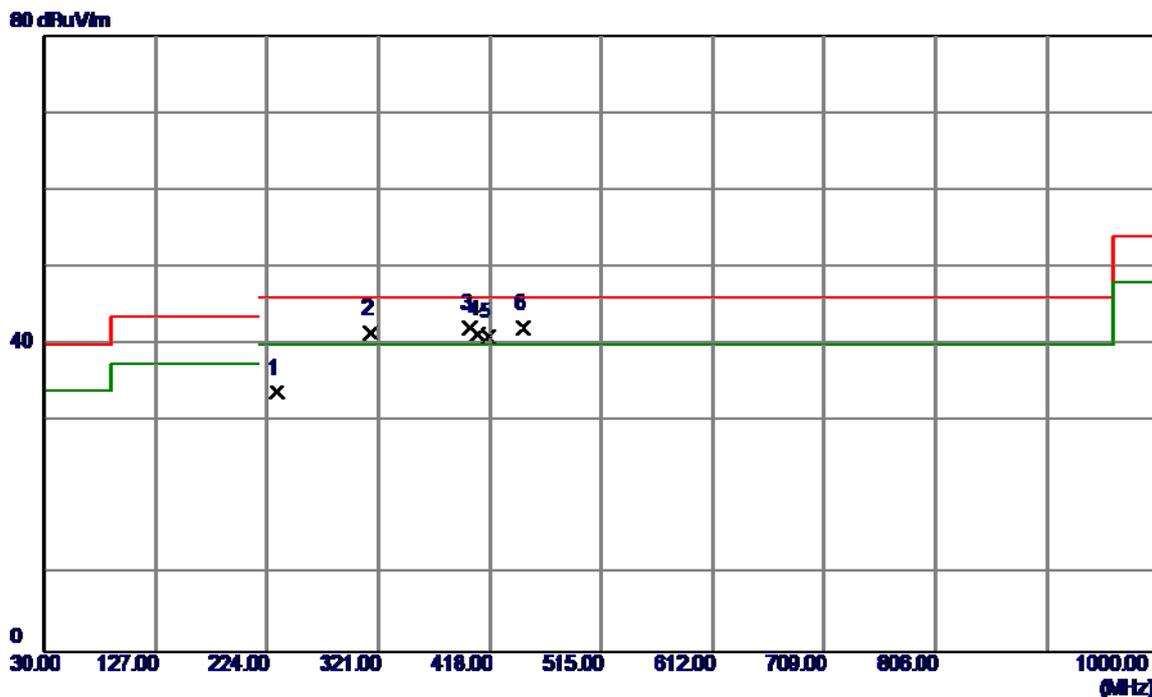


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	232.7300	47.33	-13.65	33.68	46.00	-12.32	Peak	
2	314.2100	52.29	-10.79	41.50	46.00	-4.50	Peak	
3 *	400.5400	50.40	-8.27	42.13	46.00	-3.87	QP	
4	407.3299	49.59	-8.31	41.28	46.00	-4.72	QP	
5	417.0300	49.29	-8.37	40.92	46.00	-5.08	QP	
6	447.1000	50.61	-8.56	42.05	46.00	-3.95	Peak	

ATTACHMENT D - RADIATED EMISSION (ABOVE 1000MHZ)

Test Mode: TX_1M_2402MHz - Pretest


Vertical

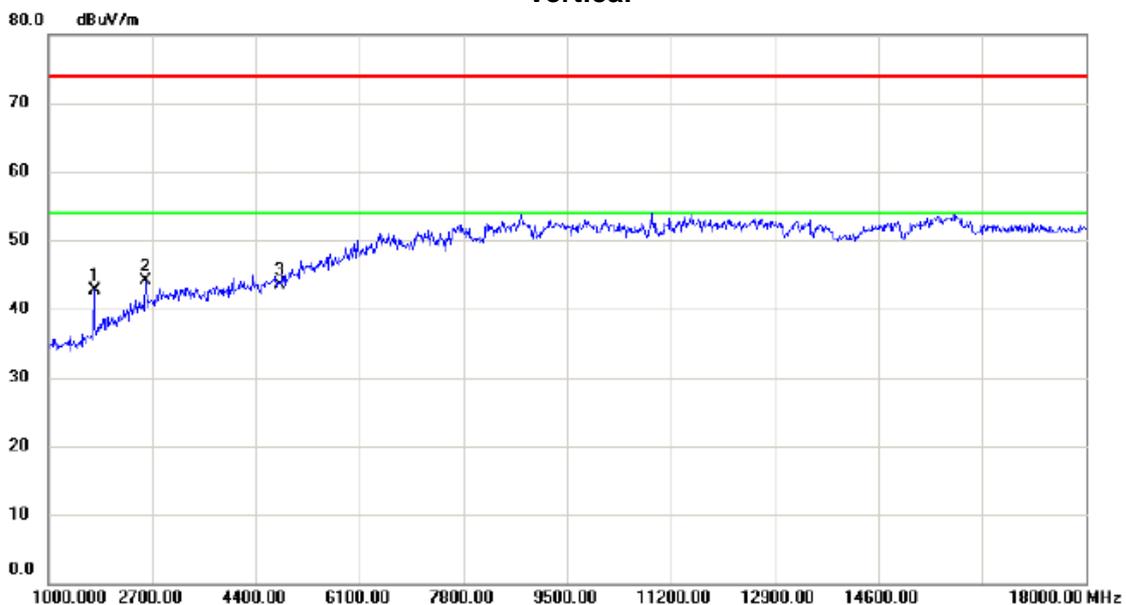

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1748.000	47.62	-4.97	42.65	74.00	-31.35	peak	
2	*	2606.500	44.90	-0.70	44.20	74.00	-29.80	peak	
3		4804.000	38.84	4.62	43.46	74.00	-30.54	peak	

Test Mode: TX_1M_2441MHz - Pretest


Horizontal

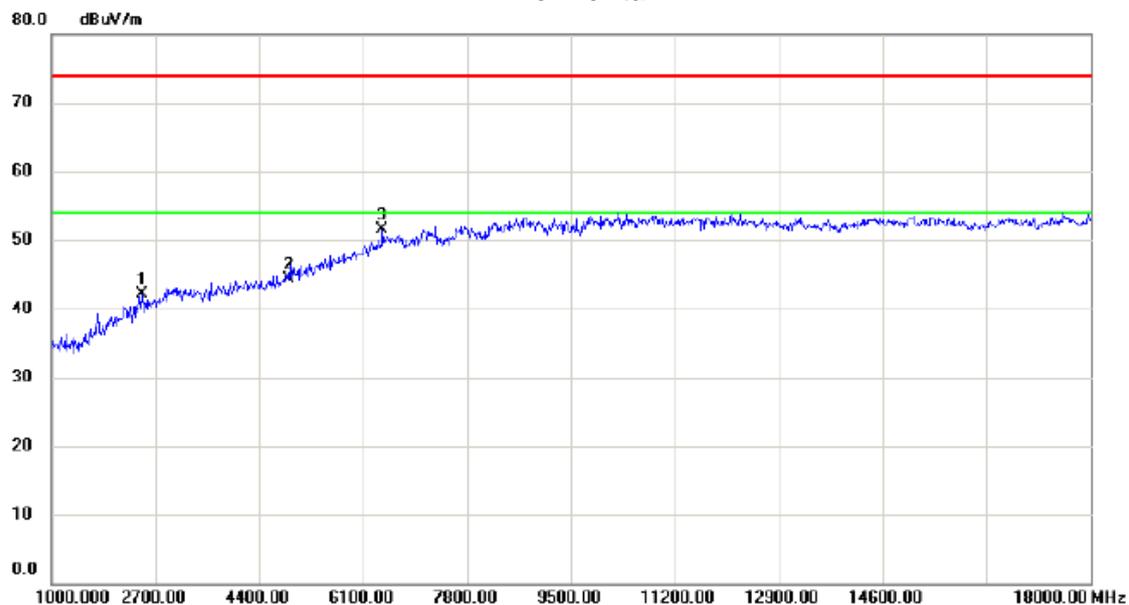

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2479.000	43.42	-1.30	42.12	74.00	-31.88	peak	
2		4882.000	39.45	4.92	44.37	74.00	-29.63	peak	
3	*	6406.000	41.50	10.08	51.58	74.00	-22.42	peak	

Test Mode: TX_1M_2480MHz - Pretest

Vertical

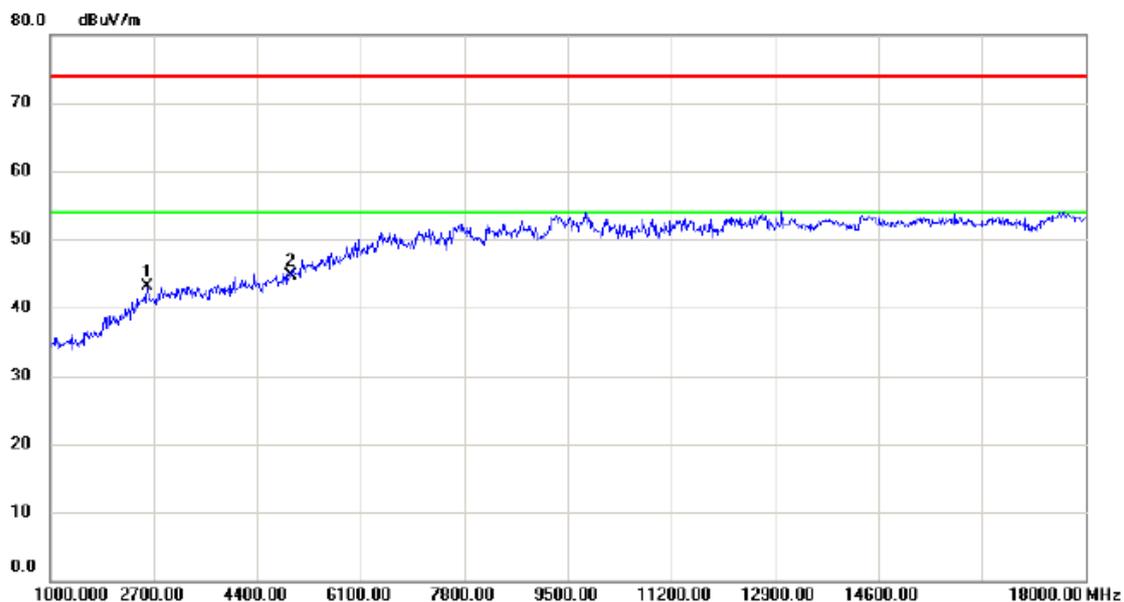


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2606.500	43.90	-0.70	43.20	74.00	-30.80	peak	
2	*	4960.000	39.41	5.22	44.63	74.00	-29.37	peak	

Test Mode : TX 2402MHz_CH00_1Mbps

Vertical


110 dBuV/m

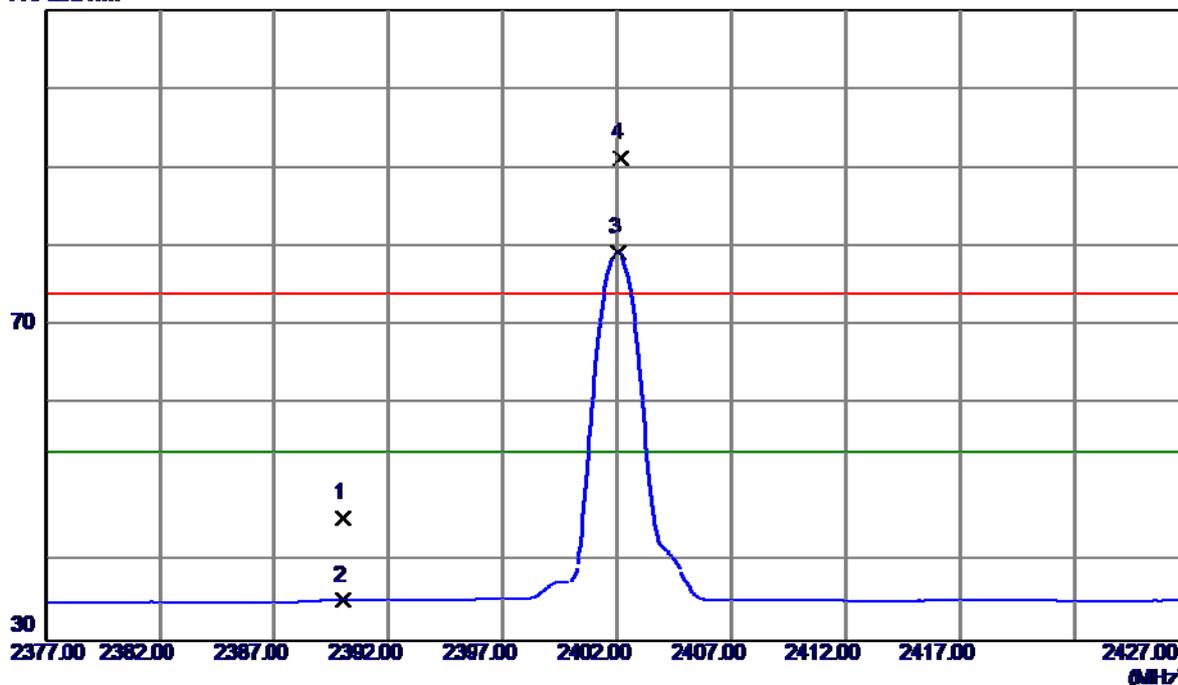

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	12.70	32.78	45.48	74.00	-28.52	Peak	
2	2390.0000	2.38	32.78	35.16	54.00	-18.84	AVG	
3 *	2402.0500	46.49	32.84	79.33	54.00	25.33	AVG	NO LIMIT
4	2402.1500	58.50	32.84	91.34	74.00	17.34	Peak	NO LIMIT

Test Mode : TX 2402MHz _CH00_1Mbps


Vertical

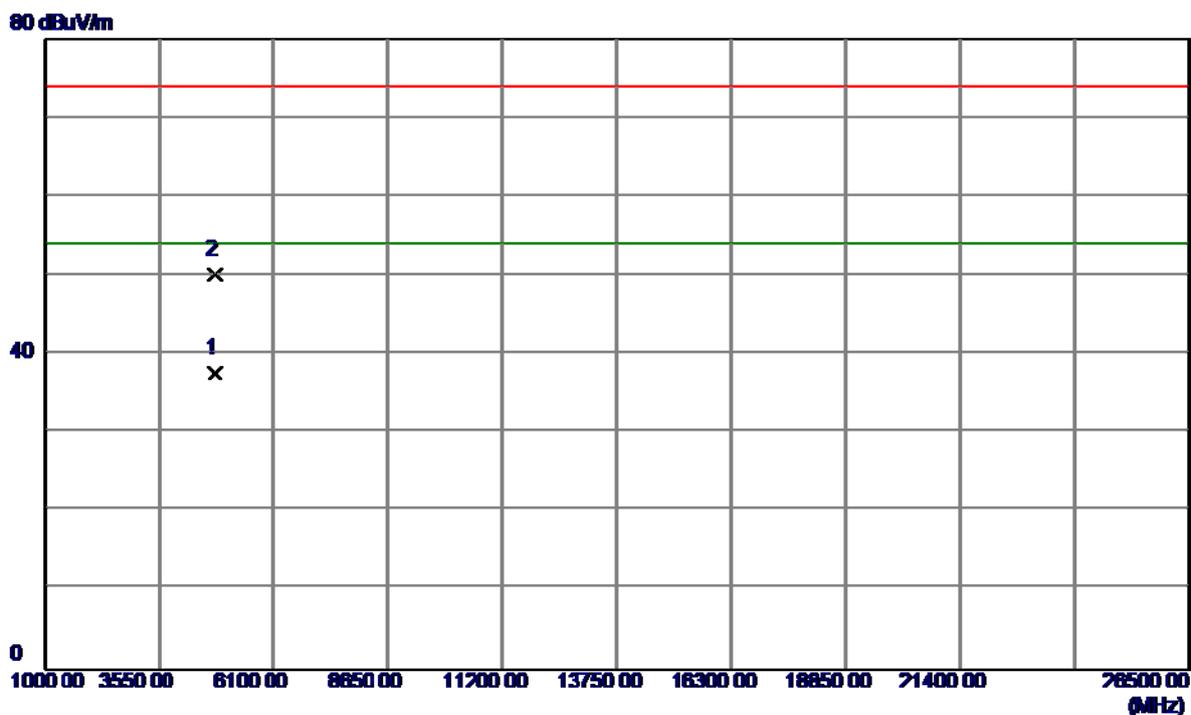

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4804.0500	33.99	3.68	37.67	54.00	-16.33	AVG	
2	4804.1000	46.41	3.68	50.09	74.00	-23.91	Peak	

Test Mode : TX 2402MHz _CH00_1Mbps


Horizontal

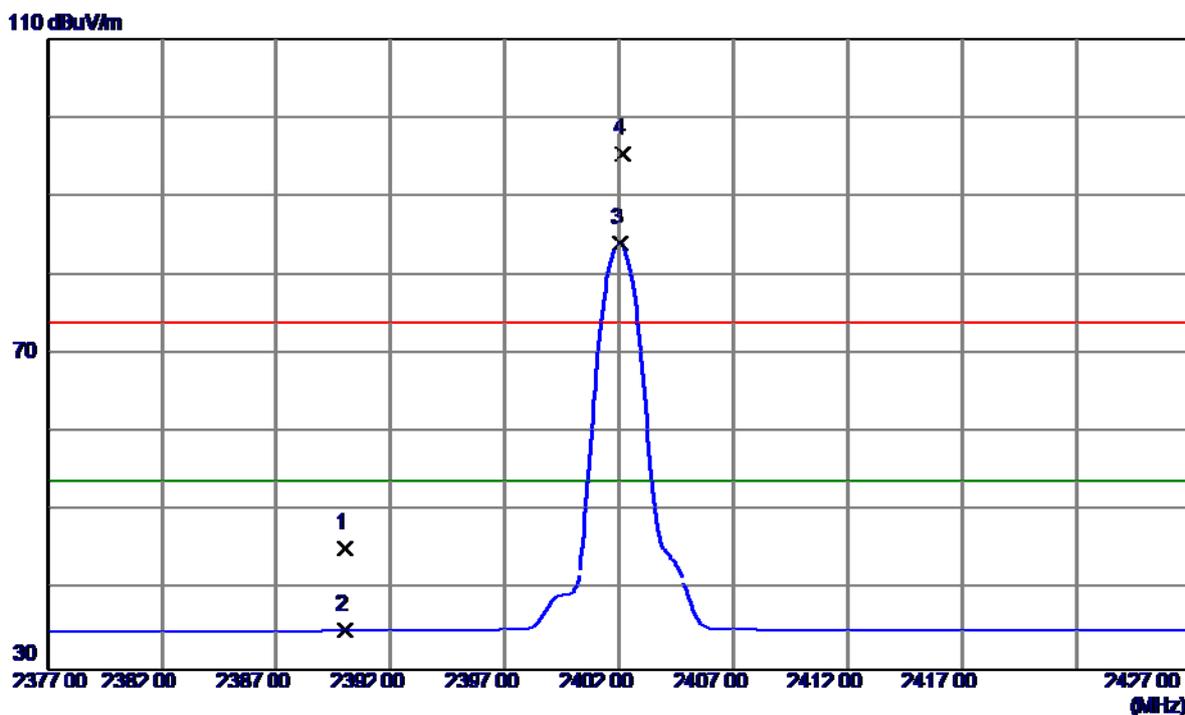

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	12.53	32.78	45.31	74.00	-28.69	Peak	
2	2390.0000	2.16	32.78	34.94	54.00	-19.06	AVG	
3 *	2402.0500	51.20	32.84	84.04	54.00	30.04	AVG	NO LIMIT
4	2402.1750	62.58	32.84	95.42	74.00	21.42	Peak	NO LIMIT

Test Mode : TX 2402MHz _CH00_1Mbps


Horizontal

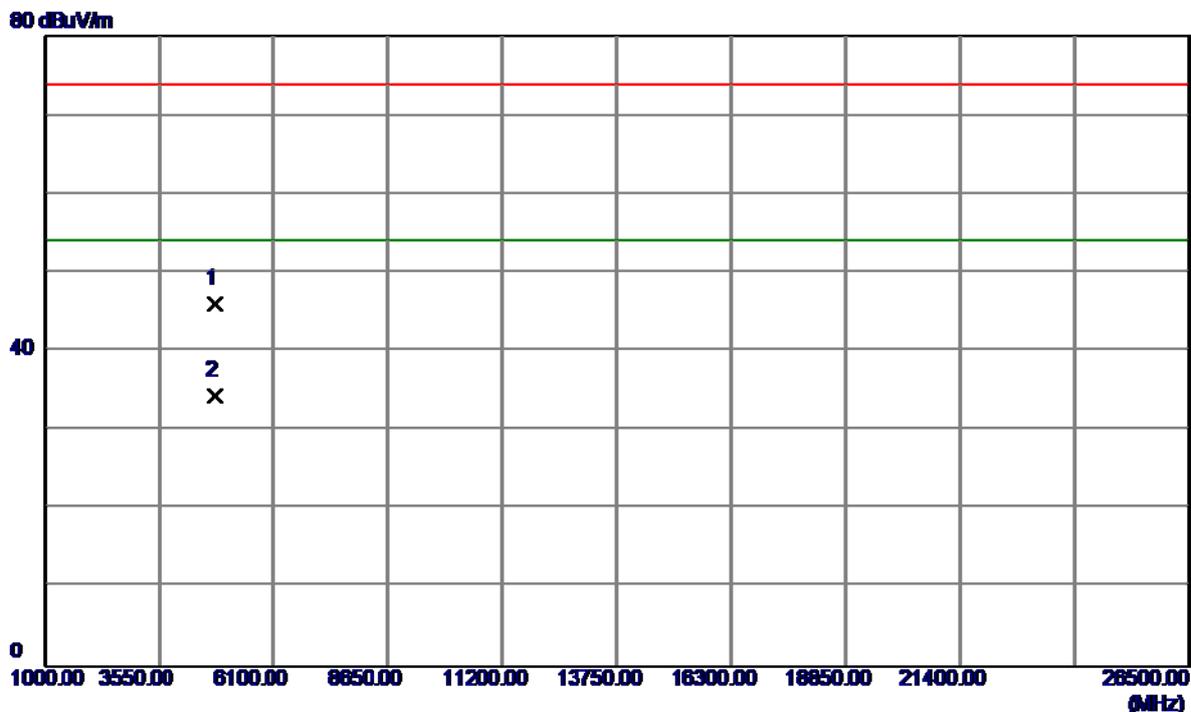

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4803.6000	42.46	3.68	46.14	74.00	-27.86	Peak	
2 *	4804.0500	30.69	3.68	34.37	54.00	-19.63	AVG	

Test Mode : TX 2441MHz _CH39_ 1Mbps


Vertical

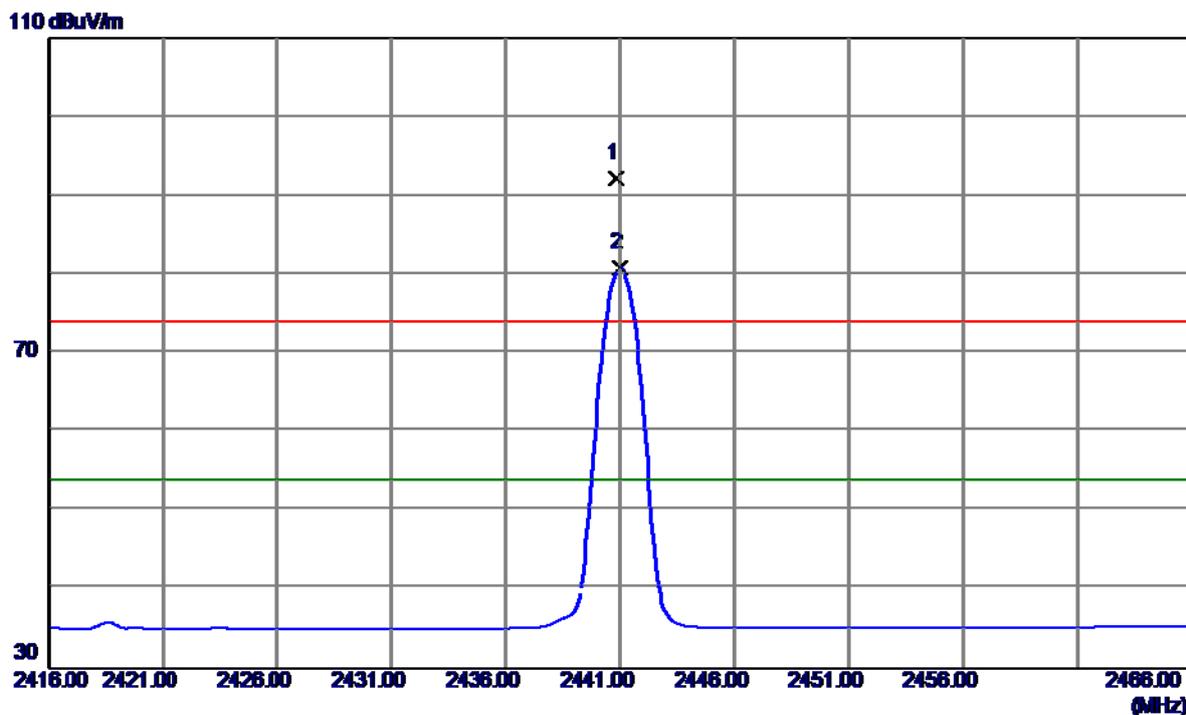

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2440.8250	59.21	33.05	92.26	74.00	18.26	Peak	NO LIMIT
2 *	2441.0000	47.76	33.05	80.81	54.00	26.81	AVG	NO LIMIT

Test Mode : TX 2441MHz _CH39_1Mbps


Vertical

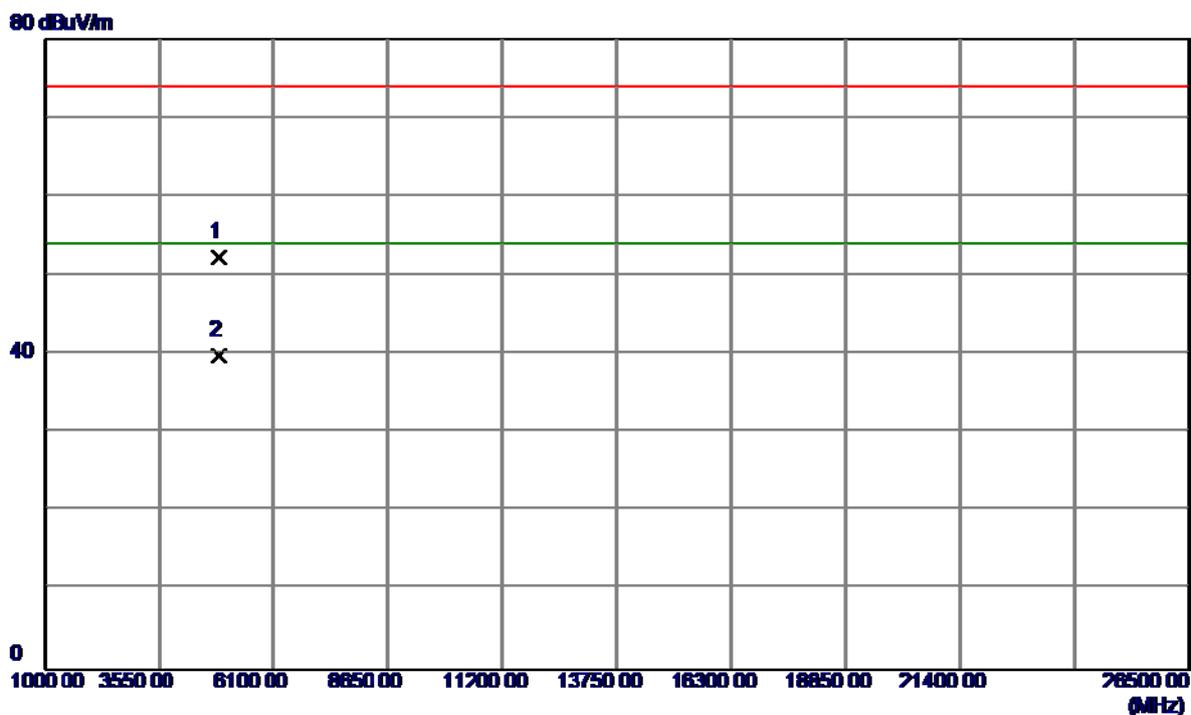

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4881.6500	48.25	4.04	52.29	74.00	-21.71	Peak	
2 *	4882.0500	35.82	4.05	39.87	54.00	-14.13	AVG	

Test Mode : TX 2441MHz _CH39_1Mbps


Horizontal

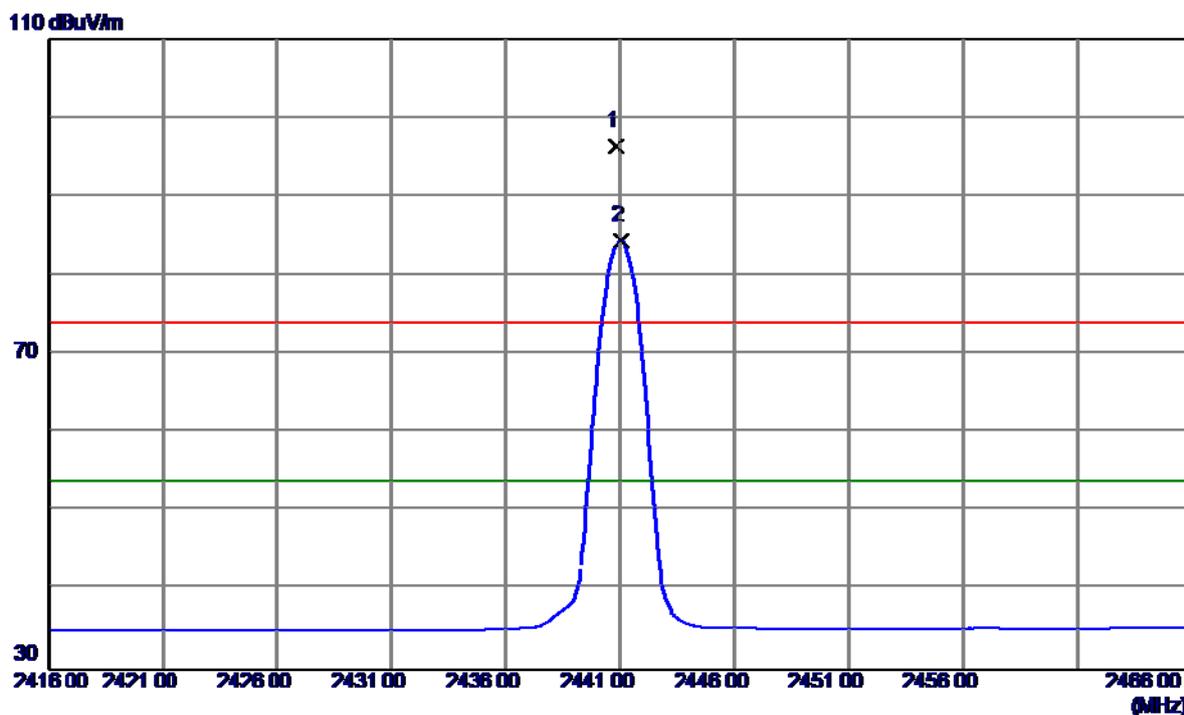

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2440.8250	63.28	33.05	96.33	74.00	22.33	Peak	NO LIMIT
2 *	2441.0500	51.36	33.05	84.41	54.00	30.41	AVG	NO LIMIT

Test Mode : TX 2441MHz _CH39_1Mbps


Horizontal

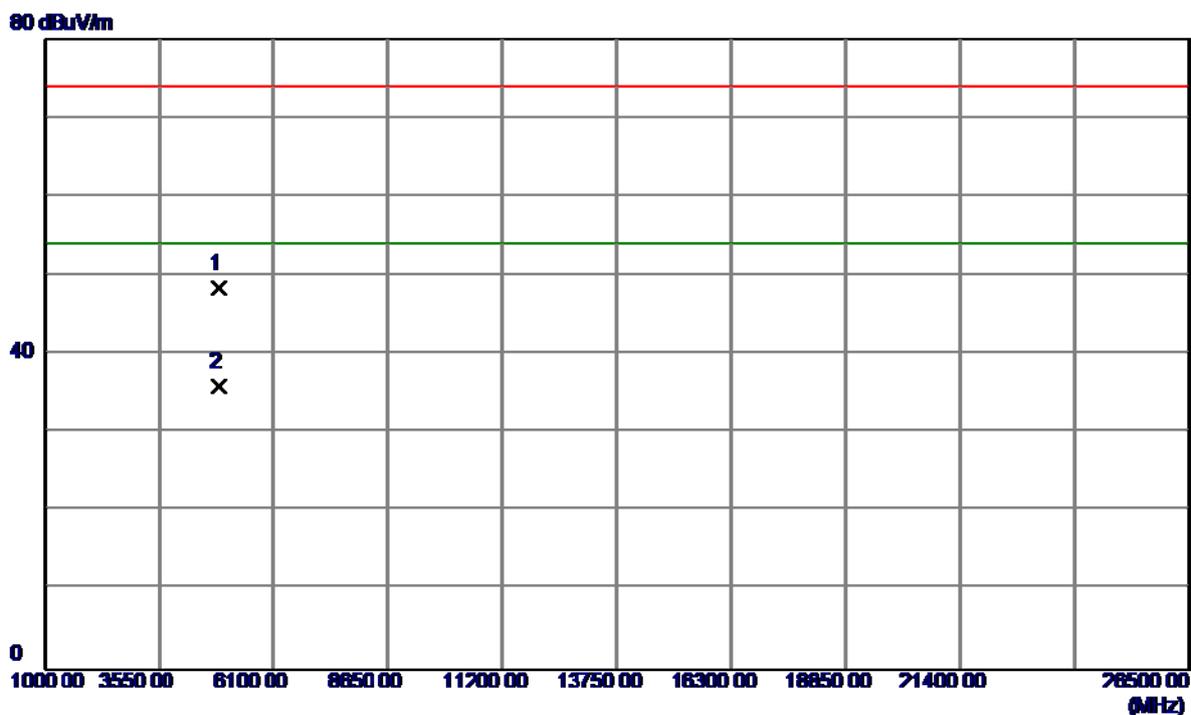

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4881.7250	44.34	4.04	48.38	74.00	-25.62	Peak	
2 *	4882.0250	31.83	4.05	35.88	54.00	-18.12	AVG	

Test Mode : TX 2480MHz _CH78_1Mbps


Vertical

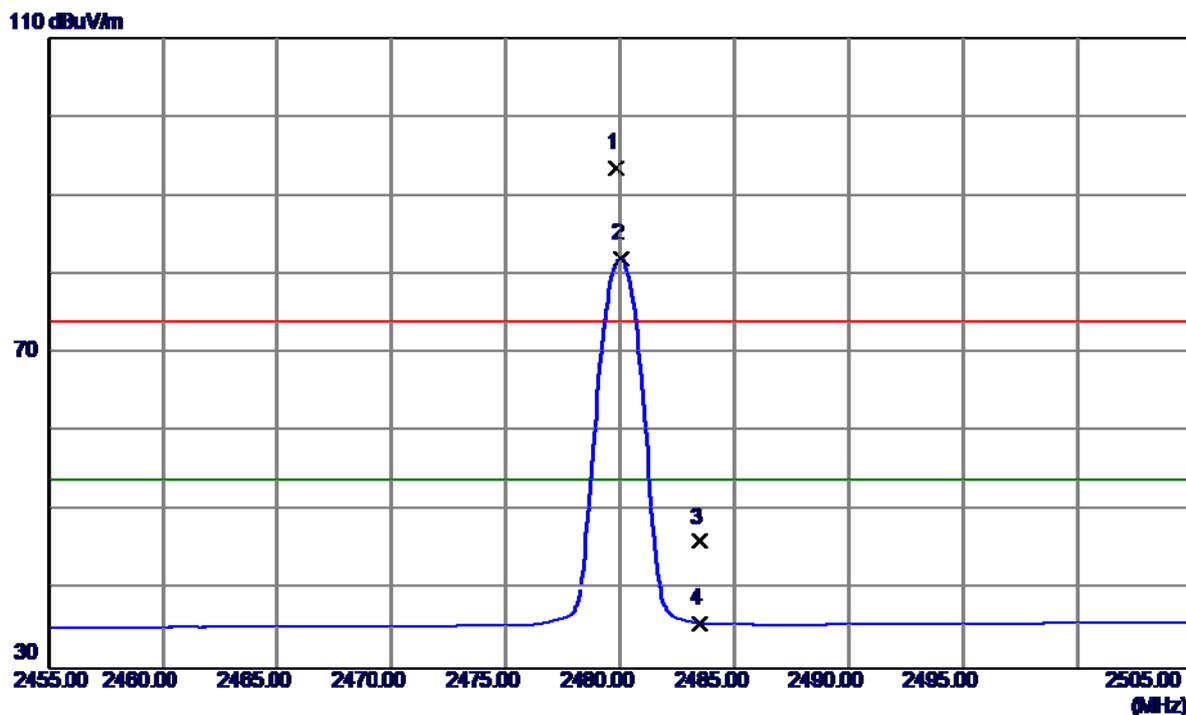

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2479.8250	60.27	33.26	93.53	74.00	19.53	Peak	NO LIMIT
2 *	2480.0500	48.81	33.26	82.07	54.00	28.07	AVG	NO LIMIT
3	2483.5000	12.80	33.28	46.08	74.00	-27.92	Peak	
4	2483.5000	2.53	33.28	35.81	54.00	-18.19	AVG	

Test Mode : TX 2480MHz _CH78_1Mbps


Vertical

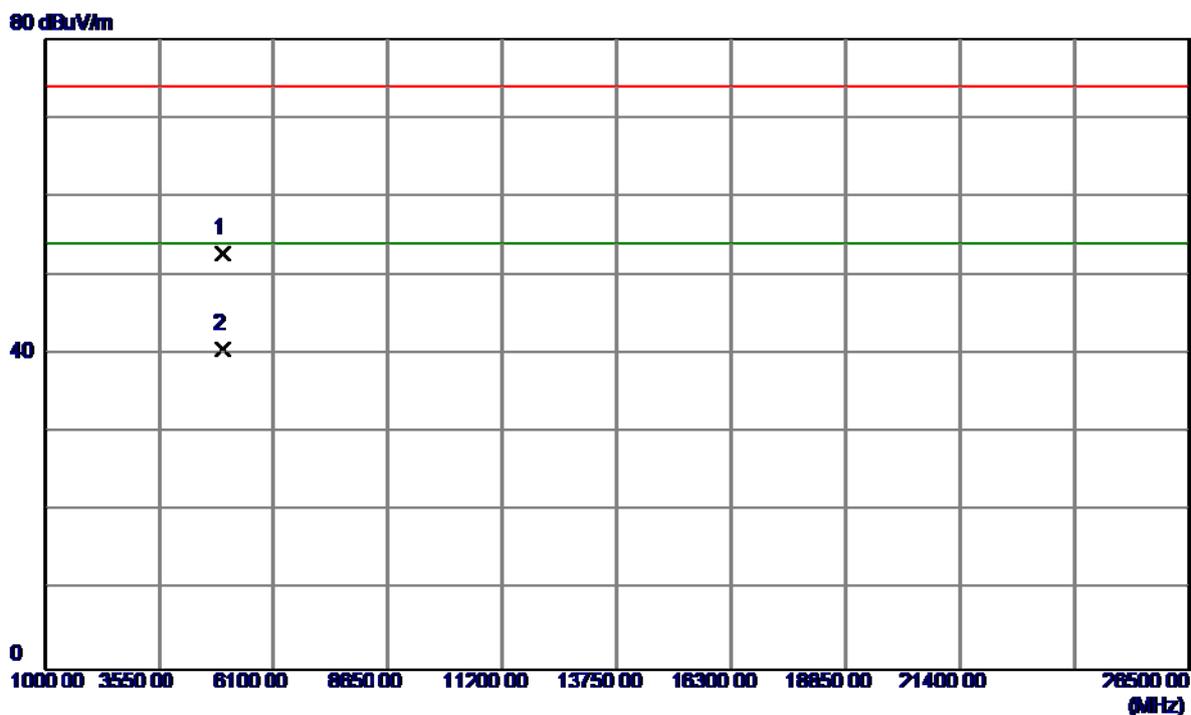

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4959.6250	48.43	4.41	52.84	74.00	-21.16	Peak	
2 *	4960.0500	36.17	4.41	40.58	54.00	-13.42	AVG	

Test Mode : TX 2480MHz _CH78_1Mbps


Horizontal

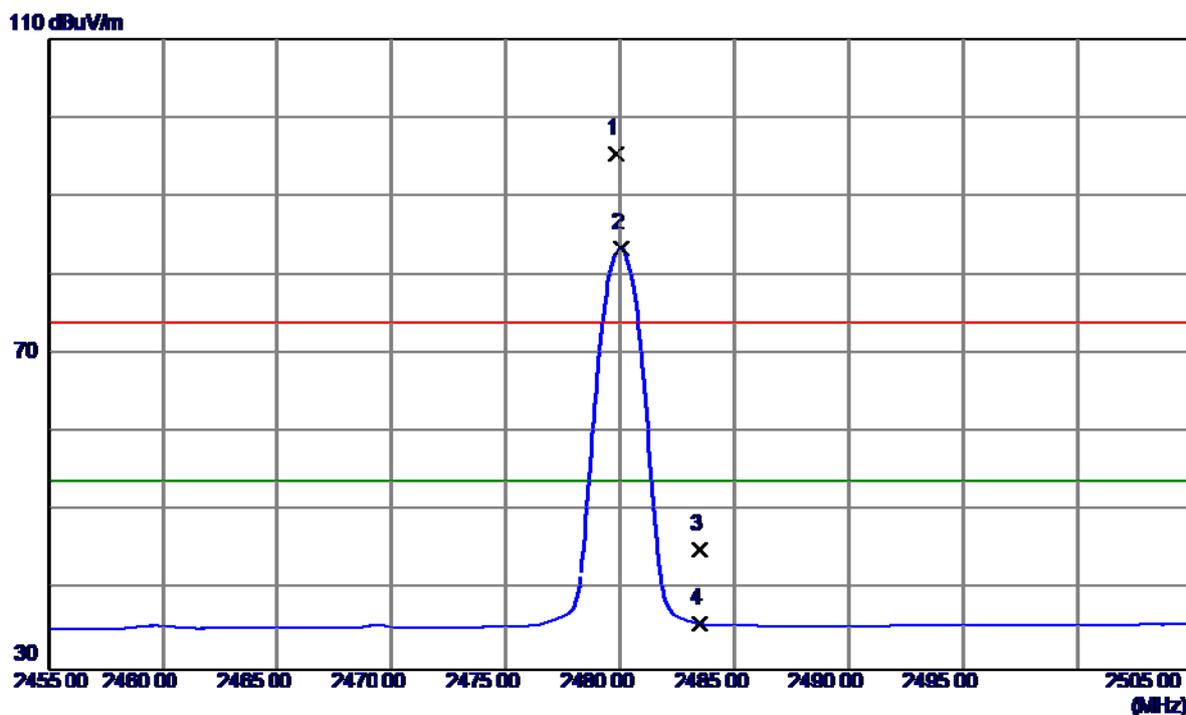

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2479.8250	62.17	33.26	95.43	74.00	21.43	Peak	NO LIMIT
2 *	2480.0500	50.21	33.26	83.47	54.00	29.47	AVG	NO LIMIT
3	2483.5000	11.95	33.28	45.23	74.00	-28.77	Peak	
4	2483.5000	2.47	33.28	35.75	54.00	-18.25	AVG	

Test Mode : TX 2480MHz _CH78_1Mbps

Horizontal

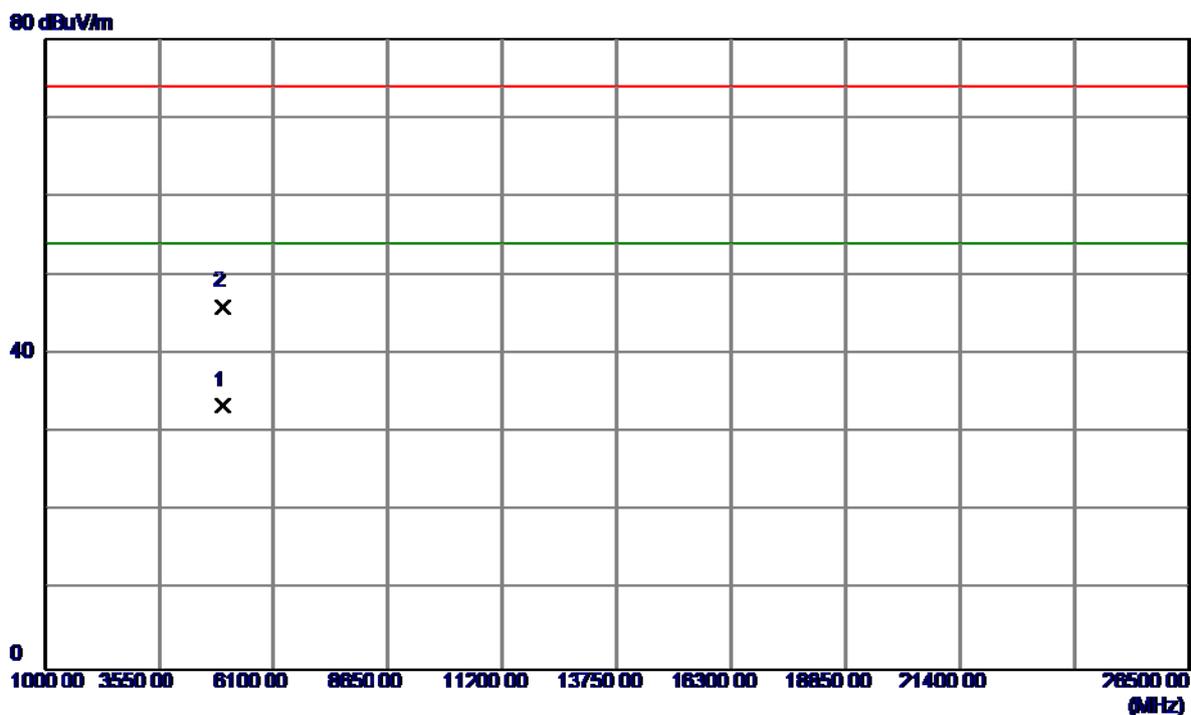


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4960.0500	29.09	4.41	33.50	54.00	-20.50	AVG	
2	4960.2500	41.59	4.41	46.00	74.00	-28.00	Peak	

Test Mode : TX 2402MHz _CH00_3Mbps

Vertical


110 dBuV/m

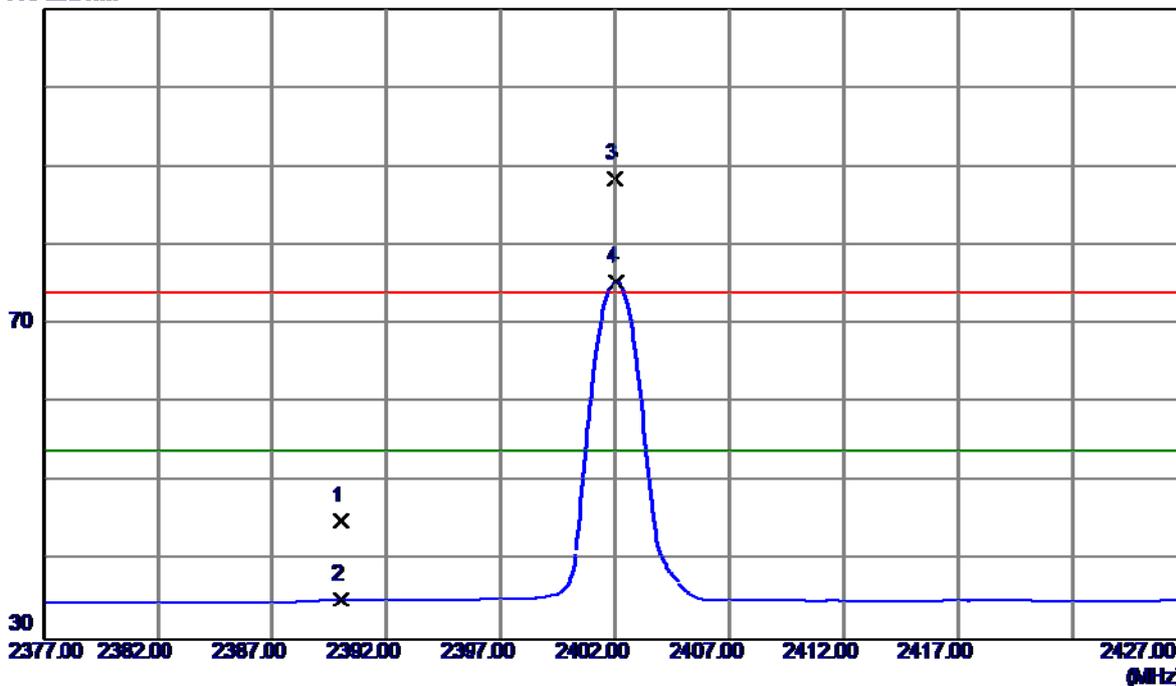

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	12.31	32.78	45.09	74.00	-28.91	Peak	
2	2390.0000	2.35	32.78	35.13	54.00	-18.87	AVG	
3	2402.0000	55.72	32.84	88.56	74.00	14.56	Peak	NO LIMIT
4 *	2402.0500	42.65	32.84	75.49	54.00	21.49	AVG	NO LIMIT

Test Mode : TX 2402MHz _CH00_3Mbps


Vertical

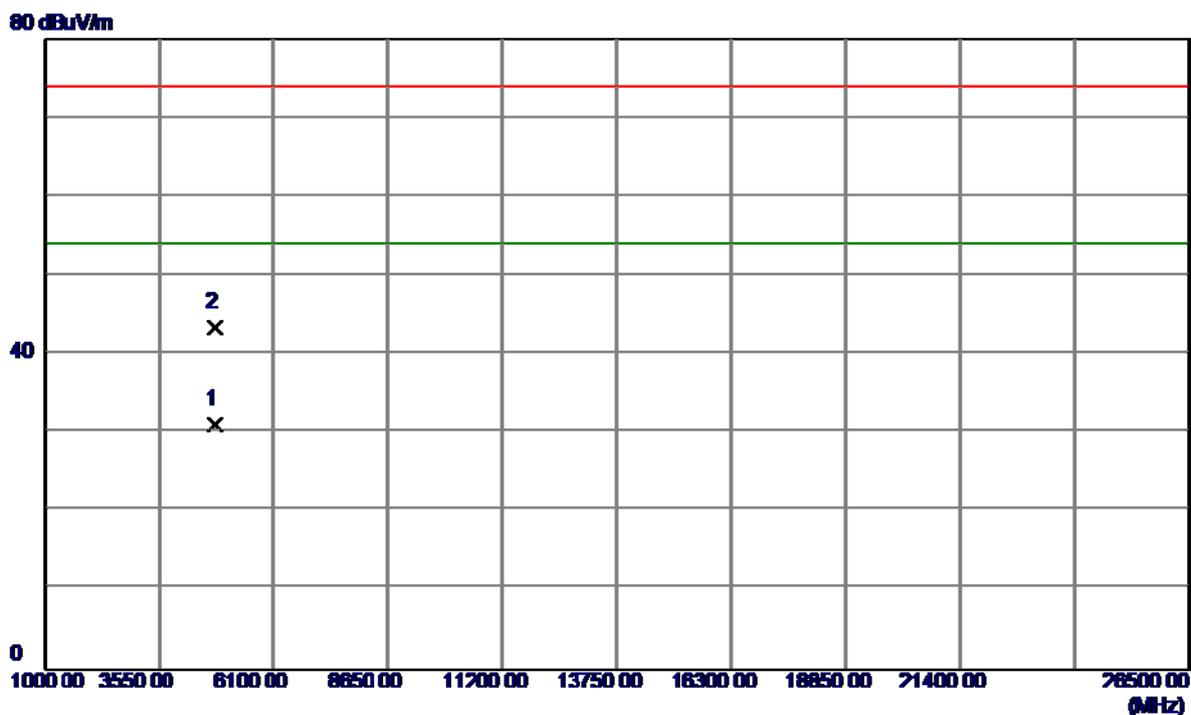

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4804.0000	27.40	3.68	31.08	54.00	-22.92	AVG	
2	4804.0200	39.62	3.68	43.30	74.00	-30.70	Peak	

Test Mode : TX 2402MHz _CH00_3Mbps


Horizontal

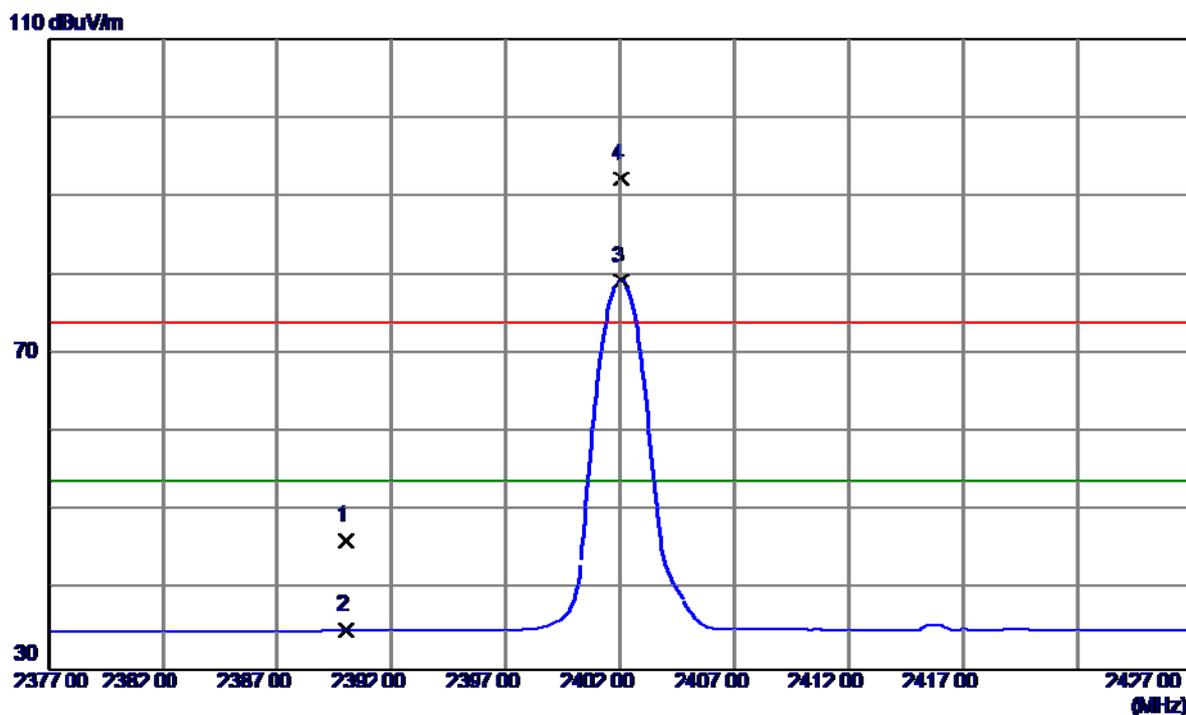

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	13.52	32.78	46.30	74.00	-27.70	Peak	
2	2390.0000	2.14	32.78	34.92	54.00	-19.08	AVG	
3 *	2402.0500	46.48	32.84	79.32	54.00	25.32	AVG	NO LIMIT
4	2402.0750	59.47	32.84	92.31	74.00	18.31	Peak	NO LIMIT

Test Mode : TX 2402MHz _CH00_3Mbps


Horizontal

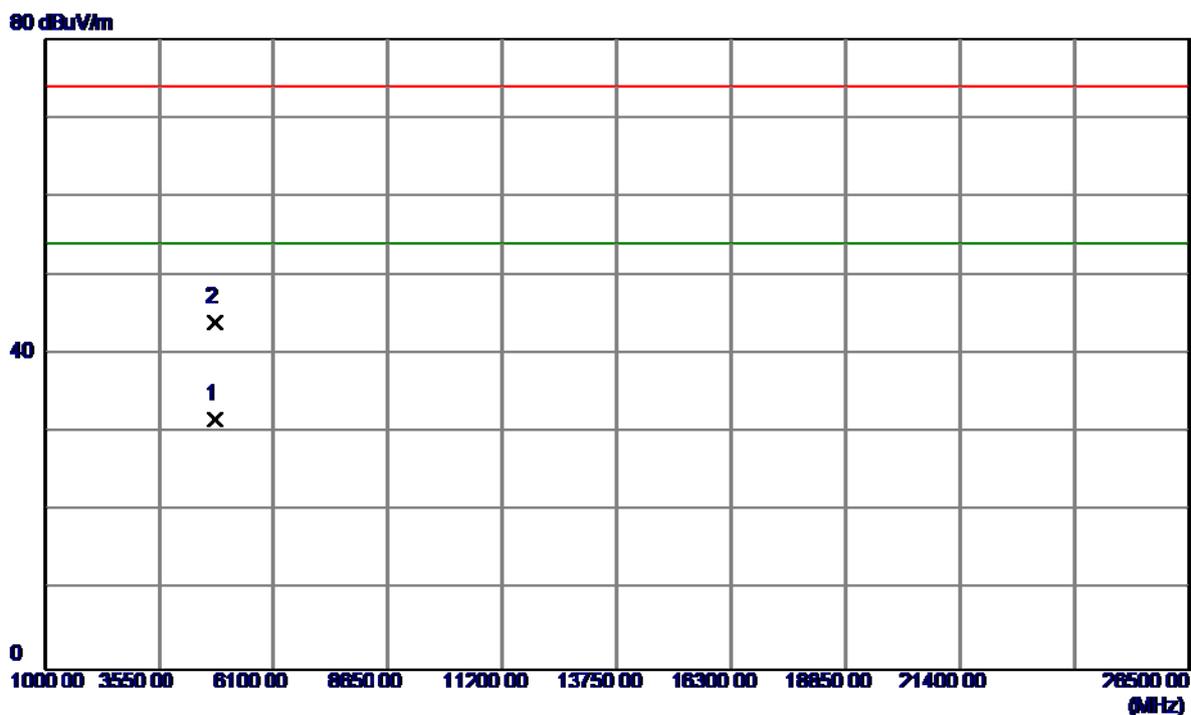

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4804.0299	27.97	3.68	31.65	54.00	-22.35	AVG	
2	4804.3430	40.34	3.68	44.02	74.00	-29.98	Peak	

Test Mode : TX 2441MHz _CH39_3Mbps


Vertical

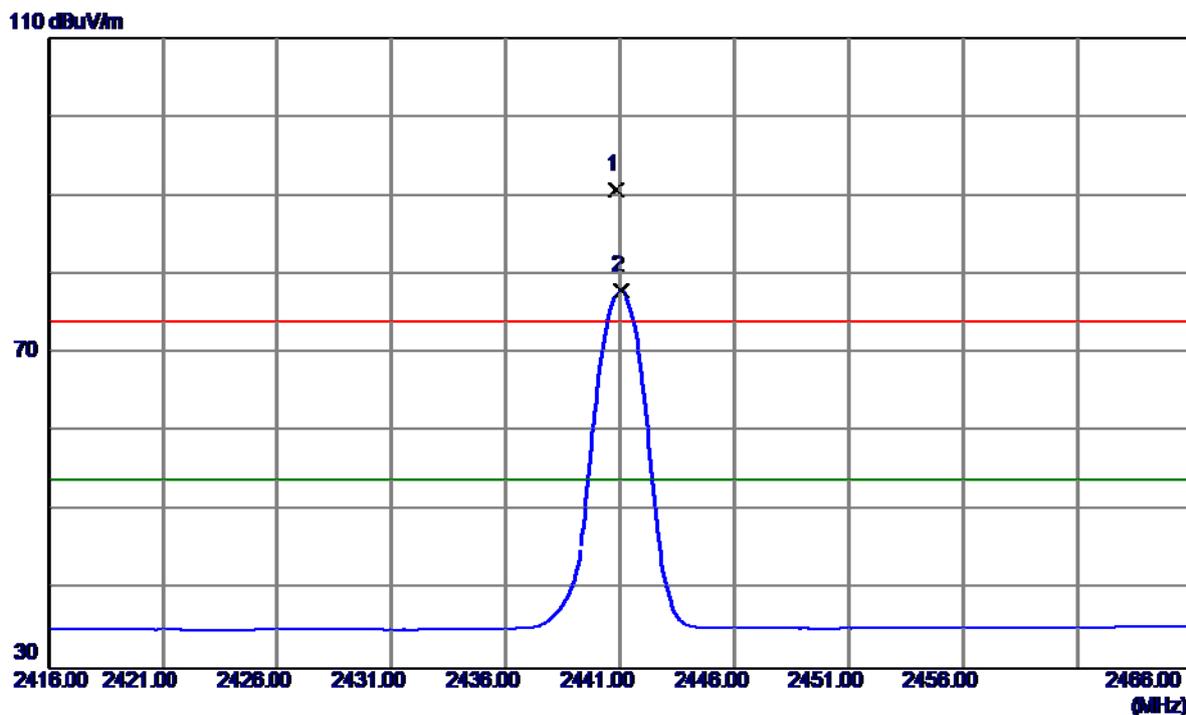

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2440.8250	57.73	33.05	90.78	74.00	16.78	Peak	NO LIMIT
2 *	2441.0500	44.91	33.05	77.96	54.00	23.96	AVG	NO LIMIT

Test Mode : TX 2441MHz _CH39_3Mbps


Vertical

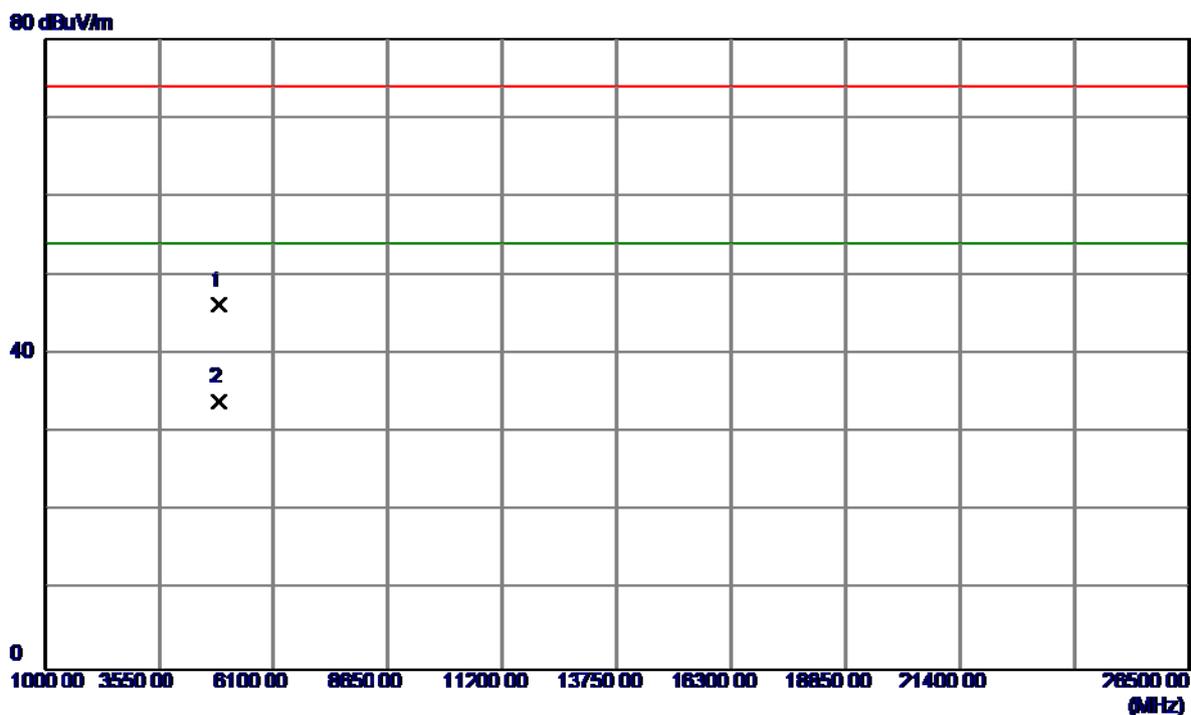

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4881.6669	42.12	4.04	46.16	74.00	-27.84	Peak	
2 *	4881.9800	29.83	4.05	33.88	54.00	-20.12	AVG	

Test Mode : TX 2441MHz _CH39_3Mbps


Horizontal

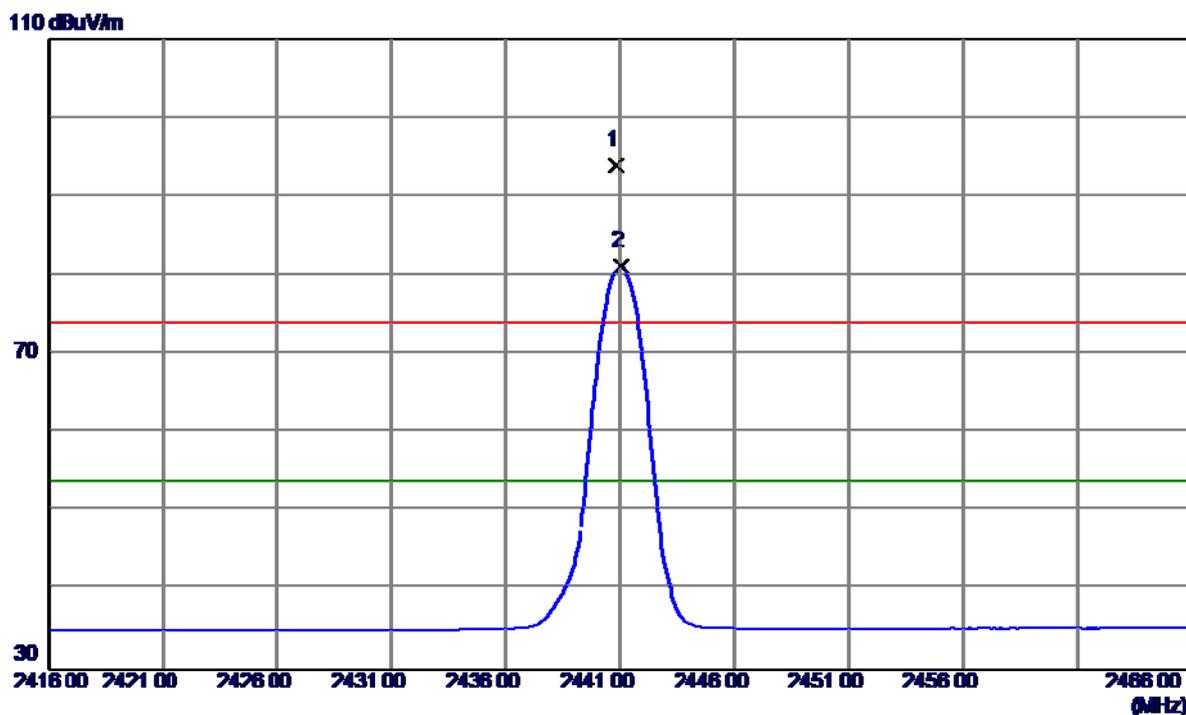

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2440.8250	60.94	33.05	93.99	74.00	19.99	Peak	NO LIMIT
2 *	2441.0500	48.10	33.05	81.15	54.00	27.15	AVG	NO LIMIT

Test Mode : TX 2441MHz _CH39_3Mbps

Horizontal

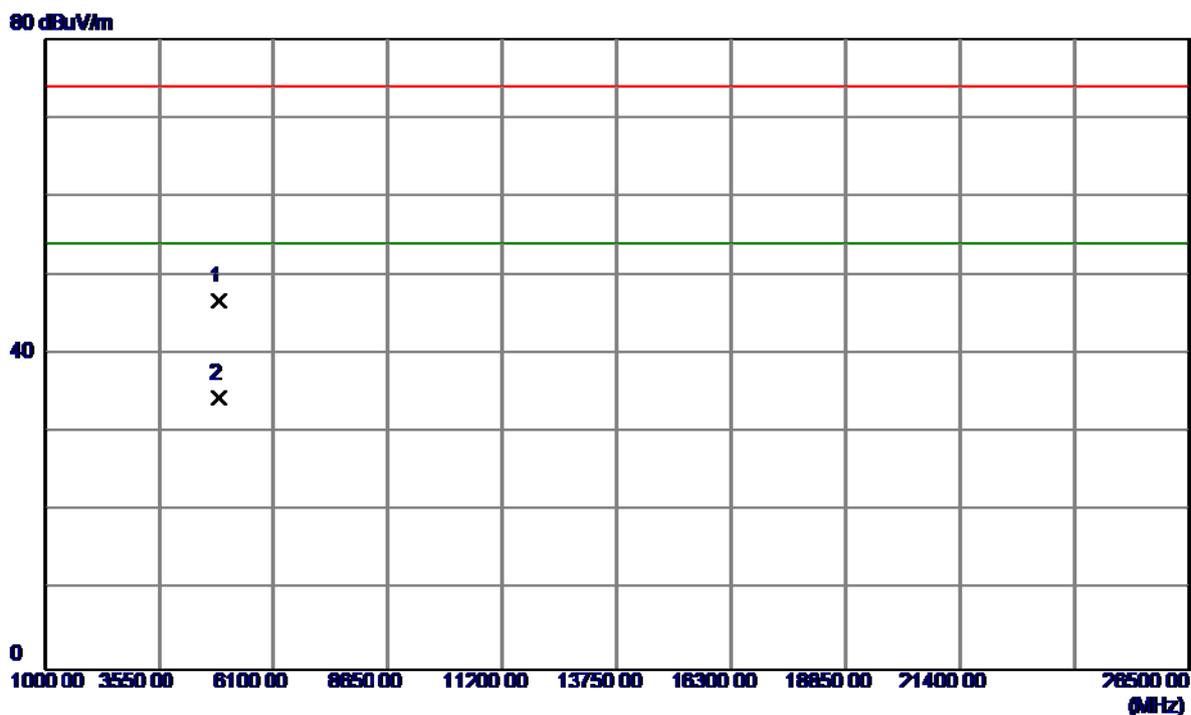


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4881.6260	42.69	4.04	46.73	74.00	-27.27	Peak	
2 *	4881.9900	30.32	4.05	34.37	54.00	-19.63	AVG	

Test Mode : TX 2480MHz _CH78_3Mbps

Vertical


110 dBuV/m

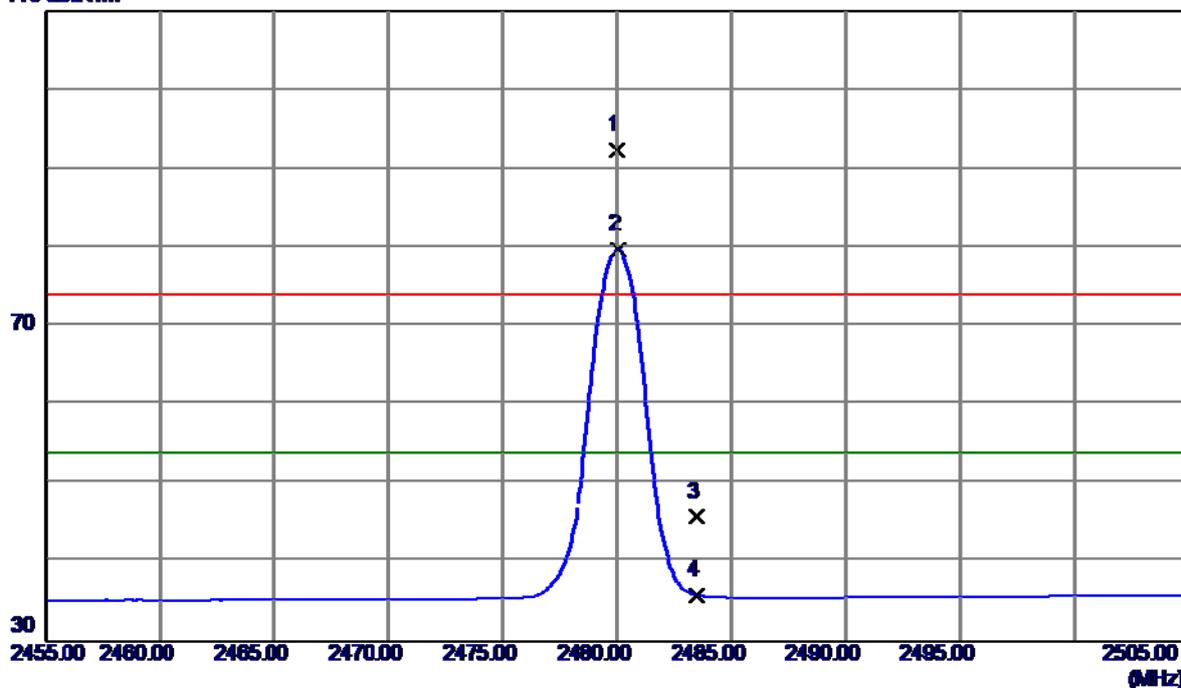

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2479.9750	59.11	33.26	92.37	74.00	18.37	Peak	NO LIMIT
2 *	2480.0500	46.48	33.26	79.74	54.00	25.74	AVG	NO LIMIT
3	2483.5000	12.54	33.28	45.82	74.00	-28.18	Peak	
4	2483.5000	2.65	33.28	35.93	54.00	-18.07	AVG	

Test Mode : TX 2480MHz _CH78_3Mbps


Vertical

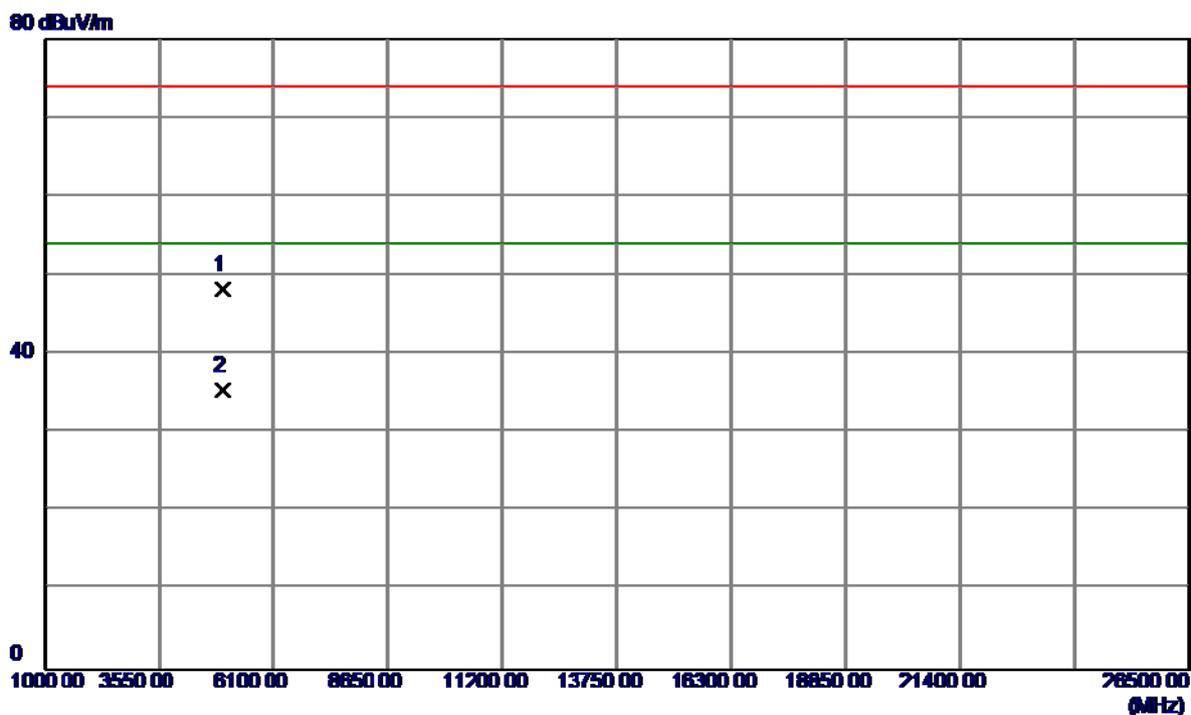

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4959.7170	43.80	4.41	48.21	74.00	-25.79	Peak	
2 *	4959.9900	30.90	4.41	35.31	54.00	-18.69	AVG	

Test Mode : TX 2480MHz _CH78_3Mbps


Horizontal

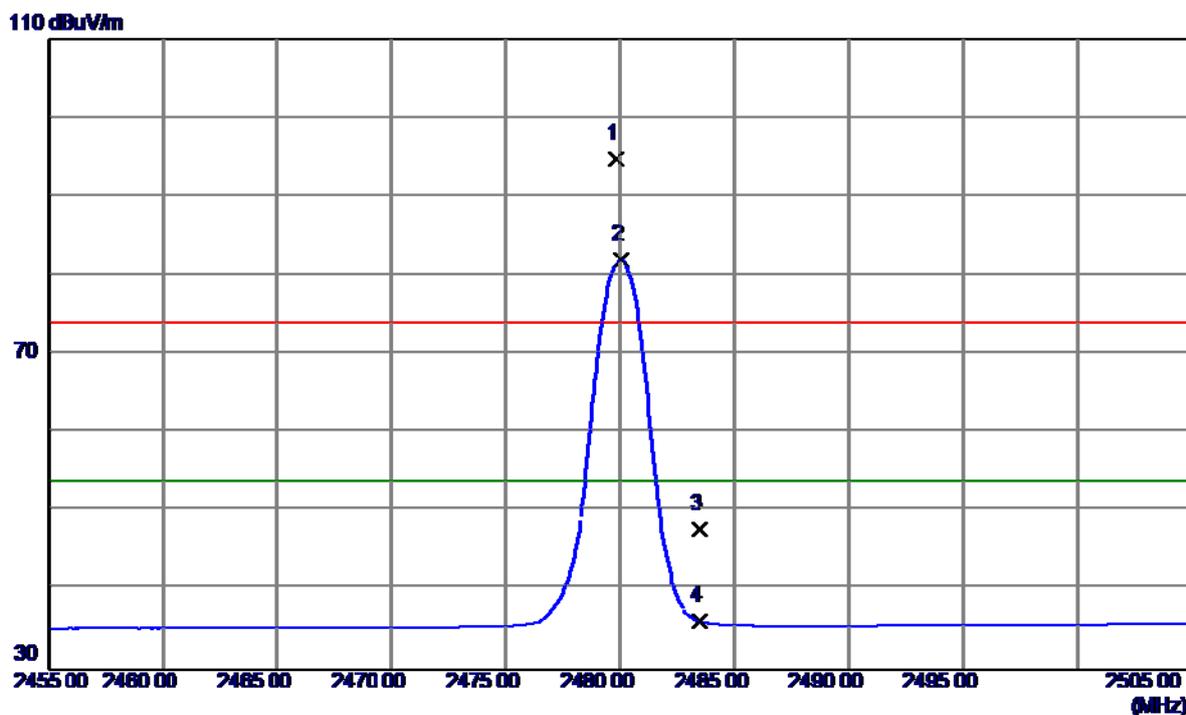

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2479.8250	61.55	33.26	94.81	74.00	20.81	Peak	NO LIMIT
2 *	2480.0500	48.77	33.26	82.03	54.00	28.03	AVG	NO LIMIT
3	2483.5000	14.43	33.28	47.71	74.00	-26.29	Peak	
4	2483.5000	2.74	33.28	36.02	54.00	-17.98	AVG	

Test Mode : TX 2480MHz _CH78_3Mbps

Horizontal

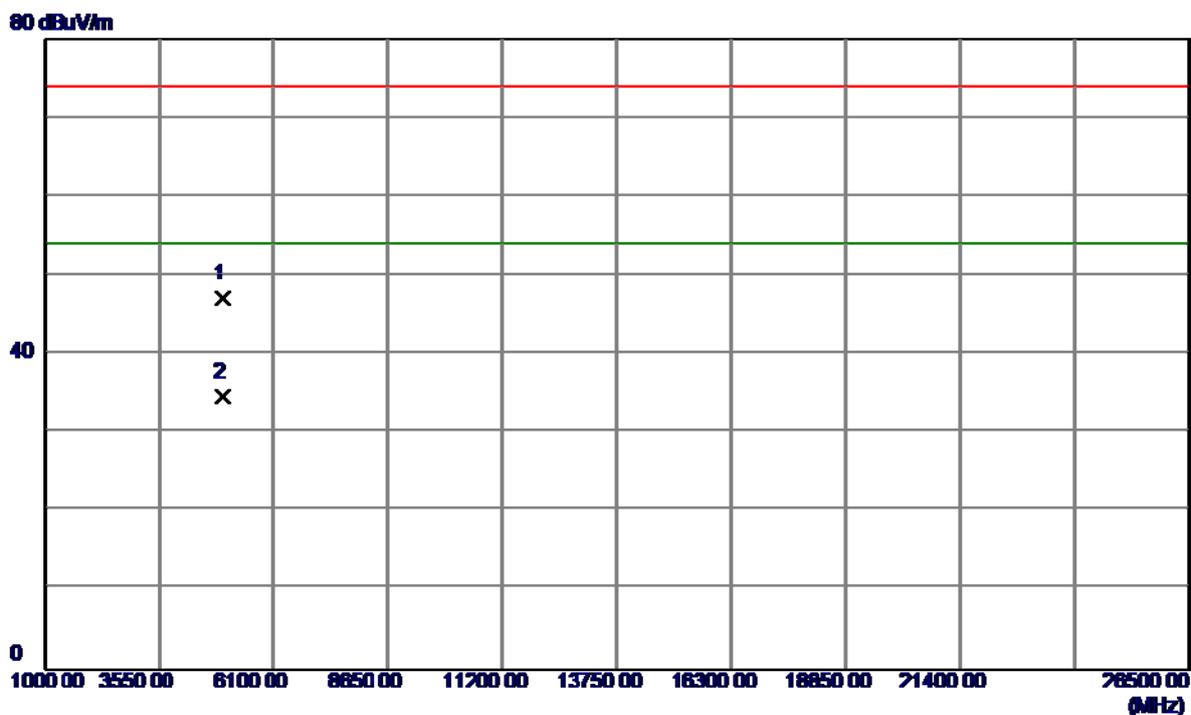

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4959.6460	42.57	4.41	46.98	74.00	-27.02	Peak	
2 *	4959.9900	30.15	4.41	34.56	54.00	-19.44	AVG	


ATTACHMENT E - NUMBER OF HOPPING CHANNEL

Test Mode

Hopping Mode_1Mbps

Number of Hopping Channel

79

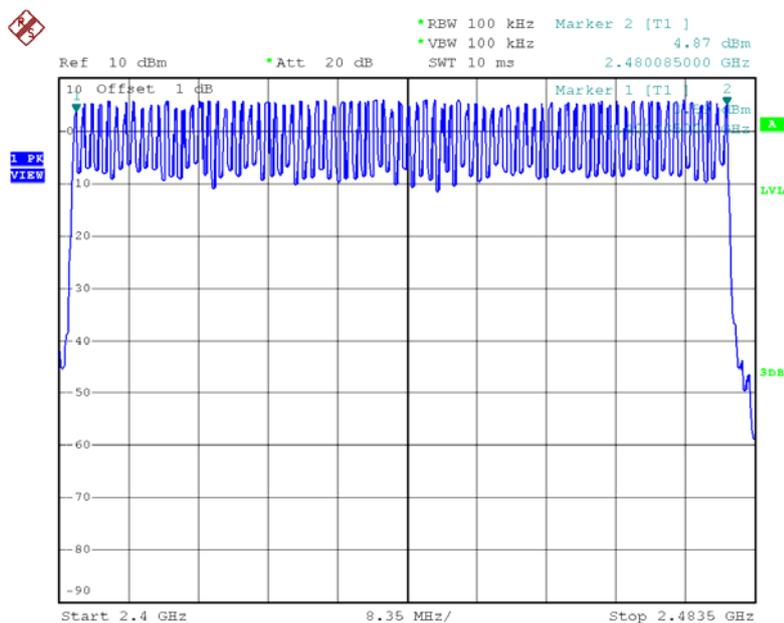


Date: 19.MAY.2016 10:31:21

Test Mode

Hopping Mode_3Mbps

Number of Hopping Channel

79

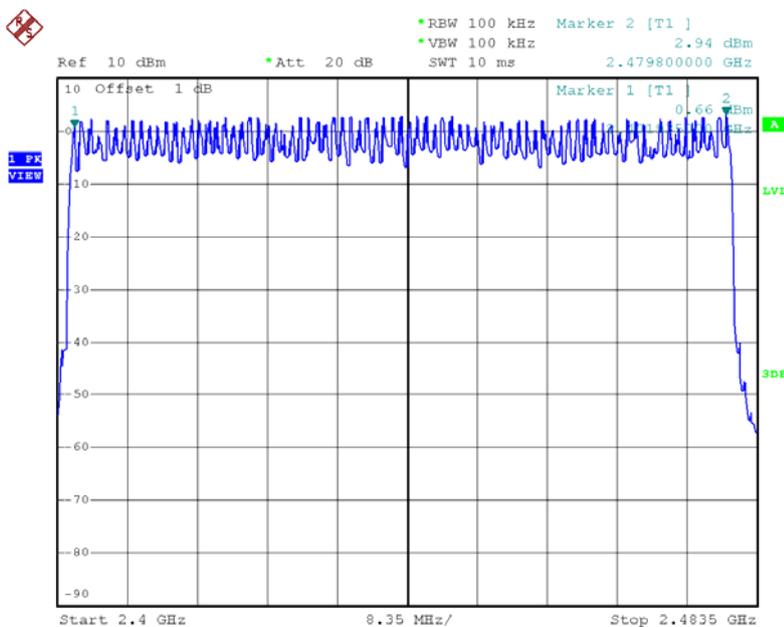


Date: 19.MAY.2016 10:44:16

ATTACHMENT F - AVERAGE TIME OF OCCUPANCY

Test Mode :	TX Mode_1Mbps
-------------	---------------


Data Packet	Frequency (MHz)	Pulse Duration (ms)	Dwell Time (s)	Limits (s)	Test Result
DH5	2402	2.9200	0.3115	0.4000	Pass
DH3	2402	1.6600	0.1771	0.4000	Pass
DH1	2402	0.3900	0.0416	0.4000	Pass
DH5	2441	2.8800	0.3072	0.4000	Pass
DH3	2441	1.6600	0.1771	0.4000	Pass
DH1	2441	0.3900	0.0416	0.4000	Pass
DH5	2480	2.9200	0.3115	0.4000	Pass
DH3	2480	1.6600	0.1771	0.4000	Pass
DH1	2480	0.3950	0.0421	0.4000	Pass

CH00-DH5

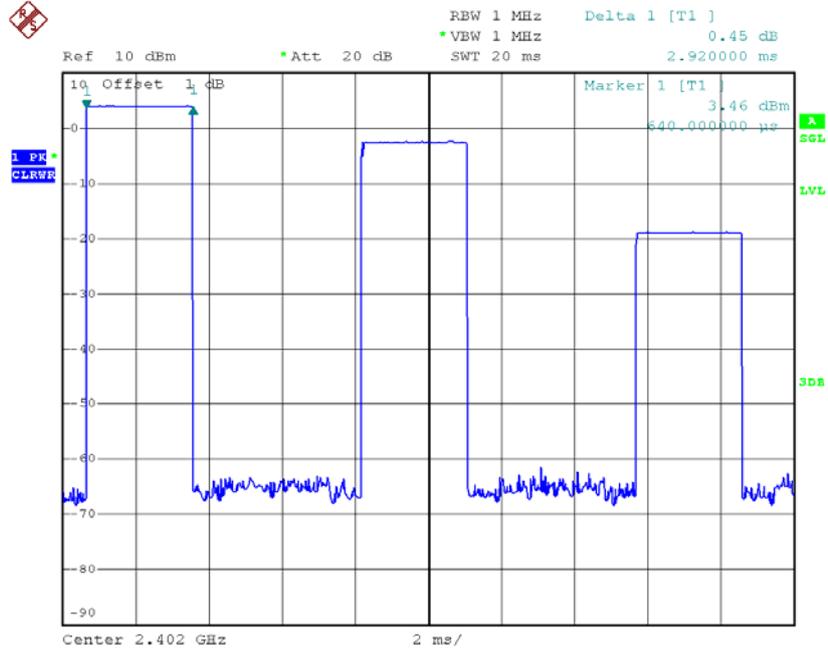


Date: 19.MAY.2016 10:35:04

CH39-DH1

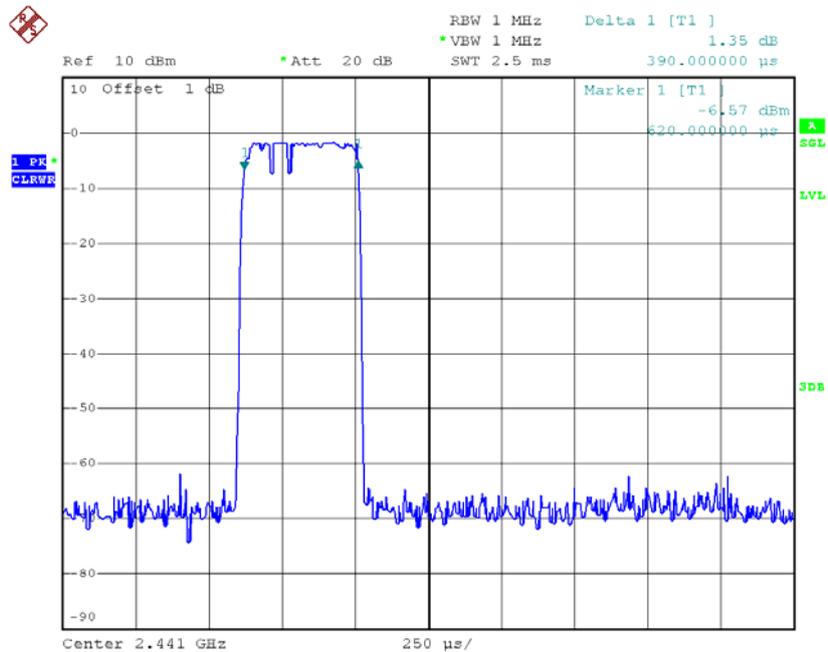


Date: 19.MAY.2016 10:24:44

CH39-DH3

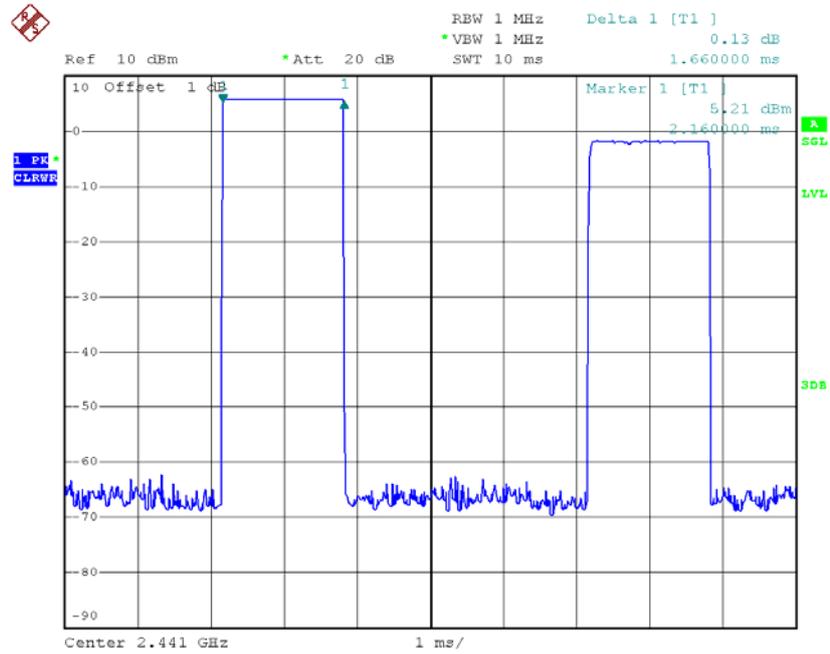


Date: 19.MAY.2016 10:34:41

CH39-DH5

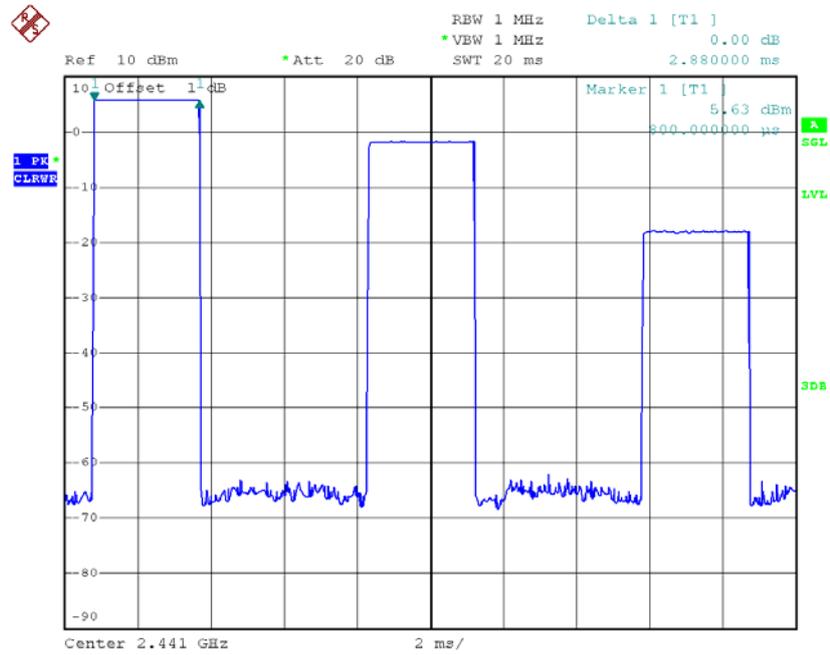


Date: 19.MAY.2016 10:35:11

CH78-DH1

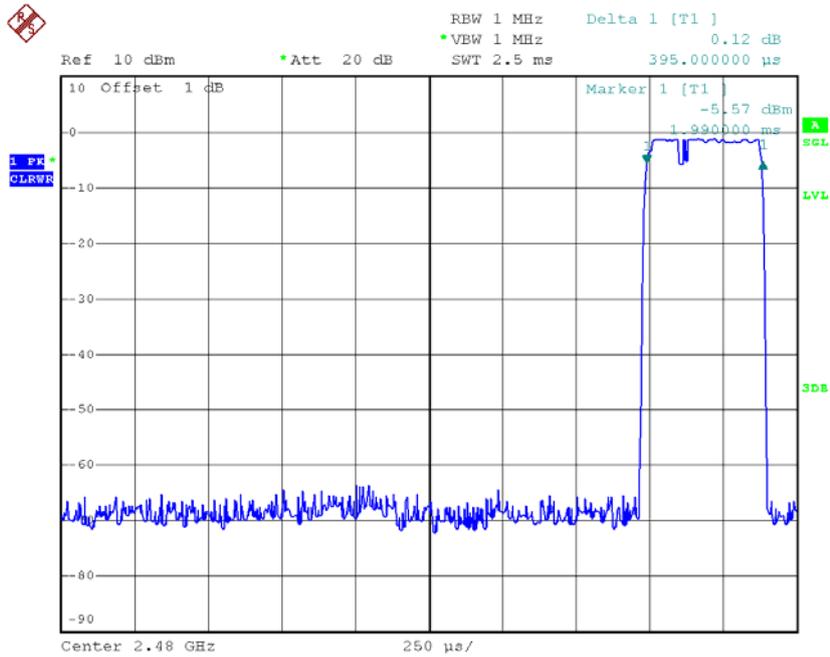


Date: 19.MAY.2016 10:24:52

CH78-DH3

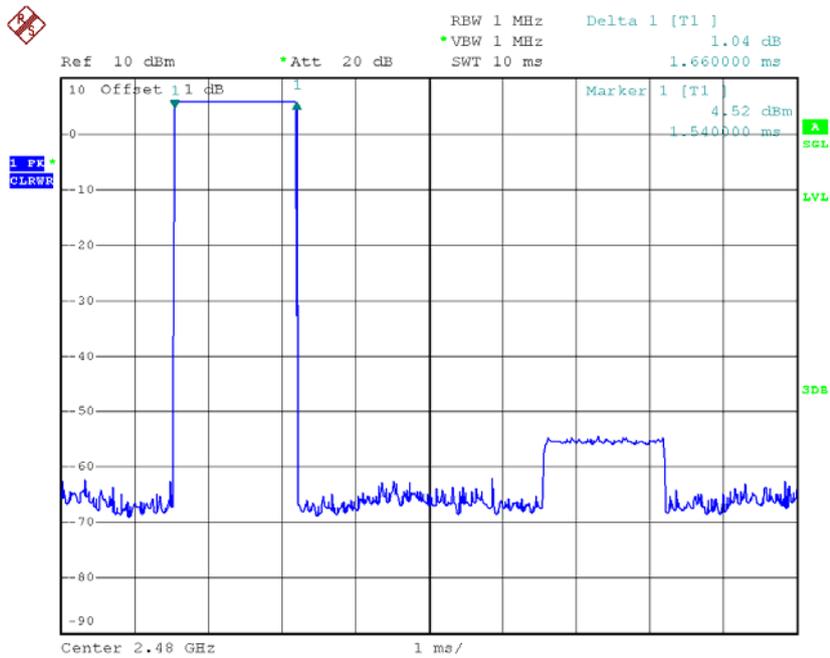

Date: 19.MAY.2016 10:34:45

CH78-DH5

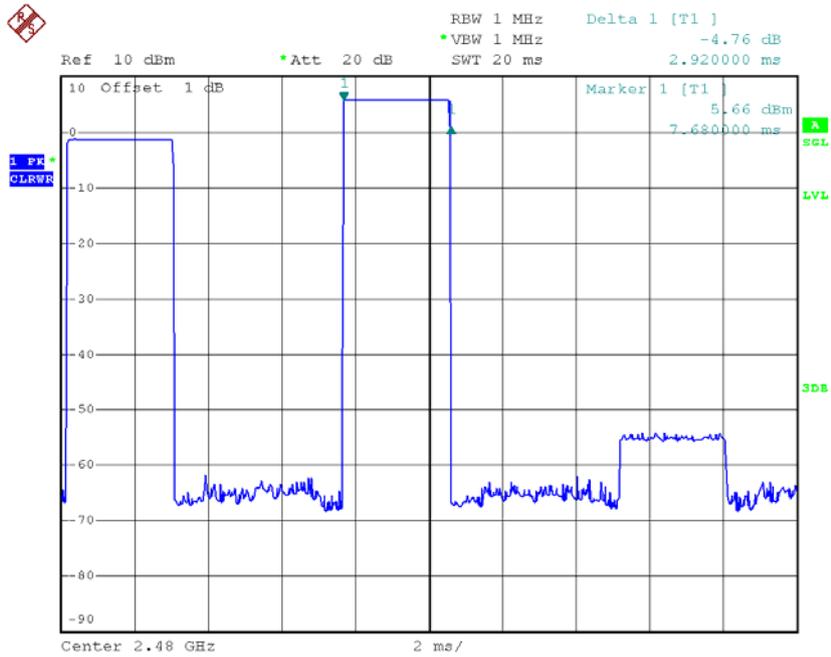


Date: 19.MAY.2016 10:35:20

Test Mode :	TX Mode_3Mbps
-------------	---------------


Data Packet	Frequency	Pulse Duration(ms)	Dwell Time(s)	Limits(s)	Test Result
DH5	2402	2.9200	0.3115	0.4000	Pass
DH3	2402	1.6600	0.1771	0.4000	Pass
DH1	2402	0.4100	0.0437	0.4000	Pass
DH5	2441	2.9200	0.3115	0.4000	Pass
DH3	2441	1.6400	0.1749	0.4000	Pass
DH1	2441	0.4000	0.0427	0.4000	Pass
DH5	2480	2.9200	0.3115	0.4000	Pass
DH3	2480	1.6600	0.1771	0.4000	Pass
DH1	2480	0.4100	0.0437	0.4000	Pass

CH00-DH5

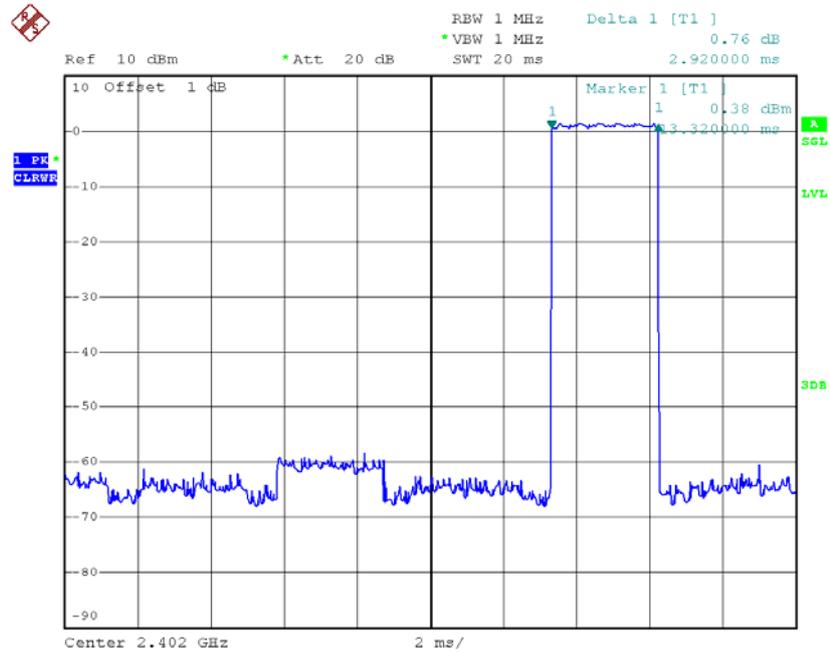


Date: 19.MAY.2016 10:46:35

CH39-DH1

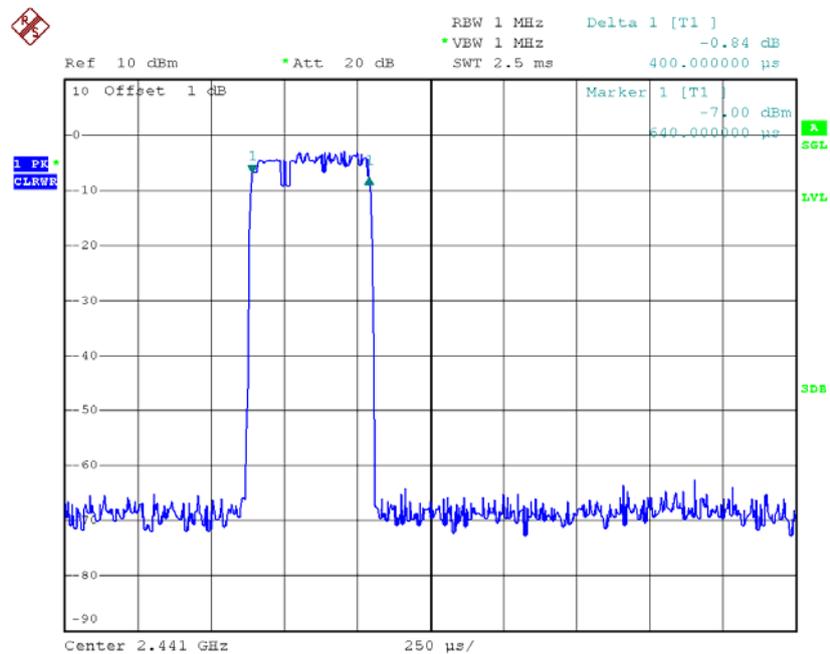


Date: 19.MAY.2016 10:38:55

CH78-DH1

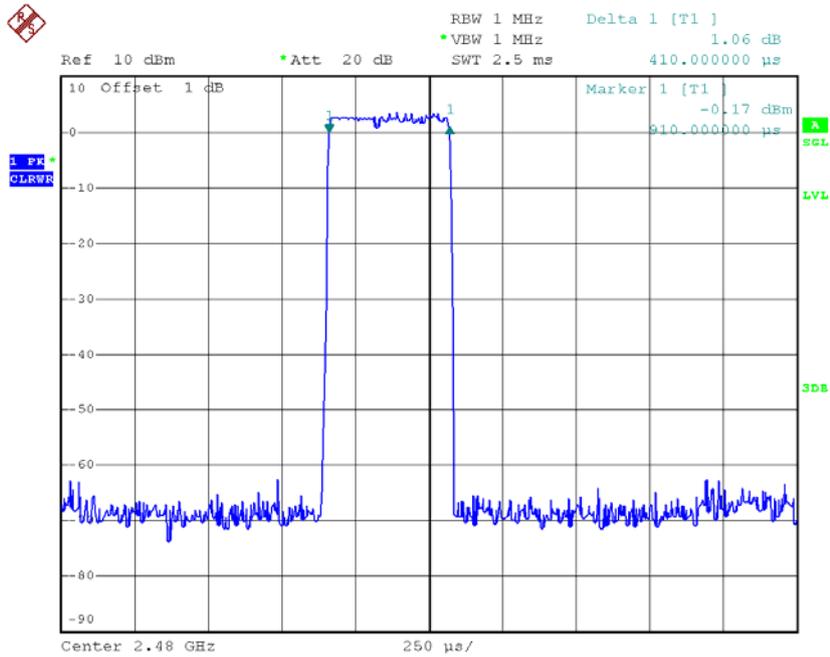


Date: 19.MAY.2016 10:39:02

CH78-DH3

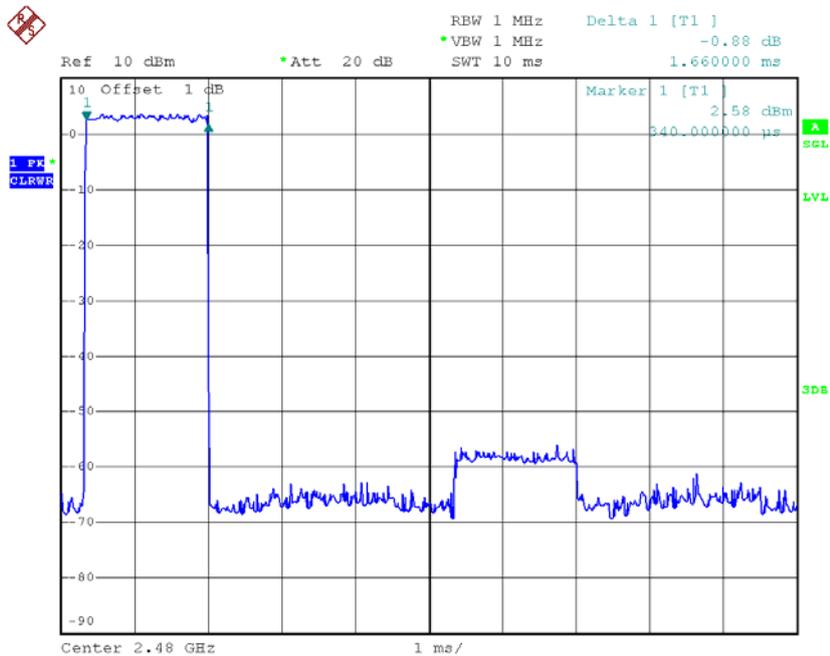

Date: 19.MAY.2016 10:46:17

CH78-DH5

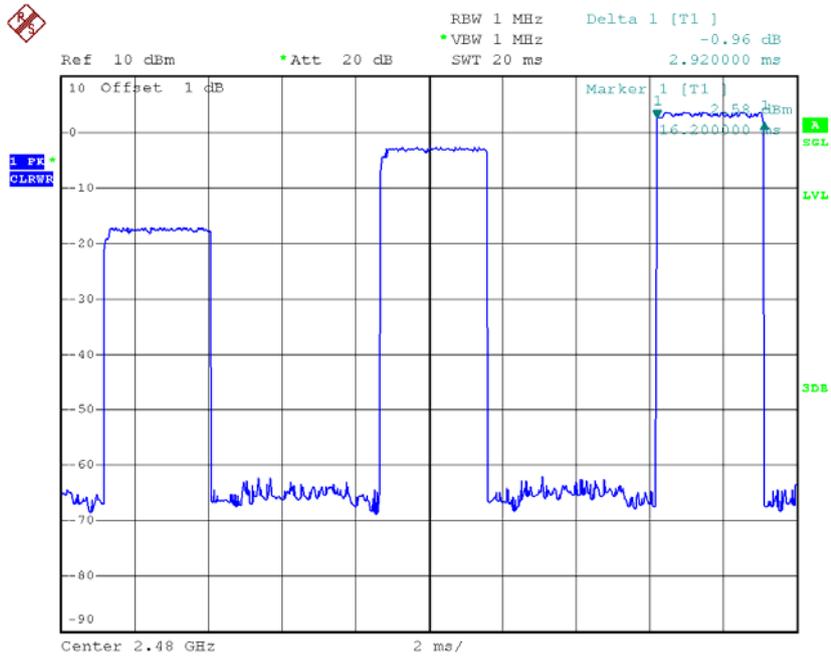


Date: 19.MAY.2016 10:46:46

ATTACHMENT G - HOPPING CHANNEL SEPARATION MEASUREMENT


Test Mode : Hopping on _1Mbps

Frequency (MHz)	Channel Separation (MHz)	2/3 of 20dB Bandwidth (MHz)	Test Result
2402	1.027	0.581	Pass
2441	0.995	0.613	Pass
2480	1.185	0.587	Pass

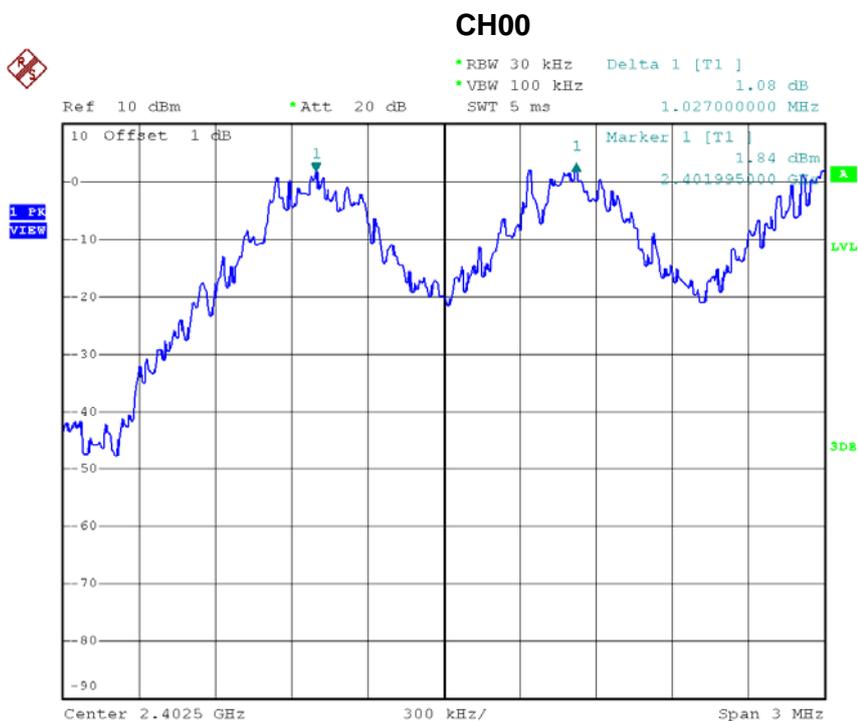


Date: 19.MAY.2016 10:26:01

CH39

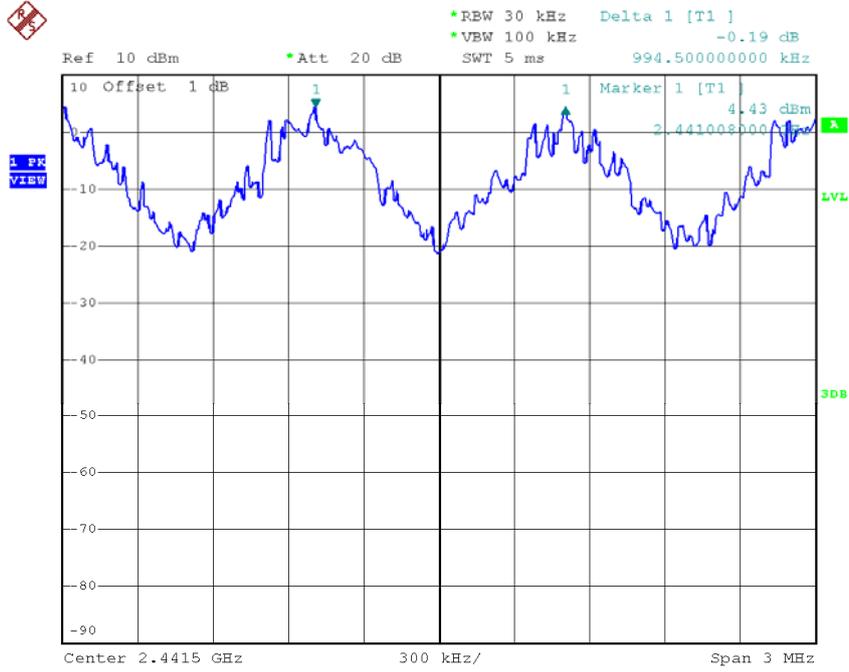

Date: 19.MAY.2016 10:28:25


CH78

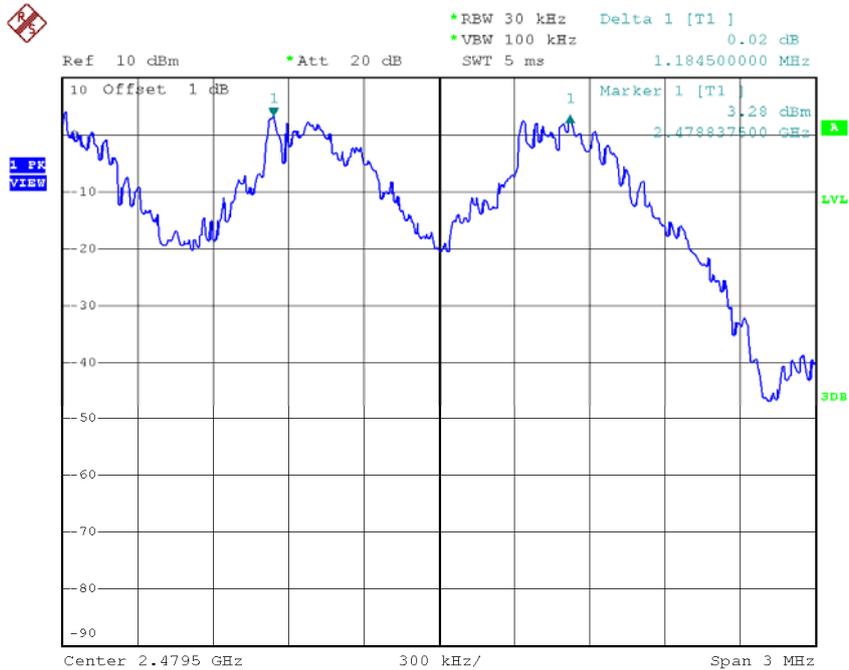

Date: 19.MAY.2016 10:29:33


Test Mode : Hopping on _3Mbps

Frequency (MHz)	Channel Separation (MHz)	2/3 of 20dB Bandwidth (MHz)	Test Result
2402	0.993	0.796	Pass
2441	1.006	0.801	Pass
2480	0.995	0.823	Pass

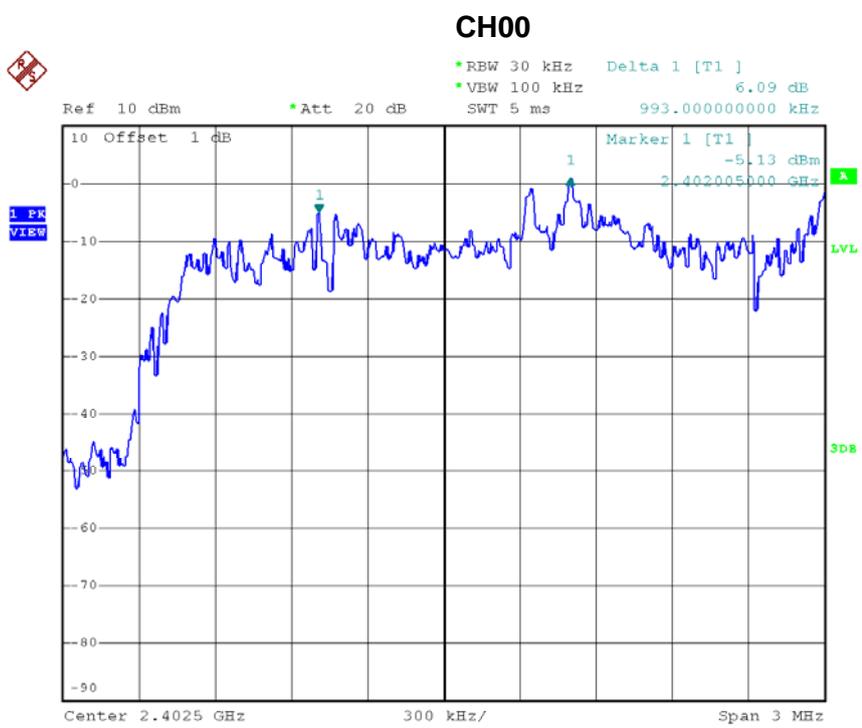


Date: 19.MAY.2016 10:40:11

CH39

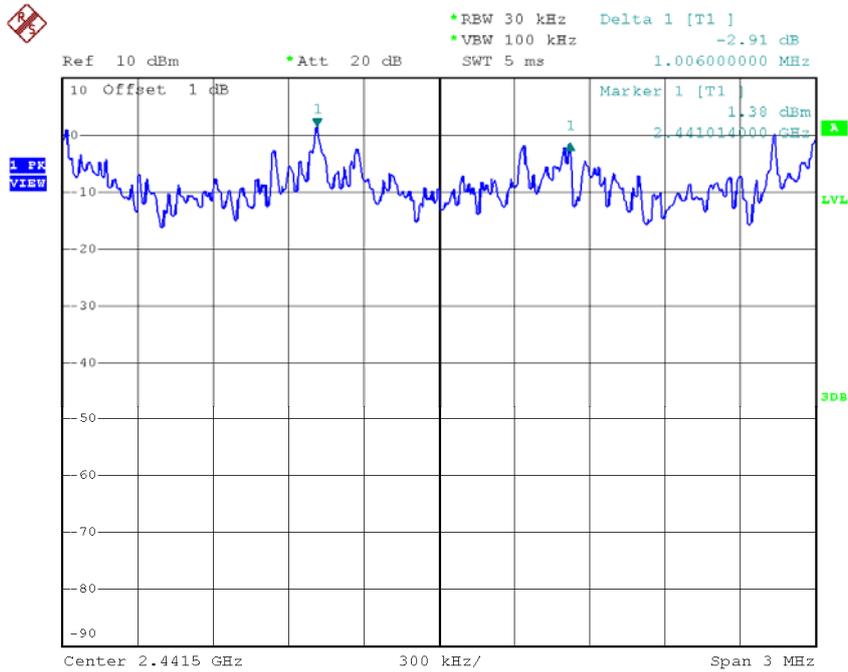

Date: 19.MAY.2016 10:41:20

CH78

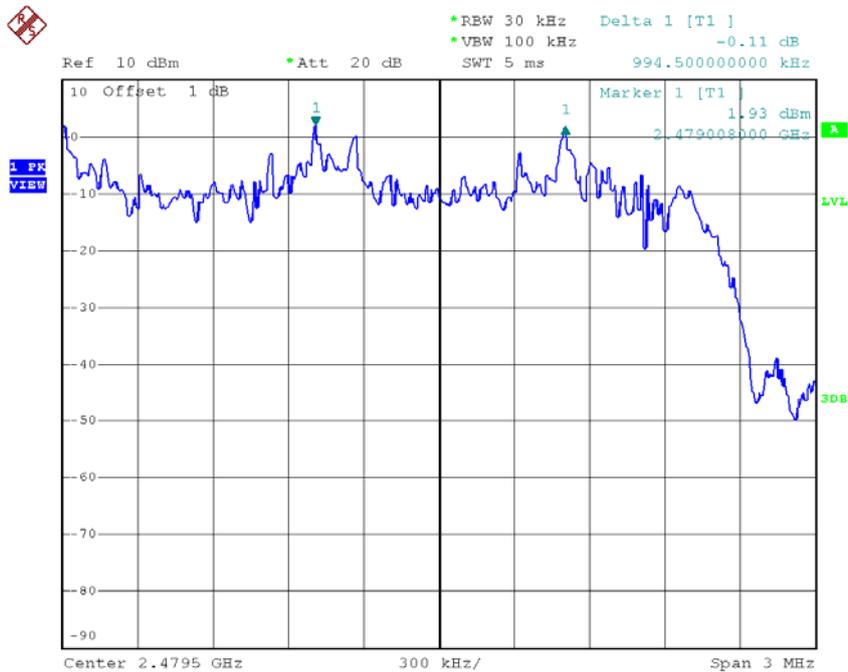


Date: 19.MAY.2016 10:42:28

ATTACHMENT H - BANDWIDTH


Test Mode : TX Mode _1Mbps

Frequency (MHz)	20dB Bandwidth (MHz)	99% Occupied BW (MHz)	Test Result
2402	0.872	0.840	Pass
2441	0.920	0.848	Pass
2480	0.880	0.860	Pass

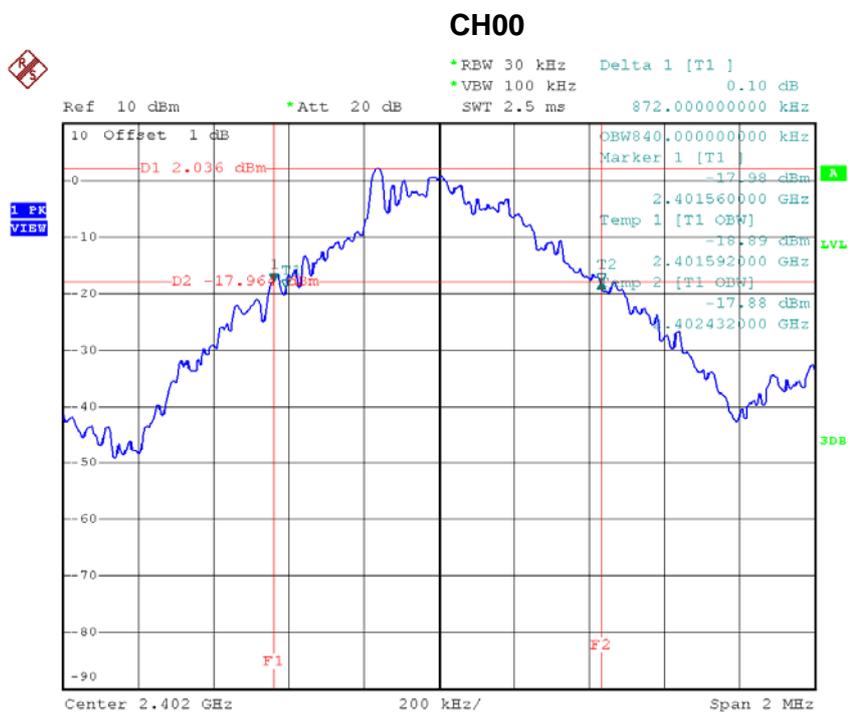


Date: 19.MAY.2016 10:21:41

CH39

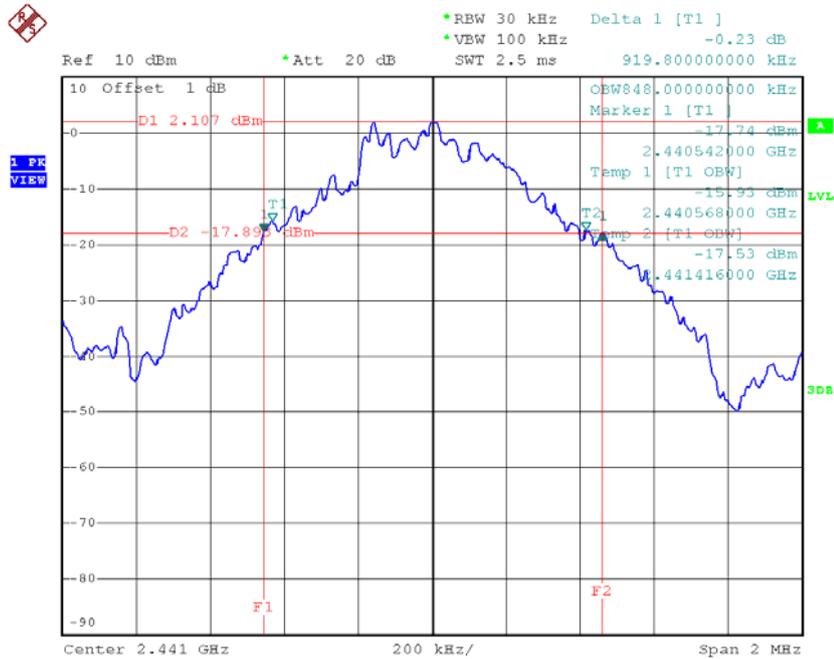

Date: 19.MAY.2016 10:22:57


CH78

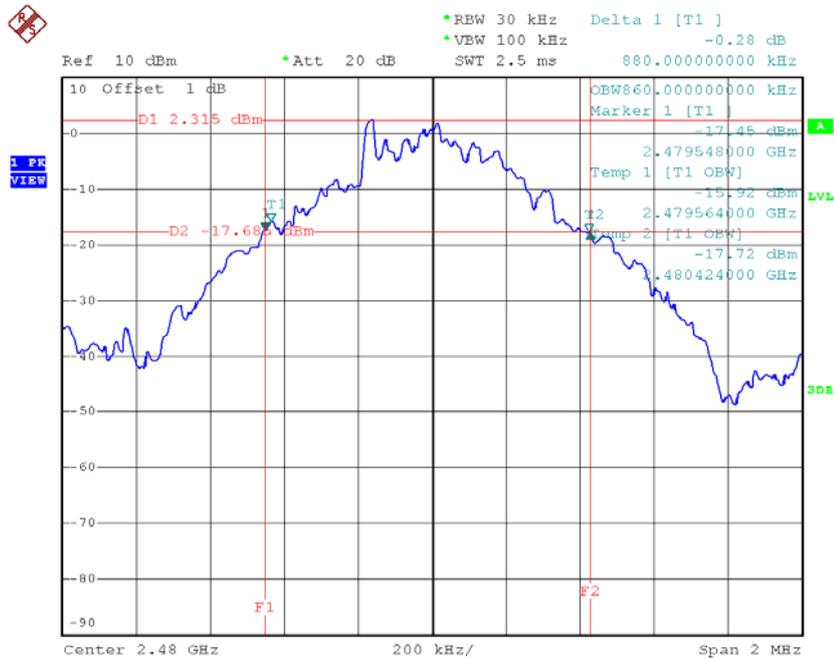

Date: 19.MAY.2016 10:23:39


Test Mode : TX Mode_3Mbps

Frequency (MHz)	20dB Bandwidth (MHz)	99% Occupied BW (MHz)	Test Result
2402	1.194	1.156	Pass
2441	1.202	1.144	Pass
2480	1.234	1.148	Pass

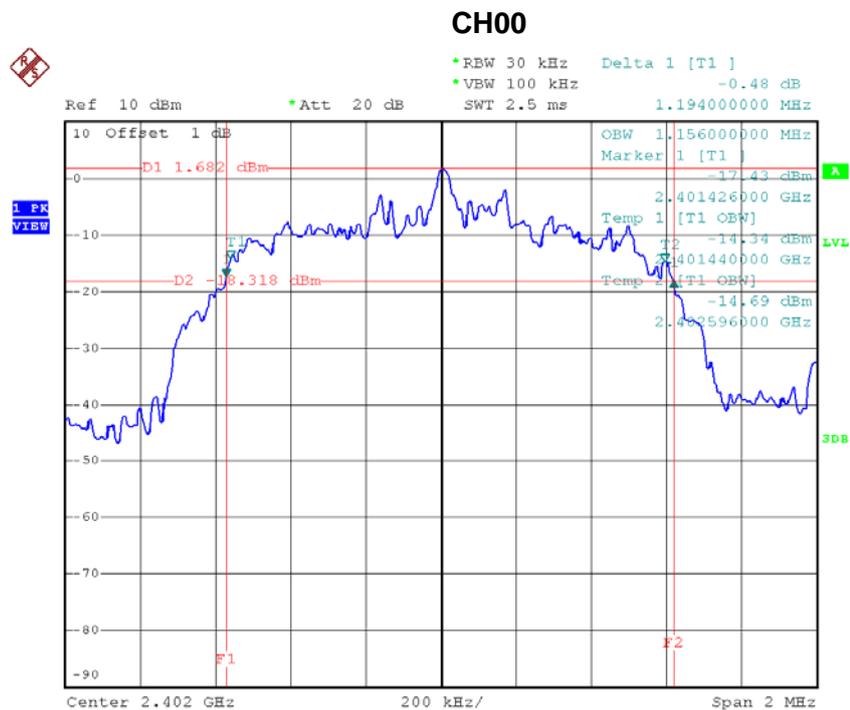


Date: 19.MAY.2016 10:36:36

CH39

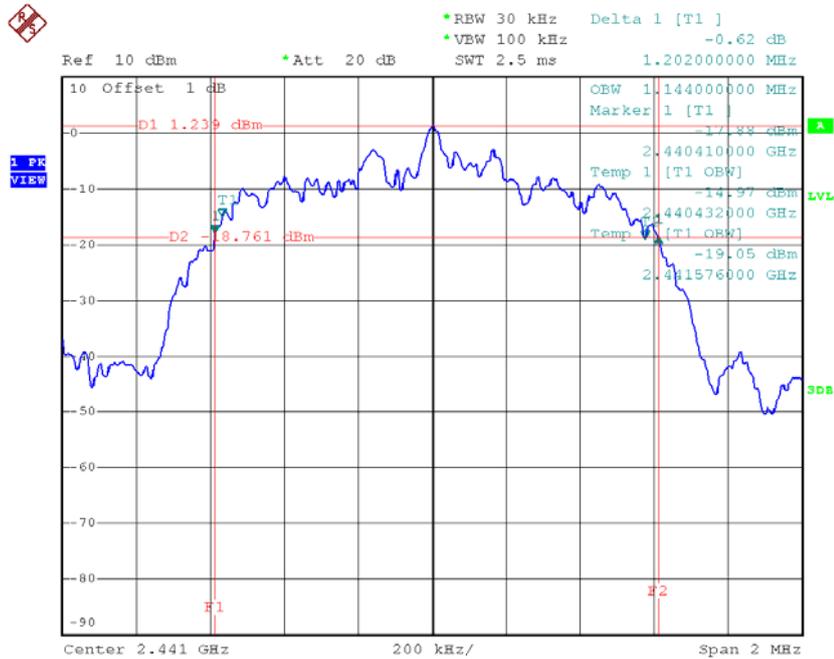

Date: 19.MAY.2016 10:37:46

CH78

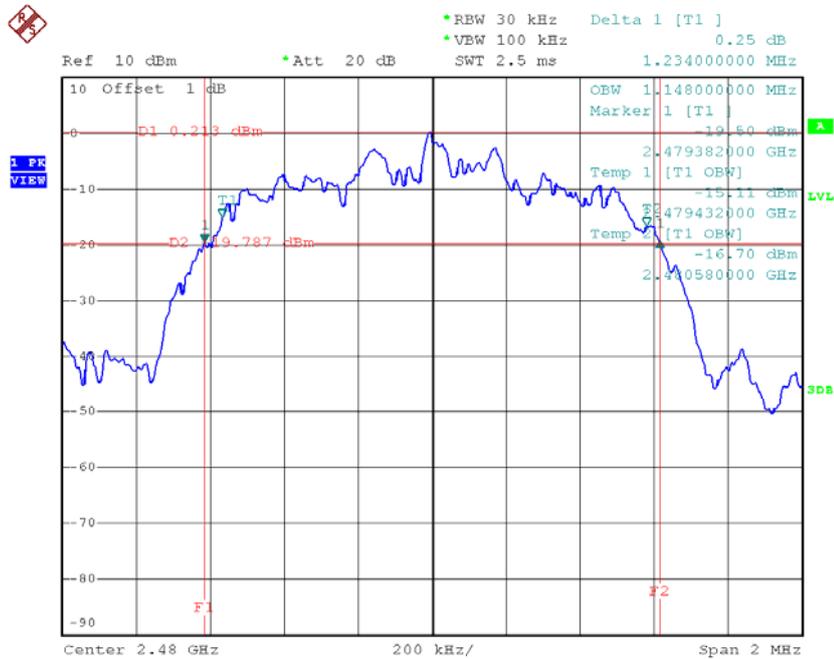


Date: 19.MAY.2016 10:38:23

ATTACHMENT I - PEAK OUTPUT POWER


Test Mode : TX Mode _1Mbps

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Test Result
2402	3.94	0.0025	30.00	1.00	Pass
2441	3.95	0.0025	30.00	1.00	Pass
2480	4.02	0.0025	30.00	1.00	Pass

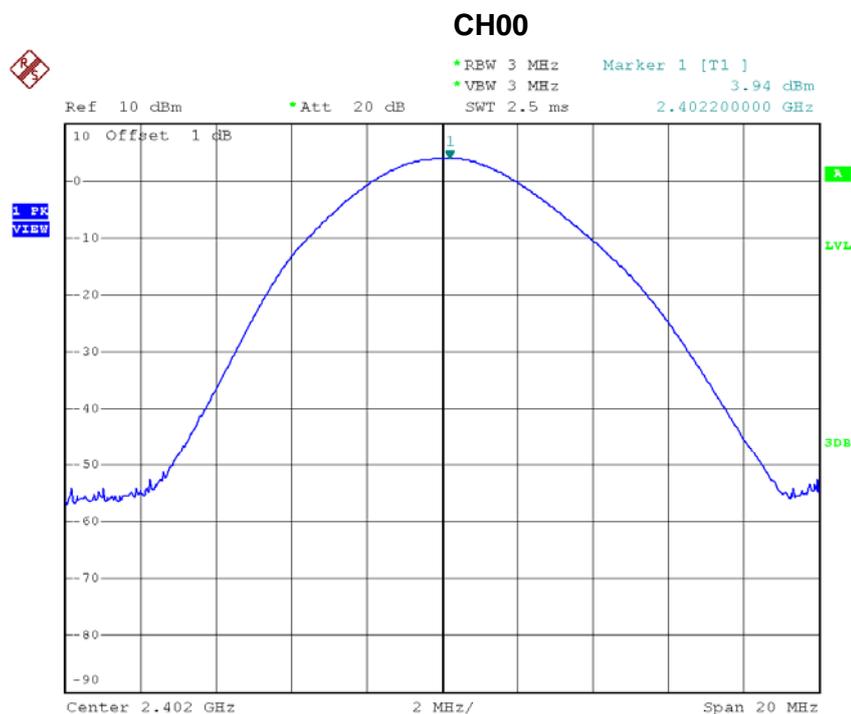


Date: 19.MAY.2016 10:13:51

CH39

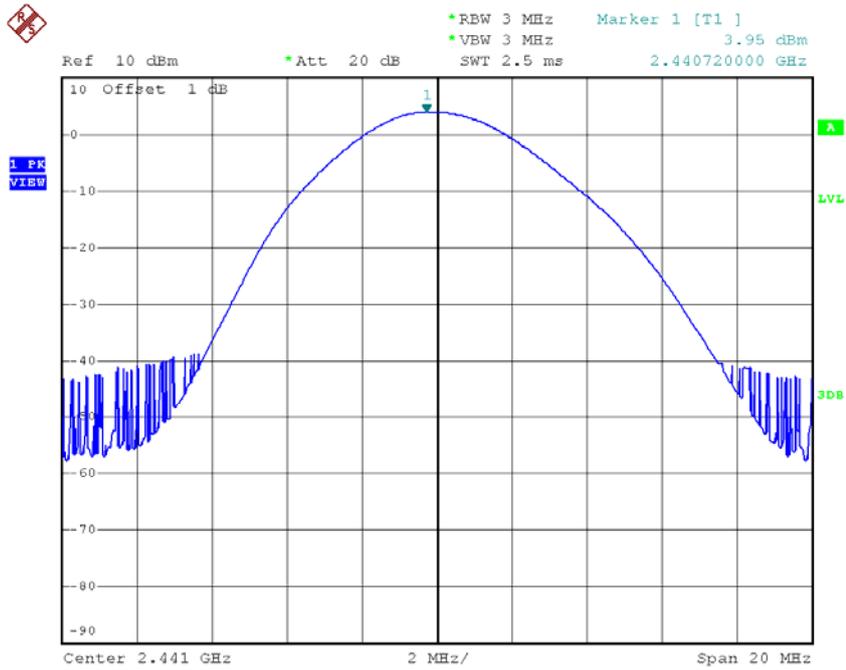

Date: 19.MAY.2016 10:15:11


CH78

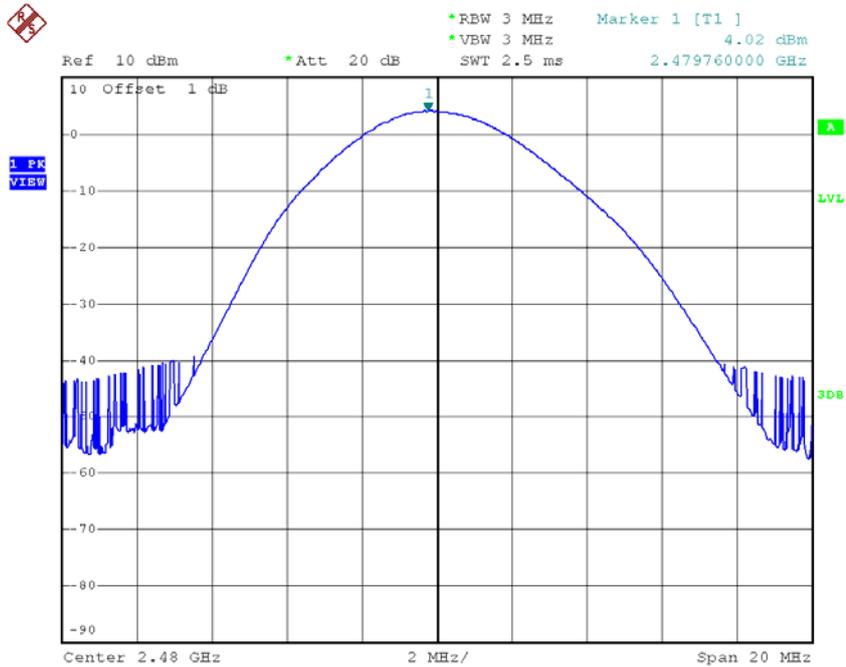

Date: 19.MAY.2016 10:15:32


Test Mode : TX Mode _3Mbps

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Test Result
2402	3.90	0.0025	30.00	1.00	Pass
2441	3.84	0.0024	30.00	1.00	Pass
2480	3.90	0.0025	30.00	1.00	Pass

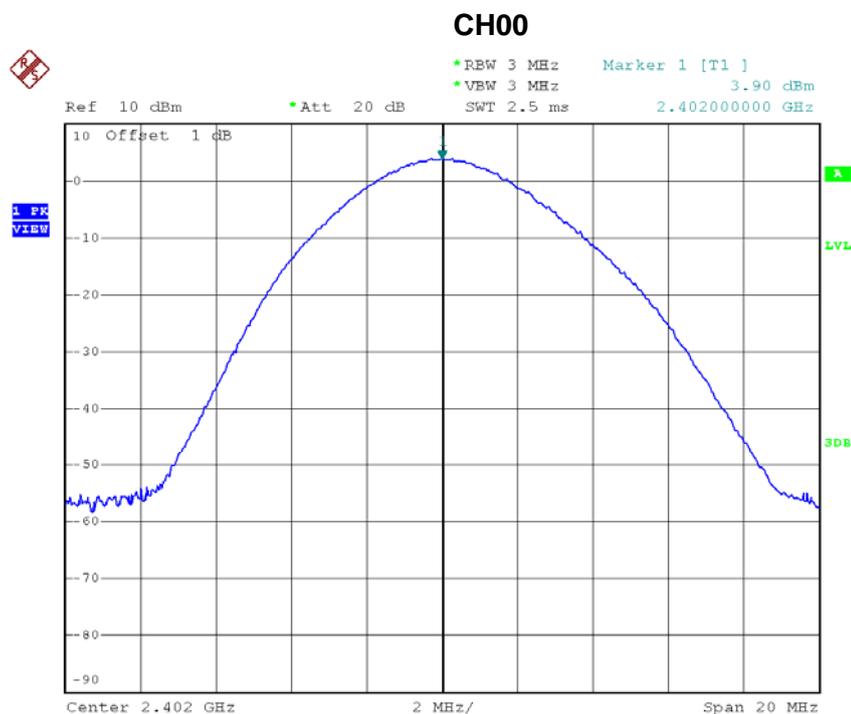


Date: 19.MAY.2016 10:18:48

CH39

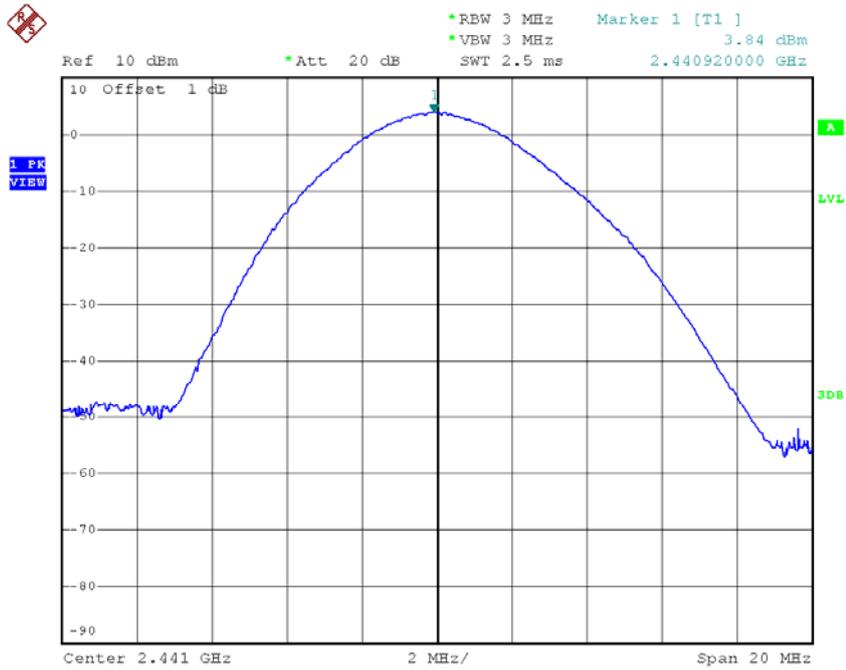

Date: 19.MAY.2016 10:19:48


CH78

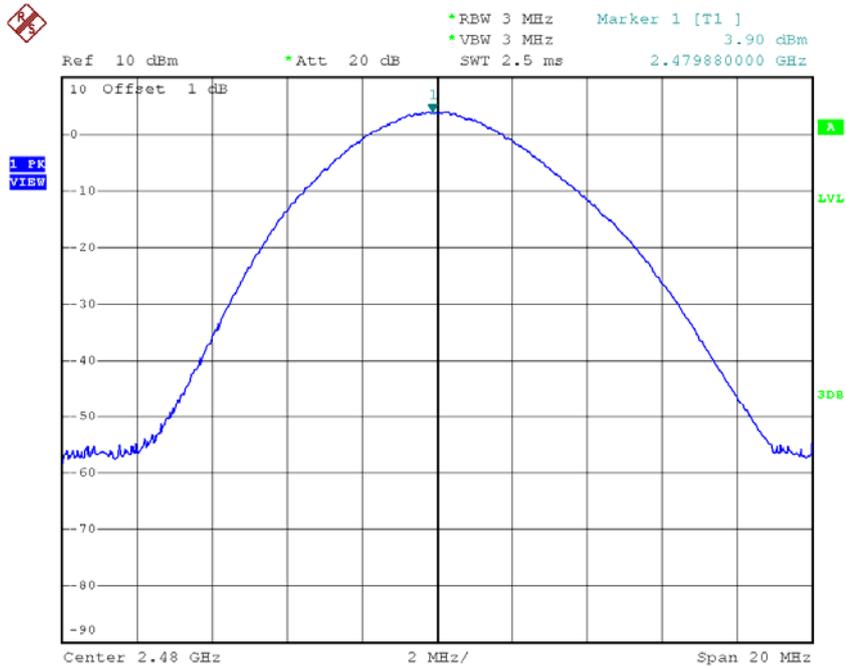

Date: 19.MAY.2016 10:20:06


ATTACHMENT J - ANTENNA CONDUCTED SPURIOUS EMISSION

CH00 (Lower)_1Mbps

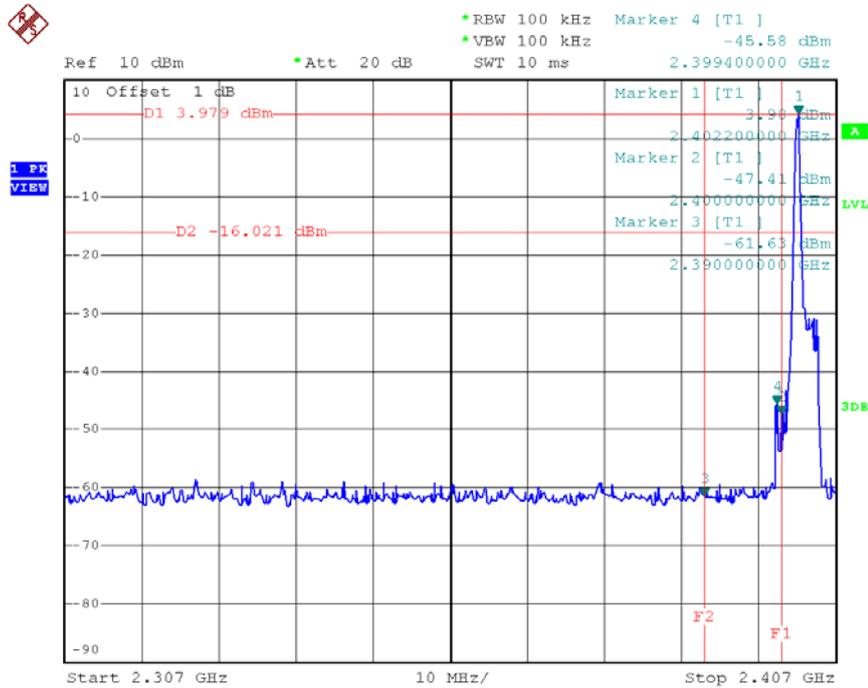


Date: 19.MAY.2016 10:21:13

CH78 (Upper)_1Mbps

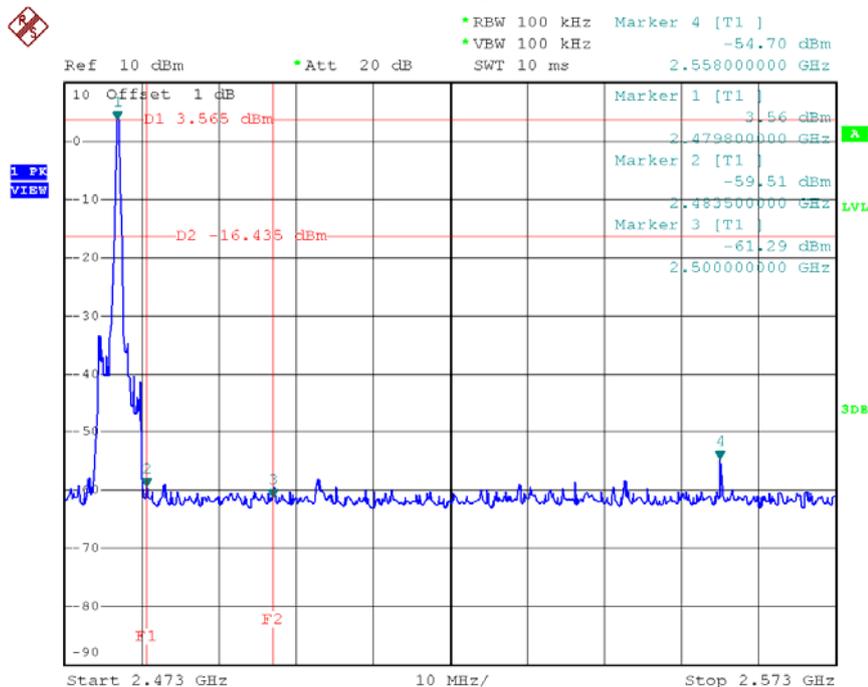


Date: 19.MAY.2016 10:23:11

CH00 Hopping on mode (Lower)_1Mbps

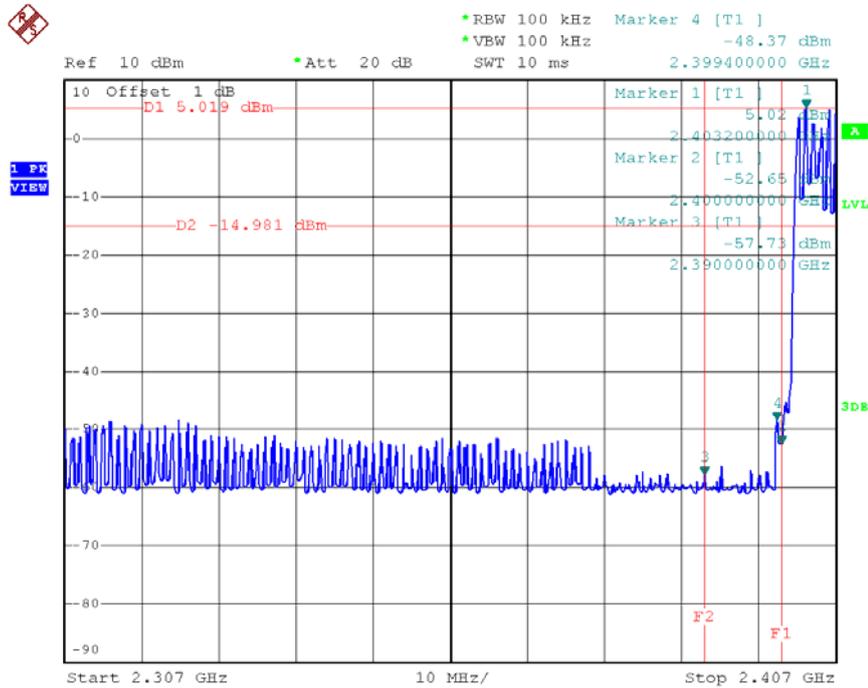


Date: 19.MAY.2016 10:32:01

CH78 Hopping on mode (Upper)_1Mbps

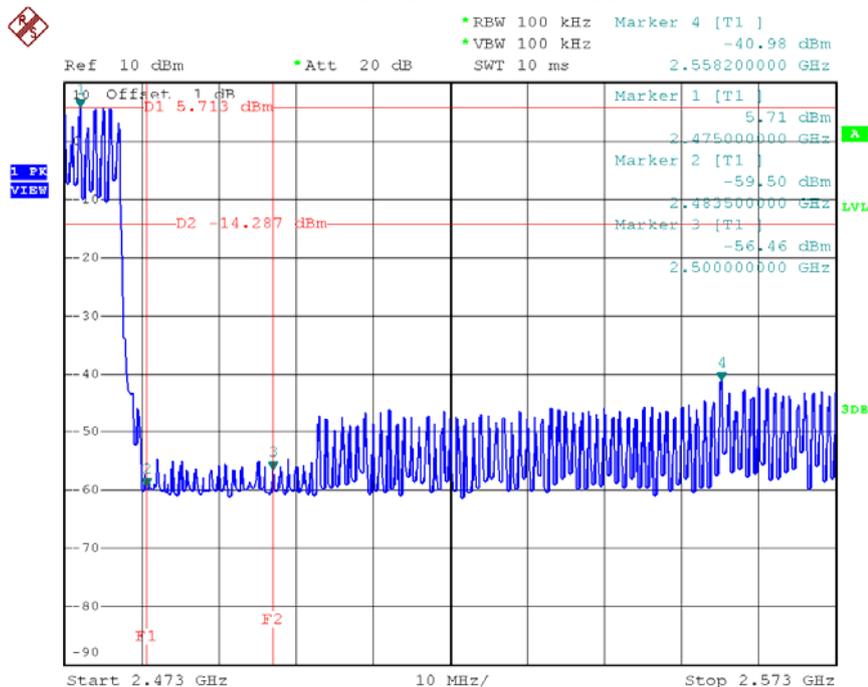


Date: 19.MAY.2016 10:33:22

CH00 (10 Harmonic of the frequency) _1Mbps

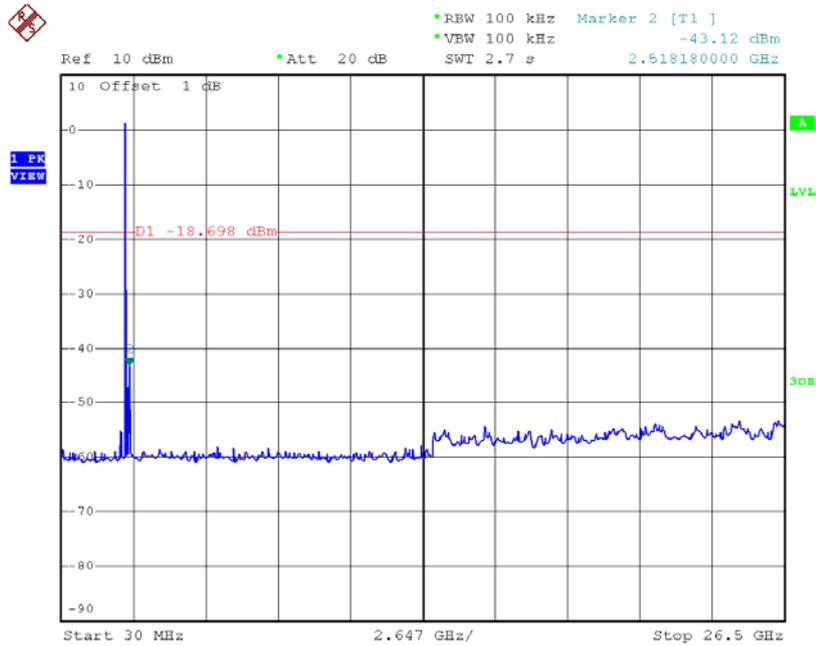


Date: 19.MAY.2016 10:22:02

CH39 (10 Harmonic of the frequency) _1Mbps

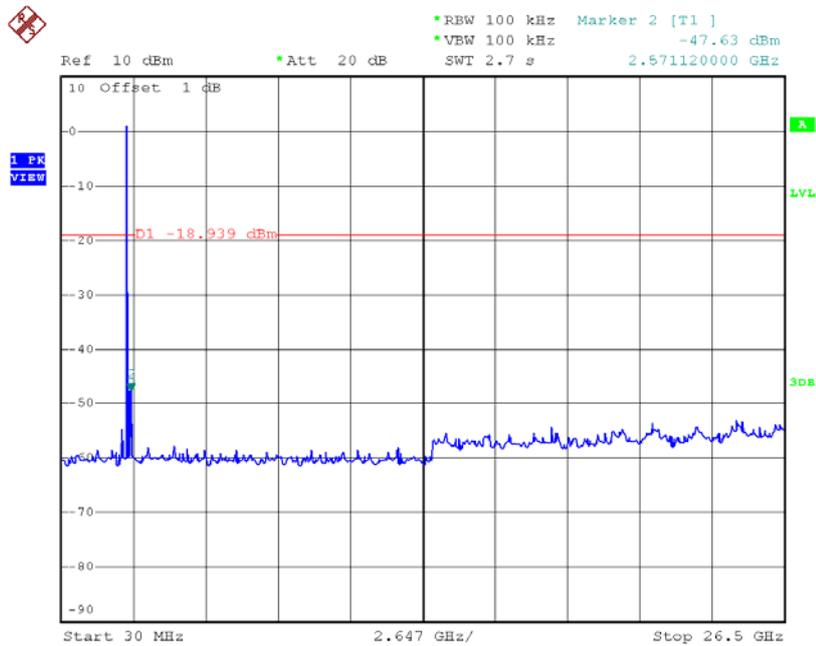


Date: 19.MAY.2016 10:22:29

CH78 (10 Harmonic of the frequency) _1Mbps

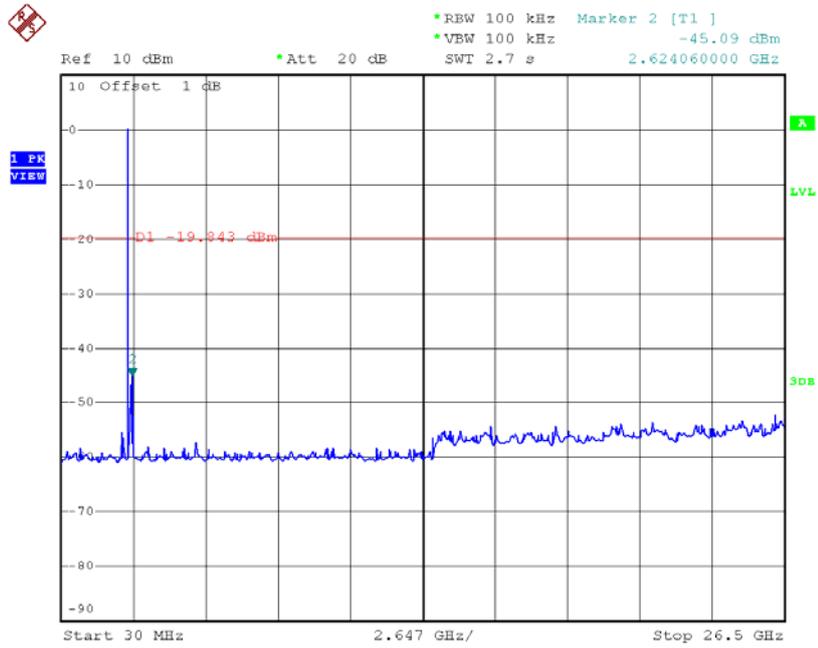


Date: 19.MAY.2016 10:24:05

CH00 (Lower) _3Mbps

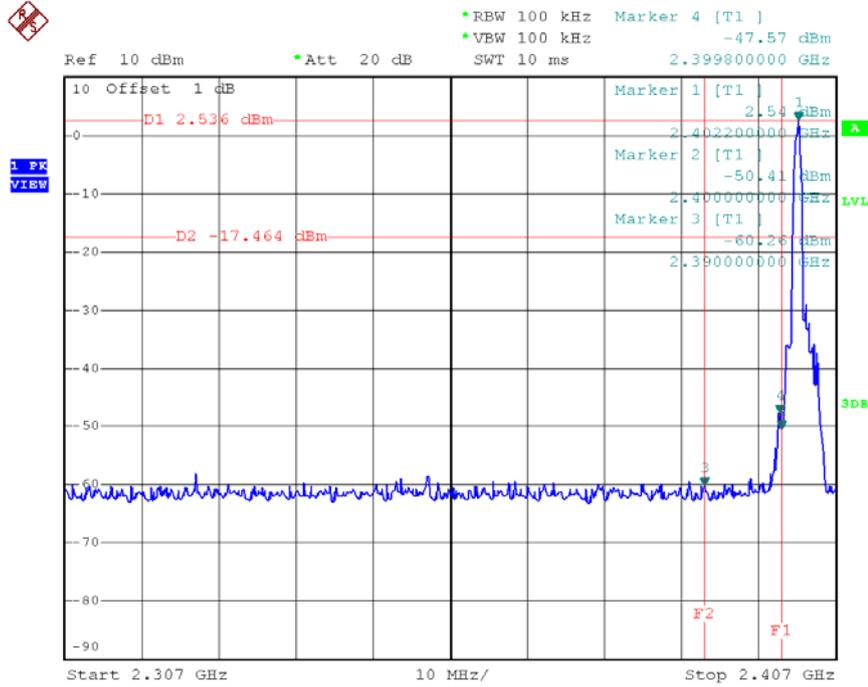


Date: 19.MAY.2016 10:36:14

CH78 (Upper) _3Mbps

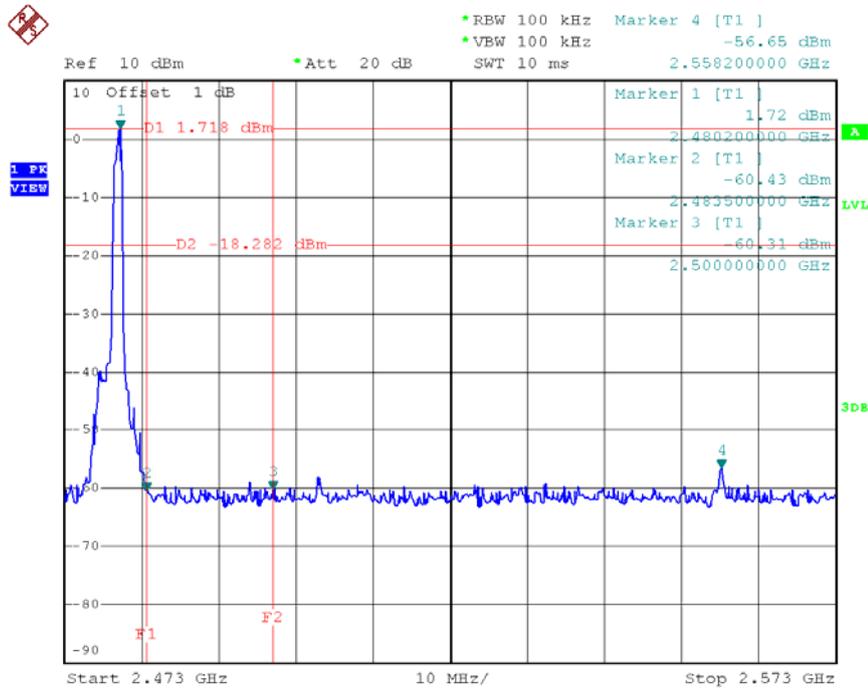


Date: 19.MAY.2016 10:38:03

CH00 Hopping on mode (Lower)_3Mbps

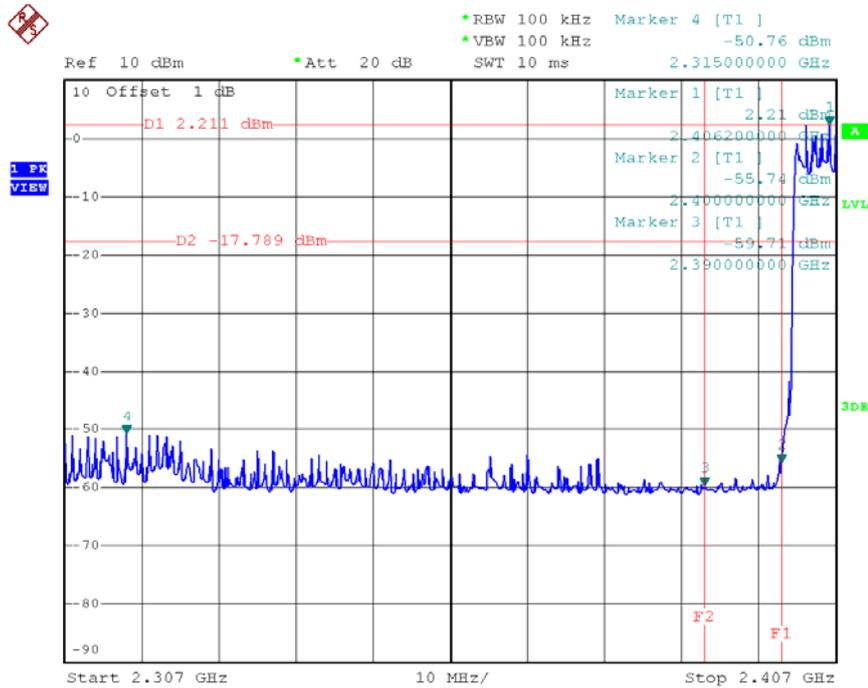


Date: 19.MAY.2016 10:44:53

CH78 Hopping on mode (Upper)_3Mbps

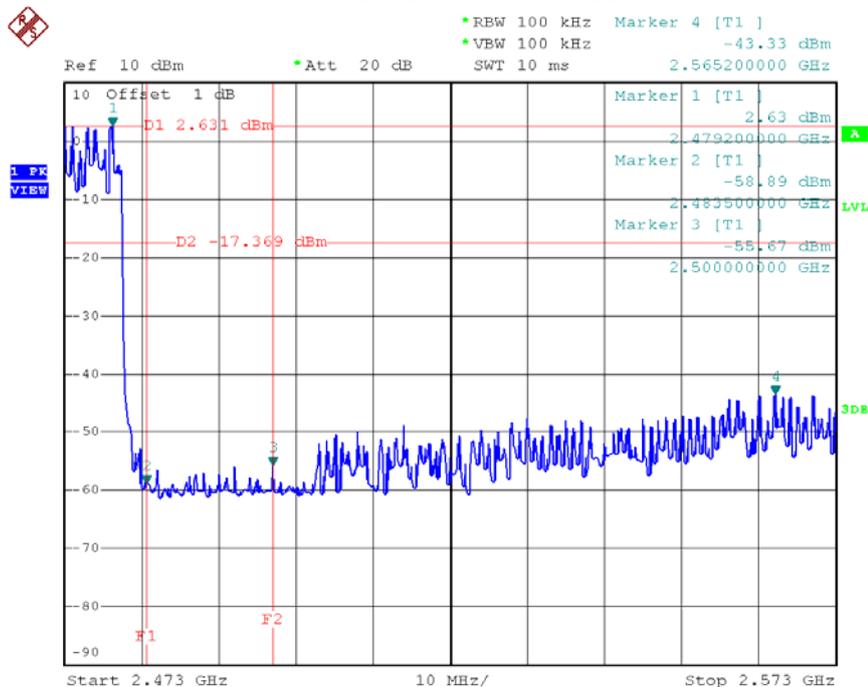


Date: 19.MAY.2016 10:45:30

CH00 (10 Harmonic of the frequency) _3Mbps

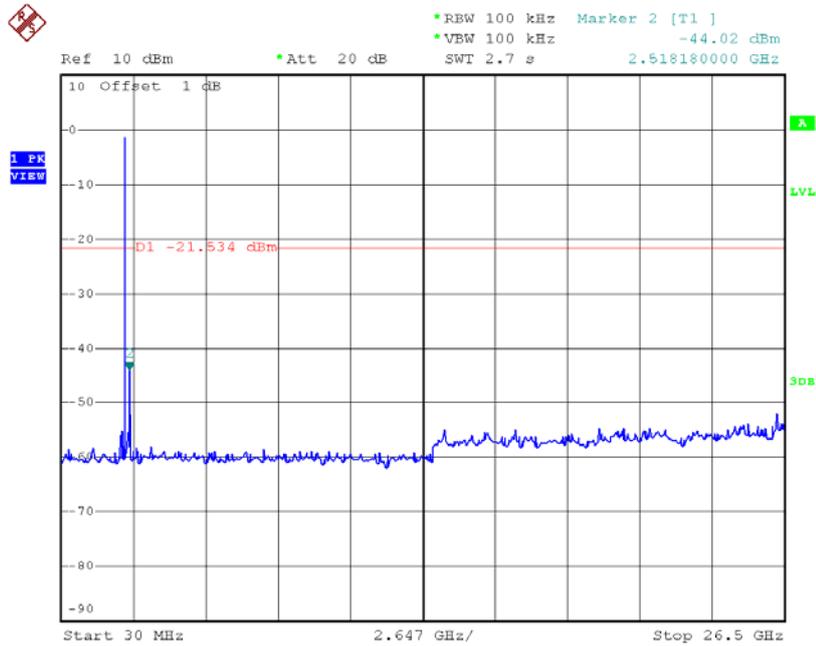


Date: 19.MAY.2016 10:36:50

CH39 (10 Harmonic of the frequency) _3Mbps

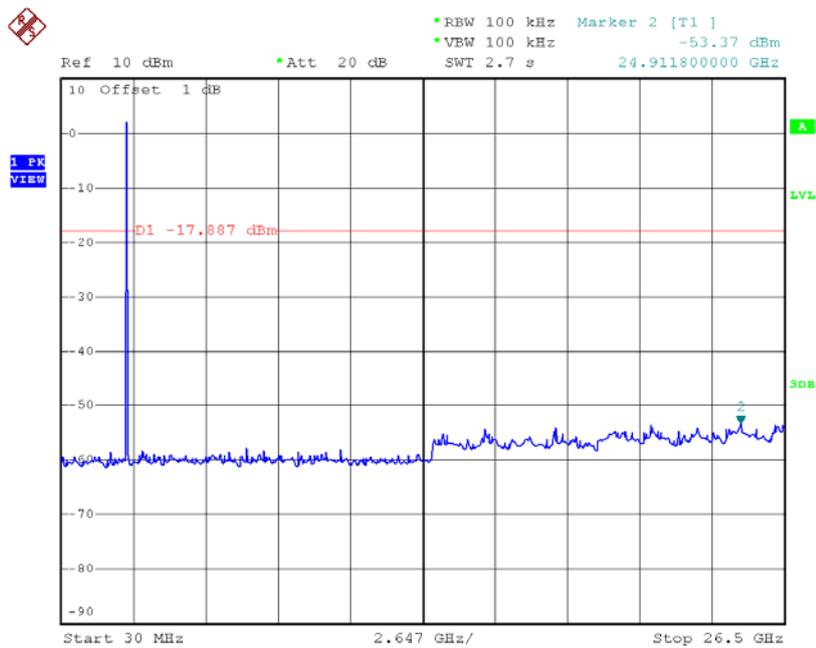

Date: 19.MAY.2016 10:37:24

CH78 (10 Harmonic of the frequency) _3Mbps

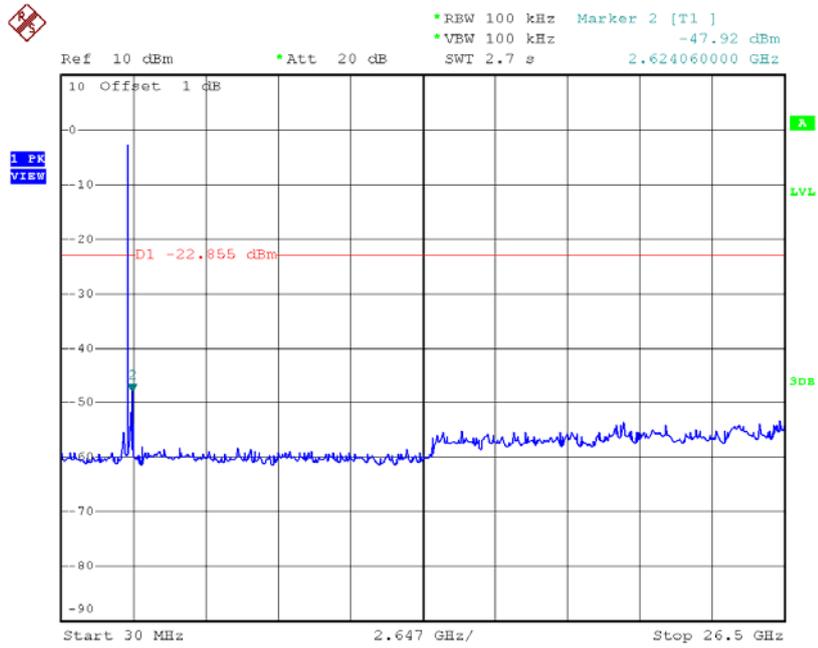

Date: 19.MAY.2016 10:38:37