

**ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT
INTENTIONAL RADIATOR CERTIFICATION TO
FCC PART 15 SUBPART C REQUIREMENT**

OF

Compact Clock with Wireless Charging

**Model No.: iW18, iW18B, iW18BG, iW18G, iW18GG, iW18W, iW18X (X
would be any 1 or 2 alphabet(s) combination denote different cabinet
color)**

Trademark: iHome

FCC ID: EMOIW18A

Report No.: ES191115021E

Issue Date: November 26, 2019

Prepared for

**SDI TECHNOLOGIES INC.
1299, Main Street, Rahway, NJ 07065, U.S.A.**

Prepared by

EMTEK(SHENZHEN) CO., LTD.

**Bldg 69, Majialong Industry Zone, Nanshan District, Shenzhen,
Guangdong, China.**

**TEL: 86-769-22807078
FAX: 86-769-22807079**

**This report shall not be reproduced, except in full, without the written approval of
EMTEK(SHENZHEN) CO., LTD.**

VERIFICATION OF COMPLIANCE


Applicant:	SDI Technologies Inc. 1299, Main Street, Rahway, NJ 07065, U.S.A.
Manufacturer:	Hotel Technologies, Inc 1299 Main Street, Rahway, NJ 07065, U.S.A
Product Description:	Compact Clock with Wireless Charging
Trade Mark:	iHome
Model Number:	iW18, iW18B, iW18BG, iW18G, iW18GG, iW18W, iW18X (X would be any 1 or 2 alphabet(s) combination denote different cabinet color) (Note: The samples are the same except difference color of appearance and model number, Here iW18 was selected for full test.)

We hereby certify that:

The above equipment was tested by EMTEK(SHENZHEN) CO., LTD. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10-2013 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15C.

Date of Test : November 15, 2019 to November 26,2019

Prepared by : 
Loren Luo /Editor

Reviewer : 
Tim Dong /Supervisor

Approved & Authorized Signer : 
Lisa Wang /Manager

Modified Information

Version	Summary	Revision Date	Report No.
Ver.1.0	Original Report	/	ES191115021E

Table of Contents

1	GENERAL INFORMATION	5
1.1	PRODUCT DESCRIPTION	5
1.2	RELATED SUBMITTAL(S) / GRANT(S)	6
1.3	TEST METHODOLOGY.....	6
1.4	SPECIAL ACCESSORIES	6
1.5	EQUIPMENT MODIFICATIONS	6
1.6	TEST FACILITY.....	6
2	SYSTEM TEST CONFIGURATION	7
2.1	EUT CONFIGURATION.....	7
2.2	EUT EXERCISE.....	7
2.3	TEST PROCEDURE.....	7
2.4	CONFIGURATION OF TESTED SYSTEM.....	8
3	SUMMARY OF TEST RESULTS	8
4	DESCRIPTION OF TEST MODES.....	9
5	CONDUCTED EMISSIONS TEST.....	10
5.1	MEASUREMENT PROCEDURE	10
5.2	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	10
5.3	MEASUREMENT EQUIPMENT USED	10
5.4	CONDUCTED EMISSION LIMIT	10
5.5	MEASUREMENT RESULT	11
6	RADIATED EMISSION TEST	16
6.1	MEASUREMENT PROCEDURE	16
6.2	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	16
6.3	MEASUREMENT EQUIPMENT USED	17
6.4	RADIATED EMISSION LIMIT.....	17
6.5	MEASUREMENT RESULT	19
7	20DB BANDWIDTH.....	24
7.1	20DB BANDWIDTH LIMIT	24
7.2	TEST INSTRUMENTS	24
7.3	TEST PROCEDURE.....	24
7.4	TEST SETUP.....	24
7.5	TEST RESULT	24
8	ANTENNA APPLICATION.....	26
8.1	ANTENNA REQUIREMENT.....	26
8.2	RESULT	26
9	PHOTOS OF EUT	26

1 General Information

1.1 Product Description

Characteristics	Description
Product Name	Compact Clock with Wireless Charging
Model number	iW18, iW18B, iW18BG, iW18G, iW18GG, iW18W, iW18X (X would be any 1 or 2 alphabet(s) combination denote different cabinet color)
Input Rating	DC 9V from adapter
Power Supply	AC120V/60Hz for adapter
Adapter	Model number:BQ30A-0902500-U Input rating: 100-240V~, 50/60Hz, 800mA Max. Output rating: DC 9.0V, 2500mA
Operating Frequency	110-148kHz
Wireless Charging Power	5W, 9W
Product Software Version	V1.0
Product Hardware version	V2.0
Modulation Technique	Induction
Antenna Type	Induction coil

1.2 Related Submittal(s) / Grant(s)

This submittal(s) (test report) is intended for FCC ID: EMOIW18A filing to comply with the FCC Part 15, Subpart C Rules.

1.3 Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10 (2013). Radiated testing was performed at an antenna to EUT distance 3 meters.

1.4 Special Accessories

Not available for this EUT intended for grant.

1.5 Equipment Modifications

Not available for this EUT intended for grant.

1.6 Test Facility

Site Description
EMC Lab.

- : Accredited by CNAS, 2016.10.24
The certificate is valid until 2022.10.28
The Laboratory has been assessed and proved to be in compliance with
CNAS-CL01:2006 (identical to ISO/IEC 17025:2005)
The Certificate Registration Number is L2291.
- Accredited by TUV Rheinland Shenzhen 2016.5.19
The Laboratory has been assessed according to the requirements ISO/IEC
17025.
- Accredited by FCC, August 03, 2017
Designation Number: CN1204
Test Firm Registration Number: 882943
- Accredited by Industry Canada, November 24, 2015
The Certificate Registration Number is 4480A.
- Accredited by A2LA, July 31, 2017
The Certificate Number is 4321.01.
- Name of Firm : EMTEK(SHENZHEN) CO., LTD.
- Site Location : Bldg 69, Majialong Industry Zone, Nanshan District, Shenzhen,
Guangdong, China.

2 System Test Configuration

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

2.3 Test Procedure

2.3.1 Conducted Emissions

The EUT is placed on a turn table which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.

2.3.2 Radiated Emissions

The EUT is placed on a turn table which is 0.8 m above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the fixed in a particular direction according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013.

2.4 Configuration of Tested System

Fig. 2-1 Configuration of Tested System

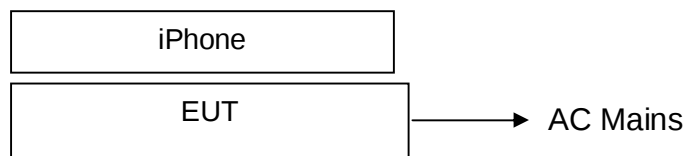


Table 2-1 Equipment Used in Tested System

Item	Equipment	Trade Mark	Model No.	FCC ID	Note
1.	Compact Clock with Wireless Charging	iHome	iW18	EMOIW18A	EUT
2.	Adapter	iHome	BQ30A-09025 00-U	N/A	Support EUT
3.	iPhone	Apple	A1524	N/A	Support Equipment

Note:

- (1) Unless otherwise denoted as EUT in 『Remark』 column, device(s) used in tested system is a support equipment.

3 Summary of Test Results

FCC Rules	Description Of Test	Result
§15.207	AC Power Conducted Emission	Compliant
§15.209	Radiated Emission	Compliant
§2.1049	20dB Bandwidth	Compliant
§15.203	Antenna Requirement	Compliant

4 Description of test modes


Channel	Frequency(KHz)
Low frequency	110
Mid frequency	129
High frequency	148

5 Conducted Emissions Test

5.1 Measurement Procedure

1. The EUT was placed on a table which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured was complete.

5.2 Test SET-UP (Block Diagram of Configuration)

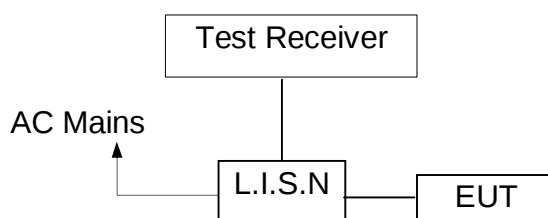

5.3 Measurement Equipment Used

Conducted Emission Test Site					
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	Last Cal.	Due date
Test Receiver	Rohde & Schwarz	ESCS30	100018	05/23/2019	05/22/2020
L.I.S.N	Rohde & Schwarz	ENV216	100017	05/23/2019	05/22/2020
RF Switching Unit	CDS	RSU-M2	38401	05/23/2019	05/22/2020
Coaxial Cable	CDS	79254	46107086	05/23/2019	05/22/2020

5.4 Conducted Emission Limit

Conducted Emission

Frequency(MHz)

Quasi-peak

Average

0.15-0.5

66-56

56-46

0.5-5.0

56

46

5.0-30.0

60

50

Note: 1. The lower limit shall apply at the transition frequencies

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.


5.5 Measurement Result

Operation Mode:	TX	Test Date :	November 19, 2019
Frequency Range:	0.15MHz~30MHz	Temperature :	28℃
Test Result:	PASS	Humidity :	65 %
Test By:	Loren		

Pass

We pretested three modes (max load, mid load, min load) for EUT. The worst mode (max load) test data see follow the table.

Qi-5W Wireless Charging

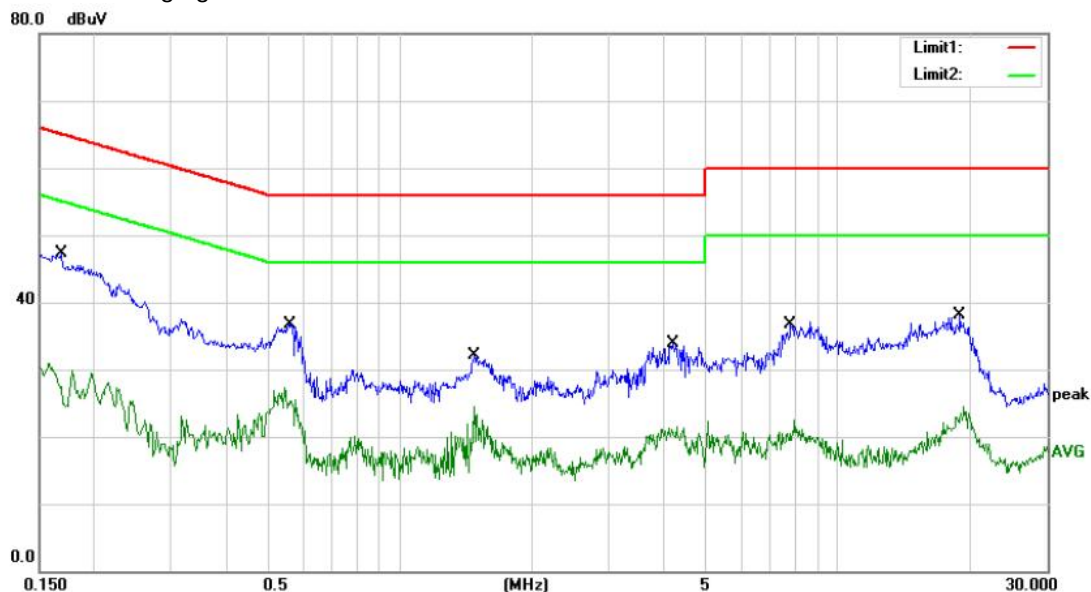

Site site #1

Phase: **L1**

Temperature: 25

Limit: (CE)FCC PART 15 C_QP

Power: AC 120V/60Hz

Humidity: 55 %


Mode: Qi-5W Wireless Charging

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1	*	0.1685	36.34	10.02	46.36	65.03	-18.67	QP	
2		0.1685	14.37	10.02	24.39	55.03	-30.64	AVG	
3		0.5620	25.67	10.18	35.85	56.00	-20.15	QP	
4		0.5620	12.58	10.18	22.76	46.00	-23.24	AVG	
5		1.4737	21.64	10.18	31.82	56.00	-24.18	QP	
6		1.4737	11.38	10.18	21.56	46.00	-24.44	AVG	
7		4.1980	21.64	10.18	31.82	56.00	-24.18	QP	
8		4.1980	9.81	10.18	19.99	46.00	-26.01	AVG	
9		7.7900	24.68	10.20	34.88	60.00	-25.12	QP	
10		7.7900	10.61	10.20	20.81	50.00	-29.19	AVG	
11		18.9497	26.56	10.27	36.83	60.00	-23.17	QP	
12		18.9497	12.27	10.27	22.54	50.00	-27.46	AVG	

*:Maximum data x:Over limit l:over margin

Operator:HUANG

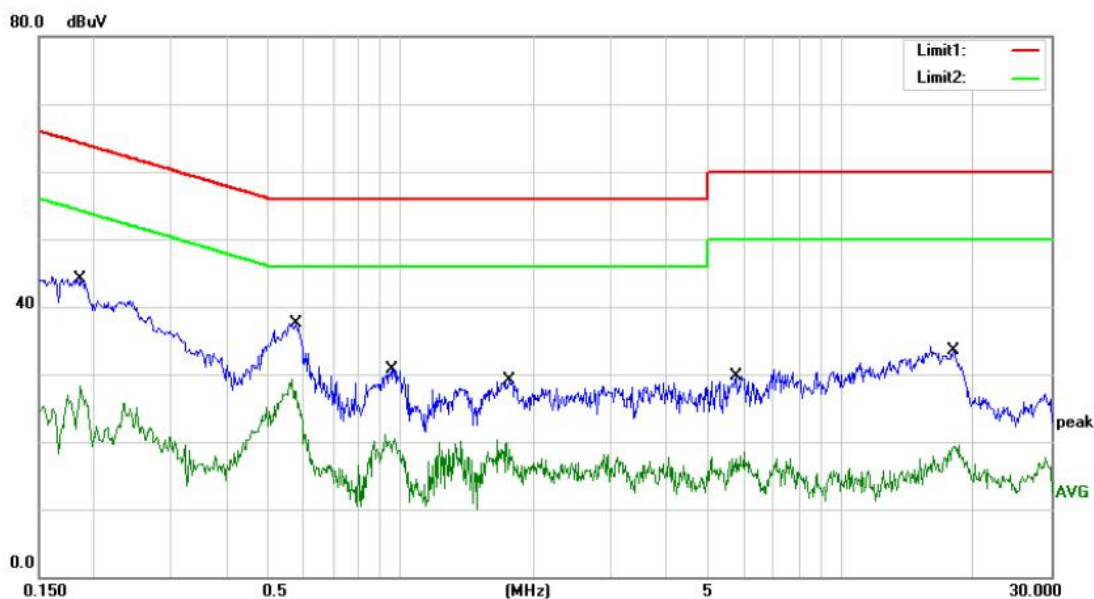

Site site #1

Phase: **N**

Temperature: 25

Limit: (CE)FCC PART 15 C_QP

Power: AC 120V/60Hz

Humidity: 55 %

Mode: Qi-5W Wireless Charging


Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.1862	32.11	10.03	42.14	64.20	-22.06	QP	
2		0.1862	12.08	10.03	22.11	54.20	-32.09	AVG	
3	*	0.5778	25.93	10.18	36.11	56.00	-19.89	QP	
4		0.5778	12.64	10.18	22.82	46.00	-23.18	AVG	
5		0.9578	19.37	10.18	29.55	56.00	-26.45	QP	
6		0.9578	7.91	10.18	18.09	46.00	-27.91	AVG	
7		1.7580	18.77	10.18	28.95	56.00	-27.05	QP	
8		1.7580	3.45	10.18	13.63	46.00	-32.37	AVG	
9		5.7580	19.38	10.18	29.56	60.00	-30.44	QP	
10		5.7580	4.78	10.18	14.96	50.00	-35.04	AVG	
11		17.9780	22.65	10.26	32.91	60.00	-27.09	QP	
12		17.9780	7.24	10.26	17.50	50.00	-32.50	AVG	

*:Maximum data x:Over limit l:over margin

Operator:HUANG

Sumsung 9W Fast Wireless Charging

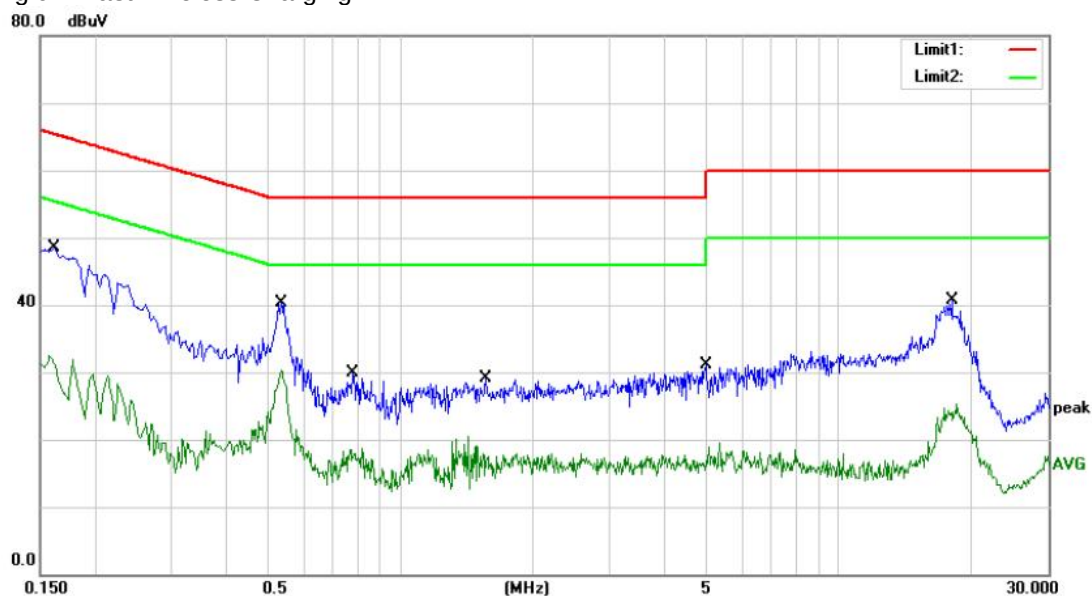

Site site #1

Phase: L1

Temperature: 25

Limit: (CE)FCC PART 15 C_QP

Power: AC 120V/60Hz


Humidity: 55 %

Mode: Sumsung 9W Wireless Charging

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.1620	38.45	10.02	48.47	65.36	-16.89	QP	
2		0.1620	22.39	10.02	32.41	55.36	-22.95	AVG	
3		0.5340	30.11	10.18	40.29	56.00	-15.71	QP	
4	*	0.5340	20.12	10.18	30.30	46.00	-15.70	AVG	
5		0.7780	19.66	10.18	29.84	56.00	-26.16	QP	
6		0.7780	8.62	10.18	18.80	46.00	-27.20	AVG	
7		1.5660	18.84	10.18	29.02	56.00	-26.98	QP	
8		1.5660	10.25	10.18	20.43	46.00	-25.57	AVG	
9		4.9660	20.89	10.18	31.07	56.00	-24.93	QP	
10		4.9660	9.32	10.18	19.50	46.00	-26.50	AVG	
11		18.0820	30.39	10.26	40.65	60.00	-19.35	QP	
12		18.0820	15.12	10.26	25.38	50.00	-24.62	AVG	

*:Maximum data x:Over limit l:over margin Comment: Factor build in receiver. Operator:Hu

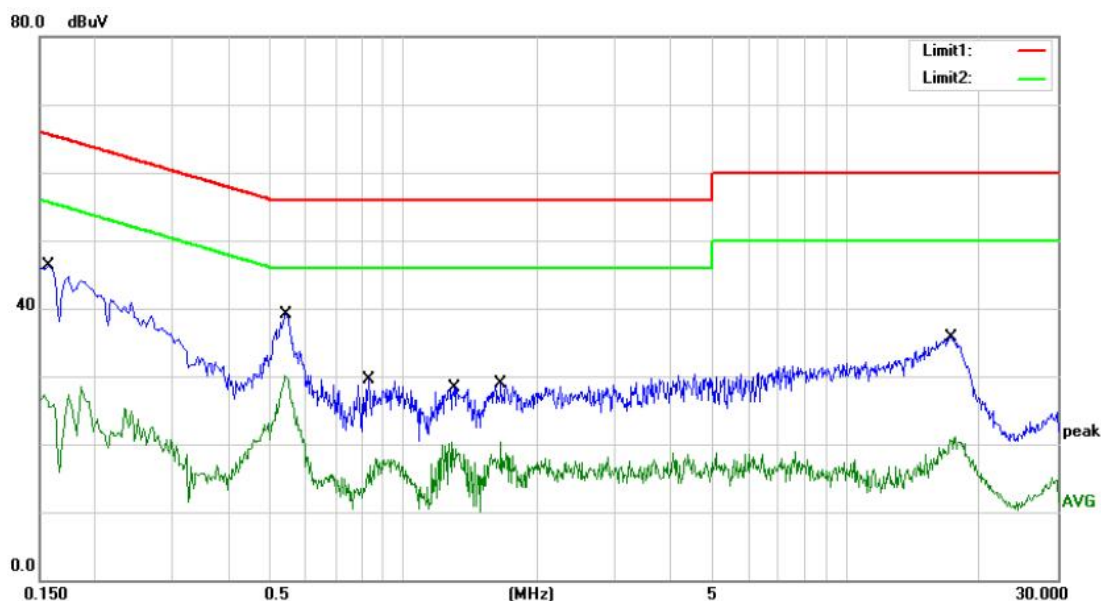

Site: site #1 Phase: **N** Temperature: 25
 Limit: (CE)FCC PART 15 C_QP Power: AC 120V/60Hz Humidity: 55 %
 Mode: Sumsung 9W Wireless Charging
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.1580	36.30	10.01	46.31	65.57	-19.26	QP	
2		0.1580	18.51	10.01	28.52	55.57	-27.05	AVG	
3		0.5420	28.93	10.18	39.11	56.00	-16.89	QP	
4	*	0.5420	19.86	10.18	30.04	46.00	-15.96	AVG	
5		0.8340	19.30	10.18	29.48	56.00	-26.52	QP	
6		0.8340	7.78	10.18	17.96	46.00	-28.04	AVG	
7		1.3020	18.21	10.18	28.39	56.00	-27.61	QP	
8		1.3020	10.19	10.18	20.37	46.00	-25.63	AVG	
9		1.6540	18.65	10.18	28.83	56.00	-27.17	QP	
10		1.6540	10.05	10.18	20.23	46.00	-25.77	AVG	
11		17.2180	25.47	10.26	35.73	60.00	-24.27	QP	
12		17.2180	10.88	10.26	21.14	50.00	-28.86	AVG	

*:Maximum data x:Over limit !:over margin Comment: Factor build in receiver. Operator:Hu


6 Radiated Emission Test

6.1 Measurement Procedure


1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measured were complete.

6.2 Test SET-UP (Block Diagram of Configuration)

(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

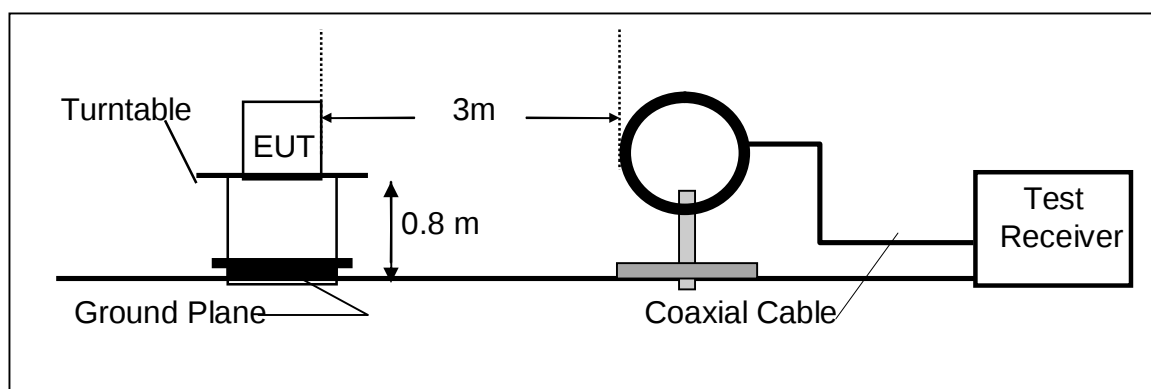

(B) Radiated Emission Test Set-Up, Frequency Below 1000MHz

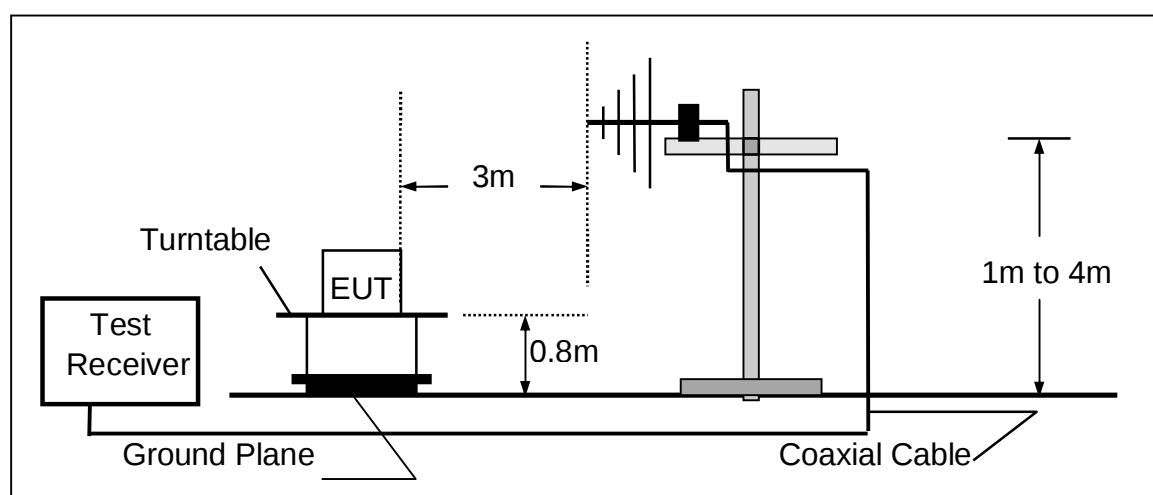

6.3 Measurement Equipment Used

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due date
Test Receiver	Rohde & Schwarz	ESCI	1166.5950.03	05/23/2019	05/22/2020
Signal Analyzer	Rohde & Schwarz	FSV30	103040	05/23/2019	05/22/2020
Loop Antenna	Schwarzbeck	FMZB 1519	012	05/23/2019	05/22/2020
Bilog Antenna	Schwarzbeck	VULB9163	000141	05/23/2019	05/22/2020
Power Amplifier	CDS	RSU-M352	818	05/23/2019	05/22/2020
Power Amplifier	HP	8447F	OPT H64	05/23/2019	05/22/2020
Color Monitor	SUNSP0	SP-140A	N/A	05/23/2019	05/22/2020
Single Line Filter	JIANLI	XL-3	N/A	05/23/2019	05/22/2020
Single Phase Power Line Filter	JIANLI	DL-2X100B	N/A	05/23/2019	05/22/2020
3 Phase Power Line Filter	JIANLI	DL-4X100B	N/A	05/23/2019	05/22/2020
DC Power Filter	JIANLI	DL-2X50B	N/A	05/23/2019	05/22/2020
Cable	Schwarzbeck	PLF-100	549489	05/23/2019	05/22/2020
Cable	Rosenberger	CIL02	A0783566	05/23/2019	05/22/2020
Cable	Rosenberger	RG 233/U	525178	05/23/2019	05/22/2020

6.4 Radiated Emission Limit

The emissions from an intentional radiator shall not exceed the field strength levels specified in the following table 15.209(a):

FCC Part 15.209				
Frequency (MHz)	Field Strength Limitation		Field Strength Limitation Frequency tion at 3m Measurement Dist	
	(uV/m)	Dist	(uV/m)	(dBuV/m)
0.009 – 0.490	2400 / F(KHz)	300m	10000 * 2400/F(KHz)	20log 2400/F(KHz) + 80
0.490 – 1.705	24000 / F(KHz)	30m	100 * 24000/F(KHz)	20log 24000/F(KHz) + 40
1.705 – 30.00	30	30m	100* 30	20log 30 + 40
30.0 – 88.0	100	3m	100	20log 100
88.0 – 216.0	150	3m	150	20log 150
216.0 – 960.0	200	3m	200	20log 200
Above 960.0	500	3m	500	20log 500

15.205 Restricted bands of operation

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)

Remark: 1. Emission level in dBuV/m=20 log (uV/m)
 2. Measurement was performed at an antenna to the closed point of EUT distance of meters.
 3. Only spurious frequency is permitted to locate within the Restricted Bands specified in provision of § 15.205, and the emissions located in restricted bands also comply with 15.209 limit.

6.5 Measurement Result

We pretested three modes (max load, mid load, min load) for EUT. The worst mode (max load) and worst test frequency(frequency: 127KHz)test data see follow the table.

Operation Mode:	Low frequency	Test Date :	November 19, 2019
Frequency Range:	9KHz~30MHz	Temperature :	20°C
Test Result:	PASS	Humidity :	55 %
Measured Distance:	3m	Test By:	Loren

Qi-5W Wireless Charging

Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV/m)	Limit 3m (dBuV/m)	Over (dB)	Note
0.12734(F)	H	74.69	105.49	-30.80	PK
0.160	H	67.23	103.48	-36.25	PK
0.258	H	65.19	99.35	-34.16	PK
0.406	H	67.34	95.43	-28.09	PK
0.542	H	64.58	72.92	-8.34	PK
0.12734(F)	V	75.93	105.49	-29.56	PK
0.215	V	66.59	100.95	-34.36	PK
0.346	V	65.49	96.81	-31.32	PK
0.466	V	64.04	94.23	-30.19	PK
0.626	V	65.37	71.68	-6.31	PK

Sumsung 9W Wireless Charging

Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV/m)	Limit 3m (dBuV/m)	Over (dB)	Note
0.12734(F)	H	75.34	105.49	-30.15	PK
0.255	H	68.64	99.47	-30.83	PK
0.383	H	67.96	95.94	-27.98	PK
0.510	H	68.54	93.45	-24.91	PK
0.638	H	67.21	91.50	-24.29	PK
0.12734(F)	V	76.15	105.49	-29.34	PK
0.255	V	67.68	99.47	-31.79	PK
0.383	V	66.53	95.94	-29.41	PK
0.510	V	65.42	93.45	-28.03	PK
0.638	V	64.59	91.50	-26.91	PK

- Note:**
- (1) All Readings are Peak Value.
 - (2) Emission Level= Reading Level+Probe Factor +Cable Loss.
 - (3) The average measurement was not performed when the peak measured data under the limit of average detection.
 - (4) EUT lying on the table position is the worst case result in the report.

Qi-5W Wireless Charging



Site site #1

Polarization: **Vertical**

Temperature: 25

Limit: (RE)FCC PART 15 C 3m

Power: AC 120V/60Hz

Humidity: 55 %

Mode: Qi-5W Wireless Charging

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1	!	37.5478	49.73	-15.68	34.05	40.00	-5.95	QP		
2	*	41.2764	51.09	-15.38	35.71	40.00	-4.29	QP		
3		175.5000	56.43	-18.94	37.49	43.50	-6.01	QP		
4		398.6000	38.26	-10.12	28.14	46.00	-17.86	QP		
5		496.5700	35.64	-7.95	27.69	46.00	-18.31	QP		
6		661.4699	36.91	-3.98	32.93	46.00	-13.07	QP		

*:Maximum data x:Over limit !:over margin

Operator: HUANG




No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		38.0782	43.67	-15.26	28.41	40.00	-11.59	QP		
2	*	157.0700	52.11	-18.87	33.24	43.50	-10.26	QP		
3		177.5089	50.67	-17.71	32.96	43.50	-10.54	QP		
4		244.3700	40.69	-13.61	27.08	46.00	-18.92	QP		
5		471.3500	40.67	-8.71	31.96	46.00	-14.04	QP		
6		819.5800	31.29	-2.15	29.14	46.00	-16.86	QP		

*:Maximum data x:Over limit !:over margin

Operator: HUANG


Sumsung 9W Wireless Charging

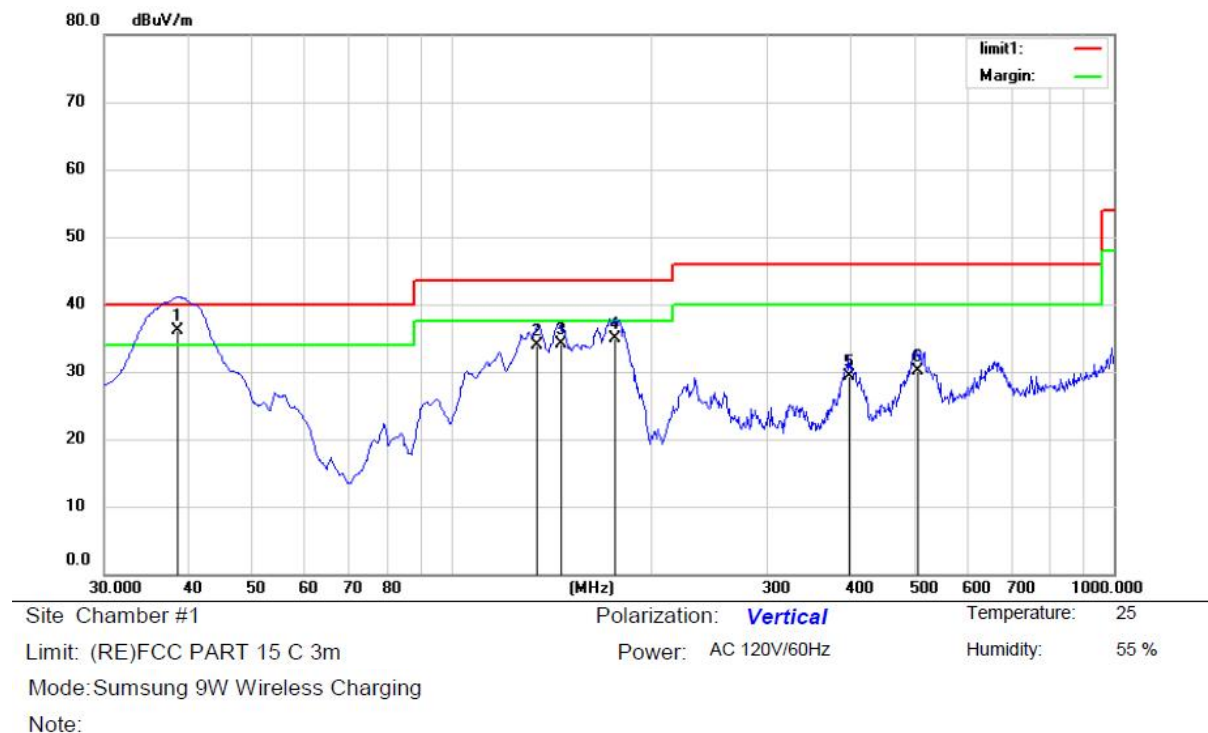

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	38.7300	51.60	-15.44	36.16	40.00	-3.84	QP		
2		134.7600	54.46	-20.55	33.91	43.50	-9.59	QP		
3		146.4000	53.76	-19.66	34.10	43.50	-9.40	QP		
4		176.4700	53.70	-18.82	34.88	43.50	-8.62	QP		
5		398.6000	39.35	-10.12	29.23	46.00	-16.77	QP		
6		505.3000	37.89	-7.74	30.15	46.00	-15.85	QP		

*:Maximum data x:Over limit l:over margin

Operator: HUANG

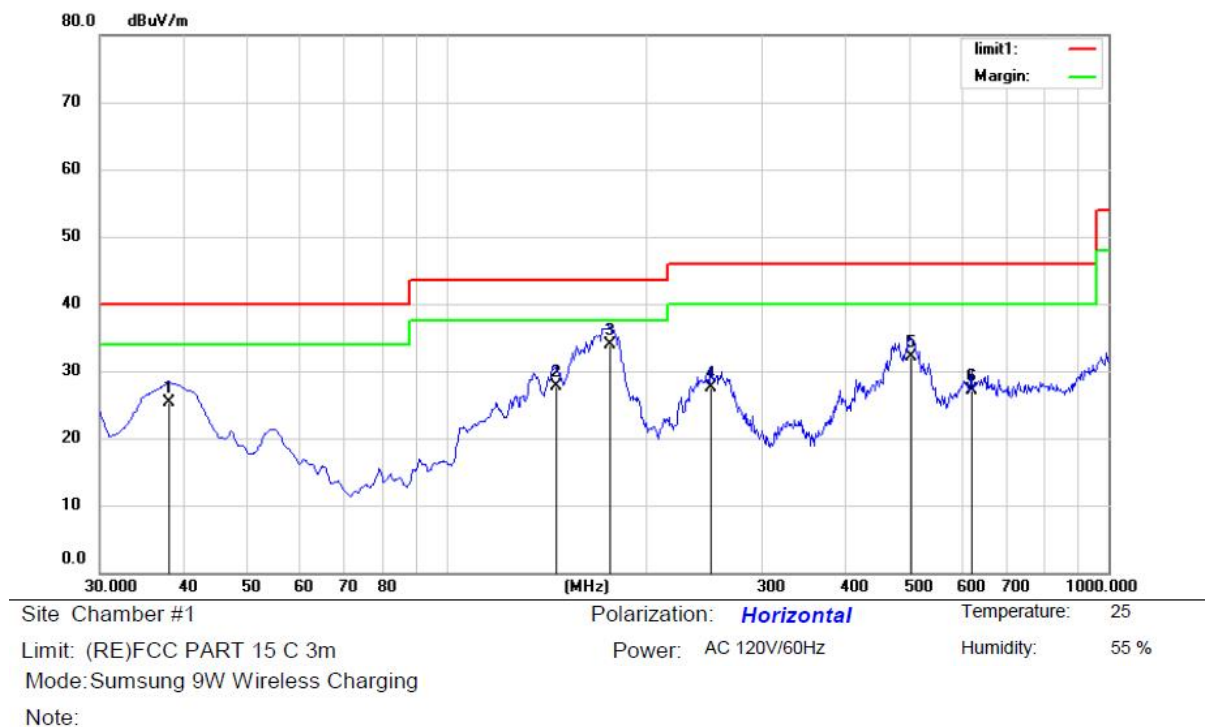

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		38.0782	40.52	-15.26	25.26	40.00	-14.74	QP		
2		146.4000	48.13	-20.38	27.75	43.50	-15.75	QP		
3	*	176.4700	51.67	-17.82	33.85	43.50	-9.65	QP		
4		251.1600	41.10	-13.54	27.56	46.00	-18.44	QP		
5		502.3900	39.84	-7.78	32.06	46.00	-13.94	QP		
6		622.6700	31.85	-4.70	27.15	46.00	-18.85	QP		

*:Maximum data x:Over limit !:over margin

Operator: HUANG

7 20db Bandwidth

7.1 20dB Bandwidth Limit

None: for reporting purposed only.


7.2 Test Instruments

Refer a test equipment and calibration data table in this test report.

7.3 Test Procedure

The bandwidth of the fundamental frequency was measured by spectrum analyzer with 10Hz RBW and 30Hz VBW. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB. The working mode (9W wireless charging)

7.4 Test Setup




7.5 Test Result

Sumsung 9W Wireless Charging

Lowest frequency (KHz)	20dB Bandwidth (Hz)	Results
110.10	23.44	PASS

20 dB Bandwidth Test plot

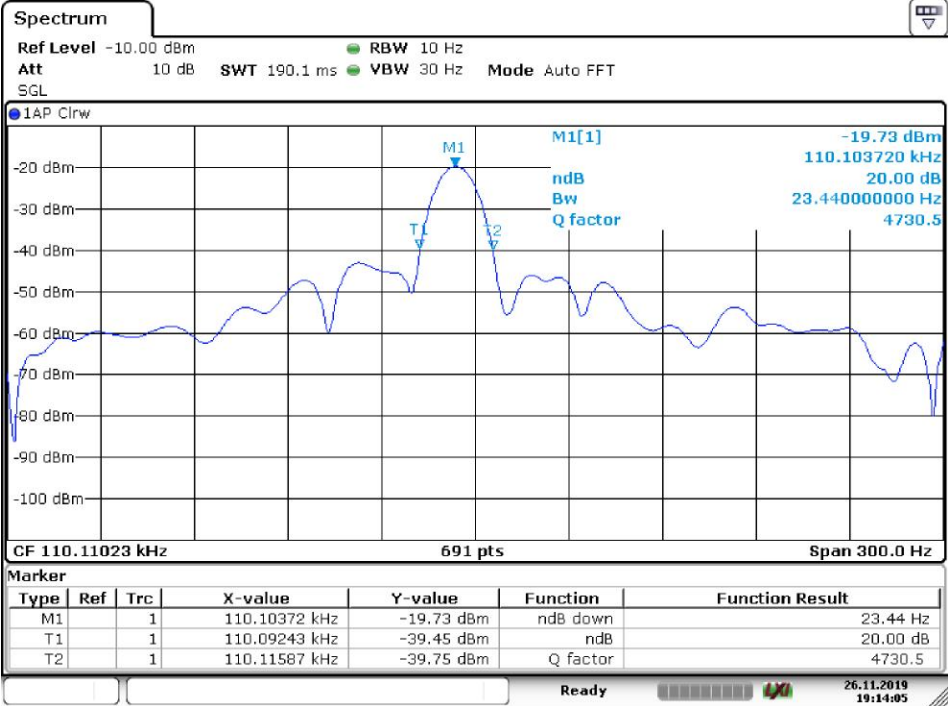

8 Antenna Application

8.1 Antenna requirement

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

8.2 Result

The EUT's antenna, permanent attached antenna, used an Induction coil and integrated on PCB, The antenna's gain meets the requirement.

9 Photos of EUT

Please refer to external photos and internal photos.