



Report No.: HK08060910-1
Model: LS6115-2
Talk Mode
AC Mains "L"

Scan Settings (1 Range)

Frequencies			Receiver Settings				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp OpRge
150k	30M	5k	10k	PK+AV	10ms	AUTO	LN OFF 60dB

Final Measurement: x QP / + AV

Meas Time: 1 s

Subranges: 16


Acc Margin: 20dB

Transducer No. Start Stop Name

2 1 9k 30M EW0700

3 9k 30M EW2454

12 9k 30M EW0090

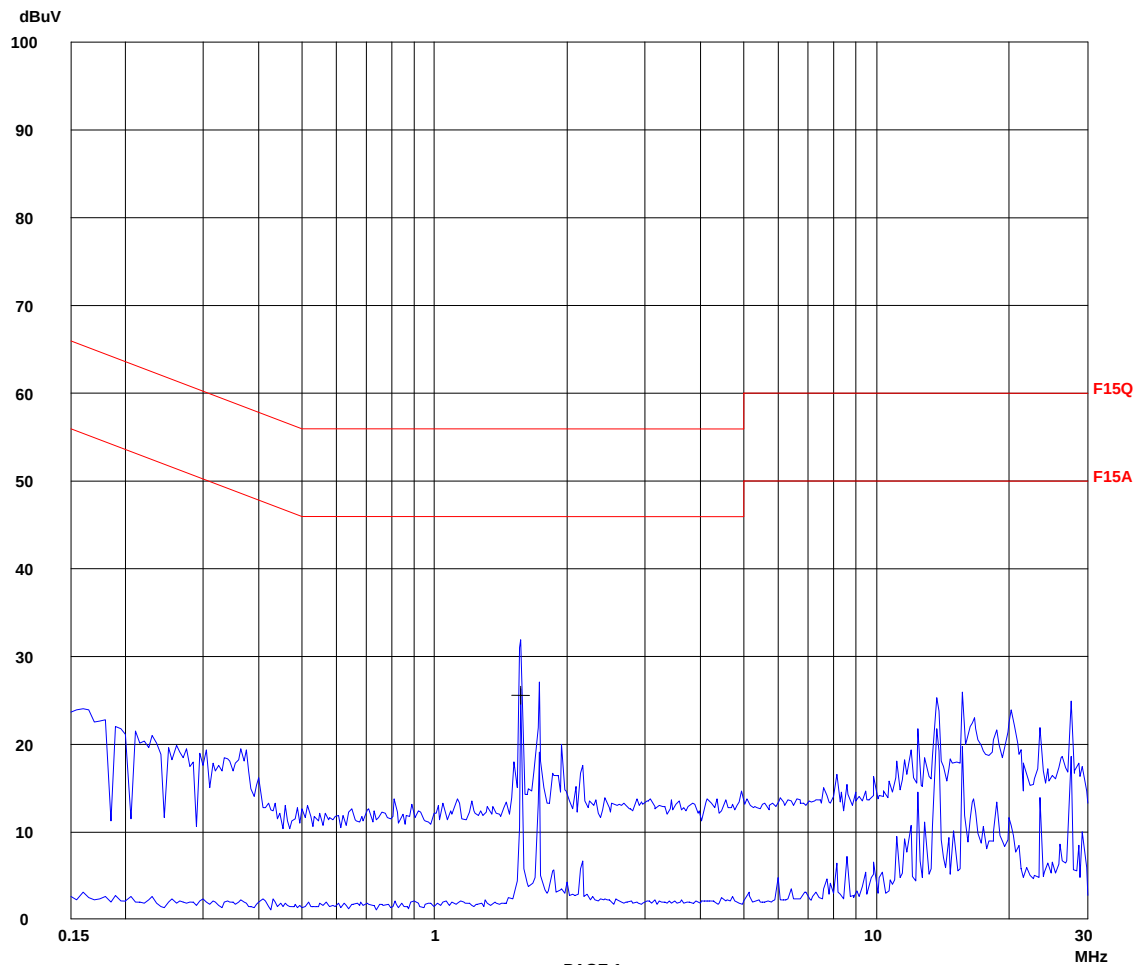

Ctrl No.: N/A



Report No.: HK08060910-1
Model: LS6115-2
Talk Mode
AC Mains "L"

Scan Settings (1 Range)
|----- Frequencies -----||----- Receiver Settings -----|
Start Stop Step IF BW Detector M-Time Atten Preamp OpRge
150k 30M 5k 10k PK+AV 10ms AUTO LN OFF 60dB
Final Measurement Results:

Frequency	QP Level	QP Limit	Delta
MHz	dBuV	dBuV	dB

no Results

Frequency	AV Level	AV Limit	Delta
MHz	dBuV	dBuV	dB

1.57000	25.6	46.0	-20.4
---------	------	------	-------

* limit exceeded




Report No.: HK08060910-1
Model: LS6125-2
Talk Mode
AC Mains "L"

Scan Settings (1 Range)

Frequencies			Receiver Settings				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp OpRge
150k	30M	5k	10k	PK+AV	10ms	AUTO	LN OFF 60dB

Final Measurement: x QP / + AV
Meas Time: 1 s
Subranges: 16
Acc Margin: 20dB

Transducer No.	Start	Stop	Name
2 1	9k	30M	EW0700
3 9k	30M		EW2454
12 9k	30M		EW0090

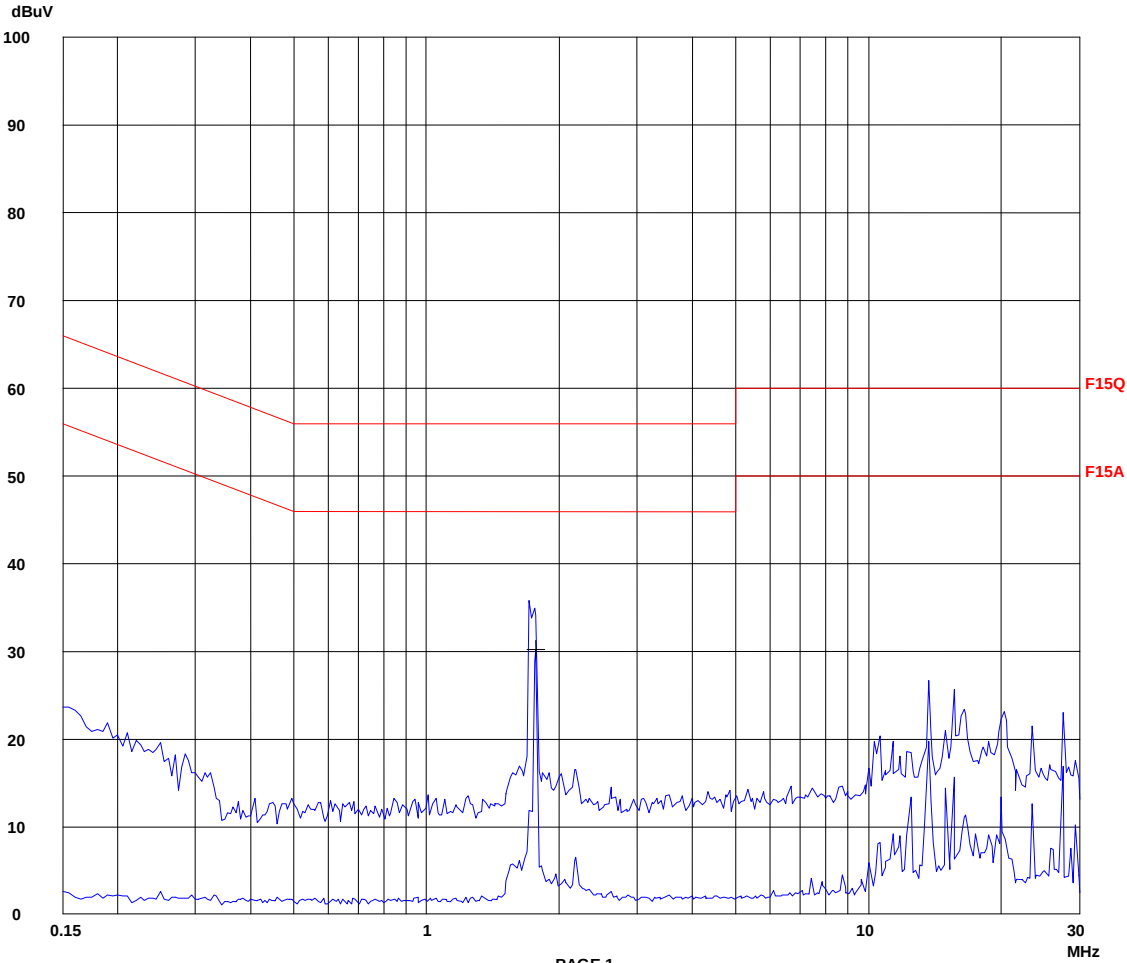



Report No.: HK08060910-1
Model: LS6125-2
Talk Mode
AC Mains "L"

Scan Settings (1 Range)
|----- Frequencies -----||----- Receiver Settings -----|
Start Stop Step IF BW Detector M-Time Atten Preamp OpRge
150k 30M 5k 10k PK+AV 10ms AUTO LN OFF 60dB
Final Measurement Results:

Frequency	QP Level	QP Limit	Delta
MHz	dBuV	dBuV	dB

no Results

Frequency	AV Level	AV Limit	Delta
MHz	dBuV	dBuV	dB

1.76500	30.1	46.0	-15.9
---------	------	------	-------

* limit exceeded



Report No.: HK08060910-1
Model: LS6125-2
Talk Mode
AC Mains "N"

Scan Settings (1 Range)

Frequencies			Receiver Settings				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp OpRge
150k	30M	5k	10k	PK+AV	10ms	AUTO	LN OFF 60dB

Final Measurement: x QP / + AV

Meas Time: 1 s

Subranges: 16


Acc Margin: 20dB

Transducer No.	Start	Stop	Name
----------------	-------	------	------

2	1	9k	30M	EW0700
---	---	----	-----	--------

3	9k	30M	EW2454
---	----	-----	--------

12	9k	30M	EW0090
----	----	-----	--------

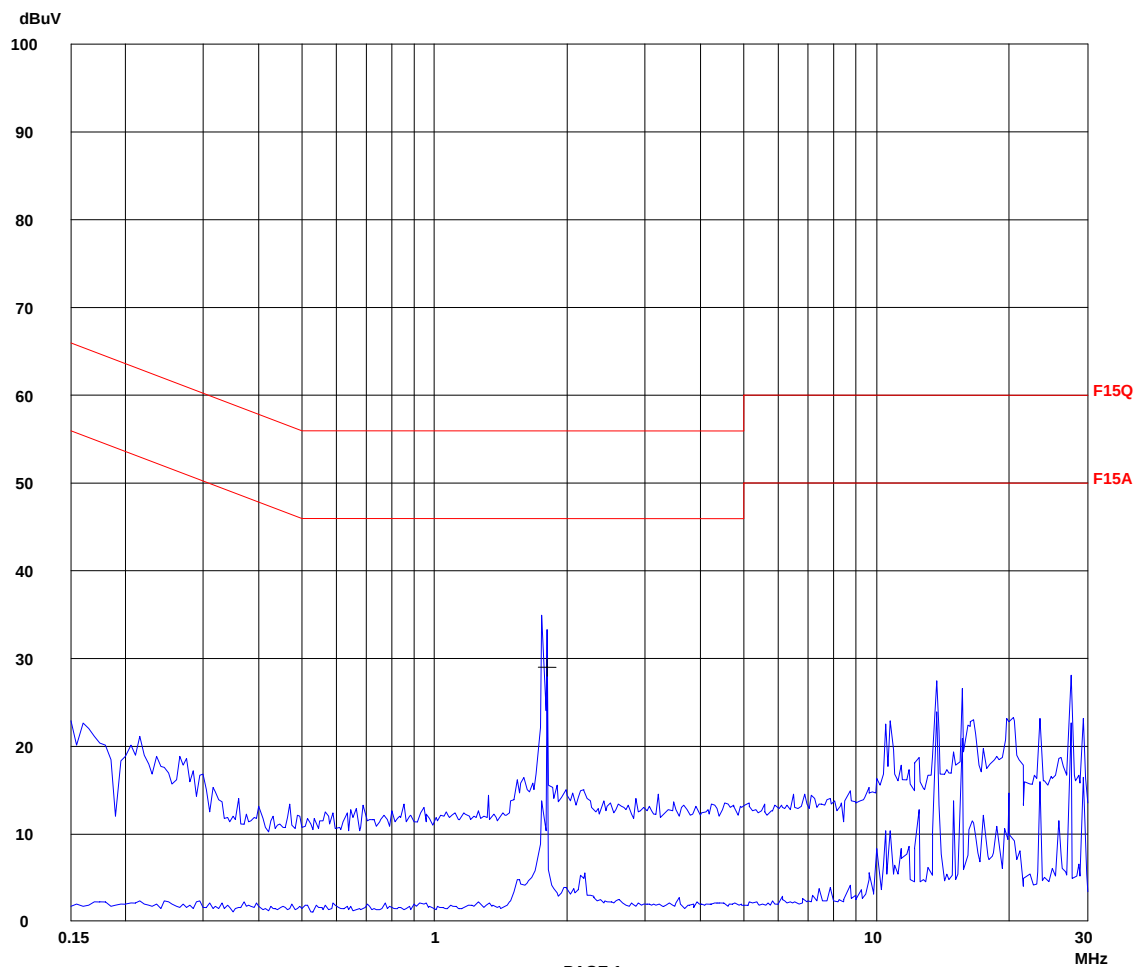

Ctrl No.: N/A



Report No.: HK08060910-1
Model: LS6125-2
Talk Mode
AC Mains “N”

Scan Settings (1 Range)
|----- Frequencies -----||----- Receiver Settings -----|
Start Stop Step IF BW Detector M-Time Atten Preamp OpRge
150k 30M 5k 10k PK+AV 10ms AUTO LN OFF 60dB
Final Measurement Results:

Frequency	QP Level	QP Limit	Delta
MHz	dBuV	dBuV	dB

no Results

Frequency	AV Level	AV Limit	Delta
MHz	dBuV	dBuV	dB

1.79500	28.9	46.0	-17.1
---------	------	------	-------

* limit exceeded