




Report No.: HK08090801-1
DECT Base Talking Mode
AC Mains "N"

Scan Settings (1 Range)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150k	30M	5k	10k	PK+AV	10ms	AUTO	LN OFF	60dB

Final Measurement: x QP / + AV
Meas Time: 1 s
Subranges: 16
Acc Margin: 20dB

Transducer No.	Start	Stop	Name
2	1 9k	30M	EW0700
3	9k	30M	EW2454
12	9k	30M	EW0090

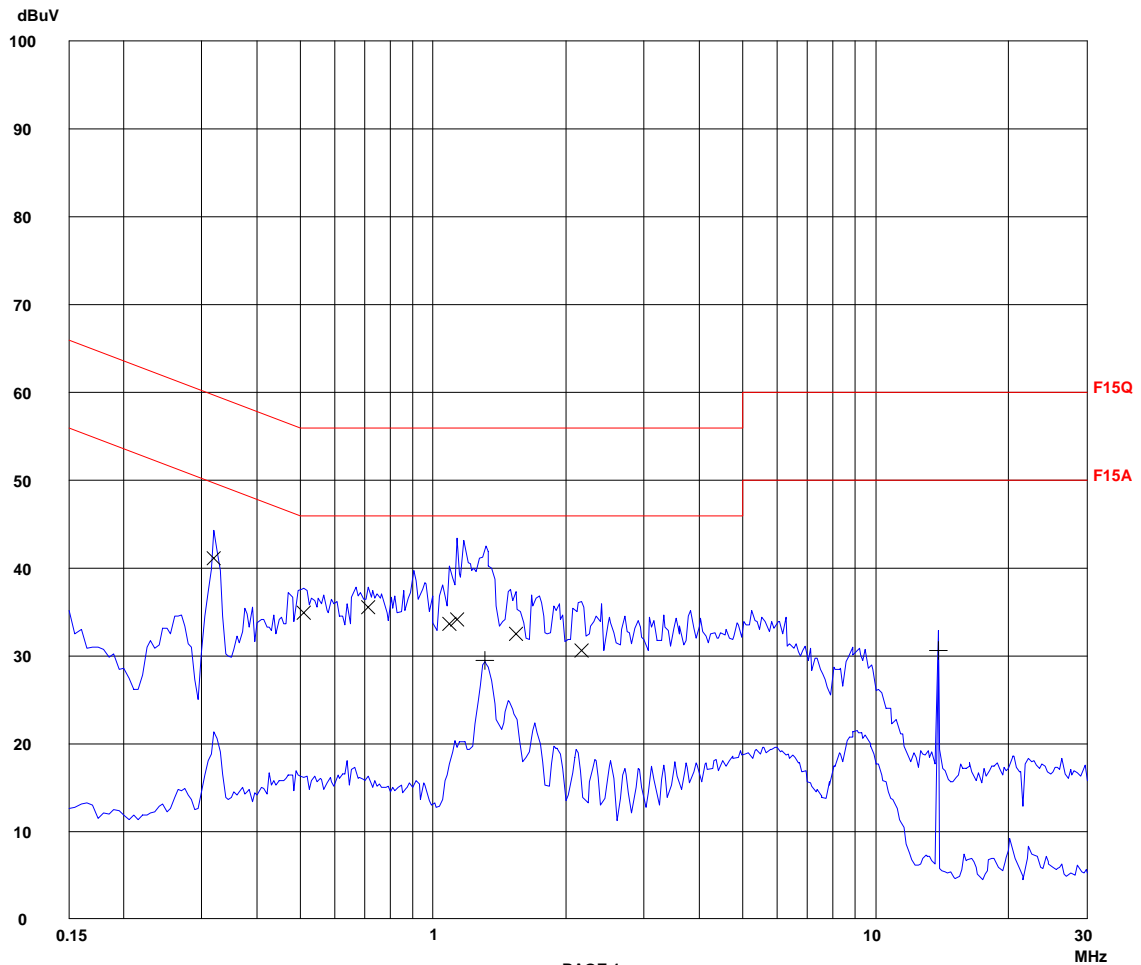



Report No.: HK08090801-1
DECT Base Talking Mode
AC Mains "N"

Scan Settings (1 Range)

|----- Frequencies -----||----- Receiver Settings -----|
Start Stop Step IF BW Detector M-Time Atten Preamp OpRge
150k 30M 5k 10k PK+AV 10ms AUTO LN OFF 60dB

Final Measurement Results:

Frequency	QP Level	QP Limit	Delta
MHz	dBuV	dBuV	dB
0.32000	41.1	59.7	-18.6
0.51000	34.9	56.0	-21.1
0.71500	35.5	56.0	-20.5
1.08500	33.6	56.0	-22.4
1.13500	34.2	56.0	-21.8
1.54000	32.4	56.0	-23.6
2.16000	30.6	56.0	-25.4

Frequency	AV Level	AV Limit	Delta
MHz	dBuV	dBuV	dB
1.31000	29.4	46.0	-16.6
13.82500	30.6	50.0	-19.4

* limit exceeded