




Date: 22.SEP.2010 18:39:34

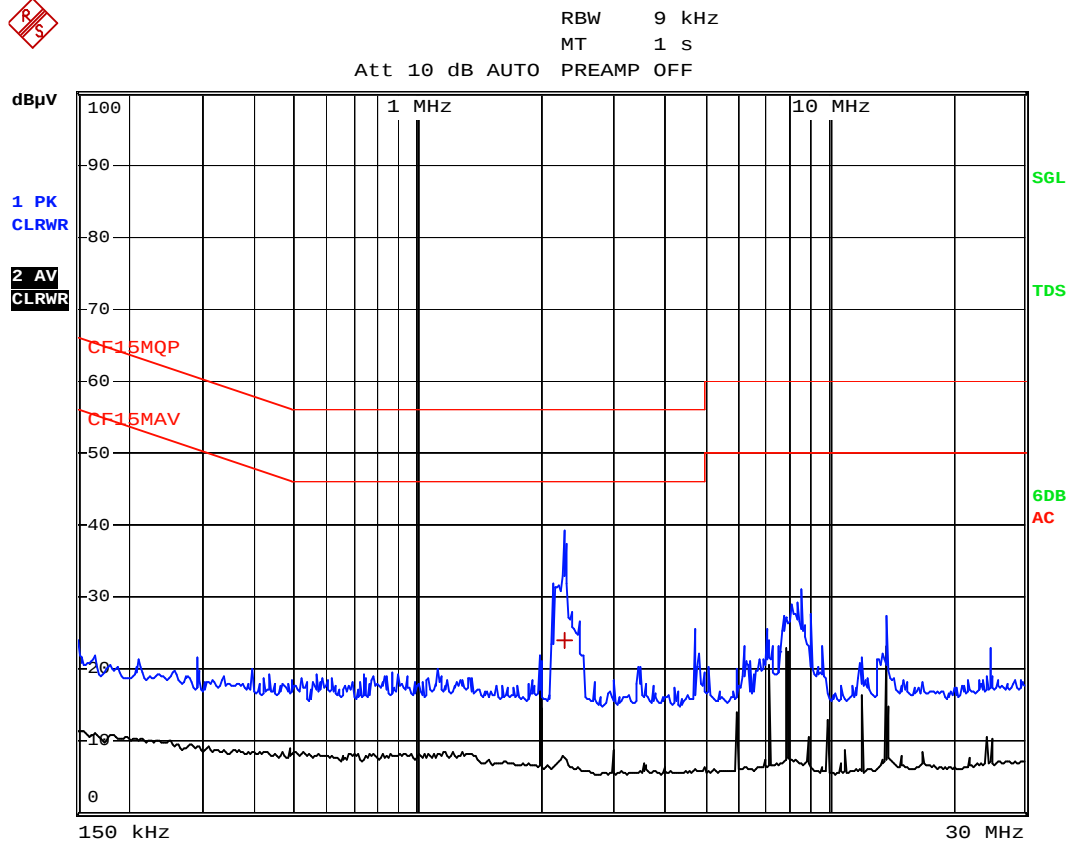


Report no.: HK10090826-1
Model no.: CS6419-2
Ringing Mode
AC Mains

EDIT PEAK LIST (Final Measurement Results)				
Trace1:	CF15MQP			
Trace2:	CF15MAV			
Trace3:	---			
TRACE	FREQUENCY	LEVEL dB μ V		DELTA LIMIT dB
1 Quasi Peak	2.283 MHz	23.98	L1 gnd	-32.01

Date: 22.SEP.2010 18:39:22

Ctrl No.: N/A

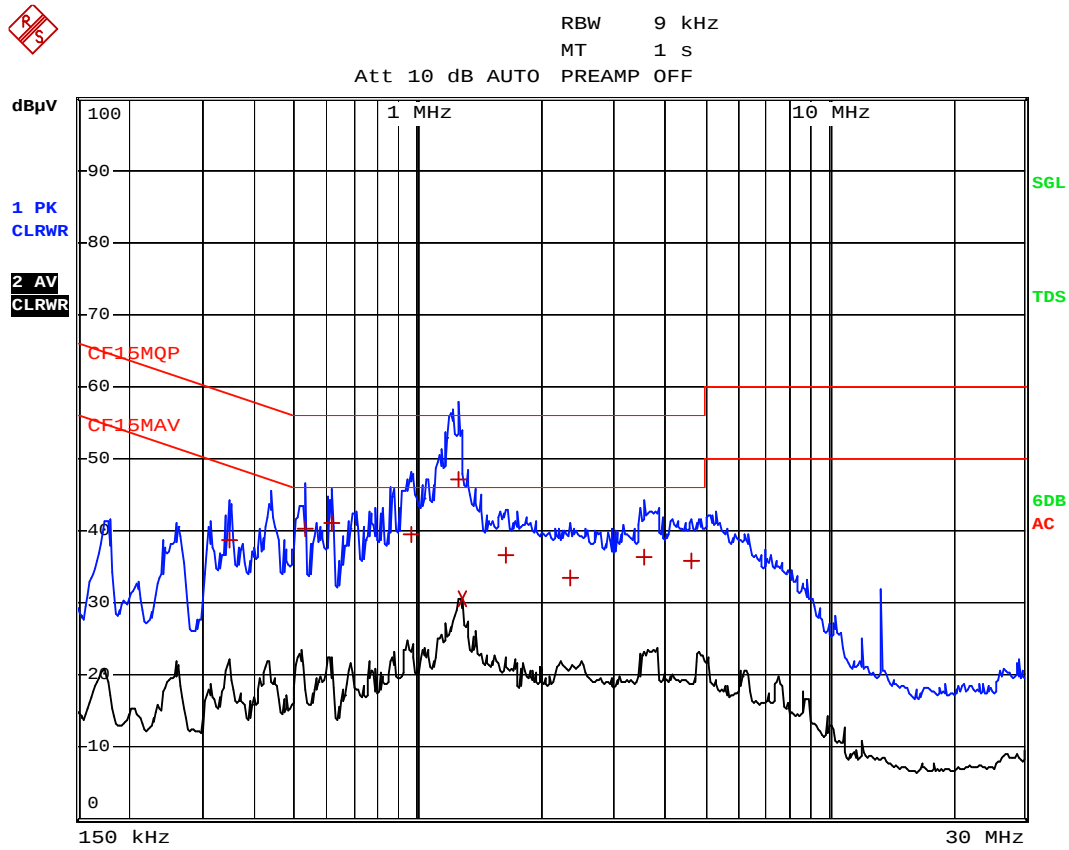

Date: 22.SEP.2010 17:32:33



Report no.: HK10090826-1
Model no.: CS6429-2
Adaptor: Ten Pao
Ringing Mode
AC Mains


EDIT PEAK LIST (Final Measurement Results)					
Trace1:		CF15MQP			
Trace2:		CF15MAV			
Trace3:		---			
TRACE		FREQUENCY	LEVEL dBµV		DELTA LIMIT dB
1	Quasi Peak	348 kHz	38.64	L1 gnd	-20.36
1	Quasi Peak	528 kHz	40.38	N gnd	-15.61
1	Quasi Peak	613.5 kHz	41.13	L1 gnd	-14.86
1	Quasi Peak	964.5 kHz	39.57	L1 gnd	-16.43
1	Quasi Peak	1.2615 MHz	47.04	L1 gnd	-8.95
2	CISPR Average	1.2795 MHz	30.66	N gnd	-15.34
1	Quasi Peak	1.6485 MHz	36.73	N gnd	-19.26
1	Quasi Peak	2.3595 MHz	33.44	N gnd	-22.55
1	Quasi Peak	3.543 MHz	36.22	N gnd	-19.77
1	Quasi Peak	4.632 MHz	35.89	N gnd	-20.10

Date: 22.SEP.2010 17:32:25

Ctrl No.: N/A



RBW 9 kHz
 MT 1 s
 Att 10 dB AUTO PREAMP OFF

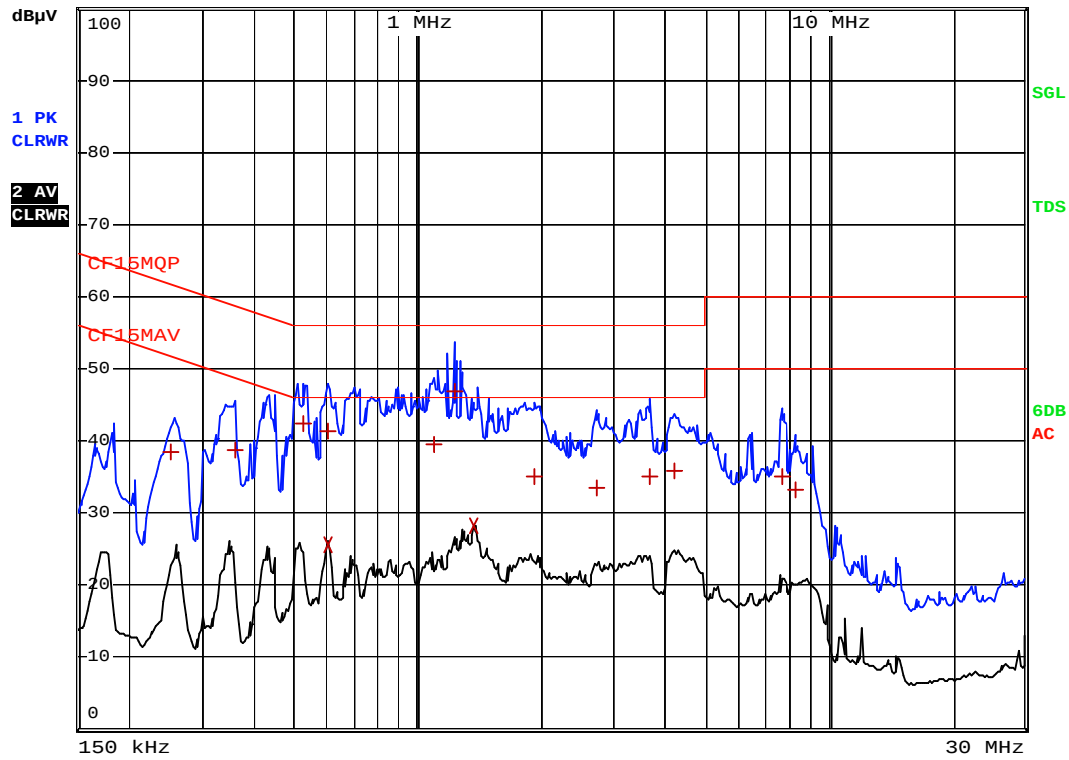

Date: 22.SEP.2010 17:46:52



Report no.: HK10090826-1
Model no.: CS6429-2
Adaptor: Ten Pao
Answer Machine Mode
AC Mains


EDIT PEAK LIST (Final Measurement Results)					
Trace1:	CF15MQP				
Trace2:	CF15MAV				
Trace3:	---				
TRACE	FREQUENCY	LEVEL	dB μ V	DELTA	LIMIT dB
1 Quasi Peak	253.5 kHz	38.55	L1 gnd	-23.08	
1 Quasi Peak	357 kHz	38.72	L1 gnd	-20.07	
1 Quasi Peak	523.5 kHz	42.35	L1 gnd	-13.64	
1 Quasi Peak	604.5 kHz	41.35	L1 gnd	-14.64	
2 CISPR Average	604.5 kHz	25.48	L1 gnd	-20.51	
1 Quasi Peak	1.0905 MHz	39.40	L1 gnd	-16.59	
1 Quasi Peak	1.23 MHz	46.96	N gnd	-9.03	
2 CISPR Average	1.374 MHz	28.31	N gnd	-17.69	
1 Quasi Peak	1.932 MHz	35.15	N gnd	-20.84	
1 Quasi Peak	2.733 MHz	33.35	L1 gnd	-22.64	
1 Quasi Peak	3.6825 MHz	35.08	N gnd	-20.91	
1 Quasi Peak	4.2225 MHz	35.84	N gnd	-20.15	
1 Quasi Peak	7.7055 MHz	34.94	L1 gnd	-25.05	
1 Quasi Peak	8.3355 MHz	33.18	N gnd	-26.81	

Date: 22.SEP.2010 17:46:45

Ctrl No.: N/A



RBW 9 kHz
 MT 1 s
 Att 10 dB AUTO PREAMP OFF

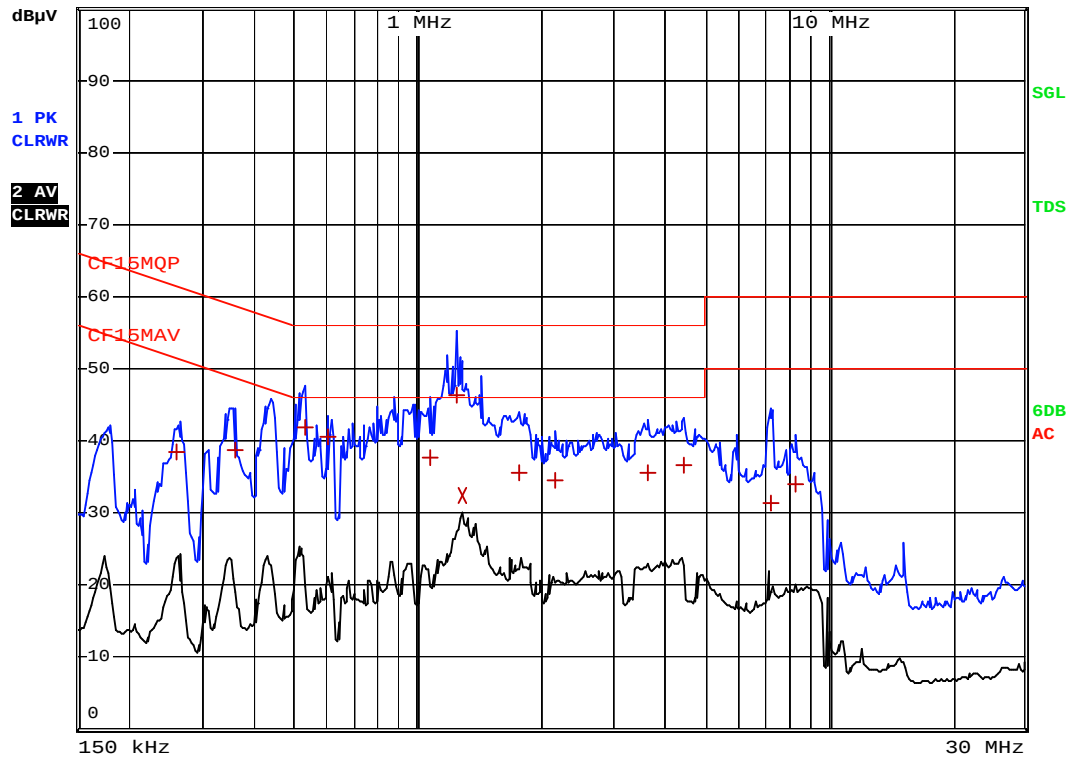

Date: 22.SEP.2010 17:00:34




Report no.: HK10090826-1
Model no.: CS6429-2
Adaptor: Ten Pao
Charging Mode
AC Mains

EDIT PEAK LIST (Final Measurement Results)					
Trace1:	CF15MQP				
Trace2:	CF15MAV				
Trace3:	---				
TRACE	FREQUENCY	LEVEL	dB μ V	DELTA	LIMIT dB
1 Quasi Peak	262.5 kHz	38.42	L1 gnd	-22.92	
1 Quasi Peak	357 kHz	38.73	L1 gnd	-20.05	
1 Quasi Peak	528 kHz	41.86	L1 gnd	-14.13	
1 Quasi Peak	604.5 kHz	40.64	L1 gnd	-15.35	
1 Quasi Peak	1.0725 MHz	37.76	N gnd	-18.23	
1 Quasi Peak	1.239 MHz	46.39	N gnd	-9.60	
2 CISPR Average	1.284 MHz	32.33	N gnd	-13.66	
1 Quasi Peak	1.77 MHz	35.55	N gnd	-20.44	
1 Quasi Peak	2.1525 MHz	34.42	L1 gnd	-21.57	
1 Quasi Peak	3.6375 MHz	35.57	N gnd	-20.42	
1 Quasi Peak	4.4565 MHz	36.59	N gnd	-19.40	
1 Quasi Peak	7.2285 MHz	31.33	N gnd	-28.66	
1 Quasi Peak	8.349 MHz	33.99	N gnd	-26.00	

Date: 22.SEP.2010 17:00:23

Ctrl No.: N/A

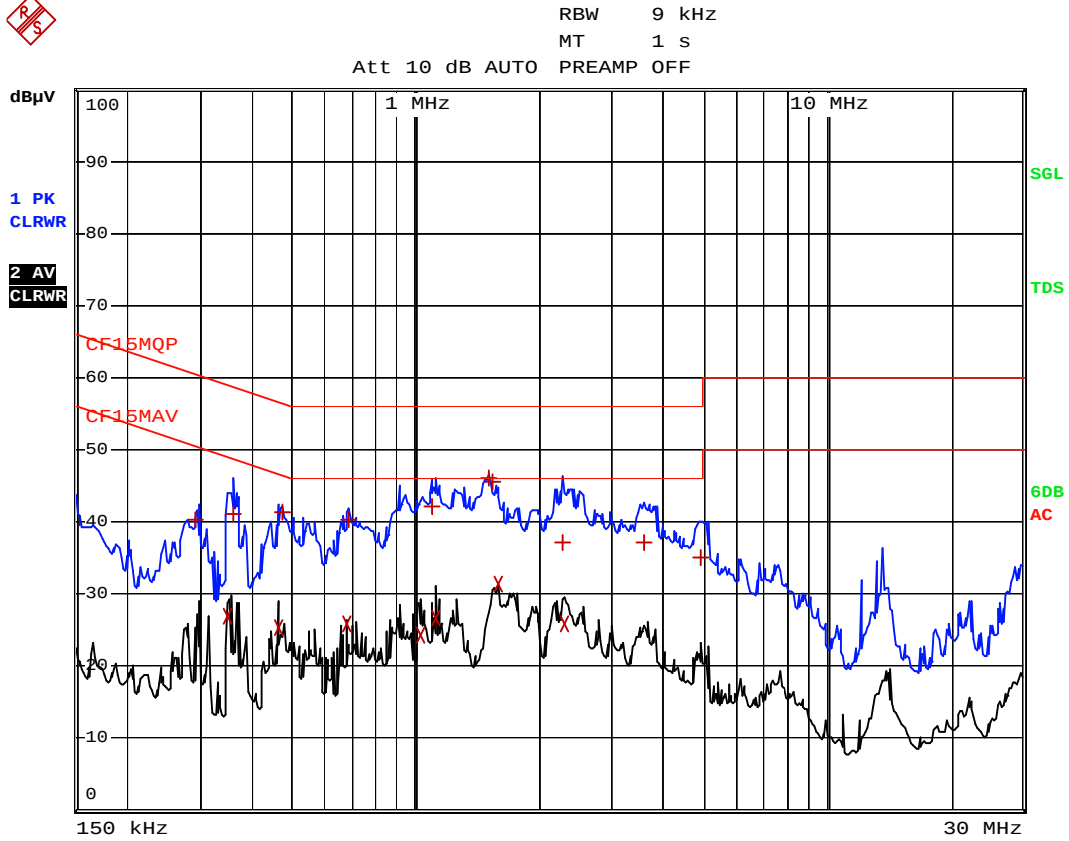

Date: 22.SEP.2010 18:14:45




Report no.: HK10090826-1
Model no.: CS6429-2
Adaptor: Salcomp
Ringing Mode
AC Mains

EDIT PEAK LIST (Final Measurement Results)					
Trace1:	CF15MQP				
Trace2:	CF15MAV				
Trace3:	---				
TRACE	FREQUENCY	LEVEL	dB μ V	DELTA	LIMIT dB
1 Quasi Peak	289.5 kHz	40.34	L1 gnd	-20.19	
2 CISPR Average	352.5 kHz	26.94	N gnd	-21.95	
1 Quasi Peak	357 kHz	41.02	L1 gnd	-17.77	
2 CISPR Average	460.5 kHz	25.29	N gnd	-21.39	
1 Quasi Peak	474 kHz	41.22	N gnd	-15.22	
2 CISPR Average	681 kHz	25.98	L1 gnd	-20.01	
1 Quasi Peak	685.5 kHz	40.33	N gnd	-15.66	
2 CISPR Average	1.032 MHz	24.40	L1 gnd	-21.59	
1 Quasi Peak	1.0905 MHz	42.12	L1 gnd	-13.87	
2 CISPR Average	1.113 MHz	26.74	N gnd	-19.26	
1 Quasi Peak	1.5 MHz	46.05	L1 gnd	-9.94	
1 Quasi Peak	1.545 MHz	45.61	L1 gnd	-10.38	
2 CISPR Average	1.581 MHz	31.48	L1 gnd	-14.51	
1 Quasi Peak	2.2695 MHz	37.05	L1 gnd	-18.94	
2 CISPR Average	2.3145 MHz	25.86	N gnd	-20.13	
1 Quasi Peak	3.597 MHz	37.13	N gnd	-18.86	
1 Quasi Peak	4.9335 MHz	35.02	N gnd	-20.97	

Date: 22.SEP.2010 18:14:36

Ctrl No.: N/A

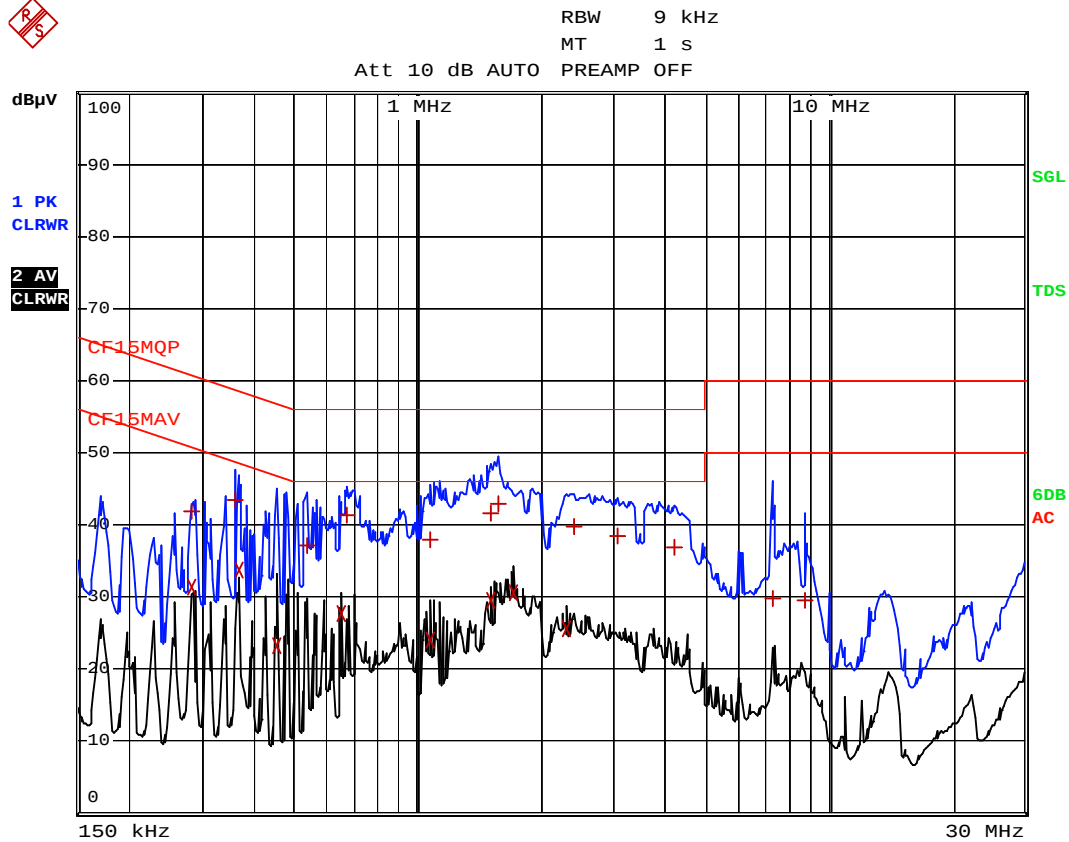

Date: 22.SEP.2010 18:21:16



Report no.: HK10090826-1
Model no.: CS6429-2
Adaptor: Salcomp
Answer Machine Mode
AC Mains

EDIT PEAK LIST (Final Measurement Results)					
Trace1:	CF15MQP				
Trace2:	CF15MAV				
Trace3:	---				
TRACE	FREQUENCY	LEVEL	dB μ V	DELTA	LIMIT dB
1 Quasi Peak	285 kHz	41.86	L1 gnd	-18.80	
2 CISPR Average	285 kHz	31.28	N gnd	-19.38	
1 Quasi Peak	357 kHz	43.40	N gnd	-15.39	
2 CISPR Average	366 kHz	33.72	L1 gnd	-14.86	
2 CISPR Average	451.5 kHz	23.30	N gnd	-23.54	
1 Quasi Peak	537 kHz	37.02	L1 gnd	-18.97	
2 CISPR Average	649.5 kHz	27.75	N gnd	-18.24	
1 Quasi Peak	672 kHz	41.25	L1 gnd	-14.74	
1 Quasi Peak	1.0725 MHz	37.94	N gnd	-18.05	
2 CISPR Average	1.077 MHz	23.88	L1 gnd	-22.11	
1 Quasi Peak	1.5045 MHz	41.59	L1 gnd	-14.40	
2 CISPR Average	1.5135 MHz	29.62	L1 gnd	-16.37	
1 Quasi Peak	1.5675 MHz	42.92	L1 gnd	-13.07	
2 CISPR Average	1.7205 MHz	30.50	N gnd	-15.49	
2 CISPR Average	2.3145 MHz	25.71	N gnd	-20.28	
1 Quasi Peak	2.3955 MHz	39.82	N gnd	-16.17	
1 Quasi Peak	3.057 MHz	38.55	L1 gnd	-17.44	
1 Quasi Peak	4.2135 MHz	36.99	L1 gnd	-19.00	
1 Quasi Peak	7.35 MHz	29.66	N gnd	-30.33	
1 Quasi Peak	8.8125 MHz	29.47	N gnd	-30.53	

Date: 22.SEP.2010 18:21:08

Ctrl No.: N/A