

# Itron, Inc.

## TEST REPORT FOR

### Gas Endpoint Model: 500GB

Tested To The Following Standard:

FCC Part 15 Subpart C Section(s)

15.247  
(FHSS 902-928 MHz)

Report No.: 98971-5

Date of issue: September 6, 2016



This test report bears the accreditation symbol indicating that the testing performed herein meets the test and reporting requirements of ISO/IEC 17025 under the applicable scope of EMC testing for CKC Laboratories, Inc.

We strive to create long-term, trust based relationships by providing sound, adaptive, customer first testing services. We embrace each of our customers' unique EMC challenges, not as an interruption to set processes, but rather as the reason we are in business.

## TABLE OF CONTENTS

Administrative Information .....	3
Test Report Information .....	3
Report Authorization .....	3
Test Facility Information .....	4
Software Versions.....	4
Site Registration & Accreditation Information .....	4
Summary of Results .....	5
Modifications During Testing.....	5
Conditions During Testing.....	5
Equipment Under Test.....	6
General Product Information.....	6
FCC Part 15 Subpart C .....	7
15.247(d) Radiated Emissions & Band Edge .....	7
Supplemental Information.....	25
Measurement Uncertainty .....	25
Emissions Test Details.....	25

## ADMINISTRATIVE INFORMATION

### Test Report Information

**REPORT PREPARED FOR:**

Ittron, Inc.  
2111 N. Molter Road  
Liberty Lake, WA 99019

**REPORT PREPARED BY:**

Terri Rayle  
CKC Laboratories, Inc.  
5046 Sierra Pines Drive  
Mariposa, CA 95338

REPRESENTATIVE: Jay Holcomb  
Customer Reference Number: 104538

Project Number: 98971

DATE OF EQUIPMENT RECEIPT:  
DATE(S) OF TESTING:

August 24, 2016  
August 24 - 26, 2016

### Report Authorization

The test data contained in this report documents the observed testing parameters pertaining to and are relevant for only the sample equipment tested in the agreed upon operational mode(s) and configuration(s) as identified herein. Compliance assessment remains the client's responsibility. This report may not be used to claim product endorsement by A2LA or any government agencies. This test report has been authorized for release under quality control from CKC Laboratories, Inc.



*Steve Behm*  
Director of Quality Assurance & Engineering Services  
CKC Laboratories, Inc.

## Test Facility Information



Our laboratories are configured to effectively test a wide variety of product types. CKC utilizes first class test equipment, anechoic chambers, data acquisition and information services to create accurate, repeatable and affordable test results.

TEST LOCATION(S):  
CKC Laboratories, Inc.  
110 Olinda Place  
Brea, CA 92823

## Software Versions

CKC Laboratories Proprietary Software	Version
EMITest Emissions	5.03.02

## Site Registration & Accreditation Information

Location	CB #	TAIWAN	CANADA	FCC	JAPAN
Brea D	US0060	SL2-IN-E-1146R	3082D-2	100638	A-0147

## SUMMARY OF RESULTS

### Standard / Specification: FCC Part 15 Subpart C - 15.247 (FHSS 902-928MHz)

Test Procedure	Description	Modifications	Results
15.247(a)(1)(i)	Occupied Bandwidth	NA	NP
15.247(a)(1)	Carrier Separation	NA	NP
15.247(a)(1)(i)	Number of Hopping Channels	NA	NP
15.247(a)(1)(i)	Average Time of Occupancy	NA	NP
15.247(b)(2)	Output Power	NA	NP
15.247(d)	RF Conducted Emissions & Band Edge	NA	NP
15.247(d)	Radiated Emissions & Band Edge	NA	Pass
15.207	AC Conducted Emissions	NA	NA1

NA = Not Applicable

NA1 = Not applicable because the EUT only operates on battery power.

NP = CKC Laboratories was not contracted to perform test.

### Modifications During Testing

This list is a summary of the modifications made to the equipment during testing.

#### Summary of Conditions

No modifications were made during testing.

**Modifications listed above must be incorporated into all production units.**

### Conditions During Testing

This list is a summary of the conditions noted to the equipment during testing.

#### Summary of Conditions

None

## EQUIPMENT UNDER TEST (EUT)

During testing numerous configurations may have been utilized. The configurations listed below support compliance to the standard(s) listed in the Summary of Results section.

### Configuration 1

#### *Equipment Tested:*

Device	Manufacturer	Model #	S/N
Gas Endpoint	Itron, Inc.	500GB	NA

#### *Support Equipment:*

Device	Manufacturer	Model #	S/N
None			

### General Product Information:

Product Information	Manufacturer-Provided Details
Equipment Type:	Stand-Alone Equipment
Type of Wideband System:	FHSS
Operating Frequency Range:	902-928 MHz
Number of Hopping Channels:	See supplemental report
Modulation Type(s):	CW, OOK
Maximum Duty Cycle:	See supplemental report.
Number of TX Chains:	1
Antenna Type(s) and Gain:	See supplemental report
Beamforming Type:	None
Antenna Connection Type:	Integral
Nominal Input Voltage:	Battery, 6.3Vdc
Firmware / Software used for Test:	App Version: 1.9.13.174 CSL Version: 2.9.1.1

## FCC Part 15 Subpart C

### 15.247(d) Radiated Emissions & Band Edge

#### Test Setup / Conditions / Data

Test Location: CKC Laboratories, Inc. • 110 N. Olinda Place • Brea, CA 92823 • 714-993-6112  
 Customer: **Itron, Inc.**  
 Specification: **15.247(d)/ 15.209 Radiated Spurious Emissions**  
 Work Order #: **98971** Date: 8/26/2016  
 Test Type: **Maximized Emissions** Time: 08:54:40  
 Tested By: Don Nguyen Sequence#: 6  
 Software: EMITest 5.03.02

*Equipment Tested:*

Device	Manufacturer	Model #	S/N
Configuration 1			

*Support Equipment:*

Device	Manufacturer	Model #	S/N
Configuration 1			

*Test Conditions / Notes:*

The EUT is placed on a Styrofoam platform at 0.8m in height for measurement below 1GHz and 1.5m in height for measurement above 1GHz. The EUT is turned on and set in transmitting mode.  
 The EUT has fresh battery installed. Nominal input voltage is 6.3Vdc.  
 The EUT is tested in preferred orientation declared by the manufacturer.  
 Operating frequency: 903, 910, 915, and 926.8MHz. Modulation: OOK  
 Rated power output: +10dBm

Frequency range of measurement = 9kHz-9.28GHz  
 9 kHz - 150 kHz, RBW=200 Hz, VBW=600 Hz  
 150 kHz -30 MHz, RBW=9 kHz, VBW=27 kHz  
 30 MHz - 1000MHz, RBW=120 kHz, VBW=300 kHz (peak detector), RBW=120 kHz, VBW=1MHz (QP detector)  
 1000 MHz - 9280MHz, RBW=1 MHz, VBW=3 MHz

Test environment conditions:


Temperature: 26°C  
 Relative Humidity: 46%  
 Pressure: 100kPa

Site D

Test Method: ANSI C63.10 (2013)

Note: The highest fundamental power is measured at 99.7 dBuV/m @3m.

Itron, Inc W/O#: 98971 Sequence#: 6 Date: 8/26/2016  
15.247(d)/ 15.209 Radiated Spurious Emissions Test Distance: 3 Meters Vert

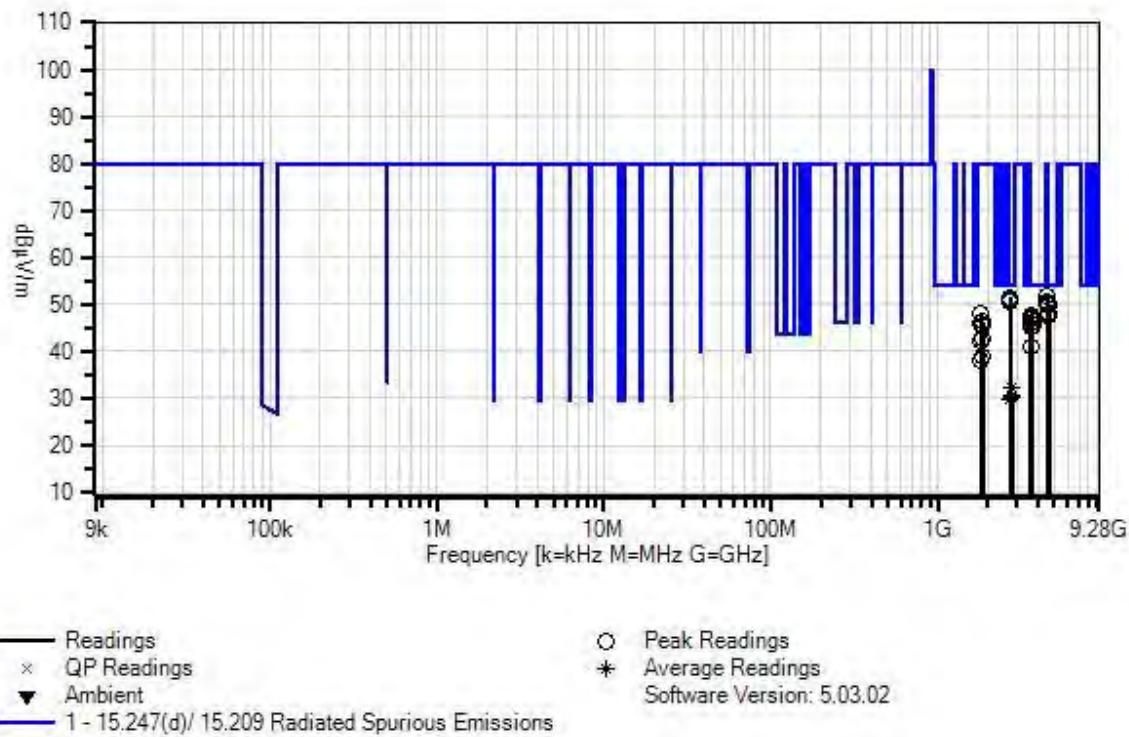

**Test Equipment:**

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
	AN00314	Loop Antenna	6502	5/20/2016	5/20/2018
	AN00010	Preamp	8447D	3/14/2016	3/14/2018
	AN01992	Biconilog Antenna	CBL6111C	12/4/2014	12/4/2016
	ANP05283	Attenuator	ATT-0218-06- NNN-02	5/5/2016	5/5/2018
	ANP05555	Cable	RG223/U	4/5/2016	4/5/2018
	ANP05569	Cable	RG-214/U	4/4/2016	4/4/2018
T1	AN02467	Spectrum Analyzer	E7405A	5/10/2016	5/10/2017
T2	ANP04382	Cable	LDF-50	6/6/2016	6/6/2018
T3	AN00787	Preamp	83017A	6/10/2015	6/10/2017
T4	AN01646	Horn Antenna	3115	3/4/2016	3/4/2018
T5	ANP05563	Cable	ANDL-1-PNMN- 48	6/6/2016	6/6/2018
T6	ANP06977	Cable	PHASEFLEX EJR01N01036.0	4/5/2016	4/5/2018
T7	AN03169	High Pass Filter	HM1155-11SS	6/24/2015	6/24/2017

**Measurement Data:** Reading listed by margin.

Test Distance: 3 Meters

#	Freq	Rdng	T1	T2	T3	T4	Dist	Corr	Spec	Margin	Polar
			T5	T6	T7		Table	dB $\mu$ V/m	dB $\mu$ V/m		
	MHz	dB $\mu$ V	dB	dB	dB	dB					Ant
1	4549.012M	50.0	+0.0	+8.5	-40.2	+29.9	+0.0	52.0	54.0	-2.0	Horiz
			+3.2	+0.5	+0.1						OOK, 10dBm, 910MHz
2	2729.399M	55.5	+0.0	+6.5	-40.0	+26.4	+0.0	51.6	54.0	-2.4	Vert
			+2.6	+0.4	+0.2						OOK, 10dBm, 910MHz
3	2709.000M	55.0	+0.0	+6.4	-39.9	+26.3	+0.0	51.0	54.0	-3.0	Horiz
			+2.6	+0.4	+0.2						OOK, 10dBm, 903MHz
4	4514.992M	48.8	+0.0	+8.5	-40.2	+29.9	+0.0	50.8	54.0	-3.2	Horiz
			+3.2	+0.5	+0.1						OOK, 10dBm, 903MHz
5	2709.017M	54.4	+0.0	+6.4	-39.9	+26.3	+0.0	50.4	54.0	-3.6	Vert
			+2.6	+0.4	+0.2						OOK, 10dBm, 903MHz
6	4548.999M	48.1	+0.0	+8.5	-40.2	+29.9	+0.0	50.1	54.0	-3.9	Vert
			+3.2	+0.5	+0.1						OOK, 10dBm, 910MHz
7	4574.019M	47.8	+0.0	+8.6	-40.2	+29.9	+0.0	50.0	54.0	-4.0	Horiz
			+3.3	+0.5	+0.1						OOK, 10dBm, 915MHz
8	4633.972M	47.3	+0.0	+8.6	-40.2	+29.9	+0.0	49.6	54.0	-4.4	Horiz
			+3.3	+0.6	+0.1						OOK, 10dBm, 926.8MHz
9	4574.026M	46.0	+0.0	+8.6	-40.2	+29.9	+0.0	48.2	54.0	-5.8	Vert
			+3.3	+0.5	+0.1						OOK, 10dBm, 915MHz

10	4515.017M	45.6	+0.0 +3.2	+8.5 +0.5	-40.2 +0.1	+29.9	+0.0	47.6	54.0	-6.4	Vert
									OOK, 10dBm, 903MHz		
11	4634.025M	45.3	+0.0 +3.3	+8.6 +0.6	-40.2 +0.1	+29.9	+0.0	47.6	54.0	-6.4	Vert
									OOK, 10dBm, 926.8MHz		
12	3612.017M	48.9	+0.0 +3.0	+7.3 +0.6	-40.4 +0.2	+27.8	+0.0	47.4	54.0	-6.6	Vert
									OOK, 10dBm, 903MHz		
13	3611.992M	48.9	+0.0 +3.0	+7.3 +0.6	-40.4 +0.2	+27.8	+0.0	47.4	54.0	-6.6	Horiz
									OOK, 10dBm, 903MHz		
14	3659.251M	48.0	+0.0 +3.1	+7.4 +0.6	-40.4 +0.1	+27.9	+0.0	46.7	54.0	-7.3	Vert
									OOK, 10dBm, 915MHz		
15	3707.225M	47.4	+0.0 +3.1	+7.4 +0.6	-40.4 +0.1	+28.0	+0.0	46.2	54.0	-7.8	Vert
									OOK, 10dBm, 926.8MHz		
16	3639.262M	47.5	+0.0 +3.0	+7.3 +0.6	-40.4 +0.1	+27.8	+0.0	45.9	54.0	-8.1	Horiz
									OOK, 10dBm, 910MHz		
17	3707.172M	46.8	+0.0 +3.1	+7.4 +0.6	-40.4 +0.1	+28.0	+0.0	45.6	54.0	-8.4	Horiz
									OOK, 10dBm, 926.8MHz		
18	3659.219M	46.7	+0.0 +3.1	+7.4 +0.6	-40.4 +0.1	+27.9	+0.0	45.4	54.0	-8.6	Horiz
									OOK, 10dBm, 915MHz		
19	3639.199M	42.7	+0.0 +3.0	+7.3 +0.6	-40.4 +0.1	+27.8	+0.0	41.1	54.0	-12.9	Vert
									OOK, 10dBm, 910MHz		
20	2744.403M Ave	36.0	+0.0 +2.6	+6.5 +0.4	-40.0 +0.2	+26.4	+0.0	32.1	54.0	-21.9	Horiz
									OOK, 10dBm, 915MHz		
^	2744.403M	60.5	+0.0 +2.6	+6.5 +0.4	-40.0 +0.2	+26.4	+0.0	56.6	54.0	+2.6	Horiz
									OOK, 10dBm, 915MHz		
22	2780.372M Ave	34.2	+0.0 +2.6	+6.6 +0.4	-40.0 +0.2	+26.6	+0.0	30.6	54.0	-23.4	Horiz
									OOK, 10dBm, 926.8MHz		
^	2780.372M	58.6	+0.0 +2.6	+6.6 +0.4	-40.0 +0.2	+26.6	+0.0	55.0	54.0	+1.0	Horiz
									OOK, 10dBm, 926.8MHz		
24	2744.414M Ave	34.4	+0.0 +2.6	+6.5 +0.4	-40.0 +0.2	+26.4	+0.0	30.5	54.0	-23.5	Vert
									OOK, 10dBm, 915MHz		
^	2744.414M	57.4	+0.0 +2.6	+6.5 +0.4	-40.0 +0.2	+26.4	+0.0	53.5	54.0	-0.5	Vert
									OOK, 10dBm, 915MHz		
26	2780.379M Ave	33.7	+0.0 +2.6	+6.6 +0.4	-40.0 +0.2	+26.6	+0.0	30.1	54.0	-23.9	Vert
									OOK, 10dBm, 926.8MHz		

^	2780.379M	60.5	+0.0 +2.6	+6.6 +0.4	-40.0 +0.2	+26.6	+0.0	56.9	54.0 OOK, 10dBm, 926.8MHz	+2.9	Vert
28	2729.404M	33.8	+0.0 +2.6	+6.5 +0.4	-40.0 +0.2	+26.4	+0.0	29.9	54.0 OOK, 10dBm, 910MHz	-24.1	Horiz
^	2729.404M	57.8	+0.0 +2.6	+6.5 +0.4	-40.0 +0.2	+26.4	+0.0	53.9	54.0 OOK, 10dBm, 910MHz	-0.1	Horiz
30	1805.992M	55.7	+0.0 +2.2	+5.0 +0.5	-39.4 +0.3	+23.8	+0.0	48.1	79.7 OOK, 10dBm, 903MHz	-31.6	Horiz
31	1853.580M	53.6	+0.0 +2.3	+5.2 +0.5	-39.5 +0.3	+23.9	+0.0	46.3	79.7 OOK, 10dBm, 926.8MHz	-33.4	Horiz
32	1819.621M	53.6	+0.0 +2.2	+5.1 +0.5	-39.4 +0.3	+23.8	+0.0	46.1	79.7 OOK, 10dBm, 910MHz	-33.6	Horiz
33	1829.650M	53.2	+0.0 +2.2	+5.1 +0.5	-39.4 +0.3	+23.8	+0.0	45.7	79.7 OOK, 10dBm, 915MHz	-34.0	Horiz
34	1853.625M	50.0	+0.0 +2.3	+5.2 +0.5	-39.5 +0.3	+23.9	+0.0	42.7	79.7 OOK, 10dBm, 926.8MHz	-37.0	Vert
35	1806.017M	49.7	+0.0 +2.2	+5.0 +0.5	-39.4 +0.3	+23.8	+0.0	42.1	79.7 OOK, 10dBm, 903MHz	-37.6	Vert
36	1829.668M	46.5	+0.0 +2.2	+5.1 +0.5	-39.4 +0.3	+23.8	+0.0	39.0	79.7 OOK, 10dBm, 915MHz	-40.7	Vert
37	1819.633M	45.5	+0.0 +2.2	+5.1 +0.5	-39.4 +0.3	+23.8	+0.0	38.0	79.7 OOK, 10dBm, 910MHz	-41.7	Vert

Test Location: CKC Laboratories, Inc. • 110 N. Olinda Place • Brea, CA 92823 • 714-993-6112  
 Customer: **Itron, Inc.**  
 Specification: **15.247(d) / 15.209 Radiated Spurious Emissions**  
 Work Order #: **98971** Date: 8/25/2016  
 Test Type: **Maximized Emissions** Time: 11:02:20  
 Tested By: Don Nguyen Sequence#: 5  
 Software: EMITest 5.03.02

***Equipment Tested:***

Device	Manufacturer	Model #	S/N
Configuration 1			

***Support Equipment:***

Device	Manufacturer	Model #	S/N
Configuration 1			

***Test Conditions / Notes:***

The EUT is placed on a Styrofoam platform at 0.8m in height for measurement below 1GHz and 1.5m in height for measurement above 1GHz. The EUT is turned on and set in transmitting mode.  
 The EUT has fresh battery installed. Nominal input voltage is 6.3Vdc.  
 The EUT is tested in preferred orientation declared by the manufacturer.  
 Operating frequency: 902.2, 910, 915, and 927.75MHz. Modulation: CW  
 Operating frequency: 903, 926.8MHz. Modulation: OOK  
 Rated power output: +27dBm

Frequency range of measurement = 9kHz-9.28GHz  
 9 kHz - 150 kHz, RBW=200 Hz, VBW=600 Hz  
 150 kHz -30 MHz, RBW=9 kHz, VBW=27 kHz  
 30 MHz - 1000MHz, RBW=120 kHz, VBW=300 kHz (peak detector), RBW=120 kHz, VBW=1MHz (QP detector)  
 1000 MHz - 9280MHz, RBW=1 MHz, VBW=3 MHz

Test environment conditions:


Temperature: 26°C  
 Relative Humidity: 46%  
 Pressure: 100kPa

Site D

Test Method: ANSI C63.10 (2013)

Note: The highest fundamental power is measured at 118.5 dBuV/m.

Itron, Inc WO#: 98971 Sequence#: 5 Date: 8/25/2016  
15.247(d)/ 15.209 Radiated Spurious Emissions Test Distance: 3 Meters Horiz

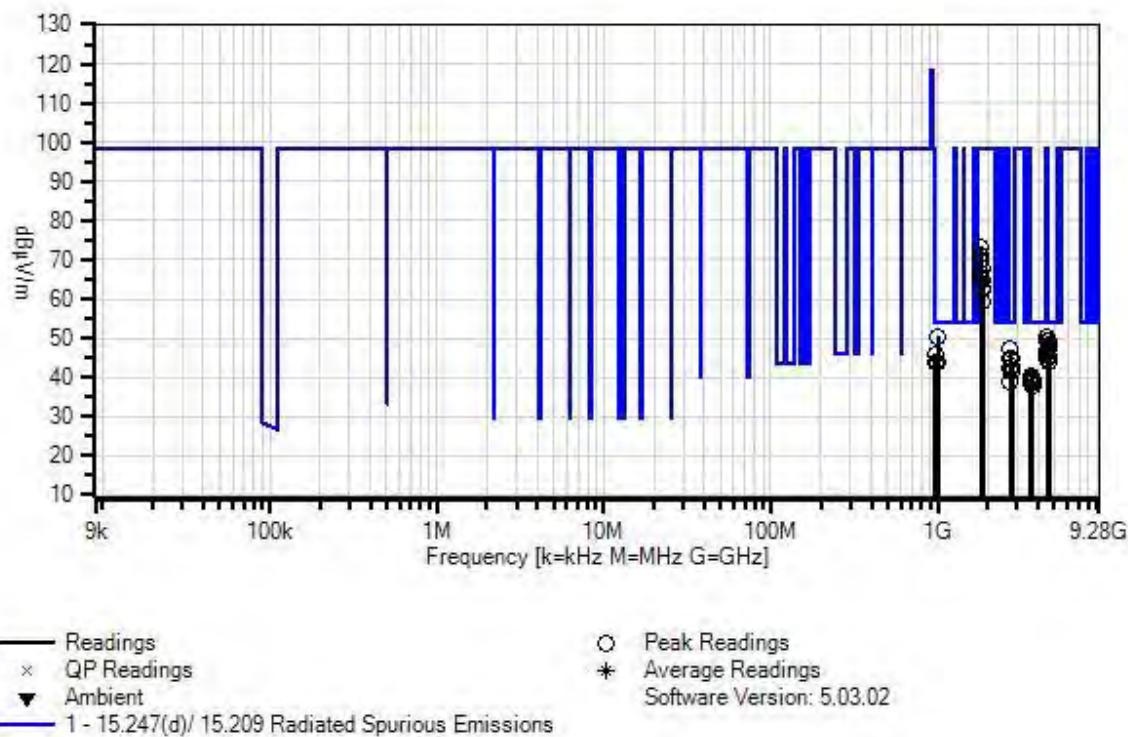

**Test Equipment:**

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
	AN00314	Loop Antenna	6502	5/20/2016	5/20/2018
T1	AN00010	Preamp	8447D	3/14/2016	3/14/2018
T2	AN01992	Biconilog Antenna	CBL6111C	12/4/2014	12/4/2016
T3	ANP05283	Attenuator	ATT-0218-06- NNN-02	5/5/2016	5/5/2018
T4	ANP05555	Cable	RG223/U	4/5/2016	4/5/2018
T5	ANP05569	Cable	RG-214/U	4/4/2016	4/4/2018
T6	AN02467	Spectrum Analyzer	E7405A	5/10/2016	5/10/2017
T7	ANP04382	Cable	LDF-50	6/6/2016	6/6/2018
T8	AN00787	Preamp	83017A	6/10/2015	6/10/2017
T9	AN01646	Horn Antenna	3115	3/4/2016	3/4/2018
T10	ANP05563	Cable	ANDL-1-PNMN- 48	6/6/2016	6/6/2018
T11	ANP06977	Cable	PHASEFLEX EJR01N01036.0	4/5/2016	4/5/2018
T12	AN03169	High Pass Filter	HM1155-11SS	6/24/2015	6/24/2017

**Measurement Data:** Reading listed by margin. Test Distance: 3 Meters

#	Freq	Rdng	T1	T2	T3	T4	Dist	Corr	Spec	Margin	Polar
			T5	T6	T7	T8					
			T9	T10	T11	T12					
	MHz	dB $\mu$ V	dB	dB	dB	dB	Table	dB $\mu$ V/m	dB $\mu$ V/m	dB	Ant
1	4514.942M	48.5	+0.0	+0.0	+0.0	+0.0	+0.0	50.5	54.0	-3.5	Vert
			+0.0	+0.0	+8.5	-40.2				OOK, 27dBm,	
			+29.9	+3.2	+0.5	+0.1				903MHz	
2	998.109M	40.4	-27.4	+23.6	+5.9	+0.6	+0.0	50.4	54.0	-3.6	Vert
			+3.8	+0.0	+3.5	+0.0					
			+0.0	+0.0	+0.0	+0.0					
3	4574.996M	47.0	+0.0	+0.0	+0.0	+0.0	+0.0	49.2	54.0	-4.8	Vert
			+0.0	+0.0	+8.6	-40.2				CW, 27dBm,	
			+29.9	+3.3	+0.5	+0.1				915MHz	
4	4549.996M	47.1	+0.0	+0.0	+0.0	+0.0	+0.0	49.1	54.0	-4.9	Vert
			+0.0	+0.0	+8.5	-40.2				CW, 27dBm,	
			+29.9	+3.2	+0.5	+0.1				910MHz	
5	4638.746M	46.2	+0.0	+0.0	+0.0	+0.0	+0.0	48.5	54.0	-5.5	Vert
			+0.0	+0.0	+8.6	-40.2				CW, 27dBm,	
			+29.9	+3.3	+0.6	+0.1				927.75MHz	
6	4633.992M	45.3	+0.0	+0.0	+0.0	+0.0	+0.0	47.6	54.0	-6.4	Vert
			+0.0	+0.0	+8.6	-40.2				OOK, 27dBm,	
			+29.9	+3.3	+0.6	+0.1				926.8MHz	
7	4633.992M	45.0	+0.0	+0.0	+0.0	+0.0	+0.0	47.3	54.0	-6.7	Horiz
			+0.0	+0.0	+8.6	-40.2				OOK, 27dBm,	
			+29.9	+3.3	+0.6	+0.1				926.8MHz	
8	2708.992M	51.3	+0.0	+0.0	+0.0	+0.0	+0.0	47.3	54.0	-6.7	Vert
			+0.0	+0.0	+6.4	-39.9				OOK, 27dBm,	
			+26.3	+2.6	+0.4	+0.2				903MHz	
9	4514.992M	45.0	+0.0	+0.0	+0.0	+0.0	+0.0	47.0	54.0	-7.0	Horiz
			+0.0	+0.0	+8.5	-40.2				OOK, 27dBm,	
			+29.9	+3.2	+0.5	+0.1				903MHz	

10	4510.996M	44.5	+0.0	+0.0	+0.0	+0.0	+0.0	46.5	54.0	-7.5	Vert
			+0.0	+0.0	+8.5	-40.2			CW, 27dBm,		
			+29.9	+3.2	+0.5	+0.1			902.2MHz		
11	961.982M	36.7	-27.5	+23.2	+5.9	+0.6	+0.0	46.0	54.0	-8.0	Vert
			+3.7	+0.0	+3.4	+0.0					
			+0.0	+0.0	+0.0	+0.0					
12	4638.746M	43.2	+0.0	+0.0	+0.0	+0.0	+0.0	45.5	54.0	-8.5	Horiz
			+0.0	+0.0	+8.6	-40.2			CW, 27dBm,		
			+29.9	+3.3	+0.6	+0.1			927.75MHz		
13	2706.596M	49.1	+0.0	+0.0	+0.0	+0.0	+0.0	45.0	54.0	-9.0	Vert
			+0.0	+0.0	+6.4	-39.9			CW, 27dBm,		
			+26.2	+2.6	+0.4	+0.2			902.2MHz		
14	2744.996M	48.9	+0.0	+0.0	+0.0	+0.0	+0.0	45.0	54.0	-9.0	Vert
			+0.0	+0.0	+6.5	-40.0			CW, 27dBm,		
			+26.4	+2.6	+0.4	+0.2			915MHz		
15	2708.992M	49.0	+0.0	+0.0	+0.0	+0.0	+0.0	45.0	54.0	-9.0	Horiz
			+0.0	+0.0	+6.4	-39.9			OOK, 27dBm,		
			+26.3	+2.6	+0.4	+0.2			903MHz		
16	4510.996M	42.7	+0.0	+0.0	+0.0	+0.0	+0.0	44.7	54.0	-9.3	Horiz
			+0.0	+0.0	+8.5	-40.2			CW, 27dBm,		
			+29.9	+3.2	+0.5	+0.1			902.2MHz		
17	2745.021M	48.6	+0.0	+0.0	+0.0	+0.0	+0.0	44.7	54.0	-9.3	Horiz
			+0.0	+0.0	+6.5	-40.0			CW, 27dBm,		
			+26.4	+2.6	+0.4	+0.2			915MHz		
18	4549.996M	42.7	+0.0	+0.0	+0.0	+0.0	+0.0	44.7	54.0	-9.3	Horiz
			+0.0	+0.0	+8.5	-40.2			CW, 27dBm,		
			+29.9	+3.2	+0.5	+0.1			910MHz		
19	2729.996M	48.6	+0.0	+0.0	+0.0	+0.0	+0.0	44.7	54.0	-9.3	Vert
			+0.0	+0.0	+6.5	-40.0			CW, 27dBm,		
			+26.4	+2.6	+0.4	+0.2			910MHz		
20	4575.021M	41.9	+0.0	+0.0	+0.0	+0.0	+0.0	44.1	54.0	-9.9	Horiz
			+0.0	+0.0	+8.6	-40.2			CW, 27dBm,		
			+29.9	+3.3	+0.5	+0.1			915MHz		
21	993.019M	34.1	-27.4	+23.5	+5.9	+0.6	+0.0	44.0	54.0	-10.0	Vert
			+3.8	+0.0	+3.5	+0.0					
			+0.0	+0.0	+0.0	+0.0					
22	966.990M	34.5	-27.5	+23.3	+5.9	+0.6	+0.0	43.9	54.0	-10.1	Vert
			+3.7	+0.0	+3.4	+0.0					
			+0.0	+0.0	+0.0	+0.0					
23	2780.392M	46.5	+0.0	+0.0	+0.0	+0.0	+0.0	42.9	54.0	-11.1	Vert
			+0.0	+0.0	+6.6	-40.0			OOK, 27dBm,		
			+26.6	+2.6	+0.4	+0.2			926.8MHz		
24	2729.996M	46.0	+0.0	+0.0	+0.0	+0.0	+0.0	42.1	54.0	-11.9	Horiz
			+0.0	+0.0	+6.5	-40.0			CW, 27dBm,		
			+26.4	+2.6	+0.4	+0.2			910MHz		
25	2783.246M	45.1	+0.0	+0.0	+0.0	+0.0	+0.0	41.5	54.0	-12.5	Horiz
			+0.0	+0.0	+6.6	-40.0			CW, 27dBm,		
			+26.6	+2.6	+0.4	+0.2			927.75MHz		
26	2780.392M	44.9	+0.0	+0.0	+0.0	+0.0	+0.0	41.3	54.0	-12.7	Horiz
			+0.0	+0.0	+6.6	-40.0			OOK, 27dBm,		
			+26.6	+2.6	+0.4	+0.2			926.8MHz		

27	2783.246M	44.9	+0.0	+0.0	+0.0	+0.0	+0.0	41.3	54.0	-12.7	Vert
			+0.0	+0.0	+6.6	-40.0			CW, 27dBm,		
			+26.6	+2.6	+0.4	+0.2			927.75MHz		
28	3659.996M	41.5	+0.0	+0.0	+0.0	+0.0	+0.0	40.2	54.0	-13.8	Vert
			+0.0	+0.0	+7.4	-40.4			CW, 27dBm,		
			+27.9	+3.1	+0.6	+0.1			915MHz		
29	3639.996M	41.7	+0.0	+0.0	+0.0	+0.0	+0.0	40.1	54.0	-13.9	Vert
			+0.0	+0.0	+7.3	-40.4			CW, 27dBm,		
			+27.8	+3.0	+0.6	+0.1			910MHz		
30	3707.192M	40.8	+0.0	+0.0	+0.0	+0.0	+0.0	39.6	54.0	-14.4	Vert
			+0.0	+0.0	+7.4	-40.4			OOK, 27dBm,		
			+28.0	+3.1	+0.6	+0.1			926.8MHz		
31	3710.996M	40.6	+0.0	+0.0	+0.0	+0.0	+0.0	39.4	54.0	-14.6	Vert
			+0.0	+0.0	+7.4	-40.4			CW, 27dBm,		
			+28.0	+3.1	+0.6	+0.1			927.75MHz		
32	3611.992M	40.6	+0.0	+0.0	+0.0	+0.0	+0.0	39.1	54.0	-14.9	Vert
			+0.0	+0.0	+7.3	-40.4			OOK, 27dBm,		
			+27.8	+3.0	+0.6	+0.2			903MHz		
33	3608.796M	40.5	+0.0	+0.0	+0.0	+0.0	+0.0	39.0	54.0	-15.0	Vert
			+0.0	+0.0	+7.3	-40.4			CW, 27dBm,		
			+27.8	+3.0	+0.6	+0.2			902.2MHz		
34	2706.596M	43.0	+0.0	+0.0	+0.0	+0.0	+0.0	38.9	54.0	-15.1	Horiz
			+0.0	+0.0	+6.4	-39.9			CW, 27dBm,		
			+26.2	+2.6	+0.4	+0.2			902.2MHz		
35	3707.192M	40.0	+0.0	+0.0	+0.0	+0.0	+0.0	38.8	54.0	-15.2	Horiz
			+0.0	+0.0	+7.4	-40.4			OOK, 27dBm,		
			+28.0	+3.1	+0.6	+0.1			926.8MHz		
36	3611.992M	40.0	+0.0	+0.0	+0.0	+0.0	+0.0	38.5	54.0	-15.5	Horiz
			+0.0	+0.0	+7.3	-40.4			OOK, 27dBm,		
			+27.8	+3.0	+0.6	+0.2			903MHz		
37	3639.996M	39.9	+0.0	+0.0	+0.0	+0.0	+0.0	38.3	54.0	-15.7	Horiz
			+0.0	+0.0	+7.3	-40.4			CW, 27dBm,		
			+27.8	+3.0	+0.6	+0.1			910MHz		
38	3659.996M	39.6	+0.0	+0.0	+0.0	+0.0	+0.0	38.3	54.0	-15.7	Horiz
			+0.0	+0.0	+7.4	-40.4			CW, 27dBm,		
			+27.9	+3.1	+0.6	+0.1			915MHz		
39	3608.796M	39.8	+0.0	+0.0	+0.0	+0.0	+0.0	38.3	54.0	-15.7	Horiz
			+0.0	+0.0	+7.3	-40.4			CW, 27dBm,		
			+27.8	+3.0	+0.6	+0.2			902.2MHz		
40	3710.996M	39.2	+0.0	+0.0	+0.0	+0.0	+0.0	38.0	54.0	-16.0	Horiz
			+0.0	+0.0	+7.4	-40.4			CW, 27dBm,		
			+28.0	+3.1	+0.6	+0.1			927.75MHz		
41	1804.396M	80.6	+0.0	+0.0	+0.0	+0.0	+0.0	73.0	98.5	-25.5	Vert
			+0.0	+0.0	+5.0	-39.4			CW, 27dBm,		
			+23.8	+2.2	+0.5	+0.3			902.2MHz		
42	1805.992M	78.6	+0.0	+0.0	+0.0	+0.0	+0.0	71.0	98.5	-27.5	Vert
			+0.0	+0.0	+5.0	-39.4			OOK, 27dBm,		
			+23.8	+2.2	+0.5	+0.3			903MHz		
43	1819.996M	77.2	+0.0	+0.0	+0.0	+0.0	+0.0	69.7	98.5	-28.8	Vert
			+0.0	+0.0	+5.1	-39.4			CW, 27dBm,		
			+23.8	+2.2	+0.5	+0.3			910MHz		

44	1829.996M	75.1	+0.0	+0.0	+0.0	+0.0	+0.0	67.6	98.5	-30.9	Vert
			+0.0	+0.0	+5.1	-39.4			CW, 27dBm,		
		+23.8	+2.2	+0.5	+0.3				915MHz		
45	1804.396M	74.5	+0.0	+0.0	+0.0	+0.0	+0.0	66.9	98.5	-31.6	Horiz
			+0.0	+0.0	+5.0	-39.4			CW, 27dBm,		
		+23.8	+2.2	+0.5	+0.3				902.2MHz		
46	1819.996M	73.3	+0.0	+0.0	+0.0	+0.0	+0.0	65.8	98.5	-32.7	Horiz
			+0.0	+0.0	+5.1	-39.4			CW, 27dBm,		
		+23.8	+2.2	+0.5	+0.3				910MHz		
47	1805.992M	72.9	+0.0	+0.0	+0.0	+0.0	+0.0	65.3	98.5	-33.2	Horiz
			+0.0	+0.0	+5.0	-39.4			OOK, 27dBm,		
		+23.8	+2.2	+0.5	+0.3				903MHz		
48	1853.592M	72.1	+0.0	+0.0	+0.0	+0.0	+0.0	64.8	98.5	-33.7	Vert
			+0.0	+0.0	+5.2	-39.5			OOK, 27dBm,		
		+23.9	+2.3	+0.5	+0.3				926.8MHz		
49	1855.496M	70.1	+0.0	+0.0	+0.0	+0.0	+0.0	62.8	98.5	-35.7	Vert
			+0.0	+0.0	+5.2	-39.5			CW, 27dBm,		
		+23.9	+2.3	+0.5	+0.3				927.75MHz		
50	1830.021M	69.7	+0.0	+0.0	+0.0	+0.0	+0.0	62.2	98.5	-36.3	Horiz
			+0.0	+0.0	+5.1	-39.4			CW, 27dBm,		
		+23.8	+2.2	+0.5	+0.3				915MHz		
51	1853.592M	66.8	+0.0	+0.0	+0.0	+0.0	+0.0	59.5	98.5	-39.0	Horiz
			+0.0	+0.0	+5.2	-39.5			OOK, 27dBm,		
		+23.9	+2.3	+0.5	+0.3				926.8MHz		
52	1855.496M	66.5	+0.0	+0.0	+0.0	+0.0	+0.0	59.2	98.5	-39.3	Horiz
			+0.0	+0.0	+5.2	-39.5			CW, 27dBm,		
		+23.9	+2.3	+0.5	+0.3				927.75MHz		

## Band Edge

### Band Edge Summary

Frequency (MHz)	Modulation	Ant. Type	Field Strength (dBuV/m @3m)	Limit (dBuV/m @3m)	Results
614	OOK	Integral	31.9	<46	Pass
902	OOK	Integral	82.4	<98.5	Pass
928	OOK	Integral	80.1	<98.5	Pass
960	OOK	Integral	41.1	<54	Pass

Note: The highest fundamental power is measured at 118.5 dBuV/m @3m.

### Test Setup / Conditions / Data

Test Location: CKC Laboratories, Inc. • 110 N. Olinda Place • Brea, CA 92823 • 714-993-6112

Customer: **Itron, Inc.**

Specification: **15.247(d) Band-edge Radiated Spurious Emissions**

Work Order #: **98971**

Date: 8/24/2016

Test Type: **Maximized Emissions**

Time: 10:15:38

Tested By: Don Nguyen

Sequence#: 4

Software: EMITest 5.03.02

#### Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 1			

#### Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 1			

#### Test Conditions / Notes:

The EUT is placed on a Styrofoam platform at 0.8m in height for measurement below 1GHz and 1.5m in height for measurement above 1GHz. The EUT is turned on and set in transmitting mode.

The EUT has fresh battery installed. Nominal input voltage is 6.3Vdc.

The EUT is tested in preferred orientation declared by the manufacturer.

Operating frequency: 903 and 926.8MHz

Modulation: OOK

Rated power output: +27dBm

Frequency range of measurement = 9kHz-9.28GHz

9 kHz - 150 kHz, RBW=200 Hz, VBW=600 Hz

150 kHz -30 MHz, RBW=9 kHz, VBW=27 kHz

30 MHz - 1000MHz, RBW=120 kHz, VBW=300 kHz (peak detector), RBW=120 kHz, VBW=1MHz (QP detector)

1000 MHz - 9280MHz, RBW=1 MHz, VBW=3 MHz

Test environment conditions:

Temperature: 26°C


Relative Humidity: 46%

Pressure: 100kPa

Site D

Test Method: ANSI C63.10 (2013)

Itron, Inc WO#: 98971 Sequence#: 4 Date: 8/24/2016  
15.247(d) Band-edge Radiated Spurious Emissions Test Distance: 3 Meters Vert

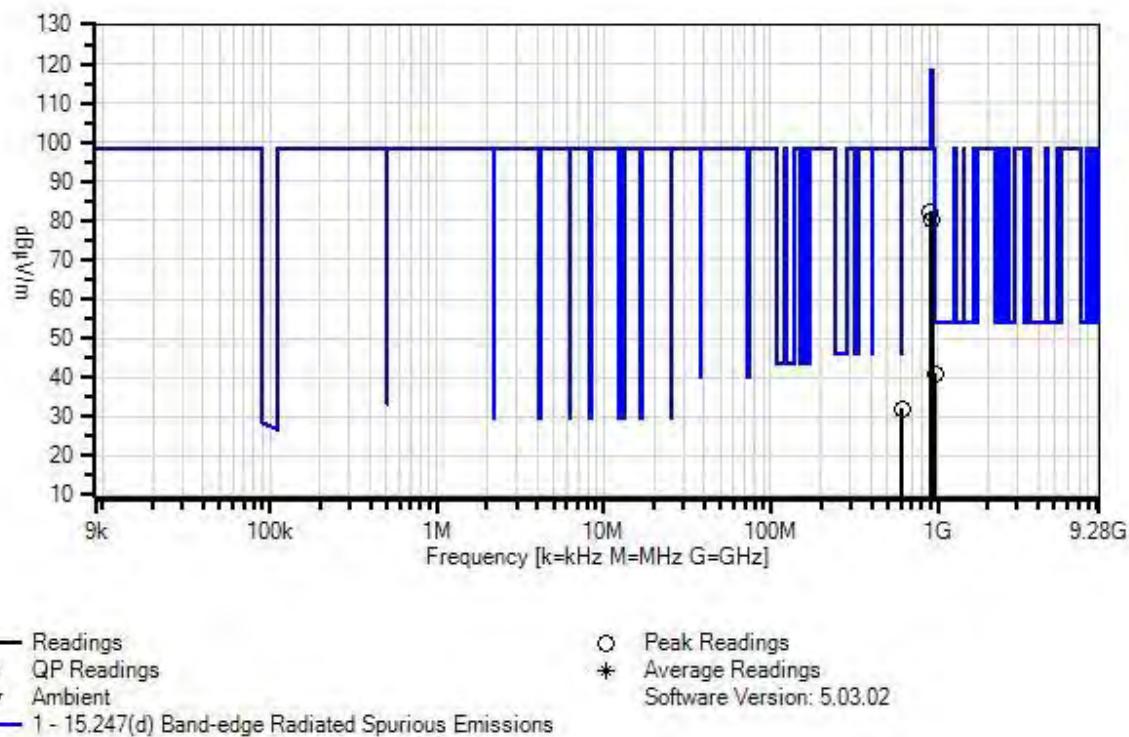

**Test Equipment:**

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
T1	AN00010	Preamp	8447D	3/14/2016	3/14/2018
T2	AN01992	Biconilog Antenna	CBL6111C	12/4/2014	12/4/2016
T3	ANP04382	Cable	LDF-50	6/6/2016	6/6/2018
T4	ANP05555	Cable	RG223/U	4/5/2016	4/5/2018
T5	ANP05569	Cable	RG-214/U	4/4/2016	4/4/2018
T6	AN02467	Spectrum Analyzer	E7405A	5/10/2016	5/10/2017
T7	ANP05283	Attenuator	ATT-0218-06- NNN-02	5/5/2016	5/5/2018



**Measurement Data:**



Reading listed by margin.

Test Distance: 3 Meters


#	Freq	Rdng	T1	T2	T3	T4	Dist	Corr	Spec	Margin	Polar
			T5	T6	T7		Table	dB $\mu$ V/m	dB $\mu$ V/m		
	MHz	dB $\mu$ V	dB	dB	dB	dB				dB	Ant
1	960.000M	31.8	-27.5 +3.7	+23.2 +0.0	+3.4 +5.9	+0.6	+0.0	41.1	54.0	-12.9	Vert
2	614.000M	28.3	-28.1 +2.8	+19.9 +0.0	+2.7 +5.8	+0.5	+0.0	31.9	46.0	-14.1	Vert
3	902.000M	74.1	-27.6 +3.6	+22.6 +0.0	+3.3 +5.9	+0.5	+0.0	82.4	98.5	-16.1	Vert
4	928.000M	71.1	-27.5 +3.7	+22.9 +0.0	+3.4 +5.9	+0.6	+0.0	80.1	98.5	-18.4	Vert

## Band Edge Plots

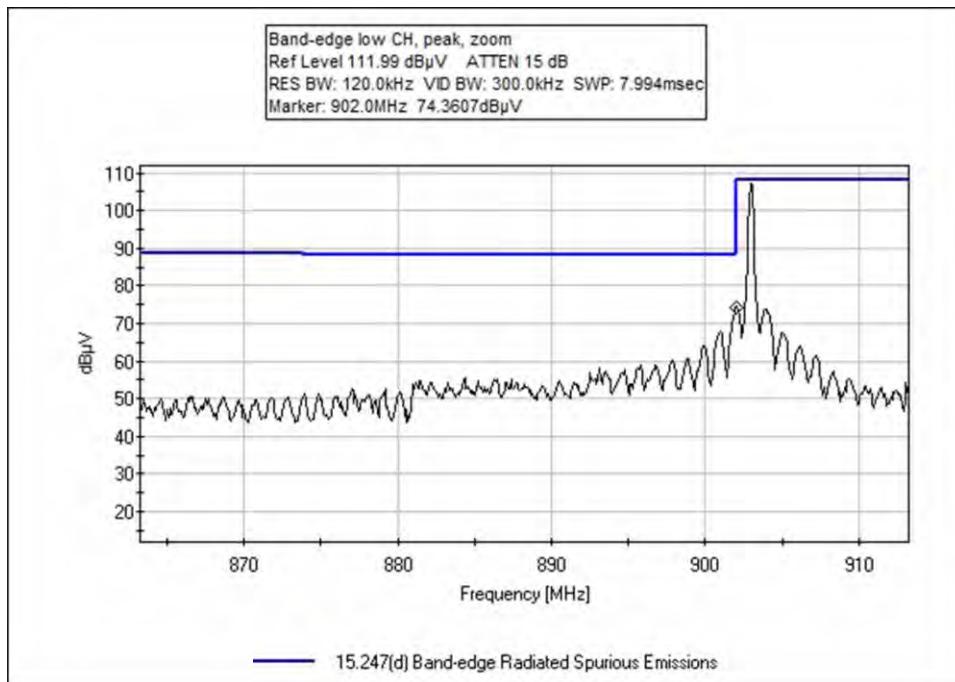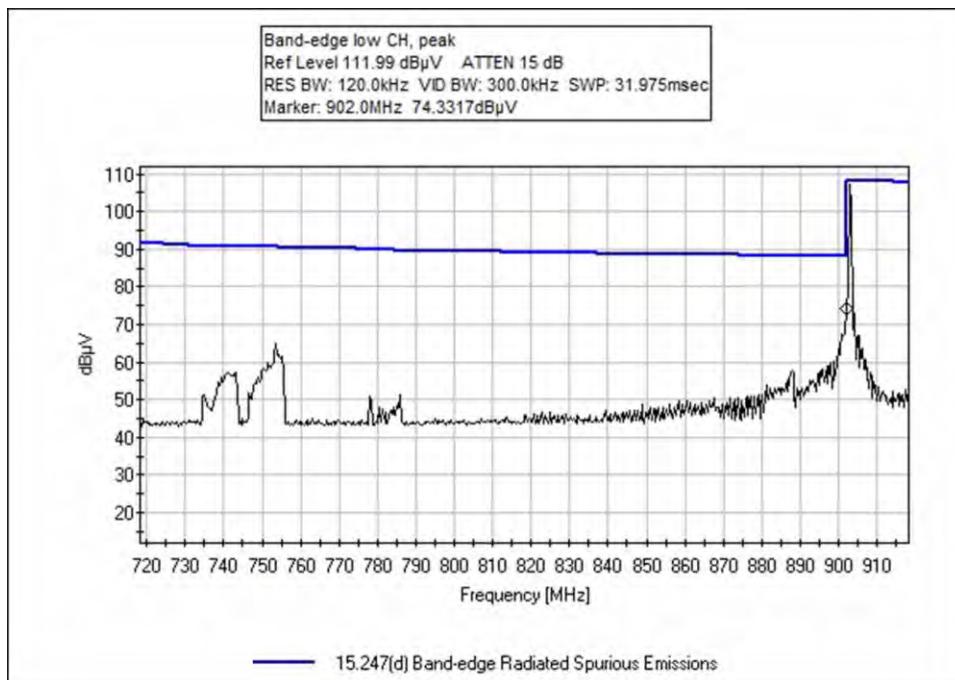

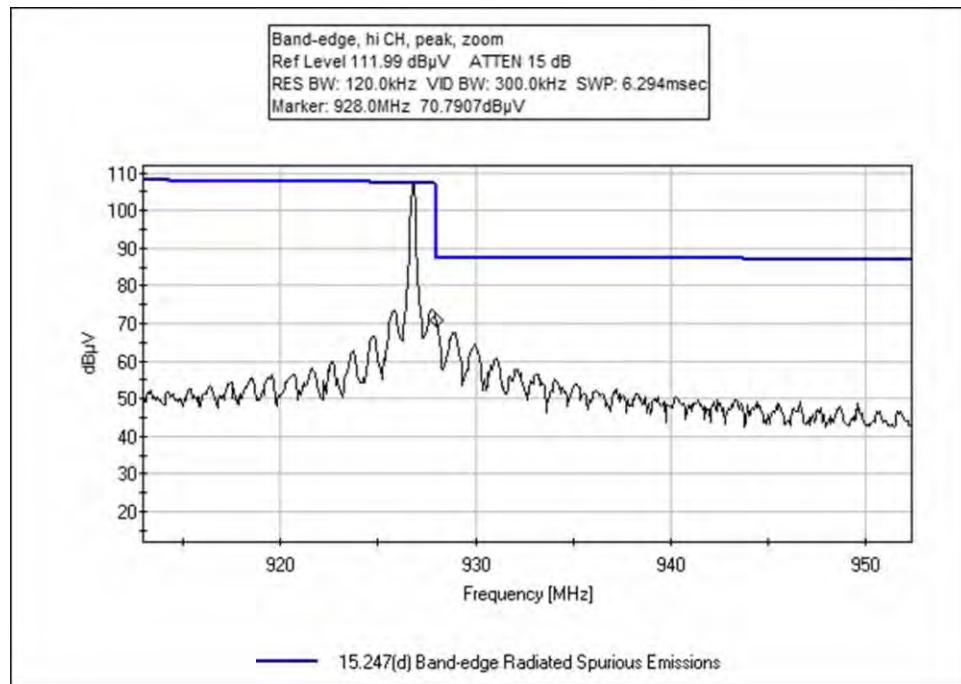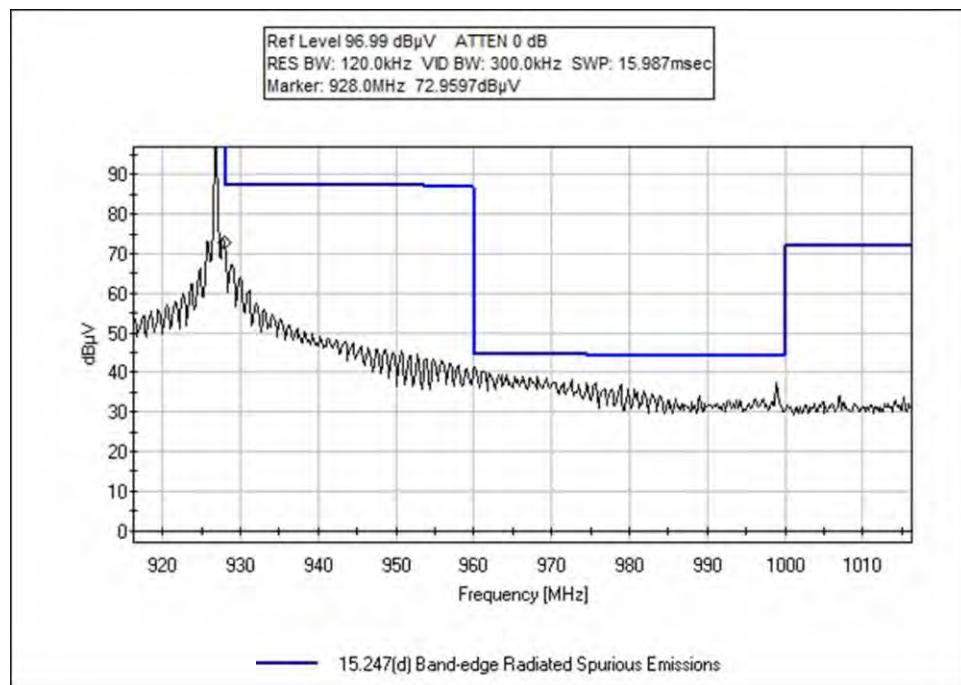

**Test Setup Photos**

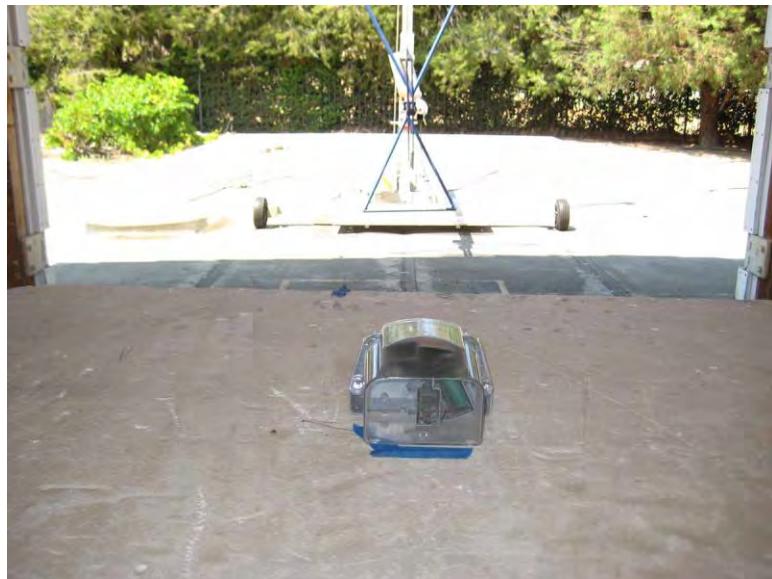



## SUPPLEMENTAL INFORMATION

### Measurement Uncertainty

Uncertainty Value	Parameter
4.73 dB	Radiated Emissions
3.34 dB	Mains Conducted Emissions
3.30 dB	Disturbance Power

Reported uncertainties represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor of k=2. Compliance is deemed to occur provided measurements are below the specified limits.

### Emissions Test Details

#### TESTING PARAMETERS

Unless otherwise indicated, the following configuration parameters are used for equipment setup: The cables were routed consistent with the typical application by varying the configuration of the test sample. Interface cables were connected to the available ports of the test unit. The effect of varying the position of the cables was investigated to find the configuration that produced maximum emissions. Cables were of the type and length specified in the individual requirements. The length of cable that produced maximum emissions was selected.

The equipment under test (EUT) was set up in a manner that represented its normal use, as shown in the setup photographs. Any special conditions required for the EUT to operate normally are identified in the comments that accompany the emissions tables.

The emissions data was taken with a spectrum analyzer or receiver. Incorporating the applicable correction factors for distance, antenna, cable loss and amplifier gain, the data was reduced as shown in the table below. The corrected data was then compared to the applicable emission limits. Preliminary and final measurements were taken in order to ensure that all emissions from the EUT were found and maximized.

#### CORRECTION FACTORS

The basic spectrum analyzer reading was converted using correction factors as shown in the highest emissions readings in the tables. For radiated emissions in dB $\mu$ V/m, the spectrum analyzer reading in dB $\mu$ V was corrected by using the following formula. This reading was then compared to the applicable specification limit. Individual measurements were compared with the displayed limit value in the margin column. The margin was calculated based on subtracting the limit value from the corrected measurement value; a positive margin represents a measurement exceeding the limit, while a negative margin represents a measurement less than the limit.

SAMPLE CALCULATIONS	
Meter reading	(dB $\mu$ V)
+ Antenna Factor	(dB/m)
+ Cable Loss	(dB)
- Distance Correction	(dB)
- Preamplifier Gain	(dB)
= Corrected Reading	(dB $\mu$ V/m)

## TEST INSTRUMENTATION AND ANALYZER SETTINGS

The test instrumentation and equipment listed were used to collect the emissions data. A spectrum analyzer or receiver was used for all measurements. Unless otherwise specified, the following table shows the measuring equipment bandwidth settings that were used in designated frequency bands. For testing emissions, an appropriate reference level and a vertical scale size of 10 dB per division were used.

MEASURING EQUIPMENT BANDWIDTH SETTINGS PER FREQUENCY RANGE			
TEST	BEGINNING FREQUENCY	ENDING FREQUENCY	BANDWIDTH SETTING
CONDUCTED EMISSIONS	150 kHz	30 MHz	9 kHz
RADIATED EMISSIONS	9 kHz	150 kHz	200 Hz
RADIATED EMISSIONS	150 kHz	30 MHz	9 kHz
RADIATED EMISSIONS	30 MHz	1000 MHz	120 kHz
RADIATED EMISSIONS	1000 MHz	>1 GHz	1 MHz

## SPECTRUM ANALYZER/RECEIVER DETECTOR FUNCTIONS

The notes that accompany the measurements contained in the emissions tables indicate the type of detector function used to obtain the given readings. Unless otherwise noted, all readings were made in the "positive peak" detector mode. Whenever a "quasi-peak" or "average" reading was recorded, the measurement was annotated with a "QP" or an "Ave" on the appropriate rows of the data sheets. In cases where quasi-peak or average limits were employed and data exists for multiple measurement types for the same frequency then the peak measurement was retained in the report for reference, however the numbering for the affected row was removed and an arrow or caret ("^") was placed in the far left-hand column indicating that the row above takes precedence for comparison to the limit. The following paragraphs describe in more detail the detector functions and when they were used to obtain the emissions data.

### Peak

In this mode, the spectrum analyzer or receiver recorded all emissions at their peak value as the frequency band selected was scanned. By combining this function with another feature called "peak hold," the measurement device had the ability to measure intermittent or low duty cycle transient emission peak levels. In this mode the measuring device made a slow scan across the frequency band selected and measured the peak emission value found at each frequency across the band.

### Quasi-Peak

Quasi-peak measurements were taken using the quasi-peak detector when the true peak values exceeded or were within 2 dB of a quasi-peak specification limit. Additional QP measurements may have been taken at the discretion of the operator.

### Average

Average measurements were taken using the average detector when the true peak values exceeded or were within 2 dB of an average specification limit. Additional average measurements may have been taken at the discretion of the operator. If the specification or test procedure requires trace averaging, then the averaging was performed using 100 samples or as required by the specification. All other average measurements are performed using video bandwidth averaging. To make these measurements, the test engineer reduces the video bandwidth on the measuring device until the modulation of the signal is filtered out. At this point the measuring device is set into the linear mode and the scan time is reduced.