

Prüfbericht-Nr.: Test report no.:	CN24YK5I 001	Auftrags-Nr.: Order no.:	326064952	Seite 1 von 32 Page 1 of 32
Kunden-Referenz-Nr.: Client reference no.:	1288983	Auftragsdatum: Order date:	2024-11-25	
Auftraggeber: Client:	IKEA of Sweden AB Box 702, SE-343 81 Älmhult, Sweden			
Prüfgegenstand: Test item:	Portable general purpose luminaire			
Bezeichnung / Typ-Nr.: Identification / Type no.:	B2411			
Auftrags-Inhalt: Order content:	TÜV Rheinland EMC service			
Prüfgrundlage: Test specification:	FCC 47 CFR Part 15, Subpart B:2023 Class B ICES-005:2018			
Wareneingangsdatum: Date of sample receipt:	2024-12-24	Refer to the EUT photos file		
Prüfmuster-Nr.: Test sample no:	A0038888172-003			
Prüfzeitraum: Testing period:	Refer to test report			
Ort der Prüfung: Place of testing:	Refer to clause 1.1			
Prüflaboratorium: Testing laboratory:	TÜV Rheinland (Shanghai) Co., Ltd.			
Prüfergebnis*: Test result*:	Pass			
geprüft von: tested by:	genehmigt von: authorized by:			
Datum: Date:	2025-03-04		2025-03-04	
Stellung / Position:	Project engineer		Authorizer	
Sonstiges / Other:	FCC ID: FHO-B2411 Test Firm Name: TÜV Rheinland (Shanghai) Co., Ltd. Designation Number: CN1396 Test Firm Registration Number: 930979			
Zustand des Prüfgegenstandes bei Anlieferung: Condition of the test item at delivery:	Prüfmuster vollständig und unbeschädigt Test item complete and undamaged			
* Legende:	P(ass) = entspricht o.g. Prüfgrundlage(n) F(ail) = entspricht nicht o.g. Prüfgrundlage(n) N/A = nicht anwendbar N/T = nicht getestet			
* Legend:	P(ass) = passed a.m. test specification(s) F(ail) = failed a.m. test specification(s) N/A = not applicable N/T = not tested			
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. This test report only relates to the above mentioned test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.				

Prüfbericht-Nr.: CN24YK5I 001
Test report no.:

Seite 2 von 32
Page 2 of 32

Anmerkungen
Remarks

- | | |
|----------|--|
| 1 | <p>Alle eingesetzten Prüfmittel waren zum angegebenen Prüfzeitraum gemäß eines festgelegten Kalibrierungsprogramms unseres Prüfhauses kalibriert. Sie entsprechen den in den Prüfprogrammen hinterlegten Anforderungen. Die Rückverfolgbarkeit der eingesetzten Prüfmittel ist durch die Einhaltung der Regelungen unseres Managementsystems gegeben.
Detaillierte Informationen bezüglich Prüfkonditionen, Prüfequipment und Messunsicherheiten sind im Prüflabor vorhanden und können auf Wunsch bereitgestellt werden.</p> <p><i>The equipment used during the specified testing period was calibrated according to our test laboratory calibration program. The equipment fulfils the requirements included in the relevant standards. The traceability of the test equipment used is ensured by compliance with the regulations of our management system. Detailed information regarding test conditions, equipment and measurement uncertainty is available in the test laboratory and could be provided on request.</i></p> |
| 2 | <p>Wie vertraglich vereinbart, wurde dieses Dokument nur digital unterzeichnet. Der TÜV Rheinland hat nicht überprüft, welche rechtlichen oder sonstigen diesbezüglichen Anforderungen für dieses Dokument gelten. Diese Überprüfung liegt in der Verantwortung des Benutzers dieses Dokuments. Auf Verlangen des Kunden kann der TÜV Rheinland die Gültigkeit der digitalen Signatur durch ein gesondertes Dokument bestätigen. Diese Anfrage ist an unseren Vertrieb zu richten. Eine Umweltgebühr für einen solchen zusätzlichen Service wird erhoben. Informationen zur Verifizierung der Authentizität unserer Dokumente erhalten Sie auf folgender Webseite: go.tuv.com/digital-signature</p> <p><i>As contractually agreed, this document has been signed digitally only. TUV Rheinland has not verified and unable to verify which legal or other pertaining requirements are applicable for this document. Such verification is within the responsibility of the user of this document. Upon request by its client, TUV Rheinland can confirm the validity of the digital signature by a separate document. Such request shall be addressed to our Sales department. An environmental fee for such additional service will be charged. For information on verifying the authenticity of our documents, please visit the following website: go.tuv.com/digital-signature</i></p> |
| 3 | <p>Prüfklausel mit der Note * wurden an qualifizierte Unterauftragnehmer vergeben und sind unter der jeweiligen Prüfklausel des Berichts beschrieben.
Abweichungen von Prüfspezifikation(en) oder Kundenanforderungen sind in der jeweiligen Prüfklausel im Bericht aufgeführt.</p> <p><i>Test clauses with remark of * are subcontracted to qualified subcontractors and described under the respective test clause in the report.</i>
<i>Deviations of testing specification(s) or customer requirements are listed in specific test clause in the report.</i></p> |
| 4 | <p>Die Entscheidungsregel für Konformitätserklärungen basierend auf numerischen Messergebnissen in diesem Prüfbericht basiert auf der "Null-Grenzwert-Regel" und der "Einfachen Akzeptanz" gemäß ILAC G8:2019 und IEC Guide 115:2021, es sei denn, in der auf Seite 1 dieses Berichts genannten angewandten Norm ist etwas anderes festgelegt oder vom Kunden gewünscht. Dies bedeutet, dass die Messunsicherheit nicht berücksichtigt wird und daher auch nicht im Prüfbericht angegeben wird. Zu weiteren Informationen bezüglich des Risikos durch diese Entscheidungsregel siehe ILAC G8:2019.</p> <p><i>The decision rule for statements of conformity, based on numerical measurement results, in this test report is based on the "Zero Guard Band Rule" and "Simple Acceptance" in accordance with ILAC G8:2019 and IEC Guide 115:2021, unless otherwise specified in the applied standard mentioned on Page 1 of this report or requested by the customer. This means that measurement uncertainty is not taken in account and hence also not declared in the test report. For additional information to the resulting risk based of this decision rule please refer to ILAC G8:2019.</i></p> |

Prüfbericht - Nr.: CN24YK5I 001
Test Report No.:

Seite 3 von 32
Page 3 of 32

Revision history of test report:

Report number	Issue date	Contents and reason for change if appropriate
CN24YK5I 001	2025-03-04	Initial release.

Contents

1	TEST SITES	5
1.1	TEST FACILITIES.....	5
2	GENERAL PRODUCT INFORMATION	6
2.1	PRODUCT FUNCTION AND INTENDED USE	6
2.2	RATINGS AND SYSTEM DETAILS.....	6
2.3	INDEPENDENT OPERATION MODES.....	6
2.4	DESCRIPTION OF INTERCONNECTING CABLES	6
2.5	NOISE GENERATING AND NOISE SUPPRESSING PARTS	6
2.6	HIGHEST FREQUENCY GENERATED OR USED IN THE DEVICE OR ON WHICH THE DEVICE OPERATES OR TUNES ..	6
2.7	SUBMITTED DOCUMENTS.....	6
3	TEST SET-UP AND OPERATION MODES.....	7
3.1	PRINCIPLE OF CONFIGURATION SELECTION	7
3.2	EQUIPMENT AND CABLE ARRANGEMENT.....	7
3.3	TEST SOFTWARE	8
3.4	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	8
3.5	COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE	8
4	CONFORMITY DECISION RULE.....	9
5	TEST RESULTS EMISSION	10
5.1	EMISSION IN THE FREQUENCY RANGE UP TO 30 MHz	10
5.1.1	Conducted emission	10
5.2	EMISSION IN THE FREQUENCY RANGE ABOVE 30 MHz.....	20
5.2.1	Radiated emission (30-1000 MHz).....	20
6	PHOTOGRAPHS OF THE TEST SET-UP.....	30
7	LIST OF TEST AND MEASUREMENT INSTRUMENTS	31
8	LIST OF FIGURES.....	32

1 Test Sites

1.1 Test Facilities

Laboratory: TÜV Rheinland (Shanghai) Co., Ltd.

Address: Workshop14, North Half of Workshop 10 and Workshop 16, Pingqian (Taicang)
Modern Industrial Park, No.525, Yuewang Lingang South Road, Shaxi, Taicang, Jiangsu,
China

The used test equipment is in accordance with CISPR 16-1 series standards for measurement of radio interference.

Refer to Clause 7 for test and measurement instruments.

2 General Product Information

2.1 Product Function and Intended Use

The EUT (equipment under test) is an ordinary portable general purpose luminaire for lighting and similar use. For the further information, refer to the user's manual.

2.2 Ratings and System Details

Rated input : 5 V DC
Rated power : 0.7 W
Protection class : Class III

2.3 Independent Operation Modes

The basic operation modes are: "ON" and "OFF" with dimming function.

2.4 Description of interconnecting cables

N/A

2.5 Noise Generating and Noise Suppressing Parts

Refer to the circuit diagram for further information.

2.6 Highest frequency generated or used in the device or on which the device operates or tunes

The highest frequency used in the EUT is 4 kHz.

2.7 Submitted Documents

Circuit diagram, user's manual and rating label.

3 Test Set-up and Operation Modes

3.1 Principle of Configuration Selection

Emission: The equipment under test (EUT) was configured to measure its highest possible emission level. The test conditions were adapted accordingly in reference to the instructions for use.


Refer to the related paragraph of this report.

The sequence of testing:


1. Conducted emission tests were performed on 2025-01-14.
2. Radiated emission tests were performed on 2025-01-07.

3.2 Equipment and cable arrangement

Block diagram for both conducted emission and radiated emission tests is as follows:

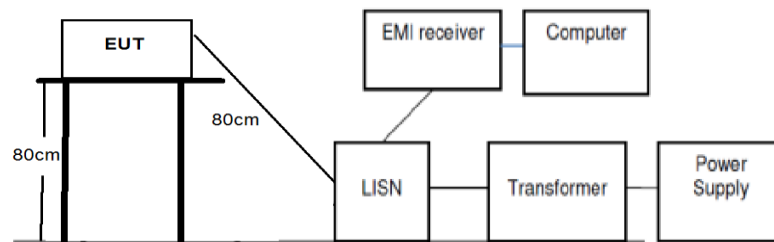

(Conducted emission)

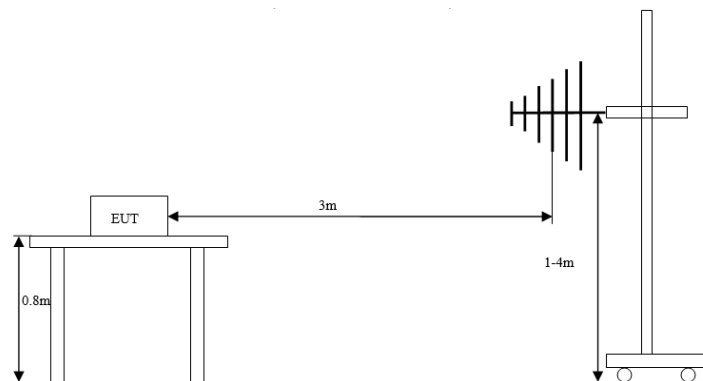

(Radiated emission 30-1000 MHz)

Also refer to photographs on clause 6 for test setups for both conducted emission test and radiated emission test.

3.3 Test Software

No special test software was used during the tests.

3.4 Special Accessories and Auxiliary Equipment

During the tests, an adaptor and laptop were used as power supply.

3.5 Countermeasures to achieve EMC Compliance

No other special measure is employed to achieve the requirement.

4 Conformity Decision Rule

For all EMI tests included in this report, as measurement uncertainties are less than the values U_{CISPR} given in CISPR 16-4-2, compliance with the limits is determined by comparing measurement results directly with corresponding limits without taking into consideration of measurement uncertainties.

5 Test Results EMISSION

5.1 Emission in the Frequency Range up to 30 MHz

5.1.1 Conducted emission

Result:		Passed
Date of testing	: 2025-01-14	
Test procedure	: FCC 47 CFR Part 15, Subpart B:2023, ICES-005:2018, ANSI C63.4-2014 and CISPR 16-2-1	
Frequency range	: 0.15 – 30 MHz	
Limits	: Quasi-peak limit: 0.15 – 0.5 MHz, 66 to 56 dB μ V (decrease with the logarithm of frequency); 0.5 – 5 MHz, 56 dB μ V; 5 – 30 MHz, 60 dB μ V Average limit: 0.15 – 0.5 MHz, 56 to 46 dB μ V (decrease with the logarithm of frequency); 0.5 – 5 MHz, 46 dB μ V; 5 – 30 MHz, 50 dB μ V	
Bandwidth of EMI receiver for final measurement	: 9 kHz	
Measurement time for final measurement	: 1 s	
Kind of test site	: Shielded room	
Input voltage	: AC 120 V, 60 Hz for adapter and power supply of laptop	
Operational mode	: Mode 1: EUT was powered by adapter and lighting on with max lighting output Mode 2: EUT was powered by adapter and lighting on with min lighting output Mode 3: EUT was powered by laptop and lighting on with max lighting output Mode 4: EUT was powered by laptop and lighting on with min lighting output	
Ambient condition	: Temperature: 22.4 °C; Relative humidity: 47.8 %	
Expanded measurement uncertainty ($k=2$)	: 2.33 dB The minimum margin to the limit is 12.0 dB at 0.152250 MHz. The margin is higher than expanded measurement uncertainty.	

The measurement setup was made according to ANSI C63.4-2014 in a shielded room.

The measurement equipment like test receivers, quasi-peak detector and artificial mains network (AMN) are in compliance with CISPR 16-1 series standards.

The tested object was set-up on a wooden support. The EUT was set 0.8 m away from the AMN. The cord longer than necessary to be connected to the AMN was folded forth and back parallel so as to form a bundle with a length between 0.3 m and 0.4 m.

The disturbance voltage test was performed on the neutral line and phase line of the power supply of the EUT respectively.

The following figures and tables were those measured by an automatic measuring system. Both quasi-peak and average measurements were performed. In the following spectral diagram, “◆” means Quasi-Peak Value and “◆” means Average Value results.


Notes on following tables of conducted emission results and conversions:

Level (dB μ V): final measurement results by using quasi-peak detector and average detector

Transd (dB): transducer factor including cable loss, insertion loss of artificial mains network and gain of pre-amplifier (if used)

Margin: Limit (dB μ V) - Level (dB μ V)

Figure 1: Spectral Diagrams, Conducted Emission, 150 kHz – 30 MHz, L on mode 1

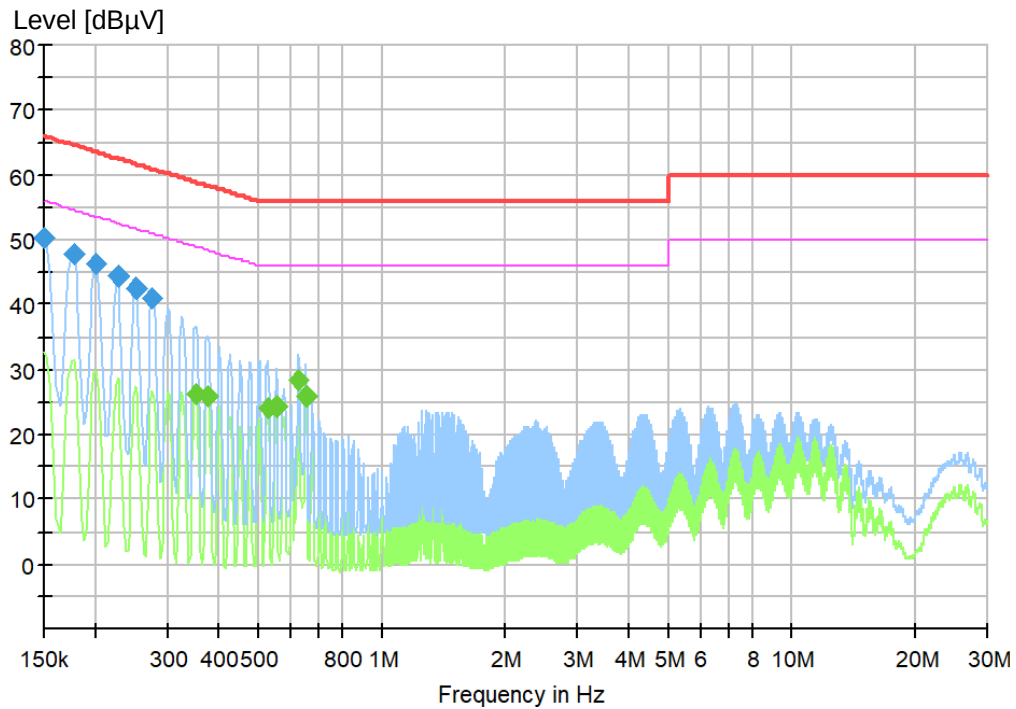


Final quasi-peak measurement result:

Frequency (MHz)	QuasiPeak (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line
0.150000	50.33	66.00	15.67	1000.0	9.000	L1
0.177000	47.96	64.63	16.67	1000.0	9.000	L1
0.201750	46.16	63.54	17.38	1000.0	9.000	L1
0.226500	44.37	62.58	18.20	1000.0	9.000	L1
0.251250	42.73	61.72	18.99	1000.0	9.000	L1
0.276000	41.10	60.94	19.83	1000.0	9.000	L1

Final average measurement result:

Frequency (MHz)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line
0.352500	26.32	48.90	22.58	1000.0	9.000	L1
0.377250	25.75	48.34	22.59	1000.0	9.000	L1
0.528000	23.95	46.00	22.05	1000.0	9.000	L1
0.552750	24.25	46.00	21.75	1000.0	9.000	L1
0.627000	28.49	46.00	17.51	1000.0	9.000	L1
0.654000	25.86	46.00	20.14	1000.0	9.000	L1

Figure 2: Spectral Diagrams, Conducted Emission, 150 kHz – 30 MHz, N on mode 1

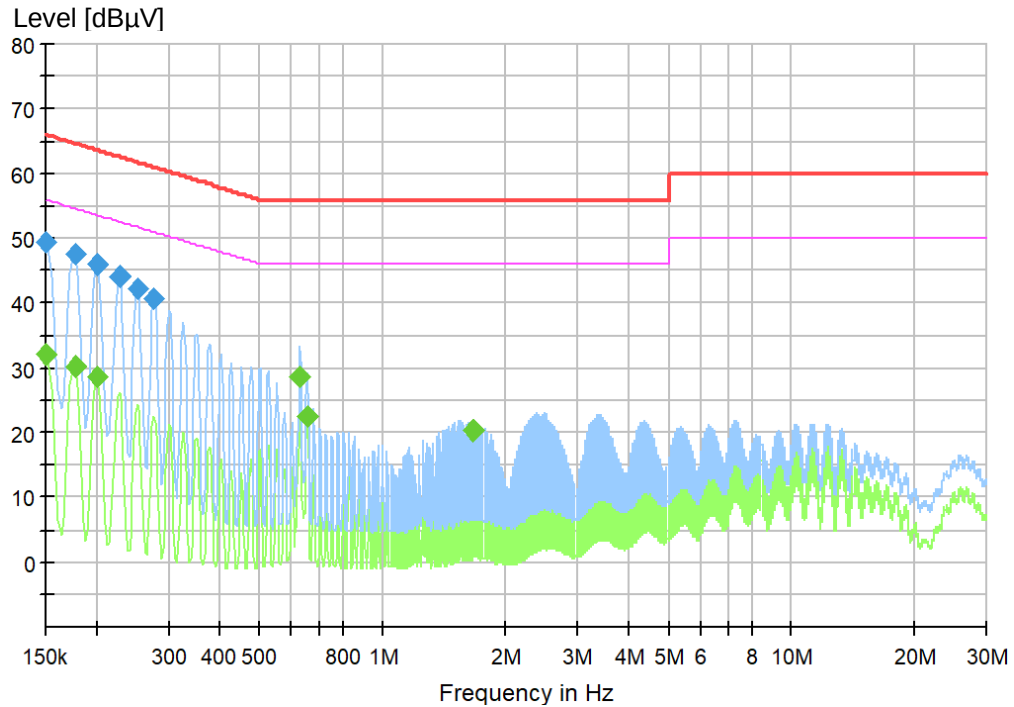


Final quasi-peak measurement result:

Frequency (MHz)	QuasiPeak (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line
0.150000	49.39	66.00	16.61	1000.0	9.000	N
0.177000	47.45	64.63	17.18	1000.0	9.000	N
0.201750	45.89	63.54	17.65	1000.0	9.000	N
0.226500	44.09	62.58	18.49	1000.0	9.000	N
0.251250	42.36	61.72	19.36	1000.0	9.000	N
0.276000	40.61	60.94	20.32	1000.0	9.000	N

Final average measurement result:

Frequency (MHz)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line
0.150000	32.10	56.00	23.90	1000.0	9.000	N
0.177000	30.30	54.63	24.33	1000.0	9.000	N
0.201750	28.56	53.54	24.98	1000.0	9.000	N
0.627000	28.71	46.00	17.29	1000.0	9.000	N
0.654000	22.39	46.00	23.61	1000.0	9.000	N
1.657500	20.24	46.00	25.76	1000.0	9.000	N

Figure 3: Spectral Diagrams, Conducted Emission, 150 kHz – 30 MHz, L on mode 2

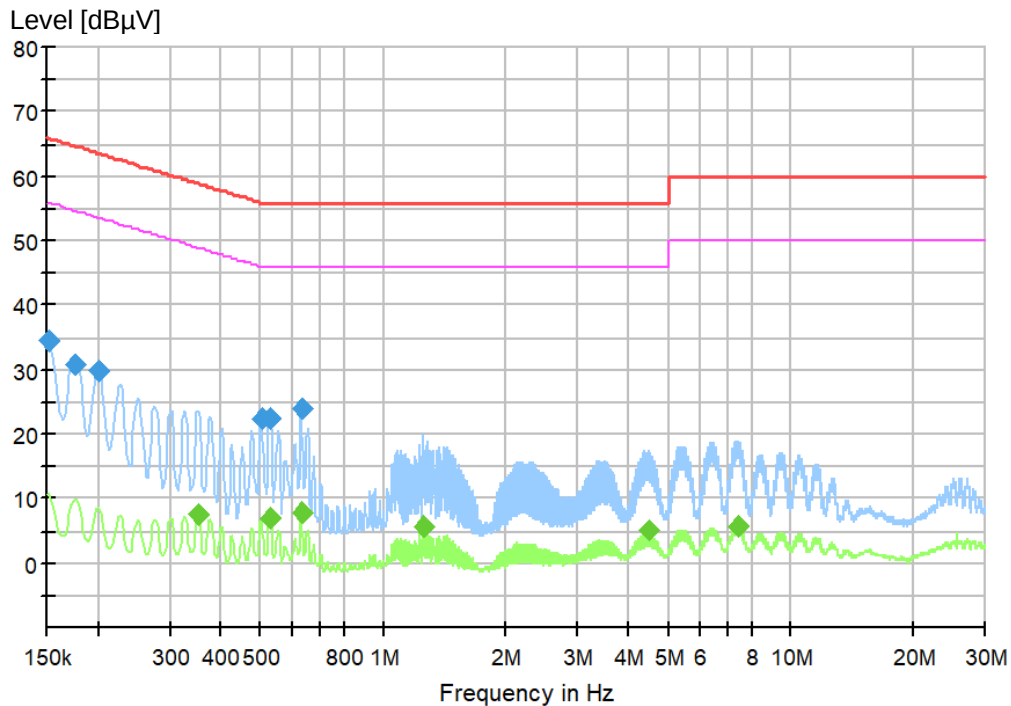


Final quasi-peak measurement result:

Frequency (MHz)	QuasiPeak (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line
0.152250	34.66	65.88	31.22	1000.0	9.000	L1
0.174750	30.93	64.73	33.80	1000.0	9.000	L1
0.201750	29.85	63.54	33.69	1000.0	9.000	L1
0.503250	22.55	56.00	33.45	1000.0	9.000	L1
0.528000	22.60	56.00	33.40	1000.0	9.000	L1
0.631500	23.91	56.00	32.09	1000.0	9.000	L1

Final average measurement result:

Frequency (MHz)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time	Bandwidth (kHz)	Line
0.352500	7.48	48.90	41.42	1000.0	9.000	L1
0.528000	6.88	46.00	39.12	1000.0	9.000	L1
0.631500	7.79	46.00	38.21	1000.0	9.000	L1
1.254750	5.72	46.00	40.28	1000.0	9.000	L1
4.467750	5.10	46.00	40.90	1000.0	9.000	L1
7.404000	5.86	50.00	44.14	1000.0	9.000	L1

Figure 4: Spectral Diagrams, Conducted Emission, 150 kHz – 30 MHz, N on mode 2

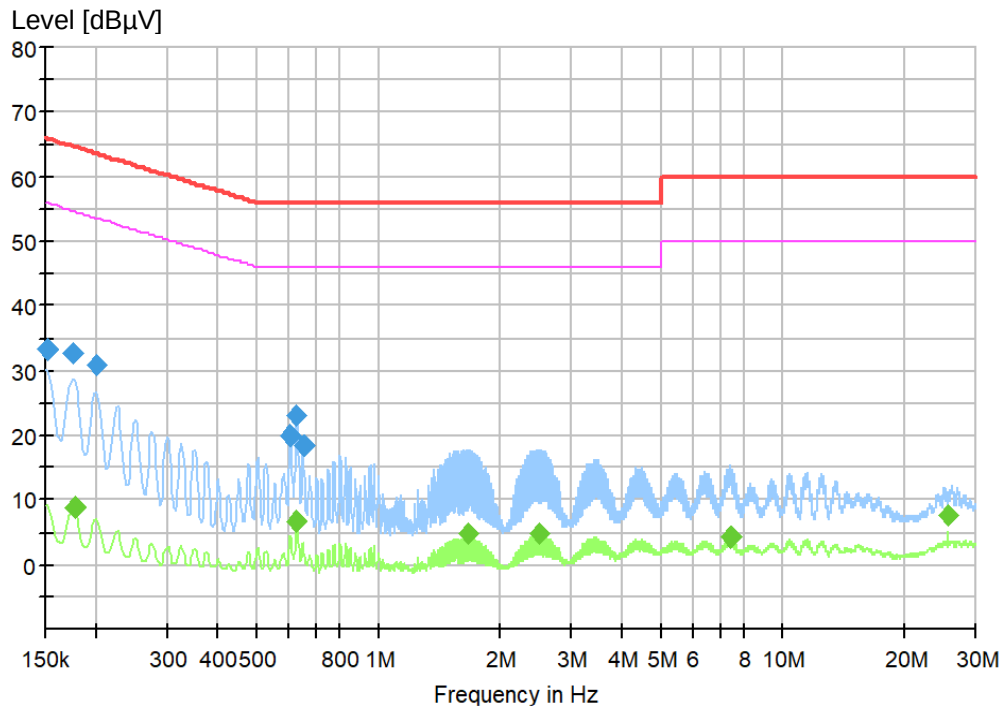


Final quasi-peak measurement result:

Frequency (MHz)	QuasiPeak (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line
0.152250	33.40	65.88	32.47	1000.0	9.000	N
0.174750	32.62	64.73	32.11	1000.0	9.000	N
0.201750	30.94	63.54	32.60	1000.0	9.000	N
0.606750	20.06	56.00	35.94	1000.0	9.000	N
0.629250	23.09	56.00	32.91	1000.0	9.000	N
0.651750	18.48	56.00	37.52	1000.0	9.000	N

Final average measurement result:

Frequency (MHz)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line
0.177000	8.91	54.63	45.72	1000.0	9.000	N
0.629250	6.60	46.00	39.40	1000.0	9.000	N
1.657500	4.70	46.00	41.30	1000.0	9.000	N
2.510250	4.97	46.00	41.03	1000.0	9.000	N
7.451250	4.29	50.00	45.71	1000.0	9.000	N
25.599750	7.69	50.00	42.31	1000.0	9.000	N

Figure 5: Spectral Diagrams, Conducted Emission, 150 kHz – 30 MHz, L on mode 3

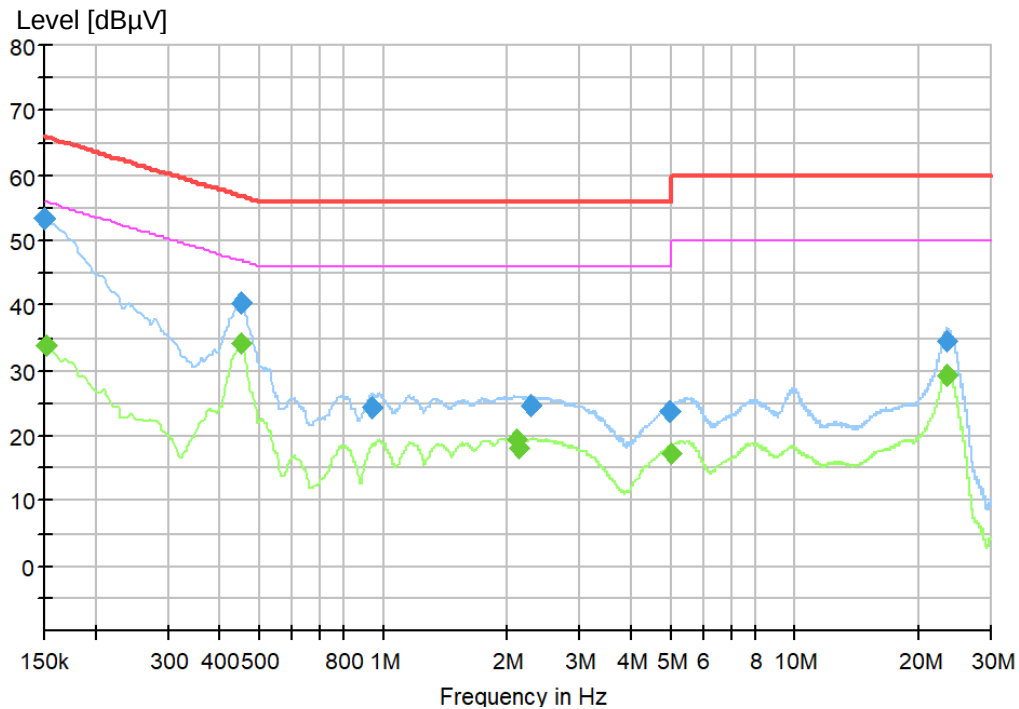


Final quasi-peak measurement result:

Frequency (MHz)	QuasiPeak (dBuV)	Limit (dBuV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line
0.150000	53.31	66.00	12.69	1000.0	9.000	L1
0.449250	40.44	56.89	16.45	1000.0	9.000	L1
0.939750	24.42	56.00	31.58	1000.0	9.000	L1
2.289750	24.62	56.00	31.38	1000.0	9.000	L1
4.960500	23.84	56.00	32.16	1000.0	9.000	L1
23.552250	34.51	60.00	25.49	1000.0	9.000	L1

Final average measurement result:

Frequency (MHz)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line
0.152250	33.84	55.88	22.03	1000.0	9.000	L1
0.453750	34.27	46.81	12.53	1000.0	9.000	L1
2.116500	19.27	46.00	26.73	1000.0	9.000	L1
2.125500	18.06	46.00	27.94	1000.0	9.000	L1
4.994250	17.08	46.00	28.92	1000.0	9.000	L1
23.552250	29.41	50.00	20.59	1000.0	9.000	L1

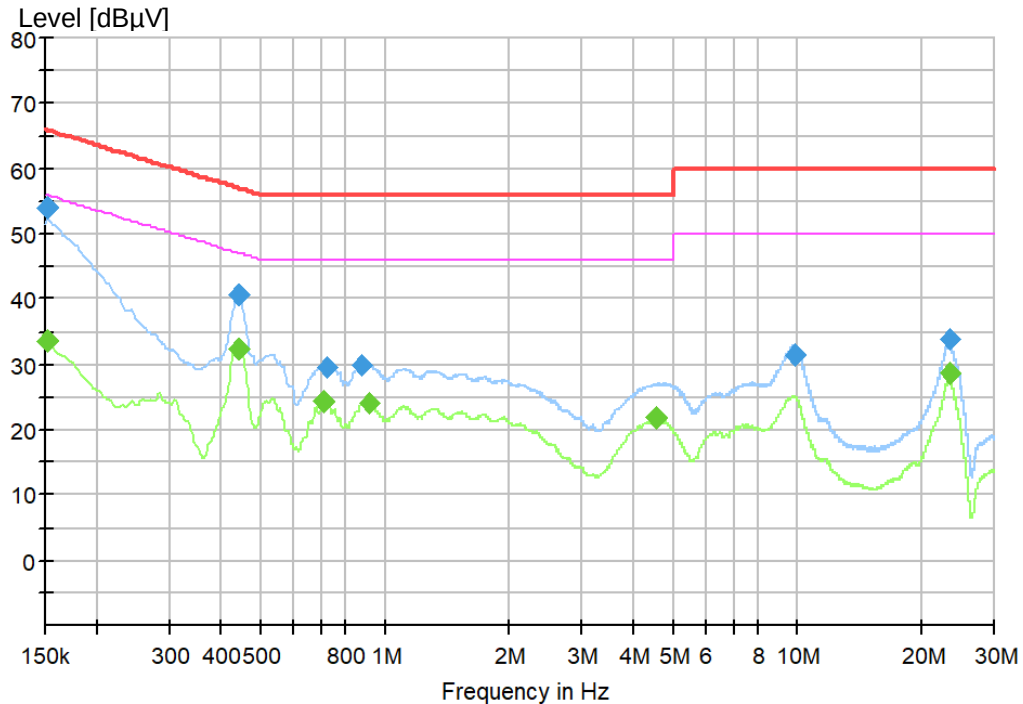Figure 6: Spectral Diagrams, Conducted Emission, 150 kHz – 30 MHz, N on mode 3


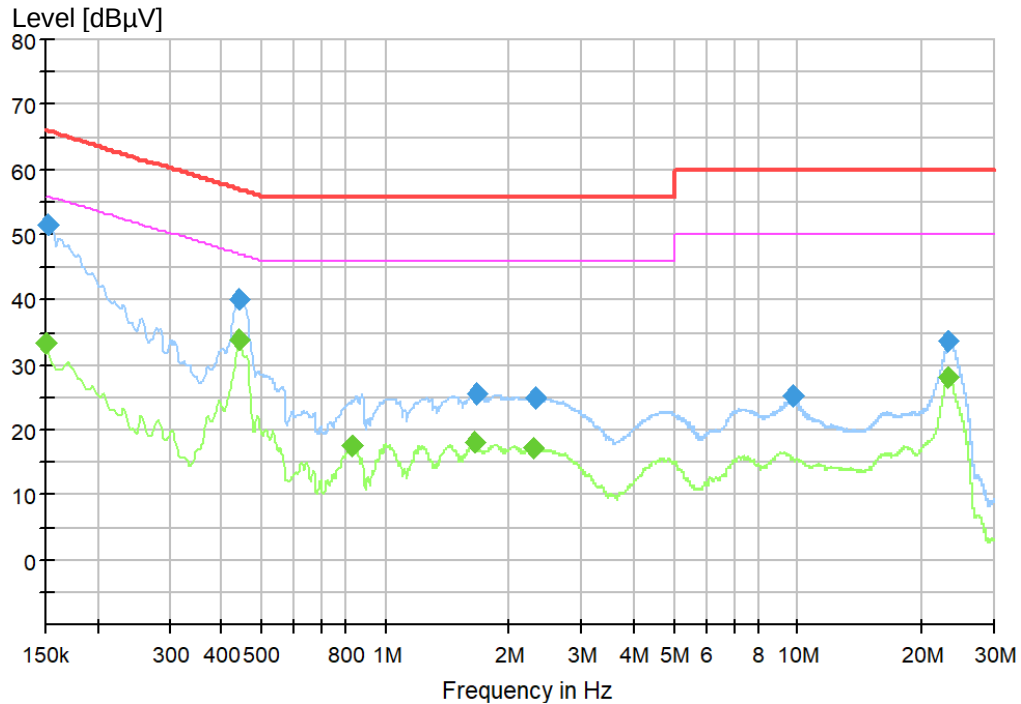
Final quasi-peak measurement result:

Frequency (MHz)	QuasiPeak (dBuV)	Limit (dBuV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line
0.152250	53.88	65.88	12.00	1000.0	9.000	N
0.442500	40.57	57.02	16.44	1000.0	9.000	N
0.728250	29.65	56.00	26.35	1000.0	9.000	N
0.879000	30.02	56.00	25.98	1000.0	9.000	N
9.804750	31.55	60.00	28.45	1000.0	9.000	N
23.293500	33.95	60.00	26.05	1000.0	9.000	N

Final average measurement result:

Frequency (MHz)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line
0.152250	33.71	55.88	22.17	1000.0	9.000	N
0.442500	32.31	47.02	14.70	1000.0	9.000	N
0.705750	24.18	46.00	21.82	1000.0	9.000	N
0.917250	23.87	46.00	22.13	1000.0	9.000	N
4.528500	21.87	46.00	24.13	1000.0	9.000	N
23.313750	28.55	50.00	21.45	1000.0	9.000	N

Figure 7: Spectral Diagrams, Conducted Emission, 150 kHz – 30 MHz, L on mode 4




Final quasi-peak measurement result:

Frequency (MHz)	QuasiPeak (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line
0.152250	51.54	65.88	14.33	1000.0	9.000	L1
0.440250	40.23	57.06	16.82	1000.0	9.000	L1
1.659750	25.43	56.00	30.57	1000.0	9.000	L1
2.305500	24.96	56.00	31.04	1000.0	9.000	L1
9.732750	25.12	60.00	34.88	1000.0	9.000	L1
23.255250	33.56	60.00	26.44	1000.0	9.000	L1

Final average measurement result:

Frequency (MHz)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line
0.150000	33.28	56.00	22.72	1000.0	9.000	L1
0.440250	33.96	47.06	13.10	1000.0	9.000	L1
0.831750	17.40	46.00	28.60	1000.0	9.000	L1
1.641750	18.10	46.00	27.90	1000.0	9.000	L1
2.271750	17.12	46.00	28.88	1000.0	9.000	L1
23.289000	28.15	50.00	21.85	1000.0	9.000	L1

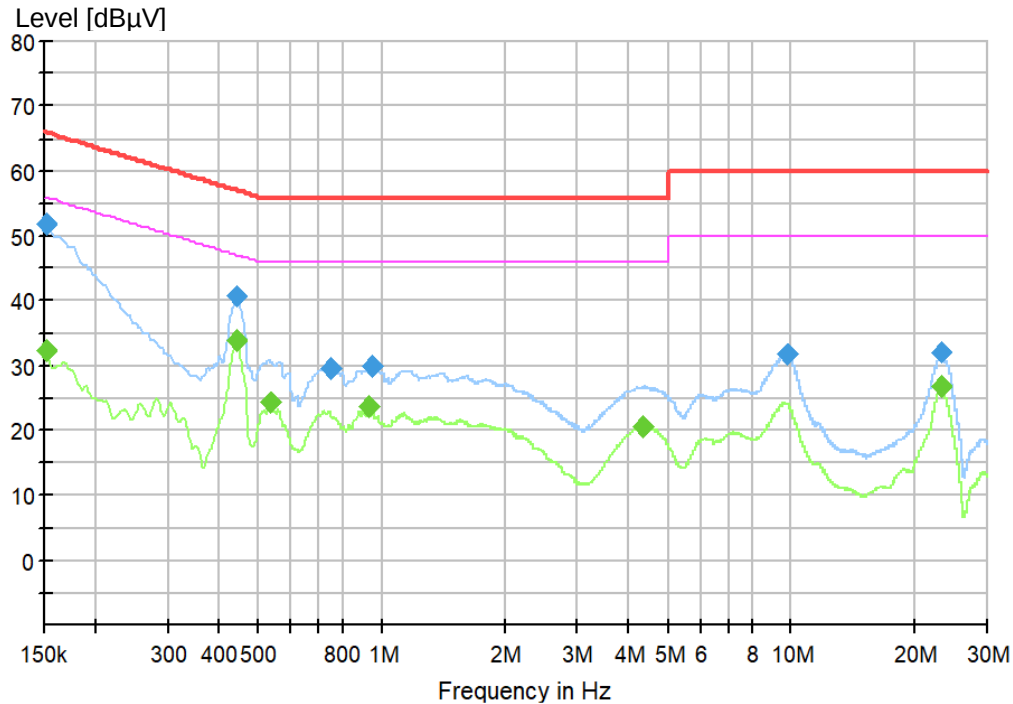Figure 8: Spectral Diagrams, Conducted Emission, 150 kHz – 30 MHz, N on mode 4


Final quasi-peak measurement result:

Frequency (MHz)	QuasiPeak (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line
0.152250	51.79	65.88	14.08	1000.0	9.000	N
0.442500	40.75	57.02	16.27	1000.0	9.000	N
0.750750	29.72	56.00	26.28	1000.0	9.000	N
0.946500	29.89	56.00	26.11	1000.0	9.000	N
9.780000	31.87	60.00	28.13	1000.0	9.000	N
23.239500	32.08	60.00	27.92	1000.0	9.000	N

Final average measurement result:

Frequency (MHz)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line
0.152250	32.30	55.88	23.58	1000.0	9.000	N
0.440250	34.04	47.06	13.02	1000.0	9.000	N
0.534750	24.45	46.00	21.55	1000.0	9.000	N
0.926250	23.58	46.00	22.42	1000.0	9.000	N
4.339500	20.67	46.00	25.33	1000.0	9.000	N
23.239500	26.83	50.00	23.17	1000.0	9.000	N

5.2 Emission in the Frequency Range above 30 MHz

5.2.1 Radiated emission (30-1000 MHz)

Result:	Passed
----------------	---------------

Date of testing	: 2025-01-07
Test procedure	: FCC 47 CFR Part 15, Subpart B:2023, ICES-005:2018, ANSI C63.4-2014 and CISPR 16-2-3
Product classification	: Class B
Frequency range	: 30 – 1000 MHz (see Note 1)
Limits	: Quasi-peak limits (3 m distance): 30 – 88 MHz, 40 dB μ V/m; 88 – 216 MHz, 43.5 dB μ V/m; 216 – 1000 MHz, 46 dB μ V/m (see Note 2)
Bandwidth of EMI receiver for final measurement	: 120 kHz
Measurement time for final measurement	: 1 s
Kind of test site	: Semi-anechoic chamber
Input voltage	: AC 120 V, 60 Hz for adapter and power supply of laptop
Operational mode	: Mode 1: EUT was powered by adapter and lighting on with max lighting output Mode 2: EUT was powered by adapter and lighting on with min lighting output Mode 3: EUT was powered by laptop and lighting on with max lighting output Mode 4: EUT was powered by laptop and lighting on with min lighting output
Ambient condition	: Temperature: 24.3 °C; Relative humidity: 46.7 %
Expanded measurement uncertainty (k=2)	: 5.40 dB The minimum margin to the limit is 12.0 dB at 30.121250 and 30.242500 MHz. The margin is higher than expanded measurement uncertainty.

The radiated disturbance test was carried out in a semi-anechoic chamber. The test distance from the receiving antenna to the EUT is 3 m. The normalized site attenuation of the semi-anechoic chamber is regularly calibrated to ensure the radiated disturbance test results are valid. During the test, the EUT was placed on an 80 cm wooden support above the reference ground plane. The wooden support was rotated 360° around and the height of the antenna was varied from 1 m to 4 m to find the maximum disturbance. The test was performed with the antenna both in its horizontal and vertical polarizations.

The following figures and tables were those measured by an automatic measurement system. A preview test was firstly performed with peak detector. The final test was performed with quasi-peak at those critical frequencies during the preview test. In the following spectral diagram, “×” means quasi-peak test results.

Prüfbericht - Nr.: CN24YK5I 001

Test Report No.:

Seite 21 von 32

Page 21 of 32

Notes on following tables of radiated emission results and conversions:

QuasiPeak (dB μ V/m): final measurement results by using quasi-peak detector


Corr. (dB): correction factor including: antenna factor, cable loss, and gain of pre-amplifier (if used)

Margin: Limit (dB μ V/m) - QuasiPeak (dB μ V/m)

Note 1: The highest frequency in the EUT is less than 108 MHz. According to FCC Part 15 subpart B §15.33 (b) (1), the upper frequency for radiated emission measurement is 1000 MHz.

Note 2: The class B limits of ICES-005:2018 is stricter than those FCC 47 CFR Part 15, Subpart B:2023 for 3 m test distance. Therefore, the former limits are used in following figures and tables.


Figure 9: Spectral Diagrams, Radiated Emission, 30 MHz – 1000 MHz, Horizontal polarization on mode 1

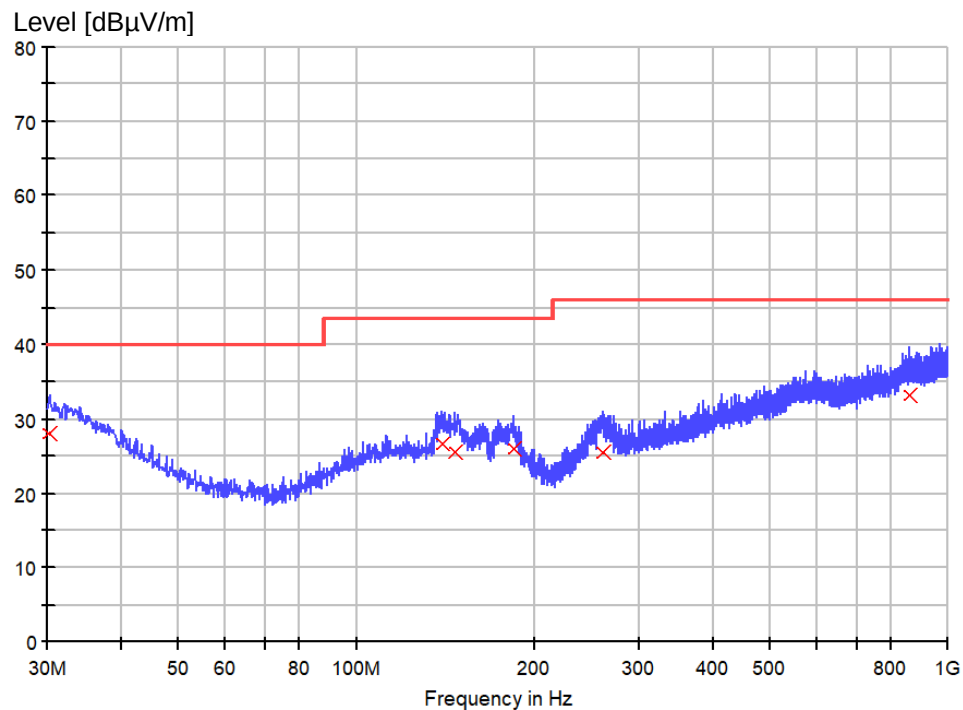

Final quasi-peak measurement results:

Frequency (MHz)	QuasiPeak (dBμV/m)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - QPK (dB)	Limit - QPK (dBμV/m)
30.121250	28.0	120.000	183	H	155	24.7	12.0	40.0
139.488750	26.7	120.000	125	H	-153	18.3	16.8	43.5
146.642500	25.4	120.000	231	H	-4	17.7	18.1	43.5
183.987500	26.0	120.000	214	H	-125	16.0	17.5	43.5
260.253750	25.5	120.000	112	H	-40	20.8	20.5	46.0
862.623750	33.3	120.000	220	H	-55	28.8	12.7	46.0


Figure 10: Spectral Diagrams, Radiated Emission, 30 MHz – 1000 MHz, Vertical polarization on mode 1

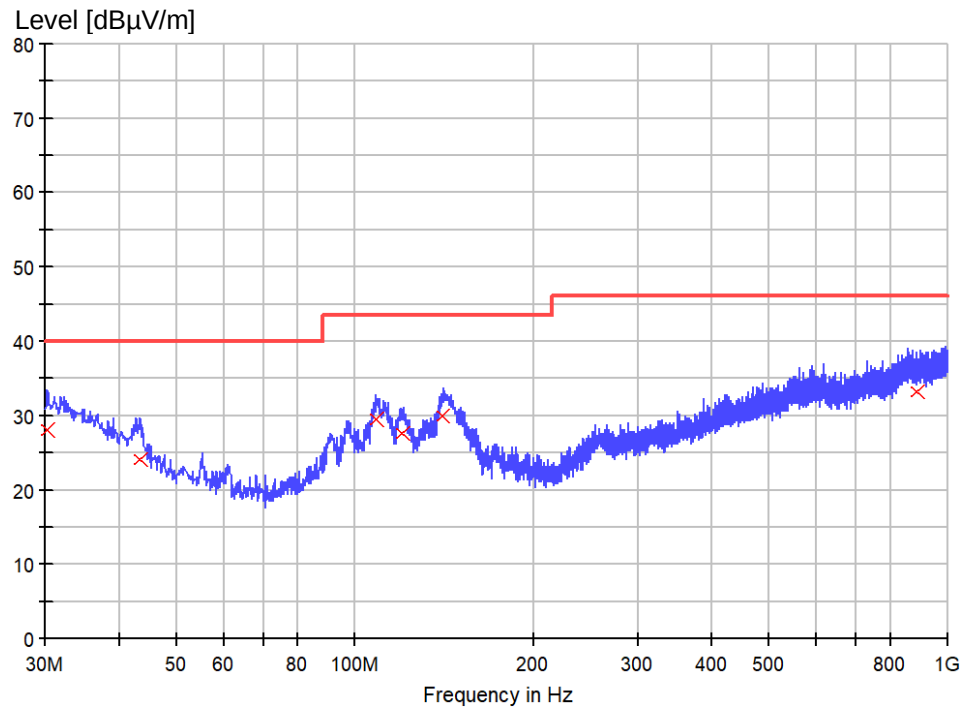

Final quasi-peak measurement results:

Frequency (MHz)	QuasiPeak (dBμV/m)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - QPK (dB)	Limit - QPK (dBμV/m)
30.242500	28.0	120.000	199	V	-169	24.7	12.0	40.0
43.458750	24.2	120.000	155	V	-72	17.9	15.8	40.0
108.570000	29.4	120.000	122	V	-30	18.5	14.1	43.5
119.846250	27.5	120.000	103	V	-143	18.9	16.0	43.5
140.580000	29.9	120.000	220	V	122	18.2	13.6	43.5
889.298750	33.2	120.000	178	V	176	28.7	12.8	46.0


Figure 11: Spectral Diagrams, Radiated Emission, 30 MHz – 1000 MHz, Horizontal polarization on mode 2

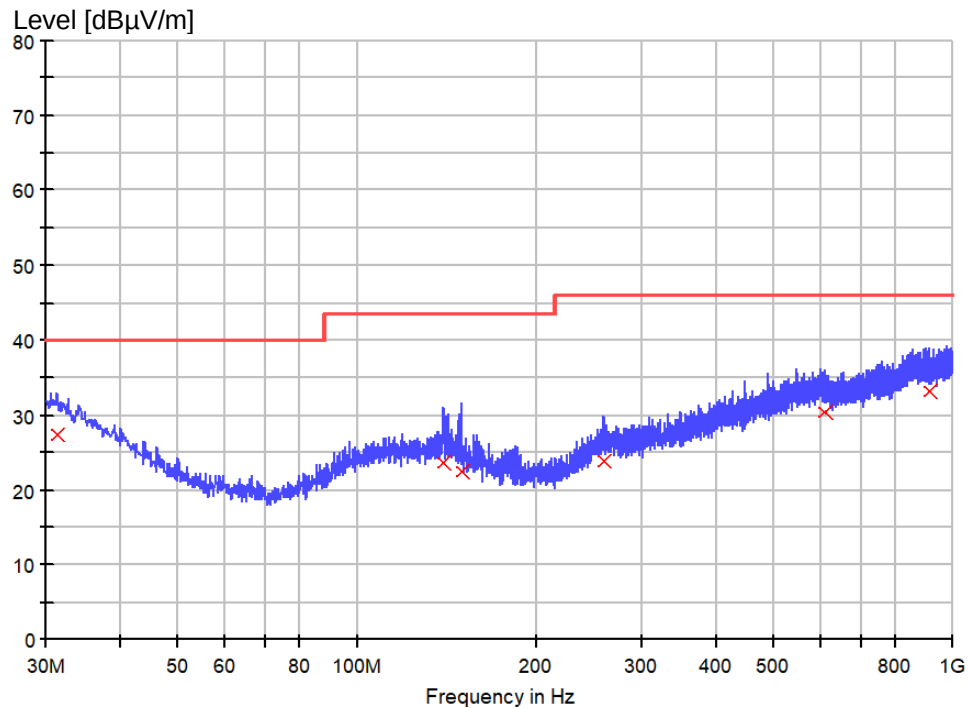

Final quasi-peak measurement results:

Frequency (MHz)	QuasiPeak (dBμV/m)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - QPK (dB)	Limit - QPK (dBμV/m)
31.455000	27.4	120.000	209	H	-172	24.1	12.6	40.0
139.731250	23.7	120.000	238	H	-152	18.3	19.8	43.5
149.552500	22.6	120.000	233	H	35	17.6	20.9	43.5
259.890000	23.9	120.000	177	H	68	20.8	22.1	46.0
611.757500	30.5	120.000	199	H	126	27.0	15.6	46.0
912.093750	33.2	120.000	236	H	-27	28.8	12.8	46.0


Figure 12: Spectral Diagrams, Radiated Emission, 30 MHz – 1000 MHz, Vertical polarization on mode 2

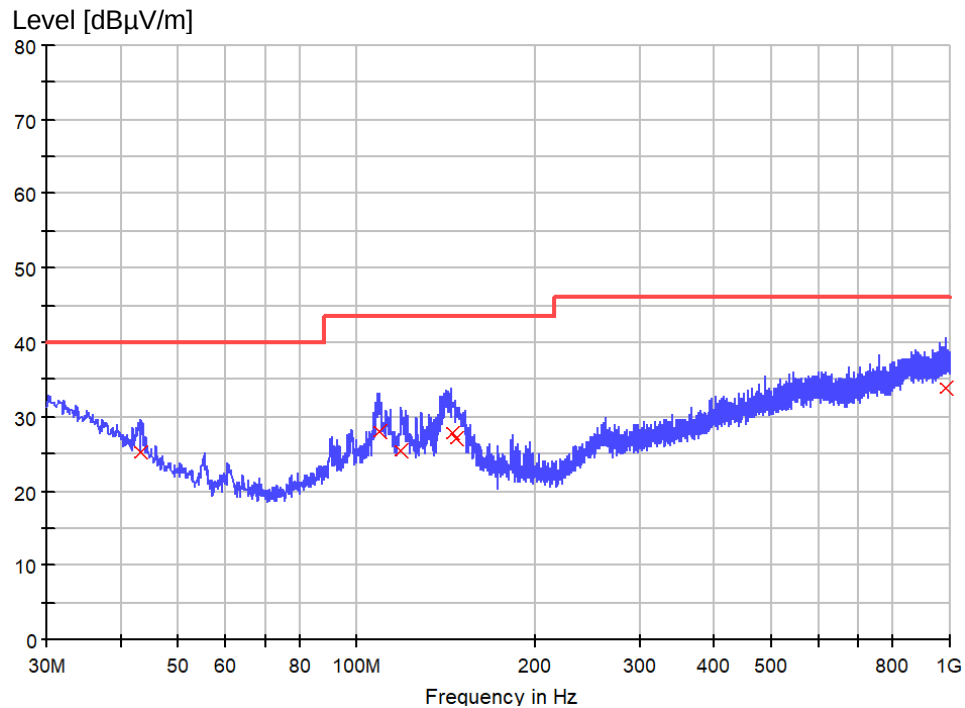

Final quasi-peak measurement results:

Frequency (MHz)	QuasiPeak (dBμV/m)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - QPK (dB)	Limit - QPK (dBμV/m)
43.216250	25.2	120.000	151	V	-172	18.1	14.8	40.0
108.812500	28.0	120.000	197	V	-14	18.5	15.5	43.5
118.633750	25.6	120.000	133	V	-114	18.9	17.9	43.5
144.338750	27.9	120.000	201	V	-94	17.9	15.6	43.5
146.642500	27.2	120.000	107	V	-111	17.7	16.3	43.5
985.207500	33.9	120.000	157	V	-98	29.8	12.1	46.0


Figure 13: Spectral Diagrams, Radiated Emission, 30 MHz – 1000 MHz, Horizontal polarization on mode 3

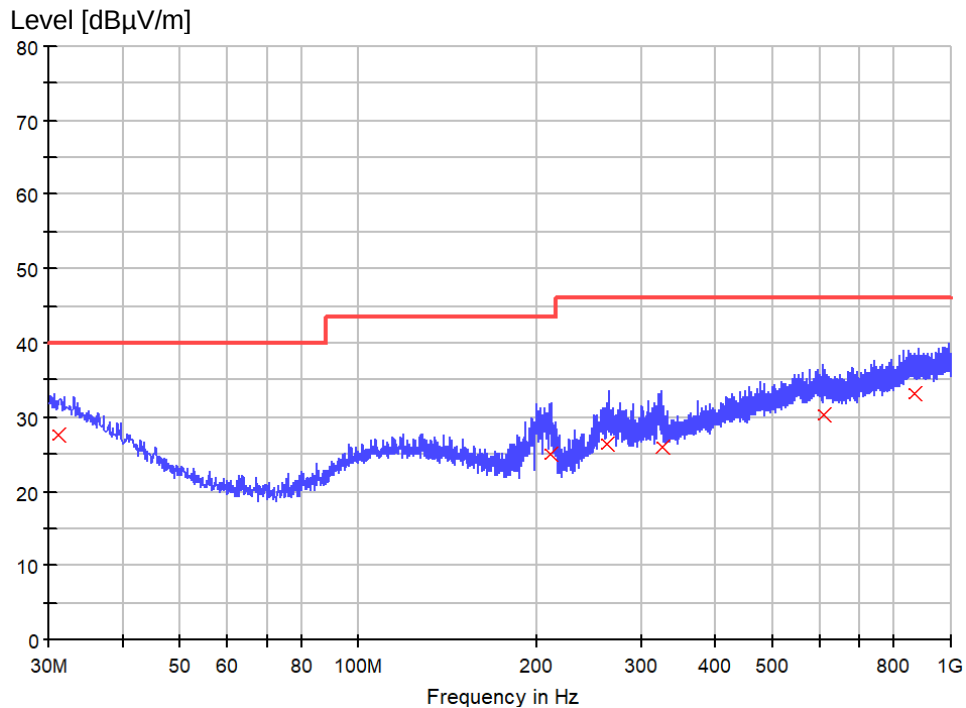

Final quasi-peak measurement results:

Frequency (MHz)	QuasiPeak (dBμV/m)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - QPK (dB)	Limit - QPK (dBμV/m)
31.091250	27.7	120.000	169	H	88	24.3	12.4	40.0
210.177500	25.1	120.000	154	H	109	16.1	18.4	43.5
261.951250	26.5	120.000	165	H	-9	20.9	19.5	46.0
324.758750	25.9	120.000	152	H	-125	20.9	20.1	46.0
609.938750	30.5	120.000	132	H	51	27.0	15.5	46.0
868.928750	33.3	120.000	204	H	-135	28.7	12.7	46.0


Figure 14: Spectral Diagrams, Radiated Emission, 30 MHz – 1000 MHz, Vertical polarization on mode 3

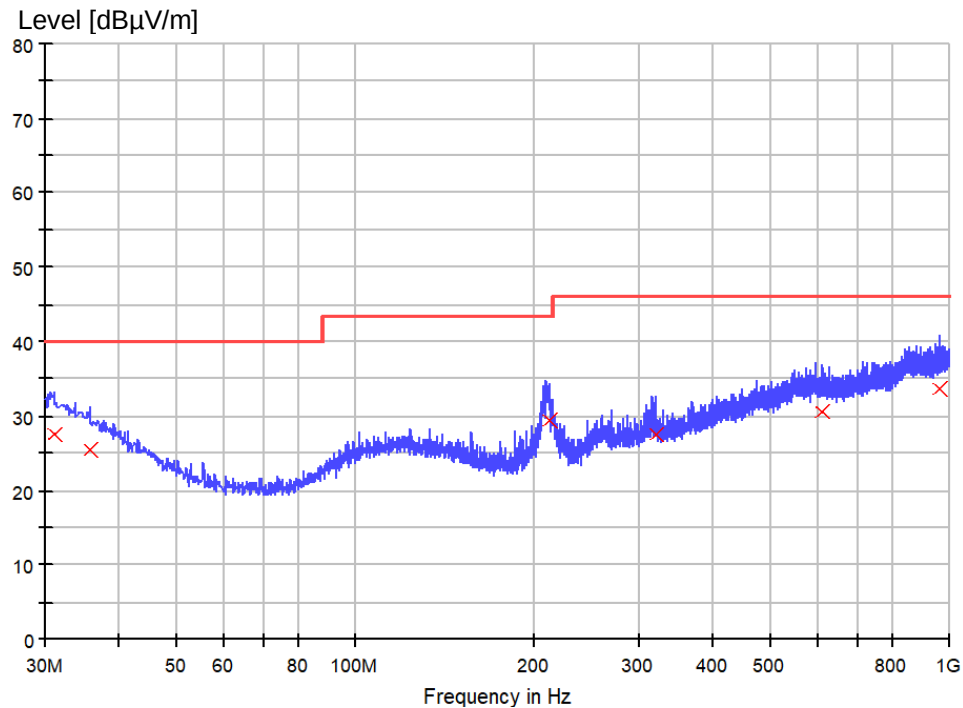

Final quasi-peak measurement results:

Frequency (MHz)	QuasiPeak (dBμV/m)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - QPK (dB)	Limit - QPK (dBμV/m)
31.091250	27.7	120.000	227	V	-127	24.3	12.4	40.0
35.698750	25.4	120.000	115	V	68	22.1	14.6	40.0
212.845000	29.5	120.000	192	V	-37	16.0	14.0	43.5
320.393750	27.7	120.000	229	V	-66	20.9	18.3	46.0
610.787500	30.6	120.000	159	V	69	27.0	15.4	46.0
966.050000	33.8	120.000	134	V	-177	29.6	12.2	46.0


Figure 15: Spectral Diagrams, Radiated Emission, 30 MHz – 1000 MHz, Horizontal polarization on mode 4

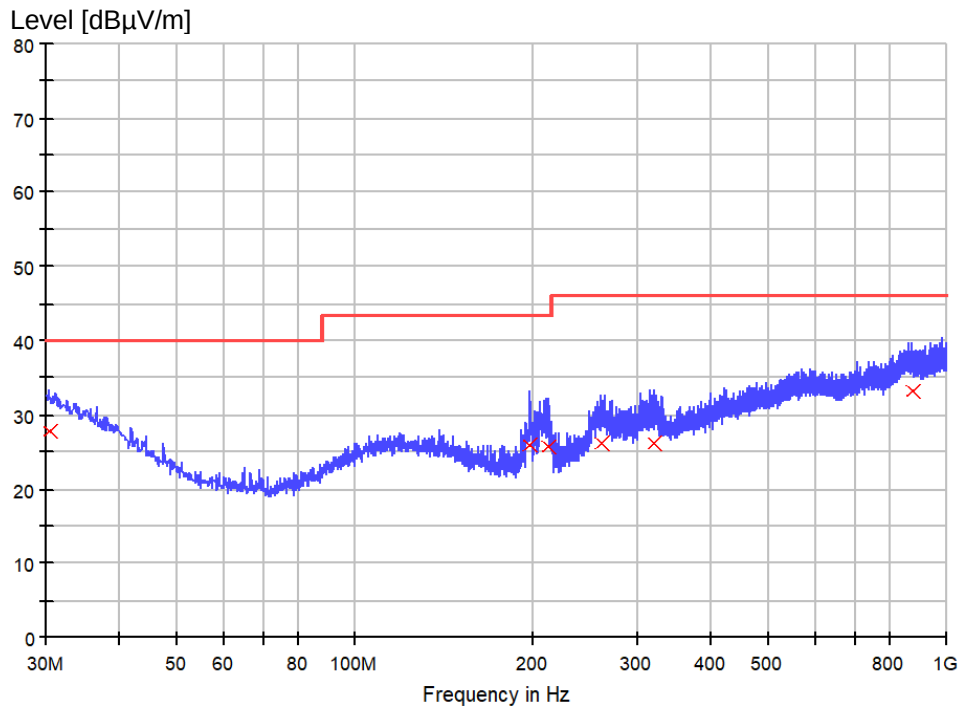

Final quasi-peak measurement results:

Frequency (MHz)	QuasiPeak (dBμV/m)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - QPK (dB)	Limit - QPK (dBμV/m)
30.363750	27.9	120.000	205	H	-38	24.6	12.1	40.0
197.567500	26.0	120.000	108	H	32	16.0	17.6	43.5
211.511250	25.8	120.000	114	H	-82	16.1	17.7	43.5
260.011250	26.1	120.000	205	H	-171	20.8	19.9	46.0
321.363750	26.2	120.000	242	H	125	20.9	19.8	46.0
876.446250	33.3	120.000	132	H	32	28.7	12.7	46.0

Figure 16: Spectral Diagrams, Radiated Emission, 30 MHz – 1000 MHz, Vertical polarization on mode 4

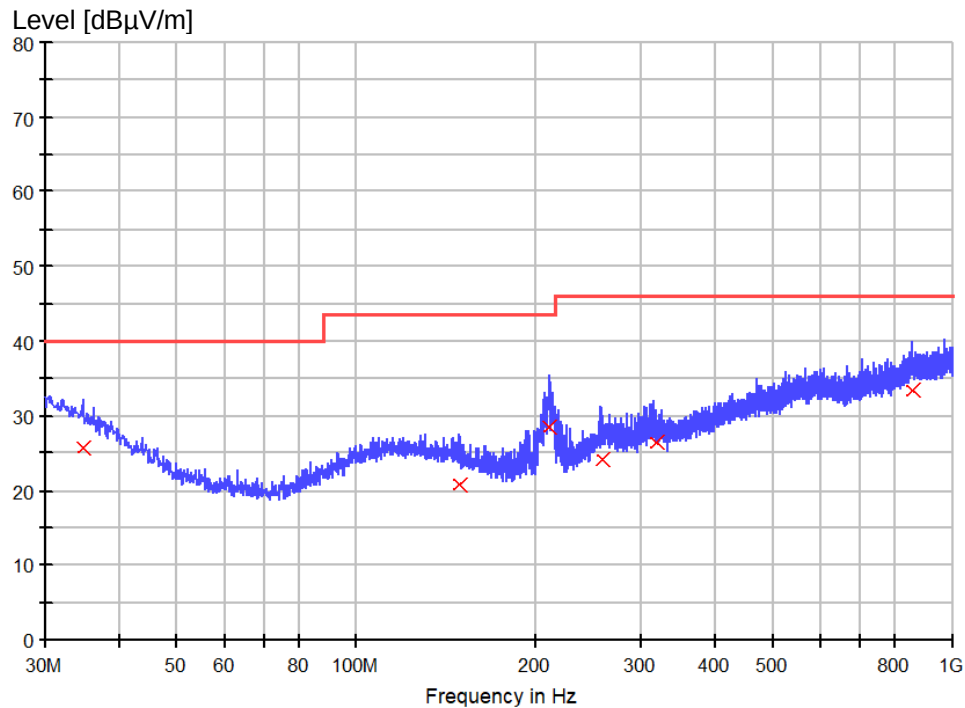

Final quasi-peak measurement results:

Frequency (MHz)	QuasiPeak (dBμV/m)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - QPK (dB)	Limit - QPK (dBμV/m)
34.728750	25.8	120.000	119	V	-158	22.6	14.2	40.0
148.340000	20.8	120.000	136	V	93	17.7	22.7	43.5
210.783750	28.5	120.000	179	V	-100	16.1	15.0	43.5
258.798750	24.1	120.000	164	V	-23	20.6	21.9	46.0
318.938750	26.3	120.000	171	V	129	20.8	19.7	46.0
855.591250	33.3	120.000	217	V	-30	28.9	12.7	46.0

6 Photographs of the Test Set-Up

Refer to the test setup file.

Prüfbericht - Nr.: CN24YK5I 001
Test Report No.:Seite 31 von 32
Page 31 of 32

7 List of Test and Measurement Instruments

Equip.	Description	Model	Manufacturer	Last Date DD.MM.YYYY	Due Date DD.MM.YYYY
G1811378	3m semi-anechoic chamber	SAC3	Frankonia	03.12.2023	03.12.2026
G1811391	EMI test receiver	ESCI	Rohde&Schwarz	17.10.2024	17.10.2025
G1811425	Bilog antenna	CBL 6112D	Teseq	20.04.2023	20.04.2026
9062745	EMI measurement software	EMC32-MEB (10.60.20)	Rohde&Schwarz	N/A	N/A
9061503	Shielded enclosure	10.055x3.605x3.000	Frankonia	08.11.2023	08.11.2028
9023229	EMI test receiver	ESR3	Rohde&Schwarz	03.08.2024	03.08.2025
G1830003	Artificial mains network	ENV432	Rohde&Schwarz	11.10.2024	11.10.2025
G1824248	Dual display multimeter	F45	Fluke	28.06.2024	28.06.2025
9062744	EMI measurement software	EMC32-E+(10.60.20)	Rohde&Schwarz	N/A	N/A

8 List of Figures

Figure 1: Spectral Diagrams, Conducted Emission, 150 kHz – 30 MHz, L on mode 1	12
Figure 2: Spectral Diagrams, Conducted Emission, 150 kHz – 30 MHz, N on mode 1	13
Figure 3: Spectral Diagrams, Conducted Emission, 150 kHz – 30 MHz, L on mode 2	14
Figure 4: Spectral Diagrams, Conducted Emission, 150 kHz – 30 MHz, N on mode 2	15
Figure 1: Spectral Diagrams, Conducted Emission, 150 kHz – 30 MHz, L on mode 3	16
Figure 2: Spectral Diagrams, Conducted Emission, 150 kHz – 30 MHz, N on mode 3	17
Figure 3: Spectral Diagrams, Conducted Emission, 150 kHz – 30 MHz, L on mode 4	18
Figure 4: Spectral Diagrams, Conducted Emission, 150 kHz – 30 MHz, N on mode 4	19
Figure 5: Spectral Diagrams, Radiated Emission, 30 MHz – 1000 MHz, Horizontal polarization on mode 1	22
Figure 6: Spectral Diagrams, Radiated Emission, 30 MHz – 1000 MHz, Vertical polarization on mode 1	23
Figure 7: Spectral Diagrams, Radiated Emission, 30 MHz – 1000 MHz, Horizontal polarization on mode 2	24
Figure 8: Spectral Diagrams, Radiated Emission, 30 MHz – 1000 MHz, Vertical polarization on mode 2	25
Figure 5: Spectral Diagrams, Radiated Emission, 30 MHz – 1000 MHz, Horizontal polarization on mode 3	26
Figure 6: Spectral Diagrams, Radiated Emission, 30 MHz – 1000 MHz, Vertical polarization on mode 3	27
Figure 7: Spectral Diagrams, Radiated Emission, 30 MHz – 1000 MHz, Horizontal polarization on mode 4	28
Figure 8: Spectral Diagrams, Radiated Emission, 30 MHz – 1000 MHz, Vertical polarization on mode 4	29

End of test report