

<b>Prüfbericht-Nr.:</b> Test report no.:	<b>CN24KRQE 001</b>	<b>Auftrags-Nr.:</b> Order no.:	<b>326041357</b>	<b>Seite 1 von 24</b> Page 1 of 24
<b>Kunden-Referenz-Nr.:</b> Client reference no.:	<b>1288983</b>	<b>Auftragsdatum:</b> Order date:	<b>2024-08-26</b>	
<b>Auftraggeber:</b> Client:	<b>IKEA of Sweden AB</b> Box 702, SE-343 81 Älmhult, Sweden			
<b>Prüfgegenstand:</b> Test item:	<b>LED lighting chain</b>			
<b>Bezeichnung / Typ-Nr.:</b> Identification / Type no.:	<b>J2506</b>			
<b>Auftrags-Inhalt:</b> Order content:	<b>TÜV Rheinland EMC service</b>			
<b>Prüfgrundlage:</b> Test specification:	<b>FCC 47 CFR Part 15, Subpart B:2023 Class B</b> <b>ICES-005:2018</b>			
<b>Wareneingangsdatum:</b> Date of sample receipt:	<b>2024-12-13</b>	Refer to the EUT photos file		
<b>Prüfmuster-Nr.:</b> Test sample no.:	<b>A003888194-001</b>			
<b>Prüfzeitraum:</b> Testing period:	<b>Refer to test report</b>			
<b>Ort der Prüfung:</b> Place of testing:	<b>Refer to clause 1.1</b>			
<b>Prüflaboratorium:</b> Testing laboratory:	<b>TÜV Rheinland (Shanghai) Co., Ltd.</b>			
<b>Prüfergebnis*:</b> Test result*:	<b>Pass</b>			
<b>geprüft von:</b> tested by:	<i>Jessie Xu</i>	<b>genehmigt von:</b> authorized by:	<i>Jiayi Zhou</i>	
<b>Datum:</b> Date:	2025-01-08	<b>Ausstellungsdatum:</b> Issue date:	2025-01-08	
<b>Stellung / Position:</b>	Project engineer	<b>Stellung / Position:</b>	Authorizer	
<b>Sonstiges /</b> Other:	FCC ID: FHO-J2506 Test Firm Name: TÜV Rheinland (Shanghai) Co., Ltd. Designation Number: CN1396 Test Firm Registration Number: 930979			
<b>Zustand des Prüfgegenstandes bei Anlieferung:</b> Condition of the test item at delivery:	<b>Prüfmuster vollständig und unbeschädigt</b> <i>Test item complete and undamaged</i>			
* Legende:	P(ass) = entspricht o.g. Prüfgrundlage(n)	F(ail) = entspricht nicht o.g. Prüfgrundlage(n)	N/A = nicht anwendbar	N/T = nicht getestet
* Legend:	P(ass) = passed a.m. test specification(s)	F(ail) = failed a.m. test specification(s)	N/A = not applicable	N/T = not tested
<b>Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens.</b> <i>This test report only relates to the above mentioned test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>				

Prüfbericht-Nr.: CN24KRQE 001  
Test report no.:

Seite 2 von 24  
Page 2 of 24

**Anmerkungen**  
Remarks

- |   |  |
|---|--|
| 1 | <p>Alle eingesetzten Prüfmittel waren zum angegebenen Prüfzeitraum gemäß eines festgelegten Kalibrierungsprogramms unseres Prüfhauses kalibriert. Sie entsprechen den in den Prüfprogrammen hinterlegten Anforderungen. Die Rückverfolgbarkeit der eingesetzten Prüfmittel ist durch die Einhaltung der Regelungen unseres Managementsystems gegeben.<br/>Detaillierte Informationen bezüglich Prüfkonditionen, Prüfequipment und Messunsicherheiten sind im Prüflabor vorhanden und können auf Wunsch bereitgestellt werden.</p> <p><i>The equipment used during the specified testing period was calibrated according to our test laboratory calibration program. The equipment fulfils the requirements included in the relevant standards. The traceability of the test equipment used is ensured by compliance with the regulations of our management system. Detailed information regarding test conditions, equipment and measurement uncertainty is available in the test laboratory and could be provided on request.</i></p>   |
| 2 | <p>Wie vertraglich vereinbart, wurde dieses Dokument nur digital unterzeichnet. Der TÜV Rheinland hat nicht überprüft, welche rechtlichen oder sonstigen diesbezüglichen Anforderungen für dieses Dokument gelten. Diese Überprüfung liegt in der Verantwortung des Benutzers dieses Dokuments. Auf Verlangen des Kunden kann der TÜV Rheinland die Gültigkeit der digitalen Signatur durch ein gesondertes Dokument bestätigen. Diese Anfrage ist an unseren Vertrieb zu richten. Eine Umweltgebühr für einen solchen zusätzlichen Service wird erhoben. Informationen zur Verifizierung der Authentizität unserer Dokumente erhalten Sie auf folgender Webseite: <a href="http://go.tuv.com/digital-signature">go.tuv.com/digital-signature</a></p> <p><i>As contractually agreed, this document has been signed digitally only. TUV Rheinland has not verified and unable to verify which legal or other pertaining requirements are applicable for this document. Such verification is within the responsibility of the user of this document. Upon request by its client, TUV Rheinland can confirm the validity of the digital signature by a separate document. Such request shall be addressed to our Sales department. An environmental fee for such additional service will be charged. For information on verifying the authenticity of our documents, please visit the following website: <a href="http://go.tuv.com/digital-signature">go.tuv.com/digital-signature</a></i></p> |
| 3 | <p>Prüfklausel mit der Note * wurden an qualifizierte Unterauftragnehmer vergeben und sind unter der jeweiligen Prüfklausel des Berichts beschrieben.<br/>Abweichungen von Prüfspezifikation(en) oder Kundenanforderungen sind in der jeweiligen Prüfklausel im Bericht aufgeführt.</p> <p><i>Test clauses with remark of * are subcontracted to qualified subcontractors and described under the respective test clause in the report.<br/>Deviations of testing specification(s) or customer requirements are listed in specific test clause in the report.</i></p>  |
| 4 | <p>Die Entscheidungsregel für Konformitätserklärungen basierend auf numerischen Messergebnissen in diesem Prüfbericht basiert auf der "Null-Grenzwert-Regel" und der "Einfachen Akzeptanz" gemäß ILAC G8:2019 und IEC Guide 115:2021, es sei denn, in der auf Seite 1 dieses Berichts genannten angewandten Norm ist etwas anderes festgelegt oder vom Kunden gewünscht. Dies bedeutet, dass die Messunsicherheit nicht berücksichtigt wird und daher auch nicht im Prüfbericht angegeben wird. Zu weiteren Informationen bezüglich des Risikos durch diese Entscheidungsregel siehe ILAC G8:2019.</p> <p><i>The decision rule for statements of conformity, based on numerical measurement results, in this test report is based on the "Zero Guard Band Rule" and "Simple Acceptance" in accordance with ILAC G8:2019 and IEC Guide 115:2021, unless otherwise specified in the applied standard mentioned on Page 1 of this report or requested by the customer. This means that measurement uncertainty is not taken in account and hence also not declared in the test report. For additional information to the resulting risk based of this decision rule please refer to ILAC G8:2019.</i></p>   |

**Prüfbericht - Nr.:** CN24KRQE 001  
*Test Report No.:***Seite 3 von 24**  
*Page 3 of 24***Revision history of test report:**

<b>Report number</b>	<b>Issue date</b>	<b>Contents and reason for change if appropriate</b>
CN24KRQE 001	2025-01-08	Initial release.

# Contents

<b>1</b>	<b>TEST SITES</b> .....	<b>5</b>
1.1	TEST FACILITIES.....	5
<b>2</b>	<b>GENERAL PRODUCT INFORMATION</b> .....	<b>6</b>
2.1	PRODUCT FUNCTION AND INTENDED USE.....	6
2.2	RATINGS AND SYSTEM DETAILS.....	6
2.3	INDEPENDENT OPERATION MODES.....	6
2.4	DESCRIPTION OF INTERCONNECTING CABLES .....	6
2.5	NOISE GENERATING AND NOISE SUPPRESSING PARTS .....	6
2.6	HIGHEST FREQUENCY GENERATED OR USED IN THE DEVICE OR ON WHICH THE DEVICE OPERATES OR TUNES .	6
2.7	SUBMITTED DOCUMENTS.....	6
<b>3</b>	<b>TEST SET-UP AND OPERATION MODES</b> .....	<b>7</b>
3.1	PRINCIPLE OF CONFIGURATION SELECTION .....	7
3.2	EQUIPMENT AND CABLE ARRANGEMENT.....	7
3.3	TEST SOFTWARE .....	8
3.4	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT .....	8
3.5	COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE.....	8
<b>4</b>	<b>CONFORMITY DECISION RULE</b> .....	<b>9</b>
<b>5</b>	<b>TEST RESULTS EMISSION</b> .....	<b>10</b>
5.1	EMISSION IN THE FREQUENCY RANGE UP TO 30 MHz .....	10
5.1.1	Conducted emission .....	10
5.2	EMISSION IN THE FREQUENCY RANGE ABOVE 30 MHz.....	16
5.2.1	Radiated emission (30-1000 MHz).....	16
<b>6</b>	<b>PHOTOGRAPHS OF THE TEST SET-UP</b> .....	<b>22</b>
<b>7</b>	<b>LIST OF TEST AND MEASUREMENT INSTRUMENTS</b> .....	<b>23</b>
<b>8</b>	<b>LIST OF FIGURES</b> .....	<b>24</b>

# 1 Test Sites

## 1.1 Test Facilities

**Laboratory:** TÜV Rheinland (Shanghai) Co., Ltd.

**Address:** Workshop14, North Half of Workshop 10 and Workshop 16, Pingqian (Taicang) Modern Industrial Park, No.525, Yuewang Lingang South Road, Shaxi, Taicang, Jiangsu, China

The used test equipment is in accordance with CISPR 16-1 series standards for measurement of radio interference.

Refer to Clause 7 for test and measurement instruments.

## 2 General Product Information

### 2.1 Product Function and Intended Use

The EUT (equipment under test) is an ordinary LED lighting chain for lighting and similar use. For the further information, refer to the user's manual.

### 2.2 Ratings and System Details

Rated input : AC 120 V, 60 Hz, 0.02 A  
 Rated power : Max 3.8 W  
 Protection class : II

This product is LED light chain, it be powered by approved Class 2 power unit ICPSW24-3.6-IL-1. The information of power unit as below:

Manufacturer/ trademark	Type/model	Technical data
IKEA OF SWEDEN AB	ICPSW24-3.6-IL-1	Input: 100-240 VAC; 50/60 Hz; Max.0.05 A Output: 24 VDC; Max. 0.15 A; 3.6 W

### 2.3 Independent Operation Modes

The basic operation modes are: "lighting on" "flash" and "off".

### 2.4 Description of interconnecting cables

No.	Interface and name	Shielded or not	Specified length (m)
1	AC power line of LED driver	Unshielded	0.95
2	DC power line of LED driver	Unshielded	5.1

### 2.5 Noise Generating and Noise Suppressing Parts

Refer to the circuit diagram for further information.

### 2.6 Highest frequency generated or used in the device or on which the device operates or tunes

The highest frequency used in the EUT is 8 MHz.

### 2.7 Submitted Documents

Circuit diagram, user's manual and rating label.

### 3 Test Set-up and Operation Modes

#### 3.1 Principle of Configuration Selection

**Emission:** The equipment under test (EUT) was configured to measure its highest possible emission level. The test conditions were adapted accordingly in reference to the instructions for use.

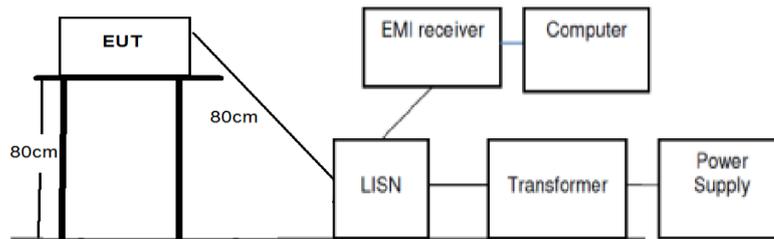
Refer to the related paragraph of this report.

The sequence of testing:

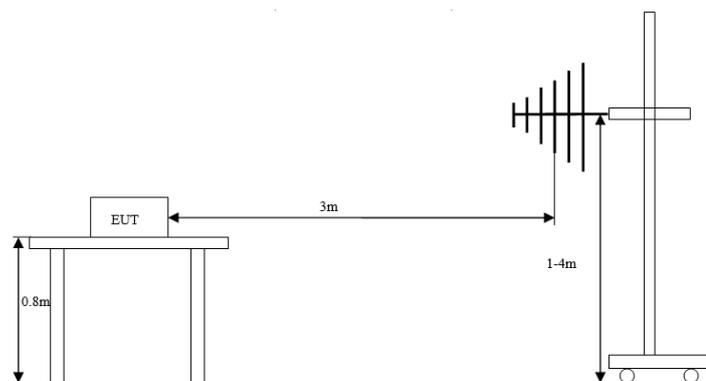
1. Conducted emission tests were performed on 2024-12-17.
2. Radiated emission tests were performed on 2024-11-07~2024-12-17.

#### 3.2 Equipment and cable arrangement

Block diagram for both conducted emission and radiated emission tests is as follows:



(Conducted emission)



(Radiated emission 30-1000 MHz)

Also refer to photographs on clause 6 for test setups for both conducted emission test and radiated emission test.

### **3.3 Test Software**

No special test software was used during the tests.

### **3.4 Special Accessories and Auxiliary Equipment**

None.

### **3.5 Countermeasures to achieve EMC Compliance**

No other special measure is employed to achieve the requirement.

## 4 Conformity Decision Rule

For all EMI tests included in this report, as measurement uncertainties are less than the values  $U_{\text{CISPR}}$  given in CISPR 16-4-2, compliance with the limits is determined by comparing measurement results directly with corresponding limits without taking into consideration of measurement uncertainties.

## 5 Test Results EMISSION

### 5.1 Emission in the Frequency Range up to 30 MHz

#### 5.1.1 Conducted emission

<b>Result:</b>	<b>Passed</b>
Date of testing	: 2024-12-17
Test procedure	: FCC 47 CFR Part 15, Subpart B:2023, ICES-005:2018, ANSI C63.4-2014 and CISPR 16-2-1
Frequency range	: 0.15 – 30 MHz
Limits	: Quasi-peak limit: 0.15 – 0.5 MHz, 66 to 56 dB $\mu$ V (decrease with the logarithm of frequency); 0.5 – 5 MHz, 56 dB $\mu$ V; 5 – 30 MHz, 60 dB $\mu$ V Average limit: 0.15 – 0.5 MHz, 56 to 46 dB $\mu$ V (decrease with the logarithm of frequency); 0.5 – 5 MHz, 46 dB $\mu$ V; 5 – 30 MHz, 50 dB $\mu$ V
Bandwidth of EMI receiver for final measurement	: 9 kHz
Measurement time for final measurement	: 1 s
Kind of test site	: Shielded room
Input voltage	: AC 120 V, 60 Hz
Operational mode	: Mode 1: Lighting on Mode 2: Flashing
Ambient condition	: Temperature: 21.5 °C; Relative humidity: 48 %
Expanded measurement uncertainty ( $k=2$ )	: 2.33 dB The minimum margin to the limit is 6.12 dB at 0.150000 MHz. The margin is higher than expanded measurement uncertainty.

The measurement setup was made according to ANSI C63.4-2014 in a shielded room.

The measurement equipment like test receivers, quasi-peak detector and artificial mains network (AMN) are in compliance with CISPR 16-1 series standards.

The tested object was set-up on a wooden support. The EUT was set 0.8 m away from the AMN. The cord longer than necessary to be connected to the AMN was folded forth and back parallel so as to form a bundle with a length between 0.3 m and 0.4 m.

The disturbance voltage test was performed on the neutral line and phase line of the power supply of the EUT respectively.

**Prüfbericht - Nr.:** CN24KRQE 001**Seite 11 von 24**

Test Report No.:

Page 11 of 24

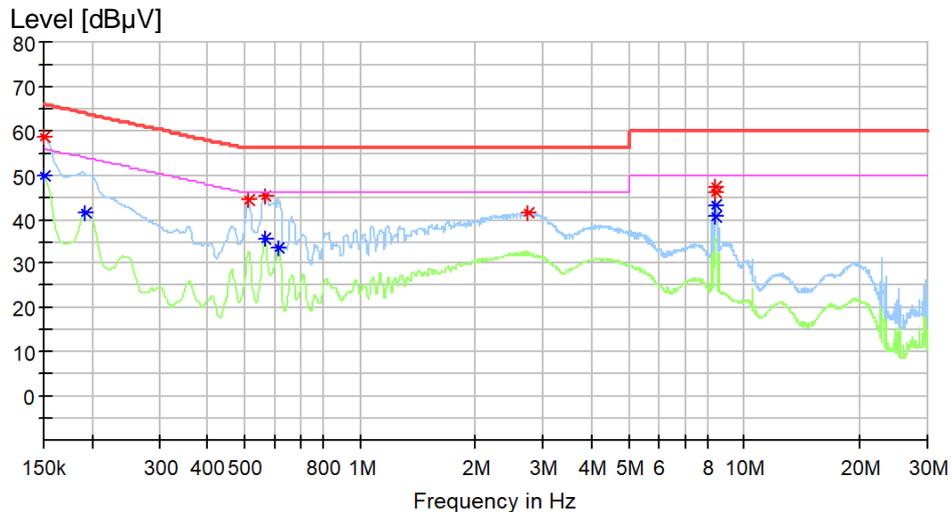
The following figures and tables were those measured by an automatic measuring system. Both quasi-peak and average measurements were performed. In the following spectral diagram, “\*” means Quasi-Peak Value and “\*” means Average Value results.

Notes on following tables of conducted emission results and conversions:

Level (dB $\mu$ V): final measurement results by using quasi-peak detector and average detector

Transd (dB): transducer factor including cable loss, insertion loss of artificial mains network and gain of pre-amplifier (if used)

Margin: Limit (dB $\mu$ V) - Level (dB $\mu$ V)

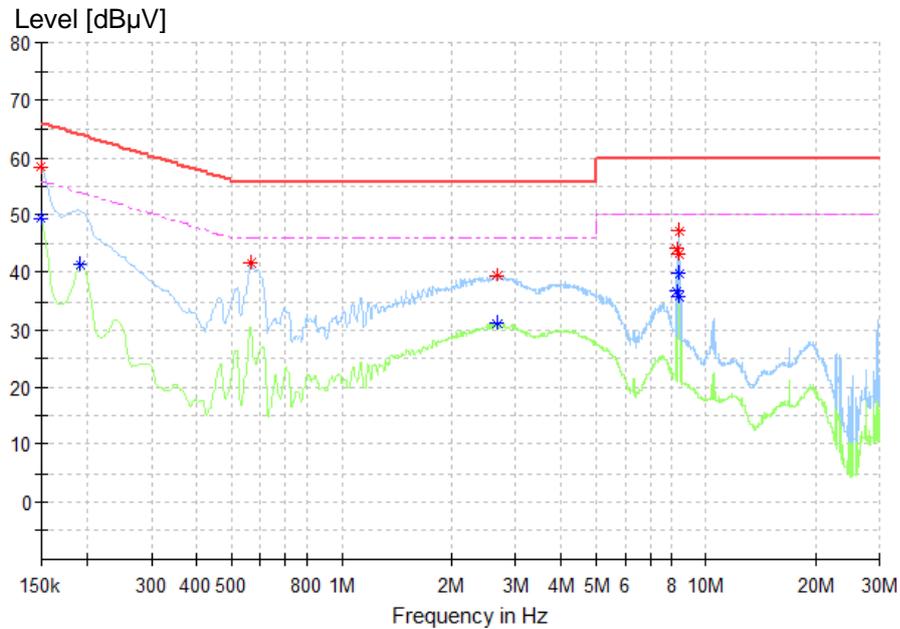
**Figure 1: Spectral Diagrams, Conducted Emission, 150 kHz – 30 MHz, L, mode 1**


Final quasi-peak measurement result:

Frequency (MHz)	QuasiPeak (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)
2.719500	41.46	56.00	14.54	L1	10.1
0.510000	44.44	56.00	11.56	L1	10.3
0.566250	45.05	56.00	10.95	L1	10.3
8.385000	45.92	60.00	14.08	L1	10.8
8.452500	47.32	60.00	12.68	L1	10.8
0.150000	58.79	66.00	7.22	L1	10.3

Final average measurement result:

Frequency (MHz)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)
8.412000	40.61	50.00	9.39	L1	10.8
0.192750	41.30	53.92	12.62	L1	10.3
8.452500	43.07	50.00	6.93	L1	10.8
0.611250	33.41	46.00	12.59	L1	10.3
0.150000	49.88	56.00	6.12	L1	10.3
0.564000	35.62	46.00	10.38	L1	10.3

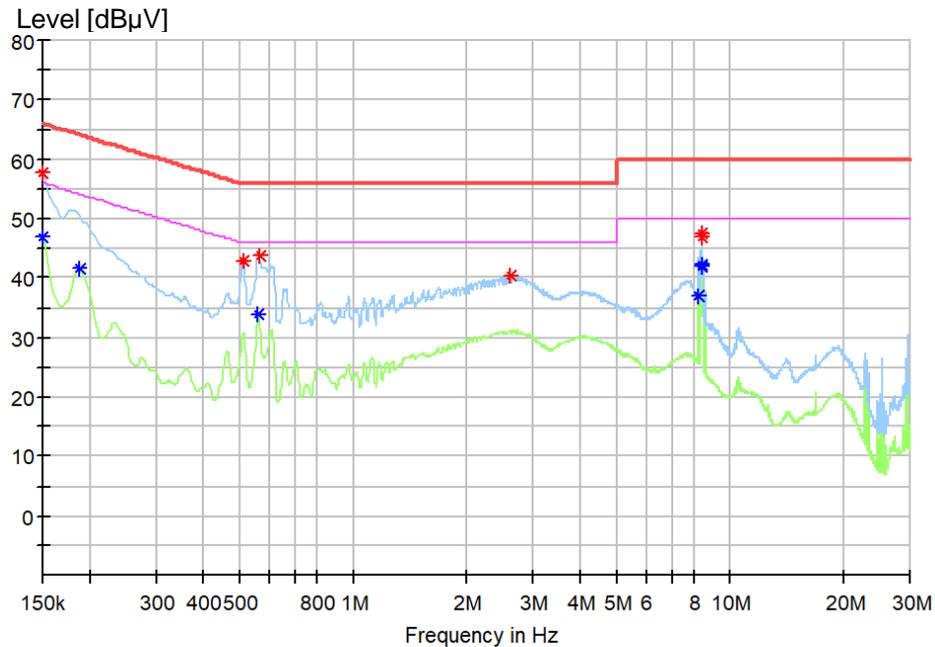
**Figure 2: Spectral Diagrams, Conducted Emission, 150 kHz – 30 MHz, N, mode 1**


Final quasi-peak measurement result:

Frequency (MHz)	QuasiPeak (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)
0.150000	58.45	66.00	7.55	N	10.2
0.566250	41.76	56.00	14.24	N	10.3
2.681250	39.62	56.00	16.38	N	10.6
8.362500	44.16	60.00	15.84	N	10.8
8.385000	47.16	60.00	12.84	N	10.8
8.432250	43.08	60.00	16.92	N	10.8

Final average measurement result:

Frequency (MHz)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)
0.150000	49.26	56.00	6.74	N	10.2
0.192750	41.45	53.92	12.46	N	10.7
2.683500	31.15	46.00	14.85	N	10.6
8.362500	36.68	50.00	13.32	N	10.8
8.382750	39.89	50.00	10.11	N	10.8
8.432250	35.81	50.00	14.19	N	10.8

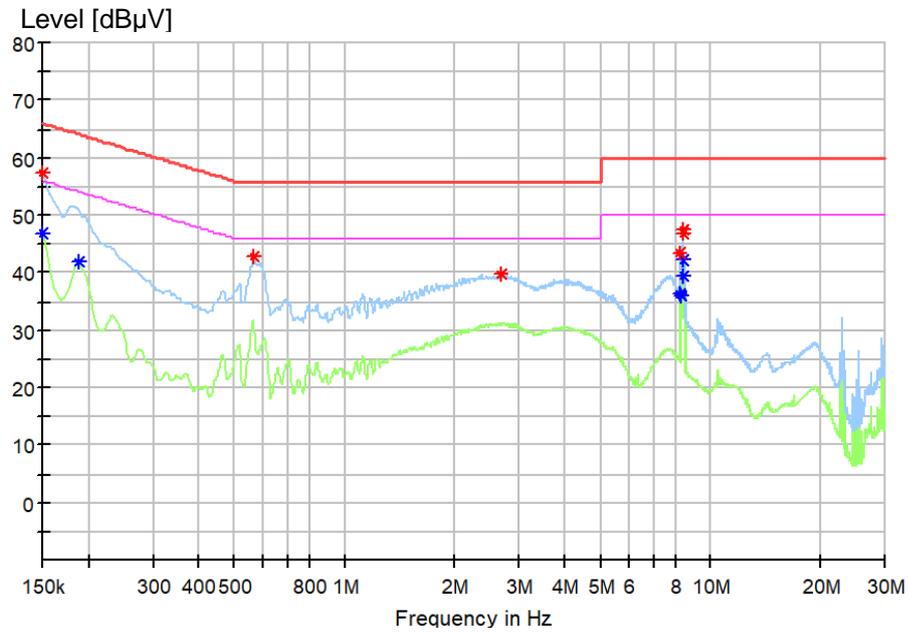
**Figure 3: Spectral Diagrams, Conducted Emission, 150 kHz – 30 MHz, L, mode 2**


Final quasi-peak measurement result:

Frequency (MHz)	QuasiPeak (dBuV)	Limit (dBuV)	Margin (dB)	Line	Corr. (dB)
0.150000	57.63	66.00	8.37	L1	10.3
0.512250	42.83	56.00	13.17	L1	10.3
0.564000	43.79	56.00	12.21	L1	10.3
2.616000	40.48	56.00	15.52	L1	10.1
8.407500	46.96	60.00	13.04	L1	10.8
8.443500	47.42	60.00	12.58	L1	10.8

Final average measurement result:

Frequency (MHz)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Corr. (dB)
0.150000	46.99	56.00	9.01	L1	10.3
0.188250	41.53	54.11	12.58	L1	10.3
0.561750	34.03	46.00	11.97	L1	10.3
8.263500	37.00	50.00	13.00	L1	10.8
8.405250	41.90	50.00	8.10	L1	10.8
8.443500	42.24	50.00	7.76	L1	10.8

**Figure 4: Spectral Diagrams, Conducted Emission, 150 kHz – 30 MHz, N, mode 2**


Final quasi-peak measurement result:

Frequency (MHz)	QuasiPeak (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)
0.150000	57.56	66.00	8.44	N	10.2
0.564000	42.86	56.00	13.14	N	10.3
2.674500	39.69	56.00	16.31	N	10.6
8.263500	43.63	60.00	16.37	N	10.8
8.380500	46.92	60.00	13.08	N	10.8
8.443500	47.58	60.00	12.42	N	10.8

Final average measurement result:

Frequency (MHz)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)
0.150000	46.96	56.00	9.04	N	10.2
0.188250	41.93	54.11	12.19	N	10.7
8.265750	36.35	50.00	13.65	N	10.8
8.317500	35.93	50.00	14.07	N	10.8
8.385000	39.34	50.00	10.66	N	10.8
8.443500	42.29	50.00	7.71	N	10.8

## 5.2 Emission in the Frequency Range above 30 MHz

### 5.2.1 Radiated emission (30-1000 MHz)

<b>Result:</b>	<b>Passed</b>
----------------	---------------

Date of testing	: 2024-11-07~2024-12-17
Test procedure	: FCC 47 CFR Part 15, Subpart B:2023, ICES-005:2018, ANSI C63.4-2014 and CISPR 16-2-3
Product classification	: Class B
Frequency range	: 30 – 1000 MHz (see Note 1)
Limits	: Quasi-peak limits (3 m distance): 30 – 88 MHz, 40 dB $\mu$ V/m; 88 – 216 MHz, 43.5 dB $\mu$ V/m; 216 – 1000 MHz, 46 dB $\mu$ V/m (see Note 2)
Bandwidth of EMI receiver for final measurement	: 120 kHz
Measurement time for final measurement	: 1 s
Kind of test site	: Semi-anechoic chamber
Input voltage	: AC 120 V, 60 Hz
Operational mode	: Mode 1: Lighting on Mode 2: Flashing
Ambient condition	: Temperature: 20.5 °C; Relative humidity: 55 %
Expanded measurement uncertainty ( $k=2$ )	: 5.40 dB The minimum margin to the limit is 6.3 dB at 33.660000 MHz. The margin is lower than expanded measurement uncertainty.

The radiated disturbance test was carried out in a semi-anechoic chamber. The test distance from the receiving antenna to the EUT is 3 m. The normalized site attenuation of the semi-anechoic chamber is regularly calibrated to ensure the radiated disturbance test results are valid. During the test, the EUT was placed on an 80 cm wooden support above the reference ground plane. The wooden support was rotated 360° around and the height of the antenna was varied from 1 m to 4 m to find the maximum disturbance. The test was performed with the antenna both in its horizontal and vertical polarizations.

The following figures and tables were those measured by an automatic measurement system. A preview test was firstly performed with peak detector. The final test was performed with quasi-peak at those critical frequencies during the preview test. In the following spectral diagram, “◆” and “×” means quasi-peak test results.

Notes on following tables of radiated emission results and conversions:

QuasiPeak (dB $\mu$  V/m): final measurement results by using quasi-peak detector  
 Corr. (dB): correction factor including: antenna factor, cable loss, and gain of pre-amplifier (if used)  
 Margin: Limit (dB $\mu$  V/m) - QuasiPeak (dB $\mu$  V/m)

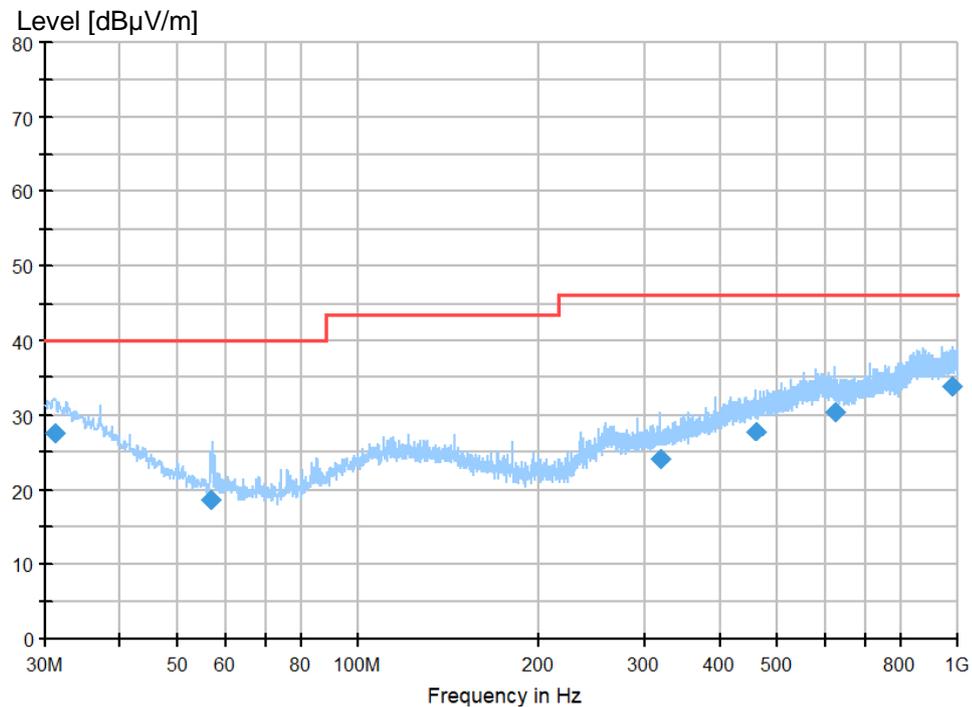
**Prüfbericht - Nr.:** CN24KRQE 001**Seite 17 von 24**

Test Report No.:

Page 17 of 24

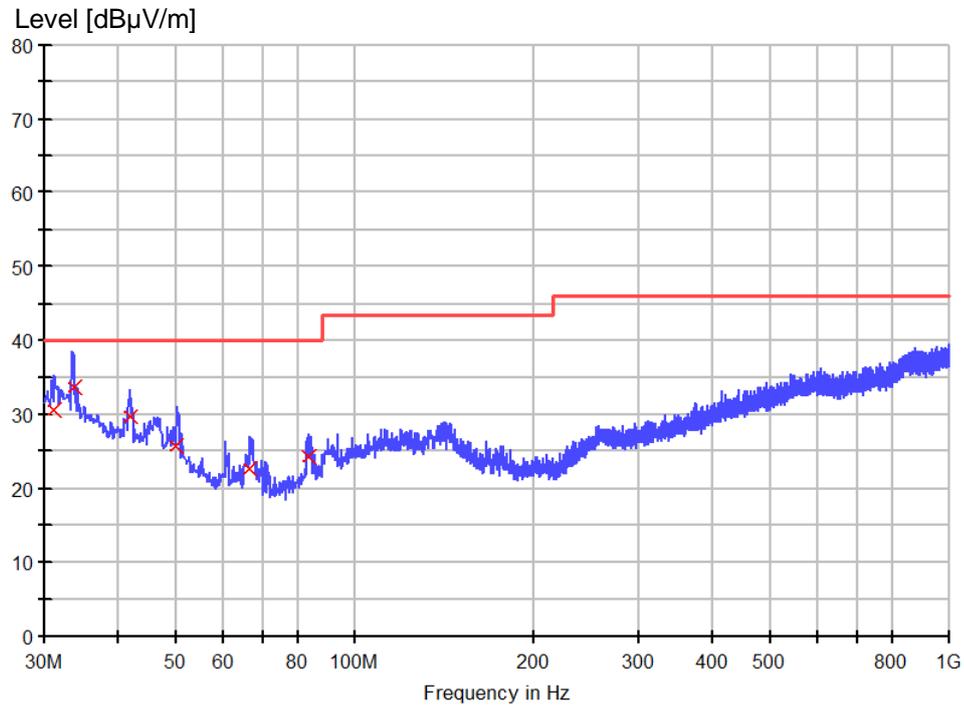
*Note 1: The highest frequency in the EUT is less than 108 MHz. According to FCC Part 15 subpart B §15.33 (b) (1), the upper frequency for radiated emission measurement is 1000 MHz.*

*Note 2: The class B limits of ICES-005:2018 is stricter than those FCC 47 CFR Part 15, Subpart B:2023 for 3 m test distance. Therefore, the former limits are used in following figures and tables.*

**Figure 5: Spectral Diagrams, Radiated Emission, 30 MHz – 1000 MHz, Horizontal polarization, mode 1**


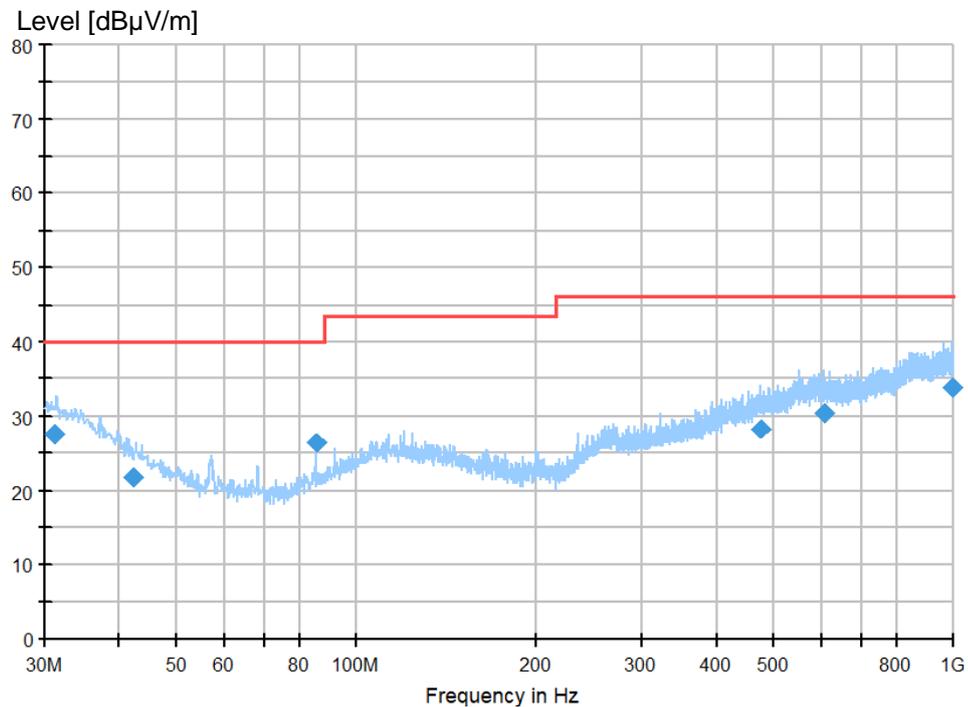
Final quasi-peak measurement results:

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
31.038650	27.67	40.00	12.33	1000.0	120.000	230.0	H	-130.0
56.570750	18.81	40.00	21.19	1000.0	120.000	230.0	H	-103.0
317.623350	24.05	46.00	21.95	1000.0	120.000	120.0	H	148.0
459.904300	27.77	46.00	18.23	1000.0	120.000	230.0	H	162.0
622.595550	30.32	46.00	15.69	1000.0	120.000	120.0	H	65.0
977.848850	33.97	46.00	12.03	1000.0	120.000	100.0	H	-116.0

**Figure 6: Spectral Diagrams, Radiated Emission, 30 MHz – 1000 MHz, Vertical polarization, mode 1**


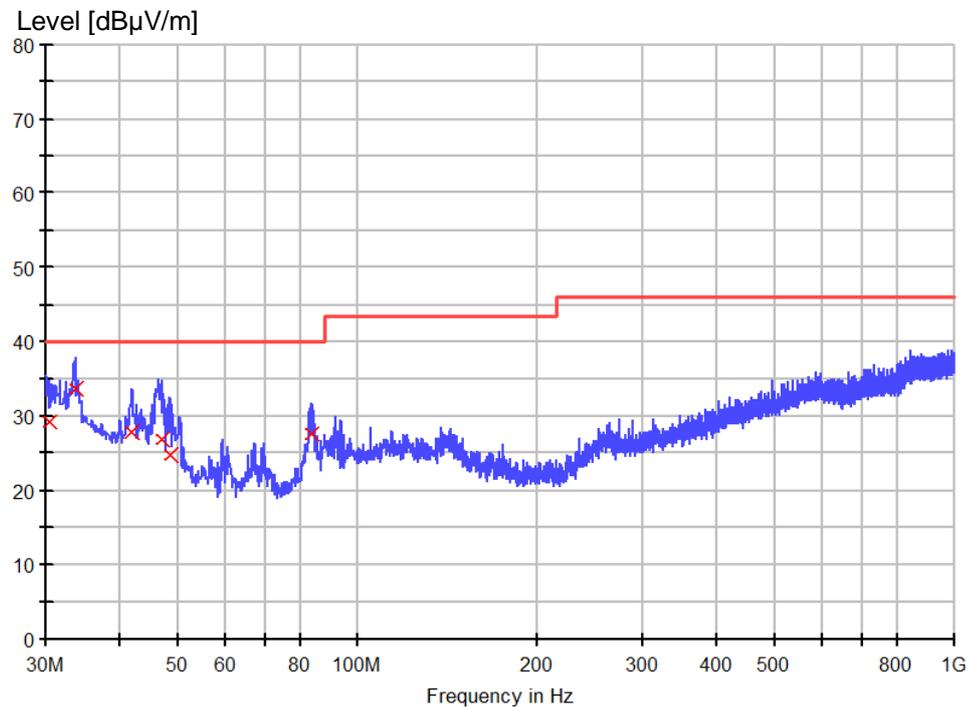
Final quasi-peak measurement results:

Frequency (MHz)	QuasiPeak (dBµV/m)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - QPK (dB)	Limit - QPK (dBµV/m)
31.200000	30.6	120.000	100.0	V	180.0	24.3	9.4	40.0
33.660000	33.6	120.000	150.0	V	-180.0	23.1	6.4	40.0
41.760000	29.7	120.000	120.0	V	180.0	18.8	10.4	40.0
50.100000	25.7	120.000	135.0	V	13.0	15.0	14.3	40.0
66.720000	22.8	120.000	180.0	V	-133.0	12.6	17.3	40.0
83.460000	24.4	120.000	110.0	V	-64.0	14.3	15.6	40.0

**Figure 7: Spectral Diagrams, Radiated Emission, 30 MHz – 1000 MHz, Horizontal polarization, mode 2**


Final quasi-peak measurement results:

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
31.031550	27.71	40.00	12.29	1000.0	120.000	230.0	H	115.0
42.232950	21.81	40.00	18.19	1000.0	120.000	230.0	H	-113.0
85.379900	26.33	40.00	13.67	1000.0	120.000	230.0	H	177.0
473.653550	28.24	46.00	17.76	1000.0	120.000	100.0	H	79.0
603.281350	30.46	46.00	15.54	1000.0	120.000	190.0	H	114.0
991.485700	33.87	46.00	12.13	1000.0	120.000	190.0	H	-151.0

**Figure 8: Spectral Diagrams, Radiated Emission, 30 MHz – 1000 MHz, Vertical polarization, mode 2**


Final quasi-peak measurement results:

Frequency (MHz)	QuasiPeak (dBµV/m)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - QPK (dB)	Limit - QPK (dBµV/m)
30.360000	29.1	120.000	100.0	V	180.0	24.6	10.9	40.0
33.660000	33.7	120.000	150.0	V	-90.0	23.1	6.3	40.0
41.880000	27.9	120.000	130.0	V	-180.0	18.8	12.2	40.0
46.980000	26.9	120.000	100.0	V	95.0	16.2	13.1	40.0
48.420000	24.8	120.000	150.0	V	-130.0	15.6	15.2	40.0
83.940000	27.5	120.000	100.0	V	180.0	14.4	12.5	40.0

## **6 Photographs of the Test Set-Up**

Refer to the test setup file.

## 7 List of Test and Measurement Instruments

Equip.	Description	Model	Manufacturer	Last Date DD.MM.YYYY	Due Date DD.MM.YYYY
G1811378	3m semi-anechoic chamber	SAC3	Frankonia	03.12.2023	03.12.2026
G1811391	EMI test receiver	ESCI	Rohde&Schwarz	17.10.2024	17.10.2025
G1811425	Bilog antenna	CBL 6112D	Teseq	20.04.2023	20.04.2026
9062745	EMI measurement software	EMC32-MEB (10.60.20)	Rohde&Schwarz	N/A	N/A
9061503	Shielded enclosure	10.055x3.605x3.000	Frankonia	08.11.2023	08.11.2028
9023229	EMI test receiver	ESR3	Rohde&Schwarz	03.08.2024	03.08.2025
G1830003	Artificial mains network	ENV432	Rohde&Schwarz	11.10.2024	11.10.2025
G1824248	Dual display multimeter	F45	Fluke	28.06.2024	28.06.2025
9062744	EMI measurement software	EMC32-E+(10.60.20)	Rohde&Schwarz	N/A	N/A

## 8 List of Figures

Figure 1: Spectral Diagrams, Conducted Emission, 150 kHz – 30 MHz, L, mode 1 .....	12
Figure 2: Spectral Diagrams, Conducted Emission, 150 kHz – 30 MHz, N, mode 1 .....	13
Figure 3: Spectral Diagrams, Conducted Emission, 150 kHz – 30 MHz, L, mode 2 .....	14
Figure 4: Spectral Diagrams, Conducted Emission, 150 kHz – 30 MHz, N, mode 2 .....	15
Figure 5: Spectral Diagrams, Radiated Emission, 30 MHz – 1000 MHz, Horizontal polarization, mode 1 .....	18
Figure 6: Spectral Diagrams, Radiated Emission, 30 MHz – 1000 MHz, Vertical polarization, mode 1 .....	19
Figure 7: Spectral Diagrams, Radiated Emission, 30 MHz – 1000 MHz, Horizontal polarization, mode 2 .....	20
Figure 8: Spectral Diagrams, Radiated Emission, 30 MHz – 1000 MHz, Vertical polarization, mode 2 .....	21

**End of test report**