

# **FCC TEST REPORT**

for

## **PART 15, SUBPART B CLASS B**

**EQUIPMENT** : TABLET

**MODEL NO.** : NewSketch 1212 HRIII

**F C C I D** : FSUGNWHR

**FILING TYPE** : Original Grant

**APPLICANT** : **KYE SYSTEMS CORP.**

No. 492, Sec. 5, Chung Hsin Rd., San Chung,  
Taipei Hsien, 241, Taiwan, R.O.C.

- The test result refers exclusively to the test presented test model / sample.
- Without the written authorization of the test lab., the Test Report may not be copied.

### ***SPORTON INTERNATIONAL INC.***

*6F, No. 106, Hsin Tai Wu Rd., Sec. 1, Hsi Chih, Taipei Hsien, Taiwan, R.O.C.*

## TABLE OF CONTENT

| SECTION TITLE                                                  | PAGE |
|----------------------------------------------------------------|------|
| CERTIFICATE OF COMPLIANCE .....                                | 3    |
| 1. GENERAL DESCRIPTION OF EQUIPMENT UNDER TEST.....            | 4    |
| 1.1. APPLICANT .....                                           | 4    |
| 1.2. MANUFACTURER .....                                        | 4    |
| 1.3. BASIC DESCRIPTION OF EQUIPMENT UNDER TEST.....            | 4    |
| 1.4. FEATURE OF EQUIPMENT UNDER TEST.....                      | 4    |
| 2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST .....            | 5    |
| 2.1. TEST MANNER .....                                         | 5    |
| 2.2. DESCRIPTION OF TEST SYSTEM.....                           | 5    |
| 2.3. CONNECTION DIAGRAM OF TEST SYSTEM.....                    | 7    |
| 3. TEST SOFTWARE.....                                          | 8    |
| 4. GENERAL INFORMATION OF TEST .....                           | 9    |
| 4.1. TEST FACILITY .....                                       | 9    |
| 4.2. STANDARD FOR METHODS OF MEASUREMENT .....                 | 9    |
| 4.3. TEST IN COMPLIANCE WITH.....                              | 9    |
| 4.4. FREQUENCY RANGE INVESTIGATED.....                         | 9    |
| 4.5. TEST DISTANCE .....                                       | 9    |
| 5. TEST OF CONDUCTED POWERLINE.....                            | 10   |
| 5.1. MAJOR MEASURING INSTRUMENTS.....                          | 10   |
| 5.2. TEST PROCEDURES.....                                      | 11   |
| 5.3. TYPICAL TEST SETUP LAYOUT OF CONDUCTED POWERLINE.....     | 12   |
| 5.4. TEST RESULT OF AC POWERLINE CONDUCTED EMISSION .....      | 13   |
| 5.5. PHOTOGRAPHS OF CONDUCTED EMISSION TEST CONFIGURATION..... | 15   |
| 6. TEST OF RADIATED EMISSION .....                             | 15   |
| 6.1. MAJOR MEASURING INSTRUMENTS.....                          | 19   |
| 6.2. TEST PROCEDURES.....                                      | 20   |
| 6.3. TYPICAL TEST SETUP LAYOUT OF RADIATED EMISSION .....      | 21   |
| 6.4. TEST RESULT OF RADIATED EMISSION.....                     | 22   |
| 6.5. PHOTOGRAPHS OF RADIATED EMISSION TEST CONFIGURATION ..... | 24   |
| 7. ANTENNA FACTOR AND CABLE LOSS .....                         | 26   |
| 8. LIST OF MEASURING EQUIPMENT USED.....                       | 27   |

## **CERTIFICATE OF COMPLIANCE**

for

### **FCC PART 15, SUBPART B CLASS B**

EQUIPMENT : TABLET

MODEL NO. : NewSketch 1212 HRIII

**F C C I D** : FSUGNWHR

APPLICANT : **KYE SYSTEMS CORP.**

No. 492, Sec. 5, Chung Hsin Rd., San Chung,  
Taipei Hsien, 241, Taiwan, R.O.C.

### **I HEREBY CERTIFY THAT :**

The measurement shown in this report were made in accordance with the procedures given in **ANSI C63.4 -1992** and the energy emitted by this equipment was ***passed*** both radiated and conducted emissions **Class B** limits.

Testing was carried out on **July 10, 1998** at **SPORTON International Inc.**

---

W. L. Huang  
General Manager

### **SPORTON INTERNATIONAL INC.**

6F, No. 106, Hsin Tai Wu Rd., Sec. 1, Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

## **1. GENERAL DESCRIPTION OF EQUIPMENT UNDER TEST**

### **1.1. APPLICANT**

#### **KYE SYSTEMS CORP.**

No. 492, Sec. 5, Chung Hsin Rd., San Chung,  
Taipei Hsien, 241, Taiwan, R.O.C.

### **1.2. MANUFACTURER**

Same as 1.1

### **1.3. BASIC DESCRIPTION OF EQUIPMENT UNDER TEST**

EQUIPMENT : TABLET

MODEL NO. : NewSketch 1212 HRIII

TRADE NAME : GENIUS

FCC ID. : FSUGNWHR

RS232 DATA CABLE : Shielded

S09, S11, P04, P05, P06, P07 DATA CABLE : Non-shielded

POWER SUPPLY TYPE : Linear

POWER CORD : N/A

### **1.4. FEATURE OF EQUIPMENT UNDER TEST**

Genius Tablet is a graphics tablet used to create or reproduce diagrams, drawings, building layouts, maps, etc. You can then save these graphics into your computer for other uses.

Using this tablet, you can :

- Trace anything; pictures, drawings, photos, maps, etc.
- Draw freehand; achieve precision and accuracy.
- Move the puck (or stylus) to select commands on the template, or move objects on the screen.
- Create a symbol library for your most often used symbols using AutoCAD.

## 2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST

### 2.1. TEST MANNER

- a. The EUT has been associated with personal computer and peripherals pursuant to ANSI C63.4-1992 and configuration operated in a manner which tended to maximize its emission characteristics in a typical application.
- b. The DELL keyboard, HP printer, ACEEX modem, SONY monitor, GENIUS USB mouse and EUT were connected to the FIC P.C. for EMI test.
- c. The following three models EUT are used and tested.
- |   |                      |       |
|---|----------------------|-------|
| ① | PUCK                 | (P04) |
| ② | STYLUS               | (S11) |
| ③ | PUCK (P06) + EMITEST |       |
- d. According to the above tests, we listed the following modes as the worst cases:
- |   |        |       |
|---|--------|-------|
| ① | PUCK   | (P04) |
| ② | STYLUS | (S11) |
- These modes test results are included in this test report.
- e. Frequency range investigated: Conduction 450 KHz to 30 MHz, Radiation 30 MHz to 1000MHz.

### 2.2. DESCRIPTION OF TEST SYSTEM

#### Support Device 1. --- MONITOR (SONY)

|                   |                  |
|-------------------|------------------|
| FCC ID            | : AK8GDM17SE2T   |
| Model No.         | : GDM-17SE2T     |
| Serial No.        | : SP1006         |
| Data Cable        | : Shielded, 1.7m |
| Power Supply Type | : Switching      |
| Power Cord        | : Non-shielded   |

#### Support Device 2. --- KEYBOARD (DELL)

|            |                  |
|------------|------------------|
| FCC ID     | : GYUM92SK       |
| Model No.  | : AT101 (DE8M)   |
| Serial No. | : SP1009         |
| Data Cable | : Shielded, 1.9m |

## Support Device 3. -- USB MOUSE (GENIUS)

FCC ID : FSUGMZFG  
Model No. : NICHE USB  
Serial No. : SP1017  
Data Cable : Shielded, 1.8m

## Support Device 4. --- PRINTER (HP)

FCC ID : B94C2642X  
Model No. : DESKJET 400  
Serial No. : SP0037  
Data Cable : Shielded, 1.35m  
Power Supply Type : Linear


## Support Device 5. -- MODEM (ACEEX)

FCC ID : IFAXDM1414  
Model No. : DM1414  
Power Supply Type : Linear, AC Adapter  
Power Cord : Non-shielded  
Serial No. : SP1019  
Data Cable : Shielded, 1.15m

## Support Device 6. --- P.C. (FIC)

FCC ID : N/A  
Model No. : P2L97  
Serial No. : SP1003  
Data Cable : Shielded  
Power Cord : Non-shielded  
Power Supply Type : Switching

( Remark : This support device was tested to comply with FCC standards and  
authorized under a declaration of conformity.)

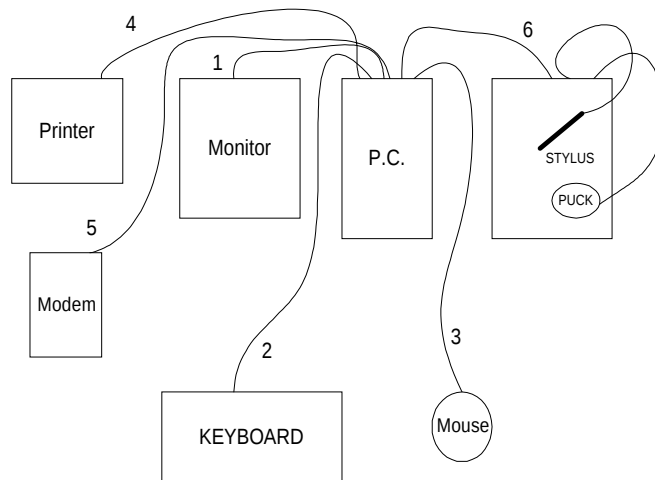**2.3. CONNECTION DIAGRAM OF TEST SYSTEM**

1. The I/O cable is connected from the PC to the support device 1.
2. The I/O cable is connected from the PC to the support device 2.
3. The I/O cable is connected from the PC to the support device 3.
4. The I/O cable is connected from the PC to the support device 4.
5. The I/O cable is connected from the PC to the support device 5.
6. The I/O cable is connected from the EUT to the support device 6.

### **3. TEST SOFTWARE**

An executive program, EMITEST.EXE under WIN 98, which generates a complete line of continuously repeating " H " pattern was used as the test software.

The program was executed as follows :

- a. Turn on the power of all equipment.
- b. The PC reads the test program from the floppy disk drive and runs it.
- c. The PC sends " H " messages to the monitor, and the monitor displays " H " patterns on the screen.
- d. The PC sends " H " messages to the printer, then the printer prints them on the paper.
- e. The PC sends " H " messages to the modem.
- f. The PC sends " H " messages to the internal Hard Disk, and the Hard Disk reads and writes the message.
- g. Repeat the steps from b to f.

## **4. GENERAL INFORMATION OF TEST**

### **4.1. TEST FACILITY**

This test was carried out by SPORTON INTERNATIONAL INC.

Openarea Test Site Location : No. 30-1, Lin 6, Diing-Fwu Tsuen, Lin-Kou-Hsiang,  
Taipei Hsien, Taiwan, R.O.C.

TEL : 886-2-2601-1640

FAX : 886-2-2601-1695

### **4.2. STANDARD FOR METHODS OF MEASUREMENT**

ANSI C63.4-1992

### **4.3 .TEST IN COMPLIANCE WITH**

FCC PART 15, SUBPART B CLASS B

### **4.4. FREQUENCY RANGE INVESTIGATED**

- a. Conduction : from 450 KHz to 30 MHz
- b. Radiation : from 30 MHz to 1000 MHz.

### **4.5. TEST DISTANCE**

The test distance of radiated emission from antenna to EUT is 3M.

## **5. TEST OF CONDUCTED POWERLINE**


Conducted Emissions were measured from 450 KHz to 30 MHz with a bandwidth of 9 KHz on the 115 VAC power and return leads of the EUT according to the methods defined in ANSI C63.4-1992 Section 3.1. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane as shown in Figure 5-3. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.

### **5.1. MAJOR MEASURING INSTRUMENTS**

- Test Receiver
  - Attenuation 0 dB
  - Start Frequency 0.45 MHz
  - Stop Frequency 30 MHz
  - Step MHz 0.007 MHz
  - IF Bandwidth 9 KHz

**5.2. TEST PROCEDURES**

- a. The EUT was placed 0.4 meter from the conducting wall of the shielding room and was kept at least 80 centimeters from any other grounded conducting surface.
- b. Connect EUT to the power mains through a line impedance stabilization network ( LISN ).
- c. All the support units are connect to the other LISN.
- d. The LISN provides 50 ohm coupling impedance for the measuring instrument.
- e. The FCC states that a 50 ohm , 50 microhenry LISN should be used.
- f. Both sides of AC line were checked for maximum conducted interference.
- g. The frequency range from 450 KHz to 30 MHz was searched.
- h. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- i. If the emission level of the EUT in peak mode was 6 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported otherwise the emissions which do not have 6 dB margin will be retested on by one using the quasi-peak method and reported.

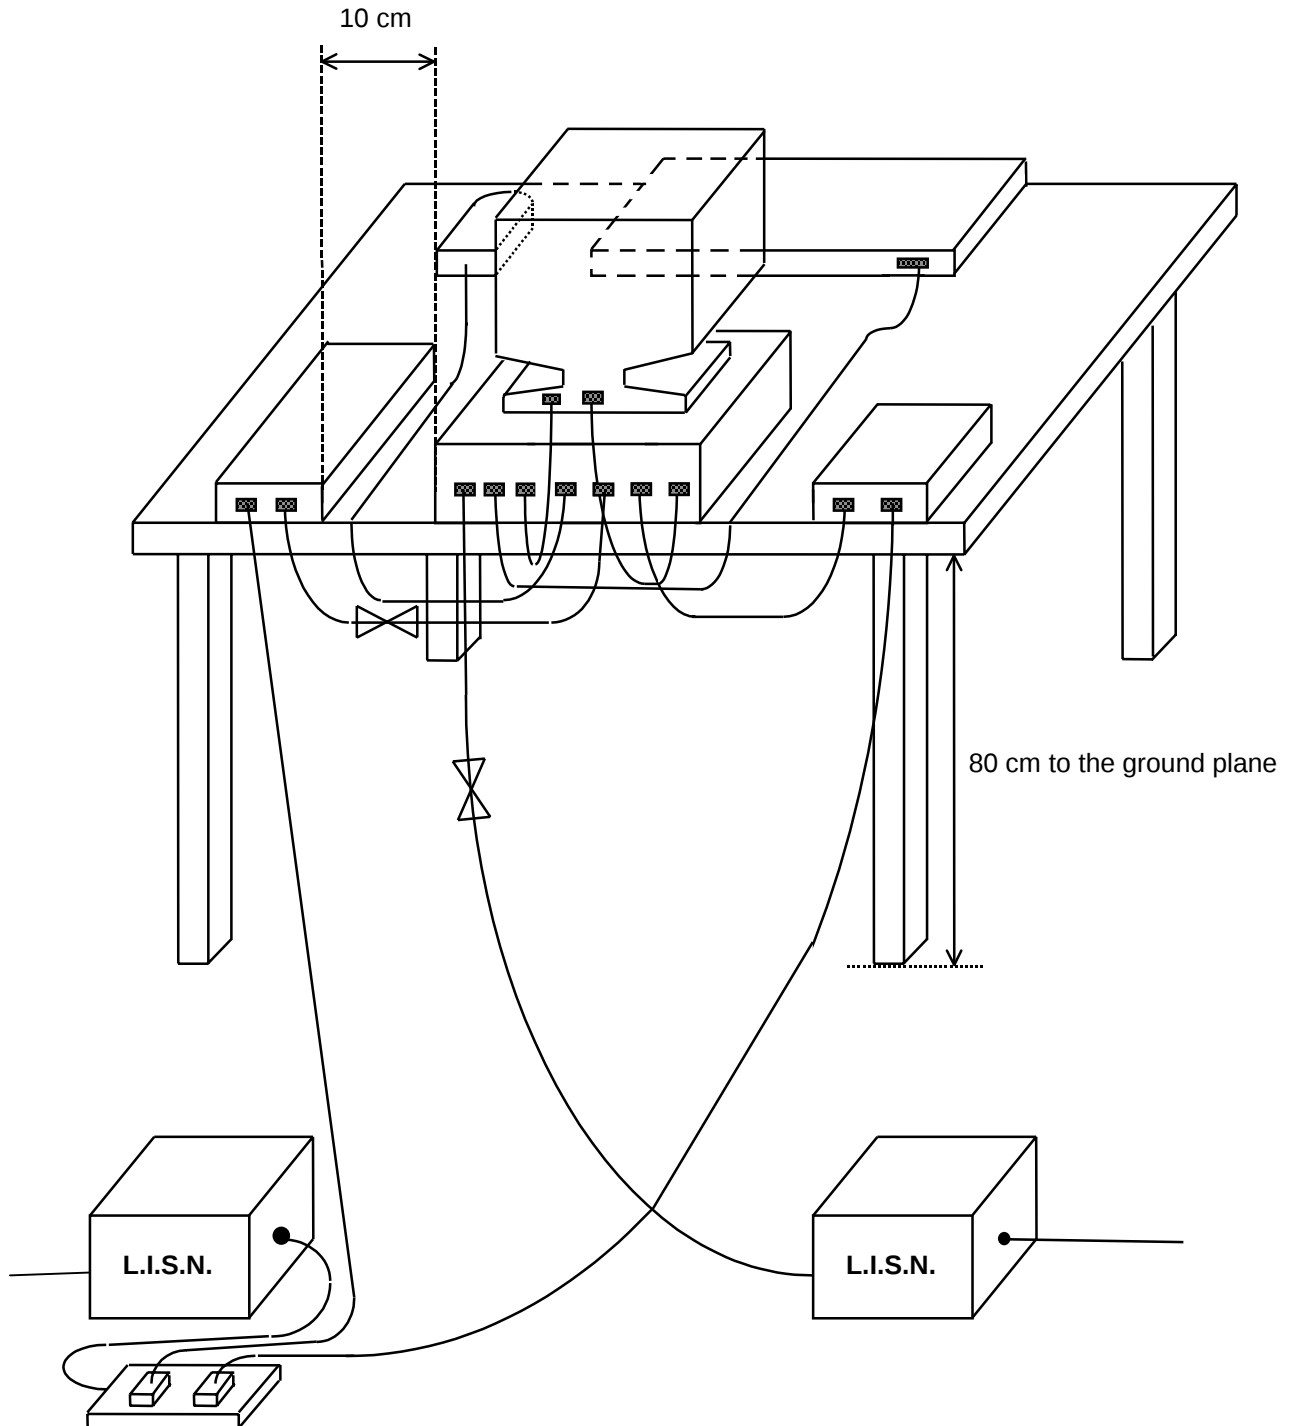

**5.4. TEST RESULT OF AC POWERLINE CONDUCTED EMISSION**

- Frequency Range of Test : from 0.45 MHz to 30 MHz
- All emissions not reported here are more than 10 dB below the prescribed limit.
- Temperature : 30•
- Relative Humidity : 42% RH
- Test Mode : P04 (PUCK)
- Test Date : July 10, 1998

The Conducted Emission test was passed at Line 0.77 MHz / 27.40 dBuV.

| Frequency<br>( MHz ) | Line /<br>Neutral | Meter Reading |        | Limits   |        | Margin |
|----------------------|-------------------|---------------|--------|----------|--------|--------|
|                      |                   | ( dBuV )      | ( uV ) | ( dBuV ) | ( uV ) | ( dB ) |
| 0.77                 | L                 | 27.40         | 23.44  | 48.00    | 251.19 | -20.60 |
| 20.52                | L                 | 24.50         | 16.79  | 48.00    | 251.19 | -23.50 |
| 0.78                 | N                 | 26.70         | 21.63  | 48.00    | 251.19 | -21.30 |
| 9.28                 | N                 | 24.50         | 16.79  | 48.00    | 251.19 | -23.50 |
| 15.21                | N                 | 25.80         | 19.50  | 48.00    | 251.19 | -22.20 |
| 21.27                | N                 | 23.40         | 14.79  | 48.00    | 251.19 | -24.60 |

Test Engineer :

-----  
*Kenny Chuang*

**5.4.1. TEST RESULT OF AC POWERLINE CONDUCTED EMISSION**

- Frequency Range of Test : from 0.45 MHz to 30 MHz
- All emissions not reported here are more than 10 dB below the prescribed limit.
- Temperature : 30•
- Relative Humidity : 42% RH
- Test Mode : S11 (STYLUS)
- Test Date : July 10, 1998

The Conducted Emission test was passed at Line 0.45 MHz / 44.10 dBuV.

| Frequency<br>( MHz ) | Line /<br>Neutral | Meter Reading |        | Limits   |        | Margin |
|----------------------|-------------------|---------------|--------|----------|--------|--------|
|                      |                   | ( dBuV )      | ( uV ) | ( dBuV ) | ( uV ) | ( dB ) |
| 0.45                 | L                 | 44.10         | 160.32 | 48.00    | 251.19 | -3.90  |
| 0.98                 | L                 | 39.80         | 97.72  | 48.00    | 251.19 | -8.20  |
| 1.67                 | L                 | 28.50         | 26.61  | 48.00    | 251.19 | -19.50 |
| 0.45                 | N                 | 40.30         | 103.51 | 48.00    | 251.19 | -7.70  |
| 0.91                 | N                 | 39.20         | 91.20  | 48.00    | 251.19 | -8.80  |
| 1.74                 | N                 | 36.80         | 69.18  | 48.00    | 251.19 | -11.20 |

Test Engineer :

-----  
*Kenny Chuang*

**5.5. PHOTOGRAPHS OF CONDUCTED EMISSION TEST CONFIGURATION**

FRONT VIEW  
(P04)



REAR VIEW  
(P04)



SIDE VIEW  
(P04)



FRONT VIEW  
(S11)



REAR VIEW  
(S11)



SIDE VIEW  
(S11)



## **6. TEST OF RADIATED EMISSION**

Radiated emissions from 30 MHz to 1000 MHz were measured with a bandwidth of 120 KHz according to the methods defines in ANSI C63.4-1992. The EUT was placed on a nonmetallic stand in the open-field site, 0.8 meter above the ground plane, as shown in Figure 6-3. The interface cables and equipment positions were varied within limits of reasonable applications to determine the positions producing maximum radiated emissions.


### **6.1. MAJOR MEASURING INSTRUMENTS**

- Pre-Amplifier
  - RF Gain 25 dB
  - Signal Input Input ( for 0.1 MHz to 1.3 GHz )
  
- Spectrum Analyzer ( HP 8560E )
  - Attenuation 0 dB
  - Start Frequency 30 MHz
  - Stop Frequency 1000 MHz
  - Resolution Bandwidth 1 MHz
  - Video Bandwidth 1 MHz
  - Signal Input Input 1 ( for 30MHz to 2.9GHz )
  
- Quasi-Peak Adapter
  - Resolution Bandwidth 120 KHz
  - Frequency Band 30 MHz to 1 GHz
  - Quasi-Peak Detector ON for Quasi-Peak Mode
  - OFF for Peak Mode

**6.2. TEST PROCEDURES**

- a. The EUT was placed on a rotatable table top 0.8 meter above ground.
- b. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- c. The table was rotated 360 degrees to determine the position of the highest radiation.
- d. The antenna is a half wave dipole and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- e. For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower ( from 1 M to 4 M ) and turn table ( from 0 degree to 360 degrees ) to find the maximum reading.
- f. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 6 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported otherwise the emissions which do not have 6 dB margin will be repeated one by one using the quasi-peak method and reported.

**6.3. TYPICAL TEST SETUP LAYOUT OF RADIATED EMISSION**

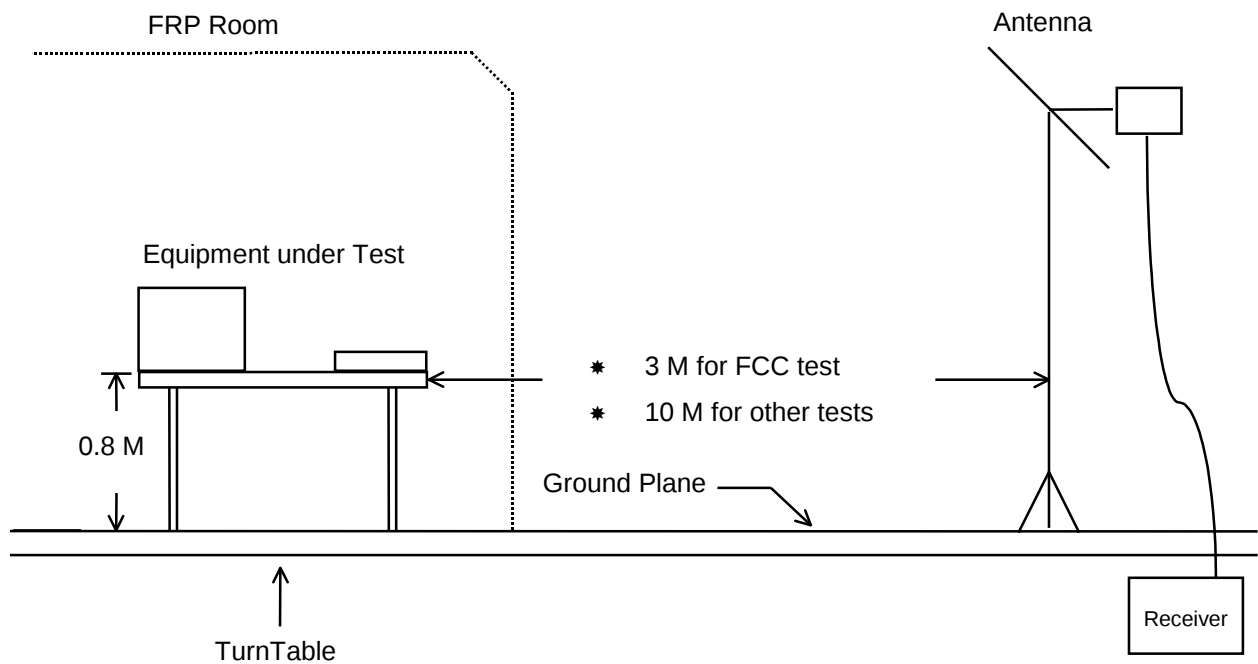

#### 6.4. TEST RESULT OF RADIATED EMISSION

- Equipment meets the technical specifications of 15.109
- Frequency Range of Test : from 30 MHz to 1000 MHz
- Test Distance : 3 M
- Temperature : 32•
- Relative Humidity : 60 % RH
- Test Mode : P04 (PUCK)
- Test Date : July 08, 1998
- Emission level ( dBuV/m ) = 20 log Emission level ( uV/m )
- Sample Calculation at 135.70 MHz  
Corrected Reading = 11.13 + 1.86 + 20.67 = 33.66 (dBuV/m )

The Radiated Emission test was passed at

466.01 MHz / 41.45 dBuV ( Vertical )

Antenna Height 2.0 Meter , Turntable Degree 205°.

| Frequency<br>( MHz ) | Polarity | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>( dB ) | Reading<br>( dBuV ) | Limits<br>(dBuV/m) | Emission<br>(uV/m) | Level<br>(dBuV/m) | Margin<br>(uV/m) | Margin<br>( dB ) |
|----------------------|----------|-----------------------------|-------------------------|---------------------|--------------------|--------------------|-------------------|------------------|------------------|
| 135.70               | H        | 11.13                       | 1.86                    | 20.67               | 43.50              | 150                | 33.66             | 48.19            | -9.84            |
| 167.71               | H        | 12.23                       | 2.16                    | 19.28               | 43.50              | 150                | 33.67             | 48.25            | -9.83            |
| 54.64                | V        | 3.09                        | 1.10                    | 30.51               | 40.00              | 100                | 34.70             | 54.33            | -5.30            |
| 168.05               | V        | 12.23                       | 2.17                    | 20.38               | 43.50              | 150                | 34.78             | 54.83            | -8.72            |
| 178.95               | V        | 12.94                       | 2.29                    | 20.43               | 43.50              | 150                | 35.66             | 60.67            | -7.84            |
| 466.01               | V        | 22.37                       | 3.90                    | 15.18               | 46.00              | 200                | 41.45             | 118.17           | -4.55            |

Test Engineer :

-----  
Jack Deng

**6.4.1. TEST RESULT OF RADIATED EMISSION**

- Equipment meets the technical specifications of 15.109
  - Frequency Range of Test : from 30 MHz to 1000 MHz
  - Test Distance : 3 M
  - Temperature : 32•
  - Relative Humidity : 60 % RH
  - Test Mode : S11 (STYLUS)
  - Test Date : July 08, 1998
- 
- Emission level ( dBuV/m ) = 20 log Emission level ( uV/m )
  - Sample Calculation at 85.36 MHz  
Corrected Reading = 7.58 + 1.40 + 26.42 = 35.40 (dBuV/m )

The Radiated Emission test was passed at

**85.36 MHz / 35.40 dBuV ( Horizontal )**

**Antenna Height 3.0 Meter , Turntable Degree 165°.**

| Frequency |   | Antenna | Cable  | Reading  | Limits   |        | Emission | Level  | Margin |
|-----------|---|---------|--------|----------|----------|--------|----------|--------|--------|
| Polarity  |   | Factor  | Loss   |          |          |        |          |        |        |
| ( MHz )   |   | (dB/m)  | ( dB ) | ( dBuV ) | (dBuV/m) | (uV/m) | (dBuV/m) | (uV/m) | ( dB ) |
| 85.36     | H | 7.58    | 1.40   | 26.42    | 40.00    | 100    | 35.40    | 58.88  | -4.60  |
| 215.75    | H | 14.25   | 2.40   | 18.79    | 43.50    | 150    | 35.44    | 59.16  | -8.06  |
| 206.19    | V | 14.13   | 2.40   | 17.88    | 43.50    | 150    | 34.41    | 52.54  | -9.09  |
| 160.62    | V | 12.25   | 2.02   | 18.48    | 43.50    | 150    | 32.75    | 43.40  | -10.75 |
| 167.61    | V | 12.23   | 2.16   | 19.36    | 43.50    | 150    | 33.75    | 48.70  | -9.75  |
| 192.10    | V | 13.62   | 2.32   | 18.29    | 43.50    | 150    | 34.23    | 51.46  | -9.27  |

Test Engineer :

-----  
*Jack Deng*

**6.5. PHOTOGRAPHS OF RADIATED EMISSION TEST CONFIGURATION**

FRONT VIEW  
(P04)



REAR VIEW  
(P04)



**FRONT VIEW  
(S11)**



**REAR VIEW  
(S11)**



**7. ANTENNA FACTOR AND CABLE LOSS**

| Frequency ( MHz ) | Antenna Factor ( dB ) | Cable Loss ( dB ) |
|-------------------|-----------------------|-------------------|
| 30                | -1.91                 | 0.90              |
| 35                | -0.50                 | 0.92              |
| 40                | 0.61                  | 1.04              |
| 45                | 1.40                  | 1.28              |
| 50                | 2.39                  | 1.10              |
| 55                | 3.54                  | 1.11              |
| 60                | 4.40                  | 1.30              |
| 65                | 4.84                  | 1.40              |
| 70                | 5.59                  | 1.37              |
| 75                | 6.21                  | 1.24              |
| 80                | 7.60                  | 1.51              |
| 85                | 7.73                  | 1.60              |
| 90                | 8.22                  | 1.60              |
| 95                | 8.90                  | 1.70              |
| 100               | 9.36                  | 1.70              |
| 110               | 10.01                 | 1.70              |
| 120               | 10.41                 | 1.90              |
| 130               | 10.84                 | 1.90              |
| 140               | 11.42                 | 1.91              |
| 150               | 11.91                 | 2.01              |
| 160               | 12.25                 | 2.11              |
| 170               | 12.72                 | 2.21              |
| 180               | 13.02                 | 2.30              |
| 190               | 13.50                 | 2.30              |
| 200               | 14.05                 | 2.40              |
| 220               | 15.11                 | 2.50              |
| 240               | 16.81                 | 2.60              |
| 260               | 17.51                 | 2.71              |
| 280               | 17.70                 | 2.90              |
| 300               | 17.89                 | 2.91              |
| 320               | 18.00                 | 3.10              |
| 340               | 18.33                 | 3.20              |
| 360               | 19.44                 | 3.30              |
| 380               | 20.31                 | 3.40              |
| 400               | 21.19                 | 3.50              |
| 450               | 21.10                 | 3.70              |
| 500               | 22.21                 | 4.10              |
| 550               | 23.42                 | 4.30              |
| 600               | 24.01                 | 4.50              |
| 650               | 25.11                 | 4.70              |
| 700               | 26.00                 | 4.90              |
| 750               | 26.41                 | 5.11              |
| 800               | 27.10                 | 5.50              |
| 850               | 27.51                 | 5.60              |
| 900               | 27.90                 | 5.80              |
| 950               | 28.01                 | 5.90              |

**8. LIST OF MEASURING EQUIPMENT USED**

| Instrument                           | Manufacturer | Model No. | Serial No. | Characteristics | Calibration    | Remark     |
|--------------------------------------|--------------|-----------|------------|-----------------|----------------|------------|
| EMC Receiver<br>(site 2)             | HP           | 8591EM    | 3710A01187 | 9 KHz - 18 GHz  | Sep. 29, 1997  | Conduction |
| LISN (EUT)<br>(site 2)               | Telemeter    | NNB-2/16Z | 98009      | 50 ohm / 50 uH  | Jan. 29, 1998  | Conduction |
| LISN (Support Unit)<br>(site 2)      | EMCO         | 3810/2NM  | 9703-1839  | 50 ohm / 50 uH  | July 06, 1998  | Conduction |
| Spectrum Analyzer<br>(Site 4)        | HP           | 8560E     | 3728A03186 | 30MHz - 2.9GHz  | Sep. 24, 1997  | Radiation  |
| Amplifier (Site 4)                   | HP           | 8447D     | 2944A09072 | 0.1MHz -1.3GHz  | Sep. 17, 1997  | Radiation  |
| Test Receiver<br>(Site 4)            | R&S          | ESVP      | 893610/003 | 20MHz - 1.3GHz  | April 13, 1998 | Radiation  |
| Bilog Antenna (Site 4)               | CHASE        | CBL6112A  | 2288       | 30MHz -2GHz     | Jul. 24, 1997  | Radiation  |
| Half-wave dipole<br>antenna (Site 4) | EMCO         | 3121C     | 9705-1285  | 28 M - 1GHz     | May 19, 1998   | Radiation  |
| Turn Table (site 4)                  | EMCO         | 2080      | 9711-1090  | 0 ~ 360 degree  | N/A            | Radiation  |
| Antenna Mast (site 4)                | EMCO         | 2075      | 9711-2114  | 1 m- 4 m        | N/A            | Radiation  |