



FCC 47 CFR PART 15 SUBPART C

TEST REPORT

For

Alarm Clock With Dual USB

Model: RT-4603, TA-7850, TA-7850-Xyy, TA-7850XX-Lyy

Brand: OHAYO, TELEADAPT

Test Report Number:

C161216Z01-RP1

Issued for

ACE INTERNATIONAL ELECTRONICS LTD.

Unit 2308, 23th FLOOR RILEY HOUSE 88 LEI MUK ROAD, KWAI CHUNG,
N.T HONG KONG

Issued by:

COMPLIANCE CERTIFICATION SERVICES (SHENZHEN) INC.

No.10-1, Mingkeda Logistics Park, No.18, Huanguan South Rd.,
Guan Lan Town, Baoan District, Shenzhen China

TEL: 86-755-28055000

FAX: 86-755-28055221

E-Mail: service@ccssz.com

Issued Date: January 18, 2017



中国认可
国际互认
检测
TESTING
CNAS L4818



TESTING CERT #2861.01

Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services (Shenzhen) Inc. This document may be altered or revised by Compliance Certification Services (Shenzhen) Inc. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, A2LA, NVLAP, NIST, CNAS or any government agencies. The test result of this report relate only to the tested sample identified in this report.



Revision History

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	January 18, 2017	Initial Issue	ALL	Amzula Chen



TABLE OF CONTENTS

1. TEST RESULT CERTIFICATION	4
2. EUT DESCRIPTION	5
3. TEST METHODOLOGY	6
3.1 DESCRIPTION OF TEST MODES	6
4. FACILITIES AND ACCREDITATIONS	7
4.1 FACILITIES	7
4.2 ACCREDITATIONS	7
4.3 MEASUREMENT UNCERTAINTY	7
5. SETUP OF EQUIPMENT UNDER TEST	8
5.1 SETUP CONFIGURATION OF EUT	8
5.2 SUPPORT EQUIPMENT	8
6. FCC PART 15.247 REQUIREMENTS	9
6.1 20DB BANDWIDTH	9
6.2 ANTENNA GAIN	14
6.3 PEAK POWER	15
6.4 PEAK POWER SPECTRAL DENSITY	17
6.5 BAND EDGES MEASUREMENT	18
6.6 FREQUENCY SEPARATION	28
6.7 NUMBER OF HOPPING FREQUENCY	31
6.8 TIME OF OCCUPANCY (DWELL TIME)	33
6.9 SPURIOUS EMISSIONS	40
6.10 POWERLINE CONDUCTED EMISSIONS	63



1. TEST RESULT CERTIFICATION

Product	Alarm Clock With Dual USB
Model	RT-4603, TA-7850, TA-7850-Xyy, TA-7850XX-Lyy
Brand	OHAYO, TELEADAPT
Tested	December 12 , 2016 ~ January 9, 2017
Applicant	ACE INTERNATIONAL ELECTRONICS LTD. Unit 2308, 23th FLOOR RILEY HOUSE 88 LEI MUK ROAD, KWAI CHUNG, N.T HONG KONG
Manufacturer	ACE INTERNATIONAL ELECTRONICS LTD. Unit 2308, 23th FLOOR RILEY HOUSE 88 LEI MUK ROAD, KWAI CHUNG, N.T HONG KONG

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 15 Subpart C	No non-compliance noted

We hereby certify that:

The above equipment was tested by Compliance Certification Services (Shenzhen) Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10:2013 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.207, 15.209 and 15.247.

The test results of this report relate only to the tested sample EUT identified in this report.

Approved by:

Reviewed by:

Sunday Hu
Supervisor of EMC Dept.
Compliance Certification Services (Shenzhen) Inc.

Ruby Zhang
Supervisor of Report Dept.
Compliance Certification Services (Shenzhen) Inc.



2. EUT DESCRIPTION

Product	Alarm Clock With Dual USB
Model Number	RT-4603, TA-7850, TA-7850-Xyy, TA-7850XX-Lyy
Brand	OHAYO, TELEADAPT
Model Discrepancy	1. In addition to the model name, trademark and packaging, all models are the same product. 2. TA-7850-Xyy, the X can be A to Z which is colour or finish indication, the yy can be 00 to 99 presents silkscreen logo variants or others. 3. TA-7850XX-Lyy, the XX can be A to Z which presents country code(EU: Europe, UK: United Kingdom, US: the United States, AU: Australia, JP: Japan, CN: China), the L can be A to Z which is colour or finish indication, the yy can be 00-99 presents silkscreen logo variants or others. 4. The model "RT-4603" correspondence brand is "OHAYO" and The model "TA-7850, TA-7850-Xyy and TA-7850XX-Lyy" correspondence brand are "TELEADAPT"
Identify Number	C161216Z01-RP1
Received Date	December 16, 2016
Power Supply	DC 5V supplied by adapter
Adapter Manufacturer/Model No.	Import Teleadapt Ltd / ICP36-050-5000 I/P: 100-240Vac~ 50/60Hz, 1.3A O/P: 5Vdc, 5000Ma DC output Cable: Unshielded, 1.50m
Frequency Range	2402 ~ 2480 MHz
Transmit Power	GFSK: -3.35dBm $\pi/4$ -DQPSK: -5.92dBm 8DPSK: -6.09dBm
Modulation Technique	FHSS (GFSK for 1Mbps, $\pi/4$ -DQPSK for 2Mbps, 8DPSK for 3Mbps)
Number of Channels	79 Channels
Antenna Specification	Internal Antenna with 0dBi gain (Max)
Temperature Range	0°C ~ +40°C
Hardware Version	2230-04603-ED000
Software Version	U0X V07

Note: This submittal(s) (test report) is intended for FCC ID: G3OTA-7850 filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.



3. TEST METHODOLOGY

3.1 DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition.

Run AppoTech RF Control Kit V4.0 Software used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Test Item	Test mode	Worse mode
Conducted Emission	Mode 1: Adapter +Normal BT Function	☒
Radiated Emission	Mode 2: Continuously TX	☒

Note:

1. Channel Low (2402MHz), Mid (2441MHz) and High (2480MHz) were chosen for pre-testing for GFSK, $\pi/4$ -DQPSK and 8DPSK, GFSK and 8DPSK were the worse case and print in the report.
For $\pi/4$ QPSK its same modulation type with 8-DPSK, and based exploratory test, there is no significant difference of that two types test result, so except output power, all other items final test were only performed with the worst case 8-DPSK and GFSK.
2. Radiated band edges were tested with both fixed and hopping mode, the fixed mode was the worst case and recorded in the report.



4. FACILITIES AND ACCREDITATIONS

4.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

☒ **No.10-1, Mingkeda Logistics Park, No.18, Huanguan South Rd.,
Guan Lan Town, Baoan District, Shenzhen, China**

The sites are constructed in conformance with the requirements of ANSI C63.10:2013, ANSI C63.7 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

4.2 ACCREDITATIONS

Our laboratories are accredited and approved by the following accreditation body according to ISO/IEC 17025.

USA	A2LA
China	CNAS

The measuring facility of laboratories has been authorized or registered by the following approval agencies.

USA	FCC
Japan	VCCI(C-4815, R-4320, T-2317, G-10624)
Canada	INDUSTRY CANADA

Copies of granted accreditation certificates are available for downloading from our web site, <http://www.ccssz.com>

4.3 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Parameter	Uncertainty
Radiated Emission, 30 to 200 MHz Test Site : 966(2)	+/-3.6880dB
Radiated Emission, 200 to 1000 MHz Test Site : 966(2)	+/-3.6695dB
Radiated Emission, 1 to 8 GHz	+/-5.1782dB
Radiated Emission, 8 to 18 GHz	+/-5.2173dB
Conducted Emissions	+/-3.6836dB
Band Width	178kHz
Peak Output Power MU	+/-1.906dB
Band Edge MU	+/-0.182dB
Channel Separation MU	416.178Hz
Duty Cycle MU	0.054ms
Frequency Stability MU	226Hz

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

The measured result is above (below) the specification limit by a margin less than the measurement uncertainty; it is therefore not possible to state compliance based on the 95% level of confidence. However, the result indicates that compliance (non-compliance) is more probable than non-compliance) with the specification limit.



5. SETUP OF EQUIPMENT UNDER TEST

5.1 SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

5.2 SUPPORT EQUIPMENT

No.	Equipment	Model No.	Serial No.	FCC	Brand	Data Cable	Power Cord
1	Notebook	E335	R9-WN1EF	N/A	Thinkpad	N/A	Unshielded 1.50m (AC Cable) Unshielded 1.00m (DC Cable)

Notes:

Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.



6. FCC PART 15.247 REQUIREMENTS

6.1 20DB BANDWIDTH


None; for reporting purpose only.

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	N9010A	MY55370330	02/21/2016	02/20/2017

Remark: Each piece of equipment is scheduled for calibration once a year.

TEST CONFIGURATION



TEST PROCEDURE

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT, then connect a low loss RF cable from antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW=100 kHz, VBW=300 kHz, Span=3MHz, Sweep = auto.
4. Mark the peak frequency and 20dB (upper and lower) frequency.
5. Repeat until all the test channels are investigated.

TEST RESULTS


No non-compliance noted




Test plot

GFSK

20dB Bandwidth(CH Low)

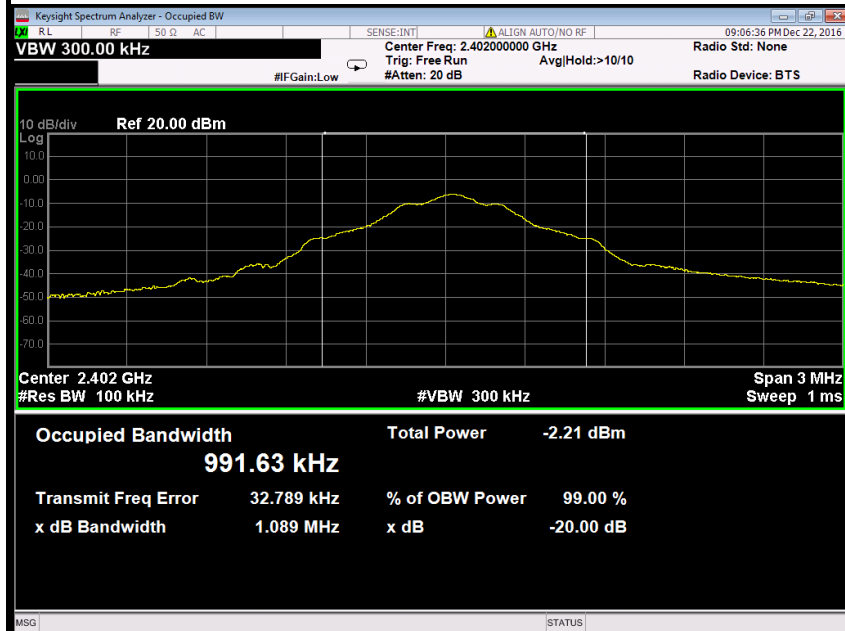


20dB Bandwidth (CH Mid)

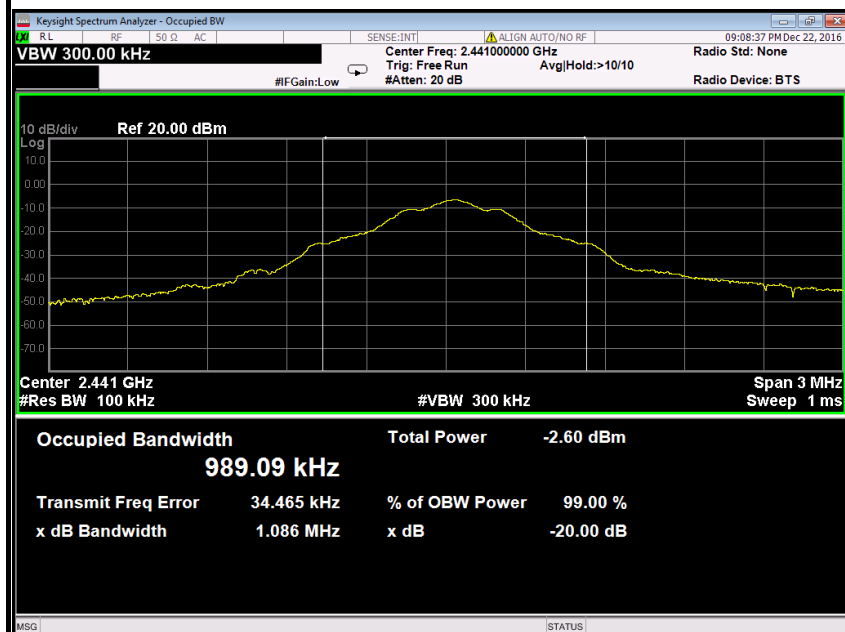



20dB Bandwidth (CH High)

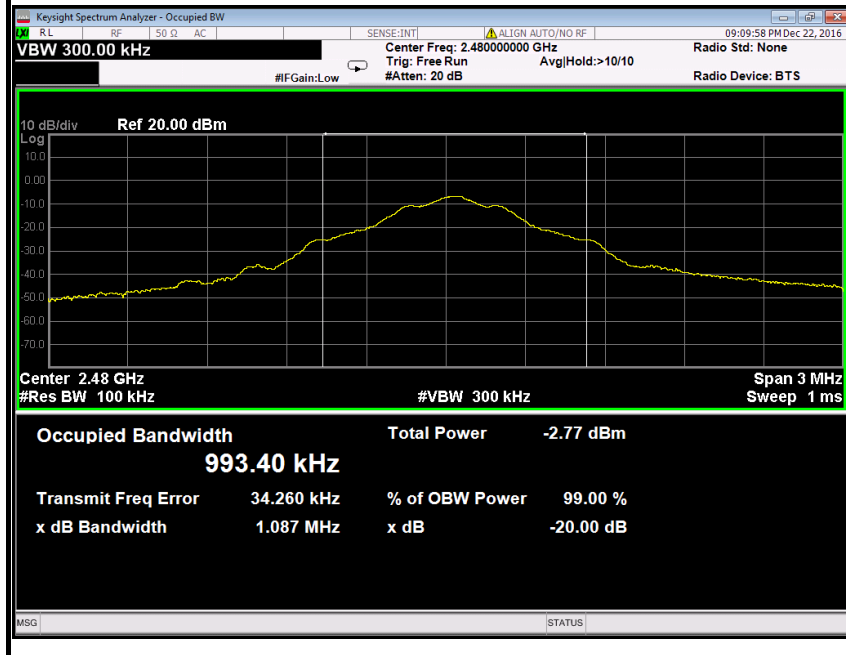





Test plot


8DPSK

20dB Bandwidth (CH Low)

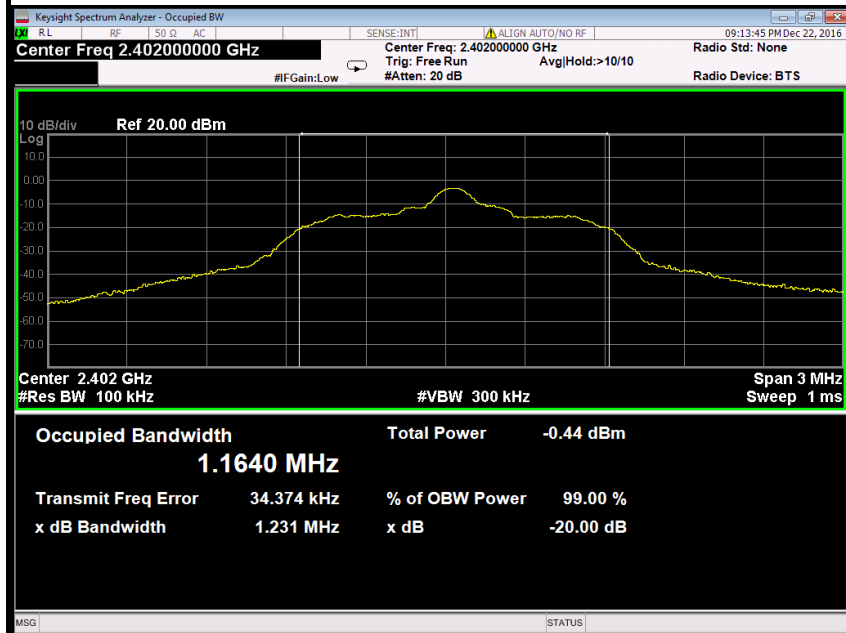

20dB Bandwidth (CH Mid)

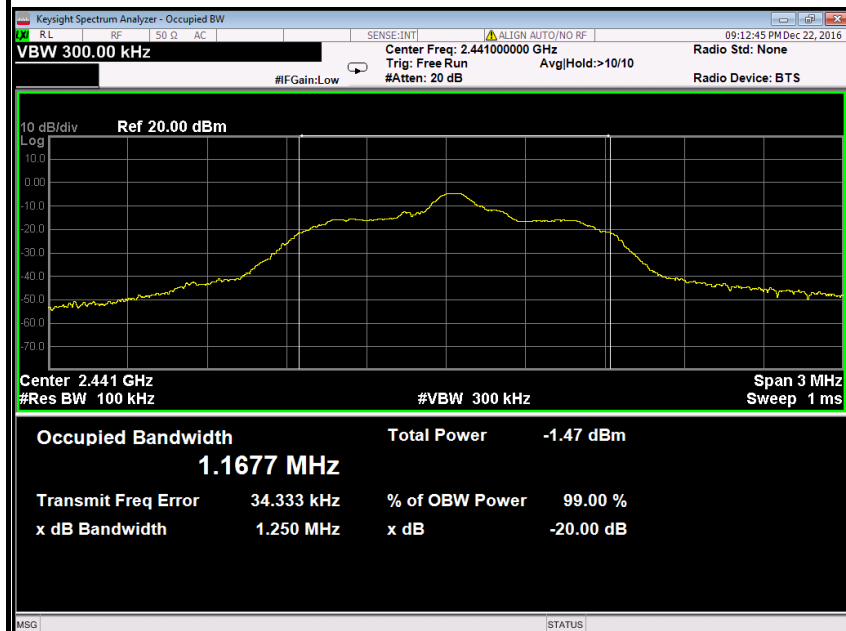

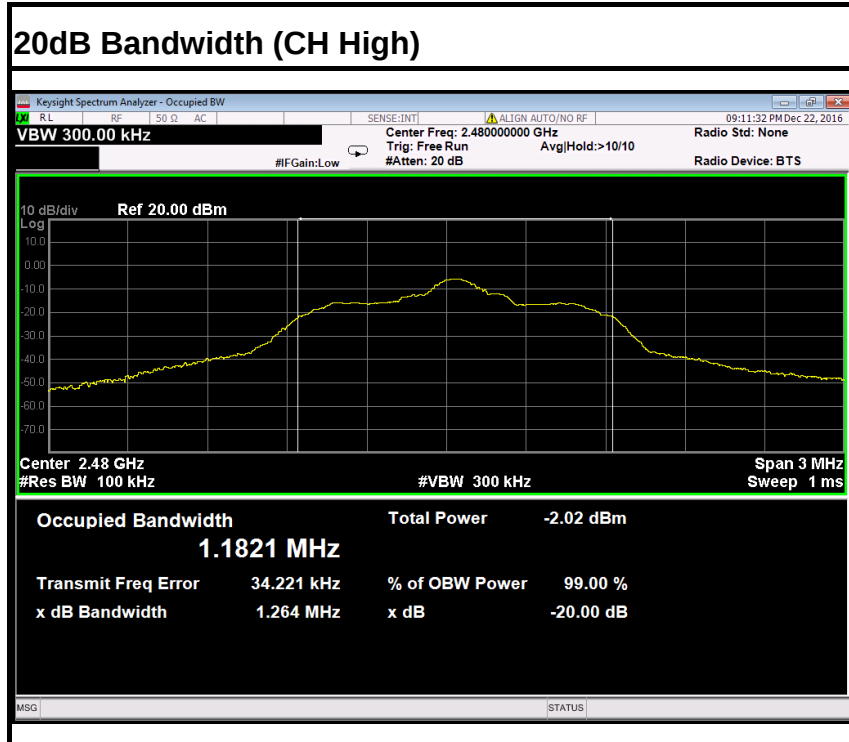



6.2 ANTENNA GAIN

MEASUREMENT

The antenna gain of the complete system is calculated by the difference of radiated power in EIRP and the conducted power of the module. For normal BT devices, the GFSK mode is used.

MEASUREMENT PARAMETERS

Measurement parameter	
Detector	Peak
Sweep time	Auto
Resolution bandwidth	3 MHz
Video bandwidth	3 MHz
Trace-Mode	Max hold

LIMITS

FCC	IC
Antenna Gain	
6 dBi	

TEST RESULTS

GFSK

T _{nom}	V _{nom}	Lowest channel 2402MHz	Middle channel 2441MHz	Highest channel 2480MHz
Conducted power [dBm] Measured with GFSK modulation		-3.35	-3.85	-4.52
Radiated power [dBm] Measured with GFSK modulation		-4.05	-4.12	-5.18
Gain [dBi] Calculated		-0.70	-0.27	-0.66
Measurement uncertainty		± 1.5 dB (cond.) / ± 3 dB (rad.)		



6.3 PEAK POWER

LIMIT

The maximum peak output power of the intentional radiator shall not exceed the following:


1. For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.
2. Except as shown in paragraphs (b)(3) (i), (ii) and (iii) of this section, if transmitting antennas of directional gain greater than 6dBi are used the peak output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1) or (b)(2) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6dBi.
3. The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Power Meter	Anritsu	ML2495A	1204003	02/21/2016	02/20/2017
Power Sensor	Anritsu	MA2411B	1126150	02/21/2016	02/20/2017

Remark: Each piece of equipment is scheduled for calibration once a year.

Test Configuration



TEST PROCEDURE

The transmitter output is connected to the RF Power Meter. The RF Power Meter is set to the peak power detection.



TEST RESULTS

No non-compliance noted

Test Data

GFSK

Channel	Frequency (MHz)	Reading Power (dBm)	Cable loss (dB)	Output Power (dBm)	Output Power (mW)	Limit (mW)	Peak/AVG	Result
Low	2402	-6.85	3.50	-3.35	0.46238	125	peak	PASS
Mid	2441	-7.35	3.50	-3.85	0.41210			PASS
High	2480	-8.02	3.50	-4.52	0.35318			PASS
Low	2402	-7.36	3.50	-3.86	0.41115	125	AVG	PASS
Mid	2441	-7.95	3.50	-4.45	0.35892			PASS
High	2480	-8.72	3.50	-5.22	0.30061			PASS

$\pi/4$ -DQPSK

Channel	Frequency (MHz)	Reading Power (dBm)	Cable loss (dB)	Output Power (dBm)	Output Power (mW)	Limit (mW)	Peak/AVG	Result
Low	2402	-9.96	3.50	-6.46	0.22594	125	peak	PASS
Mid	2441	-9.42	3.50	-5.92	0.25586			PASS
High	2480	-9.79	3.50	-6.29	0.23496			PASS
Low	2402	-10.87	3.50	-7.37	0.18323	125	AVG	PASS
Mid	2441	-10.02	3.50	-6.52	0.22284			PASS
High	2480	-10.61	3.50	-7.11	0.19454			PASS

8DPSK

Channel	Frequency (MHz)	Reading Power (dBm)	Cable loss (dB)	Output Power (dBm)	Output Power (mW)	Limit (mW)	Peak/AVG	Result
Low	2402	-9.81	3.50	-6.31	0.23388	125	peak	PASS
Mid	2441	-9.59	3.50	-6.09	0.24604			PASS
High	2480	-10.41	3.50	-6.91	0.20370			PASS
Low	2402	-10.25	3.50	-6.75	0.21135	125	AVG	PASS
Mid	2441	-10.01	3.50	-6.51	0.22336			PASS
High	2480	-10.59	3.50	-7.09	0.19543			PASS



6.4 PEAK POWER SPECTRAL DENSITY

LIMIT


1. For direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.
2. The direct sequence operating of the hybrid system, with the frequency hopping operation turned off, shall comply with the power density requirements of paragraph (d) of this section.

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	N9010A	MY55370330	02/21/2016	02/20/2017

Remark: Each piece of equipment is scheduled for calibration once a year.

Test Configuration



TEST PROCEDURE

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3\text{ kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

TEST RESULTS

Not applicable. Since EUT is the FHSS device.



6.5 BAND EDGES MEASUREMENT


LIMIT

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

MEASUREMENT EQUIPMENT USED

Radiated Emission Test Site 966(2)					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
PSA Series Spectrum Analyzer	Agilent	N9010A	MY55370330	02/21/2016	02/20/2017
EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100783	02/21/2016	02/20/2017
Amplifier	EMEC	EM330	060661	03/18/2016	03/17/2017
High Noise Amplifier	Agilent	8449B	3008A01838	02/21/2016	02/20/2017
Loop Antenna	COM-POWER	AL-130	121044	09/25/2016	09/24/2017
Bilog Antenna	SCHAFFNER	CBL6143	5082	02/21/2016	02/20/2017
Horn Antenna	SCHWARZBECK	BBHA9120	D286	02/28/2016	02/27/2017
Board-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170-497	02/28/2016	02/27/2017
Turn Table	N/A	N/A	N/A	N.C.R	N.C.R
Antenna Tower	SUNOL	TLT2	N/A	N.C.R	N.C.R
Controller	Sunol Sciences	SC104V	022310-1	N.C.R	N.C.R
Controller	CT	N/A	N/A	N.C.R	N.C.R
Temp. / Humidity Meter	Anymetre	JR913	N/A	02/21/2016	02/20/2017
Test S/W	FARAD	LZ-RF / CCS-SZ-3A2			

Test Configuration

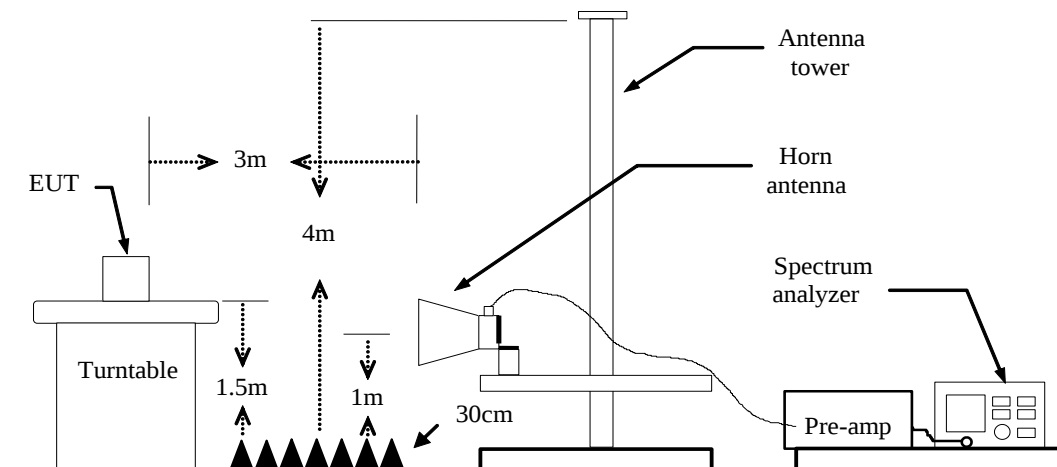





TEST PROCEDURE


1. The EUT is placed on a turntable, which is 1.5m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (a) PEAK: RBW=1MHz / VBW=3MHz / Sweep=AUTO
 - (b) AVERAGE: RBW=1MHz / VBW=330Hz / Sweep=AUTO
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.

TEST RESULTS

Refer to attach spectrum analyzer data chart.

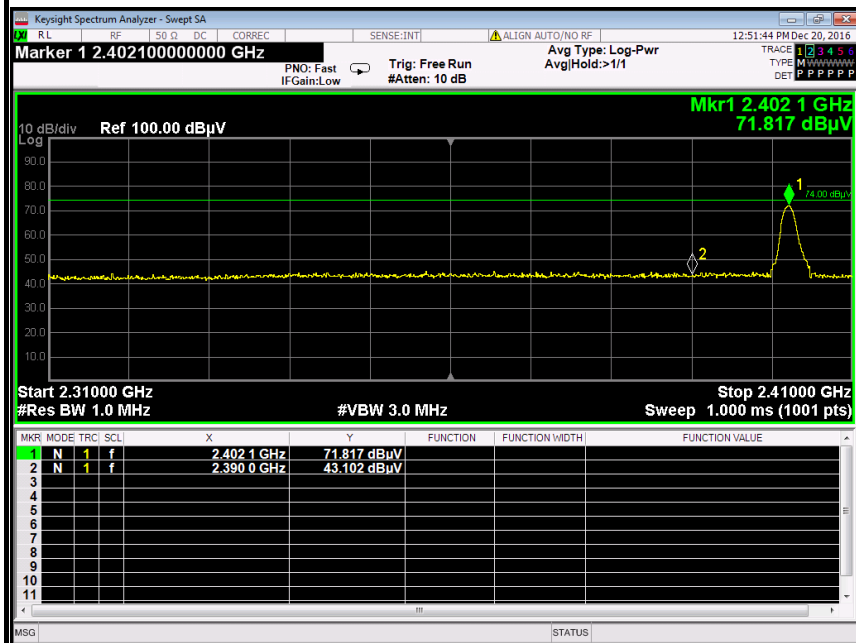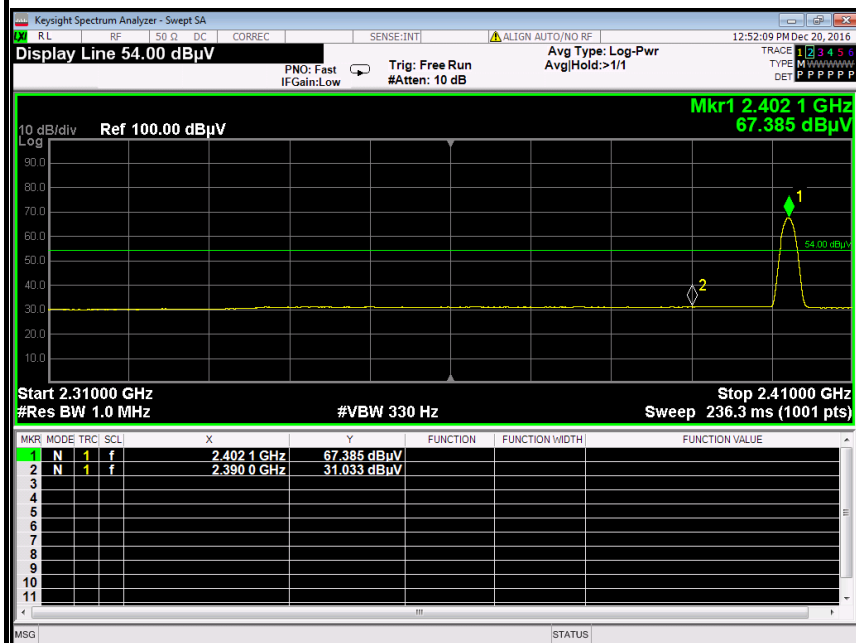**Test Data (GFSK)****Band Edges (CH-Low)****Detector mode: Peak** **Polarity: Vertical****Detector mode: Average** **Polarity: Vertical**


No.	Frequency (MHz)	Reading (dBuV)	Corrected (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Pole
1	2390.0000	40.24	-2.86	43.10	74.00	-30.90	Peak	Vertical
2	2390.0000	28.17	-2.86	31.03	54.00	-22.97	Average	Vertical

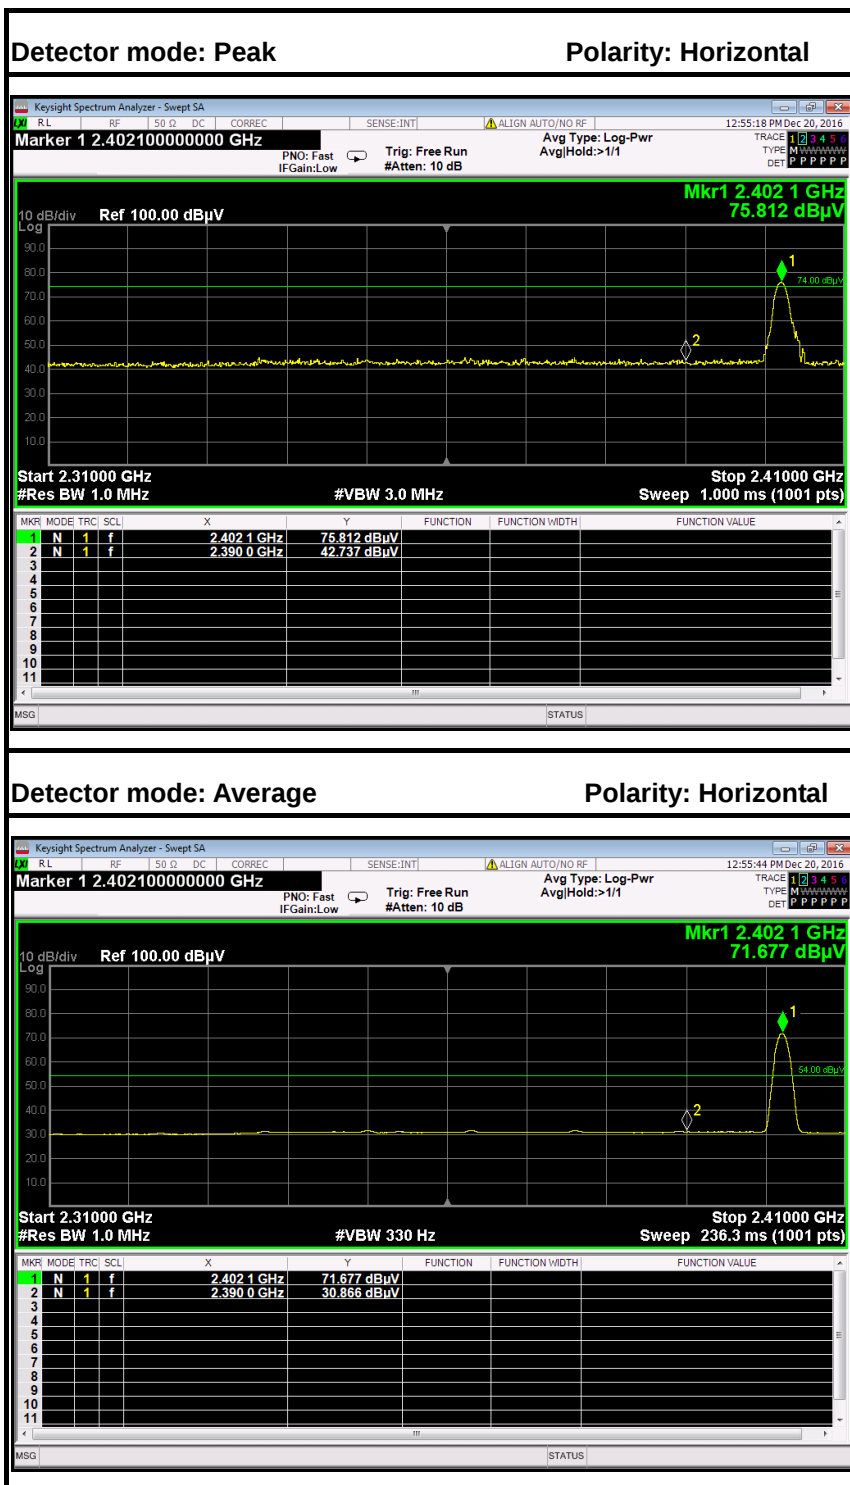


No.	Frequency (MHz)	Reading (dBu V)	Corrected (dB/m)	Result (dBu V/m)	Limit (dBu V/m)	Margin (dB)	Detector	Antenna Pole
1	2390.0000	39.88	-2.86	42.74	74.00	-31.26	Peak	Horizontal
2	2390.0000	28.01	-2.86	30.87	54.00	-23.13	Average	Horizontal



Band Edges (CH-High)

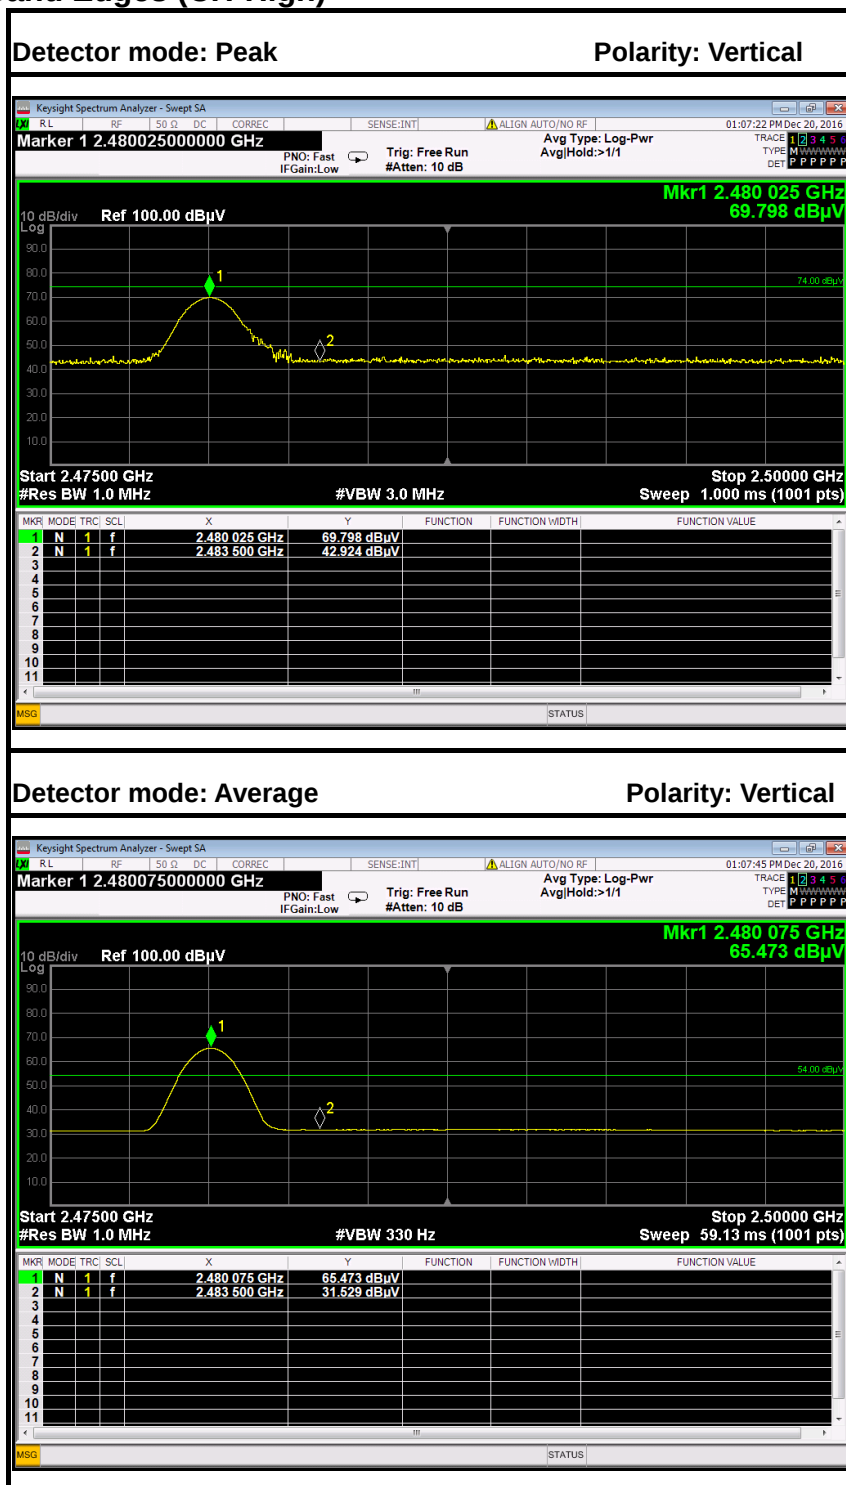

No.	Frequency (MHz)	Reading (dBμV)	Corrected (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Antenna Pole
1	2483.5000	40.57	-235	42.92	74.00	-31.08	Peak	Vertical
2	2483.5000	29.18	-235	31.53	54.00	-22.47	Average	Vertical

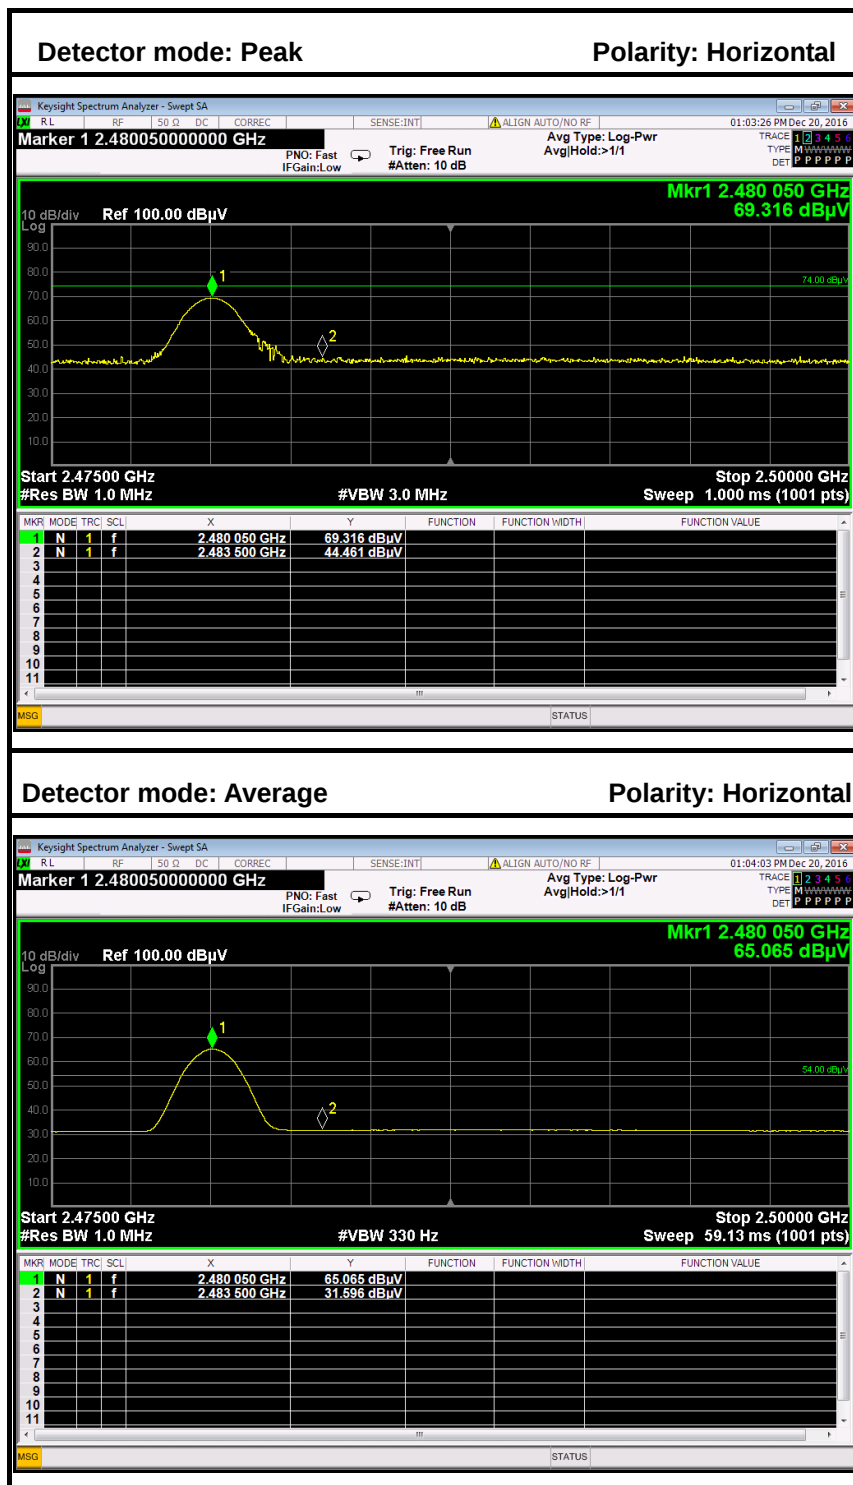


No.	Frequency (MHz)	Reading (dBμV)	Corrected (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Antenna Pole
1	2483.5000	42.11	-2.35	44.46	74.00	-29.54	Peak	Horizontal
2	2483.5000	29.25	-2.35	31.60	54.00	-22.40	Average	Horizontal

**8DPSK****Band Edges (CH-Low)**


Detector mode: Peak

Polarity: Vertical

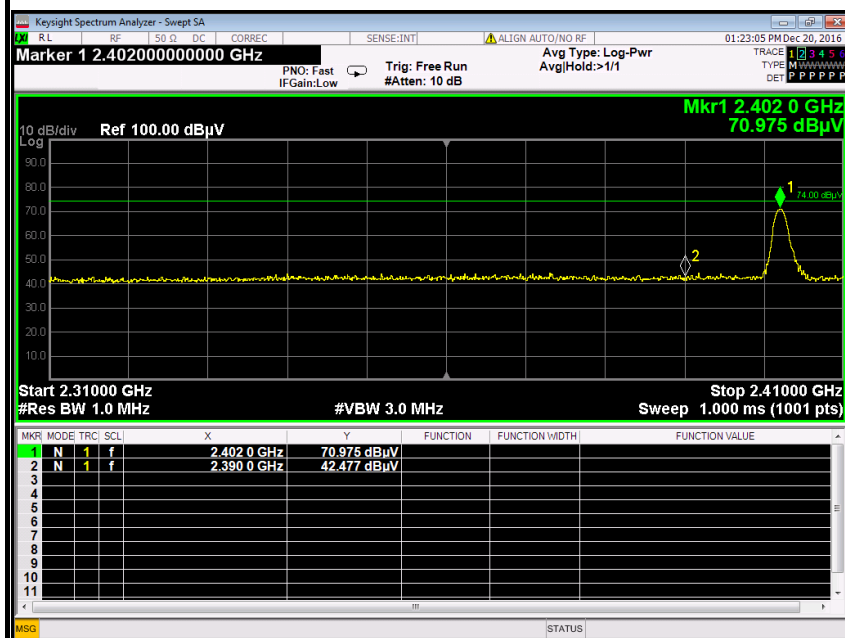


Detector mode: Average

Polarity: Vertical

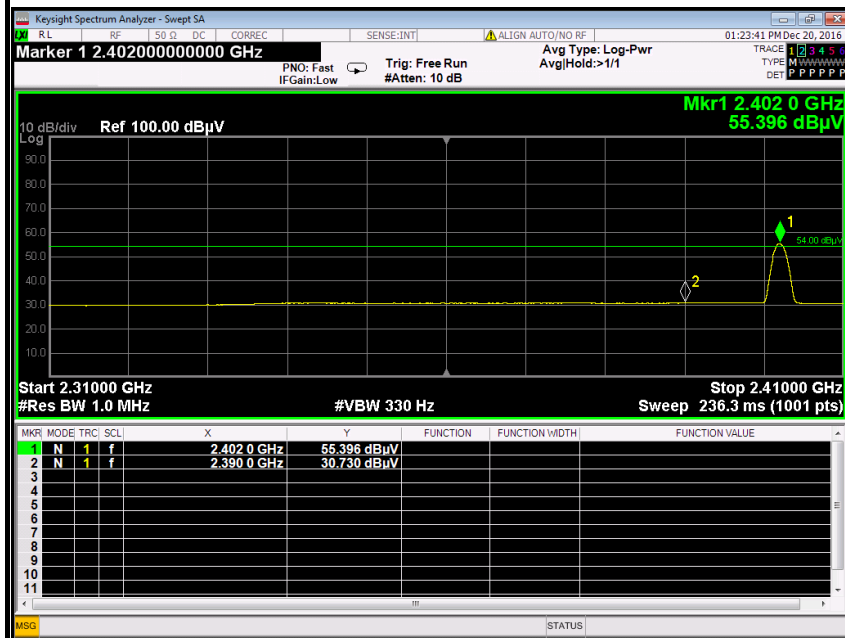

No.	Frequency (MHz)	Reading (dBuV)	Corrected (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Pole
1	2390.0000	39.62	-2.86	42.48	74.00	-31.52	Peak	Vertical
2	2390.0000	27.87	-2.86	30.73	54.00	-23.27	Average	Vertical

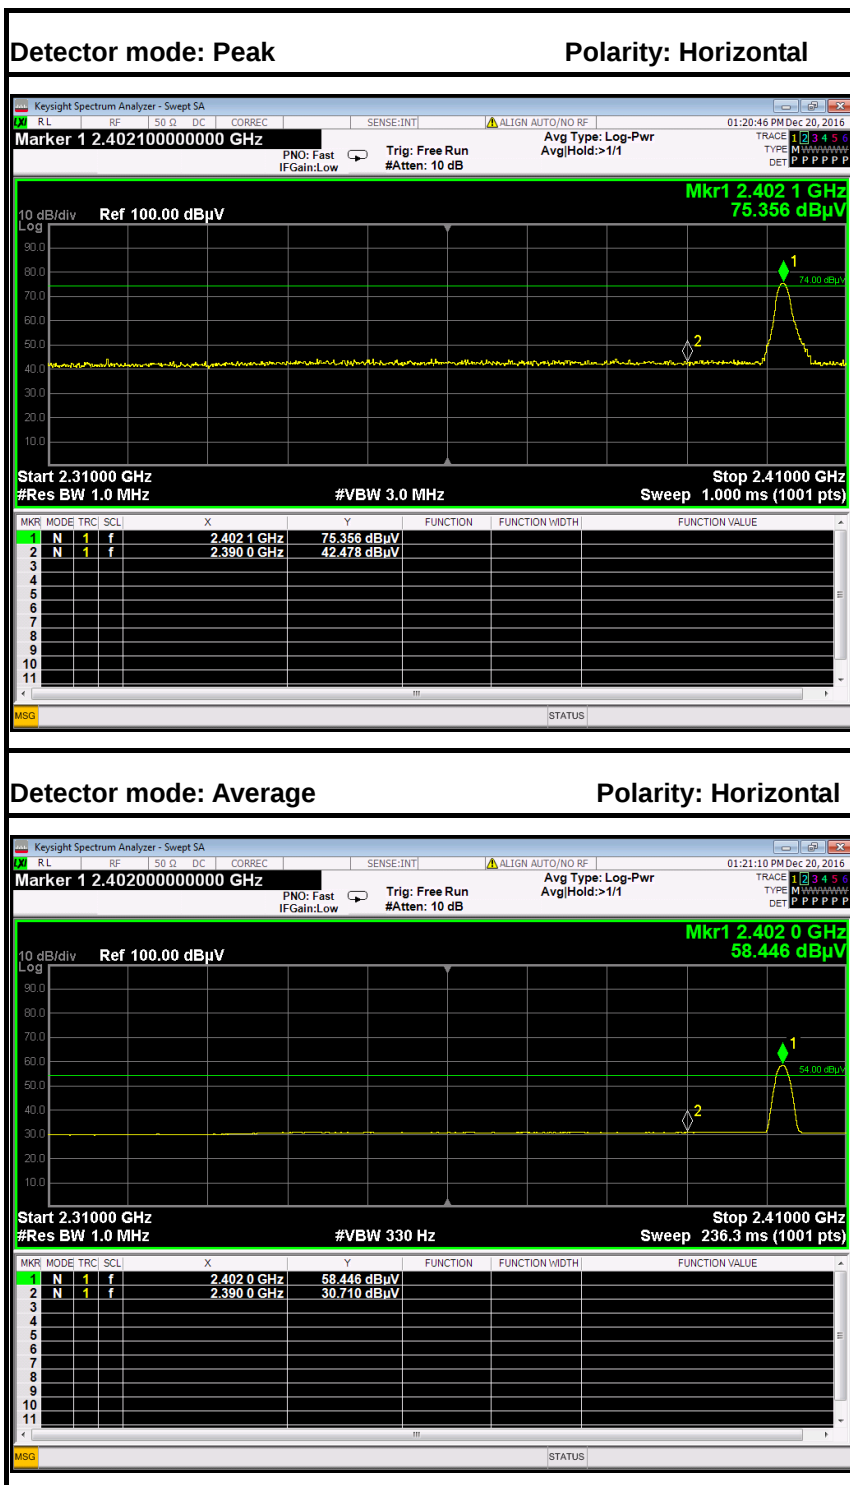


No.	Frequency (MHz)	Reading (dBuV)	Corrected (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Pole
1	2390.0000	39.62	-2.86	42.48	74.00	-31.52	Peak	Horizontal
2	2390.0000	27.85	-2.86	30.71	54.00	-23.29	Average	Horizontal



Band Edges (CH-High)


Detector mode: Peak

Polarity: Vertical

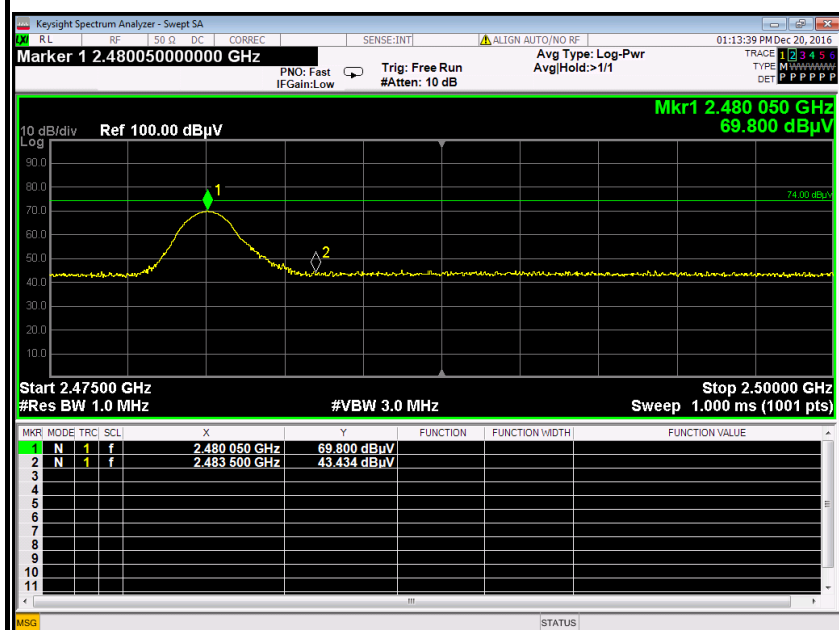

Detector mode: Average

Polarity: Vertical

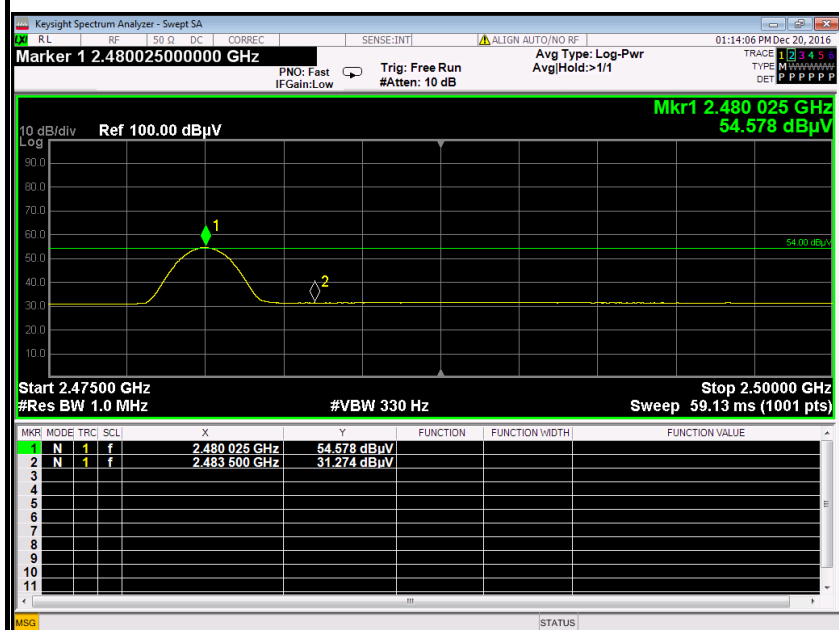


No.	Frequency (MHz)	Reading (dBμV)	Corrected (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Antenna Pole
1	2483.5000	41.08	-2.35	43.43	74.00	-30.57	Peak	Vertical
2	2483.5000	28.92	-2.35	31.27	54.00	-22.73	Average	Vertical




Detector mode: Peak

Polarity: Horizontal

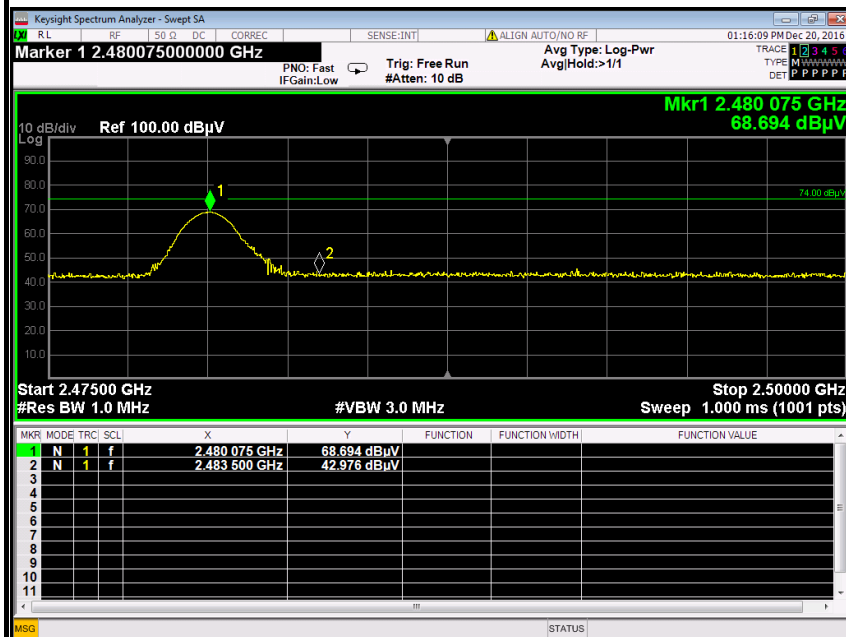

Detector mode: Average

Polarity: Horizontal

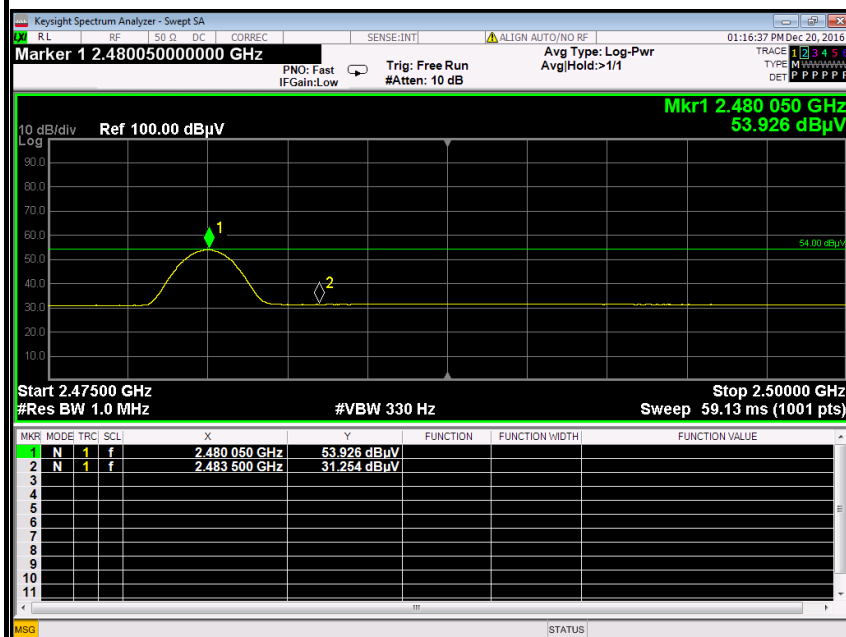

No.	Frequency (MHz)	Reading (dBμV)	Corrected (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Antenna Pole
1	2483.5000	40.63	-2.35	42.98	74.00	-31.02	Peak	Horizontal
2	2483.5000	28.90	-2.35	31.25	54.00	-22.75	Average	Horizontal



6.6 FREQUENCY SEPARATION

LIMIT


According to §15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	N9010A	MY55370330	02/21/2016	02/20/2017

Remark: Each piece of equipment is scheduled for calibration once a year.

Test Configuration



TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set center frequency of spectrum analyzer = middle of hopping channel.
4. Set the spectrum analyzer as RBW=30kHz, VBW=30kHz, Adjust Span to 4 MHz, Sweep = auto.
5. Max hold. Mark 3 Peaks of hopping channel and record the 3 peaks frequency.

TEST RESULTS

No non-compliance noted

Test Data

GFSK

Channel Separation (MHz)	Two-thirds of the 20 dB Bandwidth (kHz)	Channel Separation Limit	Result
1.000	726.000	> Two-thirds of the 20 dB Bandwidth	Pass

8DPSK

Channel Separation (MHz)	Two-thirds of the 20 dB Bandwidth (kHz)	Channel Separation Limit	Result
1.000	842.667	> Two-thirds of the 20 dB Bandwidth	Pass




GFSK

Test Plot

Measurement of Channel Separation



20 dB bandwidth(CH Low)

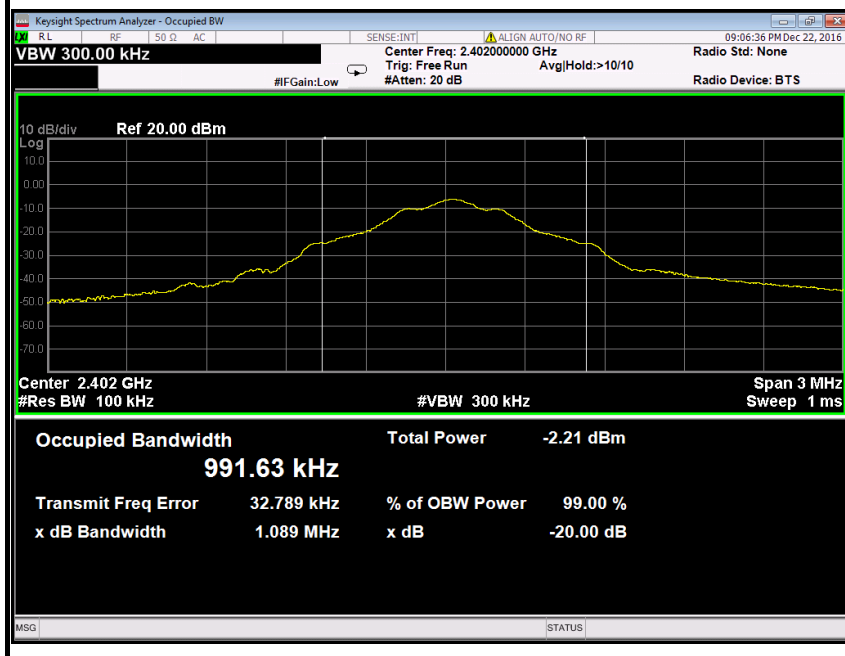





8DPSK

Test Plot

Measurement of Channel Separation

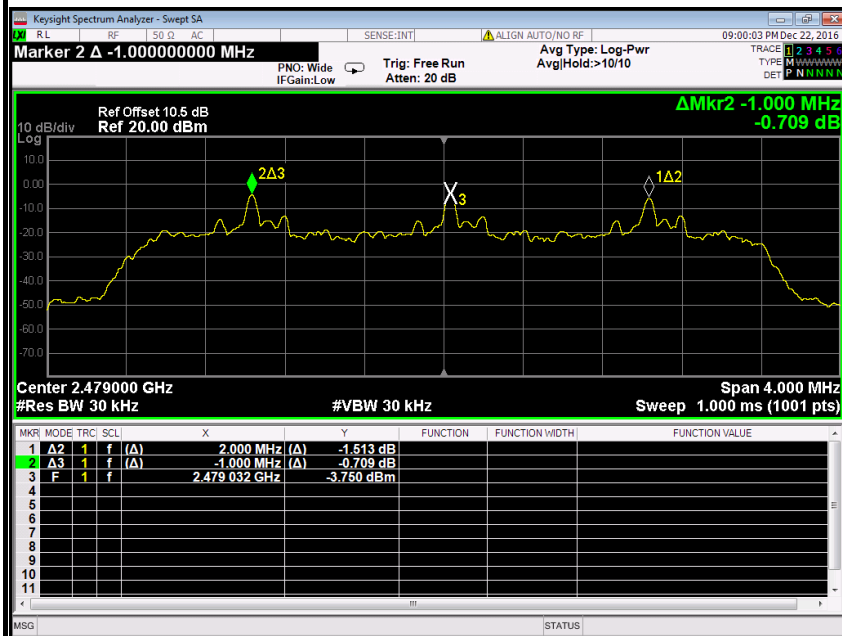

20 dB bandwidth(CH High)

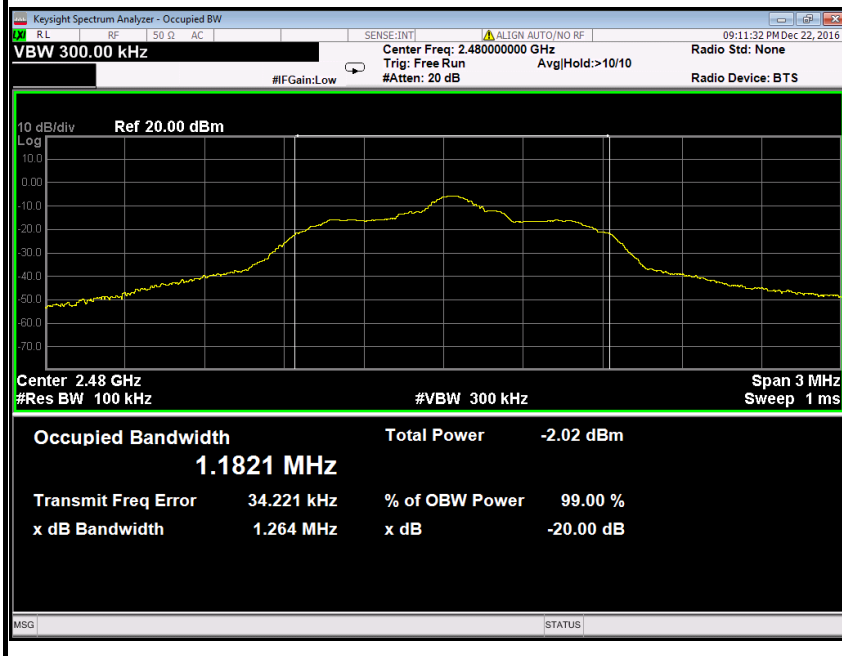



6.7 NUMBER OF HOPPING FREQUENCY

LIMIT


According to §15.247(a)(1)(ii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands shall use at least 15 hopping frequencies.

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	N9010A	MY55370330	02/21/2016	02/20/2017

Remark: Each piece of equipment is scheduled for calibration once a year.

Test Configuration



TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set spectrum analyzer Start=2400MHz, Stop = 2483.5MHz, Sweep = 1ms.
4. Set the spectrum analyzer as RBW, VBW=300kHz,
5. Max hold, view and count how many channel in the band.

TEST RESULTS

No non-compliance noted

Test Data

Result (No. of CH)	Limit (No. of CH)	Result
79	>15	PASS




Test Plot

Channel Number


GFSK

2.400 GHz – 2.4835 GHz

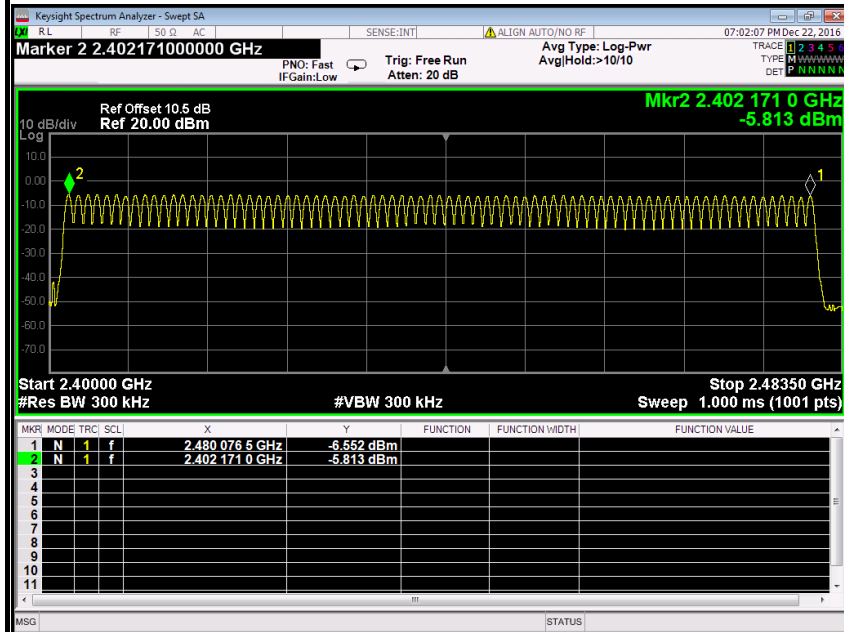

8DPSK

2.400 GHz – 2.4835 GHz

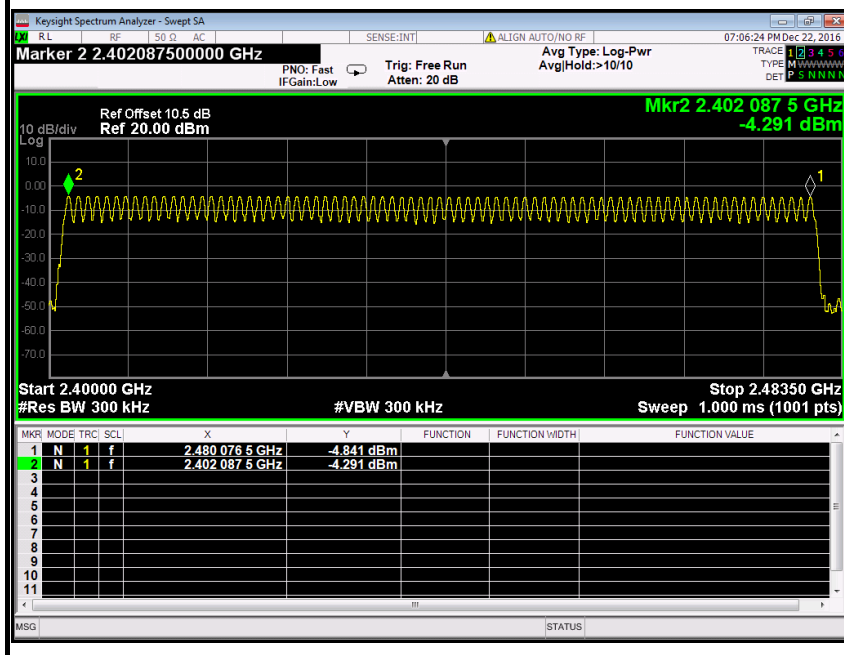



6.8 TIME OF OCCUPANCY (DWELL TIME)

LIMIT


According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands. The average time of occupancy on any channels shall not greater than 0.4 s within a period 0.4s multiplied by the number of hopping channels employed.

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	N9010A	MY55370330	02/21/2016	02/20/2017

Remark: Each piece of equipment is scheduled for calibration once a year.

Test Configuration



TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set center frequency of spectrum analyzer = operating frequency.
4. Set the spectrum analyzer as RBW, VBW=1MHz, Span = 0Hz, Sweep = auto.
5. Repeat above procedures until all frequency measured were complete.

**TEST RESULTS***No non-compliance noted***Test Data****GFSK****DH 1**CH Mid: $0.500 * (1600/2)/79 * 31.6 = 160.000(\text{ms})$

CH	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Mid	0.500	160.000	31.60	400.00	PASS

DH 3CH Mid: $1.764 * (1600/4)/79 * 31.6 = 282.240 (\text{ms})$

CH	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Mid	1.764	282.240	31.60	400.00	PASS

DH 5CH Mid: $3.008 * (1600/6)/79 * 31.6 = 320.853(\text{ms})$

CH	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Mid	3.008	320.853	31.60	400.00	PASS

**8DPSK****3DH 1**CH Mid: $0.507 * (1600/2)/79 * 31.6 = 162.240$ (ms)

CH	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Mid	0.507	162.240	31.60	400.00	PASS

3DH 3CH Mid: $1.761 * (1600/4)/79 * 31.6 = 281.760$ (ms)

CH	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Mid	1.761	281.760	31.60	400.00	PASS

3DH 5CH Mid: $3.016 * (1600/6)/79 * 31.6 = 321.707$ (ms)


CH	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Mid	3.016	321.707	31.60	400.00	PASS

Test Plot

GFSK


DH 1

CH Mid

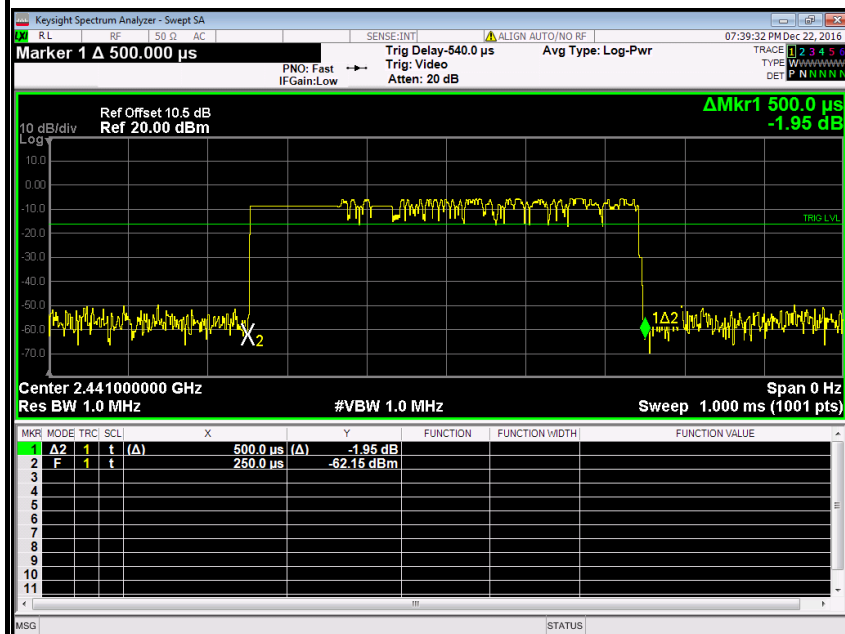

DH 3


CH Mid

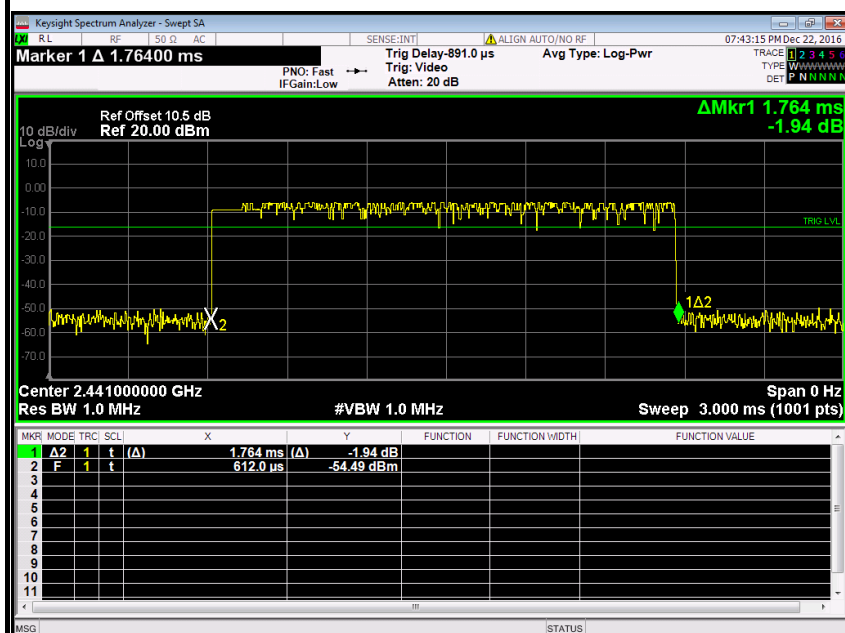



DH 5

CH Mid

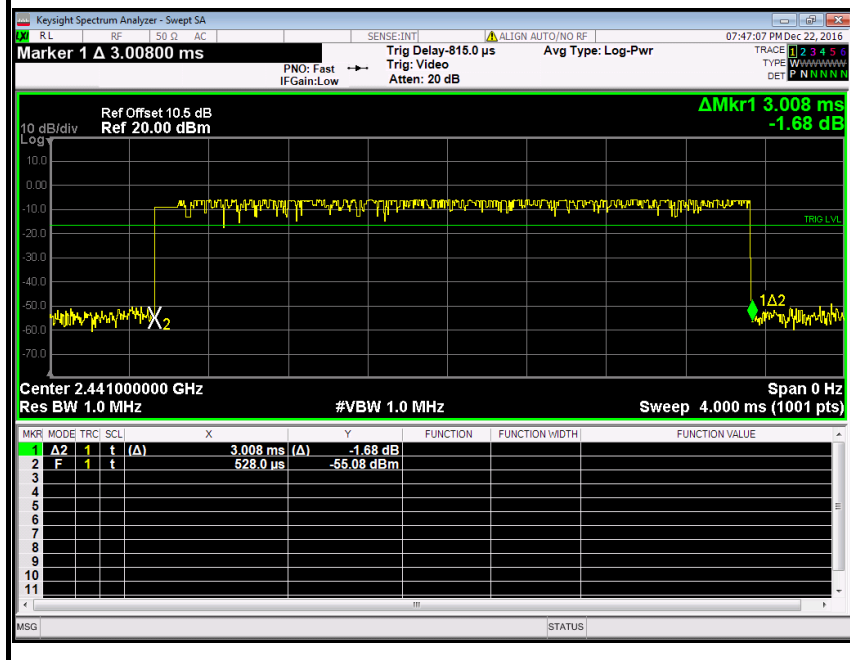




Test Plot

8DPSK


3DH 1

CH Mid

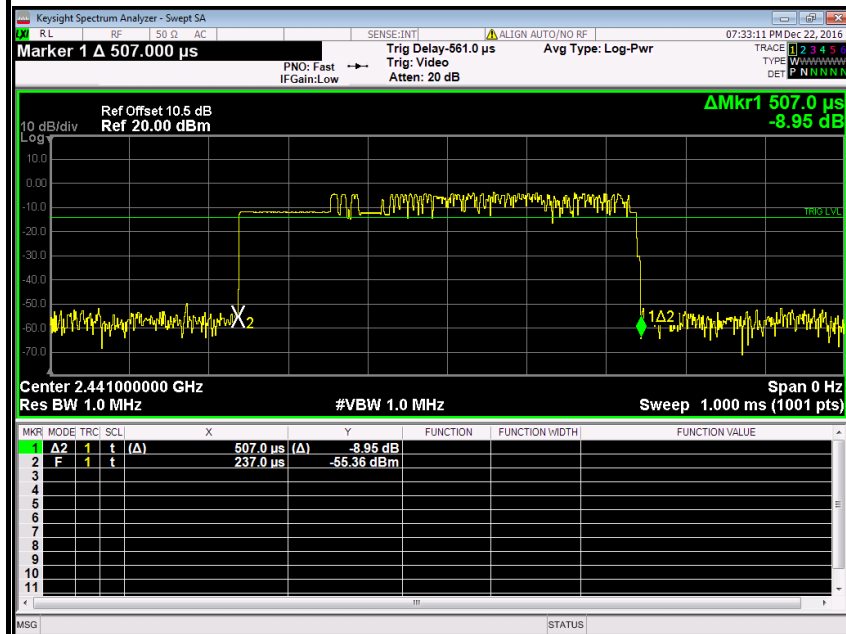

3DH 3


CH Mid

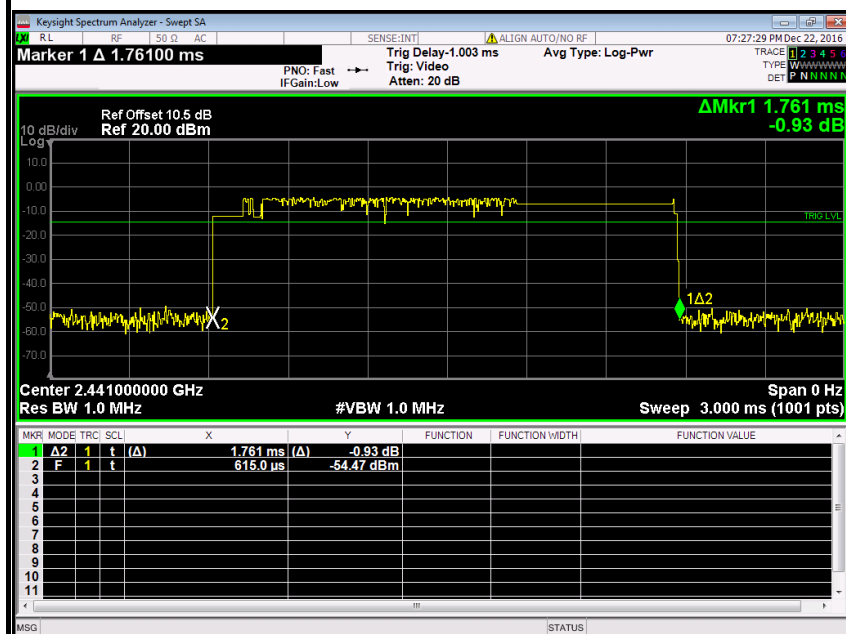



3DH 5

CH Mid

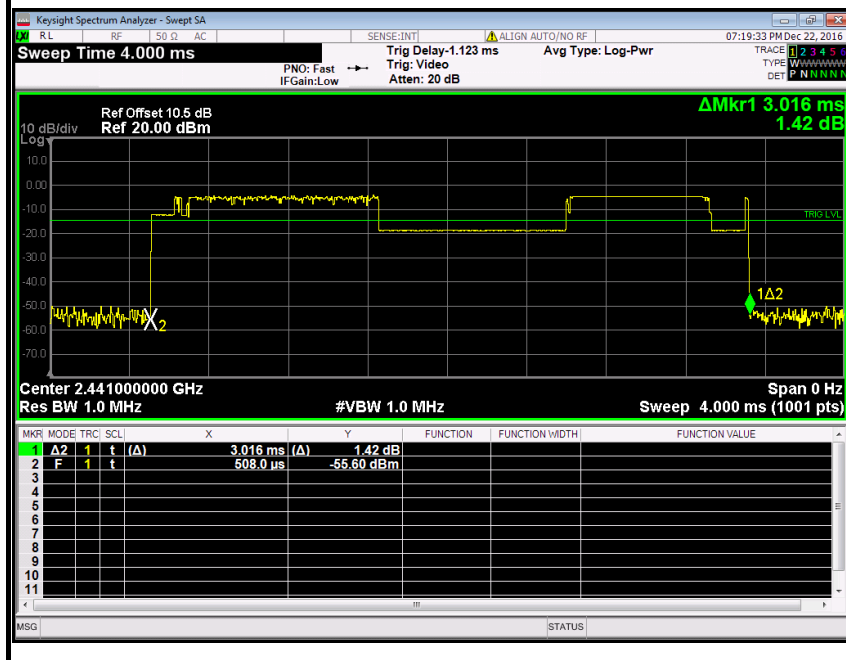



6.9 SPURIOUS EMISSIONS

6.9.1. CONDUCTED MEASUREMENT

LIMIT


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	N9010A	MY55370330	02/21/2016	02/20/2017

Remark: Each piece of equipment is scheduled for calibration once a year.

Test Configuration



TEST PROCEDURE

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.

Measurements are made over the 9kHz to 26GHz range with the transmitter set to the lowest, middle, and highest channels, and highest channels. No emission found between lowest internal used/generated frequency to 10MHz , it is only recorded 10MHz to 26GHz.

TEST RESULTS


No non-compliance noted

Remark: The hopping on mode and hopping off mode were chosen for pre-test and the hopping off mode was the worse case and print in the report.




Hopping Off
Test Plot (GFSK)

CH Low (10MHz ~26.5GHz)


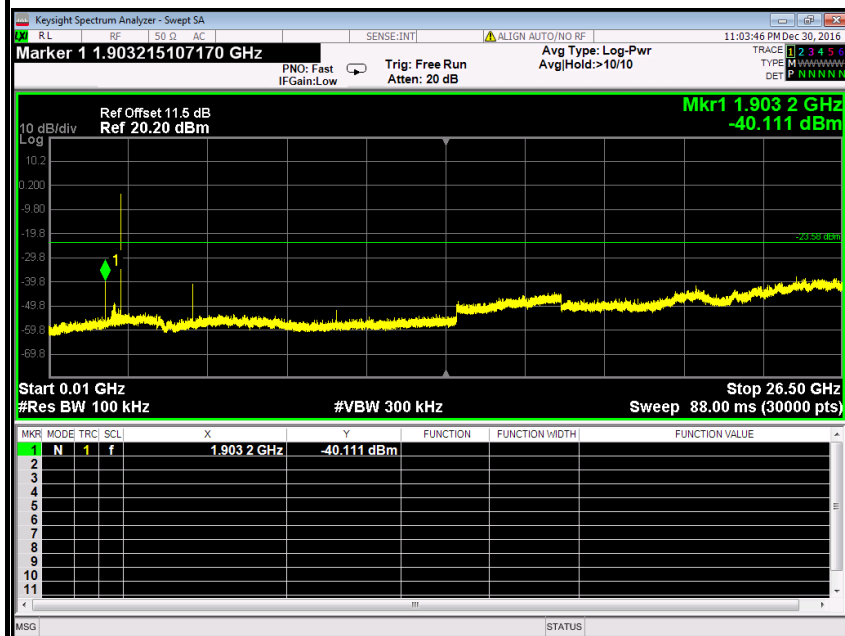


CH Low (2.31GHz ~2.41GHz)

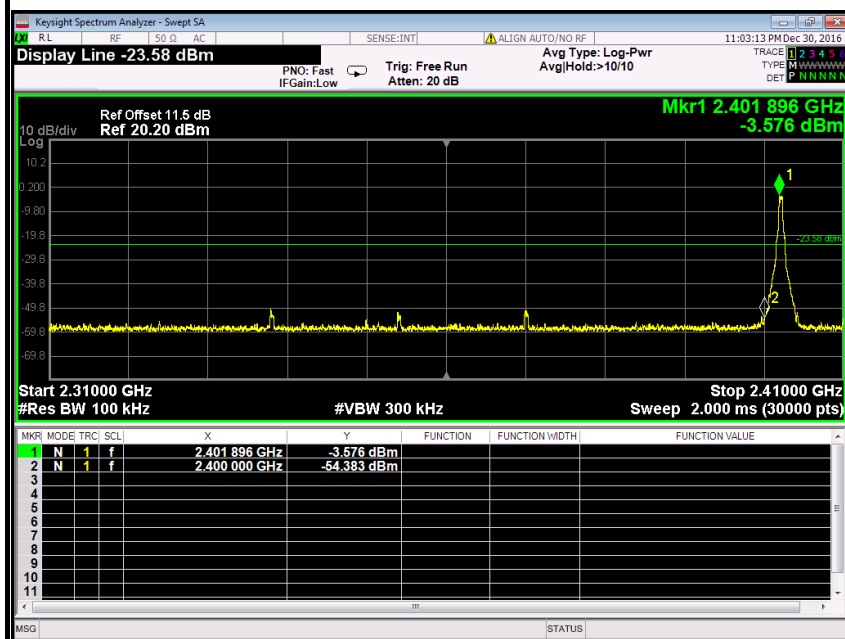




CH Mid (10MHz ~26.5GHz)

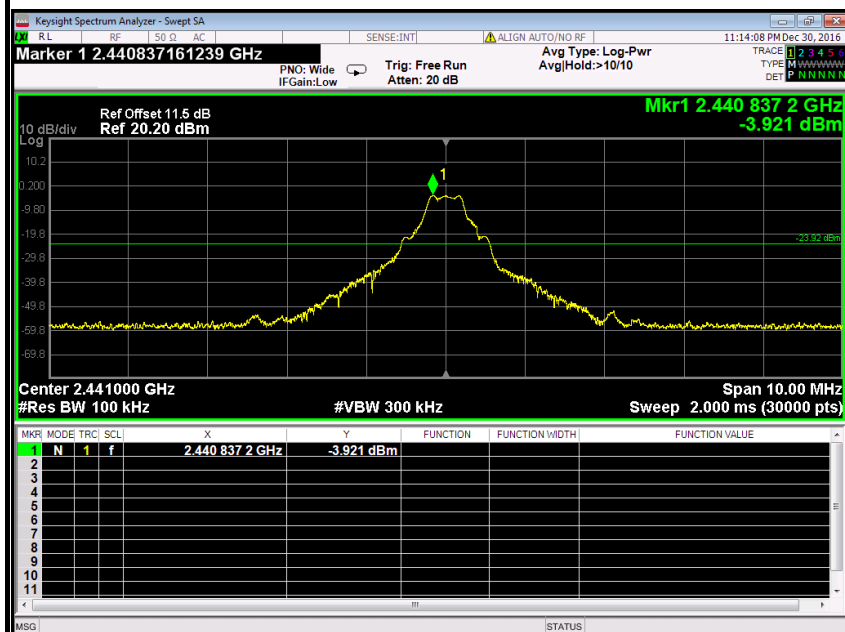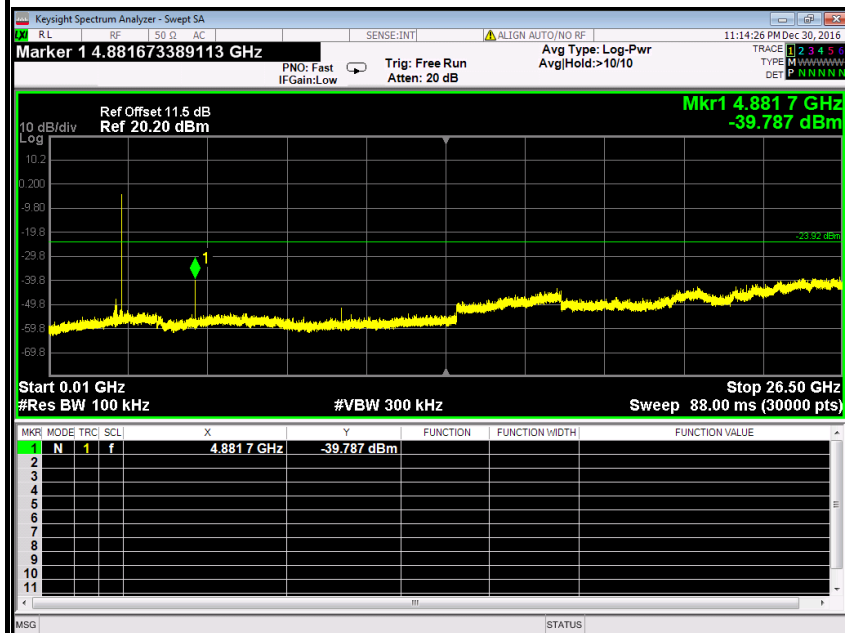




CH High (10MHz ~26.5GHz)

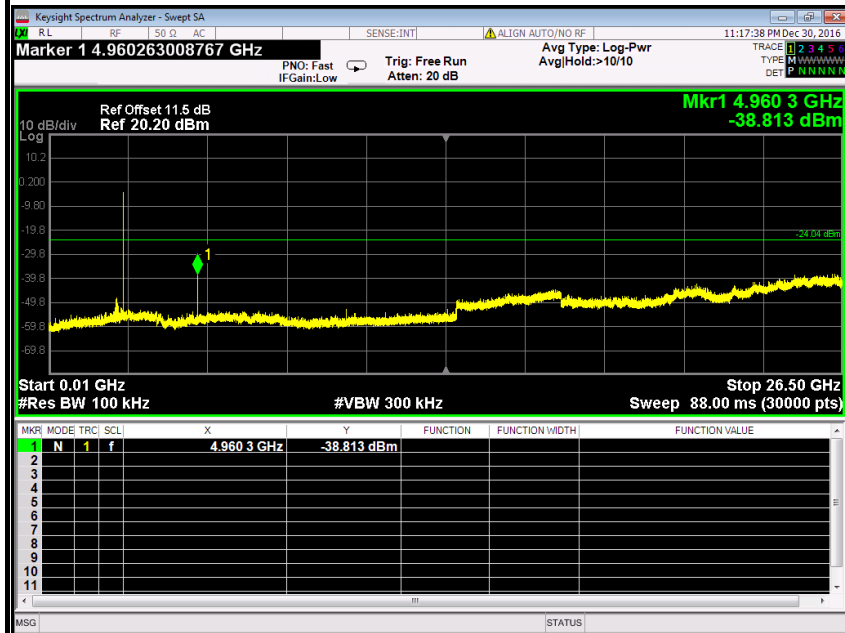


CH High (2.475GHz ~ 2.5GHz)

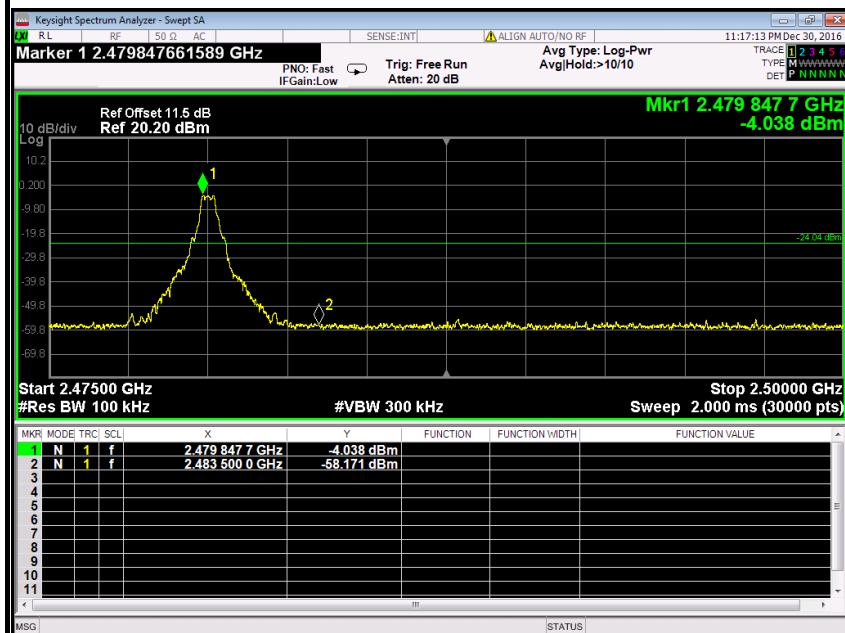




Test Plot (8DPSK)

CH Low (10MHz ~26.5GHz)


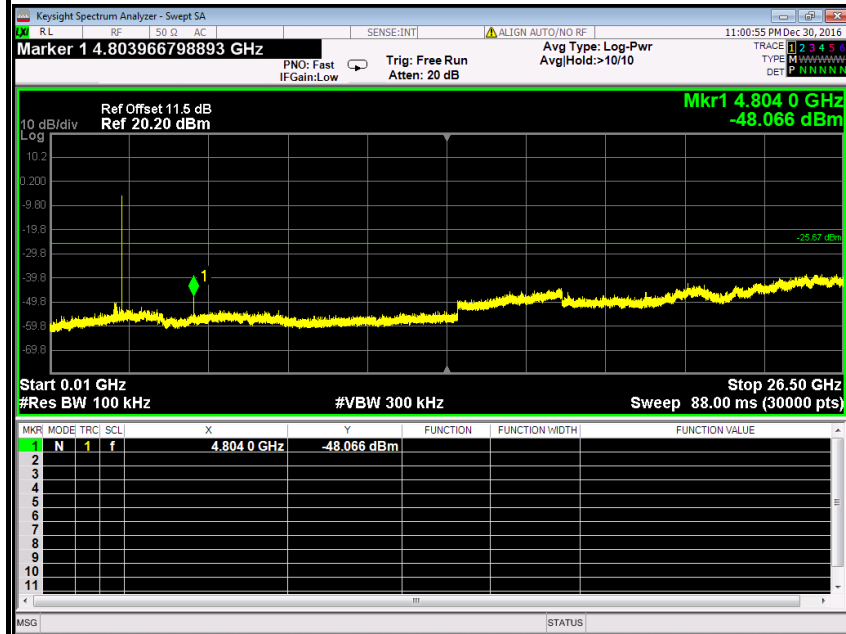


CH Low (2.31GHz ~2.41GHz)

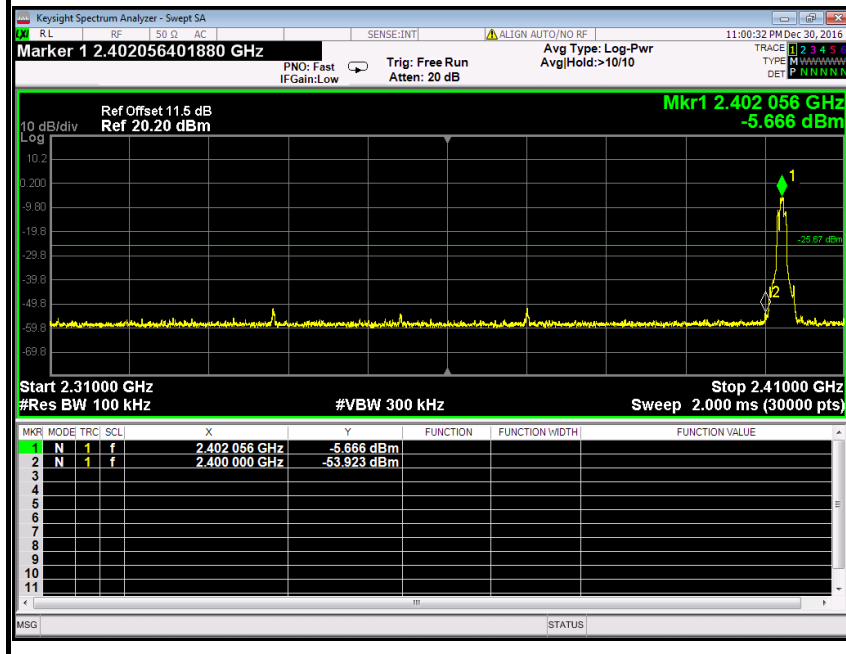




CH Mid (10MHz ~26.5GHz)

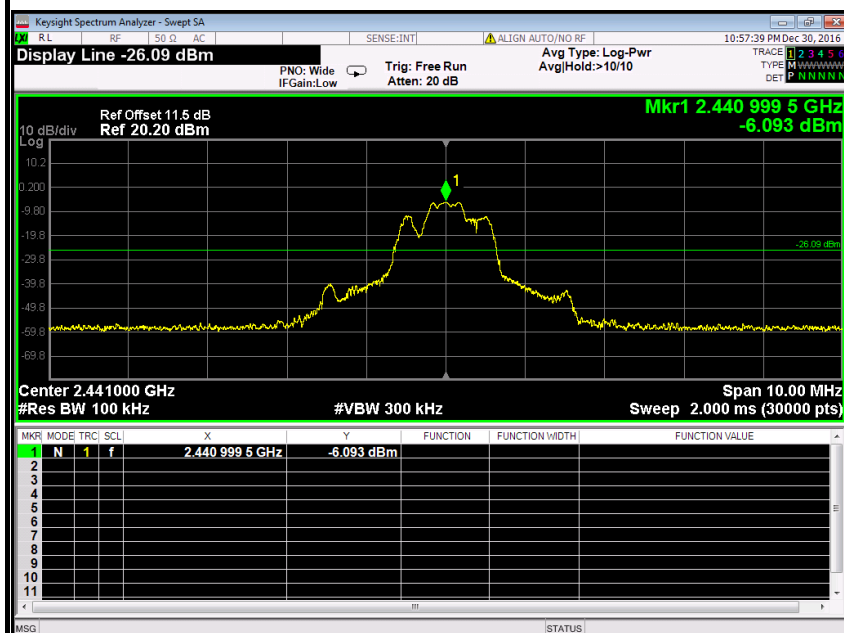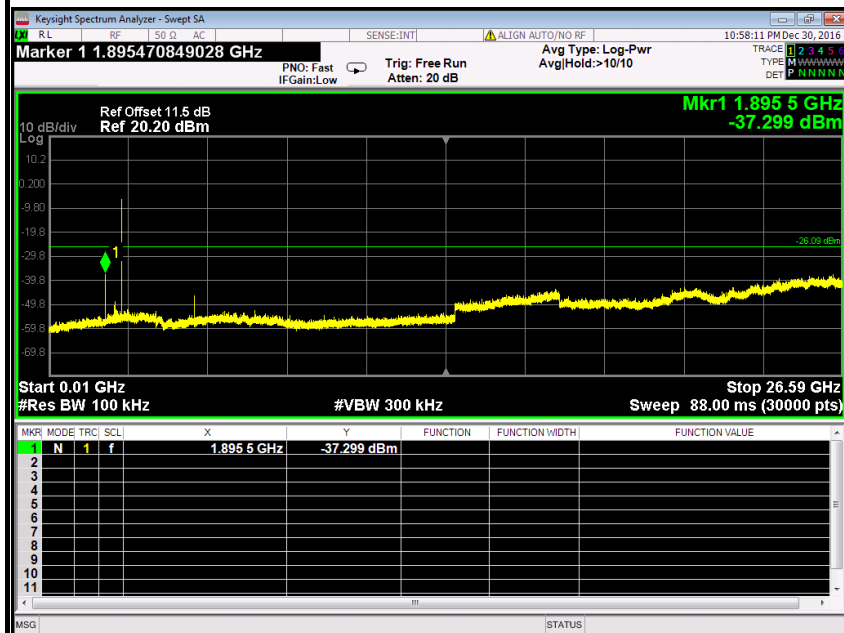




CH High (10MHz ~26.5GHz)

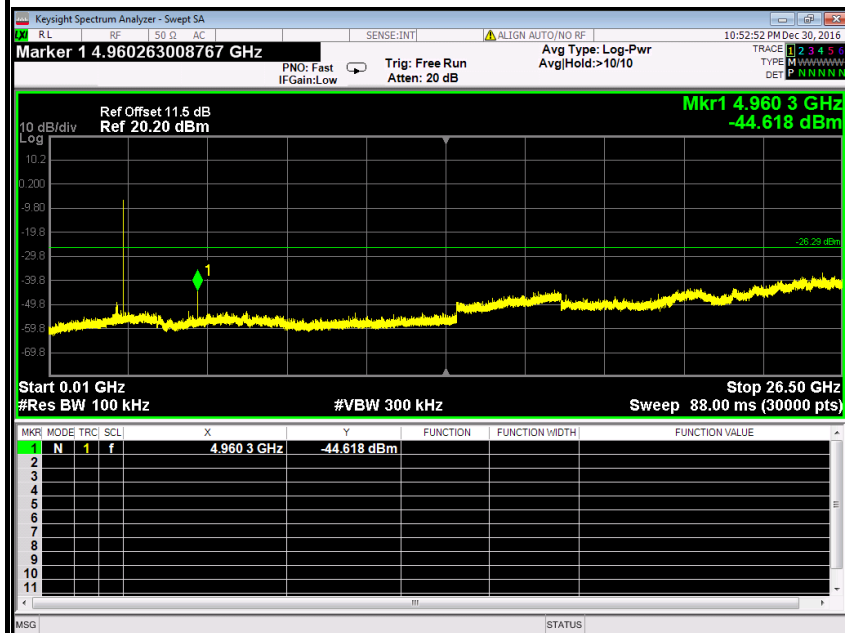

CH High (2.475GHz ~ 2.5GHz)

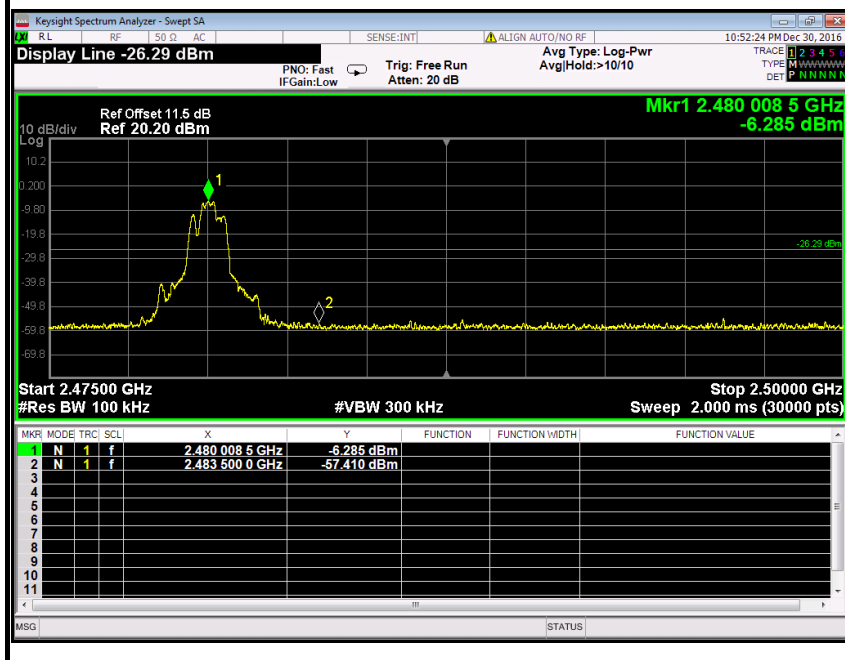




Hopping On


Test Data (GFSK)

CH Low (2.31GHz ~2.5GHz)

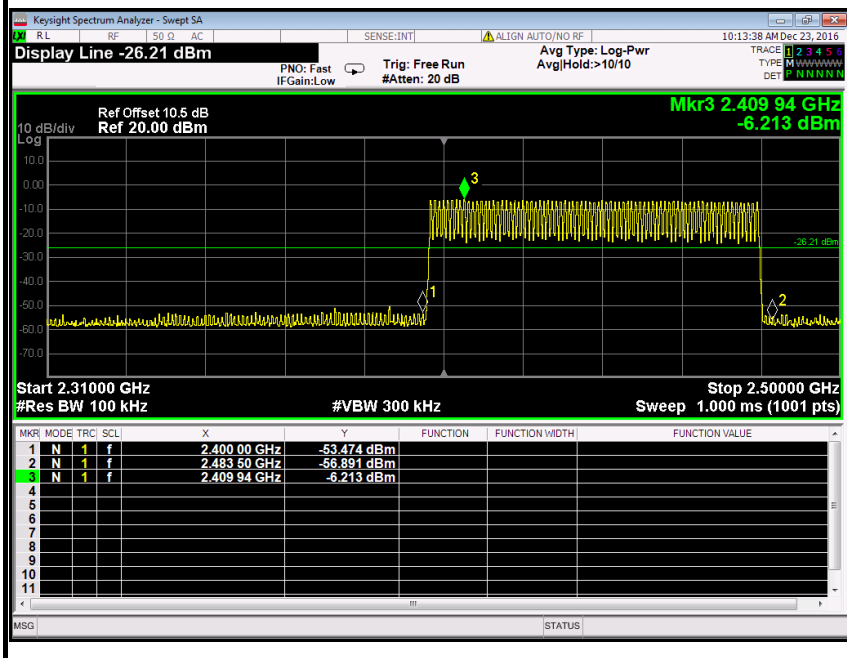

Test Data (8DPSK)

CH Low (2.31GHz ~2.5GHz)

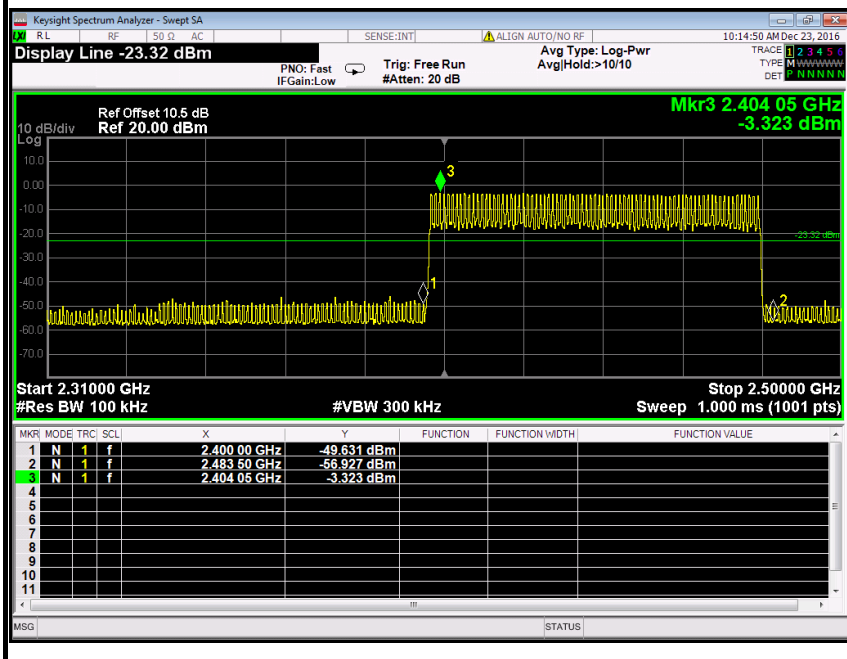



6.9.2. Radiated Emissions

LIMIT

1. Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (mV/m)	Measurement Distance (m)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100*	3
88-216	150*	3
216-960	200*	3
Above 960	500	3

Note: Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.


2. In the above emission table, the tighter limit applies at the band edges.

Frequency (Hz)	Field Strength (μ V/m at 3-meter)	Field Strength (dB μ V/m at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

**MEASUREMENT EQUIPMENT USED**


Radiated Emission Test Site 966(2)					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
PSA Series Spectrum Analyzer	Agilent	N9010A	MY55370330	02/21/2016	02/20/2017
EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100783	02/21/2016	02/20/2017
Amplifier	EMEC	EM330	060661	03/18/2016	03/17/2017
High Noise Amplifier	Agilent	8449B	3008A01838	02/21/2016	02/20/2017
Loop Antenna	COM-POWER	AL-130	121044	09/25/2016	09/24/2017
Bilog Antenna	SCHAFFNER	CBL6143	5082	02/21/2016	02/20/2017
Horn Antenna	SCHWARZBECK	BBHA9120	D286	02/28/2016	02/27/2017
Board-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170-497	02/28/2016	02/27/2017
Turn Table	N/A	N/A	N/A	N.C.R	N.C.R
Antenna Tower	SUNOL	TLT2	N/A	N.C.R	N.C.R
Controller	Sunol Sciences	SC104V	022310-1	N.C.R	N.C.R
Controller	CT	N/A	N/A	N.C.R	N.C.R
Temp. / Humidity Meter	Anymetre	JR913	N/A	02/21/2016	02/20/2017
Test S/W	FARAD	LZ-RF / CCS-SZ-3A2			

Remark: Each piece of equipment is scheduled for calibration once a year.

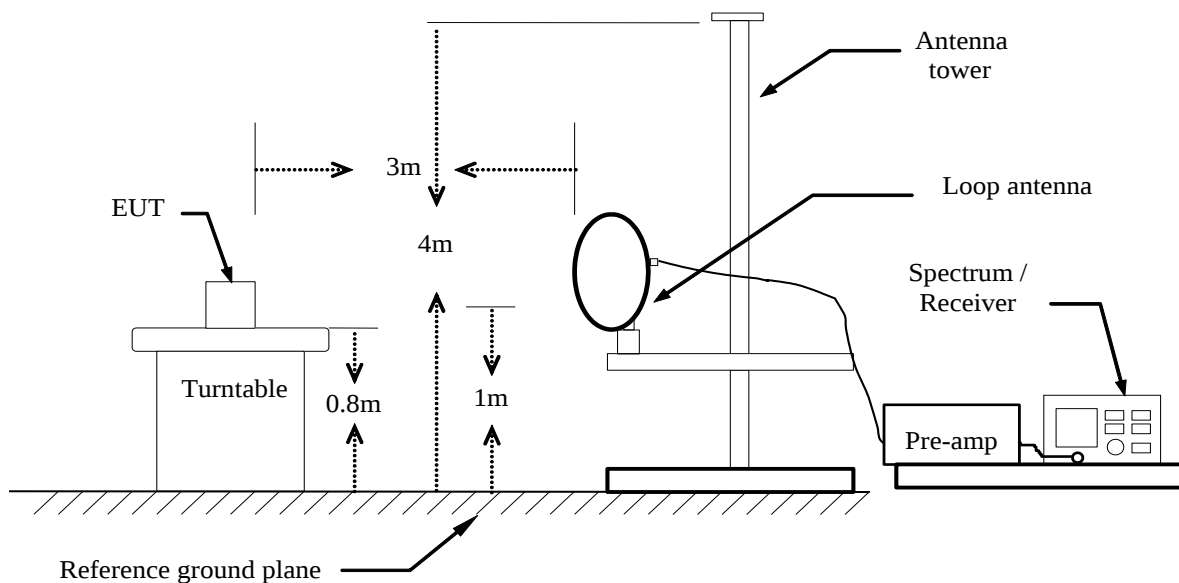
Test Configuration**Below 30MHz**



Below 1 GHz

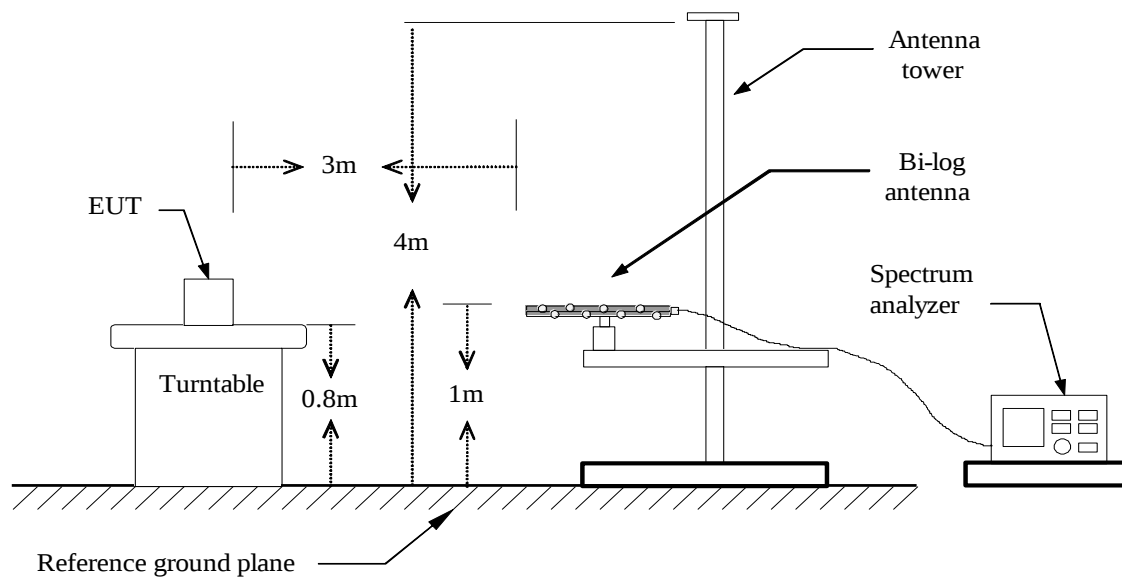

Above 1 GHz

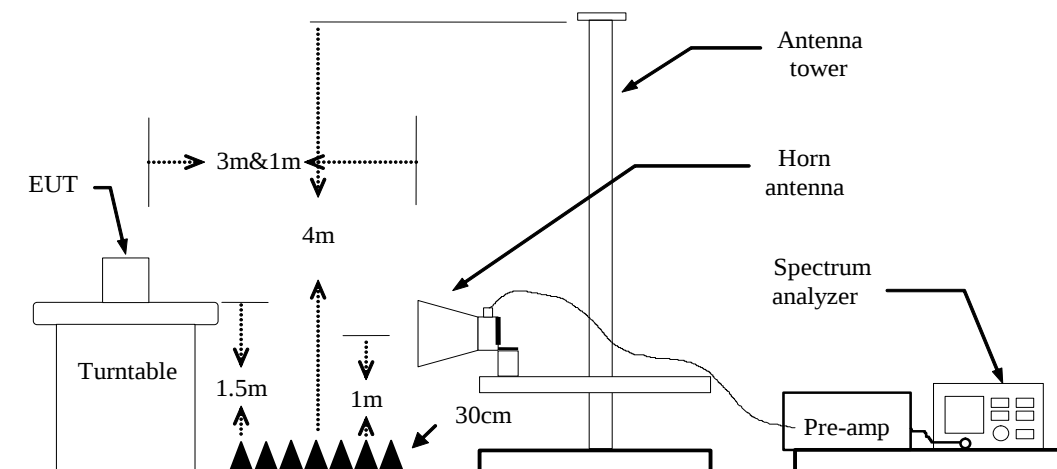



MEASURING SETTING

The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP/AVG
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP/AVG
Start ~ Stop Frequency	30MHz~1000MHz / RB 100kHz for QP

TEST PROCEDURE

1) Sequence of testing 9 kHz to 30 MHz

Setup:

--- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.

--- If the EUT is a tabletop system, a rotatable table with 0.8 m height is used.

--- If the EUT is a floor standing device, it is placed on the ground.

--- Auxiliary equipment and cables were positioned to simulate normal operation conditions.

--- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.

--- The measurement distance is 3 meter.

--- The EUT was set into operation.

Pre measurement:

--- The turntable rotates from 0° to 315° using 45° steps.

--- The antenna height is 0.8 meter.

--- At each turntable position the analyzer sweeps with peak detection to find the maximum of all emissions



Final measurement:

--- Identified emissions during the pre measurement the software maximizes by rotating the turntable position (0° to 360°) and by rotating the elevation axes (0° to 360°).

--- The final measurement will be done in the position (turntable and elevation) causing the highest emissions with QPK detector.

--- The final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the pre measurement and the limit will be stored.

2) Sequence of testing 30 MHz to 1 GHz

Setup:

--- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.

--- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.

--- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.

--- Auxiliary equipment and cables were positioned to simulate normal operation conditions

--- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.

--- The measurement distance is 3 meter.

--- The EUT was set into operation.

Pre measurement:

--- The turntable rotates from 0° to 315° using 45° steps.

--- The antenna is polarized vertical and horizontal.

--- The antenna height changes from 1 to 3 meter.

--- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.



Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ($\pm 45^\circ$) and antenna movement between 1 and 4 meter.
- The final measurement will be done with QP detector with an EMI receiver.
- The final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

3) Sequence of testing 1 GHz to 18 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Pre measurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height scan range is 1 meter to 2.5 meter.
- At each turntable position and antenna polarization the analyzer sweeps with peak detection to find the maximum of all emissions.



Final measurement:

--- The final measurement will be performed with minimum the six highest peaks.

--- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ($\pm 45^\circ$) and antenna movement between 1 and 4 meter. This procedure is repeated for both antenna polarizations.

--- The final measurement will be done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and Average detector.

--- The final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the pre measurement with marked maximum final measurements and the limit will be stored.

4) Sequence of testing above 18 GHz

Setup:

--- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.

--- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.

--- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.

--- Auxiliary equipment and cables were positioned to simulate normal operation conditions

--- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.

--- The measurement distance is 1 meter.

--- The EUT was set into operation.

Pre measurement:

--- The antenna is moved spherical over the EUT in different polarisations of the antenna.

Final measurement:

--- The final measurement will be performed at the position and antenna orientation for all detected emissions that were found during the premeasurements with Peak and Average detector.

--- The final levels, frequency, measuring time, bandwidth, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.

**TEST RESULTS****Below 1 GHz****GFSK**Test Mode: TX(CH Low)Tested by: Sam ZengAmbient temperature: 24°C Relative humidity: 52% RH Date: December 19, 2016

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
57.1600	53.53	-23.26	30.27	40.00	-9.73	V	QP
199.7500	48.90	-22.73	26.17	43.50	-17.33	V	QP
232.7300	51.29	-21.75	29.54	46.00	-16.46	V	QP
298.6900	50.87	-19.69	31.18	46.00	-14.82	V	QP
399.5700	46.36	-16.10	30.26	46.00	-15.74	V	QP
433.5200	44.04	-15.62	28.42	46.00	-17.58	V	QP
51.3400	52.32	-21.56	30.76	40.00	-9.24	H	QP
199.7500	55.63	-22.73	32.90	43.50	-10.60	H	QP
232.7300	55.08	-21.75	33.33	46.00	-12.67	H	QP
298.6900	55.48	-19.69	35.79	46.00	-10.21	H	QP
403.4500	51.82	-15.92	35.90	46.00	-10.10	H	QP
465.5300	50.19	-14.93	35.26	46.00	-10.74	H	QP

****Remark:** No emission found between lowest internal used/generated frequency to 30MHz.
Pre-scan all mode and recorded the worst case results in this report (TX-Low Channel(1Mbps)).


Notes:

1. Measuring frequencies from 9kHz to the 1GHz.
2. Radiated emissions measured in frequency range from 30MHz to 1GHz were made with an instrument using Peak/Quasi-peak detector mode.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. The IF bandwidth of SPA between 30MHz to 1GHz was 120kHz.
5.


Frequency (MHz).	= Emission frequency in MHz
Reading (dBuV)	= Receiver reading
Correction Factor(dB/m)	= Antenna factor + Cable loss – Amplifier gain
Actual FS (dBuV/m)	= Reading (dBuV) + Corr. Factor (dB/m)
Limit (dBuV/m)	= Limit stated in standard
Margin(dB)	= Measured (dBuV/m) – Limits (dBuV/m)
Antenna Pole(V/H)	= Current carrying line of reading



Vertical

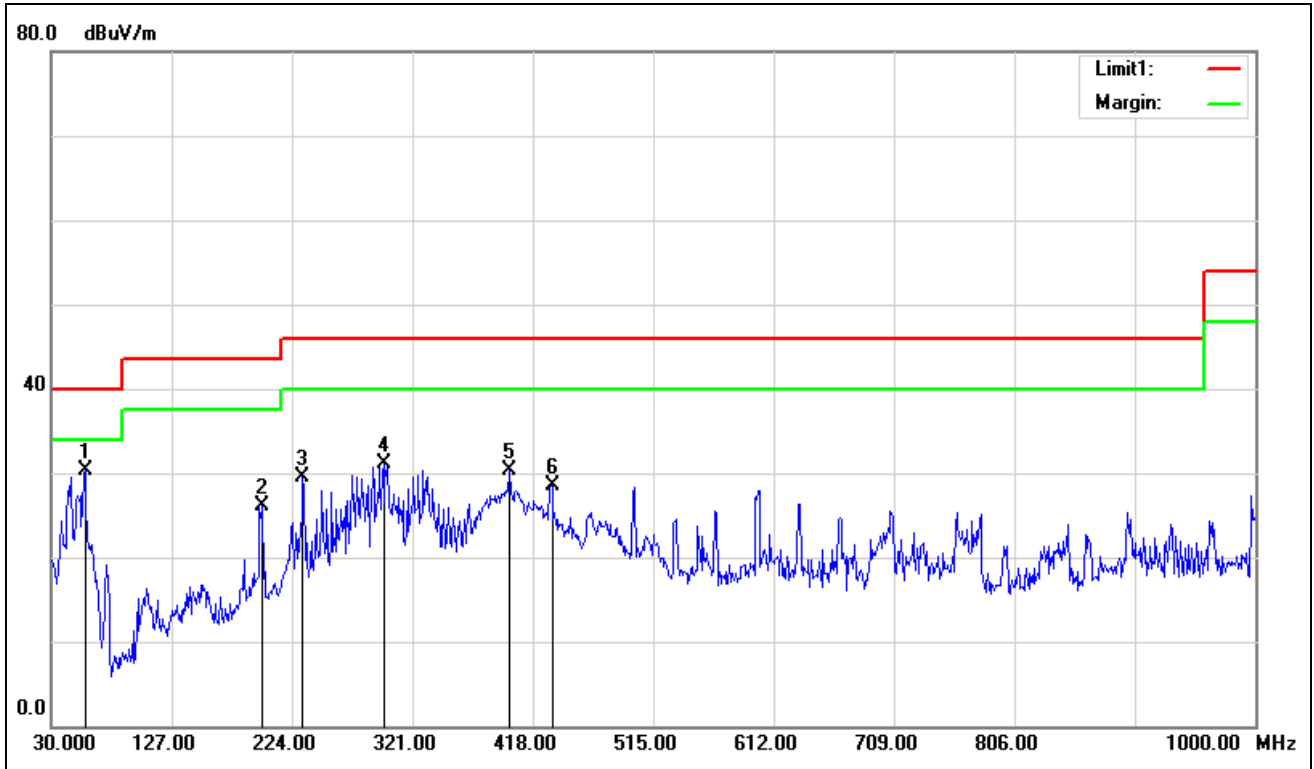

Horizontal

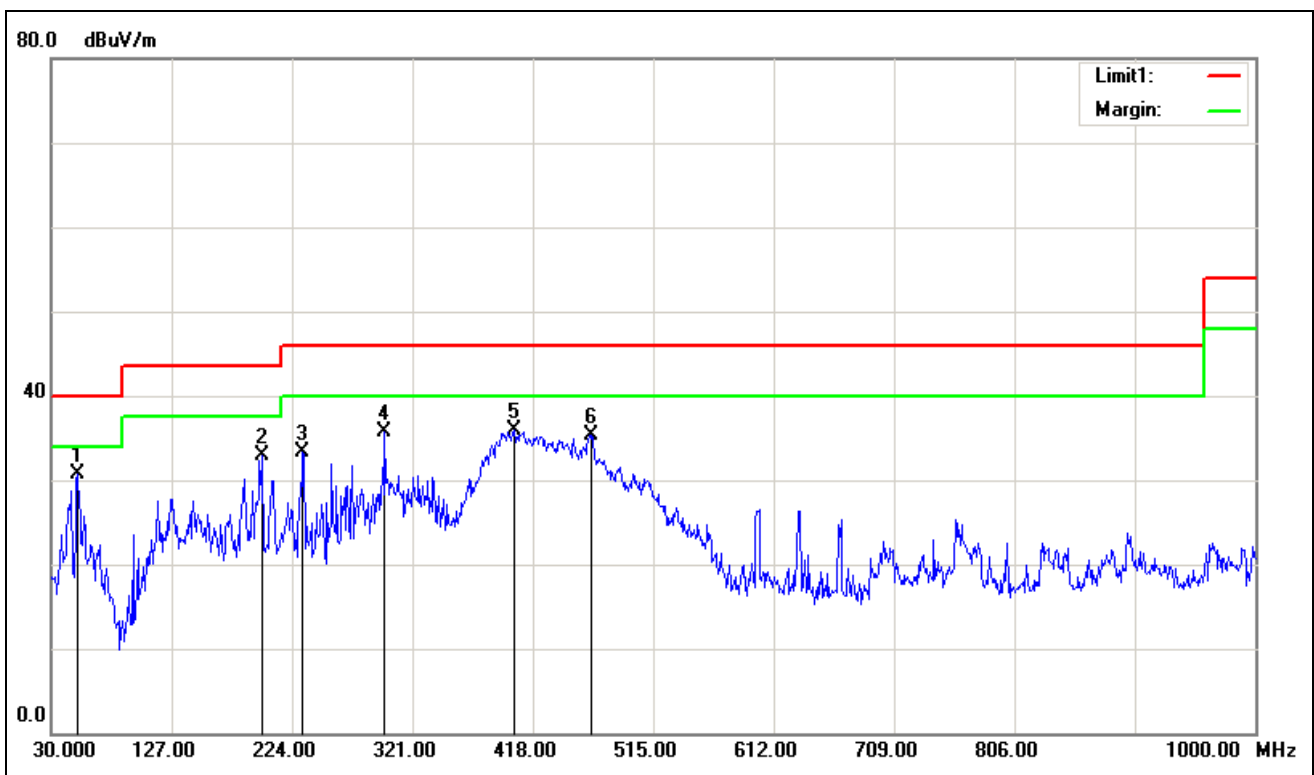

**Above 1 GHz****GFSK****Test Mode:** TX(CH Low)**Tested by:** Sam Zeng**Ambient temperature:** 24°C **Relative humidity:** 52% RH **Date:** December 19, 2016

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1495.000	49.16	-6.89	42.27	74.00	-31.73	V	peak
1792.000	49.55	-6.29	43.26	74.00	-30.74	V	peak
1999.000	51.19	-5.01	46.18	74.00	-27.82	V	peak
2548.000	45.70	-2.17	43.53	74.00	-30.47	V	peak
2827.000	44.15	-1.67	42.48	74.00	-31.52	V	peak
3718.000	42.92	0.40	43.32	74.00	-30.68	V	peak
1324.000	47.16	-7.34	39.82	74.00	-34.18	H	Peak
1630.000	46.69	-6.64	40.05	74.00	-33.95	H	Peak
2242.000	45.97	-3.67	42.30	74.00	-31.70	H	Peak
2539.000	44.57	-2.19	42.38	74.00	-31.62	H	peak
2818.000	43.97	-1.69	42.28	74.00	-31.72	H	peak
3394.000	43.73	-0.70	43.03	74.00	-30.97	H	peak

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 3MHz, Sweep time = auto.
 - b. AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 330Hz, Sweep time = auto.
5. Frequency (MHz) = Emission frequency in MHz

Reading (dBuV/m) = Uncorrected Analyzer / Receiver Reading

Correction Factor (dB) = Antenna factor + Cable loss – Amplifier gain

Limit (dBuV/m) = Limit stated in standard

Margin (dB) = Result (dBuV/m) - Limit (dBuV/m)

Pk = Peak Reading

AV = Average Reading

Remark = Mark Peak Reading or Average Reading

Test Mode: TX(CH Mid)Tested by: Sam ZengAmbient temperature: 24°C Relative humidity: 52% RH Date: December 19, 2016

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1495.000	46.74	-6.89	39.85	74.00	-34.15	V	peak
1999.000	50.17	-5.01	45.16	74.00	-28.84	V	peak
2521.000	45.41	-2.22	43.19	74.00	-30.81	V	peak
2809.000	44.03	-1.70	42.33	74.00	-31.67	V	peak
3250.000	42.55	-0.94	41.61	74.00	-32.39	V	peak
3826.000	42.74	0.86	43.60	74.00	-30.40	V	peak
1504.000	46.92	-6.87	40.05	74.00	-33.95	H	Peak
1999.000	47.25	-5.01	42.24	74.00	-31.76	H	Peak
2494.000	44.68	-2.29	42.39	74.00	-31.61	H	Peak
3223.000	42.71	-0.99	41.72	74.00	-32.28	H	peak
3979.000	41.62	1.50	43.12	74.00	-30.88	H	peak
4627.000	41.02	3.76	44.78	74.00	-29.22	H	peak

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 3MHz, Sweep time = auto.
 - b. AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 330Hz, Sweep time = auto.
5. Frequency (MHz) = Emission frequency in MHz

Reading (dBuV/m) = Uncorrected Analyzer / Receiver Reading

Correction Factor (dB) = Antenna factor + Cable loss – Amplifier gain

Limit (dBuV/m) = Limit stated in standard

Margin (dB) = Result (dBuV/m) - Limit (dBuV/m)

Pk = Peak Reading

AV = Average Reading

Remark = Mark Peak Reading or Average Reading

Test Mode: TX(CH High)Tested by: Sam ZengAmbient temperature: 24°C Relative humidity: 52% RH Date: December 19, 2016

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1801.000	47.48	-6.26	41.22	74.00	-32.78	V	peak
1999.000	49.32	-5.01	44.31	74.00	-29.69	V	peak
2530.000	45.11	-2.21	42.90	74.00	-31.10	V	peak
2800.000	43.91	-1.72	42.19	74.00	-31.81	V	peak
3691.000	42.54	0.29	42.83	74.00	-31.17	V	peak
4699.000	41.65	4.00	45.65	74.00	-28.35	V	peak
1999.000	50.32	-5.01	45.31	74.00	-28.69	H	Peak
2503.000	45.14	-2.25	42.89	74.00	-31.11	H	Peak
2818.000	43.00	-1.69	41.31	74.00	-32.69	H	Peak
3349.000	42.45	-0.77	41.68	74.00	-32.32	H	peak
3853.000	42.59	0.97	43.56	74.00	-30.44	H	peak
4447.000	41.68	3.16	44.84	74.00	-29.16	H	peak

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 3MHz, Sweep time = auto.
 - b. AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 330Hz, Sweep time = auto.
5. Frequency (MHz) = Emission frequency in MHz
 Reading (dBuV/m) = Uncorrected Analyzer / Receiver Reading
 Correction Factor (dB) = Antenna factor + Cable loss – Amplifier gain
 Limit (dBuV/m) = Limit stated in standard
 Margin (dB) = Result (dBuV/m) - Limit (dBuV/m)
 Pk = Peak Reading
 AV = Average Reading
 Remark = Mark Peak Reading or Average Reading

-

**8DPSK****Test Mode:** TX(CH Low)**Tested by:** Sam Zeng**Ambient temperature:** 24°C **Relative humidity:** 52% RH **Date:** December 19, 2016

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1504.000	47.82	-6.87	40.95	74.00	-33.05	V	peak
1792.000	46.71	-6.29	40.42	74.00	-33.58	V	peak
1990.000	51.30	-5.06	46.24	74.00	-27.76	V	peak
2503.000	44.63	-2.25	42.38	74.00	-31.62	V	peak
2818.000	43.75	-1.69	42.06	74.00	-31.94	V	peak
3232.000	42.82	-0.97	41.85	74.00	-32.15	V	peak
1162.000	48.48	-7.94	40.54	74.00	-33.46	H	Peak
1999.000	46.54	-5.01	41.53	74.00	-32.47	H	Peak
2548.000	46.29	-2.17	44.12	74.00	-29.88	H	Peak
3124.000	43.76	-1.15	42.61	74.00	-31.39	H	peak
3601.000	42.39	-0.09	42.30	74.00	-31.70	H	peak
4150.000	41.56	2.12	43.68	74.00	-30.32	H	peak

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 3MHz, Sweep time = auto.
 - b. AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 330Hz, Sweep time = auto.
5. Frequency (MHz) = Emission frequency in MHz
 Reading (dBuV/m) = Uncorrected Analyzer / Receiver Reading
 Correction Factor (dB) = Antenna factor + Cable loss – Amplifier gain
 Limit (dBuV/m) = Limit stated in standard
 Margin (dB) = Result (dBuV/m) - Limit (dBuV/m)
 Pk = Peak Reading
 AV = Average Reading
 Remark = Mark Peak Reading or Average Reading

Test Mode: TX(CH Mid)Tested by: Sam ZengAmbient temperature: 24°C Relative humidity: 52% RH Date: December 19, 2016

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1324.000	47.62	-7.34	40.28	74.00	-33.72	V	peak
1495.000	47.03	-6.89	40.14	74.00	-33.86	V	peak
1999.000	48.80	-5.01	43.79	74.00	-30.21	V	peak
2539.000	44.94	-2.19	42.75	74.00	-31.25	V	peak
2809.000	43.94	-1.70	42.24	74.00	-31.76	V	peak
3106.000	43.70	-1.18	42.52	74.00	-31.48	V	peak
1243.000	49.23	-7.63	41.60	74.00	-32.40	H	Peak
1999.000	46.30	-5.01	41.29	74.00	-32.71	H	Peak
2539.000	45.74	-2.19	43.55	74.00	-30.45	H	Peak
2818.000	43.75	-1.69	42.06	74.00	-31.94	H	peak
3070.000	42.79	-1.24	41.55	74.00	-32.45	H	peak
3628.000	42.89	0.02	42.91	74.00	-31.09	H	peak

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 3MHz, Sweep time = auto.
 - b. AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 330Hz, Sweep time = auto.
5. Frequency (MHz) = Emission frequency in MHz
 Reading (dBuV/m) = Uncorrected Analyzer / Receiver Reading
 Correction Factor (dB) = Antenna factor + Cable loss – Amplifier gain
 Limit (dBuV/m) = Limit stated in standard
 Margin (dB) = Result (dBuV/m) - Limit (dBuV/m)
 Pk = Peak Reading
 AV = Average Reading
 Remark = Mark Peak Reading or Average Reading

Test Mode: TX(CH High)Tested by: Sam ZengAmbient temperature: 24°C Relative humidity: 52% RH Date: December 19, 2016

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1162.000	49.57	-7.94	41.63	74.00	-32.37	V	peak
1504.000	48.45	-6.87	41.58	74.00	-32.42	V	peak
1999.000	49.40	-5.01	44.39	74.00	-29.61	V	peak
2494.000	45.29	-2.29	43.00	74.00	-31.00	V	peak
2908.000	43.21	-1.53	41.68	74.00	-32.32	V	peak
3934.000	42.82	1.31	44.13	74.00	-29.87	V	peak
1495.000	47.98	-6.89	41.09	74.00	-32.91	H	Peak
1945.000	46.91	-5.35	41.56	74.00	-32.44	H	Peak
2521.000	45.49	-2.22	43.27	74.00	-30.73	H	Peak
3097.000	43.36	-1.20	42.16	74.00	-31.84	H	peak
3367.000	42.96	-0.74	42.22	74.00	-31.78	H	peak
3763.000	42.99	0.59	43.58	74.00	-30.42	H	peak

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 3MHz, Sweep time = auto.
 - b. AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 330Hz, Sweep time = auto.
5. Frequency (MHz) = Emission frequency in MHz
 Reading (dBuV/m) = Uncorrected Analyzer / Receiver Reading
 Correction Factor (dB) = Antenna factor + Cable loss – Amplifier gain
 Limit (dBuV/m) = Limit stated in standard
 Margin (dB) = Result (dBuV/m) - Limit (dBuV/m)
 Pk = Peak Reading
 AV = Average Reading
 Remark = Mark Peak Reading or Average Reading



6.10 POWERLINE CONDUCTED EMISSIONS

LIMIT

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.


MEASUREMENT EQUIPMENT USED

Conducted Emission Test Site					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100783	02/21/2016	02/20/2017
LISN(EUT)	ROHDE&SCHWARZ	ENV216	101543-WX	02/21/2016	02/20/2017
LISN	EMCO	3825/2	8901-1459	02/21/2016	02/20/2017
Temp. / Humidity Meter	VICTOR	HTC-1	N/A	02/21/2016	02/20/2017
Test S/W	FARAD	EZ-EMC/ CCS-3A1-CE			

Remark: Each piece of equipment is scheduled for calibration once a year.



Test Configuration

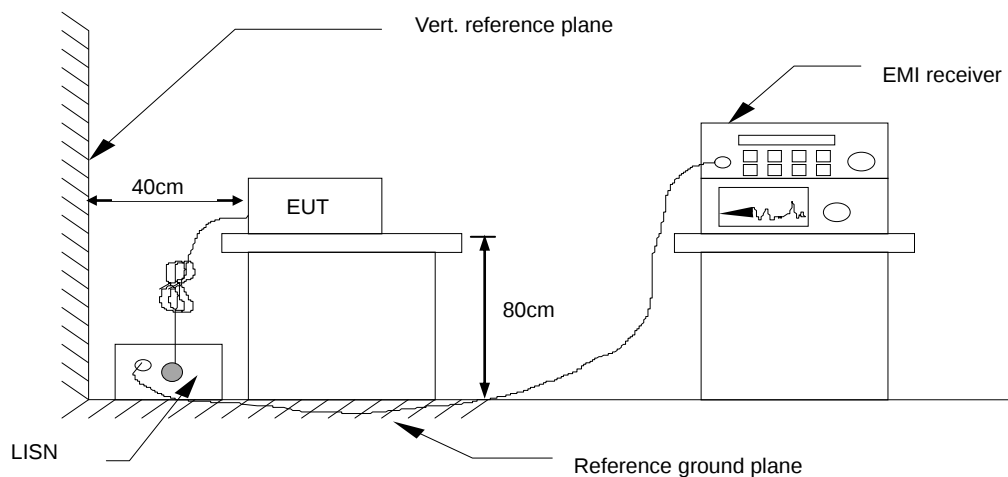

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

TEST PROCEDURE


1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.

TEST RESULTS

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

**Test Data**

Model No.	RT-4603	RBW,VBW	9 kHz
Environmental Conditions	22°C, 45% RH	Test Mode	Mode 1
Tested by	Eason Nie	Line	L1
Test Date	December 22, 2016	Test Voltage	120Vac/60Hz

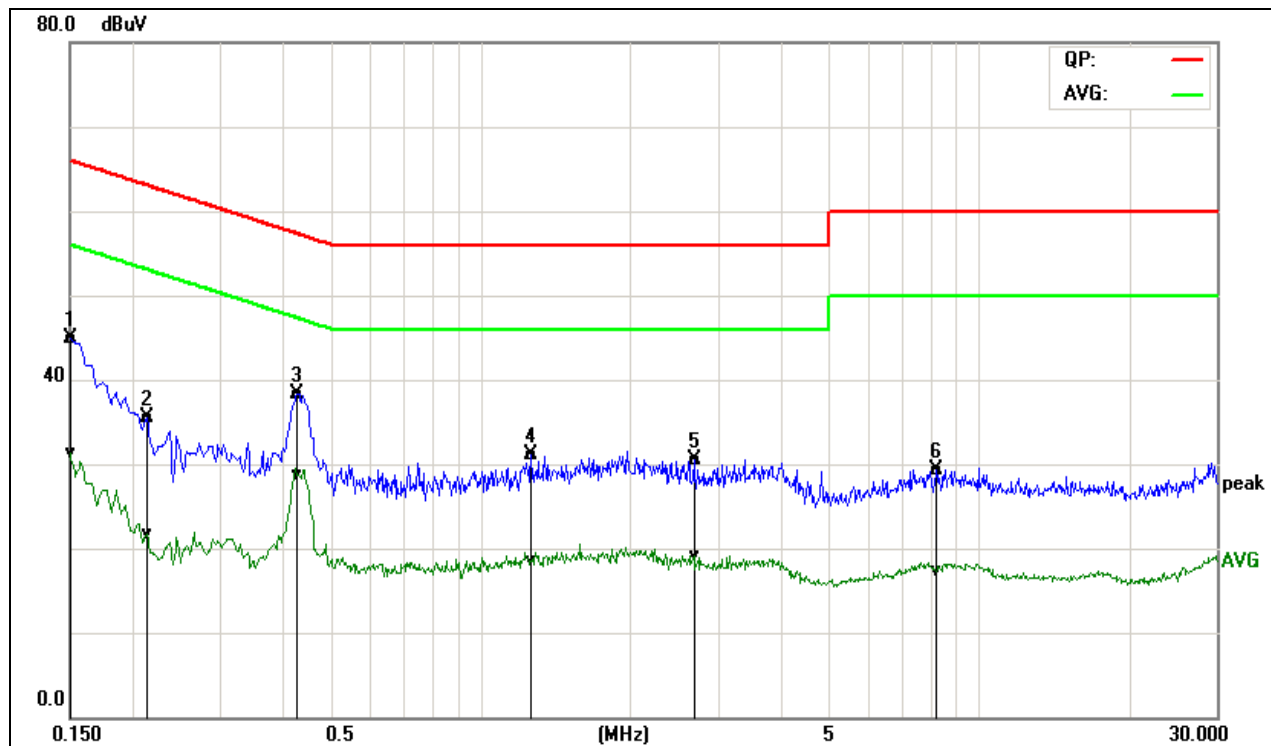


Frequency (MHz)	QuasiPeak Reading (dBuV)	Average Reading (dBuV)	Correction Factor (dB)	QuasiPeak Result (dBuV)	Average Result (dBuV)	QuasiPeak Limit (dBuV)	Average Limit (dBuV)	QuasiPeak Margin (dB)	Average Margin (dB)	Remark (Pass/Fail)
0.1500	25.40	11.77	19.52	44.92	31.29	65.99	56.00	-21.07	-24.71	Pass
0.2140	15.86	2.09	19.64	35.50	21.73	63.04	53.05	-27.54	-31.32	Pass
0.4300	18.68	9.14	19.63	38.31	28.77	57.25	47.25	-18.94	-18.48	Pass
1.2660	11.48	-1.21	19.67	31.15	18.46	56.00	46.00	-24.85	-27.54	Pass
2.6900	10.89	-0.64	19.70	30.59	19.06	56.00	46.00	-25.41	-26.94	Pass
8.2100	9.44	-2.59	19.90	29.34	17.31	60.00	50.00	-30.66	-32.69	Pass

REMARKS: L1 = Line One (Live Line)



Model No.	RT-4603	RBW,VBW	9 kHz
Environmental Conditions	22°C, 45% RH	Test Mode	Mode 1
Tested by	Eason Nie	Line	L2
Test Date	December 22, 2016	Test Voltage	120Vac/60Hz

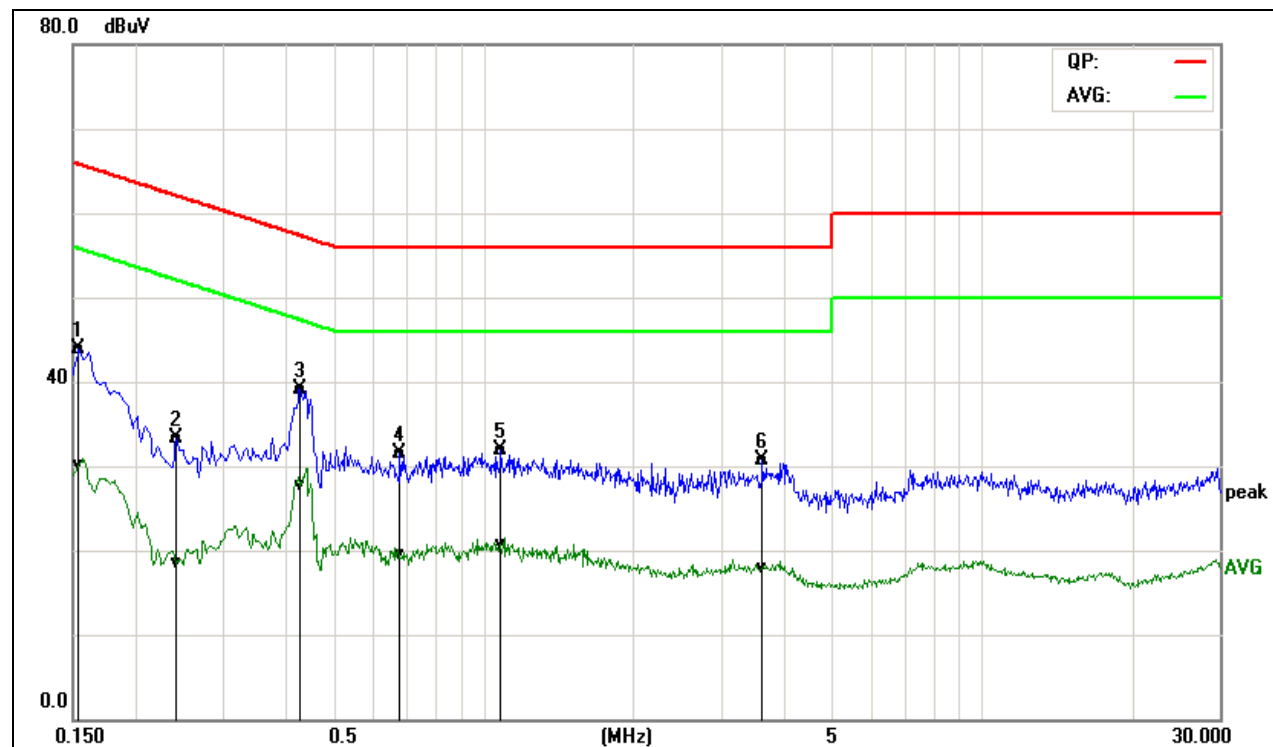


Frequency (MHz)	QuasiPeak Reading (dBuV)	Average Reading (dBuV)	Correction Factor (dB)	QuasiPeak Result (dBuV)	Average Result (dBuV)	QuasiPeak Limit (dBuV)	Average Limit (dBuV)	QuasiPeak Margin (dB)	Average Margin (dB)	Remark (Pass/Fail)
0.1539	24.20	10.33	19.72	43.92	30.05	65.78	55.79	-21.86	-25.74	Pass
0.2420	13.54	-1.15	19.73	33.27	18.58	62.02	52.03	-28.75	-33.45	Pass
0.4300	19.45	8.08	19.65	39.10	27.73	57.25	47.25	-18.15	-19.52	Pass
0.6820	11.72	-0.29	19.70	31.42	19.41	56.00	46.00	-24.58	-26.59	Pass
1.0859	12.09	0.88	19.75	31.84	20.63	56.00	46.00	-24.16	-25.37	Pass
3.6340	11.03	-1.82	19.73	30.76	17.91	56.00	46.00	-25.24	-28.09	Pass

REMARKS: L2 = Line Two (Neutral Line)



Model No.	RT-4603	RBW,VBW	9 kHz
Environmental Conditions	22°C, 45% RH	Test Mode	Mode 1
Tested by	Eason Nie	Line	L1
Test Date	December 22, 2016	Test Voltage	240Vac/50Hz

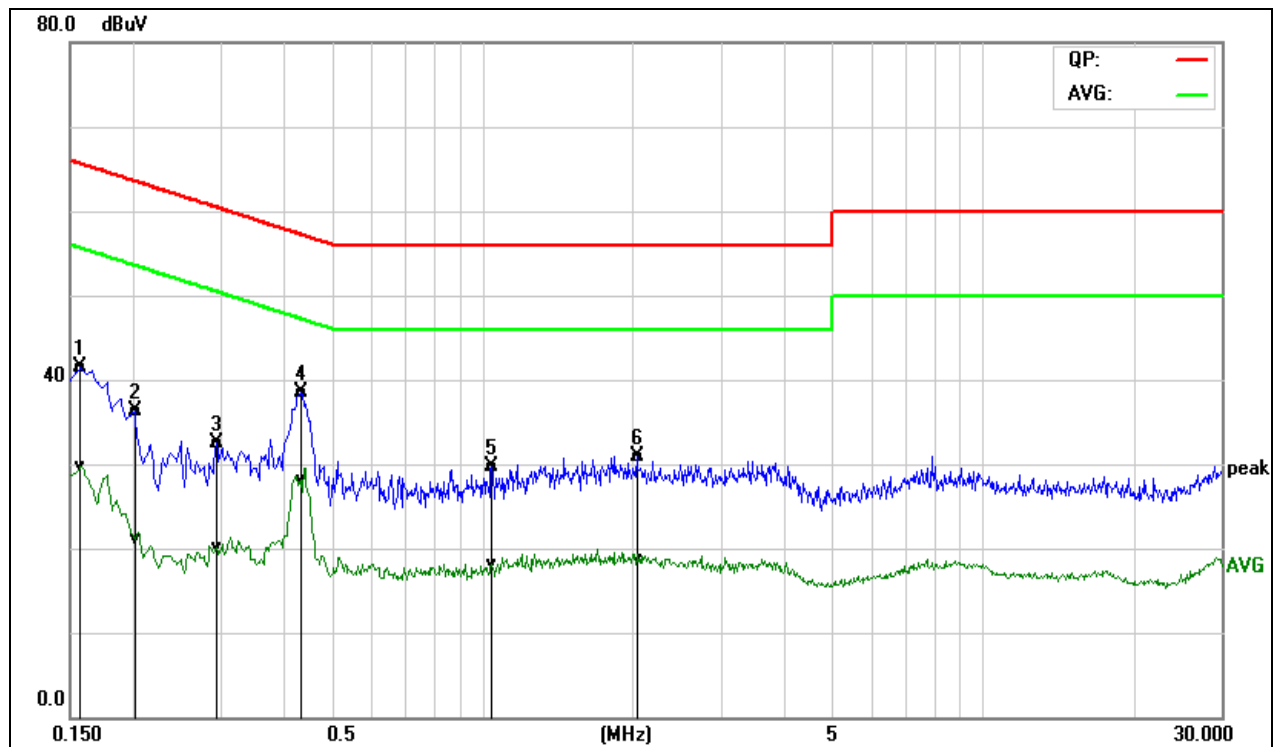


Frequency (MHz)	QuasiPeak Reading (dBuV)	Average Reading (dBuV)	Correction Factor (dB)	QuasiPeak Result (dBuV)	Average Result (dBuV)	QuasiPeak Limit (dBuV)	Average Limit (dBuV)	QuasiPeak Margin (dB)	Average Margin (dB)	Remark (Pass/Fail)
0.1580	21.93	10.24	19.54	41.47	29.78	65.56	55.57	-24.09	-25.79	Pass
0.2020	16.66	1.54	19.64	36.30	21.18	63.52	53.53	-27.22	-32.35	Pass
0.2940	12.82	0.41	19.64	32.46	20.05	60.41	50.41	-27.95	-30.36	Pass
0.4340	18.80	8.43	19.63	38.43	28.06	57.18	47.18	-18.75	-19.12	Pass
1.0460	10.06	-1.54	19.65	29.71	18.11	56.00	46.00	-26.29	-27.89	Pass
2.0420	11.18	-1.03	19.72	30.90	18.69	56.00	46.00	-25.10	-27.31	Pass

REMARKS: L1 = Line One (Live Line)



Model No.	RT-4603	RBW,VBW	9 kHz
Environmental Conditions	22°C, 45% RH	Test Mode	Mode 1
Tested by	Eason Nie	Line	L2
Test Date	December 22, 2016	Test Voltage	240Vac/50Hz

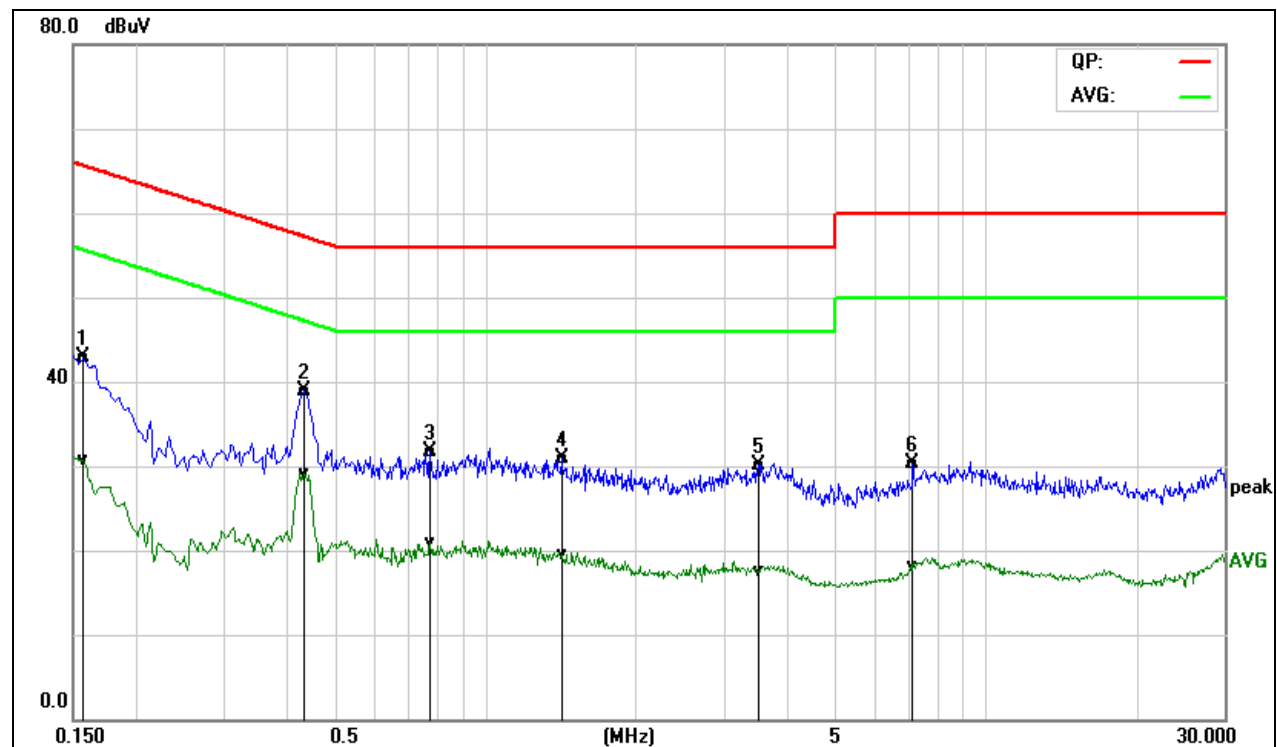

Frequency (MHz)	QuasiPeak Reading (dBuV)	Average Reading (dBuV)	Correction Factor (dB)	QuasiPeak Result (dBuV)	Average Result (dBuV)	QuasiPeak Limit (dBuV)	Average Limit (dBuV)	QuasiPeak Margin (dB)	Average Margin (dB)	Remark (Pass/Fail)
0.1580	23.12	10.90	19.72	42.84	30.62	65.56	55.57	-22.72	-24.95	Pass
0.4340	19.32	9.52	19.65	38.97	29.17	57.18	47.18	-18.21	-18.01	Pass
0.7780	12.07	1.13	19.72	31.79	20.85	56.00	46.00	-24.21	-25.15	Pass
1.4220	11.15	-0.26	19.74	30.89	19.48	56.00	46.00	-25.11	-26.52	Pass
3.5140	10.35	-2.14	19.72	30.07	17.58	56.00	46.00	-25.93	-28.42	Pass
7.1540	10.59	-1.64	19.75	30.34	18.11	60.00	50.00	-29.66	-31.89	Pass

REMARKS: L2 = Line Two (Neutral Line)