



FCC PART 15.247
TEST REPORT
For

SKYTEX TECHNOLOGY INC.
1900 Proforma Ave., #F-1, Ontario, CA91761

FCC ID: G4O-SP728

Model Number: SP728

This Report Concerns: Original Report		Equipment Type: MID	
Test Engineer:	Simon		
Report No.:	TMC14030601		
Receive EUT Date/Test Date:	March 01, 2014/ March 01 - March 06, 2014		
Reviewed By:	 Michal ling		
Prepared By:	Shenzhen WST Testing Technology Co., Ltd. 1F, No.9 Building, TKG Science & Technology Park, Shenzhen Tel: 86-755-33916437 Fax: 86-755-27822175		

TABLE OF CONTENTS

1.	GENERAL INFORMATION	4
1.1.	Report information	4
1.2.	Measurement Uncertainty	4
2.	PRODUCT DESCRIPTION	5
2.1.	EUT Description	5
2.2.	Block Diagram of EUT Configuration.....	6
2.3.	Support Equipment List	6
2.4.	Test Conditions	6
3.	TEST RESULTS SUMMARY	7
	Modifications	7
4.	TEST EQUIPMENT USED	8
5.	§15.203 - ANTENNA REQUIREMENT	9
5.1.	Standard Applicable.....	9
5.2.	Antenna Connector Construction.....	9
6.	§15.207 - CONDUCTED EMISSIONS.....	10
6.1.	Applicable Standard.....	10
6.2.	Test Procedure	10
6.3.	Conducted Power line Emission Limits.....	10
6.4.	Block Diagram of Test Setup.....	10
6.5.	Conducted Power Line Test Result.....	11
7.	§15.209, §15.205, §15.247(D) - SPURIOUS EMISSIONS	13
7.1.	Test Equipment	13
7.2.	Test Procedure	13
7.3.	Radiated Test Setup	13
7.4.	Radiated Emission Limit.....	15
7.5.	Radiated Emission Test Result	16
7.6.	Conducted Emission Method.....	25
7.7.	Test Requirement:	25
7.8.	Limit:.....	25
7.9.	Test Setup.....	25
7.10.	Test Result	25
8.	§15.247(A) (2) – 6DB BANDWIDTH TESTING.....	31
8.1.	Test Equipment	31
8.2.	Test Procedure	31
8.3.	Applicable Standard.....	31
8.4.	Test Result:Pass.	31
9.	§15.247(B) (3) - MAXIMUM PEAK OUTPUT POWER.....	37
9.1.	Test Equipment	37
9.2.	Test Procedure	37
9.3.	Applicable Standard.....	37
9.4.	Test Result	38
10.	§15.247(D) – 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE	39

10.1.	Test Equipment	39
10.2.	Test Procedure	39
10.3.	Applicable Standard.....	39
10.4.	Test Result	39
11.	§15.247(E) - POWER SPECTRAL DENSITY	44
11.1.	Test Equipment	44
11.2.	Test Procedure	44
11.3.	Applicable Standard.....	44
11.4.	Test Result	44

1. GENERAL INFORMATION

1.1. Report information

- 1.1.1. This report is not a certificate of quality; it only applies to the sample of the specific product/equipment given at the time of its testing. The results are not used to indicate or imply that they are application to the similar items. In addition, such results must not be used to indicate or imply that **WST** approves recommends or endorses the manufacture, supplier or use of such product/equipment, or that **WST** in any way guarantees the later performance of the product/equipment.
- 1.1.2. The sample/s mentioned in this report is/are supplied by Applicant, **WST** therefore assumes no responsibility for the accuracy of information on the brand name, model number, origin of manufacture or any information supplied.
- 1.1.3. Additional copies of the report are available to the Applicant at an additional fee. No third part can obtain a copy of this report through **WST**, unless the applicant has authorized **WST** in writing to do so.

Test Facility -

The test site used to collect the radiated data is located on the address of

Shenzhen WST Testing Technology Co., Ltd.

(FCC Registered Test Site Number: 939433) on

1F, No.9 Building, TGK Science & Technology Park, Shenzhen, China

The Test Site is constructed and calibrated to meet the FCC requirements.

1.2. Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	+/-1.26dB
2	RF Power, Conducted	+/-0.21dB
3	Spurious emissions, conducted	+/-0.34dB
4	All emissions, radiated (<1G)	+/-3.42dB
5	All emissions, radiated (>1G)	+/-3.72dB
6	Temperature	+/-0.5°CdB
7	Humidity	+/-2%

2. PRODUCT DESCRIPTION

2.1. EUT Description

Applicant	:	SKYTEX TECHNOLOGY INC.
Address	:	1900 Proforma Ave., #F-1, Ontario, CA91761
Manufacturer	:	NEXGEN GLOBAL LIMITED
Address	:	FLAT/RM 2001 20/F CHINACHEM JOHNSTON PLAZA 186 JOHNSTON ROAD HK
EUT Description	:	MID
Trade Name	:	
Modulation	:	802.11b: DSSS(11/5.5/2/1Mbps) 802.11g: OFDM(54/48/36/24/18/12/9/6Mbps) 802.11n(20MHz): OFDM (up to 65 Mbps)
Wi-fi Frequency Band	:	IEEE 802.11b/g/n: 2412-2462MHz
Number of Channels	:	IEEE 802.11b/g/n: 11 Channels
Model Number	:	SP728
Power Supply	:	Transmitting:built-in DC 3.7V battery (The fully charged battery is used during the measurement) , charging: DC 5V By Adapter
Antenna gain	:	0dBi
Antenna type	:	PIFA

2.2. Block Diagram of EUT Configuration



Figure 1 EUT Setup

2.3. Support Equipment List

Table 2 Ancillary Equipment

Name	FCC VOC (Y/N)	Model No	S/N	Manufacturer	Used (Y/N)
Adapter	Y	CYSK05-0501 00	N/A	Yu Long	Y

2.4. Test Conditions

Temperature: 23~25℃
Relative Humidity: 50~63 %

After the preliminary test, we found to emit the worst emissions and therefore had been tested under operating condition.

IEEE 802.11b:

Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 1Mbps data rate were chosen for full testing.

IEEE 802.11g:

Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 6Mbps data rate were chosen for full testing.

IEEE 802.11n HT20:

Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 6.5Mbps data rate were chosen for full testing.

3. TEST RESULTS SUMMARY

FCC 15 Subpart C, Paragraph 15.247

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliance
§15.207 (a)	AC Line Conducted Emissions	Compliance
§15.247(d)	Spurious Emissions at Antenna Port	Compliance
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliance
§15.247 (a)(2)	6 dB Emission Bandwidth	Compliance
§15.247(b)(3)	Maximum Peak Output Power	Compliance
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliance
§15.247(e)	Power Spectral Density	Compliance

Modifications

No modification was made.

4. TEST EQUIPMENT USED

EQUIPMENT/FACILITIES	MANUFACTURER	MODEL	SERIAL NO.	DATE OF CAL.	CAL. INTERVAL
3m Semi-Anechoic Chamber	Chengyu Electron	9 (L)*6 (W)* 6 (H)	BSL086	Aug. 23 2013	1 Year
EMI Test Receiver	Rohde & Schwarz	ESCI3	BSL001	Sep. 28 2013	1 Year
BiConiLog Antenna	Rohde & Schwarz	HL562	BSL009	Sep. 28 2013	1 Year
Double -ridged waveguide horn	Rohde & Schwarz	9120D	BSL008	Aug. 27 2013	1 Year
Horn Antenna	ETS-LINDGREN	3160	BSL072	Dec. 28 2013	1 Year
Cable	Rohde & Schwarz	N/A	BSL045	Aug. 27 2013	1 Year
Cable	Rohde & Schwarz	N/A	BSL046	Aug. 27 2013	1 Year
Cable	Rohde & Schwarz	N/A	BSL047	Aug. 27 2013	1 Year
Amplifier(100kHz-40G Hz)	R&S	SMR40	BSL007	Sep. 28 2013	1 Year
Band filter	Amindeon	82346	BSL049	Aug. 27 2013	1 Year
Active Loop Antenna	EMTES	EM15	BSL011	Sep. 28 2013	1 Year
Coaxial Switch	YUANFANG	TA218B	BSL004	Aug. 27 2013	1 Year
Spectrum analyzer	Rohde & Schwarz	FSP40	BSL049	Sep. 28 2013	1 Year
Shielding Room	zhongyu Electron	7.0(L)x3.0(W)x3.0(H)	BSL085	Sep. 28 2013	1 Year
EMI Test Receiver	R&S	ESPI	BSL002	Sep. 28 2013	1 Year
10dB Pulse Limita	R&S	N/A	BSL003	Sep. 28 2013	1 Year
Coaxial Switch	YUANFANG	TA218B	BSL004	Aug. 27 2013	1 Year
LISN	Rohde & Schwarz	ESH3-Y5	BSL005	Sep. 28 2013	1 Year
Coaxial Cable	YUANFANG	N/A	BSL048	Aug. 27 2013	1 Year
EMI TEST SOFTWARE	AUDIX	E3	N/A	N/A	N/A
Power Meter	R&S	NRVS	GTS216	Apr. 6, 2013	1 Year
Power Sensor	R&S	NRV-Z33	GTS220	Apr. 6, 2013	1 Year

5. §15.203 - ANTENNA REQUIREMENT

5.1. Standard Applicable

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

5.2. Antenna Connector Construction

The antenna used for this product is a built-in PIFA. The antenna is permanently attached. Refer to the product photo.

5.3. Result

Compliance

6. §15.207 - CONDUCTED EMISSIONS

6.1. Applicable Standard

The specification used was with the FCC Part 15.207 limits.

6.2. Test Procedure


During the conducted emission test, the EUT was connected to the outlet of the LISN. Maximizing procedure was performed on the six (6) highest emissions of the EUT. All data was recorded in the Quasi-peak and average detection mode.

6.3. Conducted Power line Emission Limits

FCC Part 15 Paragraph 15.207 (dBuV)		
Frequency Range (MHz)	Class A QP/AV	Class B QP/AV
0.15-0.5	79/66	65-56/56-46
0.5-5.0	73/60	56-46
5.0-3.0	73/60	60-50

Note: In the above table, the tighter limit applies at the band edges.


6.4. Block Diagram of Test Setup

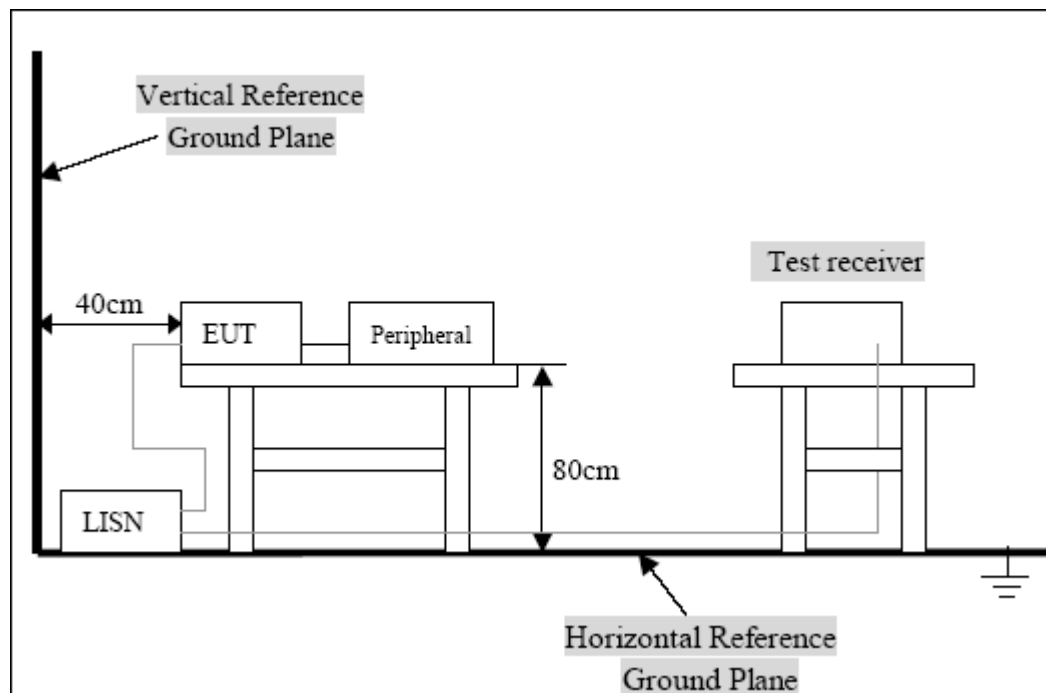

6.5. Conducted Power Line Test Result

Pass.

Link Mode

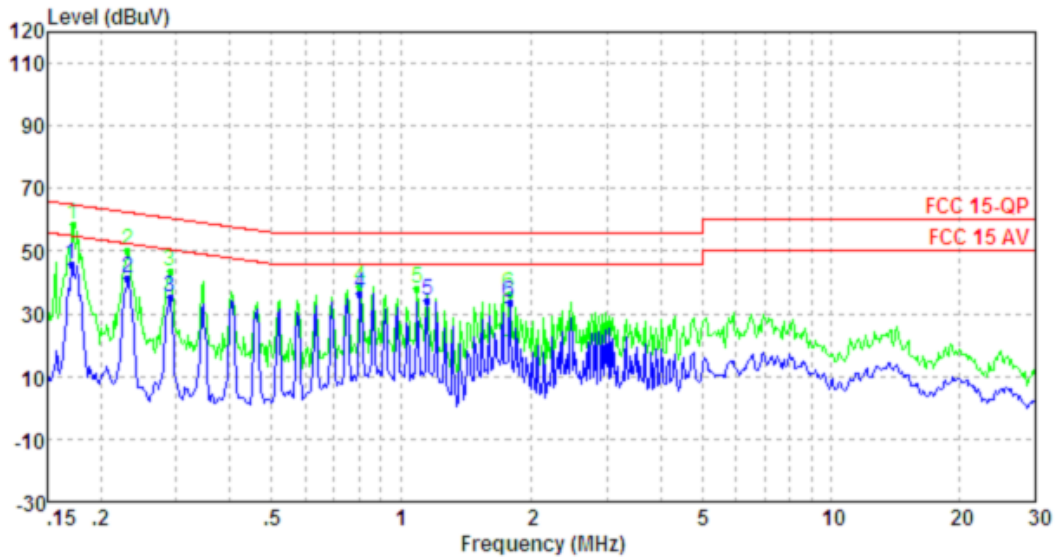

Condition:


: RBW:9.000KHz VBW:30.000KHz

	Freq	Level	Limit	Over	Remark	Pol/Phase
	MHz	dBuV	Line	Limit	dB	
1 Max	0.17	45.91	54.94	-9.03	Average	LINE
2	0.23	41.35	52.44	-11.09	Average	LINE
3	0.29	35.41	50.54	-15.13	Average	LINE
4	0.80	36.33	46.00	-9.67	Average	LINE
5	1.15	34.46	46.00	-11.54	Average	LINE
6	1.78	33.38	46.00	-12.62	Average	LINE

Condition:

: RBW:9.000KHz VBW:30.000KHz

	Freq	Level	Limit	Over	Remark	Pol/Phase
	MHz	dBuV	Line	Limit	dB	
1 Max	0.17	58.50	64.86	-6.36	QP	LINE
2	0.23	50.11	62.44	-12.33	QP	LINE
3	0.29	43.61	60.54	-16.93	QP	LINE
4	0.80	38.80	56.00	-17.20	QP	LINE
5	1.09	37.89	56.00	-18.11	QP	LINE
6	1.78	36.53	56.00	-19.47	QP	LINE

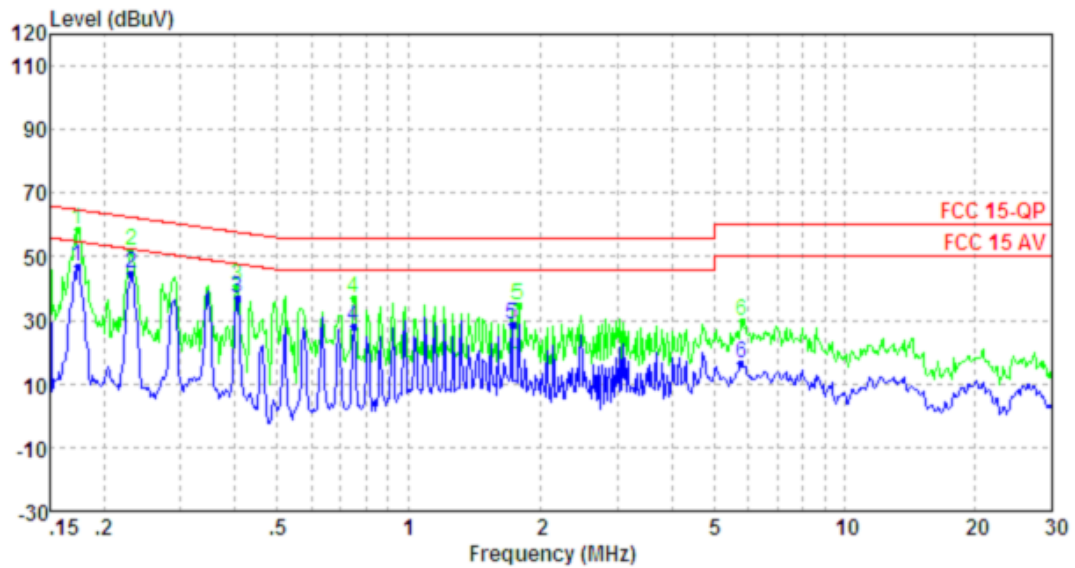

Condition:

: RBW:9.000KHz VBW:30.000KHz

	Freq	Level	Limit	Over	Remark	Pol/Phase
	MHz	dBuV	dBuV	dB		
1 Max	0.17	46.95	54.77	-7.82	Average	NEUTRAL
2	0.23	44.51	52.44	-7.93	Average	NEUTRAL
3	0.41	37.16	47.73	-10.57	Average	NEUTRAL
4	0.75	28.14	46.00	-17.86	Average	NEUTRAL
5	1.73	28.90	46.00	-17.10	Average	NEUTRAL
6	5.77	16.26	50.00	-33.74	Average	NEUTRAL

Condition:

: RBW:9.000KHz VBW:30.000KHz

	Freq	Level	Limit	Over	Remark	Pol/Phase
	MHz	dBuV	dBuV	dB		
1 Max	0.17	58.37	64.77	-6.40	QP	NEUTRAL
2	0.23	52.07	62.44	-10.37	QP	NEUTRAL
3	0.40	40.79	57.77	-16.98	QP	NEUTRAL
4	0.75	36.83	56.00	-19.17	QP	NEUTRAL
5	1.78	34.77	56.00	-21.23	QP	NEUTRAL
6	5.80	29.56	60.00	-30.44	QP	NEUTRAL

7. §15.209, §15.205, §15.247(D) - Spurious Emissions

7.1. Test Equipment

Please refer to section 5 this report.

7.2. Test Procedure

The EUT and its simulators are placed on a turntable, which is 0.8 meter high above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level.

Calibrated Loop antenna is used as receiving antenna for frequencies below 30MHz, Calibrated Bilog antenna is used as receiving antenna for frequencies between 30 MHz and 1 GHz, Calibrated Horn antenna is used as receiving antenna for frequencies above 1000MHz. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.4: 2003 on radiated emission measurement.

The bandwidth of test receiver is set at 9kHz in below 30MHz. and set at 120kHz in 30-1000MHz, and 1MHz in above 1000MHz.


The frequency range from 9kHz to 25GHz is checked.

The final measurement in band 9-90kHz, 110-490kHz and above 1000MHz is performed with Peak detector and Average detector. Except those frequency bands mention above, the final measurement for frequencies below 1000MHz is performed with Quasi Peak detector.

Through three orthogonal axes to determine which attitude and equipment arrangement produces the highest emission relative to the limit. And X direction is worst mode

7.3. Radiated Test Setup

(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

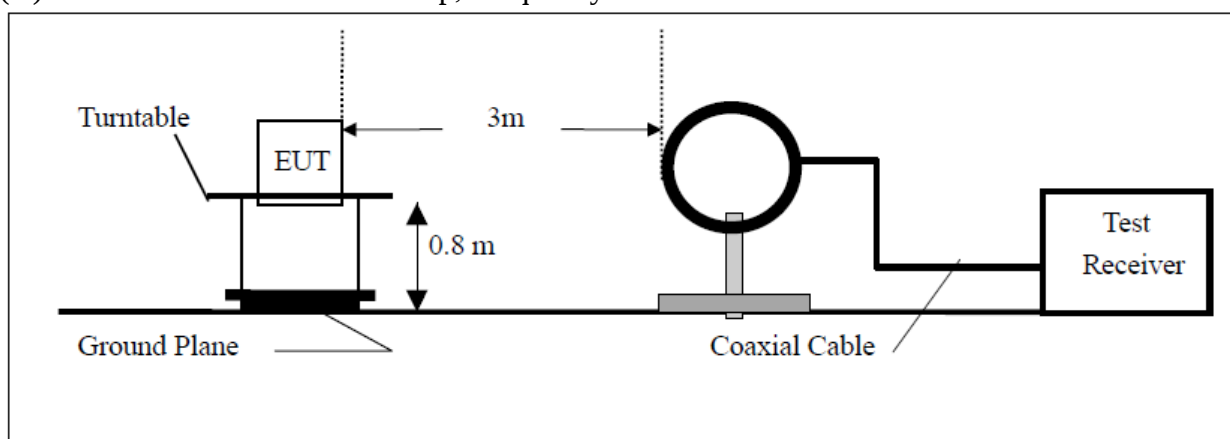

(B) Radiated Emission Test Set-Up, Frequency Below 1000MHz

7.4. Radiated Emission Limit

Frequency (MHz)	Limit			The final measurement in band 9-90kHz, 110-490kHz and above 1000MHz is performed with Average detector. Except those frequency bands mention above, the final measurement for frequencies below 1000MHz is performed with Quasi Peak detector.
	Field Strength of Quasi-peak Value (microvolts/m)	Field Strength of Quasi-peak Value (dB μ V/m)	Measurement distance (m)	
0.009 - 0.490	2400/F(kHz)	/	300	
0.490 - 1.705	24000/F(kHz)	/	30	
1.705-30	30	29.5	30	
30 - 88	100	40	3	
88 - 216	150	43.5	3	
216 - 960	200	46	3	
Above 960	500	54	3	

Note: (1) RF Voltage (dBuV)=20 log Voltage(uV)

(2) In the Above Table,the tighter limit applies at the band edges.

(3) Distancce refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

7.5. Radiated Emission Test Result

According to the data below, the FCC Part 15.205, 15.209 and 15.247 standards, and had the worst margin of:

-4.98 dB at 7236MHz in the Horizon polarization, with 9KHz to 25 GHz, 3Meters Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.

From 9KHz to 30MHz: Conclusion: PASS

Note: The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

For below 9kHz-30MHz Spurious

Freq. (MHz)	Emission(dBuV/m) PK / AV	Limits(dBuV/m) PK / AV	Margin (dB)
-	-	-	-
-	-	-	-


Note:


1. Emissions attenuated more than 20 dB below the permissible value are not reported.

For 30M-1000MHz Spurious

The worst test mode: WiFi Tx 802.11b 2412MHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

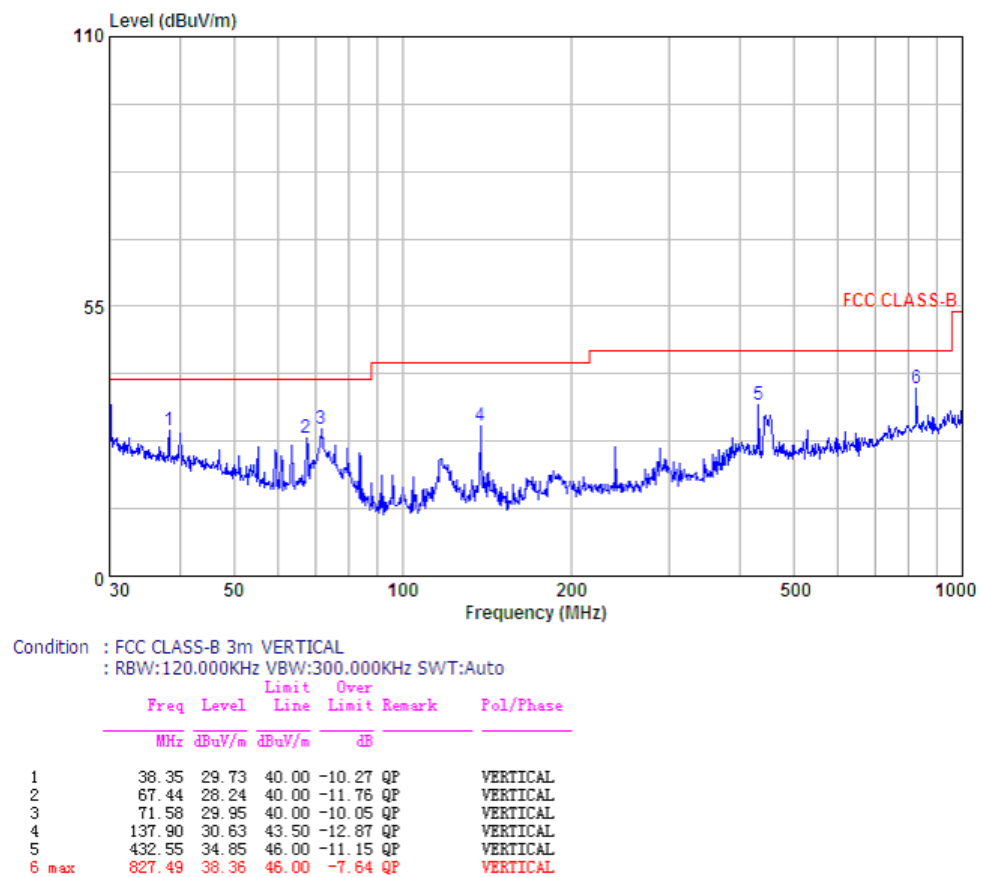

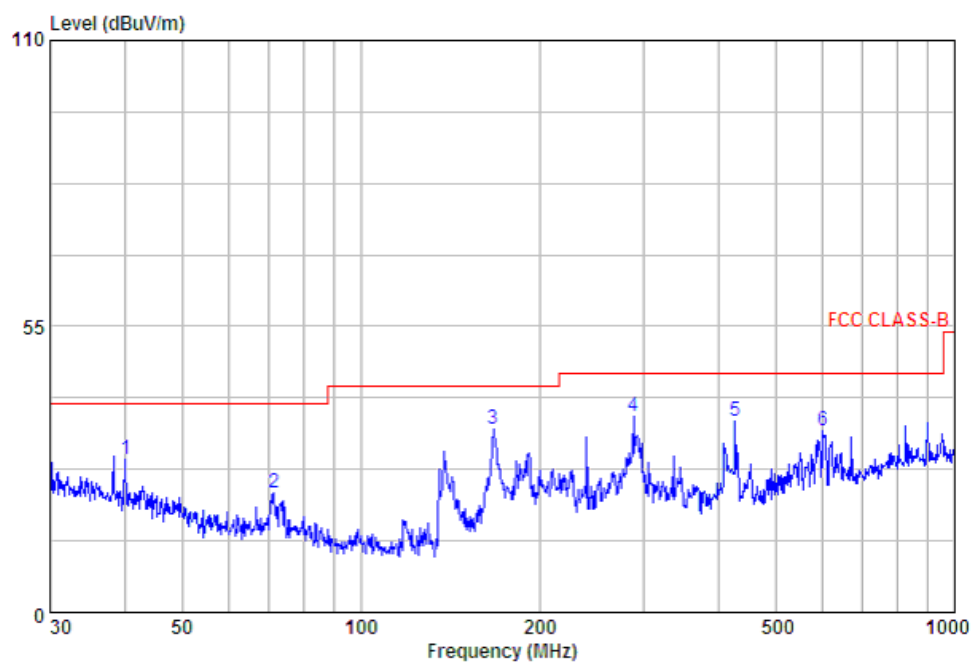

Condition : FCC CLASS-B 3m HORIZONTAL
 : RBW:120.000KHz VBW:300.000KHz SWT:Auto

	Freq	Level	Limit	Over	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB		
1	40.13	29.27	40.00	-10.73	QP	HORIZONTAL
2	71.33	23.03	40.00	-16.97	QP	HORIZONTAL
3 max	167.24	35.14	43.50	-8.36	QP	HORIZONTAL
4	287.99	37.63	46.00	-8.37	QP	HORIZONTAL
5	426.52	36.85	46.00	-9.15	QP	HORIZONTAL
6	599.32	34.84	46.00	-11.16	QP	HORIZONTAL

For 1000MHz-25000MHz Spurious
Test mode 802.11b

Frequency MHz	Detector	Meter Reading dBuV	Polar H / V	Antenna Loss dB	Cable loss dB	Amplifier dB	Correction Amplitude dBuV/m	Limit dBuV/m	Margin dB
Low Channel (2412MHz)									
4824	PK	44.42	V	34.1	5.2	33.0	50.72	74.00	-23.28
4824	PK	45.17	H	34.1	5.2	33.0	51.47	74.00	-22.53
7236	PK	49.32	V	37.4	6.1	33.5	59.32	74.00	-14.68
7236	PK	51.84	H	37.4	6.1	33.5	61.84	74.00	-12.16
4824	AV	36.33	V	34.1	5.2	33.0	42.63	54.00	-11.37
4824	AV	37.07	H	34.1	5.2	33.0	43.37	54.00	-10.63
7236	AV	36.26	V	37.4	6.1	33.5	46.26	54.00	-7.74
7236	AV	38.2	H	37.4	6.1	33.5	48.20	54.00	-5.80
2390	PK	46.38	V	30.9	4.1	31.0	50.38	74	-23.62
2390	AV	36.66	V	30.9	4.1	31.0	40.66	54	-13.34
2390	PK	47.68	H	30.9	4.1	31.0	51.68	74	-22.32
2390	AV	37.96	H	30.9	4.1	31.0	41.96	54	-12.04
2483.5	PK	50.22	V	31.4	4.8	31.0	55.42	74	-18.58
2483.5	AV	41.56	V	31.4	4.8	31.0	46.76	54	-7.24
2483.5	PK	51.52	H	31.4	4.8	31.0	56.72	74	-17.28
2483.5	AV	42.86	H	31.4	4.8	31.0	48.06	54	-5.94
Middle Channel (2437MHz)									
4874	PK	43.96	V	34.1	5.2	33.0	50.26	74.00	-23.74
4874	PK	44.17	H	34.1	5.2	33.0	50.47	74.00	-23.53
7311	PK	49.56	V	37.4	6.1	33.5	59.56	74.00	-14.44
7311	PK	51.25	H	37.4	6.1	33.5	61.25	74.00	-12.75
4874	AV	36.33	V	34.1	5.2	33.0	42.63	54.00	-11.37
4874	AV	36.75	H	34.1	5.2	33.0	43.05	54.00	-10.95
7311	AV	35.26	V	37.4	6.1	33.5	45.26	54.00	-8.74
7311	AV	37.75	H	37.4	6.1	33.5	47.75	54.00	-6.25

Frequency MHz	Detector	Meter Reading dBuV	Polar H / V	Antenna Loss dB	Cable loss dB	Amplifier dB	Correction Amplitude dBuV/m	Limit dBuV/m	Margin dB
HighChannel (2462MHz)									
4924	PK	43.6	V	34.1	5.2	33.0	49.90	74.00	-24.10
4924	PK	42.76	H	34.1	5.2	33.0	49.06	74.00	-24.94
7386	PK	39.29	V	37.4	6.1	33.5	49.29	74.00	-24.71
7386	PK	40.01	H	37.4	6.1	33.5	50.01	74.00	-23.99
4924	AV	35.52	V	34.1	5.2	33.0	41.82	54.00	-12.18
4924	AV	35.63	H	34.1	5.2	33.0	41.93	54.00	-12.07
7386	AV	35.28	V	37.4	6.1	33.5	45.28	54.00	-8.72
7386	AV	36.31	H	37.4	6.1	33.5	46.31	54.00	-7.69
2390	PK	45.58	V	30.9	4.1	31.0	49.58	74	-24.42
2390	AV	35.86	V	30.9	4.1	31.0	39.86	54	-14.14
2390	PK	46.88	H	30.9	4.1	31.0	50.88	74	-23.12
2390	AV	37.16	H	30.9	4.1	31.0	41.16	54	-12.84
2483.5	PK	49.42	V	31.4	4.8	31.0	54.62	74	-19.38
2483.5	AV	40.76	V	31.4	4.8	31.0	45.96	54	-8.04
2483.5	PK	50.72	H	31.4	4.8	31.0	55.92	74	-18.08
2483.5	AV	42.06	H	31.4	4.8	31.0	47.26	54	-6.74

Note:

1. The average measurement was not performed when the peak measured data under the limit of average detection.
2. Emissions attenuated more than 20 dB below the permissible value are not reported.

Test mode 802.11g

Frequency MHz	Detector	Meter Reading dBuV	Polar H / V	Antenna Loss dB	Cable loss dB	Amplifier dB	Correction Amplitude dBuV/m	Limit dBuV/m	Margin dB
Low Channel (2412MHz)									
4824	PK	46.16	V	34.1	5.2	33.0	52.46	74.00	-21.54
4824	PK	46.75	H	34.1	5.2	33.0	53.05	74.00	-20.95
7236	PK	45.37	V	37.4	6.1	33.5	55.37	74.00	-18.63
7236	PK	46.25	H	37.4	6.1	33.5	56.25	74.00	-17.75
4824	AV	36.54	V	34.1	5.2	33.0	42.84	54.00	-11.16
4824	AV	36.96	H	34.1	5.2	33.0	43.26	54.00	-10.74
7236	AV	37.53	V	37.4	6.1	33.5	47.53	54.00	-6.47
7236	AV	37.84	H	37.4	6.1	33.5	47.84	54.00	-6.16
2390	PK	46.88	V	30.9	4.1	31.0	50.88	74	-23.12
2390	AV	37.16	V	30.9	4.1	31.0	41.16	54	-12.84
2390	PK	48.18	H	30.9	4.1	31.0	52.18	74	-21.82
2390	AV	38.46	H	30.9	4.1	31.0	42.46	54	-11.54
2483.5	PK	50.72	V	31.4	4.8	31.0	55.92	74	-18.08
2483.5	AV	42.06	V	31.4	4.8	31.0	47.26	54	-6.74
2483.5	PK	52.02	H	31.4	4.8	31.0	57.22	74	-16.78
2483.5	AV	43.36	H	31.4	4.8	31.0	48.56	54	-5.44
Middle Channel (2437MHz)									
4874	PK	46.93	V	34.1	5.2	33.0	53.23	74.00	-20.77
4874	PK	47.52	H	34.1	5.2	33.0	53.82	74.00	-20.18
7311	PK	47.17	V	37.4	6.1	33.5	57.17	74.00	-16.83
7311	PK	48.85	H	37.4	6.1	33.5	58.85	74.00	-15.15
4874	AV	37.17	V	34.1	5.2	33.0	43.47	54.00	-10.53
4874	AV	37.39	H	34.1	5.2	33.0	43.69	54.00	-10.31
7311	AV	36.83	V	37.4	6.1	33.5	46.83	54.00	-7.17
7311	AV	37.39	H	37.4	6.1	33.5	47.39	54.00	-6.61

Frequency MHz	Detector	Meter Reading dBuV	Polar H / V	Antenna Loss dB	Cable loss dB	Amplifier dB	Correction Amplitude dBuV/m	Limit dBuV/m	Margin dB
HighChannel (2462MHz)									
4924	PK	46.64	V	34.1	5.2	33.0	52.94	74.00	-21.06
4924	PK	46.79	H	34.1	5.2	33.0	53.09	74.00	-20.91
7386	PK	49.16	V	37.4	6.1	33.5	59.16	74.00	-14.84
7386	PK	50.03	H	37.4	6.1	33.5	60.03	74.00	-13.97
4924	AV	36.28	V	34.1	5.2	33.0	42.58	54.00	-11.42
4924	AV	37.37	H	34.1	5.2	33.0	43.67	54.00	-10.33
7386	AV	38.52	V	37.4	6.1	33.5	48.52	54.00	-5.48
7386	AV	38.98	H	37.4	6.1	33.5	48.98	54.00	-5.02
2390	PK	44.88	V	30.9	4.1	31.0	48.88	74	-25.12
2390	AV	35.16	V	30.9	4.1	31.0	39.16	54	-14.84
2390	PK	46.18	H	30.9	4.1	31.0	50.18	74	-23.82
2390	AV	36.46	H	30.9	4.1	31.0	40.46	54	-13.54
2483.5	PK	48.72	V	31.4	4.8	31.0	53.92	74	-20.08
2483.5	AV	40.06	V	31.4	4.8	31.0	45.26	54	-8.74
2483.5	PK	50.02	H	31.4	4.8	31.0	55.22	74	-18.78
2483.5	AV	41.36	H	31.4	4.8	31.0	46.56	54	-7.44

Note:

1. The average measurement was not performed when the peak measured data under the limit of average detection.
2. Emissions attenuated more than 20 dB below the permissible value are not reported.

Test mode 802.11n

Frequency MHz	Detector	Meter Reading dBuV	Polar H / V	Antenna Loss dB	Cable loss dB	Amplifier dB	Correction Amplitude dBuV/m	Limit dBuV/m	Margin dB
Low Channel (2412MHz)									
4824	PK	46.43	V	34.1	5.2	33.0	52.73	74.00	-21.27
4824	PK	46.91	H	34.1	5.2	33.0	53.21	74.00	-20.79
7236	PK	49.84	V	37.4	6.1	33.5	59.84	74.00	-14.16
7236	PK	49.9	H	37.4	6.1	33.5	59.90	74.00	-14.1
4824	AV	36.28	V	34.1	5.2	33.0	42.58	54.00	-11.42
4824	AV	37.22	H	34.1	5.2	33.0	43.52	54.00	-10.48
7236	AV	37.22	V	37.4	6.1	33.5	47.22	54.00	-6.78
7236	AV	38.16	H	37.4	6.1	33.5	48.16	54.00	-5.84
2390	PK	47.28	V	30.9	4.1	31.0	51.28	74	-22.72
2390	AV	37.56	V	30.9	4.1	31.0	41.56	54	-12.44
2390	PK	48.58	H	30.9	4.1	31.0	52.58	74	-21.42
2390	AV	38.86	H	30.9	4.1	31.0	42.86	54	-11.14
2483.5	PK	51.12	V	31.4	4.8	31.0	56.32	74	-17.68
2483.5	AV	42.46	V	31.4	4.8	31.0	47.66	54	-6.34
2483.5	PK	52.42	H	31.4	4.8	31.0	57.62	74	-16.38
2483.5	AV	43.76	H	31.4	4.8	31.0	48.96	54	-5.04
Middle Channel (2437MHz)									
4874	PK	43.05	V	34.1	5.2	33.0	49.35	74.00	-24.65
4874	PK	44.17	H	34.1	5.2	33.0	50.47	74.00	-23.53
7311	PK	50.26	V	37.4	6.1	33.5	60.26	74.00	-13.74
7311	PK	51.33	H	37.4	6.1	33.5	61.33	74.00	-12.67
4874	AV	32.73	V	34.1	5.2	33.0	39.03	54.00	-14.97
4874	AV	33.07	H	34.1	5.2	33.0	39.37	54.00	-14.63
7311	AV	35.31	V	37.4	6.1	33.5	45.31	54.00	-8.69
7311	AV	36.23	H	37.4	6.1	33.5	46.23	54.00	-7.77

Note:

1. The average measurement was not performed when the peak measured data under the limit of average detection.
2. Emissions attenuated more than 20 dB below the permissible value are not reported.

Frequency MHz	Detector	Meter Reading dBuV	Polar H / V	Antenna Loss dB	Cable loss dB	Amplifier dB	Correction Amplitude dBuV/m	Limit dBuV/m	Margin dB
HighChannel (2462MHz)									
4924	PK	47	V	34.1	5.2	33.0	53.30	74.00	-20.7
4924	PK	49.91	H	34.1	5.2	33.0	56.21	74.00	-17.79
7386	PK	49.28	V	37.4	6.1	33.5	59.28	74.00	-14.72
7386	PK	50.21	H	37.4	6.1	33.5	60.21	74.00	-13.79
4924	AV	33.33	V	34.1	5.2	33.0	39.63	54.00	-14.37
4924	AV	33.52	H	34.1	5.2	33.0	39.82	54.00	-14.18
7386	AV	37.31	V	37.4	6.1	33.5	47.31	54.00	-6.69
7386	AV	36.24	H	37.4	6.1	33.5	46.24	54.00	-7.76
2390	PK	45.08	V	30.9	4.1	31.0	49.08	74	-24.92
2390	AV	35.36	V	30.9	4.1	31.0	39.36	54	-14.64
2390	PK	46.38	H	30.9	4.1	31.0	50.38	74	-23.62
2390	AV	36.66	H	30.9	4.1	31.0	40.66	54	-13.34
2483.5	PK	48.92	V	31.4	4.8	31.0	54.12	74	-19.88
2483.5	AV	40.26	V	31.4	4.8	31.0	45.46	54	-8.54
2483.5	PK	50.22	H	31.4	4.8	31.0	55.42	74	-18.58
2483.5	AV	41.56	H	31.4	4.8	31.0	46.76	54	-7.24

7.6. Conducted Emission Method

Please refer to section 5 this report.


7.7. Test Requirement:

FCC Part15 C Section 15.247 (d)

7.8. Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

7.9. Test Setup

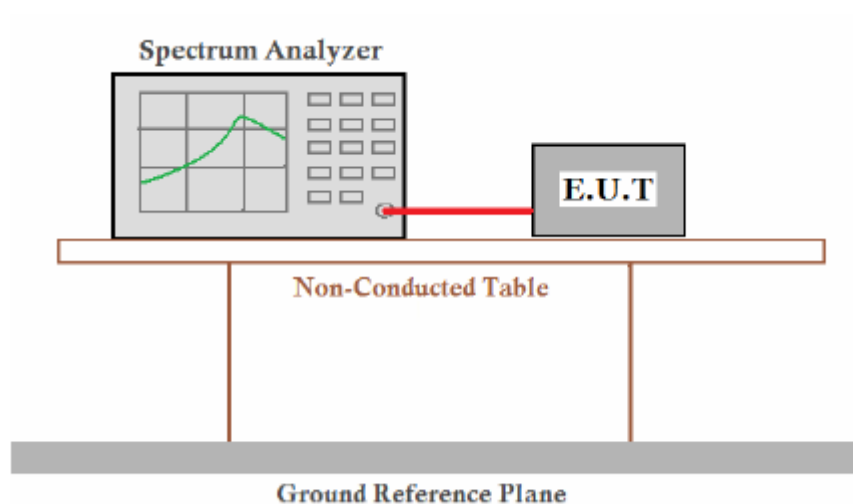


7.10. Test Result


Test plot as follows:

Test mode: 802.11b


Lowest channel 30MHz~25GHz

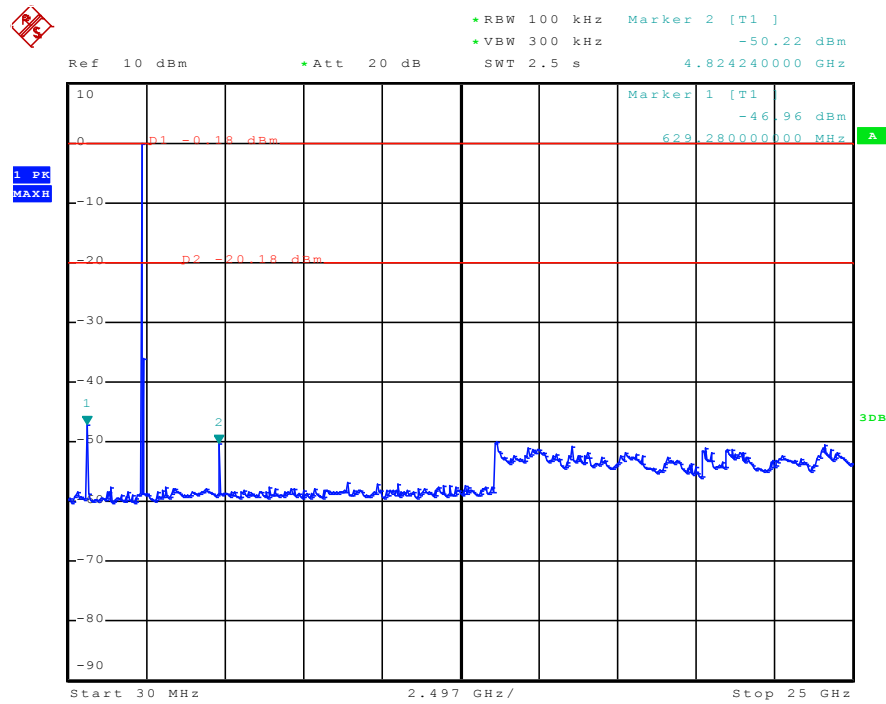


Middle channel 30MHz~25GHz

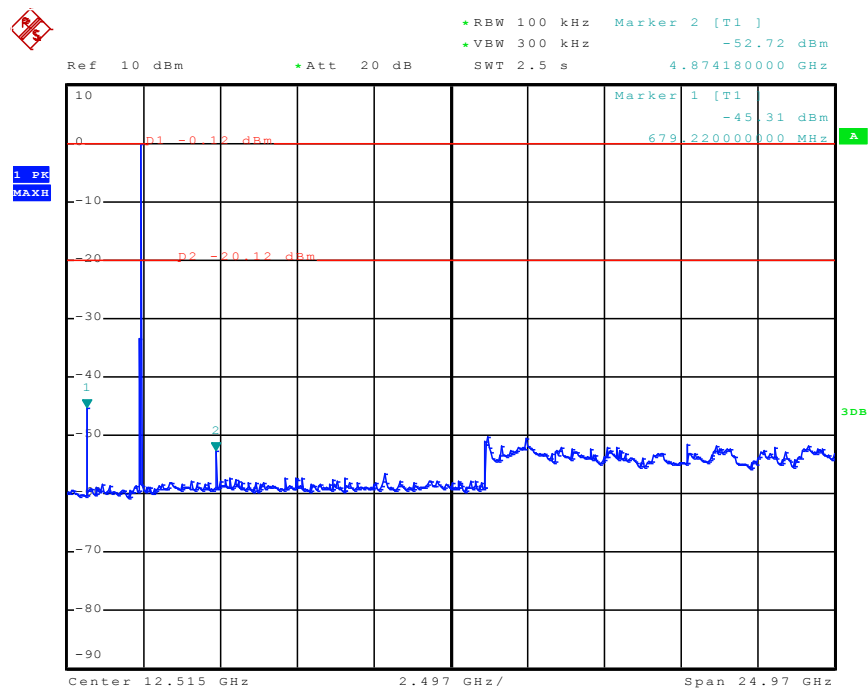


Middle channel 30MHz~25GHz

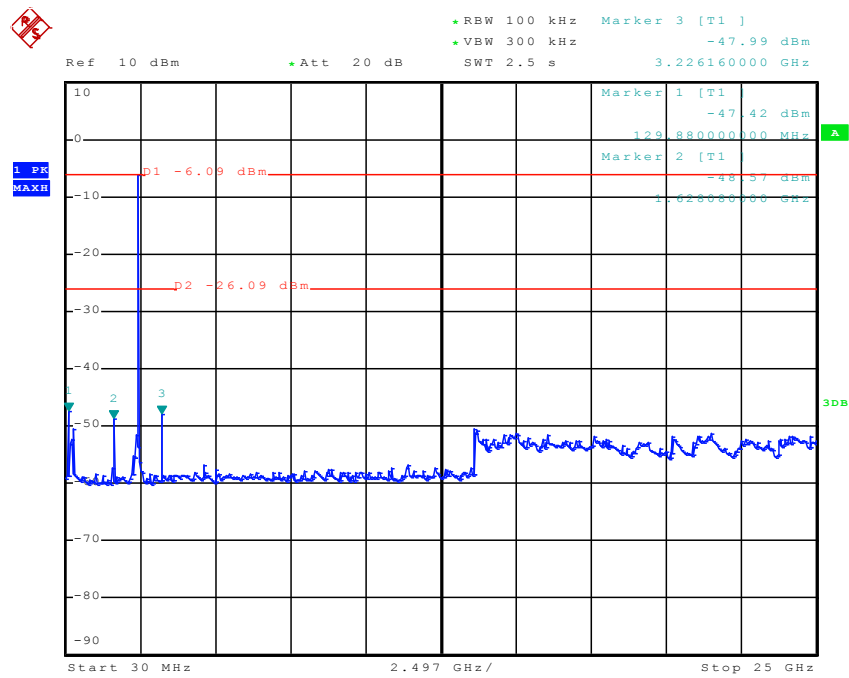


Highest channel 30MHz~25GHz

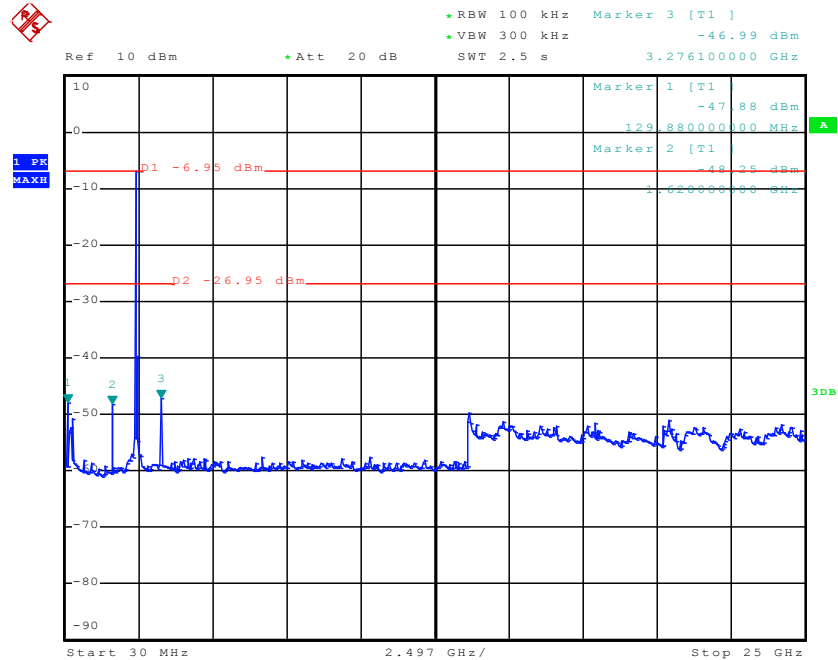


Test mode: 802.11n(H20)
Lowest channel 30MHz~25GHz

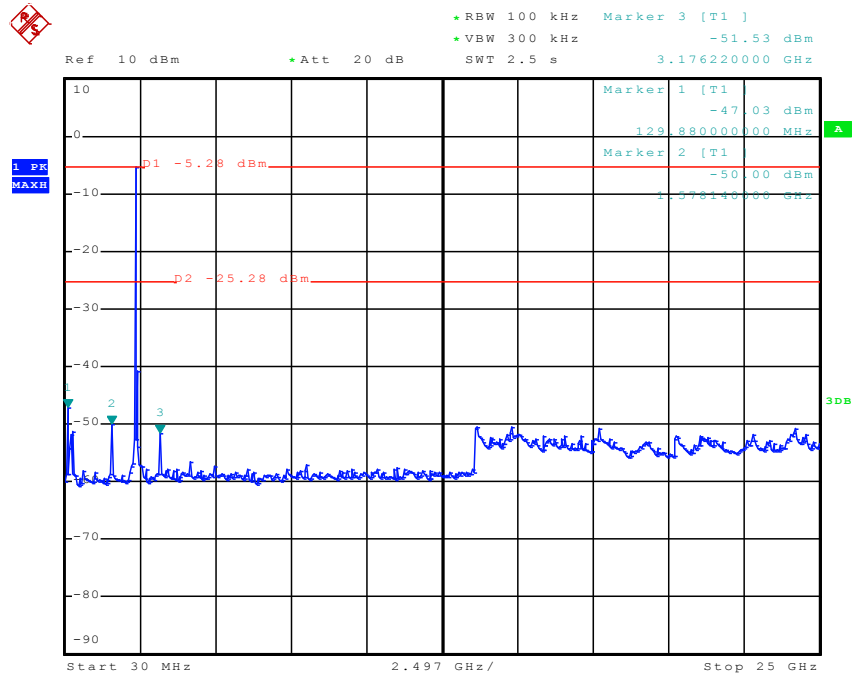

Middle channel 30MHz~25GHz

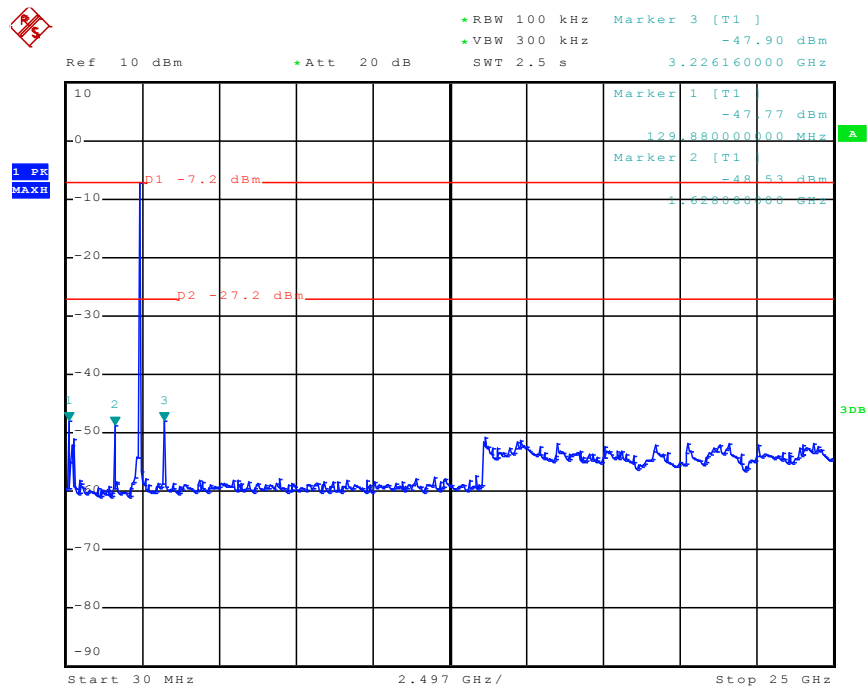

Highest channel 30MHz~25GHz

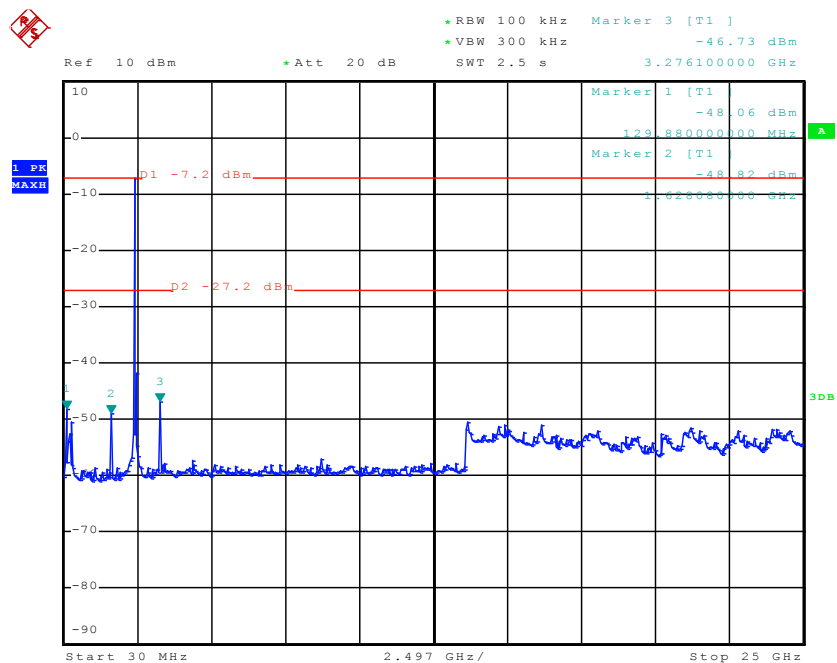

8. §15.247(A) (2) – 6DB BANDWIDTH TESTING

8.1. Test Equipment

Please refer to Section 5 this report.

8.2. Test Procedure

1. Set EUT in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW=100KHz, VBW>=RBW, Span=50MHz, Sweep=auto.
4. Mark the peak frequency and -6dB(upper and lower)frequency.
5. Repeat until all the rest channels are investigated.

8.3. Applicable Standard

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.


8.4. Test Result:Pass.

Please refer to the following tables


Channel Frequency (MHz)	Data Rate (Mbps)	6dB Bandwidth (MHz)	Limit (kHz)	Result
802.11b Mode				
2412	1	10.14	>=500	Pass
2437	1	10.14	>=500	Pass
2462	1	10.14	>=500	Pass
802.11g Mode				
2412	6	16.62	>=500	Pass
2437	6	16.50	>=500	Pass
2462	6	16.50	>=500	Pass
802.11n (20M) Mode				
2412	6.5	16.50	>=500	Pass
2437	6.5	16.50	>=500	Pass
2462	6.5	16.56	>=500	Pass

802.11b Mode:


Low Channel

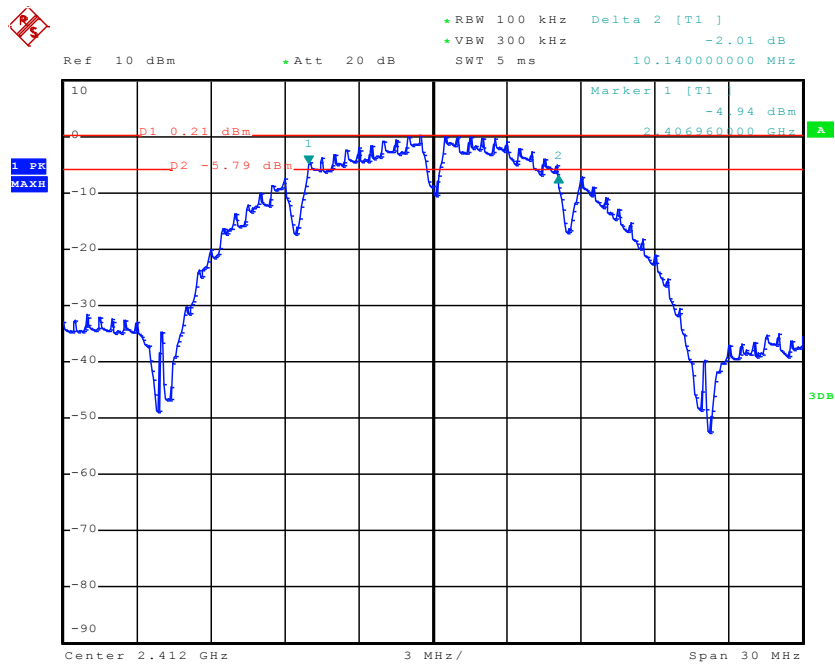

Middle Channel

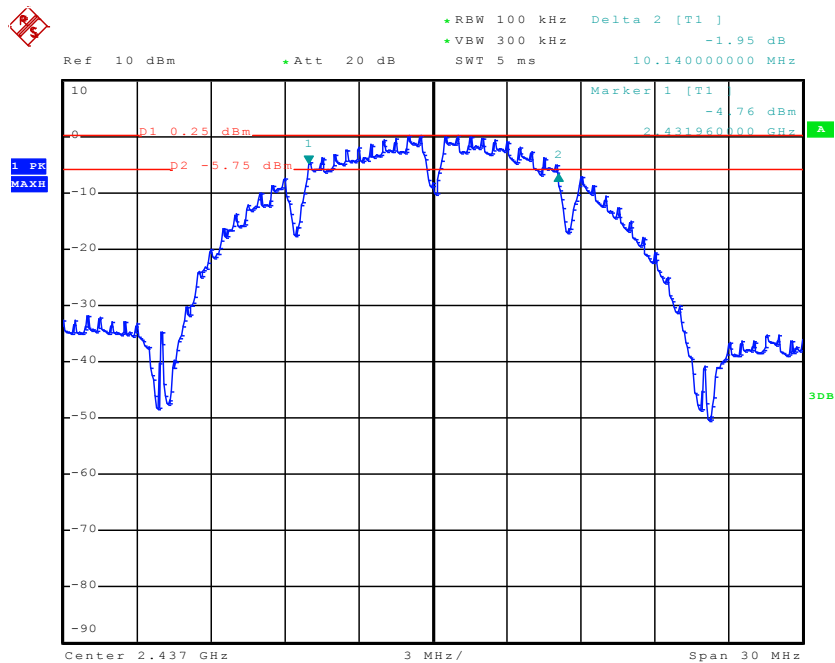


High Channel

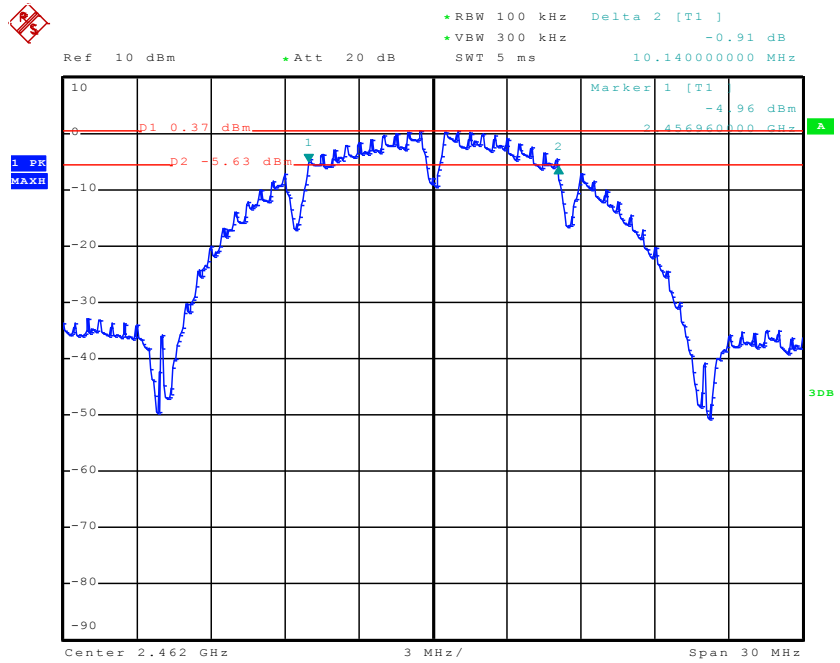


802.11g Mode:


Low Channel


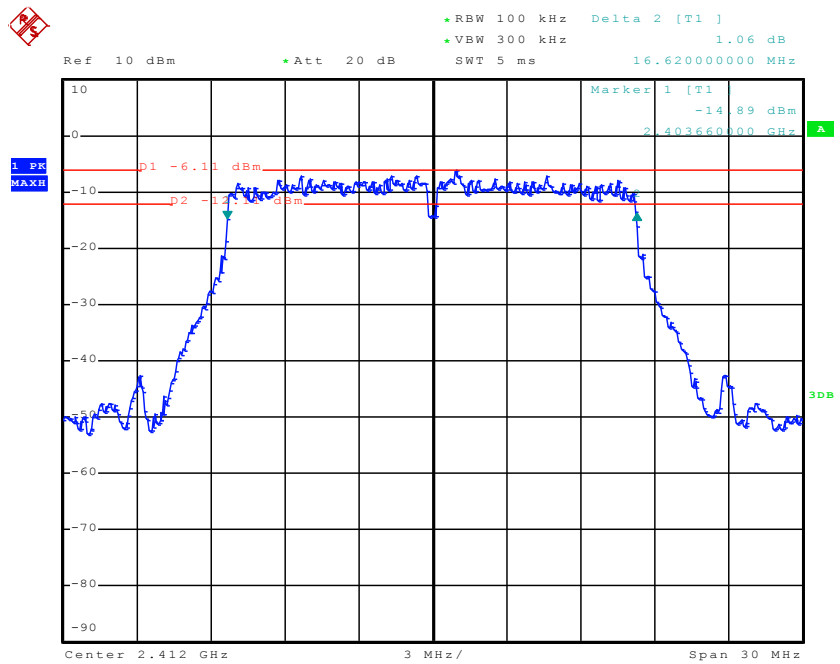


Middle Channel

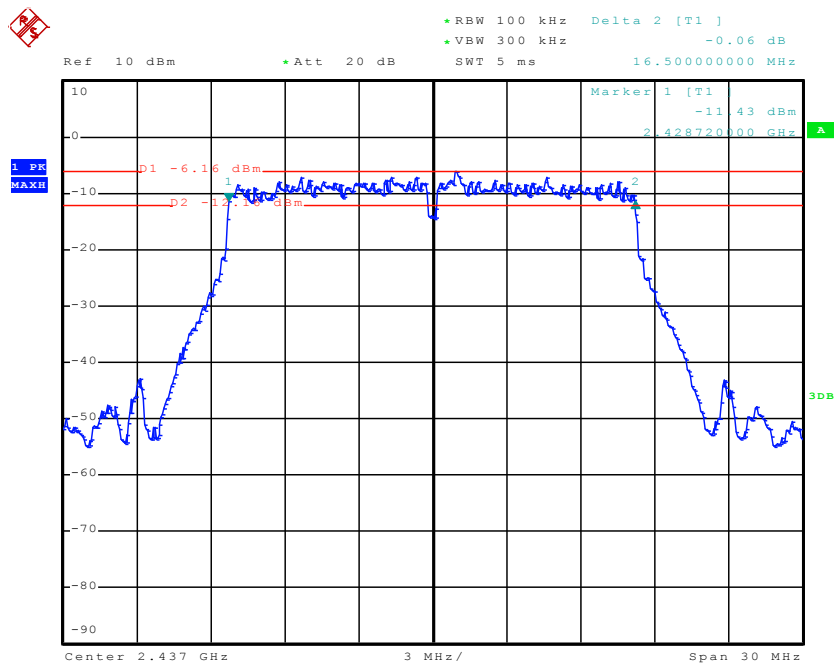


High Channel

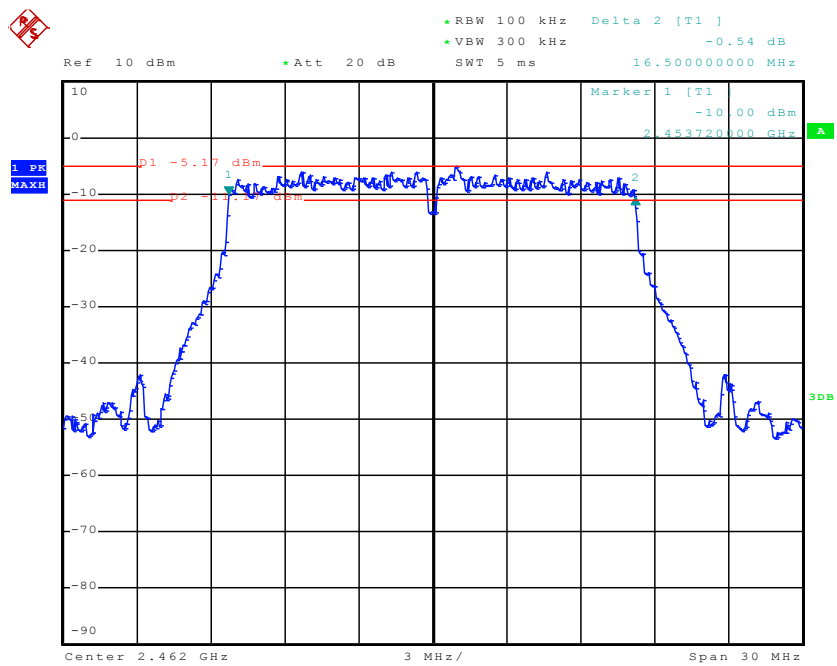

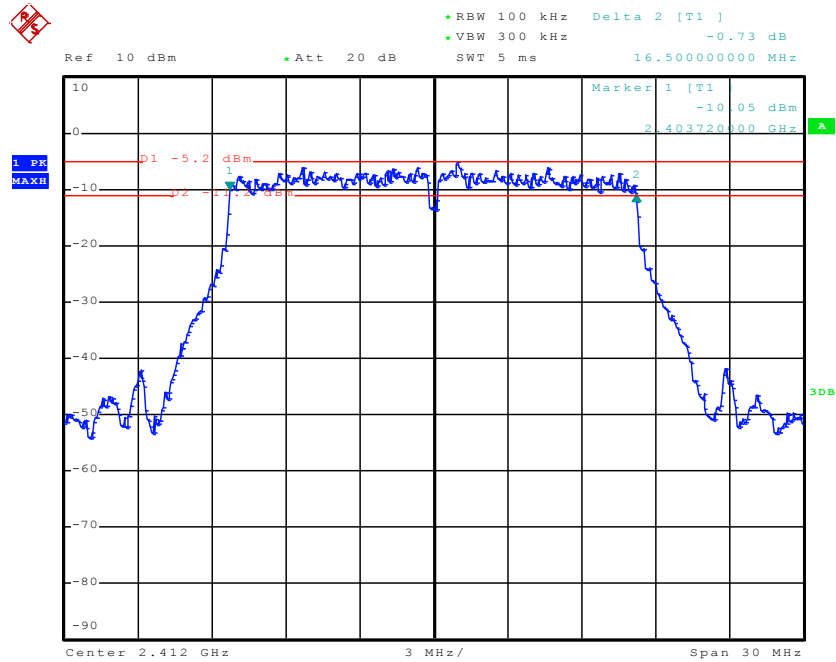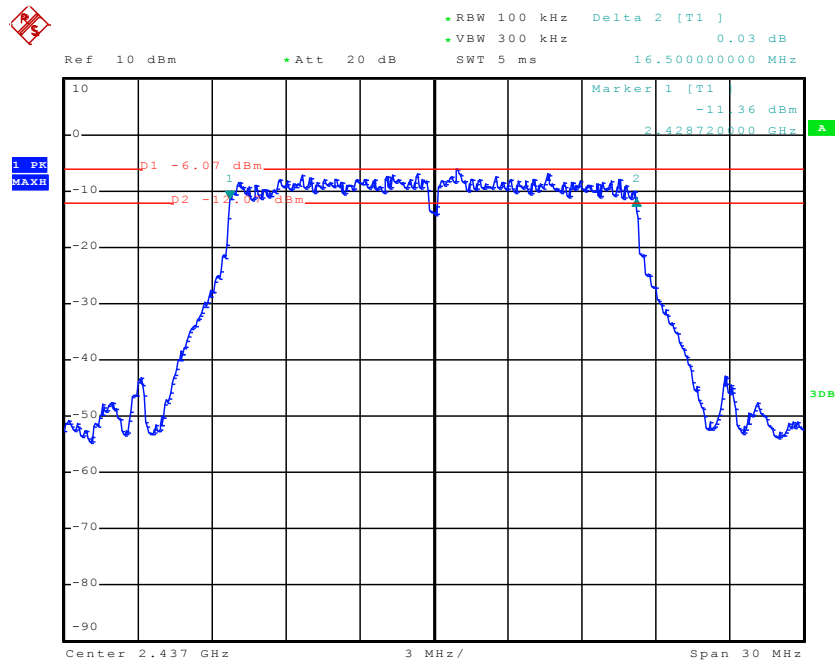802.11n (20M) Mode:**Low Channel****Middle Channel**

High Channel

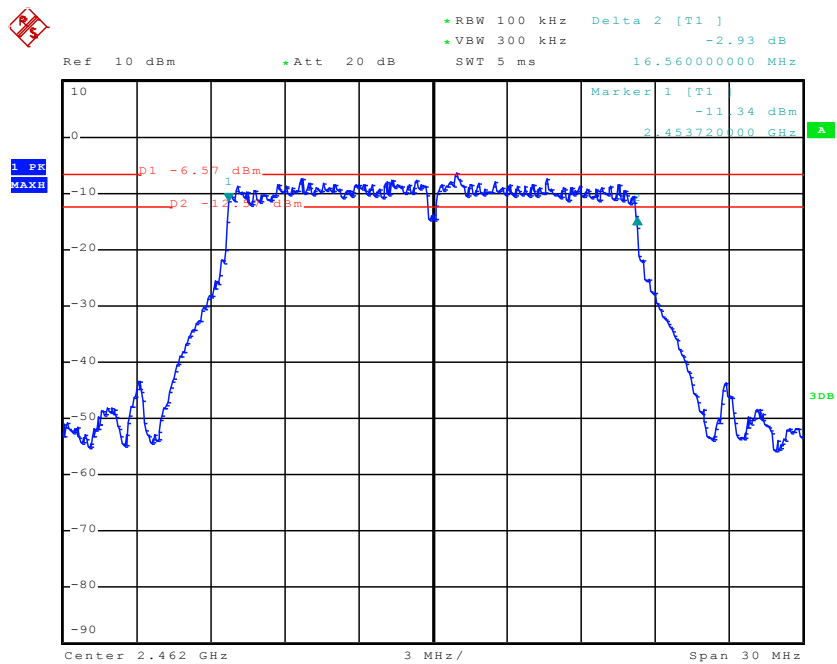

9. §15.247(B) (3) - Maximum Peak Output Power

9.1. Test Equipment

Please refer to Section 4 this report.

9.2. Test Procedure

1. The EUT was directly connected to the power meter

9.3. Applicable Standard

According to §15.247(b) (3), for systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

9.4. Test Result**Pass****802.11b Mode:**

Channel	Frequency (MHz)	Data Rate (Mbps)	Conducted Power (dBm)	Limit (dBm)
Low	2412	1	7.53	30
Mid	2437	1	7.15	30
High	2462	1	6.67	30

802.11g Mode:

Channel	Frequency (MHz)	Data Rate (Mbps)	Conducted Power (dBm)	Limit (dBm)
Low	2412	6	6.82	30
Mid	2437	6	5.94	30
High	2462	6	5.83	30

802.11n (20M) Mode:

Channel	Frequency (MHz)	Data Rate (Mbps)	Conducted Power (dBm)	Limit (dBm)
Low	2412	6.5	6.27	30
Mid	2437	6.5	5.98	30
High	2462	6.5	5.12	30

10. §15.247(D) – 100 KHZ Bandwidth of Frequency Band Edge

10.1.Test Equipment

Please refer to Section 4 this report.

10.2.Test Procedure

- 1, Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2, Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
- 3, Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
Note: For Rdstricted Band
RBW=1MHz
VBW=1 MHz
- 4, Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
- 5, Repeat above procedures until all measured frequencies were complete.

10.3.Applicable Standard



In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

10.4.Test Result

Pass.

Channel	Delta Peak to Band Emission (dBc)	≥Limit (dBc)	Result
802.11b mode			
Left-band	46.64	20	Pass
Right-band	49.13	20	Pass
802.11g mode			
Left-band	38.74	20	Pass
Right-band	40.19	20	Pass
802.11n-HT20 mode			
Left-band	38.48	20	Pass
Right-band	40.39	20	Pass

Please refer to following plots.

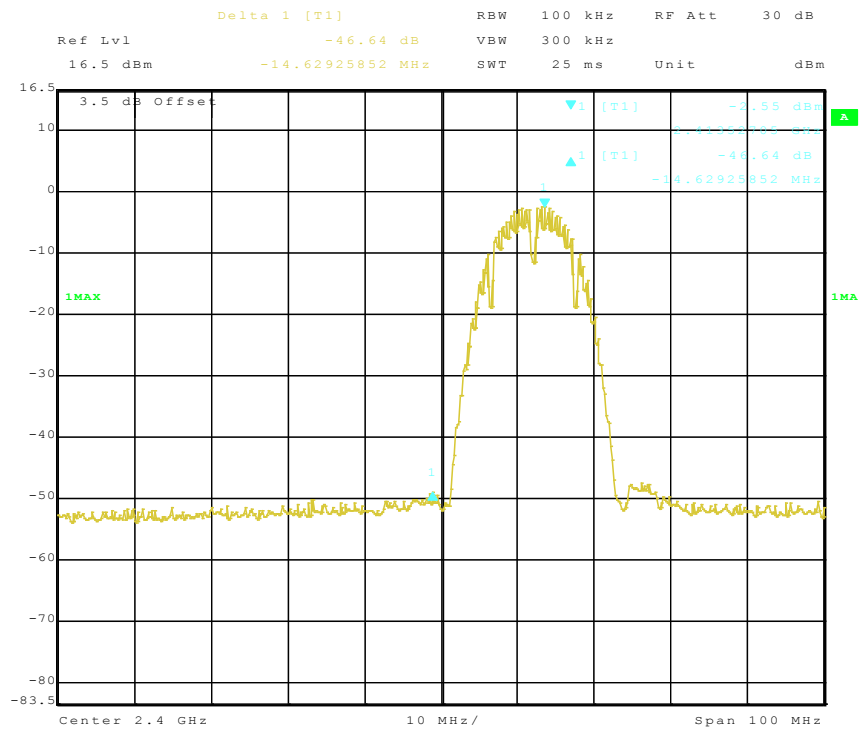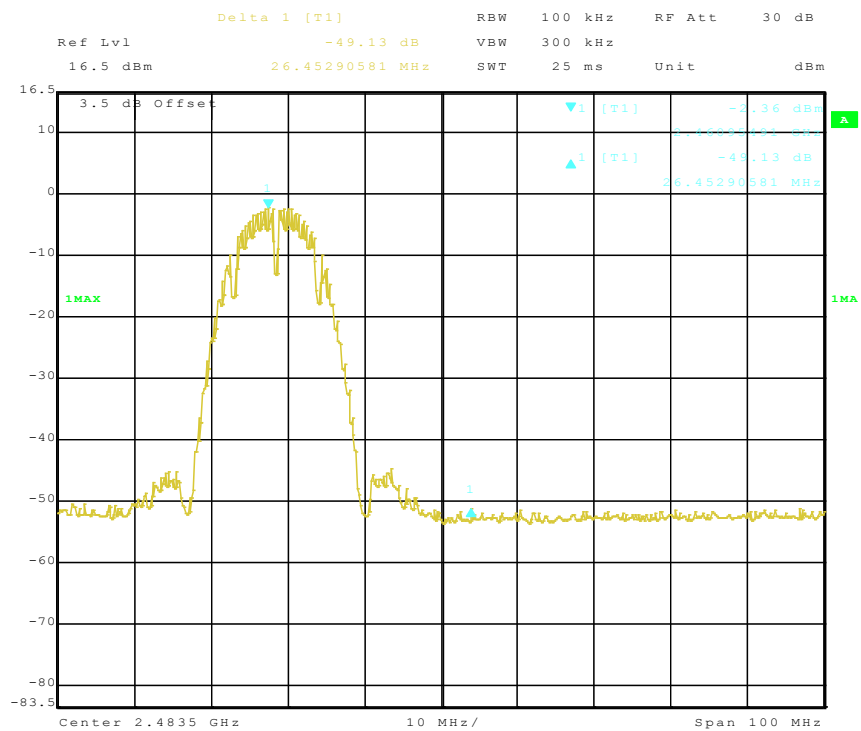802.11b: Band Edge, Left Side**802.11b: Band Edge, Right Side**

Delta 1 [T1] RBW 100 kHz RF Att 30 dB
 Ref Lvl -38.74 dB VBW 300 kHz
 16.5 dBm -21.24248497 MHz SWT 25 ms Unit dBm

3.5 dB Offset

▼1 [T1] -10.80 dBm
 ▲1 [T1] -50.00 dBm
 -38.74 dB
 -21.24248497 MHz

1MAX

Center 2.4 GHz 10 MHz/ Span 100 MHz

Delta 1 [T1]

Ref Lvl -40.19 dB

16.5 dBm 61.92384770 MHz

RBW 100 kHz

VBW 300 kHz

SWT 25 ms

Unit dBm

3.5 dB Offset

▼1 [T1] -10.39 dBm

▲1 [T1] -40.19 dB

61.92384770 MHz



1MAX

1

Center 2.4835 GHz

10 MHz/

Span 100 MHz

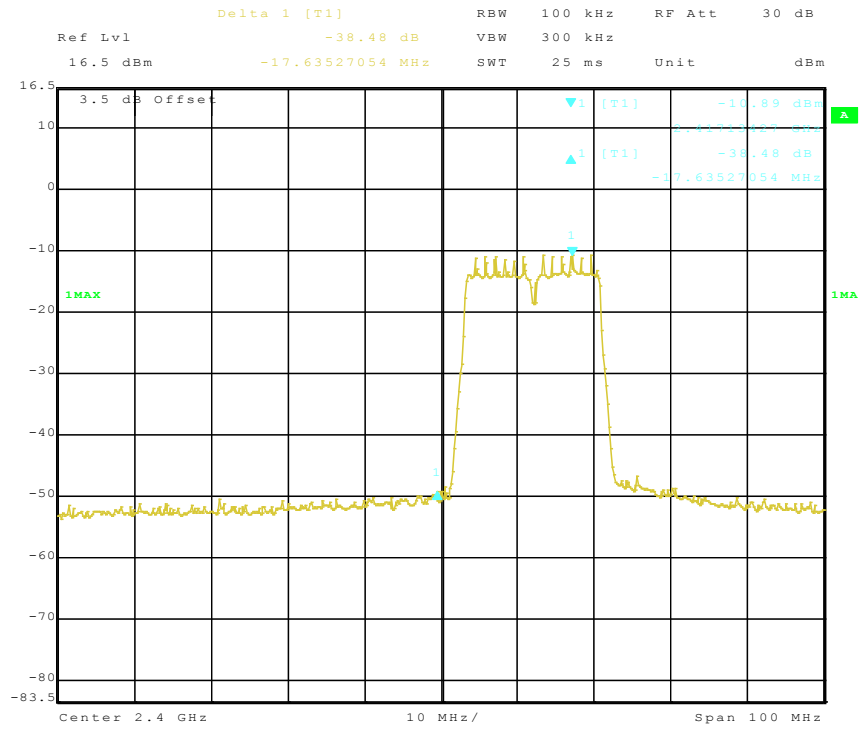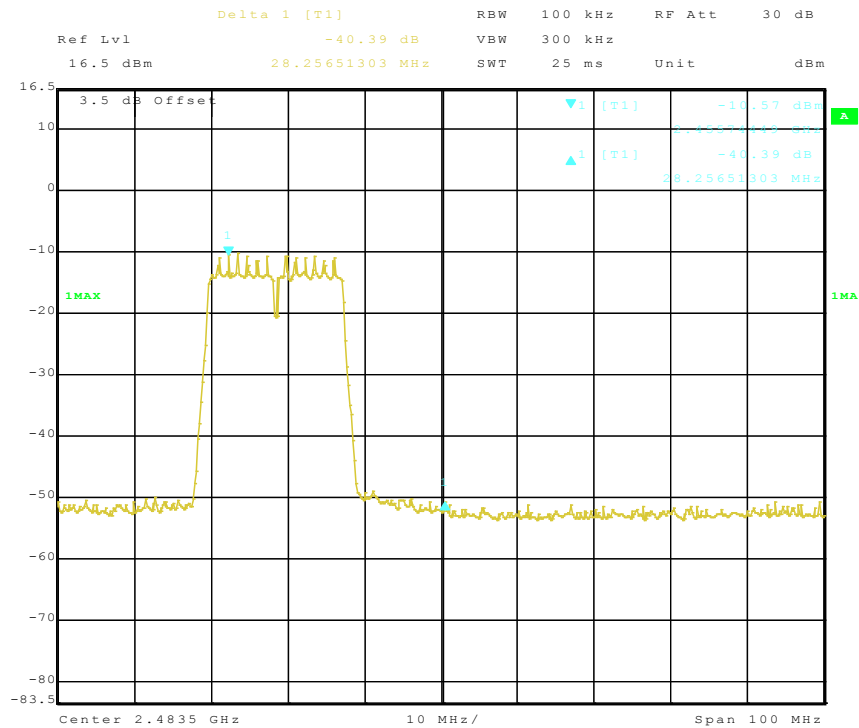802.11n-HT20: Band Edge, Left Side**802.11n-HT20: Band Edge, Right Side**

11. §15.247(E) - Power Spectral Density

11.1. Test Equipment

Please refer to Section 4 this report.

11.2. Test Procedure

1. Connect EUT test port to spectrum analyzer
2. Set the EUT to transmit maximum output power at 2.4GHz.
3. Then set the EUT to transmit at high, middle and low frequency and measure the conducted band edge spurious separately.

11.3. Applicable Standard



For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

11.4. Test Result


PASS

Channel	Frequency (MHz)	Data Rate (Mbps)	Correct Power spectral density (dBm)	Limit (dBm)	Result
802.11b mode					
Low	2412	1	-16.29	≤8	Pass
Middle	2437	1	-14.64	≤8	Pass
High	2462	1	-15.31	≤8	Pass
802.11g mode					
Low	2412	6	-23.45	≤8	Pass
Middle	2437	6	-23.23	≤8	Pass
High	2462	6	-25.02	≤8	Pass
802.11n-HT20 mode					
Low	2412	6.5	-25.65	≤8	Pass
Middle	2437	6.5	-25.04	≤8	Pass
High	2462	6.5	-25.23	≤8	Pass


Please refer to the following plots

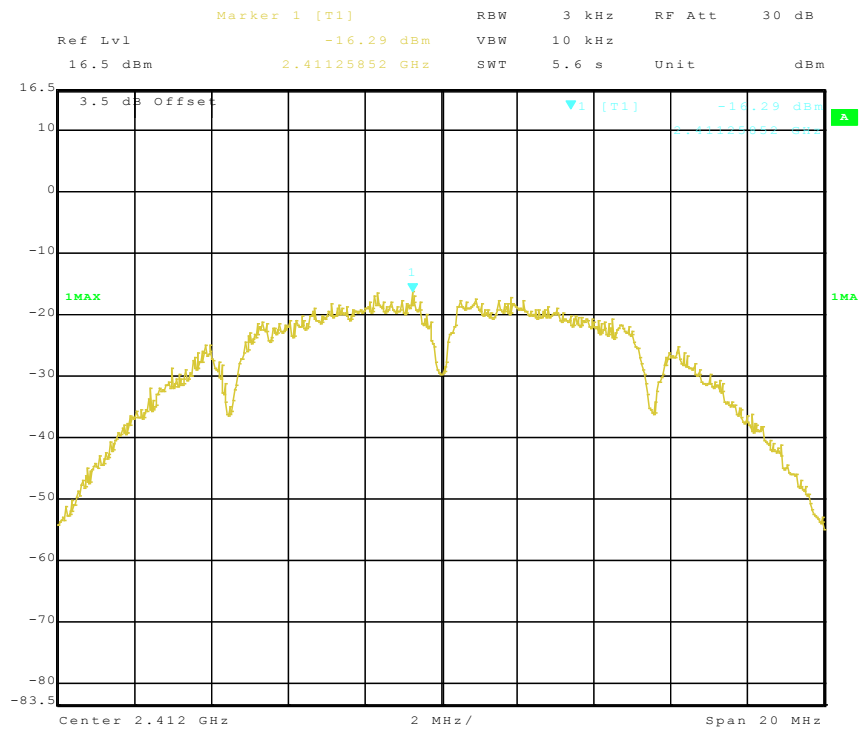
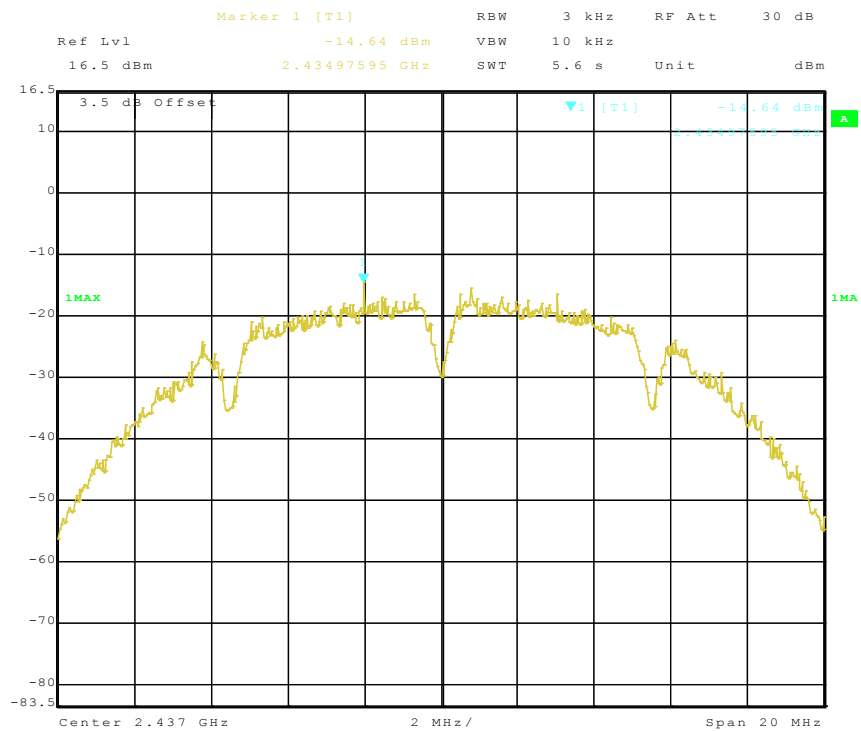
Power Spectral Density, 802.11b Low Channel**Power Spectral Density, 802.11b Middle Channel**



Power Spectral Density, 802.11b High Channel

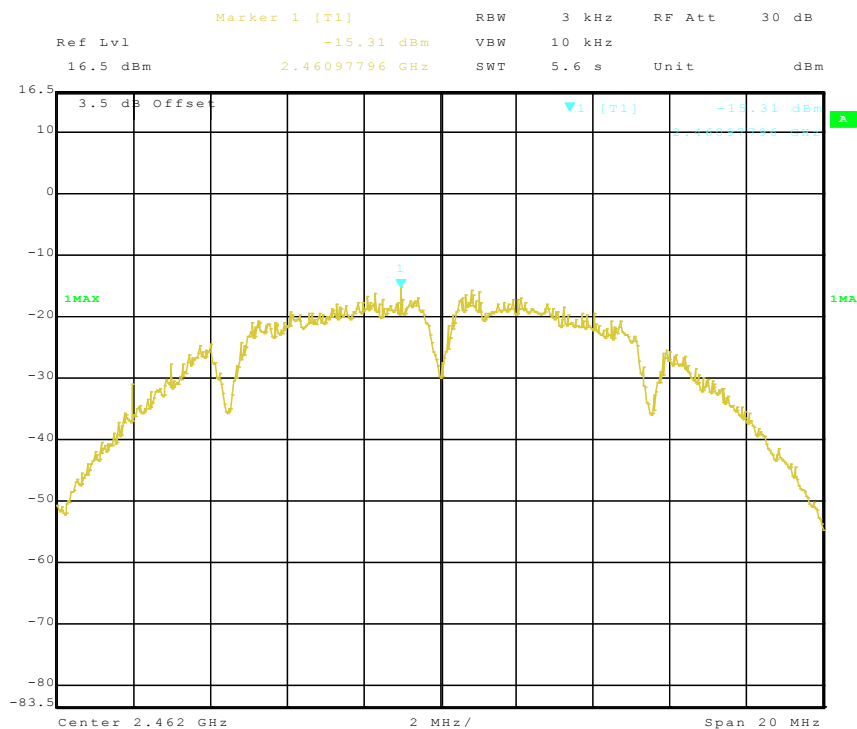

Power Spectral Density, 802.11g Low Channel

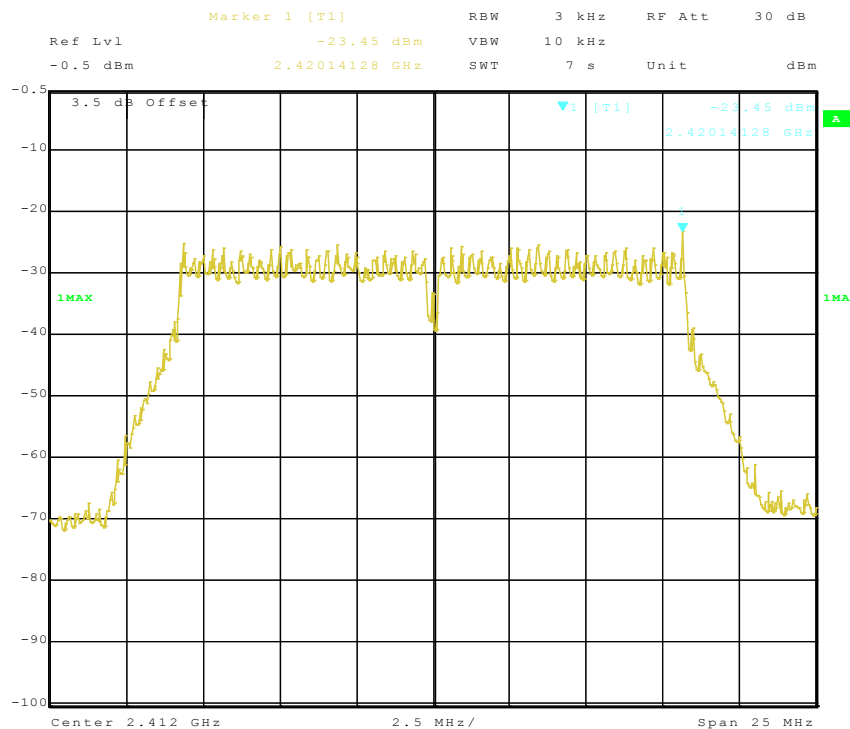

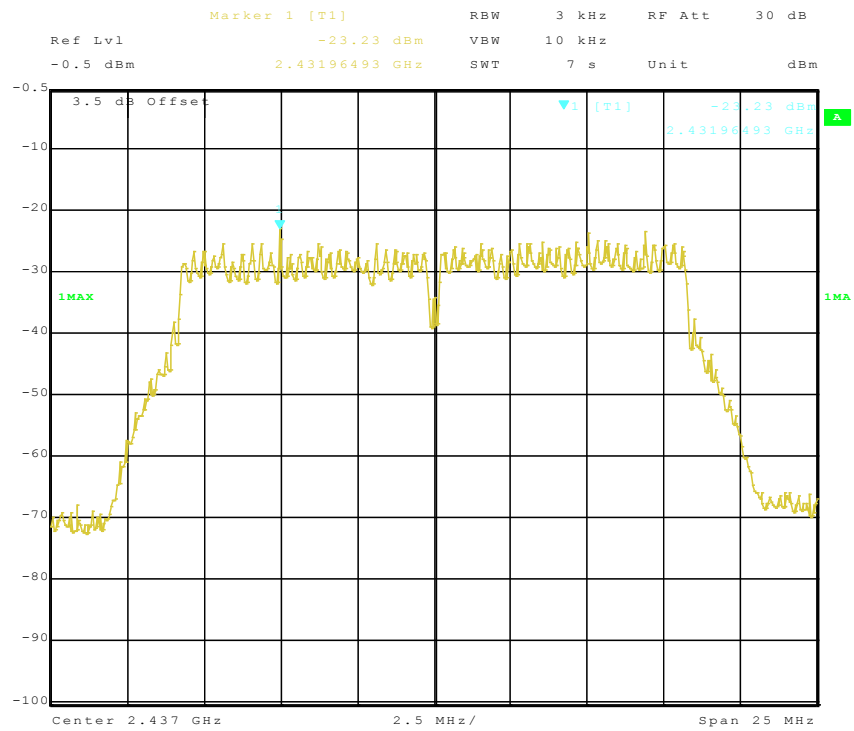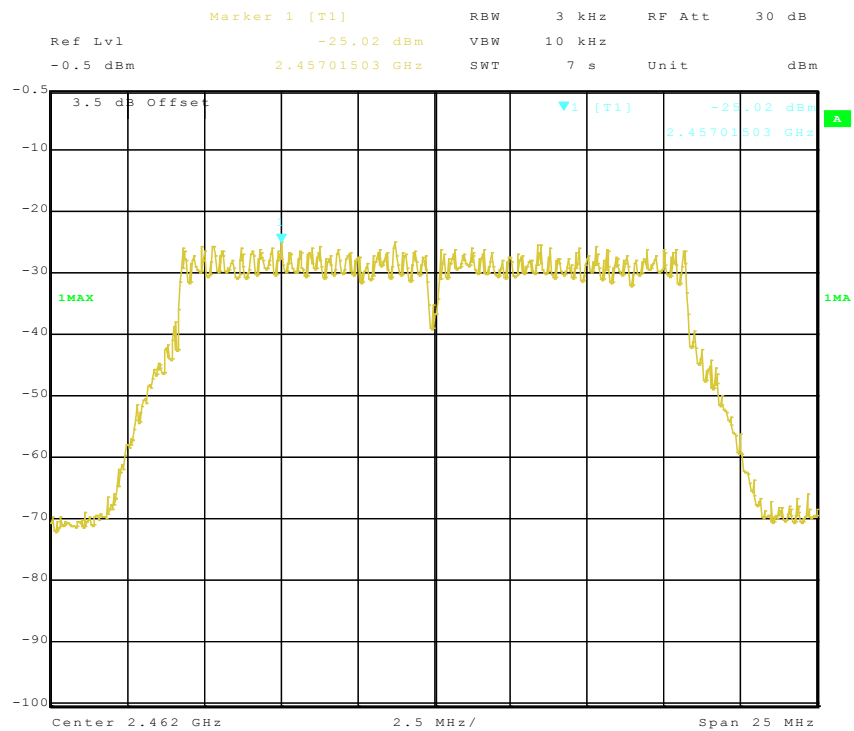Power Spectral Density, 802.11g Middle Channel**Power Spectral Density, 802.11g High Channel**

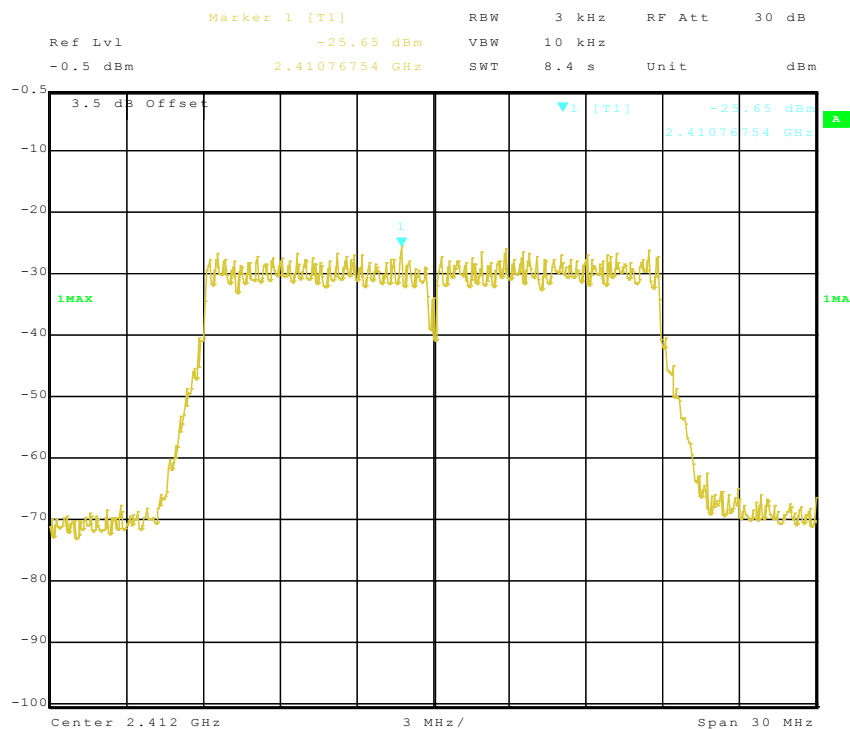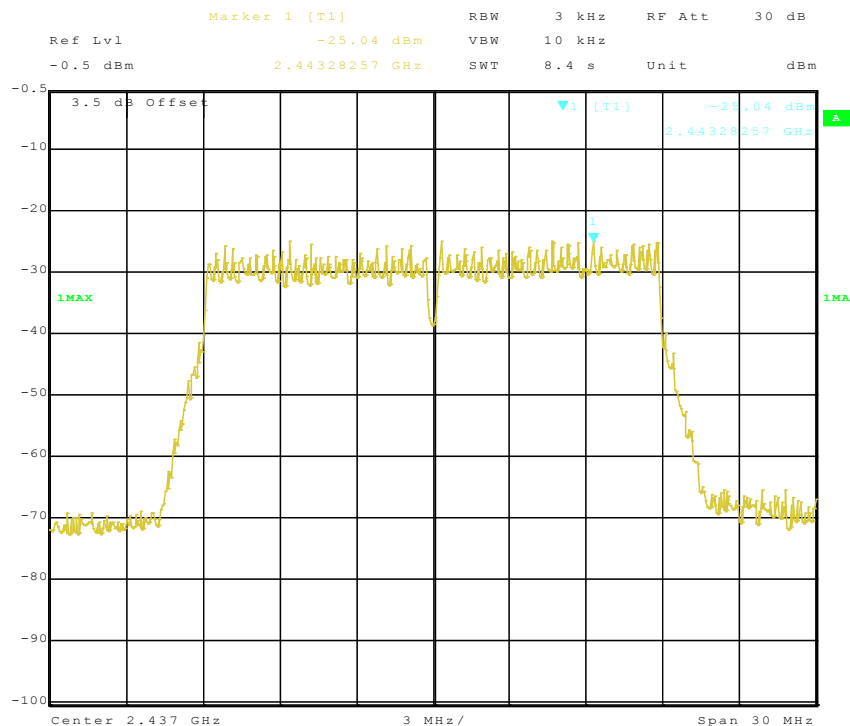Power Spectral Density, 802.11n-HT20 Low Channel**Power Spectral Density, 802.11n-HT20 Middle Channel**

Power Spectral Density, 802.11n-HT20 High Channel

