

## FCC PART 15 CLASS B EMI MEASUREMENT AND TEST REPORT

FOR

**Philips Communication, Security & Imaging**  
**850 Greenfield Road, Lancaster,**  
**PA 17601-5874, USA**

**MODEL: NetCam-DVR**

Issued Date: January 31, 2001

Report No.: THRU-F010131B

<b>This Report Concerns:</b> <input checked="" type="checkbox"/> Original Report	<b>Equipment Type:</b> Digital Video Recording Camera NetCam-DVR
<b>Test Date:</b> <u>January 30, 2001</u>	
<b>Tested By:</b>  K. M. Choi - Test Engineer	
<b>Certified By:</b>  J. J. Ha - Director, Compliance Engineering	
<b>Prepared By:</b> Thru Lab. & Engineering 1367-1, ShinKil-Dong, YoungDeungPo-Ku, Seoul 150-057, KOREA TEL: 82-(2)-846-5002 / FAX: 82-(2)-834-0969	

**Note:** This report may not be duplicated except in full without prior written consent of Thru Lab. & Engineering.

## Table of Contents

---

### 1 - General Information

1.1	Test Facility	4
1.2	Test Methodology	4
1.3	Test Equipment List	4
1.4	Product Description for Equipment Under Test (EUT)	5
1.5	Equipment Under Test (EUT)	5
1.6	Support Equipment	5
1.7	Host System Configuration	6
1.8	External I/O Cabling	6

### 2 - System Test Configuration

2.1	Justification	7
2.2	EUT Exercise	7
2.3	Special Accessories	7
2.4	Schematics/Block Diagram	7
2.5	Configuration of Test System	8
2.6	Conducted Emissions Test Setup Block Diagram	9

### 3 - Conducted Emissions Test

3.1	EUT Setup	10
3.2	Test Equipment Setup	10
3.3	Test procedure	10
3.4	Summary of Test Results	11
3.5	Conducted Emissions Test Result Data	11
3.6	Plot of Conducted Emissions Test Data	11

### 4 - Radiated Emissions Test

4.1	EUT Setup	12
4.2	Test Equipment Setup	12
4.3	Test Procedure	12
4.4	Corrected Amplitude and Margin Calculation	12
4.5	Summary of Test Results	13
4.6	Radiated Emissions Test Result Data	13

## **Table of Contents(cont'd)**

---

### **5 - FCC Labelling Requirement**

5.1	FCC Label .....	14
5.2	Label Location .....	14

### **6 - Conducted and Radiated Setup Photographs**

6.1	Conducted Emissions Photograph: Front View .....	15
6.2	Conducted Emissions Photograph: Side View .....	15
6.3	Radiated Emissions Photograph: Front View .....	16
6.4	Radiated Emissions Photograph: Rear View .....	16

### **7 - Photographs**

7.1	EUT: Front View .....	17
7.2	EUT: Rear View .....	17
7.3	EUT: Label View .....	18
7.4	EUT: Internal View .....	18
7.5	EUT: Main Board, Component View .....	19
7.6	EUT: Main Board, Circuit View .....	20
7.7	EUT: CCD Board, Component View .....	21
7.8	EUT: CCD Board, Circuit View .....	22

### **Appendix A - Plot of Conducted Emissions Test Data**

### **Appendix B - EUT Schematics/Block Diagram**

### **Appendix C - User's Manual**

## 1 - General Information

### 1.1 Test Facility

The open area test site used by Thru Lab. & Engineering to collect radiated and conducted emissions measurement data is located in the 389 JeArm-Rhi, HyangNam-Myun, HwaSung-Gun, KyungKi-Do, Korea.

Test sites at Thru Lab. & Engineering has been fully described in reports submitted to the Federal Communication Commission and the details of the reports has been found to be in compliance with the requirements of Section 2.948 of the FCC Rules. The test facility also complies with the radiated and AC line conducted test site criterion in ANSI C63.4-1992.

The Federal Communications Commission has the reports on file and is listed under Registration Number 92583. Thru Lab. & Engineering is a Test Facility. The scope of the accreditation covers the FCC Method - 47 CFR Part 15 or 18 of the Commission's Rules.

### 1.2 Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-1992, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9kHz to 40GHz.

All radiated and conducted emissions measurements were performed at Thru Lab. & Engineering. The radiated testing was performed at an antenna-to-EUT distance of 10 meters for Class A devices and 3 meters for Class B devices.

### 1.3 Test Equipment List

Description	Model Number	Serial Number	Manufacturer	Cal. Due Date
EMI Test Receiver	ESVS 10	830489/001	Rohde & Schwarz	2001.05.17.
Spectrum Analyzer	R3261C	71720189	Advantest	2001.10.04.
Biconical Antenna	94455-1	0977	Eaton	2001.05.17.
Log Periodic Antenna	3146	2051	EMCO	2001.05.17.
Dipole Antenna Set	TDA25/TDS25.1/2	176/200/200	Electro Metrics	2001.10.4.
LISN	KNW-242	8-923-2	Kyoritsu	None
LISN	8012-50-R-24	8379121	Solar	None
Plotter	7475A	2210A 02802	Hewlett Packard	None
Signal Generator	SMS	8721651100	Rohde & Schwarz	None

## 1.4 Product Description for Equipment Under Test (EUT)

Philips Communication, Security & Imaging's NetCam-DVR or the "EUT" as referred to in this report is a 4-channel camera style DVR all-in-one system with a Web server, a networking device, a CCD module and a HDD (6GB standard and changeable). The unit only needs a designated power supply and network in order to operate.

Main Features of EUT are:

- 1/3-inch Format CCD color camera
- Up to 720x486 resolution
- Wavelet compression
- TCP/IP protocols for communication on intranets and the internet
- 10BaseT Ethernet output
- Integrated server for 3 additional cameras
- Internal multiplexing DVR with 6GB HDD
- Real time viewing in single or quad display
- Video motion detection and alarm contacts

## 1.5 Equipment Under Test (EUT)

Description	Model Number	Serial Number	Manufacturer	Remarks
Digital Video Recording Camera	NetCam-DVR	none	Web Gate Inc.	-

## 1.6 Support Equipment

Description	Model Number	Serial Number	Manufacturer	Remarks
Host Computer	ART586C	TRL0080730	Art Computer	ATX
Monitor	SyncMaster 500P	H1BH900689	Samsung Electronics	15"
Keyboard	BTC-5560	K71200885	BTC Korea	PS/2
Mouse	Mouse 2.0	02873445	Microsoft Corp.	PS/2
Printer	C2605	3221S66649	Hewlett Packard	300dpi
Modem	SM1200A1	71000230	Samsung Electronics	1200bps
Zip Drive	Z100USB	PSBL35F137	Iomega Corp.	USB
Power Supply	PW108	none	Ault Korea Co.	for Camera
DVR Camera	NetCam-DVR	none	Web Gate Inc.	EUT

## 1.7 Host System Configuration

Description	Model Number	Serial Number	Manufacturer	Remarks
Power Supply	ST-250GL	S008016533	Seventeam Electronics	250W
Motherboard	Richmond AGP	LA700937	Sambo Computer	ATX
Video Adapter	Delphino 128	DP128A03282	Dooin Electronics	AGP
Ethernet Adapter	DPL060A	539009061	Dotop Technology	10Mbps
Hard Drive	PLS-31084A	JQXG917701	Samsung Electronics	1.08GB
Floppy Drive	SFD-321D/T	J2YD611113	Samsung Electronics	3.5"
CD-ROM Drive	SCR-831	63PH400104	Samsung Electronics	8X
CPU	Pentium MMX	None	Intel Corp.	233MHz
Memory	SDRAM	None	Samsung Electronics	64MB
Host Chassis	ART586C	TRL0080730	Art Computer	Middle Tower

## 1.8 External I/O Cabling

Description	Length(m)	Port/From	To/Port	Remarks
Video Cable	1.2	VGA/Host	Monitor/Dsub	Shielded
Keyboard Cable	1.8	Keyboard/Host	Keyboard	Shielded
Mouse Cable	2.0	Mouse/Host	Mouse	Shielded
Printer Cable	1.5	Parallel/Host	Printer/Centronics	Shielded
Serial Cable	2.0	Serial/Host	Modem/RS-232	Shielded
USB Cable	1.0	USB/Host	Zip Drive/USB	Shielded
Ethernet Cable	1.0	EUT/Host	Web Camera Server	STP

## **2 - System Test Configuration**

---

### **2.1 Justification**

The system was configured for testing in a typical fashion (as normally used by a typical user). Worst case conducted and radiated emissions are presented in section 3.5 and section 4.6 of this report.

The test was performed with a digital color camera for the final qualification test. The Ethernet connector (RJ-45) provided by the EUT, Video port (VGA/DB15), PS/2 Keyboard/Mouse ports (miniDIN), Parallel port (LPT/DB25), Serial port (COM/DB9) and USB port provided by the host computer were also tested.

### **2.2 EUT Exercise**

The EUT exercising program used during radiated and conducted testing was designed to exercise the various system components in a manner similar to a typical use. The test software, supplied by client, running on Windows operating system allowed capture large amounts of high quality video data via camera and sends the image data to the host computer screen continuously by TCP/IP Networking. The EUT records images onto its own HDD at the maximum speed of 10 frames per second. Since the unit is equipped with a dedicated file system, it prevents recorded data from being damaged or lost in course of sudden power failure. The EUT utilizes Wavelet compressing algorithm in addition to this, it is equipped with a 32bit RISC CPU to make it more efficient in image processing.


### **2.3 Special Accessories**

As shown in section 2.5, all interface cables used for compliance testing are shielded as normally supplied or by use respective component manufacturers. The Printer, Modem and Monitor featured shielded metal connectors.


### **2.4 Schematics/Block Diagram**

The EUT schematic or block diagram is presented in Appendix B as reference.

## 2.5 Configuration of Test System

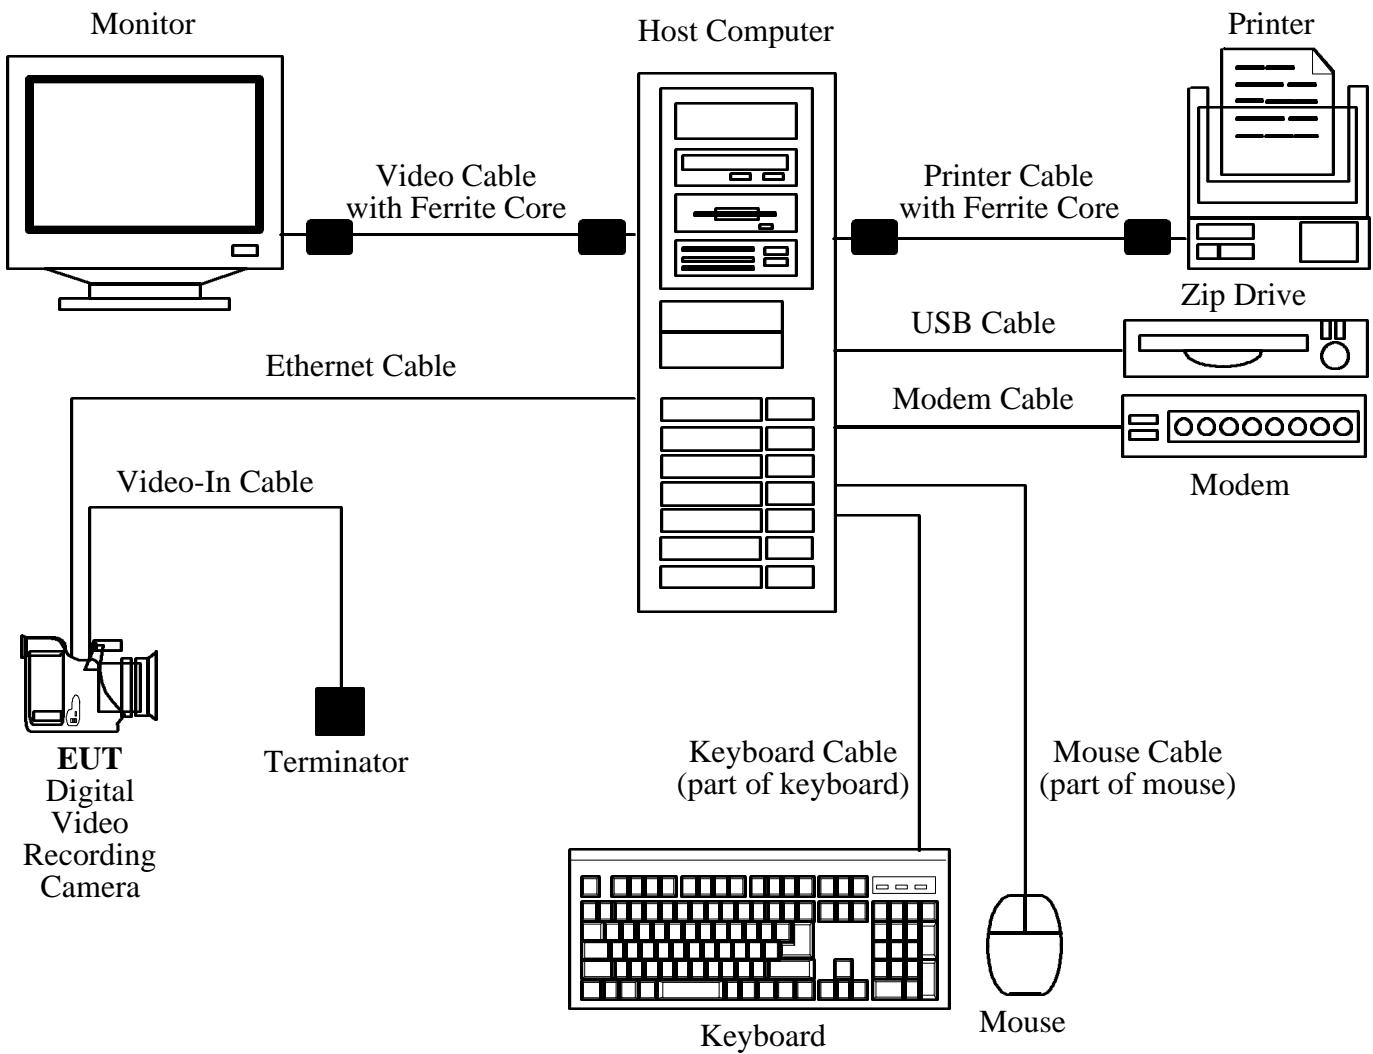

## 2.6 Conducted Emissions Test Setup Block Diagram

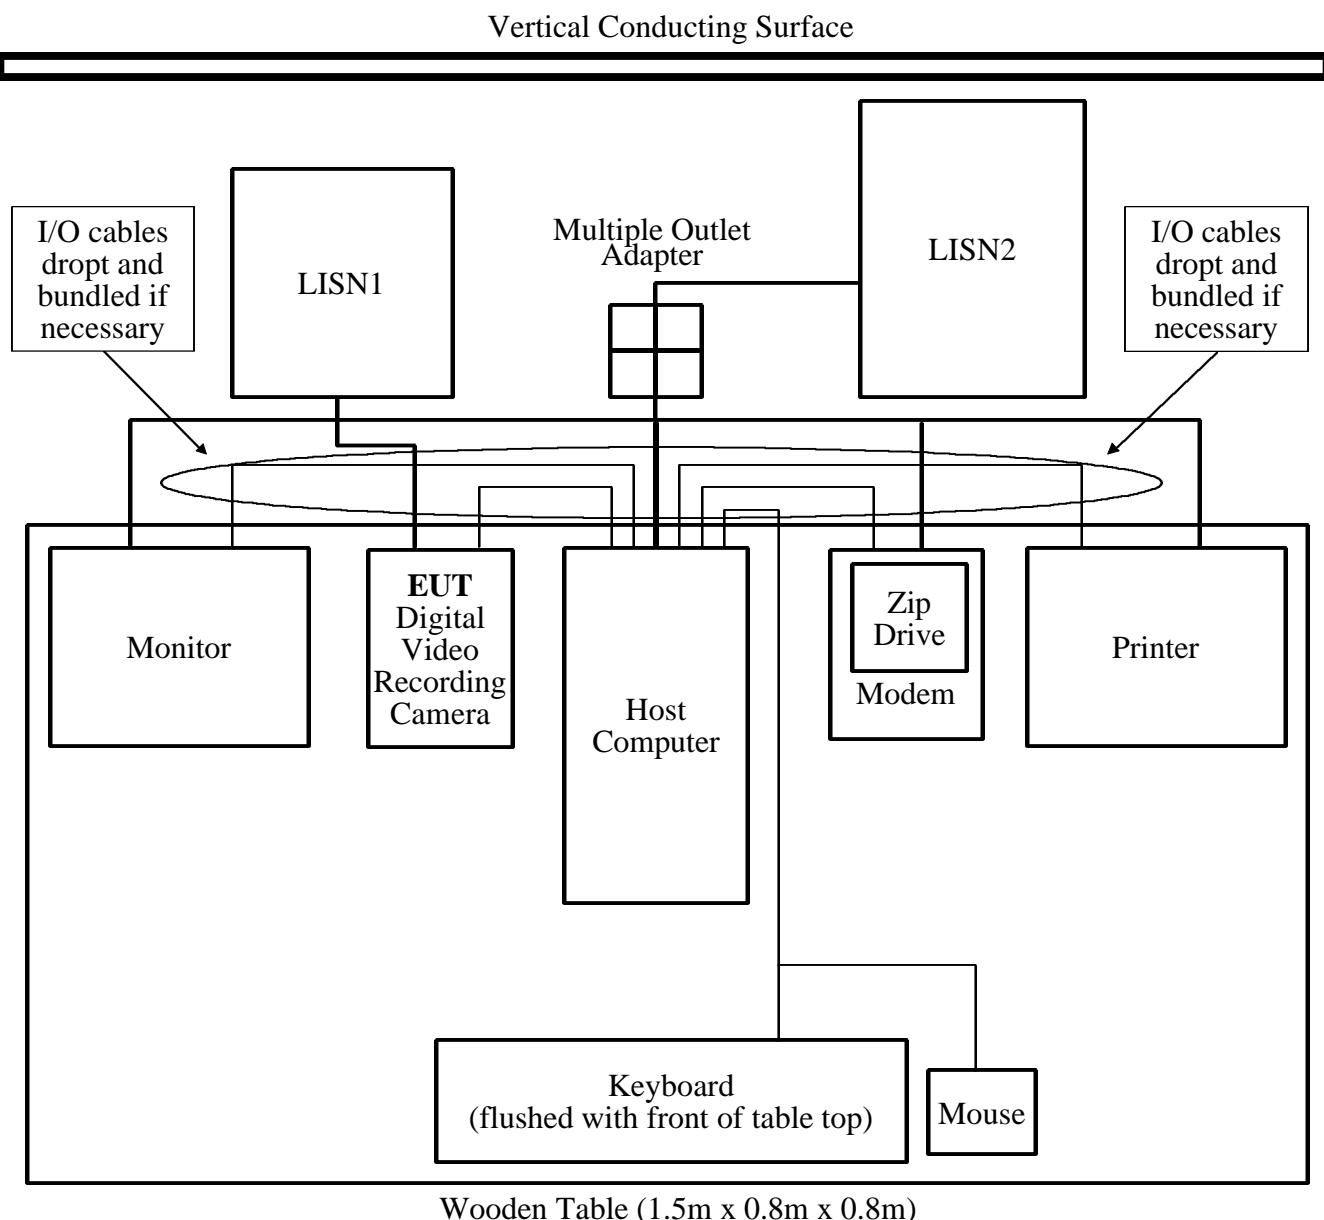

## **3 - Conducted Emissions Test**

---

### **3.1 EUT Setup**

The measurement was performed in the screen room of test site, using the setup in accordance with ANSI C63.4-1992 conducted emissions measurement procedure.

The host computer was placed on the center and back edge of the test table. The EUT (Digital Video Recording Camera) and monitor were placed on one side of the host computer with the printer, modem and zip drive on the other side. The rear of the EUT and all support equipments were flushed with the rear and sides of the tabletop. The keyboard was placed in front of the host computer, flushed with the front of the tabletop. The mouse was placed flushed with the back of the keyboard.

Spacing between the peripherals was approximately 10 centimeters.

### **3.2 Test Equipment Setup**

The spectrum analyzer was configured during the conduction test in as follows:

Start Frequency .....	450kHz
Stop Frequency .....	30MHz
Sweep Speed .....	Auto
IF Bandwidth .....	100kHz
Video Bandwidth .....	100kHz

### **3.3 Test Procedure**

During the conducted emissions test, the EUT power cord was connected to the auxiliary outlet of the LISN1, and host computer power cord and all other peripherals power cords were connected to the multiple outlet adapter of the LISN2.

Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance using all installation combination.

All data was recorded in the peak detection mode. Quasi-peak readings were only performed when an emissions was found to be marginal (less than -4dBuV). Quasi-peak readings are distinguished with a "QP".

The conducted emissions test was performed with EUT exercise program loaded, and the emissions were scanned between 0.45MHz to 30MHz on the LINE side and NEUTRAL side, herein referred to as L and N, respectively. The final test data for this test configuration is recorded in the table listed under section 3.5 of this report.

### 3.4 Summary of Test Results

According to the data in section 3.5, the EUT complied with the FCC Part 15 Class B standards, and had the worst margin reading of:

-6.4dB at 8.184MHz in the NEUTRAL side with the Ault Korea Co., Model PW108 power supply.

### 3.5 Conducted Emissions Test Data

Line Conducted Emissions				FCC Part15 Class B		
Frequency (MHz)	Amplitude (dBuV)	Detector Qp/Ave/Peak	Phase Line/Neutral	Limit		Margin (dB)
				(dBuV/m)	(uV/m)	
0.672	35.2	QP	L	48.0	250	-12.8
0.874	36.8	QP	L	48.0	250	-11.2
0.938	37.1	QP	N	48.0	250	-10.9
1.083	38.2	QP	N	48.0	250	-9.8
1.276	38.6	QP	N	48.0	250	-9.4
1.585	41.8	QP	N	48.0	250	-6.2
2.303	37.0	QP	L	48.0	250	-11.0
3.632	37.2	QP	L	48.0	250	-10.8
5.378	38.2	QP	L	48.0	250	-9.8
6.320	41.3	QP	N	48.0	250	-6.7
7.825	41.5	QP	L	48.0	250	-6.5
8.184	41.6	QP	N	48.0	250	-6.4

### 3.6 Plot of Conducted Emissions Test Data

Plot(s) of conducted emissions test data for the Ault Korea Co., Model PW108 power supply is presented in Appendix A of this report as reference.

## 4 - Radiated Emissions Test

---

### 4.1 EUT Setup

The radiated emissions tests were performed in the open area test site, using the setup in accordance with ANSI C63.4-1992 radiated emissions measurement procedure.

The host computer was placed on the center of the test table. The EUT (Digital Video Recording Camera) and monitor were placed on one side of the host computer with the printer, modem and zip drive on the other side. The keyboard was placed in front of the host computer, flushed with the front of the tabletop. The mouse was placed flushed with the back of the keyboard.

Spacing between the peripherals was approximately 10 centimeters.

### 4.2 Test Equipment Setup

During the radiated emissions test, the EMI test receiver was set with the following configurations:

Start Frequency	.....	Manual
Stop Frequency	.....	Manual
IF Bandwidth	.....	120kHz
Sweep Time	.....	10msec
Sweep Speed	.....	Auto

### 4.3 Test Procedure

For the radiated emissions test, the EUT and all support equipments power cords was connected to the AC floor outlet.

Maximizing procedure was performed on the six (6) highest emissions to verify that the EUT complied with all installation combination.

The radiated emissions test was performed with EUT exercise program loaded, and the emissions were scanned between 30MHz to 1000MHz. At each frequency, the EUT was rotated 360 degrees, and the antenna was raised and lowered from 1 to 4 meters in order to determine the maximum emission levels. Measurements were taken using both HORIZONTAL and VERTICAL antenna polarization. The final test data for this test configuration is recorded in the table listed under section 4.6 of this report.

### 4.4 Corrected Amplitude and Margin Calculation

The Corrected Amplitude is calculated by adding the antenna and cable Correction Factor from the Indicated Amplitude reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Indicated Amplitude} + \text{Antenna Correction Factor} + \text{Cable Correction Factor}$$

The Margin column of the data table in section 4.6 indicates the degree of compliance with the applicable limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corrected Amplitude} - \text{Applicable Limit}$$

## 4.5 Summary of Test Results

According to the data in section 4.6, the EUT complied with the FCC Part 15 Class B standards, and had the worst margin of:

-2.6dB at 450.01MHz in the HORIZONTAL polarization at an antenna-to-EUT distance of 3 meters.

## 4.6 Radiated Emissions Test Result Data


Indicated		Antenna		Table	Correction Factor		Corrected Amplitude	FCC Part15 Class B		
Freq. (MHz)	Ampl. (dBuV/m)	Polar. (H/V)	Height (m)	Angle (deg.)	Ant. (dB)	Cable (dB)	(dBuV/m)	Limit		Margin (dB)
								(dBuV/m)	(uV/m)	
35.82	18.8	V	1.3	290	13.5	0.5	32.8	40.0	100	-7.2
39.70	20.1	V	1.3	300	13.2	0.6	33.9	40.0	100	-6.1
41.64	17.2	V	1.1	270	13.1	0.6	30.9	40.0	100	-9.1
47.46	15.6	V	1.2	330	11.3	0.7	27.6	40.0	100	-12.4
77.53	23.0	H	3.0	180	6.6	1.1	30.7	40.0	100	-9.3
86.26	18.2	V	3.2	260	8.6	1.2	28.0	40.0	100	-12.0
88.20	20.1	H	2.7	350	9.6	1.2	30.9	43.5	150	-12.6
98.87	18.5	V	1.0	280	10.4	1.3	30.2	43.5	150	-13.3
130.88	15.0	H	2.8	360	13.0	1.6	29.6	43.5	150	-13.9
138.64	15.4	H	2.4	350	15.0	1.6	32.0	43.5	150	-11.5
155.13	8.8	H	2.1	190	16.6	1.7	27.1	43.5	150	-16.4
192.75	10.6	H	2.0	160	16.0	2.1	28.7	43.5	150	-14.8
233.70	20.1	H	2.2	170	11.6	2.3	34.0	46.0	200	-12.0
299.66	17.1	H	1.7	350	15.4	2.9	35.4	46.0	200	-10.6
310.33	16.6	H	1.8	360	15.2	2.9	34.7	46.0	200	-11.3
350.10	21.3	H	1.4	330	14.2	3.0	38.5	46.0	200	-7.5
450.01	23.0	V	1.0	260	16.9	3.5	43.4	46.0	200	-2.6
650.80	16.2	H	1.5	180	20.5	4.3	41.0	46.0	200	-5.0



## Appendix A - Plot of Conducted Emissions Test Data

**LINE CONDUCTION**

**Limit: [FCC Part 15] Class B  
(0.45 ~ 30MHz)**

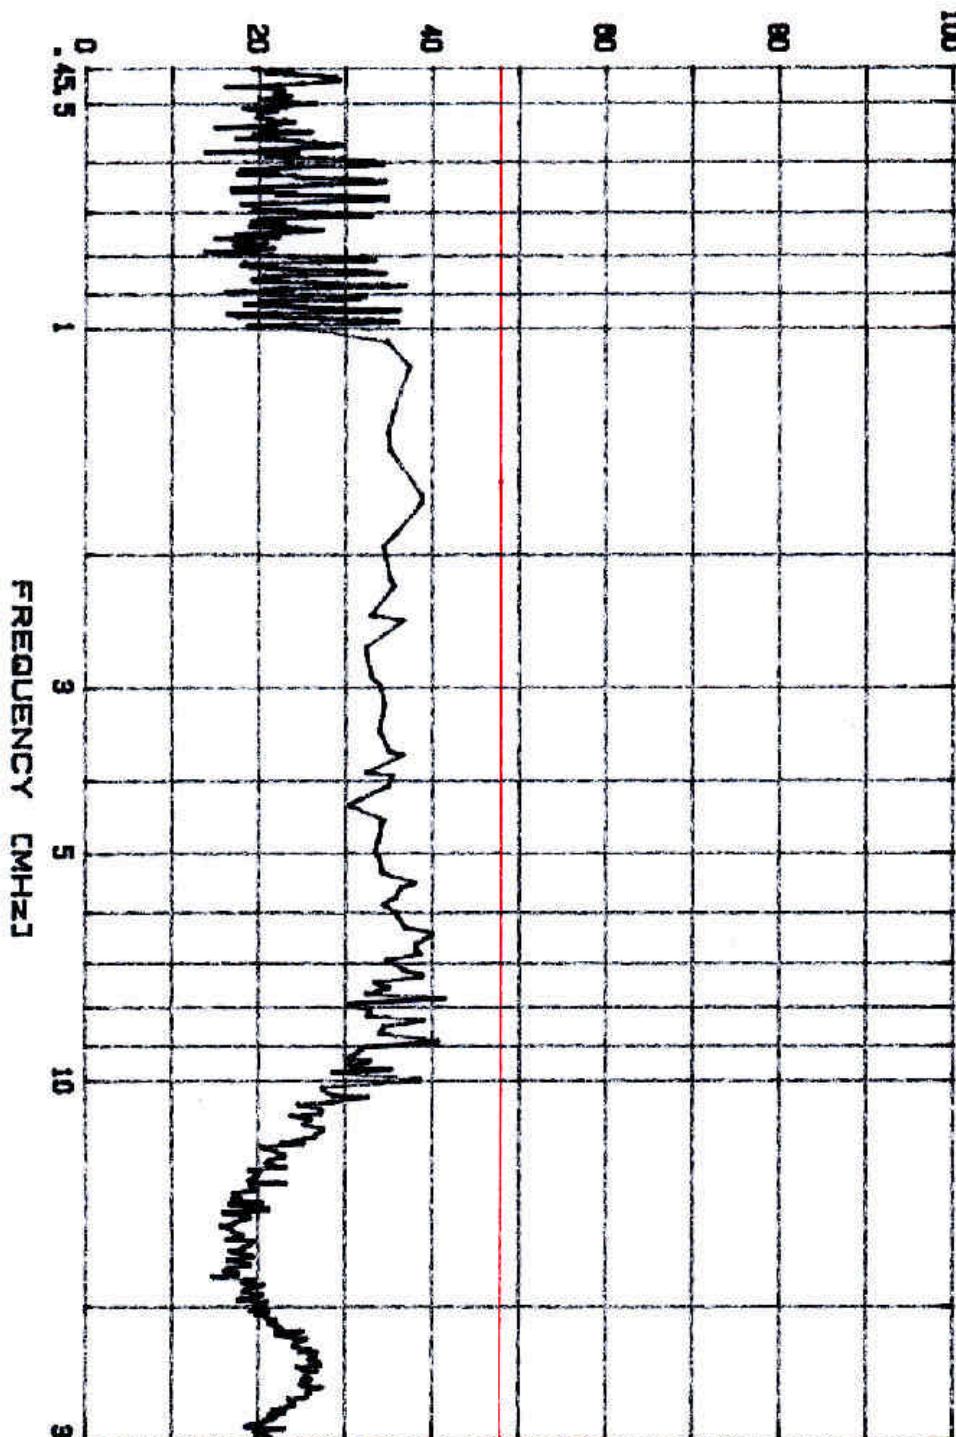


Philips Communication, Security & Imaging  
Digital Video Recording Camera

MODEL: NetCam-DVR  
PHASE: LINE

LINE CONDUCTION

Limit, [FCC Part 15] Class B  
(0.45 ~ 30MHz)

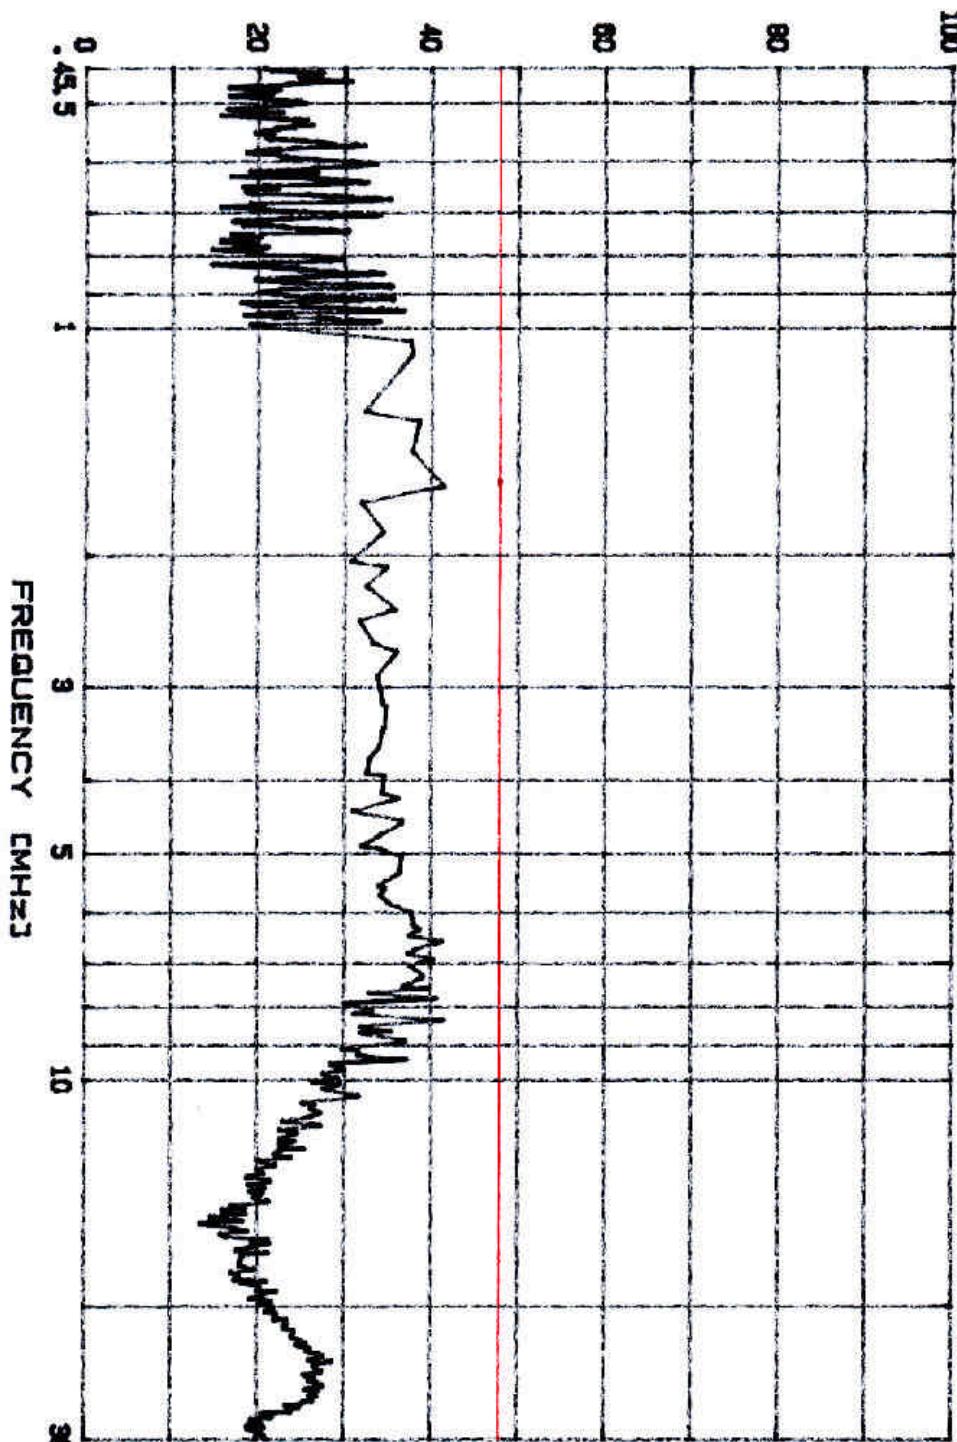

Philips Communication, Security & Imaging  
Digital Video Recording Camera

MODEL: NetCam-DVR  
PHASE: NEUTRAL



## Appendix B - EUT Schematics/Block Diagram



## Appendix C - User's Manual