


M. Flom Associates, Inc. - Global Compliance Center

3356 North San Marcos Place, Suite 107, Chandler, Arizona 85225-7176

www.mflom.com general@mflom.com (480) 926-3100, FAX: 926-3598

Date of Report: November 1, 2002
 Date of Submission: November 25, 2002

Applicant: Honeywell International Inc.
 Commercial Electronic Systems - Phoenix
 21111 N. 19th Avenue
 Phoenix, AZ 85027

Attention of: Greg Shauder, Director RF Systems

Mailing: Honeywell Inc.
 Business, Regional & General Aviation
 5353 W. Bell Road, MS 2DD80
 Glendale, AZ 85308

Attention of: Robert H. Fuller, Technical Mgr, EPIC Eng'g
 602 436 4714; FAX: -4040 M/S 2DD80
 bob.fuller@honeywell.com

Equipment: DM-855
 FCC ID: GB8DM855
 P.O. Number: Part of X305730L-06B
 FCC Rules: Radiofrequency Radiation Exposure Limits
 47 CFR 1.1310 CALCULATED REPORT
 MPE - Mobiles x Fixed Based Station _____

Gentlemen:

Enclosed please find your copy of the MPE Calculation.

Please allow from 8-12 weeks to hear from the Commission, who may request additional data or information, and even a sample for pre-grant audit testing.

Should you need any clarification, just fax or phone. Thank you again for this order - it has been a pleasure to be of service.

Sincerely yours,

Morton Flom, P. Eng.

enclosure(s)
 MF/cva



M. Flom Associates, Inc. - Global Compliance Center

3356 North San Marcos Place, Suite 107, Chandler, Arizona 85225-7176

www.mflom.com general@mflom.com (480) 926-3100, FAX: 926-3598

Date of Report: November 1, 2002
Date of Submission: November 25, 2002

Federal Communications Commission
Via: Electronic Filing

Attention: Authorization & Evaluation Division

Applicant: Honeywell Inc, Commercial Flight Systems Group
Equipment: DM-855
FCC ID: GB8DM855
FCC Rules: Radiofrequency Radiation Exposure Limits
47 CFR 1.1310
MPE - Mobiles _____ Fixed Based Station _____

Gentlemen:

On behalf of the Applicant, enclosed please find the MPE Calculation, the whole for Environmental Assessment (MPE) of the referenced equipment as shown.

We trust the same is in order. Should you need any further information, kindly contact the writer who is authorized to act as agent.

Sincerely yours,

A handwritten signature in black ink, appearing to read 'M. Flom P. Eng.' The signature is fluid and cursive, with 'M. Flom' on top and 'P. Eng.' on the line below.

Morton Flom, P. Eng.

enclosure(s)
cc: Applicant
MF/cva



M. Flom Associates, Inc. - Global Compliance Center

3356 North San Marcos Place, Suite 107, Chandler, Arizona 85225-7176

www.mflom.com general@mflom.com (480) 926-3100, FAX: 926-3598

ENVIRONMENTAL ASSESSMENT

for

MOBILES/FIXED BASE STATION

for

FCC ID: FCC ID: GB8DM855

Model:DM-855

to

FEDERAL COMMUNICATIONS COMMISSION

47 CFR 1.1310 (MPE)

Radiofrequency Radiation Exposure Limits

DATE OF REPORT: November 1, 2002

DATE OF SUBMISSION: November 25, 2002

ON THE BEHALF OF THE APPLICANT:

Honeywell International Inc.
Commercial Electronic Systems - Phoenix

AT THE REQUEST OF:

P.O. Part of X305730L-06B

Mailing:

Honeywell Inc.
Business, Regional & General Aviation
5353 W. Bell Road, MS 2DD80
Glendale, AZ 85308

Attention of:

Robert H. Fuller, Technical Mgr, EPIC Eng'g
602 436 4714; FAX: -4040 M/S 2DD80
bob.fuller@honeywell.com

SUPERVISED BY:



Morton Flom, P. Eng.

TABLE OF CONTENTS

<u>RULE</u>	<u>DESCRIPTION</u>	<u>PAGE</u>
	Test Report	1
	Identification of the Equipment Under Test	2
	Standard Test Conditions and Engineering Practices	4
1.1310	Environmental Assessment	5

PAGE NO.

1 of 5.

Required information per ISO/IEC Guide 25-1990, paragraph 13.2:

a) TEST REPORT (SUPPLEMENTAL)

b) Laboratory: M. Flom Associates, Inc.
(FCC: 31040/SIT) 3356 N. San Marcos Place, Suite 107
(Canada: IC 2044) Chandler, AZ 85225

c) Report Number: d02b0006

d) Client: Honeywell Inc, Commercial Flight Systems Group
Business and Commuter Aviation Systems
PO Box 29000
Phoenix, AZ 85038-9000

e) Identification: DM-855
Description: FCC ID: GB8DM855
UHF Pulsed L Band TRX

f) EUT Condition: Not required unless specified in individual tests.

g) Report Date: November 1, 2002
EUT Received: October 23, 2002

h, j, k): As indicated in individual tests.

i) Sampling method: No sampling procedure used.

l) Uncertainty: In accordance with MFA internal quality manual.

m) Supervised by:


Morton Flom, P. Eng.

n) Results: The results presented in this report relate only to the item tested.

o) Reproduction: This report must not be reproduced, except in full, without written permission from this laboratory.

PAGE NO.

2 of 5.

IDENTIFICATION OF THE EQUIPMENT UNDER TEST (EUT)NAME AND ADDRESS OF APPLICANT:

Honeywell International Inc.
Commercial Electronic Systems - Phoenix
21111 N. 19th Avenue
Phoenix, AZ 85027

MANUFACTURER:

Honeywell Inc.
Business, Regional & General Aviation
5353 W. Bell Road, MS 2DD80
Glendale, AZ 85308

FCC ID: GB8DM855

MODEL NO: DM-855

DESCRIPTION: UHF Pulsed L Band TRX

TYPE OF EMISSION: 1MOPON

FREQUENCY RANGE, MHz: 1025 to 1150

POWER RATING, Watts: 350 Peak Pulse
 Switchable Variable N/A

MODULATION:
 AMPS
 TDMA
 CDMA
 OTHER


ANTENNA:
 HELICAL
 MONOPOLE
 WHIP
 OTHER

NOTE: For RF Safety test antenna gain taken at the upper range of expected gain (i.e. 0 dBd) and RF Power set to highest nominal power across all channels.

PAGE NO.

3 of 5.

M. Flom Associates, Inc. is accredited by the American Association for Laboratory Association (A2LA) as shown in the scope below.

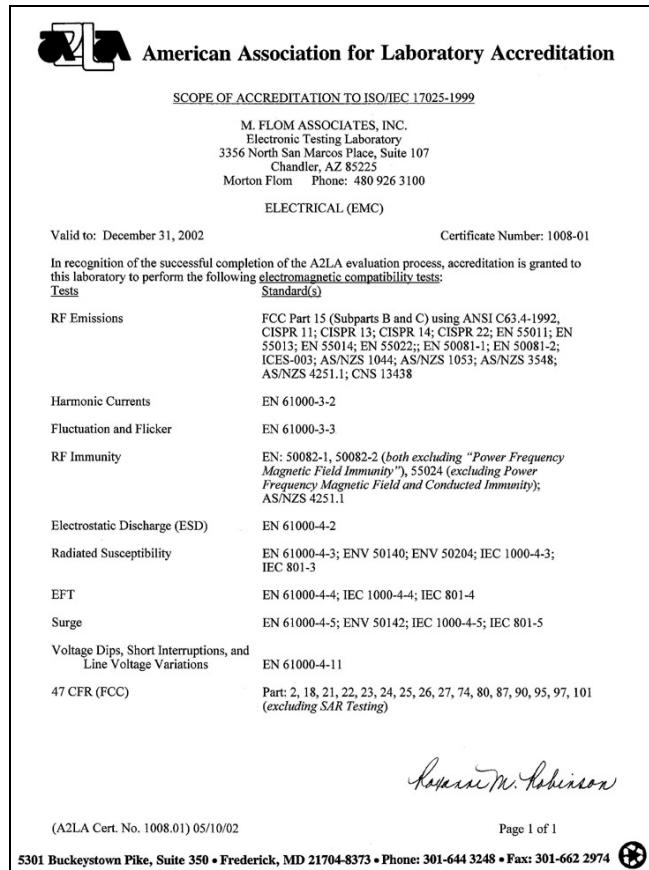

"This laboratory is accredited by the American Association for Laboratory Accreditation (A2LA) and the results shown in this report have been determined in accordance with the laboratory's terms of accreditation unless stated otherwise in the report."

Should this report contain any data for tests for which we are not accredited, or which have been undertaken by a subcontractor that is not A2LA accredited, such data would not be covered by this laboratory's A2LA accreditation.

PAGE NO.

4 of 5.

STANDARD TEST CONDITIONS
and
ENGINEERING PRACTICES

Except as noted herein, the following conditions and procedures were observed during the testing:

In accordance with ANSI C63.4-1992/2000, section 6.1.9, and unless otherwise indicated in the specific measurement results, the ambient temperature of the actual EUT was maintained within the range of 10° to 40°C (50° to 104 °F) unless the particular equipment requirements specify testing over a different temperature range. Also, unless otherwise indicated, the humidity levels were in the range of 10% to 90% relative humidity.

Prior to testing, the EUT was tuned up in accordance with the manufacturer's alignment procedures. All external gain controls were maintained at the position of maximum and/or optimum gain throughout the testing.

Measurement results, unless otherwise noted, are worst case measurements.

PAGE NO. 5 of 5.

Name of test: Environmental Assessment

Specification: FCC: 47 CFR 1.1310, 2.1091

CALCULATED:

LIMIT = 50 Watts/m² (Occupational/Controlled)

Power Conducted Average = 275 w

Power Conducted = 350 w Peak

Minimum Safe Distance (Occupational/Controlled)

$$R_m = [350 / (12.56 \times 50)]^{1/2}$$

$$= 0.747 \text{ meters (350 W, Peak)}$$

SUPERVISED BY:



Morton Flom, P. Eng.

(The following will be placed in the Instruction Manual)

MANDATORY SAFETY INSTRUCTIONS TO INSTALLERS & USERS

Use only manufacturer or dealer supplied antenna.

Antenna Minimum Safe Distance: 75 cm for 100% Duty Factor.

Antenna Gain: zero dBd referenced to a dipole.

The Federal Communications Commission has adopted a safety standard for human exposure to RF (Radio Frequency) energy which is below the OSHA (Occupational Safety and Health Act) limits.

Antenna Mounting: The antenna supplied by the manufacturer or radio dealer must not be mounted at a location such that during radio transmission, any person or persons can come closer than the above indicated minimum safe distance to the antenna i.e. 75 cm for 100% Duty Factor .

To comply with current FCC RF Exposure limits, the antenna must be installed at or exceeding the minimum safe distance shown above, and in accordance with the requirements of the antenna manufacturer or supplier.

Base Station Installation: The antenna should be fixed-mounted on an outdoor permanent structure. RF Exposure compliance must be addressed at the time of installation.

Antenna Substitution: Do not substitute any antenna for the one supplied or recommended by the manufacturer or radio dealer. You may be exposing person or persons to excess radio frequency radiation. You may contact your radio dealer or the manufacturer for further instructions.

WARNING: Maintain a separation distance from the antenna to a person(s) of at least 75 cm for 100% Duty Factor .

You, as the qualified end-user of this radio device must control the exposure conditions of bystanders to ensure the minimum separation distance (above) is maintained between the antenna and nearby persons for satisfying RF Exposure compliance. The operation of this transmitter must satisfy the requirements of Occupational/Controlled Exposure Environment, for work-related use. Transmit only when person(s) are at least the minimum distance from the properly installed, externally mounted antenna.

TESTIMONIAL
AND
STATEMENT OF CERTIFICATION

THIS IS TO CERTIFY THAT:

1. THAT the application was prepared either by, or under the direct supervision of, the undersigned.
2. THAT the technical data supplied with the application was taken under my direction and supervision.
3. THAT the data was obtained on representative units, randomly selected.
4. THAT, to the best of my knowledge and belief, the facts set forth in the application and accompanying technical data are true and correct.

CERTIFYING ENGINEER:



Morton Flom, P. Eng.