



M. Flom Associates, Inc. - Global Compliance Center

3356 North San Marcos Place, Suite 107, Chandler, Arizona 85225-7176

www.mflom.com general@mflom.com (480) 926-3100, FAX: 926-3598

Date of Report: November 22, 2002

Date of Submission: December 2, 2002

Federal Communications Commission
Via: Electronic Filing

Attention: Authorization & Evaluation Division

Applicant: Honeywell International Inc.

Commercial Electronic Systems - Phoenix

Equipment: TR-865A

FCC ID: GB8TR865A

FCC Rules: 87

Gentlemen:

On behalf of the Applicant, enclosed please find Application Form 731, Engineering Test Report and all pertinent documentation, the whole for approval of the referenced equipment as shown.

Filing fees are attached.

We trust the same is in order. Should you need any further information, kindly contact the writer who is authorized to act as agent.

Sincerely yours,

A handwritten signature in black ink, appearing to read 'M. Flom P. Eng.' The signature is fluid and cursive, with a horizontal line underneath the name.

Morton Flom, P. Eng.

enclosure(s)

cc: Applicant

MF/cva

LIST OF EXHIBITS
(FCC **CERTIFICATION** (TRANSMITTERS) - REVISED 9/28/98)

APPLICANT: Honeywell International Inc.
Commercial Electronic Systems - Phoenix

FCC ID: GB8TR865A

BY APPLICANT:

1. LETTER OF AUTHORIZATION	x
2. IDENTIFICATION DRAWINGS, 2.1033(c)(11)	
<input checked="" type="checkbox"/> LABEL	
<input checked="" type="checkbox"/> LOCATION OF LABEL	
<input checked="" type="checkbox"/> COMPLIANCE STATEMENT	
<input checked="" type="checkbox"/> LOCATION OF COMPLIANCE STATEMENT	
3. PHOTOGRAPHS, 2.1033(c)(12)	x
4. DOCUMENTATION: 2.1033(c)	
(3) USER MANUAL	x
(9) TUNE UP INFO	
(10) SCHEMATIC DIAGRAM	x
(10) CIRCUIT DESCRIPTION	x
BLOCK DIAGRAM	x
PARTS LIST	x

BY M.F.A. INC.

- A. TESTIMONIAL & STATEMENT OF CERTIFICATION
- B. STATEMENT OF QUALIFICATIONS



M. Flom Associates, Inc. - Global Compliance Center

3356 North San Marcos Place, Suite 107, Chandler, Arizona 85225-7176

www.mflom.com general@mflom.com (480) 926-3100, FAX: 926-3598

T R A N S M I T T E R C E R T I F I C A T I O N

of

FCC ID: GB8TR865A
MODEL: TR-865A

to

FEDERAL COMMUNICATIONS COMMISSION

Rule Part(s) 87

DATE OF REPORT: November 22, 2002

ON THE BEHALF OF THE APPLICANT:

Honeywell International Inc.
Commercial Electronic Systems - Phoenix

AT THE REQUEST OF:

P.O. Part of X305730L-06B

Honeywell Inc.
Business, Regional & General Aviation
5353 W. Bell Road, MS 2DD80
Glendale, AZ 85308

Attention of:

Robert H. Fuller, Technical Mgr, EPIC Eng'g
602 436 4714; FAX: -4040 M/S 2DD80
bob.fuller@honeywell.com

SUPERVISED BY:



Morton Flom, P. Eng.

THE APPLICANT HAS BEEN CAUTIONED AS TO THE FOLLOWING:

15.21 INFORMATION TO USER.

The users manual or instruction manual for an intentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

15.27(a) SPECIAL ACCESSORIES.

Equipment marketed to a consumer must be capable of complying with the necessary regulations in the configuration in which the equipment is marketed. Where special accessories, such as shielded cables and/or special connectors are required to enable an unintentional or intentional radiator to comply with the emission limits in this part, the equipment must be marketed with, i.e. shipped and sold with, those special accessories. However, in lieu of shipping or packaging the special accessories with the unintentional or intentional radiator, the responsible party may employ other methods of ensuring that the special accessories are provided to the consumer, without additional charge.

Information detailing any alternative method used to supply the special accessories for a grant of equipment authorization or retained in the verification records, as appropriate. The party responsible for the equipment, as detailed in § 2.909 of this chapter, shall ensure that these special accessories are provided with the equipment. The instruction manual for such devices shall include appropriate instructions on the first page of text concerned with the installation of the device that these special accessories must be used with the device. It is the responsibility of the user to use the needed special accessories supplied with the equipment.

TABLE OF CONTENTS

<u>RULE</u>	<u>DESCRIPTION</u>	<u>PAGE</u>
	Test Report	1
2.1033(c)	General Information Required	2
2.1033(c)(14)	Rule Summary	5
	Standard Test Conditions and Engineering Practices	6
2.1046(a)	Carrier Output Power (Conducted)	7
2.1046(a)	ERP Carrier Power (Radiated)	9
2.1051	Unwanted Emissions (Transmitter Conducted)	10
2.1053(a)	Field Strength of Spurious Radiation	13
2.1049(c)(1)	Emission Masks (Occupied Bandwidth)	17
2.1047(a)	Audio Low Pass Filter (Voice Input)	23
2.1047(a)	Audio Frequency Response	26
2.1047(b)	Modulation Limiting	28
2.1055(a)(1)	Frequency Stability (Temperature Variation)	30
2.1055(b)(1)	Frequency Stability (Voltage Variation)	33
2.202(g)	Necessary Bandwidth and Emission Bandwidth	34

PAGE NO.

1 of 34.

Required information per ISO/IEC Guide 25-1990, paragraph 13.2:

a) TEST REPORT

b) Laboratory: M. Flom Associates, Inc.
(FCC: 31040/SIT) 3356 N. San Marcos Place, Suite 107
(Canada: IC 2044) Chandler, AZ 85225

c) Report Number: d02b0059

d) Client: Honeywell Inc.
Business, Regional & General Aviation
5353 W. Bell Road, MS 2DD80
Glendale, AZ 85308

e) Identification: TR-865A
FCC ID: GB8TR865A
EUT Description: Aviation, VHF Transceiver

f) EUT Condition: Not required unless specified in individual tests.

g) Report Date: November 22, 2002
EUT Received: October 23, 2002

h, j, k): As indicated in individual tests.

i) Sampling method: No sampling procedure used.

l) Uncertainty: In accordance with MFA internal quality manual.

m) Supervised by:


Morton Flom, P. Eng.

n) Results: The results presented in this report relate only to the item tested.

o) Reproduction: This report must not be reproduced, except in full, without written permission from this laboratory.

PAGE NO.

2 of 34.

LIST OF GENERAL INFORMATION REQUIRED FOR CERTIFICATIONIN ACCORDANCE WITH FCC RULES AND REGULATIONS,
VOLUME II, PART 2 AND TO

87

Sub-part 2.1033(c)(1): NAME AND ADDRESS OF APPLICANT:

Honeywell International Inc.
Commercial Electronic Systems - Phoenix
2111 N. 19th Avenue
Phoenix, AZ 85027

MANUFACTURER:

Honeywell Inc.
Business, Regional & General Aviation
5353 W. Bell Road, MS 2DD80
Glendale, AZ 85308

(c)(2): FCC ID: GB8TR865AMODEL NO: TR-865A(c)(3): INSTRUCTION MANUAL(S):

PLEASE SEE ATTACHED EXHIBITS

(c)(4): TYPE OF EMISSION: 6K00A3E(c)(5): FREQUENCY RANGE, MHz: 118 to 135.975(c)(6): POWER RATING, Watts: 18
____ Switchable ____ Variable N/A


FCC GRANT NOTE: BM - The output power is continuously variable from the value listed in this entry to 50%-55% of the value listed.

DUT RESULTS: Passes Fails

PAGE NO.

3 of 34.

M. Flom Associates, Inc. is accredited by the American Association for Laboratory Accreditation (A2LA) as shown in the scope below.

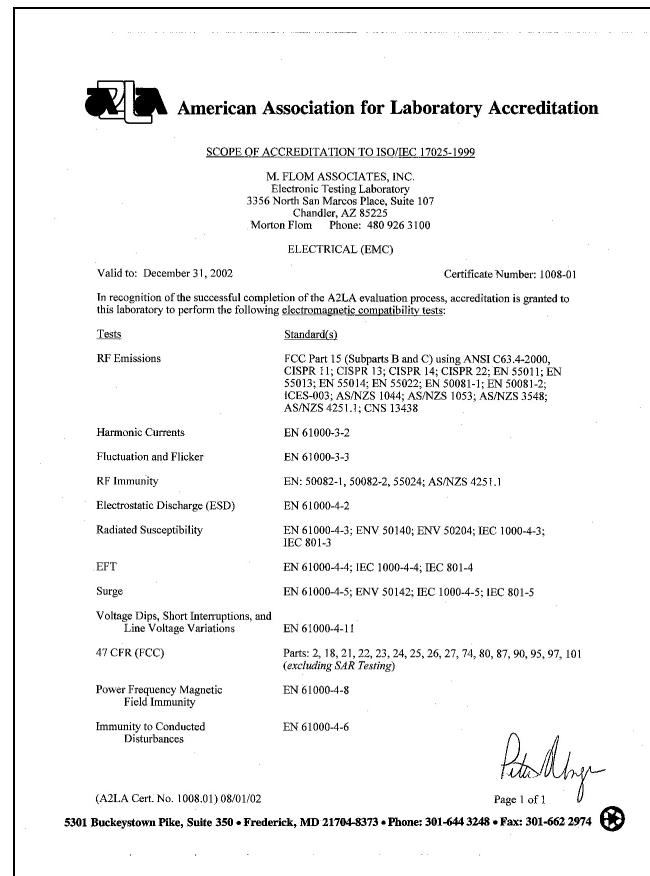

"This laboratory is accredited by the American Association for Laboratory Accreditation (A2LA) and the results shown in this report have been determined in accordance with the laboratory's terms of accreditation unless stated otherwise in the report."

Should this report contain any data for tests for which we are not accredited, or which have been undertaken by a subcontractor that is not A2LA accredited, such data would not be covered by this laboratory's A2LA accreditation.

PAGE NO.

4 of 34.

Subpart 2.1033 (continued)

(c)(8): VOLTAGES & CURRENTS IN ALL ELEMENTS IN FINAL R. F. STAGE,
INCLUDING FINAL TRANSISTOR OR SOLID STATE DEVICE:

COLLECTOR CURRENT, A = per manual
COLLECTOR VOLTAGE, Vdc = per manual
SUPPLY VOLTAGE, Vdc = 28

(c)(9): TUNE-UP PROCEDURE:

PLEASE SEE ATTACHED EXHIBITS

(c)(10): CIRCUIT DIAGRAM/CIRCUIT DESCRIPTION:

Including description of circuitry & devices provided for determining and stabilizing frequency, for suppression of spurious radiation, for limiting modulation and limiting power.

PLEASE SEE ATTACHED EXHIBITS

(c)(11): LABEL INFORMATION:

PLEASE SEE ATTACHED EXHIBITS

(c)(12): PHOTOGRAPHS:

PLEASE SEE ATTACHED EXHIBITS

(c)(13): DIGITAL MODULATION DESCRIPTION:

 ATTACHED EXHIBITS
 x N/A

(c)(14): TEST AND MEASUREMENT DATA:

FOLLOWS

PAGE NO.

5 of 34.

Sub-part

2.1033(c)(14):TEST AND MEASUREMENT DATA

All tests and measurement data shown were performed in accordance with FCC Rules and Regulations, Volume II; Part 2, Sub-part J, Sections 2.947, 2.1033(c), 2.1041, 2.1046, 2.1047, 2.1079, 2.1051, 2.1053, 2.1055, 2.1057 and the following individual Parts:

- ____ 21 - Domestic Public Fixed Radio Services
- ____ 22 - Public Mobile Services
- ____ 22 Subpart H - Cellular Radiotelephone Service
- ____ 22.901(d) - Alternative technologies and auxiliary services
- ____ 23 - International Fixed Public Radiocommunication services
- ____ 24 - Personal Communications Services
- ____ 74 Subpart H - Low Power Auxiliary Stations
- ____ 80 - Stations in the Maritime Services
- ____ 80 Subpart E - General Technical Standards
- ____ 80 Subpart F - Equipment Authorization for Compulsory Ships
- ____ 80 Subpart K - Private Coast Stations and Marine Utility Stations
- ____ 80 Subpart S - Compulsory Radiotelephone Installations for Small Passenger Boats
- ____ 80 Subpart T - Radiotelephone Installation Required for Vessels on the Great Lakes
- ____ 80 Subpart U - Radiotelephone Installations Required by the Bridge-to-Bridge Act
- ____ 80 Subpart V - Emergency Position Indicating Radiobeacons (EPIRB'S)
- ____ 80 Subpart W - Global Maritime Distress and Safety System (GMDSS)
- ____ 80 Subpart X - Voluntary Radio Installations
- x 87 - Aviation Services
- ____ 90 - Private Land Mobile Radio Services
- ____ 94 - Private Operational-Fixed Microwave Service
- ____ 95 Subpart A - General Mobile Radio Service (GMRS)
- ____ 95 Subpart C - Radio Control (R/C) Radio Service
- ____ 95 Subpart D - Citizens Band (CB) Radio Service
- ____ 95 Subpart E - Family Radio Service
- ____ 95 Subpart F - Interactive Video and Data Service (IVDS)
- ____ 97 - Amateur Radio Service
- ____ 101 - Fixed Microwave Services

PAGE NO.

6 of 34.

STANDARD TEST CONDITIONS
and
ENGINEERING PRACTICES

Except as noted herein, the following conditions and procedures were observed during the testing:

In accordance with ANSI C63.4-1992/2000 Draft, section 6.1.9, and unless otherwise indicated in the specific measurement results, the ambient temperature of the actual EUT was maintained within the range of 10° to 40°C (50° to 104 °F) unless the particular equipment requirements specify testing over a different temperature range. Also, unless otherwise indicated, the humidity levels were in the range of 10% to 90% relative humidity.

Prior to testing, the EUT was tuned up in accordance with the manufacturer's alignment procedures. All external gain controls were maintained at the position of maximum and/or optimum gain throughout the testing.

Measurement results, unless otherwise noted, are worst case measurements.

PAGE NO. 7 of 34.
NAME OF TEST: Carrier Output Power (Conducted)
SPECIFICATION: 47 CFR 2.1046(a)
GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.1
TEST EQUIPMENT: As per attached page

MEASUREMENT PROCEDURE

1. The EUT was connected to a resistive coaxial attenuator of normal load impedance, and the unmodulated output power was measured by means of an R. F. Power Meter.
2. Measurement accuracy is $\pm 3\%$.

MEASUREMENT RESULTS
(Worst case)


FREQUENCY OF CARRIER, MHz = 127.00, 118.00, 136.975

POWER SETTING	R. F. POWER, WATTS
High	18

PERFORMED BY:  Doug Noble, B.A.S. E.E.T.

TRANSMITTER POWER CONDUCTED MEASUREMENTS

TEST 1: R. F. POWER OUTPUT
 TEST 2: FREQUENCY STABILITY

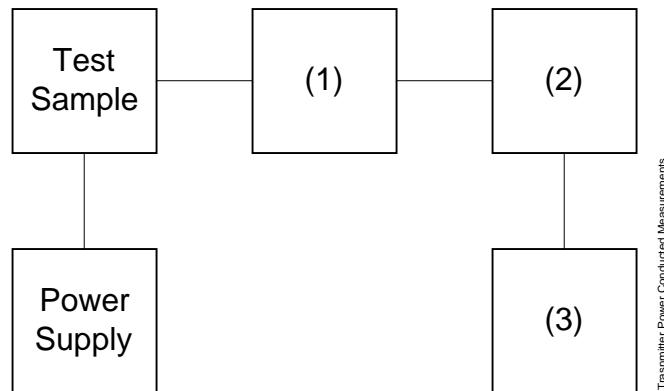

Asset Description (as applicable)	s/n
(1) <u>COAXIAL ATTENUATOR</u>	
i00122 Narda 766-10	7802
i00123 Narda 766-10	7802A
i00069 Bird 8329 (30 dB)	1006
i00113 Sierra 661A-3D	1059
(2) <u>POWER METERS</u>	
i00014 HP 435A	1733A05836
i00039 HP 436A	2709A26776
i00020 HP 8901A POWER MODE	2105A01087
(3) <u>FREQUENCY COUNTER</u>	
i00042 HP 5383A	1628A00959
i00019 HP 5334B	2704A00347
i00020 HP 8901A FREQUENCY MODE	2105A01087

PAGE NO.

9 of 34.

NAME OF TEST:

ERP Carrier Power (Radiated)


SPECIFICATION:

TIA/EIA 603A (Substitution Method)

2.2.17.1 Definition: The average radiated power of a licensed device is the equivalent power required, when delivered to a half-wave dipole or horn antenna, to produce at a distant point the same average received power as produced by the licensed device.

2.2.17.2 Method of Measurement:

a) Connect the equipment as illustrated. Place the transmitter to be tested on the turntable in the standard test site.

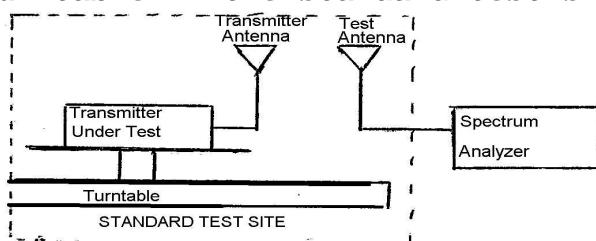

b) Raise and lower the test antenna from 1m to 6 m with the transmitter facing the antenna and record the highest received signal in dB as LVL.

c) Repeat step b) for seven additional readings at 45° interval positions of the turntable.

d) Replace the transmitter under test with a half-wave or horn vertically polarized antenna. The center of the antenna should be at the same location as the transmitter under test. Connect the antenna to a signal generator with a known output power and record the path loss in dB or LOSS.

e) Calculate the average radiated output power from the readings in step c) and d) by the following:

$$\text{average radiated power} = 10 \log_{10} \Sigma 10(\text{LVL} - \text{LOSS})/10 \text{ (dBm)}$$

	118 MHz		RESULTS		135.975 MHz	
	LVL, dbm	Path Loss, db	LVL, dbm	Path Loss, db	LVL, dbm	Path Loss, db
0°	32.9	0.6	33.4	2.9	30.1	0
45°	30.4	0.6	35.7	2.9	31.1	0
90°	31.9	0.6	36.3	2.9	31.0	0
135°	26.7	0.6	36.1	2.9	31.9	0
180°	28.5	0.6	34.3	2.9	32.3	0
225°	28.1	0.6	34.2	2.9	32.6	0
270°	31.6	0.6	33.8	2.9	30.4	0
315°	29.8	0.6	34.7	2.9	30.0	0

	118 MHz	127 MHz	135.975 MHz
Av. Radiated Power:	30.59 dbm	37.71 dbm	31.18 dbm

PAGE NO. 10 of 34.

NAME OF TEST: Unwanted Emissions (Transmitter Conducted)

SPECIFICATION: 47 CFR 2.1051

GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.13


TEST EQUIPMENT: As per attached page

MEASUREMENT PROCEDURE

1. The emissions were measured for the worst case as follows:
 - (a): within a band of frequencies defined by the carrier frequency plus and minus one channel.
 - (b): from the lowest frequency generated in the EUT and to at least the 10th harmonic of the carrier frequency, or 40 GHz, whichever is lower.
2. The magnitude of spurious emissions that are attenuated more than 20 dB below the permissible value need not be specified.
3. MEASUREMENT RESULTS: ATTACHED FOR WORST CASE

FREQUENCY OF CARRIER, MHz = 127.00, 118.00, 136.975
SPECTRUM SEARCHED, GHz = 0 to 10 x F_c
MAXIMUM RESPONSE, Hz = 200
ALL OTHER EMISSIONS = \geq 20 dB BELOW LIMIT

PERFORMED BY:



Doug Noble, B.A.S. E.E.T.

PAGE NO.

11 of 34.

TRANSMITTER SPURIOUS EMISSION

TEST A. OCCUPIED BANDWIDTH (IN-BAND SPURIOUS)
 TEST B. OUT-OF-BAND SPURIOUS

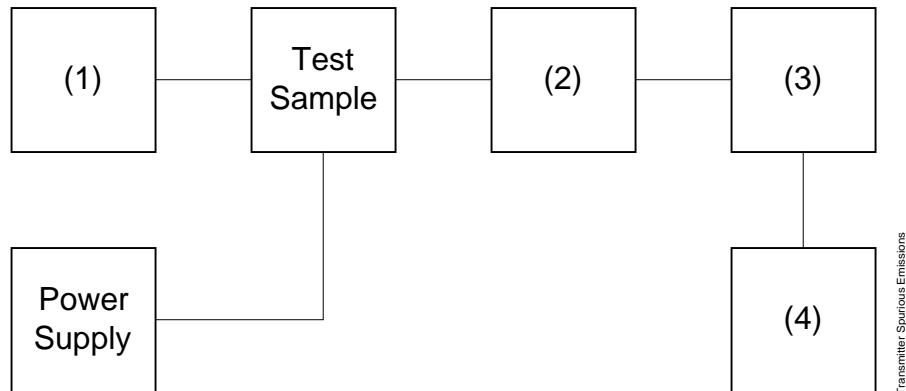

Asset Description (as applicable)	s/n
(1) <u>AUDIO OSCILLATOR/GENERATOR</u>	
i00010 HP 204D	1105A04683
i00017 HP 8903A	2216A01753
i00012 HP 3312A	1432A11250
(2) <u>COAXIAL ATTENUATOR</u>	
i00122 Narda 766-10	7802
i00123 Narda 766-10	7802A
i00069 Bird 8329 (30 dB)	1006
i00113 Sierra 661A-3D	1059
(3) <u>FILTERS; NOTCH, HP, LP, BP</u>	
i00126 Eagle TNF-1	100-250
i00125 Eagle TNF-1	50-60
i00124 Eagle TNF-1	250-850
(4) <u>SPECTRUM ANALYZER</u>	
i00048 HP 8566B	2511A01467

PAGE NO.

12 of 34.

NAME OF TEST:

Unwanted Emissions (Transmitter Conducted)

LIMIT(S), dBc

-(43+10xLOG P) = -60.8 (60 Watts)

STATE: 2:High Power g02a0070: 2002-Oct-29 Tue 13:31:00

FREQUENCY TUNED, MHz	FREQUENCY EMISSION, MHz	LEVEL, dBm	LEVEL, dBc	MARGIN, dB
118.000000	235.780100	-33.7	-76.3	-20.7
127.000000	254.051100	-34.4	-77	-21.4
135.975000	272.011100	-33.9	-76.5	-20.9
118.000000	354.013000	-33.6	-76.2	-20.6
127.000000	380.884800	-33.4	-76	-20.4
135.975000	407.919500	-32.4	-75	-19.4
118.000000	471.913900	-32.4	-75	-19.4
127.000000	507.871800	-33.9	-76.5	-20.9
135.975000	544.088800	-33.8	-76.4	-20.8
118.000000	590.232400	-33.2	-75.8	-20.2
127.000000	635.015500	-33.6	-76.2	-20.6
135.975000	679.823900	-32.7	-75.3	-19.7
118.000000	708.232400	-33.8	-76.4	-20.8
127.000000	761.839200	-33.3	-75.9	-20.3
135.975000	816.094400	-33.5	-76.1	-20.5
118.000000	825.863300	-34.1	-76.7	-21.1
127.000000	888.751600	-33.8	-76.4	-20.8
118.000000	944.197300	-32.2	-74.8	-19.2
135.975000	952.041800	-33.1	-75.7	-20.1
127.000000	1016.041100	-33	-75.6	-20
118.000000	1061.802700	-32.5	-75.1	-19.5
135.975000	1087.832100	-33.2	-75.8	-20.2
127.000000	1142.974500	-33.2	-75.8	-20.2
118.000000	1180.051600	-33.6	-76.2	-20.6
135.975000	1223.653300	-32.3	-74.9	-19.3
127.000000	1269.791200	-32.7	-75.3	-19.7
118.000000	1298.090600	-33.8	-76.4	-20.8
135.975000	1359.655800	-33.6	-76.2	-20.6
127.000000	1397.064100	-33.8	-76.4	-20.8
118.000000	1415.825700	-31.7	-74.3	-18.7
135.975000	1495.955900	-32.9	-75.5	-19.9
127.000000	1524.203300	-32.2	-74.8	-19.2
118.000000	1533.901800	-33.2	-75.8	-20.2
135.975000	1631.531700	-32.8	-75.4	-19.8
127.000000	1650.908400	-33.6	-76.2	-20.6
118.000000	1652.135700	-32	-74.6	-19
135.975000	1767.824200	-33.6	-76.2	-20.6
118.000000	1769.995500	-33	-75.6	-20
127.000000	1777.880800	-32.4	-75	-19.4
135.975000	1903.640000	-32.1	-74.7	-19.1
127.000000	1904.788200	-32.9	-75.5	-19.9
135.975000	2039.623500	-32	-74.6	-19

PERFORMED BY:

Doug Noble, B.A.S. E.E.T.

PAGE NO. 13 of 34.

NAME OF TEST: Field Strength of Spurious Radiation

SPECIFICATION: 47 CFR 2.1053(a)


GUIDE: ANSI/TIA/EIA-603-1992/2001, Paragraph 1.2.12 and Table 16, 47 CFR 22.917

MEASUREMENT PROCEDURE

1.2.12.1 Definition: Radiated spurious emissions are emissions from the equipment when transmitting into a non-radiating load on a frequency or frequencies which are outside an occupied band sufficient to ensure transmission of information of required quality for the class of communications desired.

1.2.12.2 Method of Measurement

- A) Connect the equipment as illustrated
- B) Adjust the spectrum analyzer for the following settings:
 - 1) Resolution Bandwidth 100 kHz (<1 GHZ), 1 MHZ (> 1GHz).
 - 2) Video Bandwidth \geq 3 times Resolution Bandwidth, or 30 kHz (22.917)
 - 3) Sweep Speed \leq 2000 Hz/second
 - 4) Detector Mode = Mean or Average Power
- C) Place the transmitter to be tested on the turntable in the standard test site. The transmitter is transmitting into a non-radiating load which is placed on the turntable. The RF cable to this load should be of minimum length.

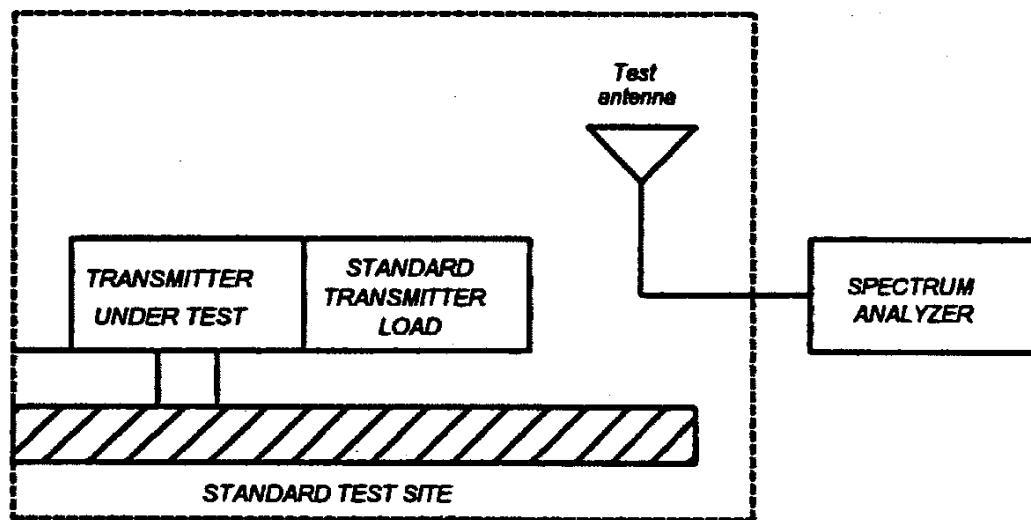

PAGE NO.


14 of 34.

NAME OF TEST: Field Strength of Spurious Radiation (Cont.)

D) For each spurious measurement the test antenna should be adjusted to the correct length for the frequency involved. This length may be determined from a calibration ruler supplied with the equipment. Measurements shall be made from the lowest radio frequency generated in the equipment to the tenth harmonic of the carrier, except for the region close to the carrier equal to \pm the test bandwidth (see section 1.3.4.4).

E) For each spurious frequency, raise and lower the test antenna from 1 m to 4 m to obtain a maximum reading on the spectrum analyzer with the test antenna at horizontal polarity. Repeat this procedure to obtain the highest possible reading. Record this maximum reading.

F) Repeat step E) for each spurious frequency with the test antenna polarized vertically.

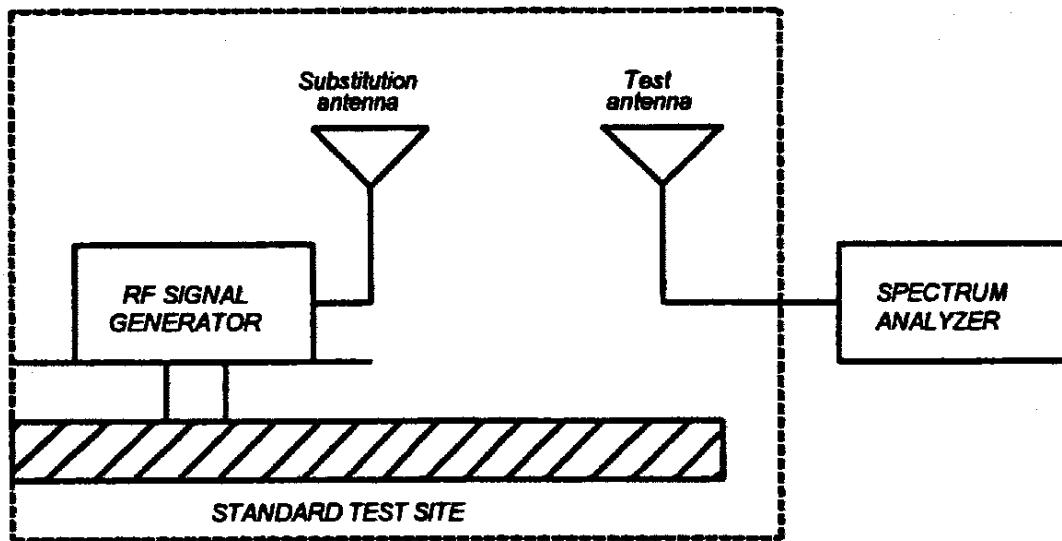

G) Reconnect the equipment as illustrated.

H) Keep the spectrum analyzer adjusted as in step B).

I) Remove the transmitter and replace it with a substitution antenna (the antenna should be half-wavelength for each frequency involved). The center of the substitution antenna should be approximately at the same location as the center of the transmitter. At lower frequencies, where the substitution antenna is very long, this will be impossible to achieve when the antenna is polarized vertically. In such case the lower end of the antenna should be 0.3 m above the ground.

PAGE NO.

15 of 34.

NAME OF TEST: Field Strength of Spurious Radiation (Cont.)

J) Feed the substitution antenna at the transmitter end with a signal generator connected to the antenna by means of a non-radiating cable. With the antennas at both ends horizontally polarized and with the signal generator tuned to a particular spurious frequency, raise and lower the test antenna to obtain a maximum reading at the spectrum analyzer. Adjust the level of the signal generator output until the previously recorded maximum reading for this set of conditions is obtained. This should be done carefully repeating the adjustment of the test antenna and generator output.

K) Repeat step J) with both antennas vertically polarized for each spurious frequency.

L) Calculate power in dBm into a reference ideal half-wave dipole antenna by reducing the readings obtained in steps J) and K) by the power loss in the cable between the generator and the antenna and further corrected for the gain of the substitution antenna used relative to an ideal half-wave dipole antenna.

M) The levels recorded in step L) are absolute levels of radiated spurious emissions in dBm. The radiated spurious emissions in dB can be calculated by the following:

Radiated spurious emissions dB =
 $10\log_{10}(\text{TX power in watts}/0.001) - \text{the levels in step 1})$

NOTE: It is permissible that other antennas provided can be referenced to a dipole.

Test Equipment:

Asset Description (as applicable)	s/n	Cycle	Last Cal
Per ANSI C63.4-1992/2000 Draft, 10.1.4			
<u>TRANSDUCER</u>			
i00088 EMCO 3109-B 25MHz-300MHz	2336	12 mo.	Sep-02
i00065 EMCO 3301-B Active Monopole	2635	12 mo.	Sep-02
i00089 Aprel 2001 200MHz-1GHz	001500	12 mo.	Sep-02
i00103 EMCO 3115 1GHz-18GHz	9208-3925	12 mo.	Sep-02
<u>AMPLIFIER</u>			
i00028 HP 8449A	2749A00121	12 mo.	Mar-02
<u>SPECTRUM ANALYZER</u>			
i00029 HP 8563E	3213A00104	12 mo.	Jan-02
i00033 HP 85462A	3625A00357	12 mo.	Jan-02
i00048 HP 8566B	2511AD1467	6 mo.	Jan-02
<u>MICROPHONE, ANTENNA PORT, AND CABLING</u>			
Microphone	Yes	Cable Length	1.0 Meters
Antenna Port Terminated	Yes	Antenna Gain	≥ 0 dBd
All Ports Terminated by Load	N/A	Peripheral	N/A

PAGE NO.

16 of 34.

NAME OF TEST: Field Strength of Spurious Radiation
 g02a0061: 2002-Oct-24 Thu 11:28:00
 STATE: 2:High Power

FREQUENCY TUNED, MHz	FREQUENCY EMISSION, MHz	ERP, dBm	ERP, dbc
127.000000	253.998800	-13.8	≤ -56.4
127.000000	381.000000	-38	≤ -56.4
127.000000	508.000000	-54.8	≤ -56.4
127.000000	635.005000	-42.3	≤ -56.4
127.000000	762.052500	-52.5	≤ -56.4
127.000000	889.026300	-46	≤ -56.4
127.000000	1016.158800	-49.1	≤ -56.4
127.000000	1143.013800	-47.4	≤ -56.4
127.000000	1269.933800	-46.9	≤ -56.4

SUPERVISED BY:


 Doug Noble, B.A.S. E.E.T.

PAGE NO. 17 of 34.

NAME OF TEST: Emission Masks (Occupied Bandwidth)

SPECIFICATION: 47 CFR 2.1049(c)(1)

GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.11

TEST EQUIPMENT: As per previous page


MEASUREMENT PROCEDURE

1. The EUT and test equipment were set up as shown on the following page, with the Spectrum Analyzer connected.
2. For EUTs supporting audio modulation, the audio signal generator was adjusted to the frequency of maximum response and with output level set for $\pm 2.5/\pm 1.25$ kHz deviation (or 50% modulation). With level constant, the signal level was increased 16 dB.
3. For EUTs supporting digital modulation, the digital modulation mode was operated to its maximum extent.
4. The Occupied Bandwidth was measured with the Spectrum Analyzer controls set as shown on the test results.
5. MEASUREMENT RESULTS: ATTACHED

PAGE NO.

18 of 34.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
 g02a0063: 2002-Oct-29 Tue 11:45:00
 STATE: 2:High Power

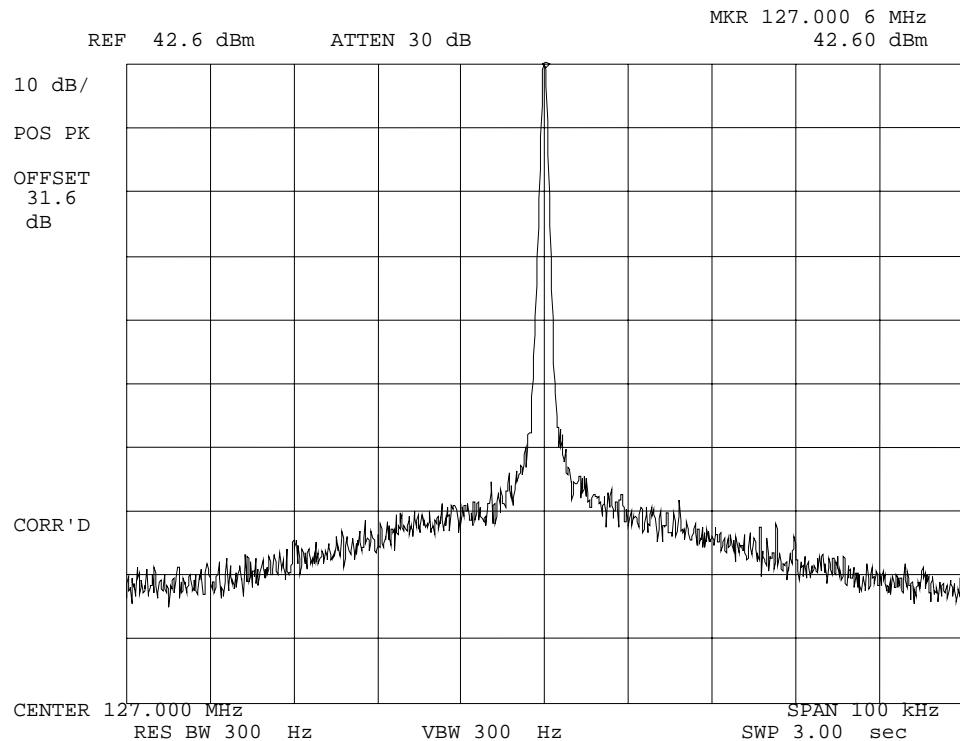

POWER: HIGH
 MODULATION: NONE

PERFORMED BY:




Doug Noble, B.A.S. E.E.T.

PAGE NO.

19 of 34.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
 g02a0064: 2002-Oct-29 Tue 12:14:00
 STATE: 2:High Power

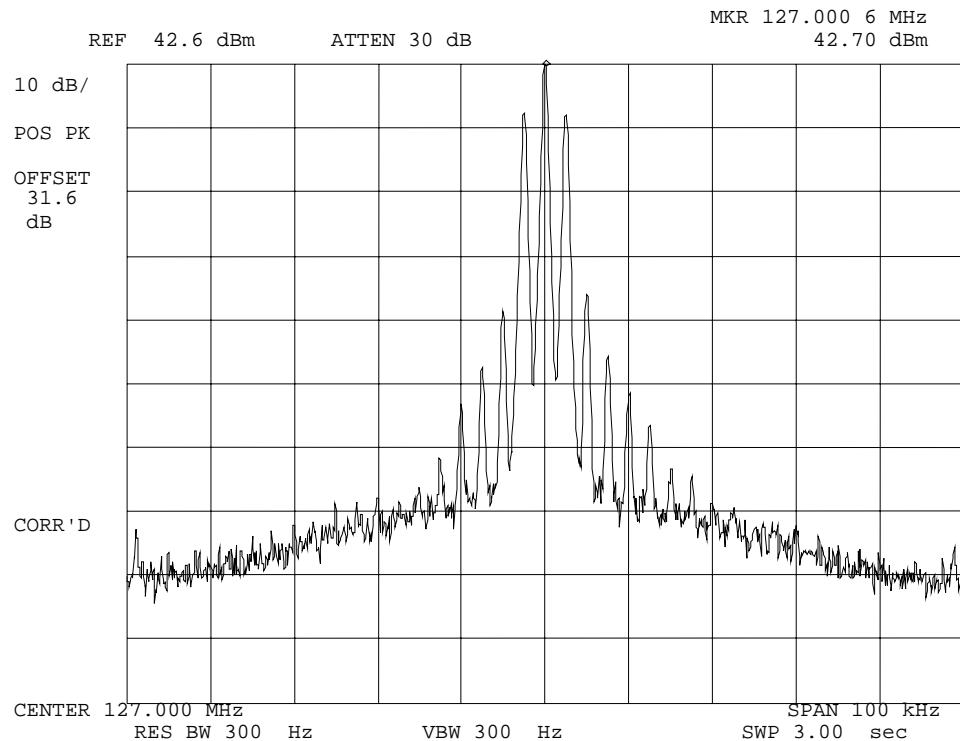

POWER:
 MODULATION:

HIGH
 VOICE: 2500 Hz SINE WAVE
 MAX MODULATION @ 79.8%


PERFORMED BY:


 Doug Noble, B.A.S. E.E.T.

PAGE NO.

20 of 34.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
 g02a0065: 2002-Oct-29 Tue 12:15:00
 STATE: 2:High Power

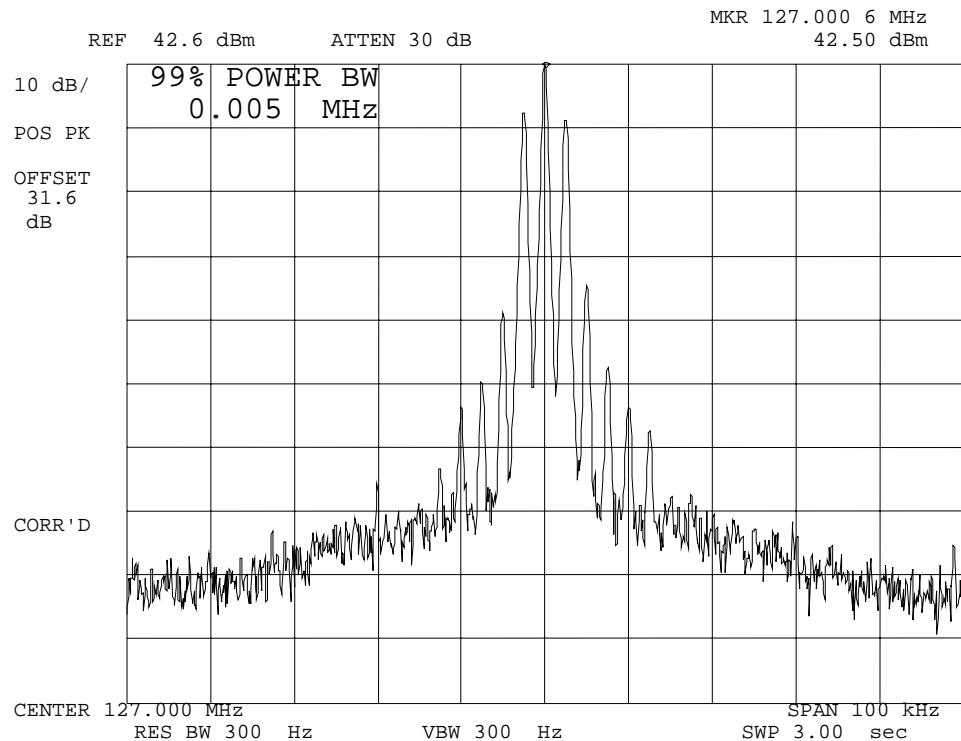

POWER:
 MODULATION:

HIGH
 VOICE: 2500 Hz SINE WAVE
 99 % POWER BANDWIDTH


PERFORMED BY:


 Doug Noble, B.A.S. E.E.T.

PAGE NO.

21 of 34.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
 g02a0066: 2002-Oct-29 Tue 12:17:00
 STATE: 2:High Power

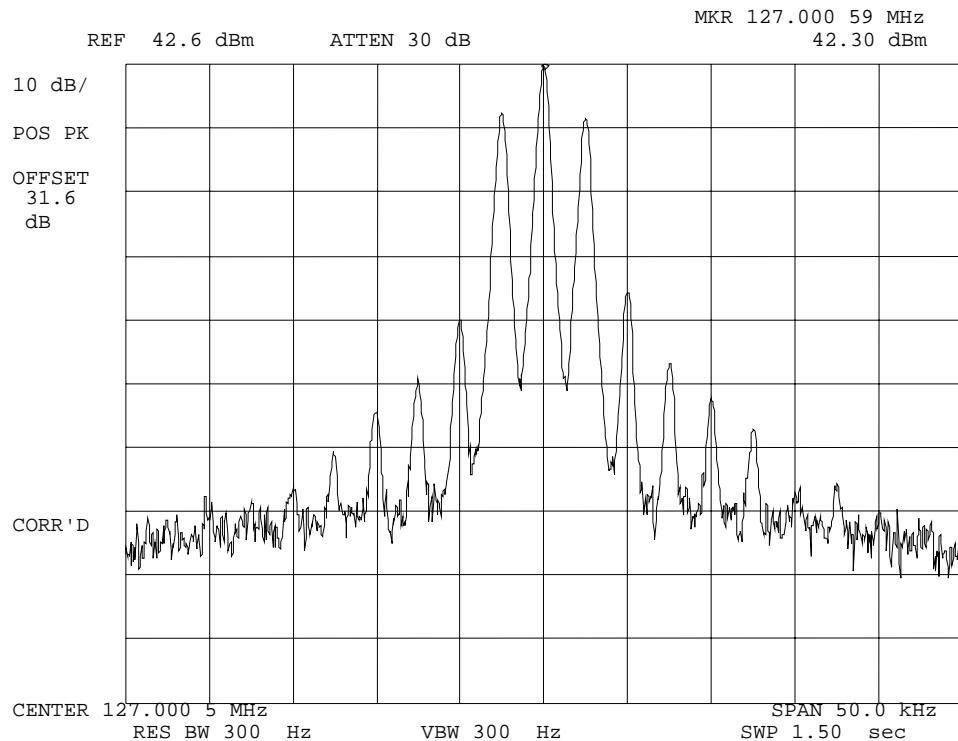

POWER:
 MODULATION:

HIGH
 VOICE: 2500 Hz SINE WAVE
 MAX MODULATION @ 79.8 %


PERFORMED BY:

Doug Noble, B.A.S. E.E.T.

PAGE NO.

22 of 34.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
 g02a0067: 2002-Oct-29 Tue 12:18:00
 STATE: 2:High Power

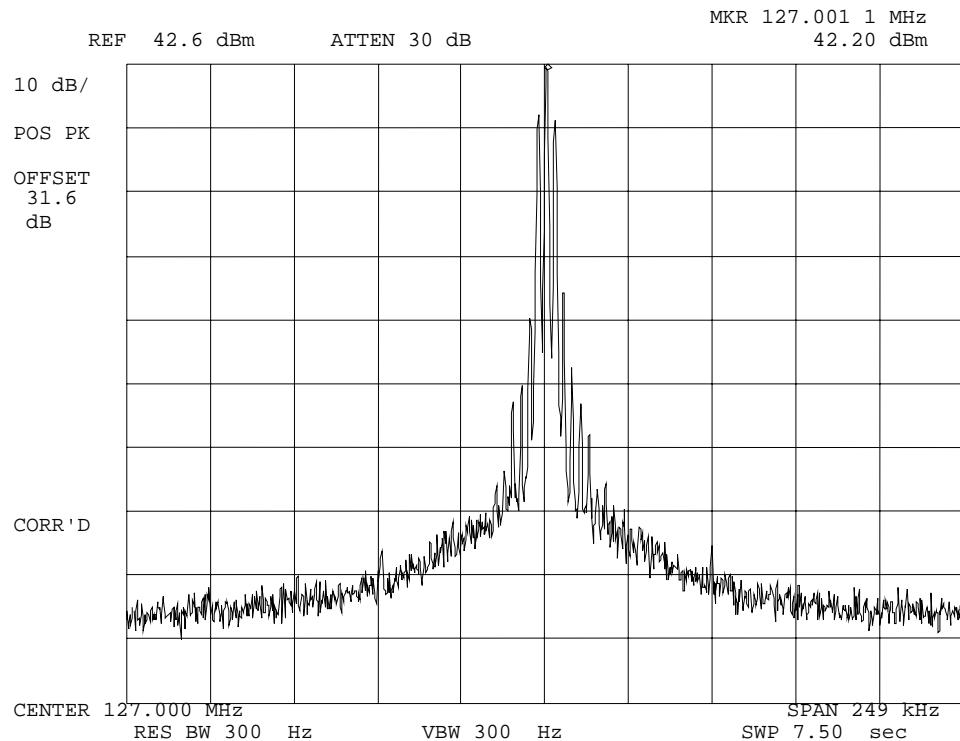

POWER:
 MODULATION:

HIGH
 VOICE: 2500 Hz SINE WAVE
 MAX MODULATION @ 79.8 %

PERFORMED BY:


 Doug Noble, B.A.S. E.E.T.

PAGE NO. 23 of 34.

NAME OF TEST: Audio Low Pass Filter (Voice Input)

SPECIFICATION: 47 CFR 2.1047(a)

GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.15

TEST EQUIPMENT: As per attached page

MEASUREMENT PROCEDURE


1. The EUT and test equipment were set up such that the audio input was connected at the input to the modulation limiter, and the modulated stage.
2. The audio output was connected at the output to the modulated stage.
3. MEASUREMENT RESULTS: ATTACHED

PAGE NO.

24 of 34.

TRANSMITTER TEST SET-UP

TEST A. MODULATION CAPABILITY/DISTORTION
 TEST B. AUDIO FREQUENCY RESPONSE
 TEST C. HUM AND NOISE LEVEL
 TEST D. RESPONSE OF LOW PASS FILTER
 TEST E. MODULATION LIMITING

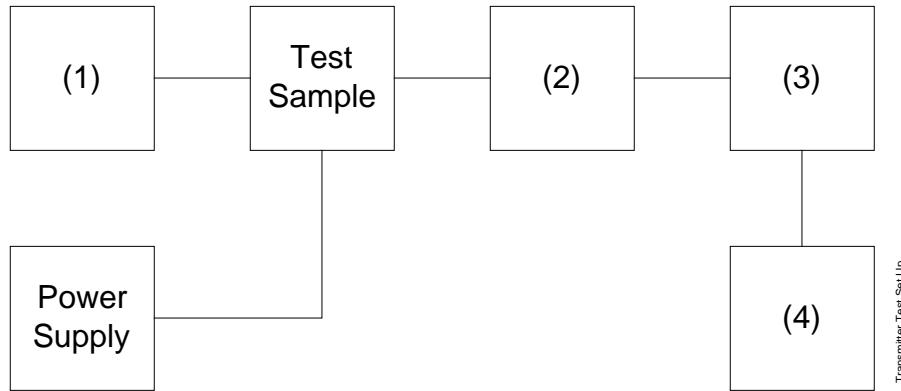


Asset (as applicable)	Description	s/n
(1) <u>Audio Oscillator</u>		
i00010	HP 204D	1105A04683
i00017	HP 8903A	2216A01753
i00118	HP 33120A	US36002064
(2) <u>COAXIAL ATTENUATOR</u>		
i00122	NARDA 766-10	7802
i00123	NARDA 766-10	7802A
i00113	SIERRA 661A-3D	1059
i00069	BIRD 8329 (30 dB)	10066
(3) <u>MODULATION ANALYZER</u>		
i00020	HP 8901A	2105A01087
(4) <u>AUDIO ANALYZER</u>		
i00017	HP 8903A	2216A01753

PAGE NO.

25 of 34.

NAME OF TEST: Audio Low Pass Filter (Voice Input)
g02a0031: 2002-Oct-29 Tue 11:08:00
STATE: 0:General

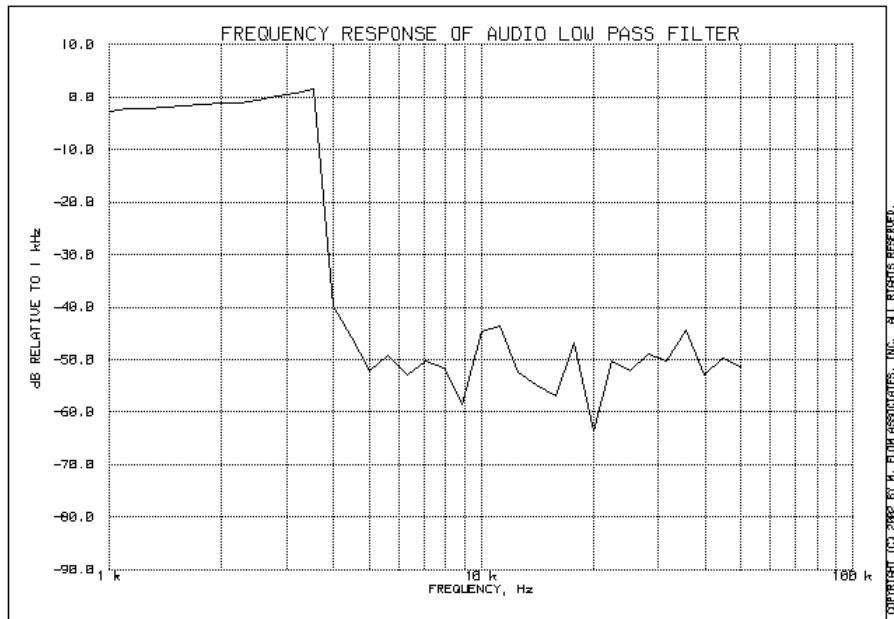

PERFORMED BY:



Doug Noble, B.A.S. E.E.T.

PAGE NO. 26 of 34.

NAME OF TEST: Audio Frequency Response

SPECIFICATION: 47 CFR 2.1047(a)

GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.6

TEST EQUIPMENT: As per previous page


MEASUREMENT PROCEDURE

1. The EUT and test equipment were set up as shown on the following page.
2. The audio signal generator was connected to the audio input circuit/microphone of the EUT.
3. The audio signal input was adjusted to obtain 20% modulation at 1 kHz, and this point was taken as the 0 dB reference level.
4. With input levels held constant and below limiting at all frequencies, the audio signal generator was varied from 100 Hz to 50 kHz.
5. The response in dB relative to 1 kHz was then measured, using the HP 8901A Modulation Analyzer.
6. MEASUREMENT RESULTS: ATTACHED

PAGE NO.

27 of 34.

NAME OF TEST: Audio Frequency Response
 g02a0027: 2002-Oct-29 Tue 11:00:00
 STATE: 0:General

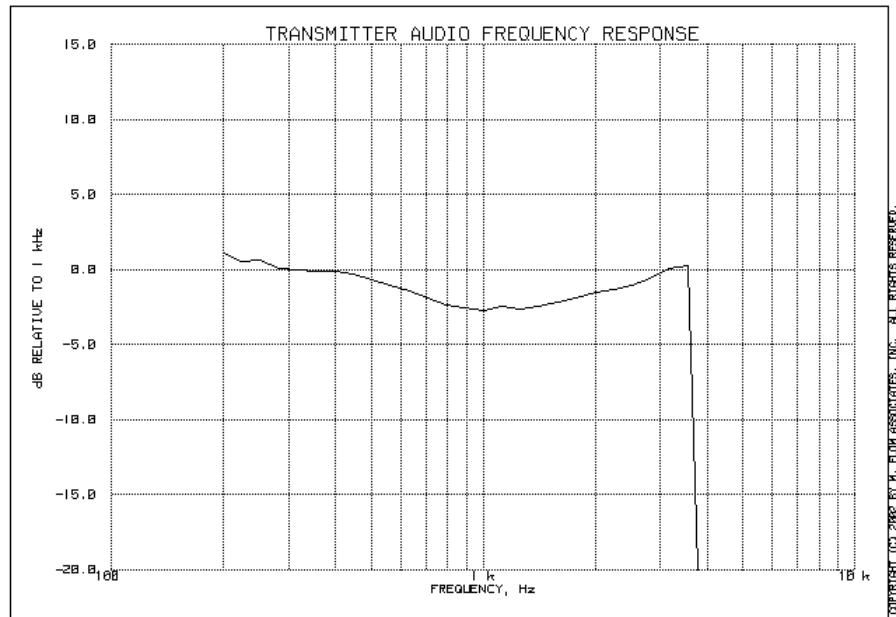

Frequency of Maximum Audio Response, Hz = 200

Additional points:

FREQUENCY, Hz	LEVEL, dB
300	-3.31
20000	-49.35
30000	-52.52
50000	-45.11

PERFORMED BY:


 Doug Noble, B.A.S. E.E.T.

PAGE NO. 28 of 34.

NAME OF TEST: Modulation Limiting

SPECIFICATION: 47 CFR 2.1047(b)

GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.3

TEST EQUIPMENT: As per previous page

MEASUREMENT PROCEDURE


1. The signal generator was connected to the input of the EUT as for "Frequency Response of the Modulating Circuit."
2. The modulation response was measured for each of three frequencies (one of which was the frequency of maximum response), and the input voltage was varied and was observed on an HP 8901A Modulation Analyzer.
3. The input level was varied from 30% modulation (± 1.5 kHz deviation) to at least 20 dB higher than the saturation point.
4. Measurements were performed for both negative and positive modulation and the respective results were recorded.
5. MEASUREMENT RESULTS: ATTACHED

PAGE NO.


29 of 34.

NAME OF TEST: Modulation Limiting
g02a0021: 2002-Oct-29 Tue 10:36:00
STATE: 0:General

Positive Peaks:

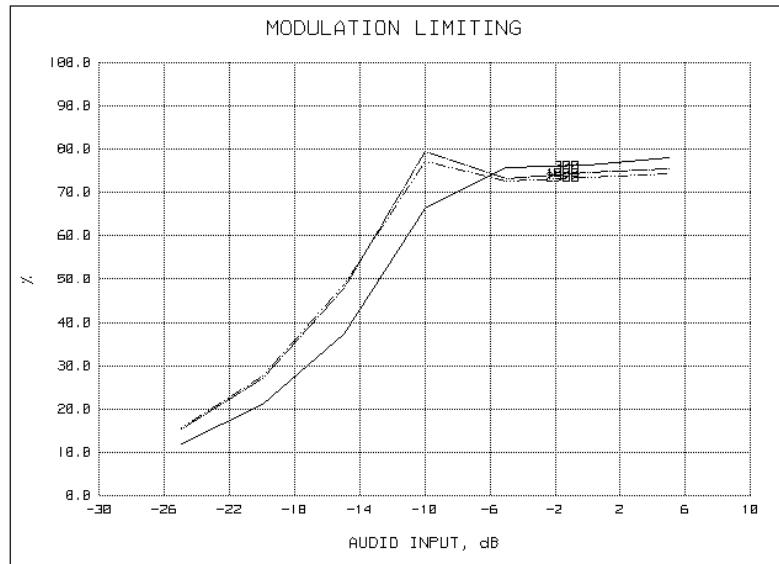

Negative Peaks:

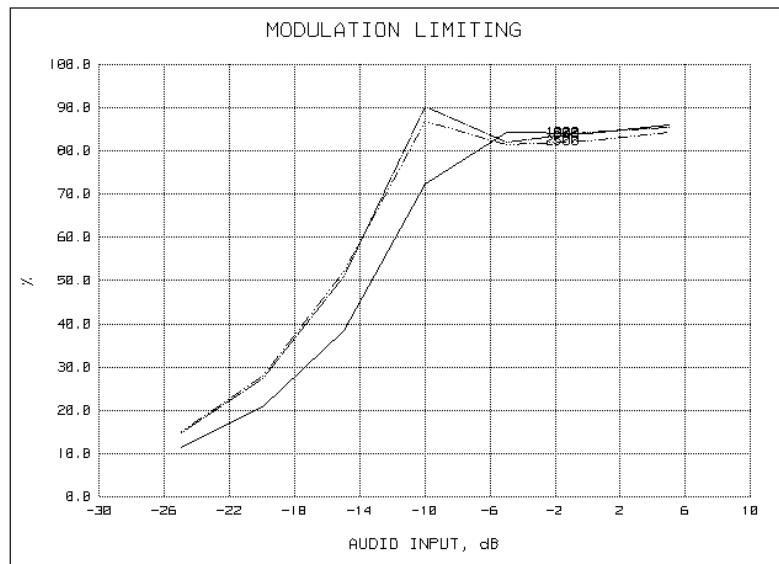

PERFORMED BY:


Doug Noble, B.A.S. E.E.T.

PAGE NO. 30 of 34.

NAME OF TEST: Frequency Stability (Temperature Variation)

SPECIFICATION: 47 CFR 2.1055(a)(1)

GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.2

TEST CONDITIONS: As Indicated


TEST EQUIPMENT: As per previous page

MEASUREMENT PROCEDURE

1. The EUT and test equipment were set up as shown on the following page.
2. With all power removed, the temperature was decreased to -30°C and permitted to stabilize for three hours. Power was applied and the maximum change in frequency was noted within one minute.
3. With power OFF, the temperature was raised in 10°C steps. The sample was permitted to stabilize at each step for at least one-half hour. Power was applied and the maximum frequency change was noted within one minute.
4. The temperature tests were performed for the worst case.
5. MEASUREMENT RESULTS: ATTACHED

PAGE NO.

31 of 34.

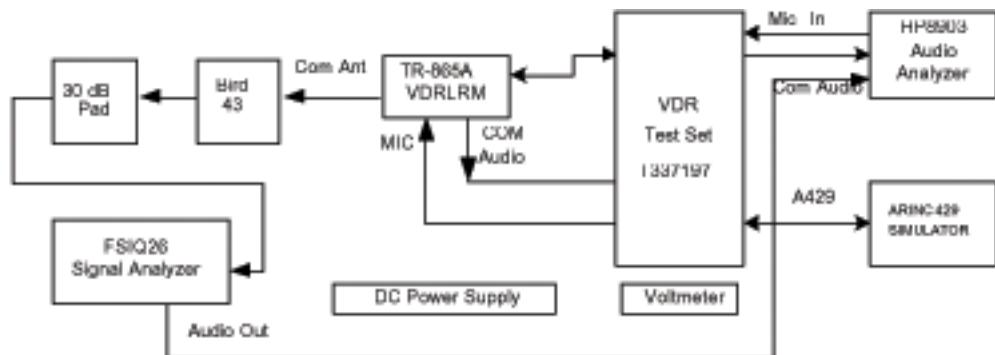TRANSMITTER TEST SET-UPTEST EQUIPMENT

Record of calibration data for all equipment used for this test.

Description	Model No.	ID No.	Calibration Due Date
VDR Test Set	T337197	1	N/R
Power Meter	Bird 43	AV01764	June 7, 2003
Signal Analyzer	FSIQ-26	D400973	Dec 11, 2002
Power Supply	NJE RVC 36-15	AV01779	N/R
Voltmeter	Fluke 123	AV3814	Jan 8, 2003
Audio Analyzer	HP8903	TE3011A11381	January 16, 2003
ARINC Simulator	Data Trac 400H	D14106A	June 19, 2003

PAGE NO.

32 of 34.

NAME OF TEST:

Frequency Stability (Temperature Variation)

STATE:

Test Data Taken at 28 VDC Input

Test Frequency (MHz)	Chamber Temp	Measured Frequency (MHz)	Frequency Error (Hz)	Test Limit 0.0005% Hz
118.000	-20°C	118.000102	102	590 Hz
	20°C	118.000217	217	590 Hz
	55°C	118.000190	190	590 Hz
127.000	-20°C	127.000100	100	635 Hz
	20°C	127.000242	242	635 Hz
	55°C	127.000205	205	635 Hz
136.975	-20°C	136.975083	83	685 Hz
	20°C	136.975254	254	685 Hz
	55°C	136.975211	211	685 Hz

PAGE NO. 33 of 34.NAME OF TEST: Frequency Stability (Voltage Variation)SPECIFICATION: 47 CFR 2.1055(d)(1)GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.2TEST EQUIPMENT: As per previous pageMEASUREMENT PROCEDURE

1. The EUT was placed in a temperature chamber at $25\pm5^{\circ}\text{C}$ and connected as for "Frequency Stability - Temperature Variation" test.
2. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.

Test Data Taken at 25°C

Test Frequency (MHz)	Supply Voltage (V)	Measured Frequency (MHz)	Frequency Error (Hz)	Test Limit 0.0005% Hz
118.000	18.0	118.000217	217	590 Hz
	22.4	118.000217	217	590 Hz
	23.8	118.000217	217	590 Hz
	28.0	118.000218	218	590 Hz
	32.2	118.000218	218	590 Hz
127.000	18.0	127.000233	233	635 Hz
	22.4	127.000233	233	635 Hz
	23.8	127.000233	233	635 Hz
	28.0	127.000238	238	635 Hz
	32.2	127.000237	237	635 Hz
136.975	18.0	136.975255	255	685 Hz
	22.4	136.975254	254	685 Hz
	23.8	136.975254	254	685 Hz
	28.0	136.975254	254	685 Hz
	32.2	136.975256	256	685 Hz

PAGE NO. 34 of 34.

NAME OF TEST: Necessary Bandwidth and Emission Bandwidth

SPECIFICATION: 47 CFR 2.202(g)

MODULATION = 6K00A3E

NECESSARY BANDWIDTH CALCULATION:

MAXIMUM MODULATION (M), kHz	= 0.206
MAXIMUM DEVIATION (D), kHz	= 3
CONSTANT FACTOR (K)	= 1
NECESSARY BANDWIDTH (B _N), kHz	= (2xM)+(2xDxK)
	= 6.4

PERFORMED BY:



Doug Noble, B.A.S. E.E.T.

END OF TEST REPORT

TESTIMONIAL
AND
STATEMENT OF CERTIFICATION

THIS IS TO CERTIFY THAT:

1. THAT the application was prepared either by, or under the direct supervision of, the undersigned.
2. THAT the technical data supplied with the application was taken under my direction and supervision.
3. THAT the data was obtained on representative units, randomly selected.
4. THAT, to the best of my knowledge and belief, the facts set forth in the application and accompanying technical data are true and correct.

CERTIFYING ENGINEER:



Morton Flom, P. Eng.