



FCC EMI TEST REPORT

FCC ID : GKRCMCN3
Equipment : LCC Module
Brand Name : COMPAL
Model Name : CMC-N3
Applicant : Compal Electronics, Inc.
No.581 & 581-1, Ruiguang Rd., Neihu District,
Taipei, (114) Taiwan
Manufacturer : Compal Electronics, Inc.
No.581 & 581-1, Ruiguang Rd., Neihu District,
Taipei, (114) Taiwan
Standard : FCC 47 CFR FCC Part 15 Subpart B Class B

The product was received on Mar. 13, 2025 and testing was performed from Mar. 29, 2025 to Apr. 25, 2025. We, Sporton International Inc. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI C63.4-2014 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Approved by: Louis Wu

Sportun International Inc. EMC & Wireless Communications Laboratory
No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1. General Description	5
1.1. Product Feature of Equipment Under Test	5
1.2. Modification of EUT	5
1.3. Test Location	5
1.4. Applicable Standards	5
2. Test Configuration of Equipment Under Test	6
2.1. Test Mode	6
2.2. Connection Diagram of Test System	7
2.3. Support Unit used in test configuration and system.....	7
2.4. EUT Operation Test Setup	7
3. Test Result	8
3.1. Test of AC Conducted Emission Measurement	8
3.2. Test of Radiated Emission Measurement	10
4. List of Measuring Equipment.....	12
5. Measurement Uncertainty	13

Appendix A. AC Conducted Emission Test Result**Appendix B. Radiated Emission Test Result****Appendix C. Setup Photographs**



History of this test report



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.107	AC Conducted Emission	Pass	-
3.2	15.109	Radiated Emission	Pass	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Keven Cheng

Report Producer: Hannah Yang



1. General Description

1.1. Product Feature of Equipment Under Test

Product Feature
General Specs LTE/5G NR RedCap and GNSS.

Remark: The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.

1.2. Modification of EUT

No modifications made to the EUT during the testing.

1.3. Test Location

Test Site	Sporton International Inc. EMC & Wireless Communications Laboratory
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978
Test Site No.	Sporton Site No. CO05-HY, 03CH06-HY

FCC designation No.: TW1093

1.4. Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC 47 CFR FCC Part 15 Subpart B Class B
- ♦ ANSI C63.4-2014
- ♦ ANSI C63.4a-2017

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.



2. Test Configuration of Equipment Under Test

2.1. Test Mode


The EUT is tested along with the peripherals, operating under possible configurations in compliant with normal operation. The maximum emissions can be identified by a pre-scan carried out in different orientations of placement pursuant to ANSI C63.4-2014. Frequency range covered: Conduction Emission (150 kHz to 30 MHz), Radiation Emission (30 MHz to the 5th harmonics of the highest fundamental frequency or to 40 GHz, whichever is lower).

Test Items	Functions Enabled
AC Conducted Emission	Mode 1: NR Redcap n26 Idle + GPS Rx + Adapter Mode 2: NR Redcap n12 Idle + GPS Rx + Adapter Mode 3: NR Redcap n13 Idle + GPS Rx + Adapter Mode 4: NR Redcap n14 Idle + GPS Rx + Adapter Mode 5: NR Redcap n17 Idle + GPS Rx + Adapter
Radiated Emissions	Mode 1: NR Redcap n26 Idle + GPS Rx + Adapter Mode 2: NR Redcap n12 Idle + GPS Rx + Adapter Mode 3: NR Redcap n13 Idle + GPS Rx + Adapter Mode 4: NR Redcap n14 Idle + GPS Rx + Adapter Mode 5: NR Redcap n17 Idle + GPS Rx + Adapter

Remark:

1. The worst case of AC is mode 2; only the test data of this mode was reported.
2. The worst case of RE is mode 1; only the test data of this mode was reported.
3. For Radiation Emission after pre-scanned the cellular band between 30MHz ~ 960MHz (NR n12/n13/n14/n17/n26); only the worst case for cellular band test data of this mode was reported.

2.2. Connection Diagram of Test System

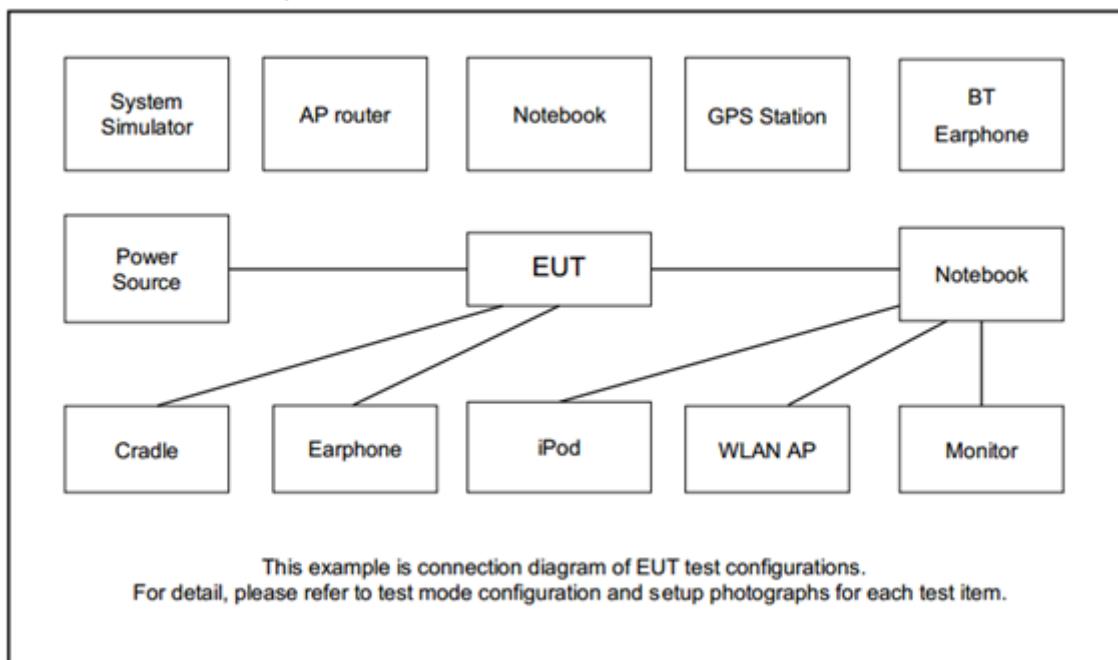

2.3. Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Base Station	Anritsu	MT8820C	N/A	N/A	Unshielded,1.8m
2.	Base Station	Anritsu	MT8821C	N/A	N/A	Unshielded,1.8m
3.	GPS Station	Pendulum	GSG-54	N/A	N/A	Unshielded,1.8m
4.	Adapter	Compal	CK18W02U	N/A	N/A	N/A
5.	5G Wireless Test Platform	Anritsu	MT8000A	N/A	N/A	Unshielded,1.8m

2.4. EUT Operation Test Setup

The EUT is in 5G NR idle mode during the test. The EUT is synchronized with the BCCH, and has been continuous receiving mode by setting paging reorganization of the system simulator.

At the same time, the following programs installed in the EUT are programmed during the test:

Execute GPS Test to make the EUT receive continuous signals from GPS station.



3. Test Result

3.1. Test of AC Conducted Emission Measurement

3.1.1. Limits of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

<Class B>

Frequency of emission (MHz)	Conducted limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.1.2. Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.1.3. Test Procedure

1. The EUT is placed 0.4 meter away from the conducting wall of the shielding room, and is kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN shall be used.
6. Both Line and Neutral shall be tested in order to find out the maximum conducted emission.
7. The frequency range from 150 kHz to 30 MHz is scanned.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (If Bandwidth = 9 kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.1.4. Test Setup

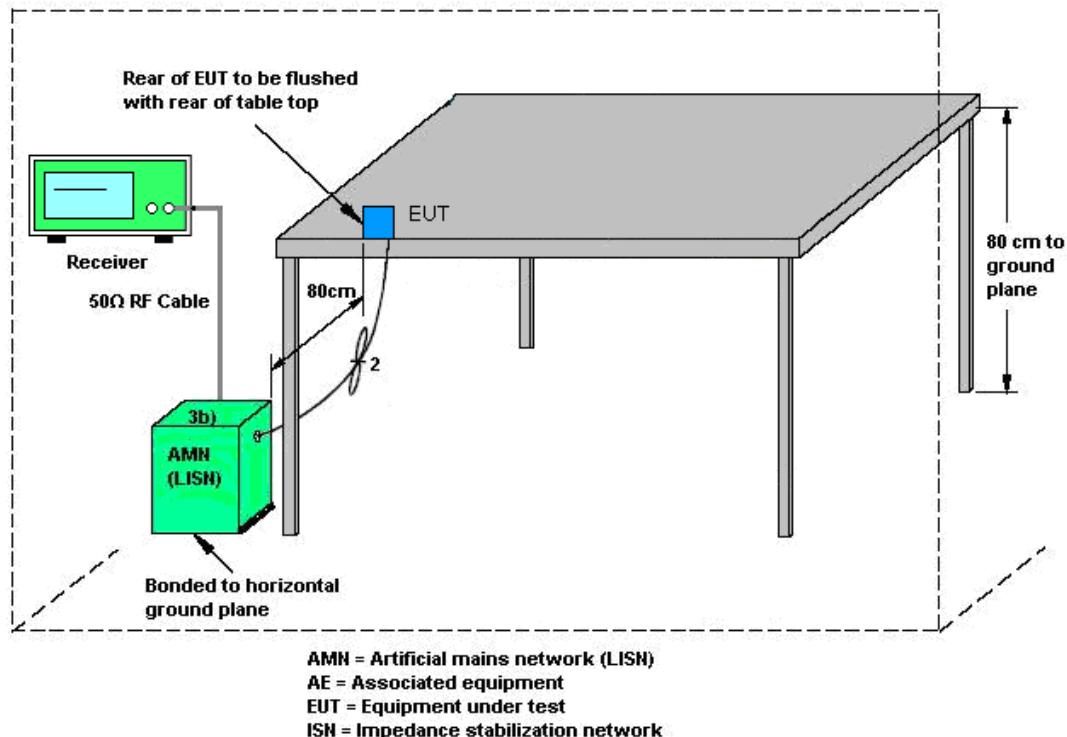

3.1.5. Test Result of AC Conducted Emission

Please refer to Appendix A.



3.2. Test of Radiated Emission Measurement

3.2.1. Limit of Radiated Emission

The emissions from an unintentional radiator shall not exceed the field strength levels specified in the following table:

<Class B>

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.2.2. Measuring Instruments


Please refer to the measuring equipment list in this test report.

3.2.3. Test Procedures


1. The EUT is placed on a turntable with 0.8 meter above ground.
2. The EUT is set 3 meters from the interference receiving antenna, which is mounted on the top of a variable height antenna tower.
3. The table is rotated 360 degrees to determine the position of the highest radiation.
4. The antenna is a Bi-Log antenna and its height is adjusted between one to four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT is arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode (RBW=120 kHz/VBW=300 kHz for frequency below 1 GHz; RBW=1 MHz VBW=3 MHz (Peak), RBW=1 MHz/VBW=10 Hz (Average) for frequency above 1 GHz).
7. If the emission level of the EUT in peak mode is 3 dB lower than the limit specified, peak values of EUT will be reported. Otherwise, the emission will be repeated by using the quasi-peak method and reported.

3.2.4. Test Setup of Radiated Emission

For Radiated Emissions from 30 MHz to 1 GHz

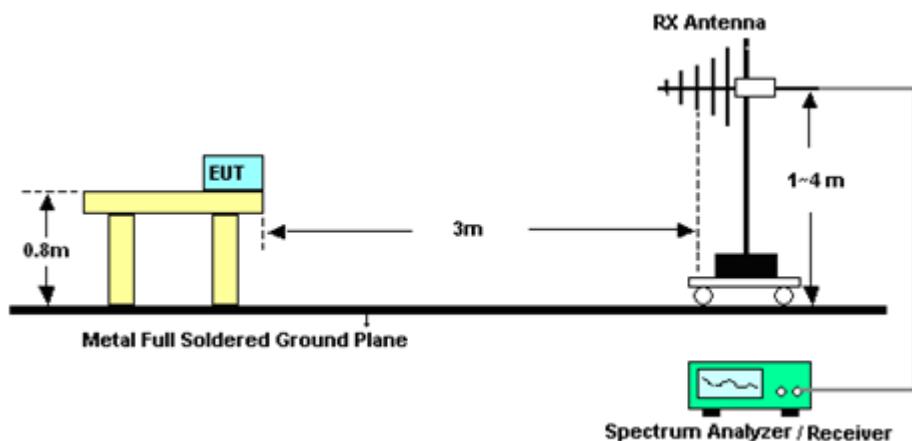

For Radiated Emissions above 1GHz

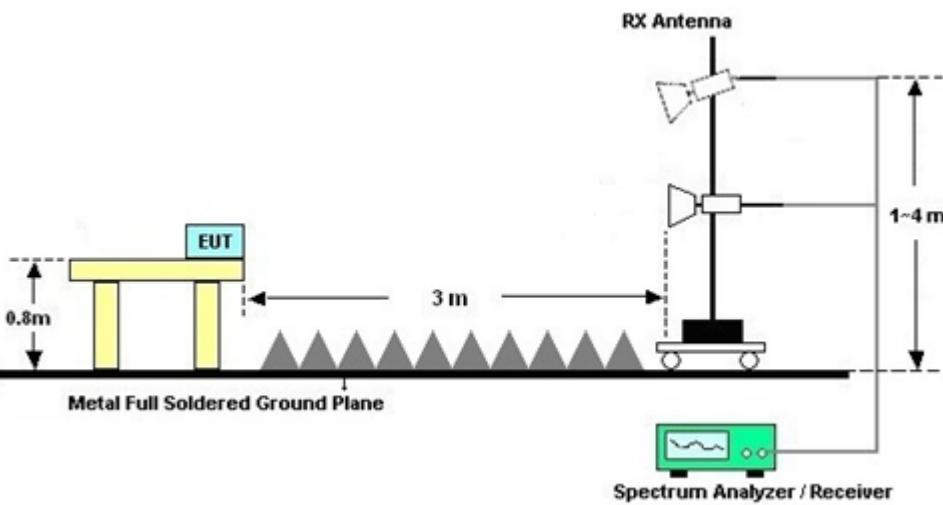

3.2.5. Test Result of Radiated Emission

Please refer to Appendix B.



4. List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Apr. 25, 2025	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102388	9kHz~3.6GHz	Dec. 10, 2024	Apr. 25, 2025	Dec. 09, 2025	Conduction (CO05-HY)
Hygrometer	Testo	608-H1	34913912	N/A	Oct. 14, 2024	Apr. 25, 2025	Oct. 13, 2025	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100081	9kHz~30MHz	Nov. 14, 2024	Apr. 25, 2025	Nov. 13, 2025	Conduction (CO05-HY)
Software	Rohde & Schwarz	EMC32	N/A	N/A	N/A	Apr. 25, 2025	N/A	Conduction (CO05-HY)
Pulse Limiter	SCHWARZ BECK	VTSD 9561-F N	00691	N/A	Jul. 30, 2024	Apr. 25, 2025	Jul. 29, 2025	Conduction (CO05-HY)
LISN Cable	MVE	RG-400	MQT240825 01	N/A	Oct. 15, 2024	Apr. 25, 2025	Oct. 14, 2025	Conduction (CO05-HY)
Amplifier	SONOMA	310N	186713	9kHz~1GHz	Apr. 16, 2024	Mar. 29, 2025	Apr. 15, 2025	Radiation (03CH06-HY)
Bilog Antenna	TESEQ	CBL 6111D & N-6-06	35414 & AT-N0602	30MHz~1GHz	Oct. 05, 2024	Mar. 29, 2025	Oct. 04, 2025	Radiation (03CH06-HY)
EMI Test Receiver	Rohde & Schwarz	ESU26	100472	20Hz~26.5GHz	Jan. 23, 2025	Mar. 29, 2025	Jan. 22, 2026	Radiation (03CH06-HY)
Horn Antenna	SCHWARZ BECK	BBHA 9120 D	9120D-0203 7	1GHz~18GHz	Dec. 20, 2024	Mar. 29, 2025	Dec. 19, 2025	Radiation (03CH06-HY)
Preamplifier	Jet-Power	JPA00101800-3 0-10P	1601180001	1GHz~18GHz	Jul. 15, 2024	Mar. 29, 2025	Jul. 14, 2025	Radiation (03CH06-HY)
RF Cable	HUBER + SUHNER	SF104 SF102_2000mm SF102_3000mm SF102_7000mm	802433/4 532421/2 532422/2 532299/2	30MHz to 18GHz	Jul. 02, 2024	Mar. 29, 2025	Jul. 01, 2025	Radiation (03CH06-HY)
Hygrometer	TECPTEL	DTM-303B	TP210018	N/A	Oct. 14, 2024	Mar. 29, 2025	Oct. 13, 2025	Radiation (03CH06-HY)
Controller	INN-CO	EM1000	060782	Control Turn table & Ant Mast	N/A	Mar. 29, 2025	N/A	Radiation (03CH06-HY)
Antenna Mast	MF	MF-7802	MF7802082 12	1m~4m	N/A	Mar. 29, 2025	N/A	Radiation (03CH06-HY)
Turn Table	INN-CO	DS2000	420/650/00	0-360 degree	N/A	Mar. 29, 2025	N/A	Radiation (03CH06-HY)
Software	Audix	E3	N/A	N/A	N/A	Mar. 29, 2025	N/A	Radiation (03CH06-HY)



5. Measurement Uncertainty

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2U _c (y))	3.7 dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2U _c (y))	5.8 dB
---	--------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 6000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2U _c (y))	4.8 dB
---	--------

Uncertainty of Radiated Emission Measurement (6000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2U _c (y))	5.4 dB
---	--------




Appendix A. AC Conducted Emission Test Results

Test Engineer :	Brian Chen	Temperature :	23 ~ 26°C
		Relative Humidity :	45 ~ 55%

EUT Information

Report NO : 531227-02
 Test Mode : Mode 2
 Test Voltage : 120Vac/60Hz
 Phase : Line

Full Spectrum

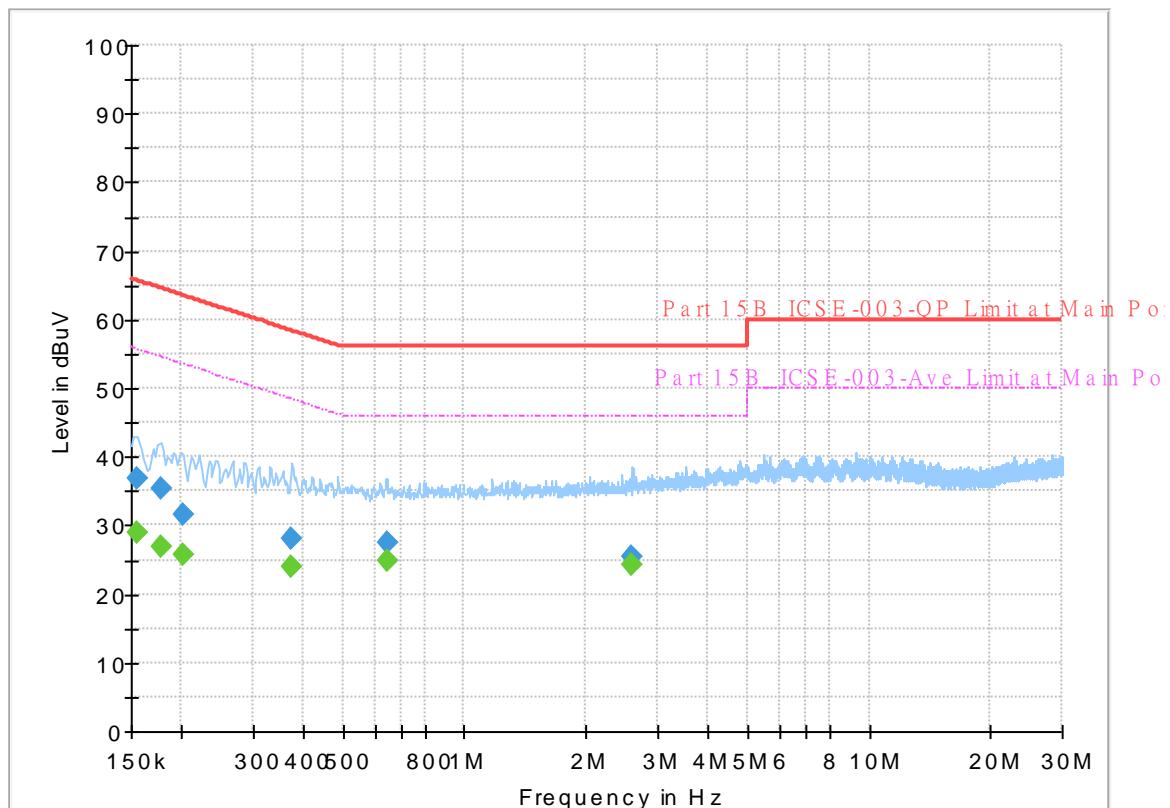


Final Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.154500	---	28.93	55.75	26.82	L1	OFF	19.8
0.154500	36.76	---	65.75	28.99	L1	OFF	19.8
0.177000	---	26.93	54.63	27.70	L1	OFF	19.8
0.177000	35.33	---	64.63	29.30	L1	OFF	19.8
0.201750	---	25.74	53.54	27.80	L1	OFF	19.8
0.201750	31.45	---	63.54	32.09	L1	OFF	19.8
0.375000	---	23.86	48.39	24.53	L1	OFF	19.8
0.375000	27.97	---	58.39	30.42	L1	OFF	19.8
0.642750	---	24.85	46.00	21.15	L1	OFF	19.8
0.642750	27.41	---	56.00	28.59	L1	OFF	19.8
2.602500	---	24.15	46.00	21.85	L1	OFF	19.9
2.602500	25.49	---	56.00	30.51	L1	OFF	19.9

EUT Information

Report NO : 531227-02
 Test Mode : Mode 2
 Test Voltage : 120Vac/60Hz
 Phase : Neutral

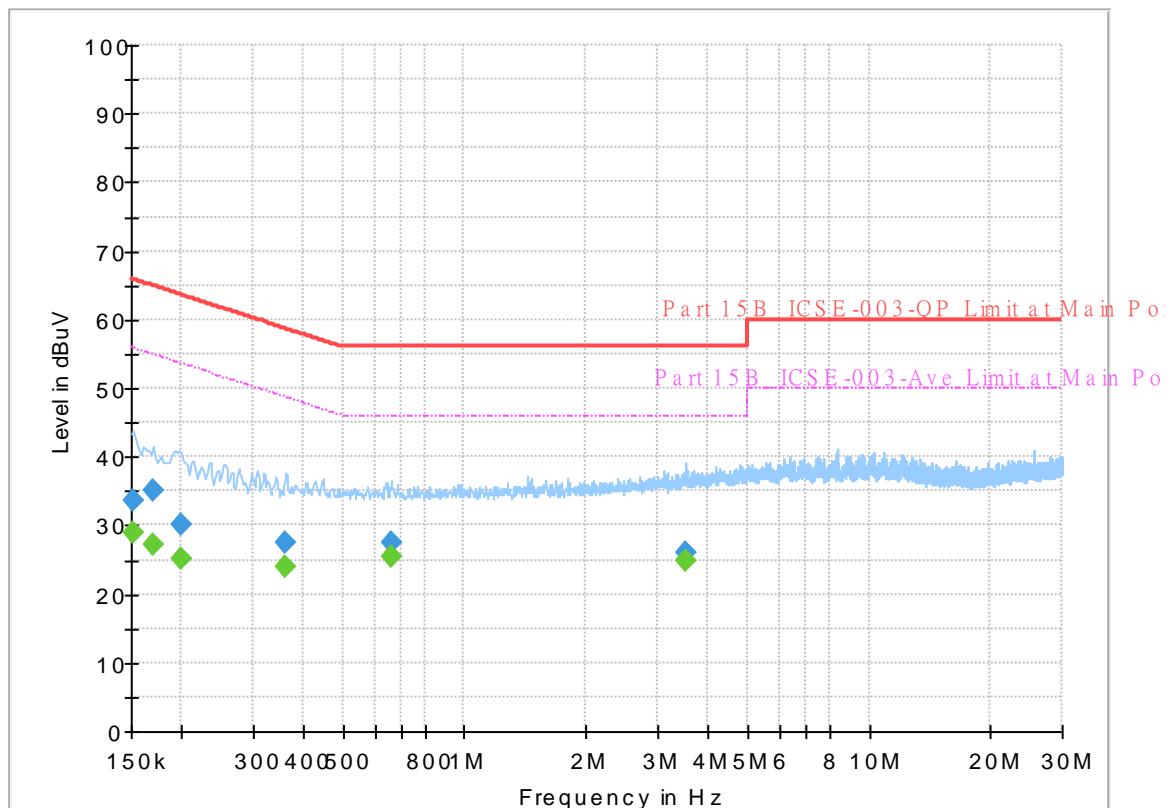Full Spectrum**Final Result**

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.152250	---	28.82	55.88	27.06	N	OFF	19.8
0.152250	33.67	---	65.88	32.21	N	OFF	19.8
0.170250	---	27.29	54.95	27.66	N	OFF	19.8
0.170250	35.16	---	64.95	29.79	N	OFF	19.8
0.199500	---	25.05	53.63	28.58	N	OFF	19.8
0.199500	30.19	---	63.63	33.44	N	OFF	19.8
0.361500	---	23.90	48.69	24.79	N	OFF	19.8
0.361500	27.57	---	58.69	31.12	N	OFF	19.8
0.658500	---	25.48	46.00	20.52	N	OFF	19.8
0.658500	27.40	---	56.00	28.60	N	OFF	19.8
3.518250	---	24.90	46.00	21.10	N	OFF	19.9
3.518250	26.16	---	56.00	29.84	N	OFF	19.9



Appendix B. Radiated Emission Test Result

Test Engineer :	Bor-Shiang,Huang	Temperature :	23 ~ 26°C																																																																																																																																																																				
		Relative Humidity :	43 ~ 48%																																																																																																																																																																				
Test Distance :	3m	Polarization :	Horizontal																																																																																																																																																																				
Remark :	#6 is system simulator signal which can be ignored.																																																																																																																																																																						
<ul style="list-style-type: none"> ■ Emission level (dBμV/m) = 20 log Emission level (μV/m) ■ Factor(dB) = Antenna Factor + Cable Loss + Filter loss – Preamp Factor ■ Corrected Reading: Factor(dB) + Read Level = Level 																																																																																																																																																																							
<p>Level (dBuV/m)</p> <p>Date: 2025-03-29</p> <p>FCC CLASS-B</p> <p>-6dB</p> <p>FCC CLASS-B (AVG)</p> <p>-6dB</p> <p>Trace: (Discrete)</p> <p>Site : 03CH06-HY Condition : FCC CLASS-B 3m 9120D_02037 HORIZONTAL Project : 531227-02 Power : 120Vac/60Hz Memo : Mode 1</p>																																																																																																																																																																							
<table border="1"> <thead> <tr> <th rowspan="2">Freq</th> <th rowspan="2">Level</th> <th>Over</th> <th>Limit</th> <th>Read</th> <th>A/Pos</th> <th>T/Pos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>Line</th> <th>Level Factor</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>31.08</td> <td>21.80</td> <td>-18.20</td> <td>40.00</td> <td>28.51</td> <td>-6.71</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>68.88</td> <td>17.80</td> <td>-22.20</td> <td>40.00</td> <td>35.64</td> <td>-17.84</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>3</td> <td>233.58</td> <td>28.25</td> <td>-17.75</td> <td>46.00</td> <td>40.84</td> <td>-12.59</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>4</td> <td>558.30</td> <td>28.23</td> <td>-17.77</td> <td>46.00</td> <td>29.58</td> <td>-1.35</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>5</td> <td>761.30</td> <td>30.05</td> <td>-15.95</td> <td>46.00</td> <td>28.61</td> <td>1.44</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>6 *</td> <td>876.80</td> <td>49.07</td> <td></td> <td></td> <td>45.84</td> <td>3.23</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>7</td> <td>957.30</td> <td>33.09</td> <td>-12.91</td> <td>46.00</td> <td>27.04</td> <td>6.05</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>8</td> <td>2960.00</td> <td>41.37</td> <td>-32.63</td> <td>74.00</td> <td>63.72</td> <td>-22.35</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>9</td> <td>4972.00</td> <td>43.27</td> <td>-30.73</td> <td>74.00</td> <td>60.65</td> <td>-17.38</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>10</td> <td>6558.00</td> <td>47.44</td> <td>-26.56</td> <td>74.00</td> <td>60.82</td> <td>-13.38</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>11</td> <td>7906.00</td> <td>47.52</td> <td>-26.48</td> <td>74.00</td> <td>59.24</td> <td>-11.72</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>12</td> <td>9516.00</td> <td>34.09</td> <td>-19.91</td> <td>54.00</td> <td>42.00</td> <td>-7.91</td> <td>100</td> <td>214</td> <td>Average</td> </tr> <tr> <td>13</td> <td>9516.00</td> <td>49.24</td> <td>-24.76</td> <td>74.00</td> <td>57.15</td> <td>-7.91</td> <td>100</td> <td>214</td> <td>Peak</td> </tr> <tr> <td>14</td> <td>11864.00</td> <td>33.77</td> <td>-20.23</td> <td>54.00</td> <td>40.31</td> <td>-6.54</td> <td>100</td> <td>69</td> <td>Average</td> </tr> <tr> <td>15</td> <td>11864.00</td> <td>48.93</td> <td>-25.07</td> <td>74.00</td> <td>55.47</td> <td>-6.54</td> <td>100</td> <td>69</td> <td>Peak</td> </tr> </tbody> </table>				Freq	Level	Over	Limit	Read	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	Line	Level Factor	1	31.08	21.80	-18.20	40.00	28.51	-6.71	---	---	Peak	2	68.88	17.80	-22.20	40.00	35.64	-17.84	---	---	Peak	3	233.58	28.25	-17.75	46.00	40.84	-12.59	---	---	Peak	4	558.30	28.23	-17.77	46.00	29.58	-1.35	---	---	Peak	5	761.30	30.05	-15.95	46.00	28.61	1.44	---	---	Peak	6 *	876.80	49.07			45.84	3.23	---	---	Peak	7	957.30	33.09	-12.91	46.00	27.04	6.05	---	---	Peak	8	2960.00	41.37	-32.63	74.00	63.72	-22.35	---	---	Peak	9	4972.00	43.27	-30.73	74.00	60.65	-17.38	---	---	Peak	10	6558.00	47.44	-26.56	74.00	60.82	-13.38	---	---	Peak	11	7906.00	47.52	-26.48	74.00	59.24	-11.72	---	---	Peak	12	9516.00	34.09	-19.91	54.00	42.00	-7.91	100	214	Average	13	9516.00	49.24	-24.76	74.00	57.15	-7.91	100	214	Peak	14	11864.00	33.77	-20.23	54.00	40.31	-6.54	100	69	Average	15	11864.00	48.93	-25.07	74.00	55.47	-6.54	100	69	Peak
Freq	Level	Over	Limit			Read	A/Pos	T/Pos	Remark																																																																																																																																																														
		MHz	dBuV/m	dB	dBuV/m	Line	Level Factor																																																																																																																																																																
1	31.08	21.80	-18.20	40.00	28.51	-6.71	---	---	Peak																																																																																																																																																														
2	68.88	17.80	-22.20	40.00	35.64	-17.84	---	---	Peak																																																																																																																																																														
3	233.58	28.25	-17.75	46.00	40.84	-12.59	---	---	Peak																																																																																																																																																														
4	558.30	28.23	-17.77	46.00	29.58	-1.35	---	---	Peak																																																																																																																																																														
5	761.30	30.05	-15.95	46.00	28.61	1.44	---	---	Peak																																																																																																																																																														
6 *	876.80	49.07			45.84	3.23	---	---	Peak																																																																																																																																																														
7	957.30	33.09	-12.91	46.00	27.04	6.05	---	---	Peak																																																																																																																																																														
8	2960.00	41.37	-32.63	74.00	63.72	-22.35	---	---	Peak																																																																																																																																																														
9	4972.00	43.27	-30.73	74.00	60.65	-17.38	---	---	Peak																																																																																																																																																														
10	6558.00	47.44	-26.56	74.00	60.82	-13.38	---	---	Peak																																																																																																																																																														
11	7906.00	47.52	-26.48	74.00	59.24	-11.72	---	---	Peak																																																																																																																																																														
12	9516.00	34.09	-19.91	54.00	42.00	-7.91	100	214	Average																																																																																																																																																														
13	9516.00	49.24	-24.76	74.00	57.15	-7.91	100	214	Peak																																																																																																																																																														
14	11864.00	33.77	-20.23	54.00	40.31	-6.54	100	69	Average																																																																																																																																																														
15	11864.00	48.93	-25.07	74.00	55.47	-6.54	100	69	Peak																																																																																																																																																														
Over	Limit	Read	A/Pos	T/Pos																																																																																																																																																																			
Freq	Level	Limit	Line	Factor	Remark																																																																																																																																																																		
MHz	dBuV/m	dB	dBuV/m	dB/m																																																																																																																																																																			

