



Test Mode:	802.11n HT40	Frequency(MHz):	5710
Polarity:	Horizontal	Test Voltage:	DC 3.3V

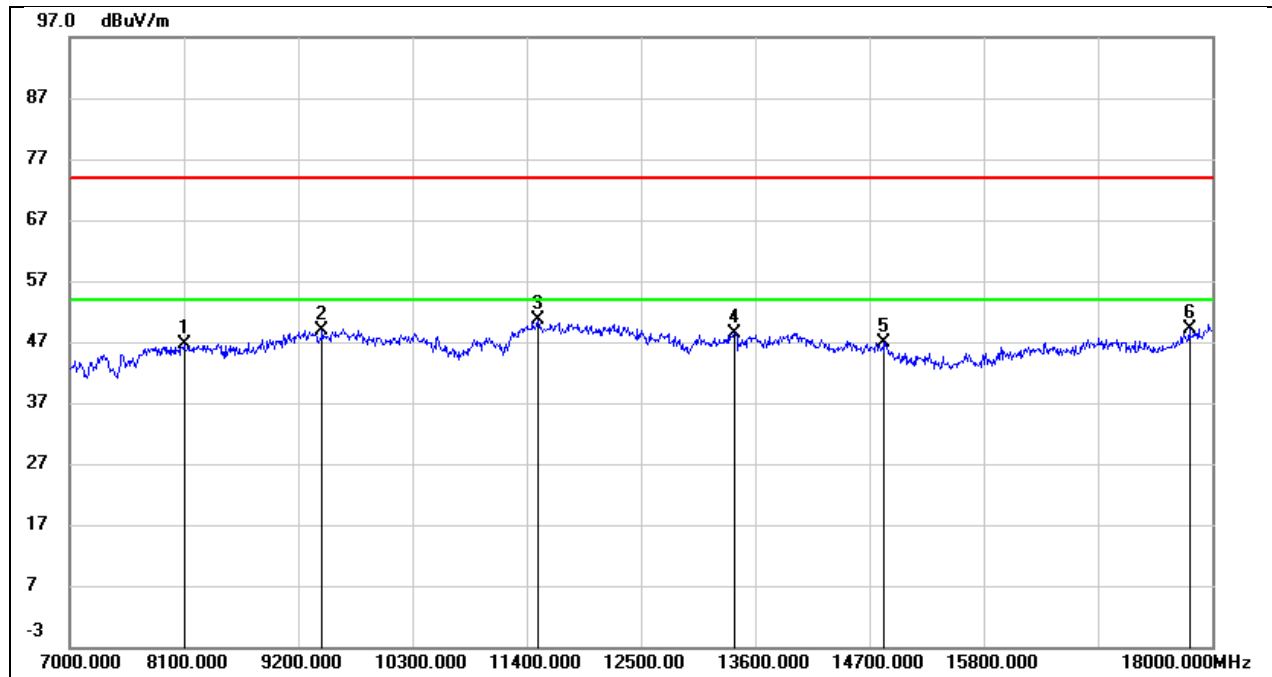


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8100.000	38.42	8.21	46.63	74.00	-27.37	peak
2	9431.000	36.44	12.41	48.85	74.00	-25.15	peak
3	11510.000	32.85	17.86	50.71	74.00	-23.29	peak
4	13402.000	26.79	21.64	48.43	74.00	-25.57	peak
5	14843.000	26.88	20.08	46.96	74.00	-27.04	peak
6	17780.000	21.80	27.29	49.09	74.00	-24.91	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5710
Polarity:	Vertical	Test Voltage:	DC 3.3V

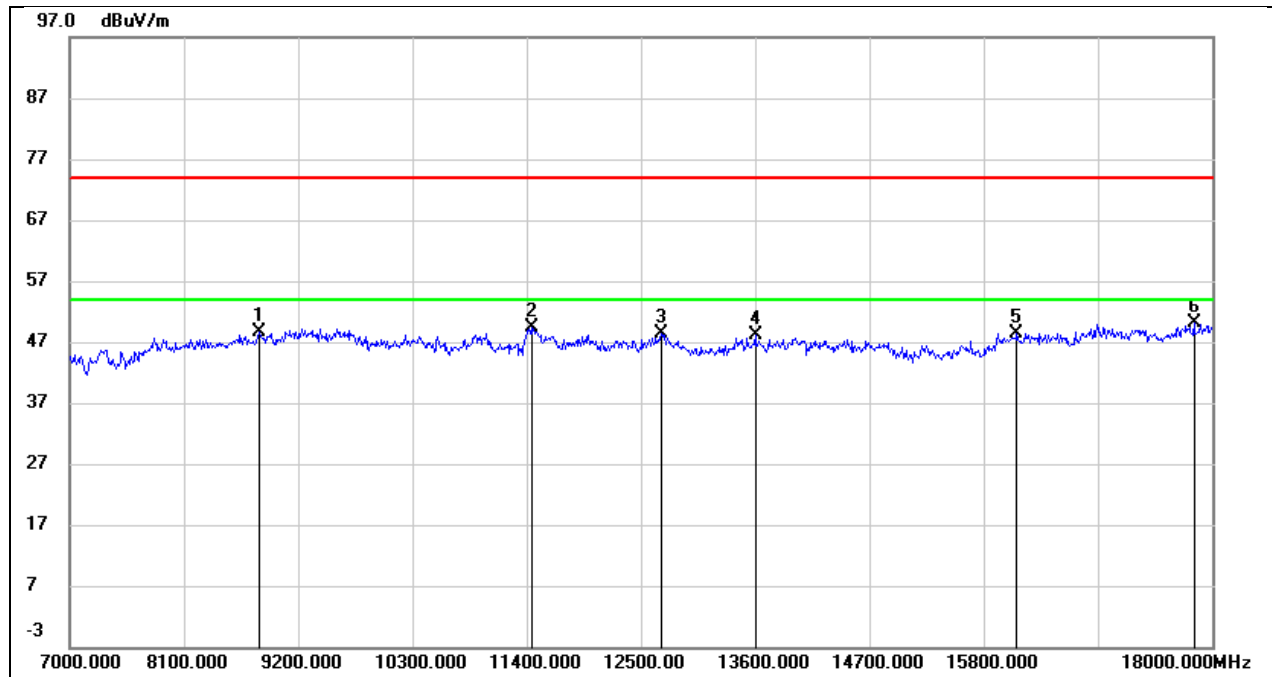


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8826.000	38.27	10.26	48.53	74.00	-25.47	peak
2	11444.000	33.26	16.15	49.41	74.00	-24.59	peak
3	12698.000	29.93	18.54	48.47	74.00	-25.53	peak
4	13600.000	27.51	20.54	48.05	74.00	-25.95	peak
5	16119.000	24.84	23.64	48.48	74.00	-25.52	peak
6	17824.000	23.71	26.31	50.02	74.00	-23.98	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5755
Polarity:	Horizontal	Test Voltage:	DC 3.3V

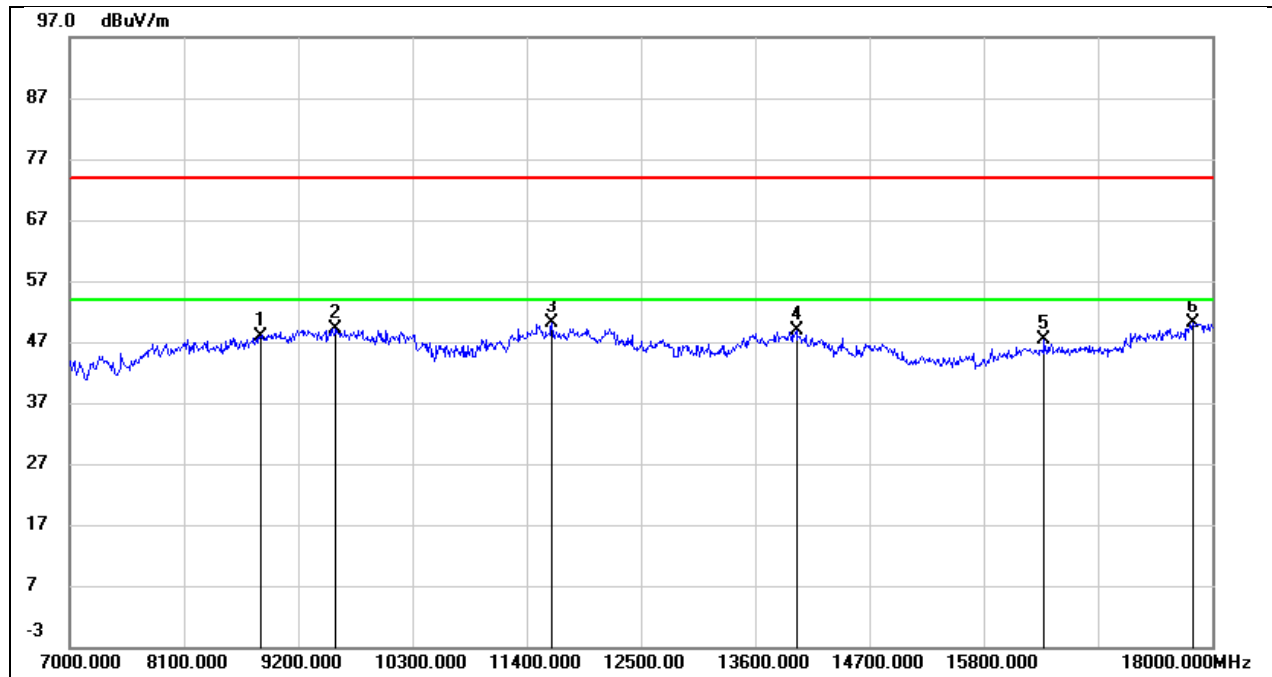


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8837.000	38.15	9.84	47.99	74.00	-26.01	peak
2	9563.000	35.85	13.23	49.08	74.00	-24.92	peak
3	11642.000	32.00	18.07	50.07	74.00	-23.93	peak
4	13996.000	25.37	23.59	48.96	74.00	-25.04	peak
5	16383.000	25.63	21.78	47.41	74.00	-26.59	peak
6	17813.000	22.40	27.62	50.02	74.00	-23.98	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5755
Polarity:	Vertical	Test Voltage:	DC 3.3V

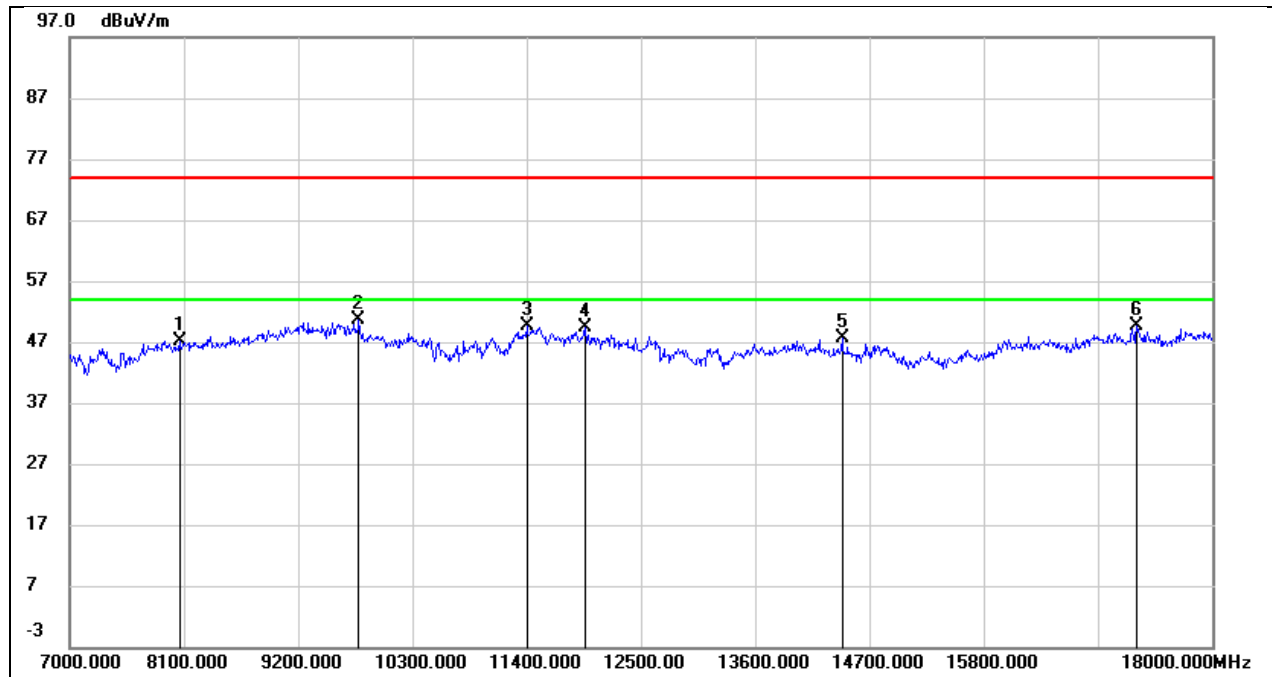


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8056.000	38.56	8.66	47.22	74.00	-26.78	peak
2	9783.000	37.28	13.38	50.66	74.00	-23.34	peak
3	11400.000	33.72	16.00	49.72	74.00	-24.28	peak
4	11961.000	32.04	17.27	49.31	74.00	-24.69	peak
5	14436.000	26.59	20.98	47.57	74.00	-26.43	peak
6	17274.000	24.75	24.97	49.72	74.00	-24.28	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5795
Polarity:	Horizontal	Test Voltage:	DC 3.3V

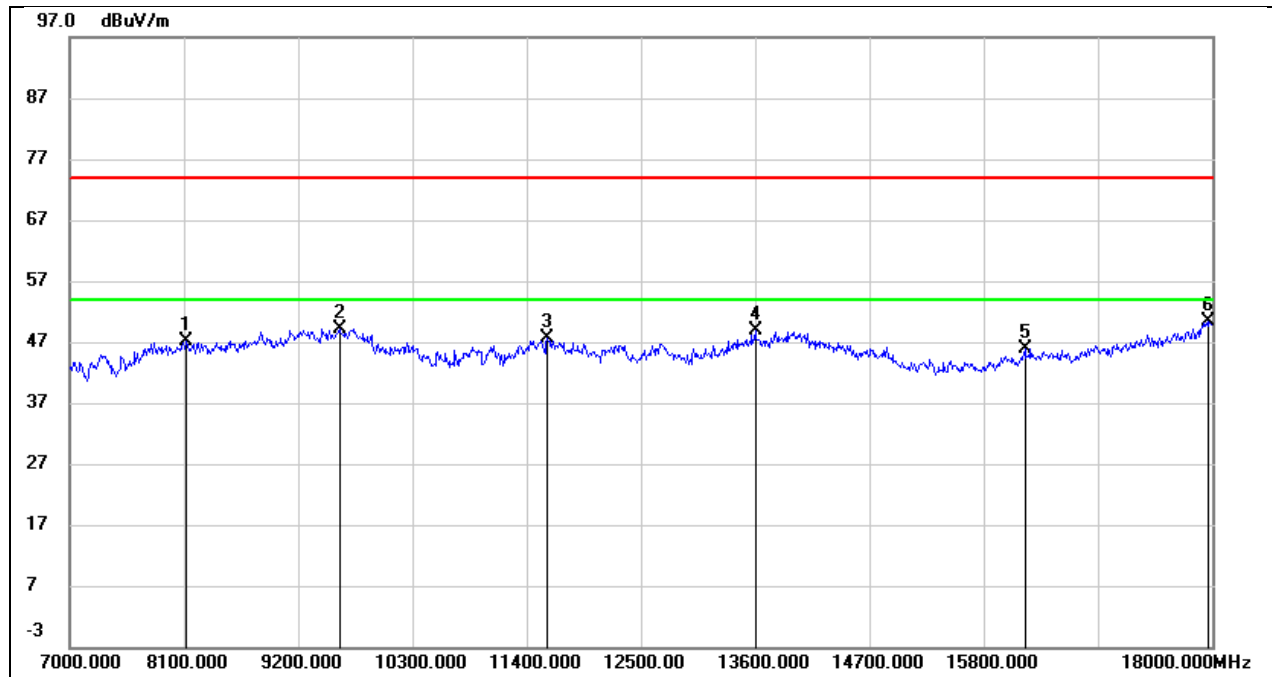


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8122.000	38.91	8.24	47.15	74.00	-26.85	peak
2	9596.000	35.68	13.44	49.12	74.00	-24.88	peak
3	11598.000	29.50	18.10	47.60	74.00	-26.40	peak
4	13600.000	26.63	22.22	48.85	74.00	-25.15	peak
5	16196.000	23.96	22.00	45.96	74.00	-28.04	peak
6	17967.000	21.08	29.26	50.34	74.00	-23.66	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5795
Polarity:	Vertical	Test Voltage:	DC 3.3V

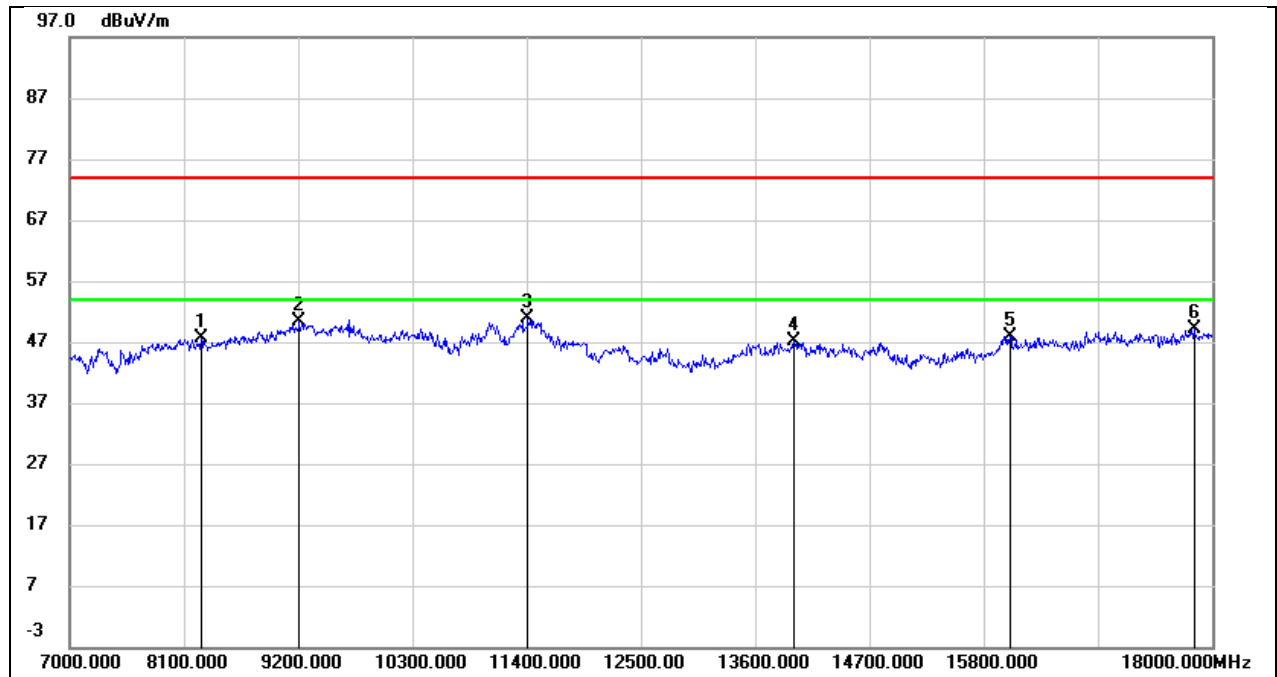


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8265.000	38.56	8.97	47.53	74.00	-26.47	peak
2	9211.000	38.51	11.82	50.33	74.00	-23.67	peak
3	11411.000	34.89	16.04	50.93	74.00	-23.07	peak
4	13974.000	25.27	21.89	47.16	74.00	-26.84	peak
5	16053.000	24.64	23.21	47.85	74.00	-26.15	peak
6	17824.000	22.77	26.31	49.08	74.00	-24.92	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5210
Polarity:	Horizontal	Test Voltage:	DC 3.3V

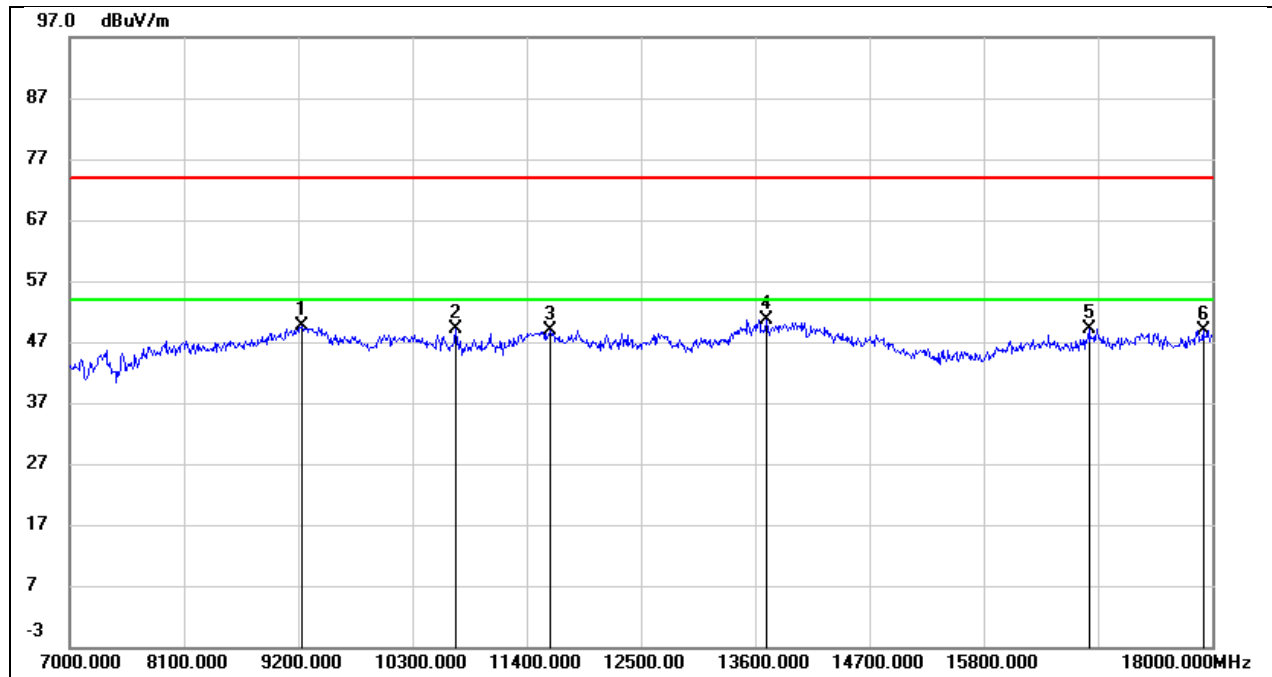


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9233.000	37.90	11.66	49.56	74.00	-24.44	peak
2	10718.000	35.06	14.18	49.24	74.00	-24.76	peak
3	11631.000	30.86	18.08	48.94	74.00	-25.06	peak
4	13710.000	28.14	22.53	50.67	74.00	-23.33	peak
5	16812.000	26.86	22.37	49.23	74.00	-24.77	peak
6	17912.000	20.27	28.68	48.95	74.00	-25.05	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5210
Polarity:	Vertical	Test Voltage:	DC 3.3V

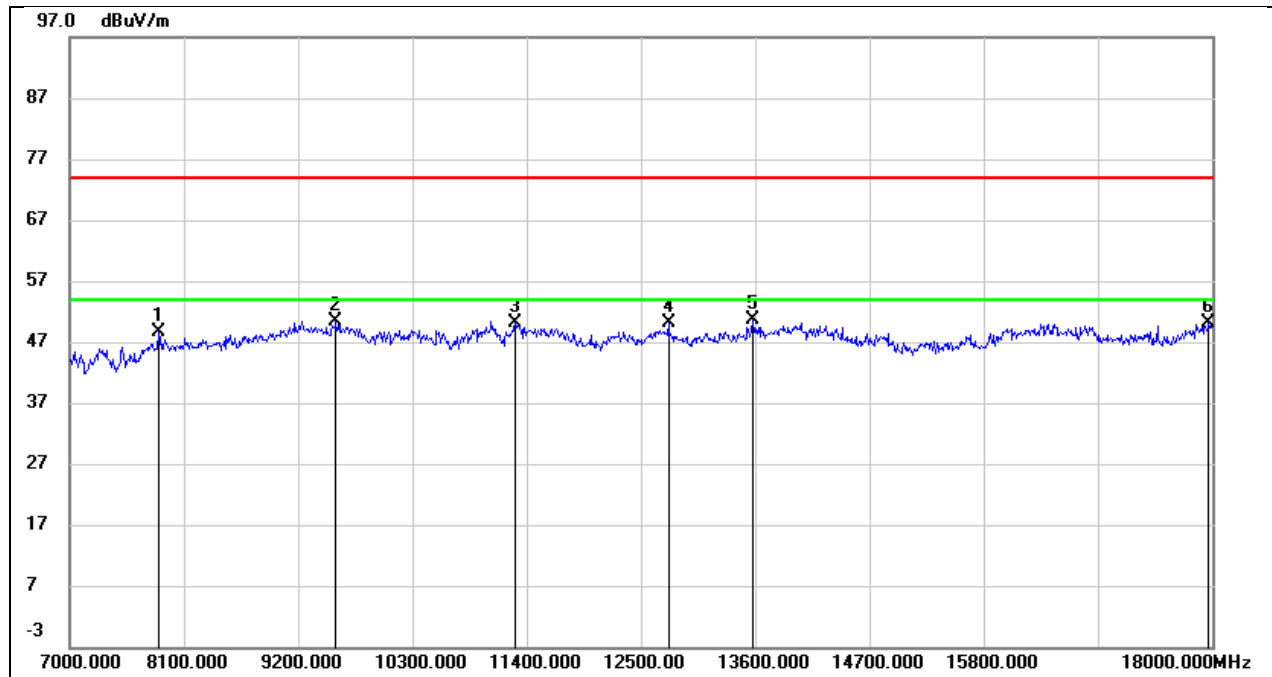


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7858.000	40.03	8.52	48.55	74.00	-25.45	peak
2	9563.000	37.13	13.14	50.27	74.00	-23.73	peak
3	11290.000	34.55	15.49	50.04	74.00	-23.96	peak
4	12764.000	31.30	18.77	50.07	74.00	-23.93	peak
5	13578.000	30.19	20.50	50.69	74.00	-23.31	peak
6	17967.000	22.94	27.20	50.14	74.00	-23.86	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5290
Polarity:	Horizontal	Test Voltage:	DC 3.3V

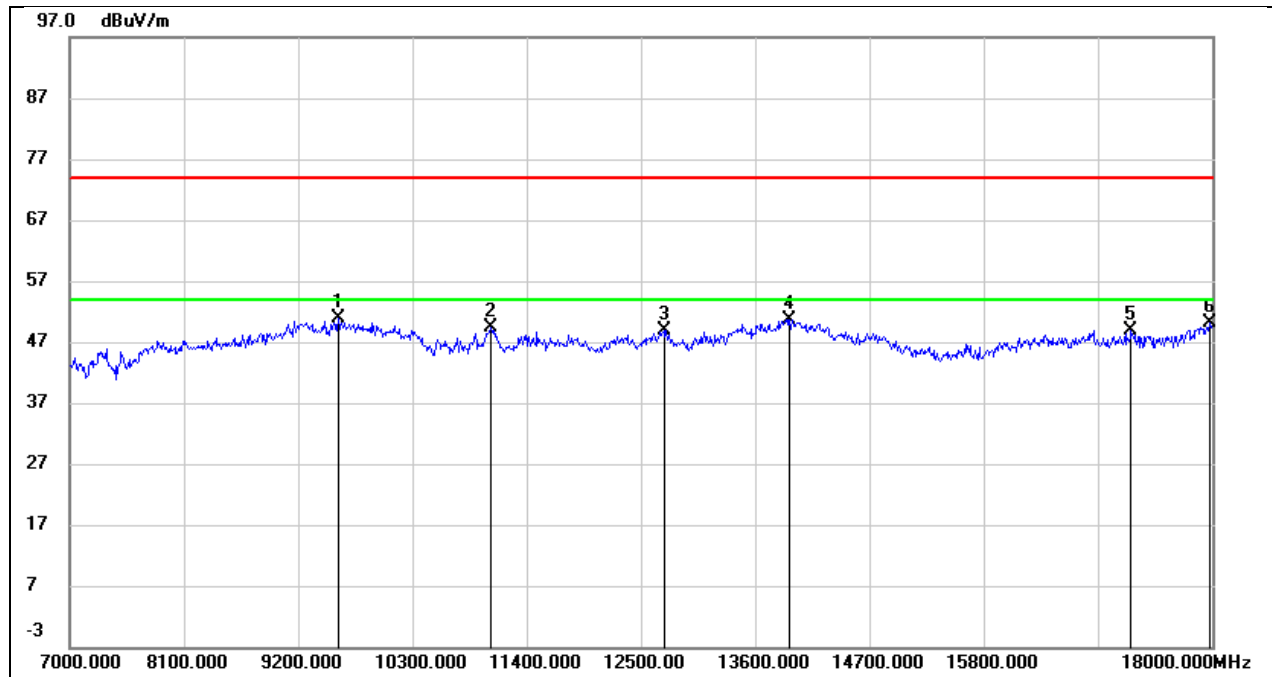


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9585.000	37.46	13.38	50.84	74.00	-23.16	peak
2	11059.000	34.04	15.39	49.43	74.00	-24.57	peak
3	12720.000	29.32	19.65	48.97	74.00	-25.03	peak
4	13930.000	27.43	23.32	50.75	74.00	-23.25	peak
5	17219.000	24.94	23.96	48.90	74.00	-25.10	peak
6	17978.000	20.64	29.38	50.02	74.00	-23.98	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5290
Polarity:	Vertical	Test Voltage:	DC 3.3V

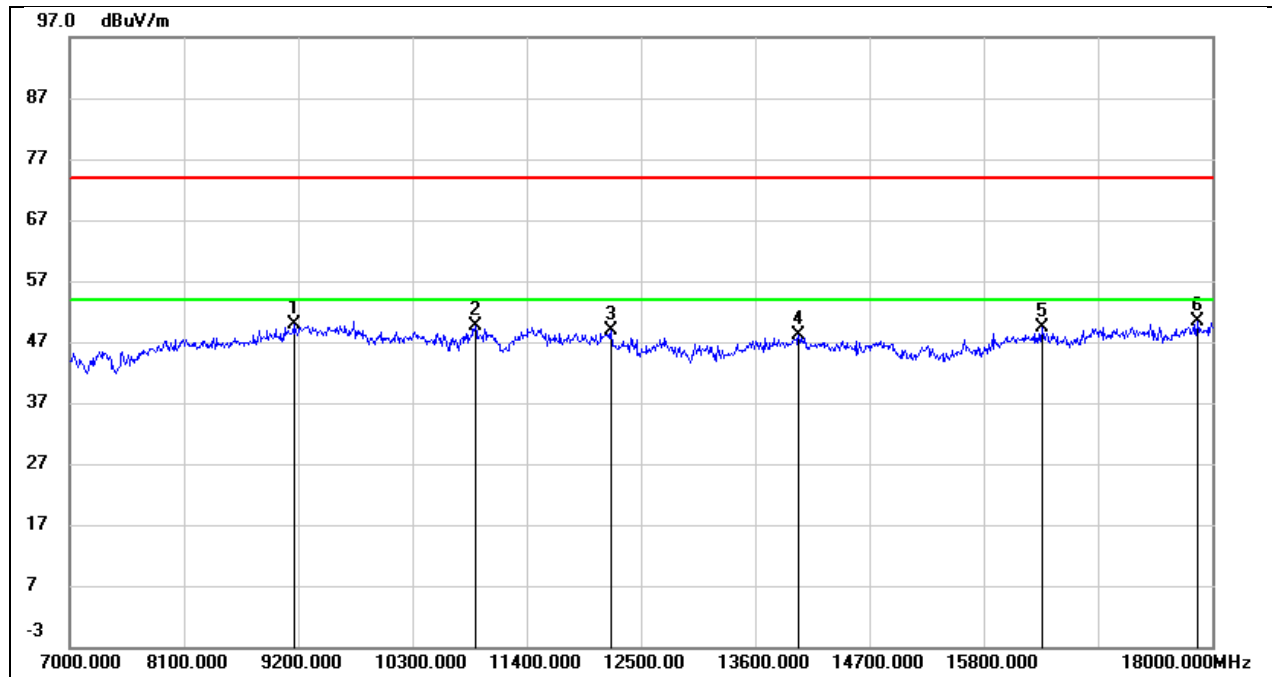


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9156.000	38.35	11.63	49.98	74.00	-24.02	peak
2	10905.000	35.49	14.06	49.55	74.00	-24.45	peak
3	12214.000	31.06	17.71	48.77	74.00	-25.23	peak
4	14018.000	26.12	21.99	48.11	74.00	-25.89	peak
5	16361.000	25.70	23.71	49.41	74.00	-24.59	peak
6	17857.000	23.78	26.51	50.29	74.00	-23.71	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5530
Polarity:	Horizontal	Test Voltage:	DC 3.3V

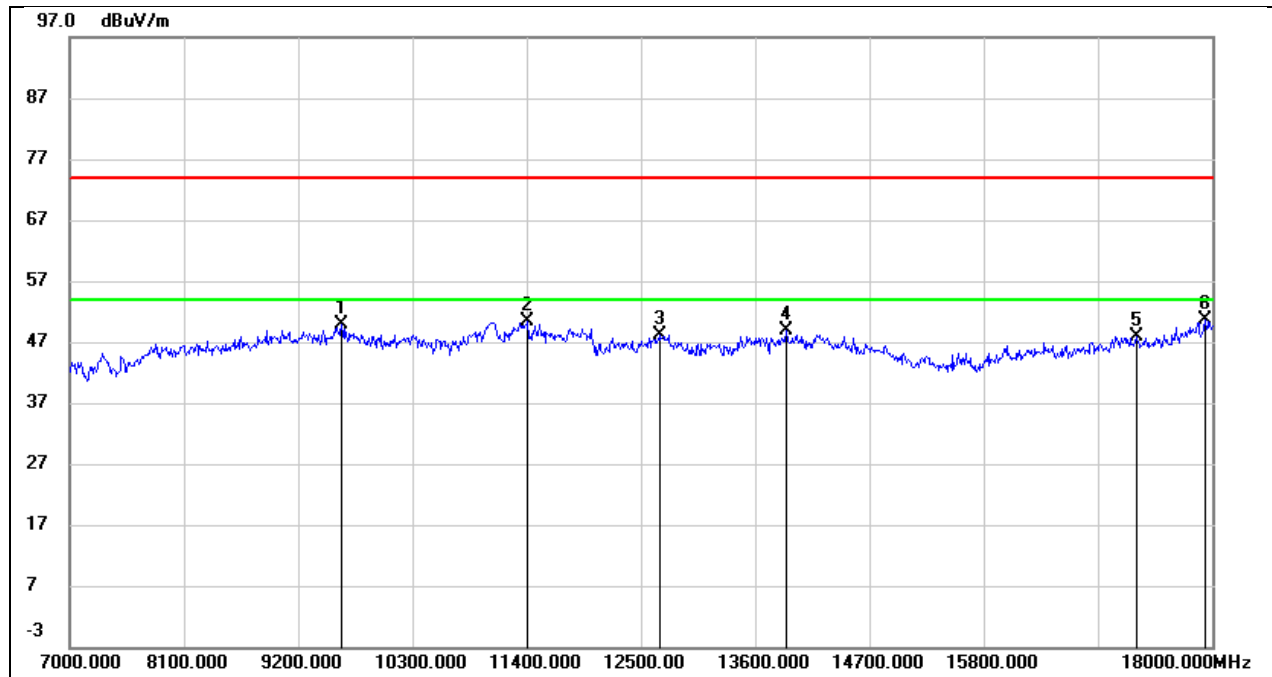


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9618.000	36.40	13.49	49.89	74.00	-24.11	peak
2	11411.000	32.87	17.41	50.28	74.00	-23.72	peak
3	12676.000	28.66	19.48	48.14	74.00	-25.86	peak
4	13897.000	25.68	23.19	48.87	74.00	-25.13	peak
5	17274.000	23.79	24.20	47.99	74.00	-26.01	peak
6	17934.000	21.62	28.91	50.53	74.00	-23.47	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5530
Polarity:	Vertical	Test Voltage:	DC 3.3V

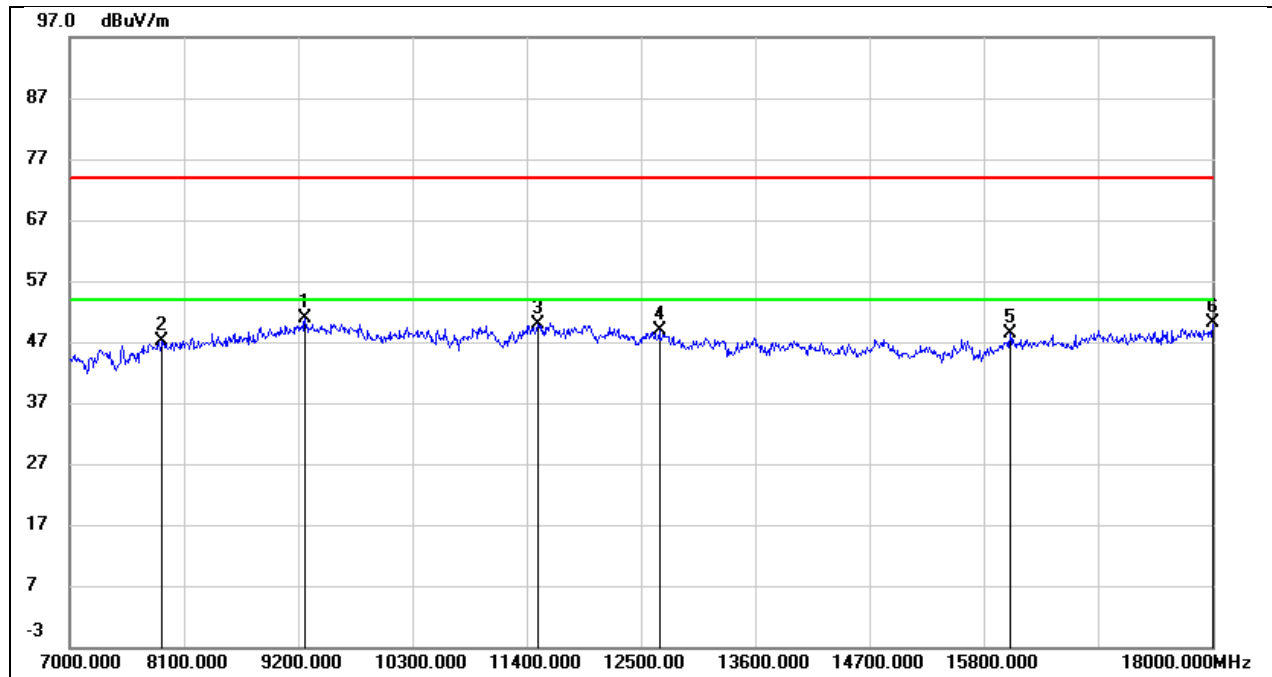


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9266.000	38.83	11.96	50.79	74.00	-23.21	peak
2	7891.000	38.66	8.54	47.20	74.00	-26.80	peak
3	11510.000	33.43	16.37	49.80	74.00	-24.20	peak
4	12676.000	30.45	18.47	48.92	74.00	-25.08	peak
5	16053.000	25.18	23.21	48.39	74.00	-25.61	peak
6	18000.000	22.65	27.41	50.06	74.00	-23.94	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5610
Polarity:	Horizontal	Test Voltage:	DC 3.3V

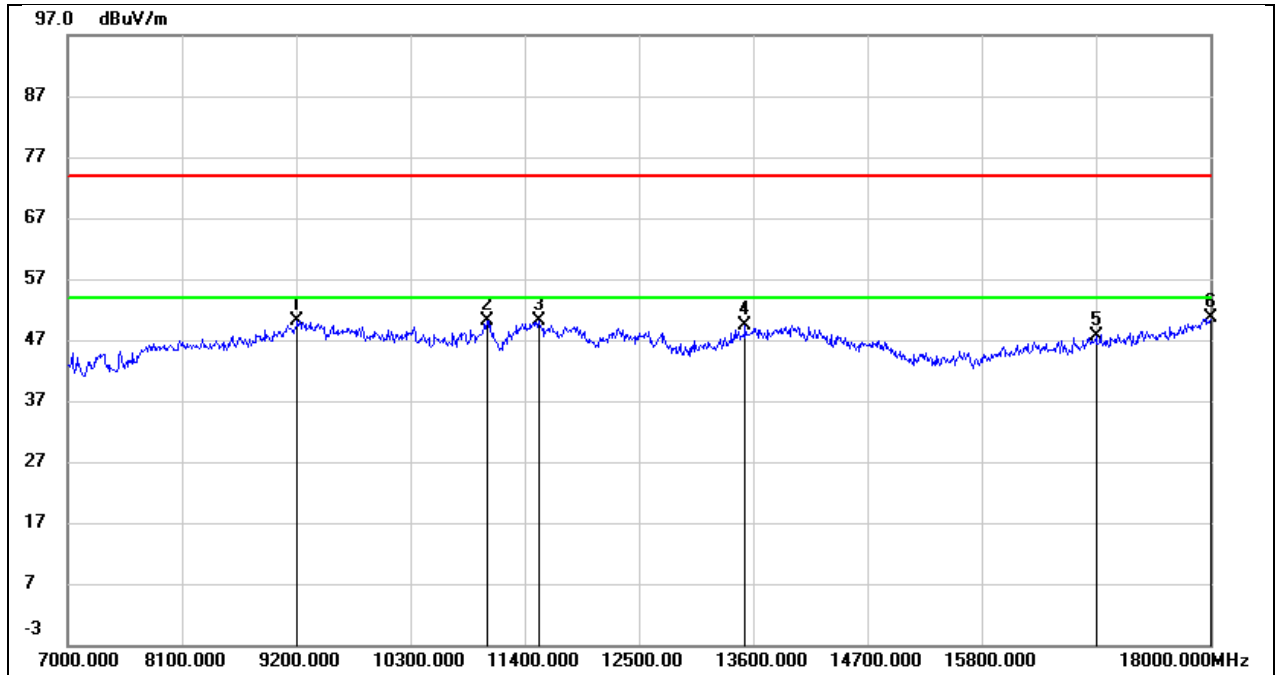


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9211.000	38.65	11.59	50.24	74.00	-23.76	peak
2	11037.000	34.77	15.27	50.04	74.00	-23.96	peak
3	11532.000	32.24	17.92	50.16	74.00	-23.84	peak
4	13523.000	27.39	22.08	49.47	74.00	-24.53	peak
5	16900.000	25.14	22.54	47.68	74.00	-26.32	peak
6	18000.000	21.12	29.61	50.73	74.00	-23.27	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5610
Polarity:	Vertical	Test Voltage:	DC 3.3V

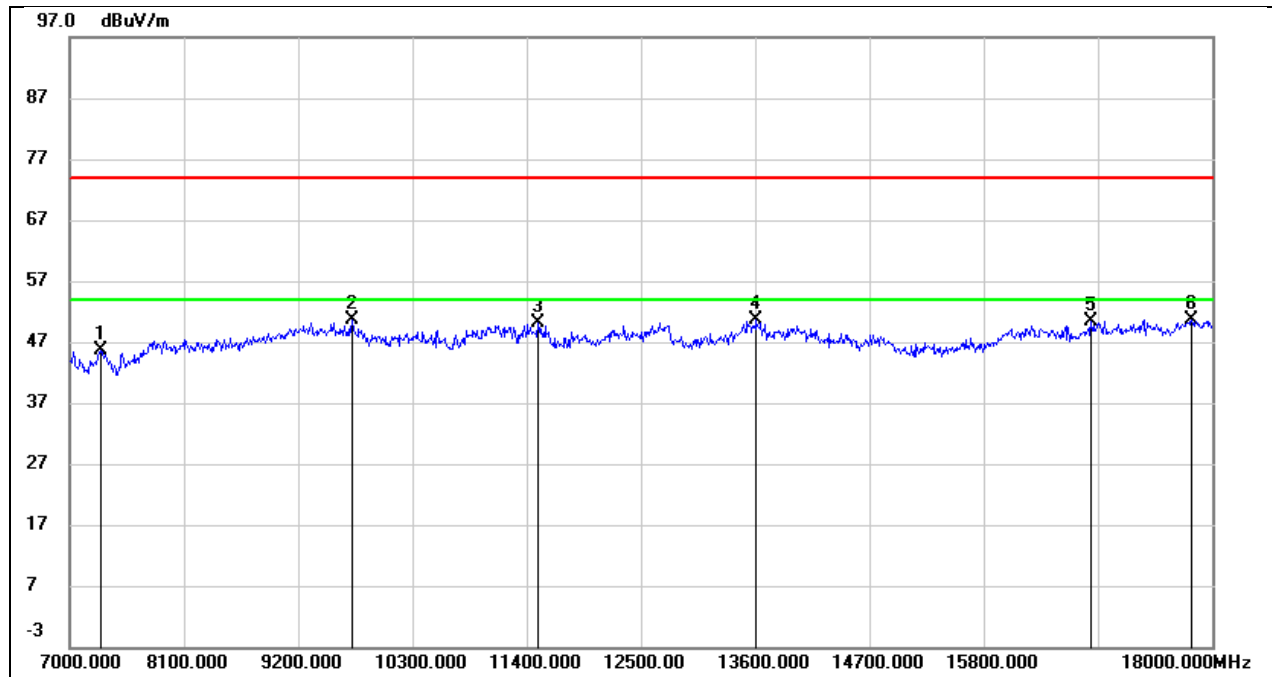


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7297.000	37.42	8.30	45.72	74.00	-28.28	peak
2	9717.000	37.25	13.35	50.60	74.00	-23.40	peak
3	11510.000	33.71	16.37	50.08	74.00	-23.92	peak
4	13611.000	30.04	20.57	50.61	74.00	-23.39	peak
5	16834.000	26.22	24.11	50.33	74.00	-23.67	peak
6	17802.000	24.38	26.18	50.56	74.00	-23.44	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5690
Polarity:	Horizontal	Test Voltage:	DC 3.3V

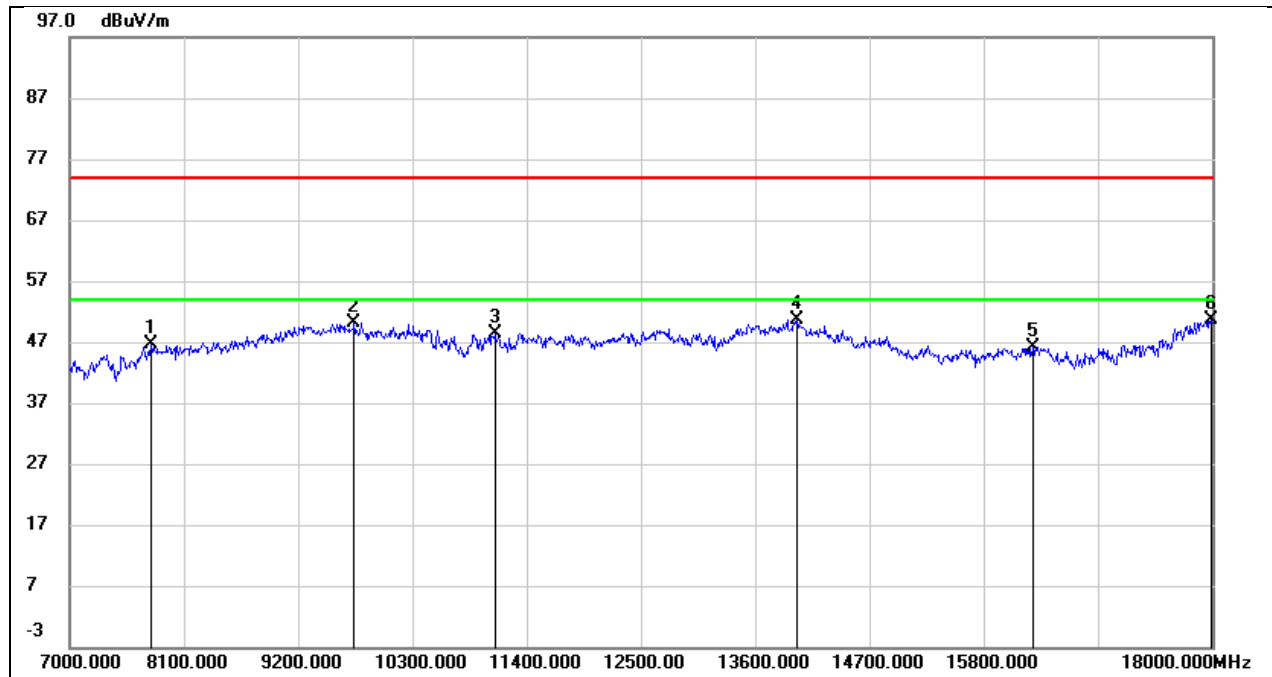


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7781.000	38.69	7.99	46.68	74.00	-27.32	peak
2	9739.000	36.48	13.70	50.18	74.00	-23.82	peak
3	11092.000	32.88	15.56	48.44	74.00	-25.56	peak
4	14007.000	26.94	23.59	50.53	74.00	-23.47	peak
5	16273.000	24.28	21.93	46.21	74.00	-27.79	peak
6	17989.000	21.10	29.49	50.59	74.00	-23.41	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5690
Polarity:	Vertical	Test Voltage:	DC 3.3V

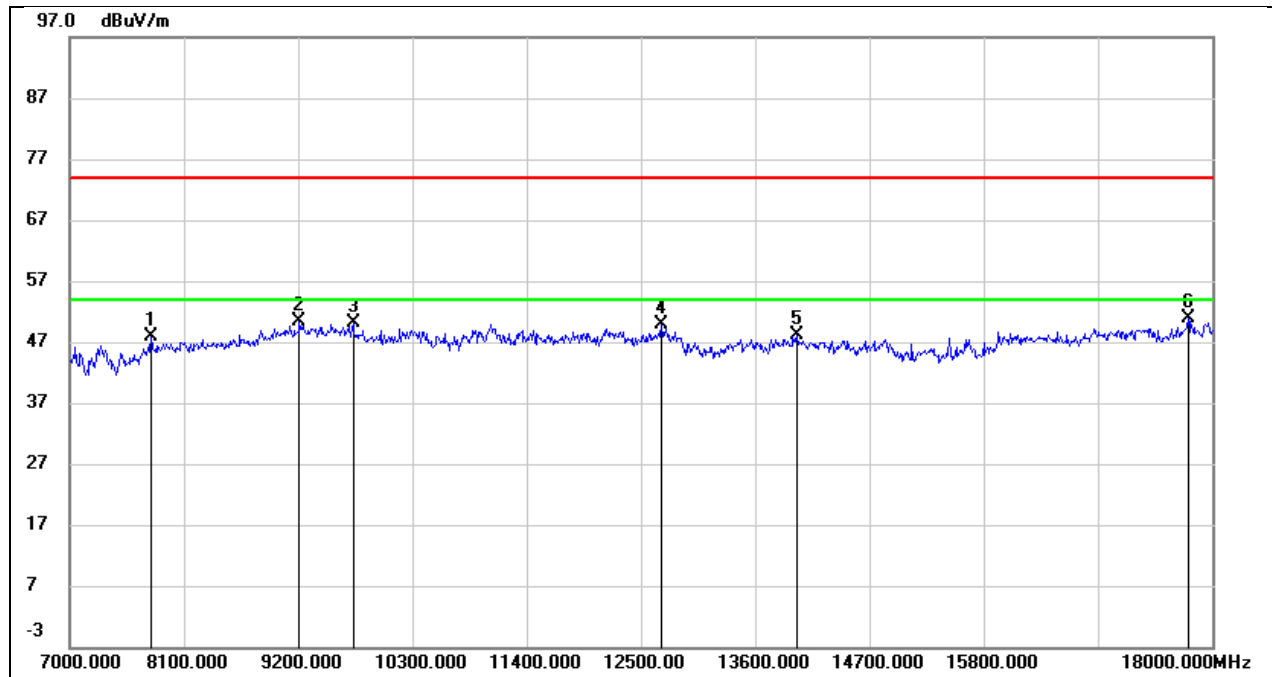


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7781.000	39.42	8.49	47.91	74.00	-26.09	peak
2	9211.000	38.54	11.82	50.36	74.00	-23.64	peak
3	9728.000	36.65	13.36	50.01	74.00	-23.99	peak
4	12698.000	31.23	18.54	49.77	74.00	-24.23	peak
5	13996.000	26.26	21.99	48.25	74.00	-25.75	peak
6	17769.000	24.83	26.00	50.83	74.00	-23.17	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5775
Polarity:	Horizontal	Test Voltage:	DC 3.3V

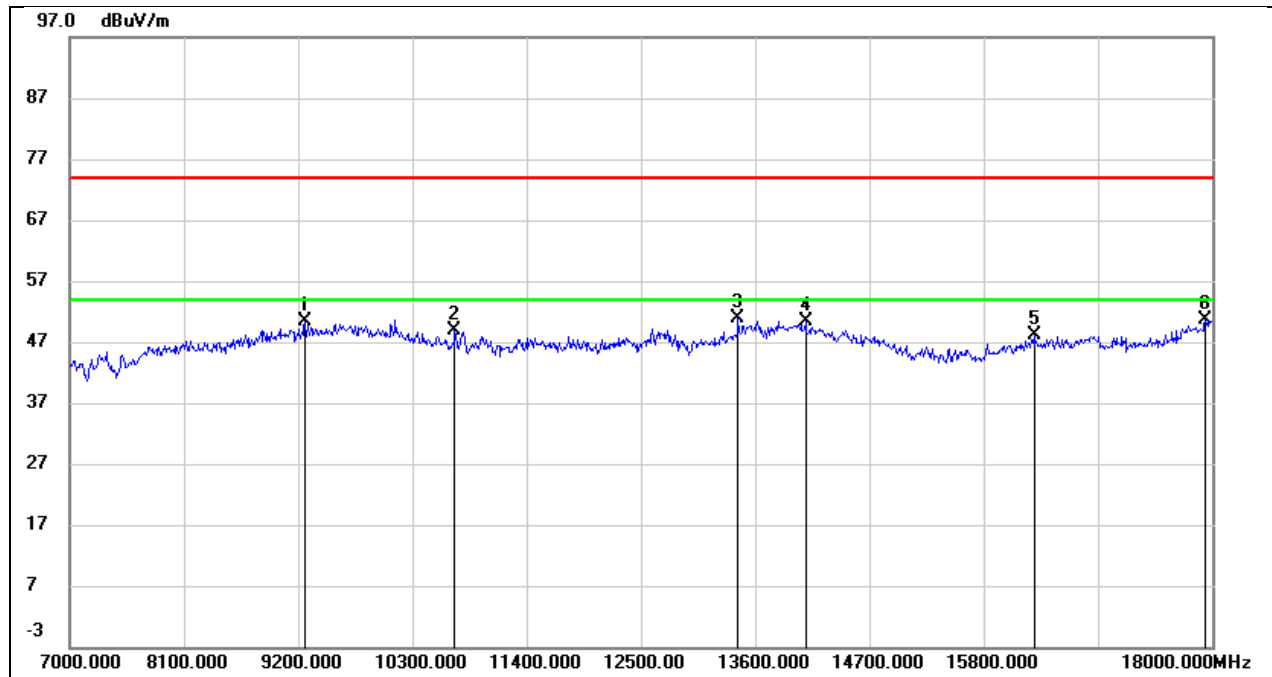


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9266.000	38.49	11.78	50.27	74.00	-23.73	peak
2	10707.000	34.79	14.14	48.93	74.00	-25.07	peak
3	13435.000	29.05	21.79	50.84	74.00	-23.16	peak
4	14084.000	27.00	23.26	50.26	74.00	-23.74	peak
5	16284.000	26.15	21.92	48.07	74.00	-25.93	peak
6	17934.000	21.72	28.91	50.63	74.00	-23.37	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5775
Polarity:	Vertical	Test Voltage:	DC 3.3V

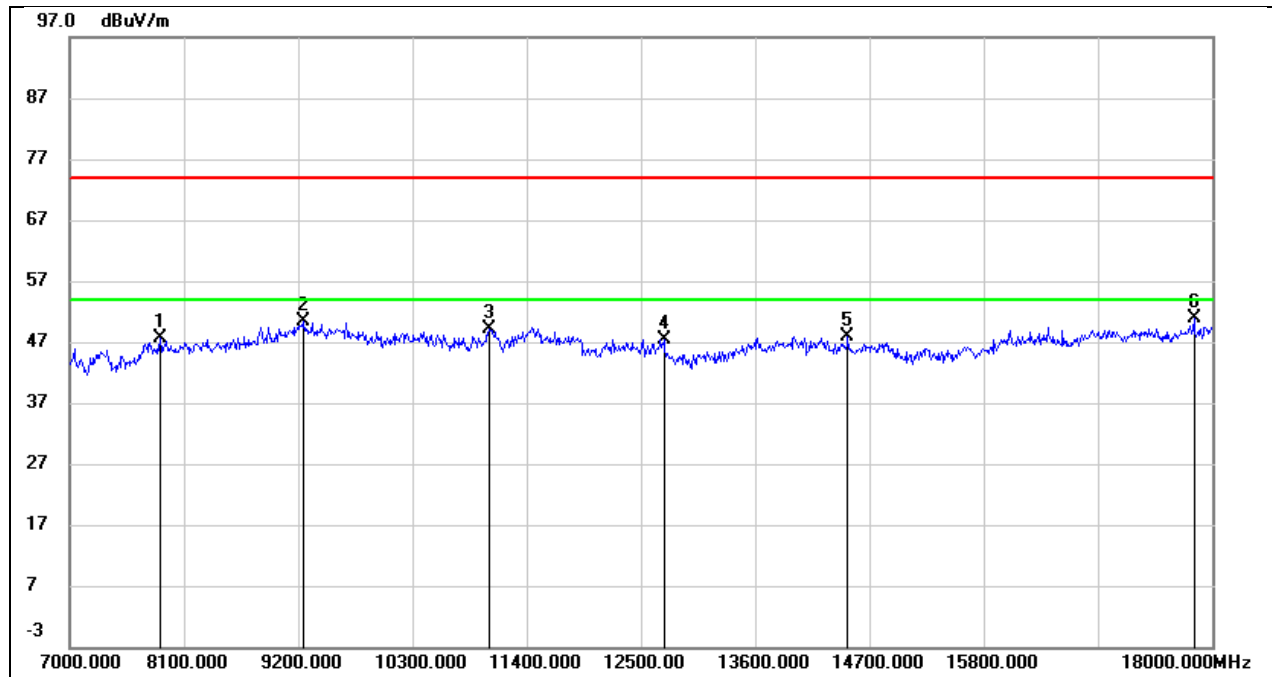


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7869.000	39.04	8.53	47.57	74.00	-26.43	peak
2	9255.000	38.34	11.93	50.27	74.00	-23.73	peak
3	11037.000	34.82	14.42	49.24	74.00	-24.76	peak
4	12720.000	28.70	18.62	47.32	74.00	-26.68	peak
5	14491.000	26.84	20.96	47.80	74.00	-26.20	peak
6	17824.000	24.47	26.31	50.78	74.00	-23.22	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 3.3V

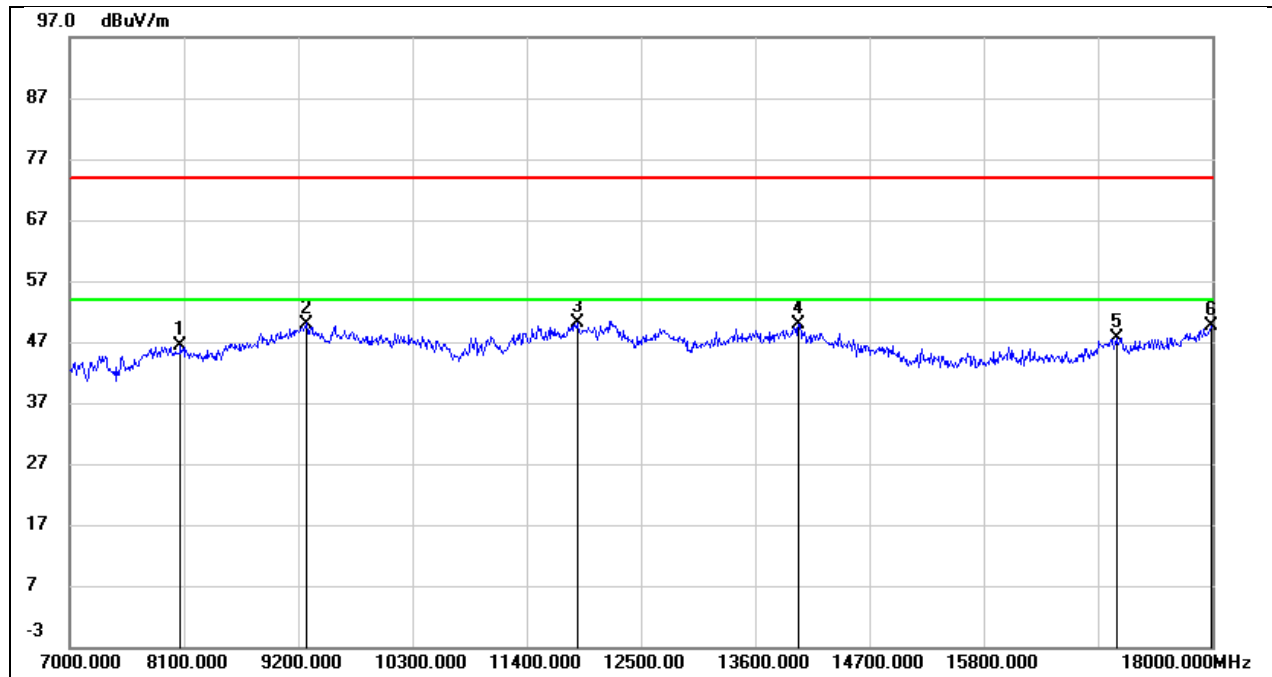


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8067.000	38.11	8.16	46.27	74.00	-27.73	peak
2	9277.000	38.19	11.81	50.00	74.00	-24.00	peak
3	11884.000	31.99	18.20	50.19	74.00	-23.81	peak
4	14018.000	26.43	23.54	49.97	74.00	-24.03	peak
5	17087.000	24.39	23.23	47.62	74.00	-26.38	peak
6	17989.000	20.09	29.49	49.58	74.00	-24.42	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5180
Polarity:	Vertical	Test Voltage:	DC 3.3V

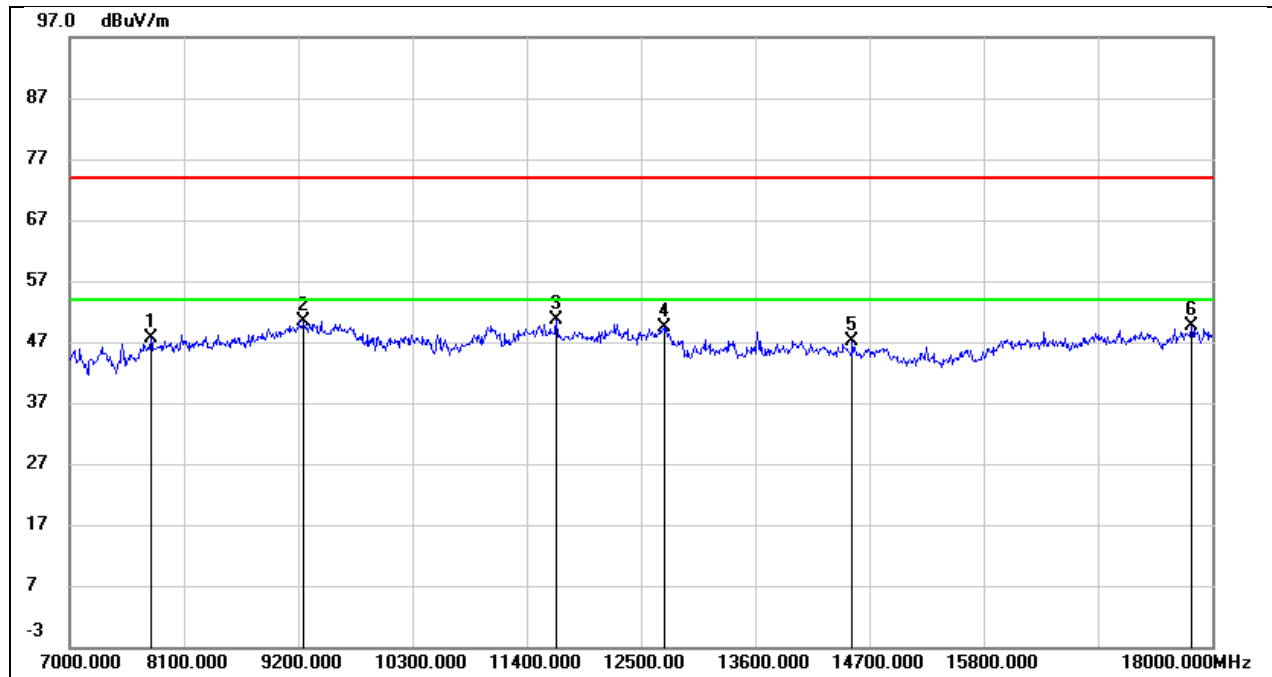


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7781.000	39.15	8.49	47.64	74.00	-26.36	peak
2	9255.000	38.57	11.93	50.50	74.00	-23.50	peak
3	11686.000	33.91	16.71	50.62	74.00	-23.38	peak
4	12720.000	30.83	18.62	49.45	74.00	-24.55	peak
5	14535.000	26.13	20.91	47.04	74.00	-26.96	peak
6	17802.000	23.33	26.18	49.51	74.00	-24.49	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5200
Polarity:	Horizontal	Test Voltage:	DC 3.3V

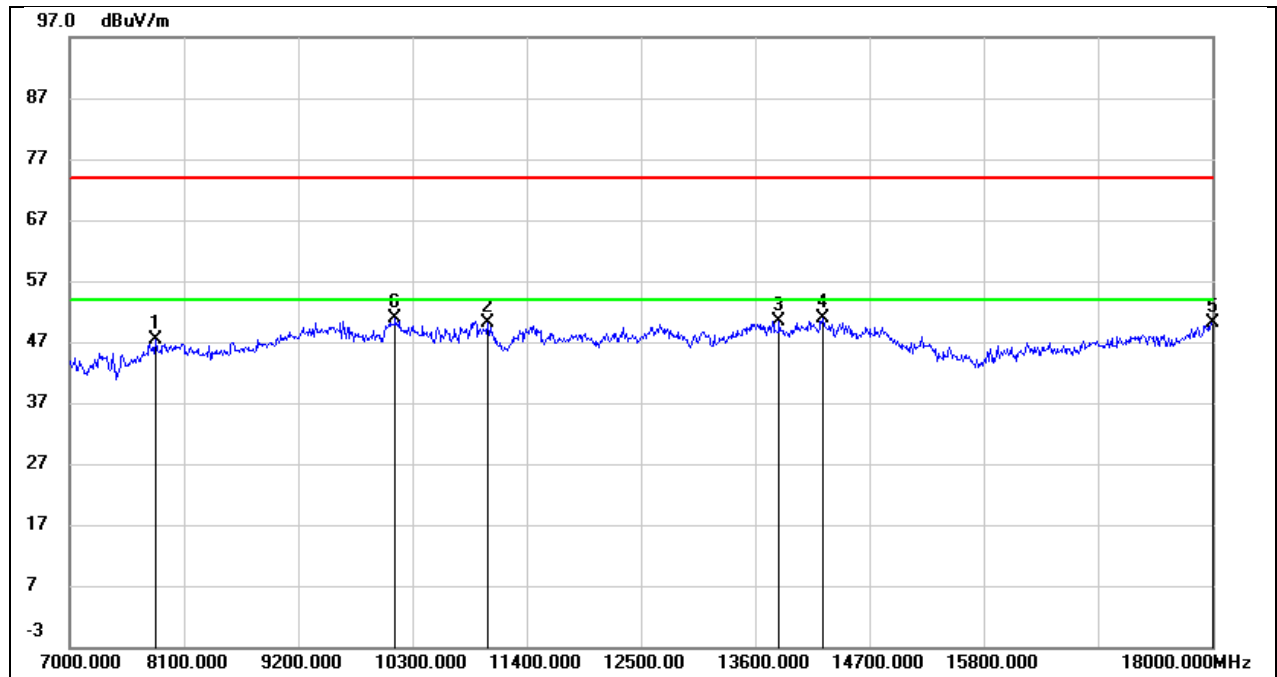


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7825.000	39.39	8.02	47.41	74.00	-26.59	peak
2	11026.000	34.95	15.21	50.16	74.00	-23.84	peak
3	13831.000	27.54	22.93	50.47	74.00	-23.53	peak
4	14249.000	28.30	22.49	50.79	74.00	-23.21	peak
5	18000.000	20.46	29.61	50.07	74.00	-23.93	peak
6	10124.000	37.59	13.23	50.82	74.00	-23.18	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5200
Polarity:	Vertical	Test Voltage:	DC 3.3V

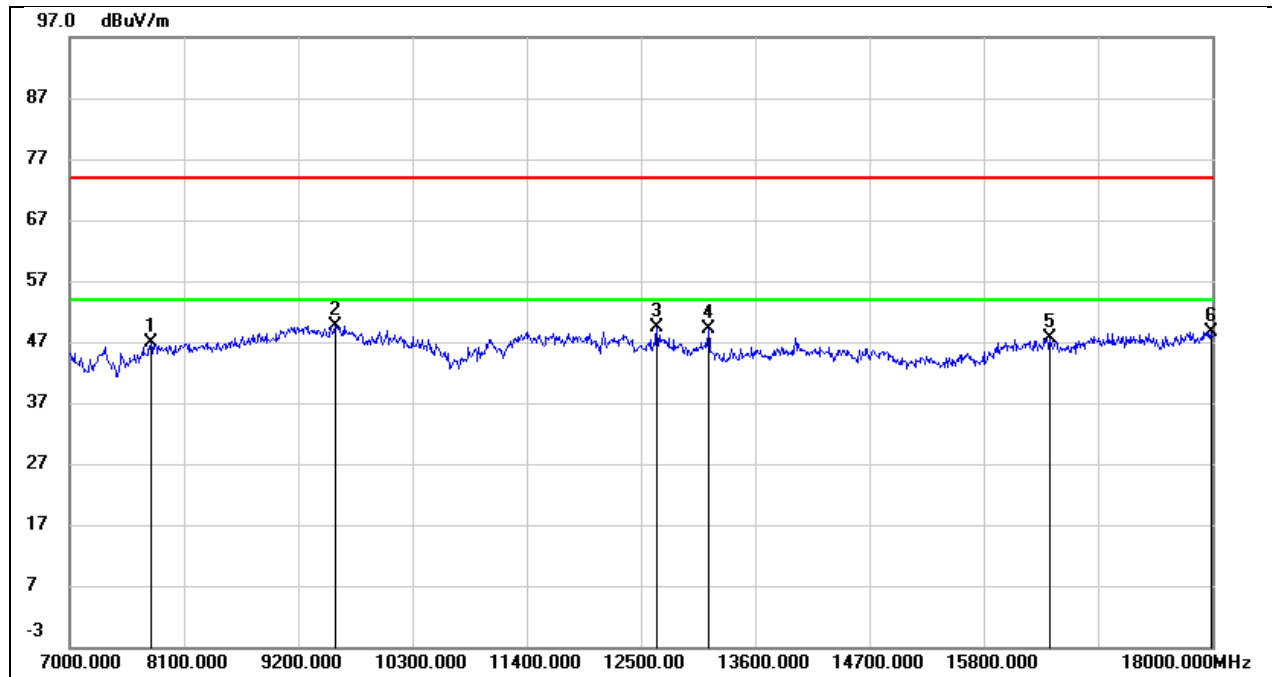


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7781.000	38.42	8.49	46.91	74.00	-27.09	peak
2	9552.000	36.60	13.10	49.70	74.00	-24.30	peak
3	12654.000	30.95	18.39	49.34	74.00	-24.66	peak
4	13149.000	29.85	19.34	49.19	74.00	-24.81	peak
5	16438.000	24.05	23.60	47.65	74.00	-26.35	peak
6	17989.000	21.40	27.33	48.73	74.00	-25.27	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5240
Polarity:	Horizontal	Test Voltage:	DC 3.3V

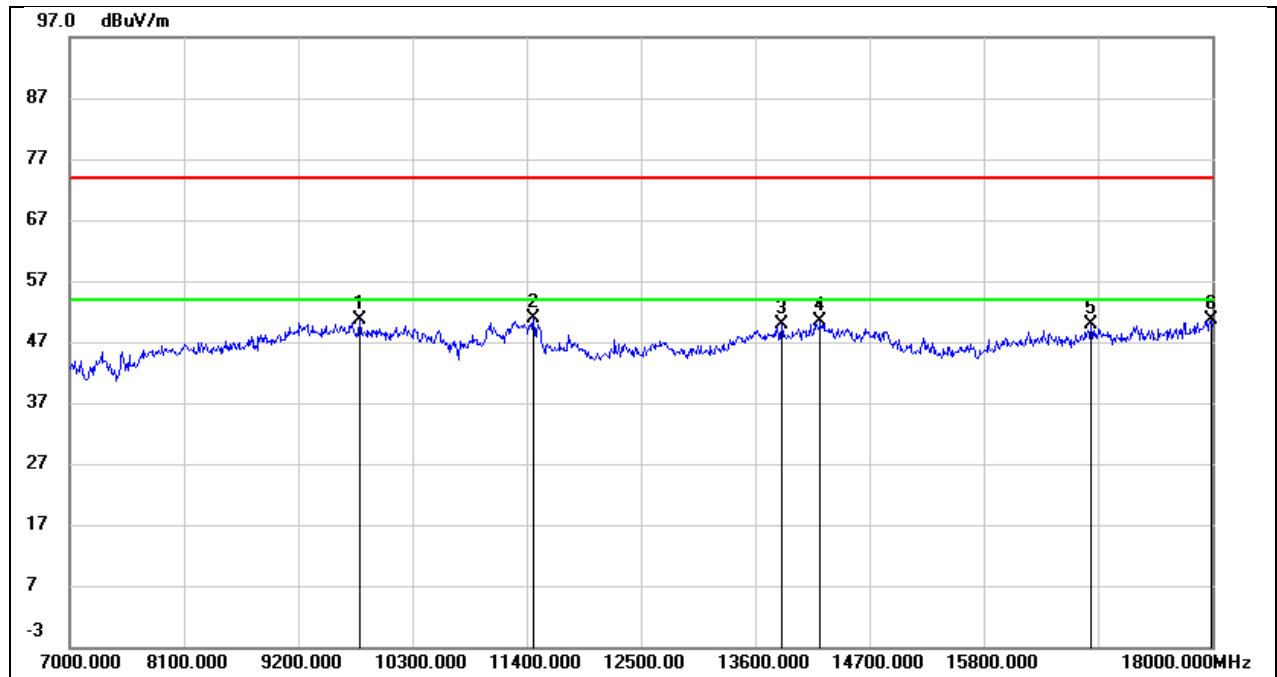


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9794.000	36.74	13.78	50.52	74.00	-23.48	peak
2	11466.000	33.21	17.68	50.89	74.00	-23.11	peak
3	13853.000	26.86	23.01	49.87	74.00	-24.13	peak
4	14227.000	27.64	22.62	50.26	74.00	-23.74	peak
5	16834.000	27.44	22.41	49.85	74.00	-24.15	peak
6	17989.000	21.24	29.49	50.73	74.00	-23.27	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5240
Polarity:	Vertical	Test Voltage:	DC 3.3V

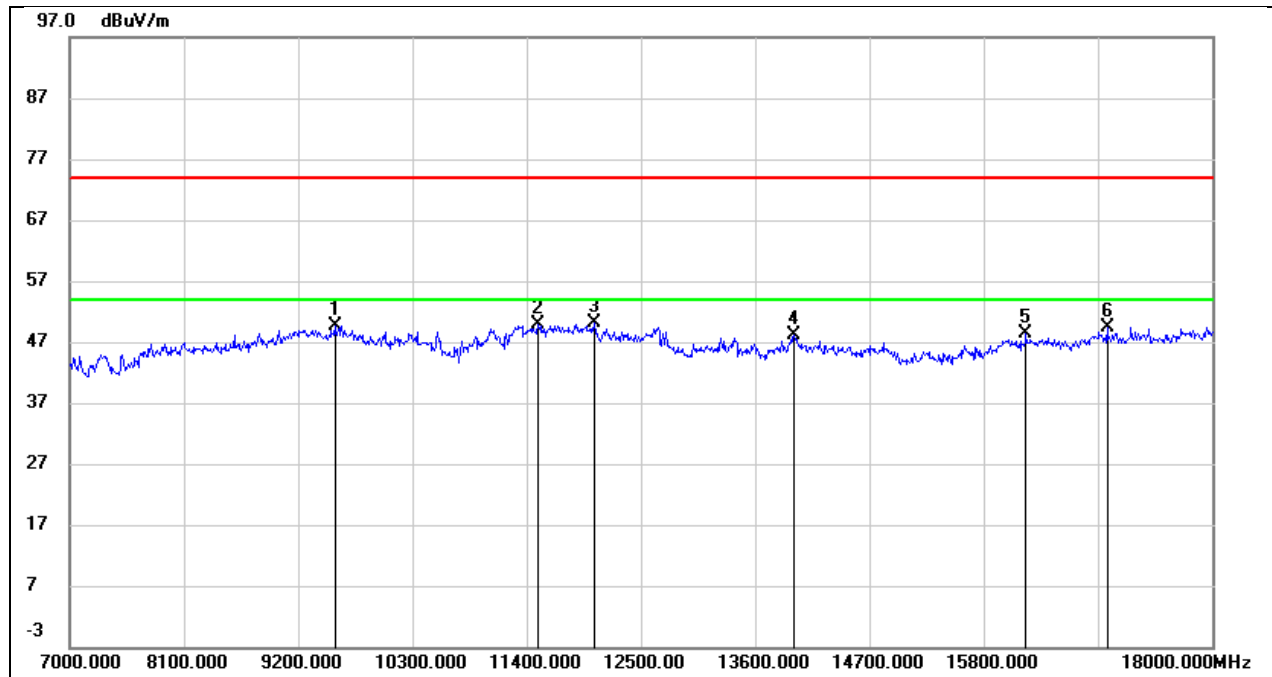


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9552.000	36.57	13.10	49.67	74.00	-24.33	peak
2	11510.000	33.55	16.37	49.92	74.00	-24.08	peak
3	12049.000	32.63	17.47	50.10	74.00	-23.90	peak
4	13974.000	26.28	21.89	48.17	74.00	-25.83	peak
5	16207.000	24.13	24.14	48.27	74.00	-25.73	peak
6	16988.000	25.07	24.40	49.47	74.00	-24.53	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5260
Polarity:	Horizontal	Test Voltage:	DC 3.3V

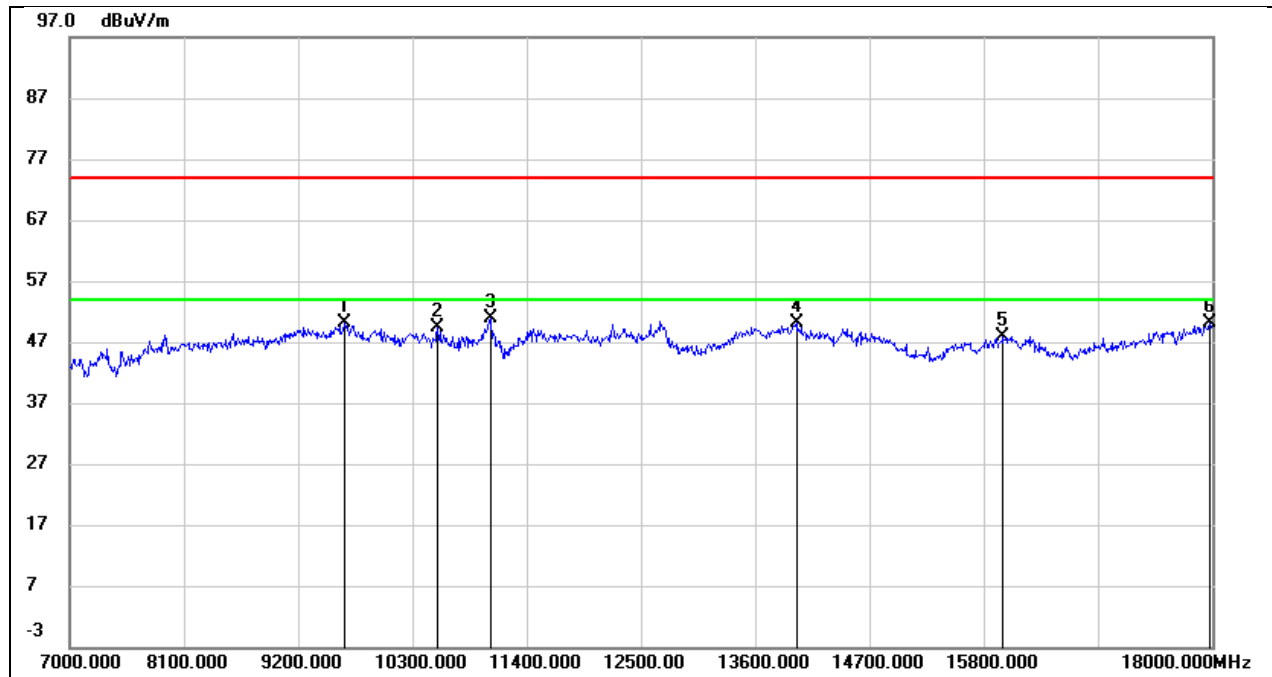


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9640.000	36.72	13.53	50.25	74.00	-23.75	peak
2	10542.000	35.80	13.66	49.46	74.00	-24.54	peak
3	11048.000	35.52	15.33	50.85	74.00	-23.15	peak
4	13996.000	26.52	23.59	50.11	74.00	-23.89	peak
5	15987.000	27.57	20.41	47.98	74.00	-26.02	peak
6	17978.000	20.63	29.38	50.01	74.00	-23.99	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5260
Polarity:	Vertical	Test Voltage:	DC 3.3V

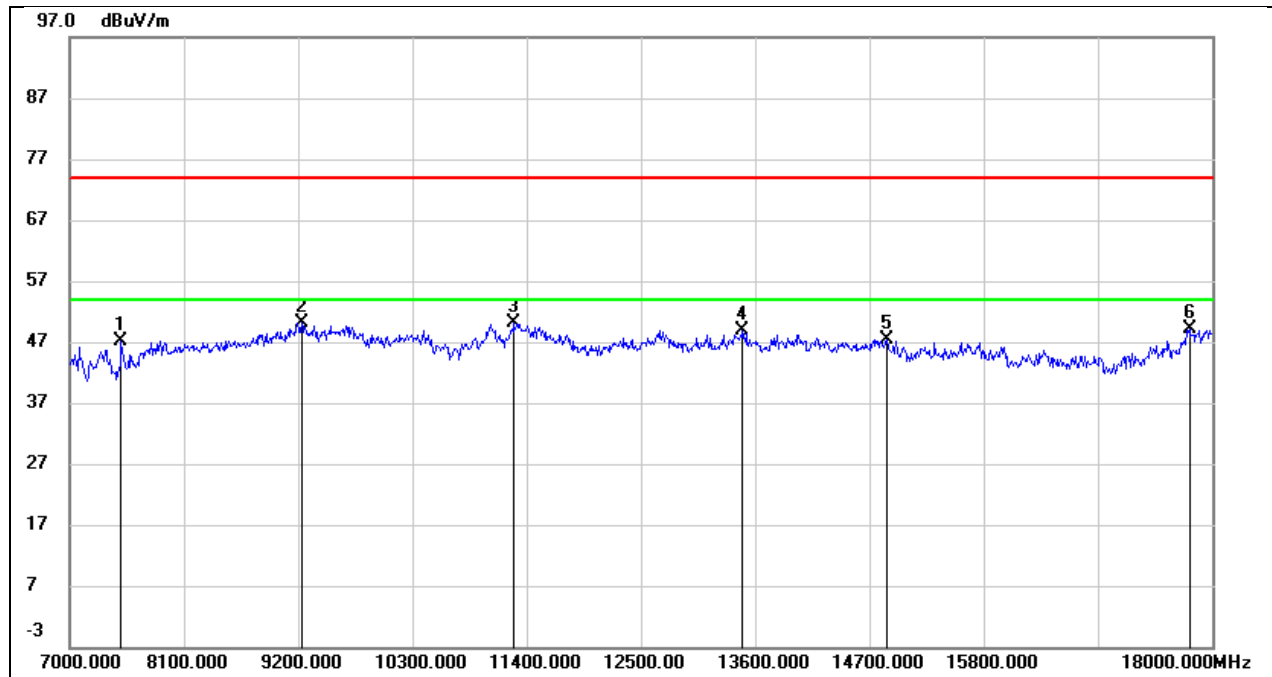


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7495.000	38.66	8.35	47.01	74.00	-26.99	peak
2	9233.000	38.35	11.88	50.23	74.00	-23.77	peak
3	11279.000	34.77	15.44	50.21	74.00	-23.79	peak
4	13479.000	28.56	20.27	48.83	74.00	-25.17	peak
5	14865.000	27.03	20.40	47.43	74.00	-26.57	peak
6	17780.000	23.18	26.06	49.24	74.00	-24.76	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5280
Polarity:	Horizontal	Test Voltage:	DC 3.3V

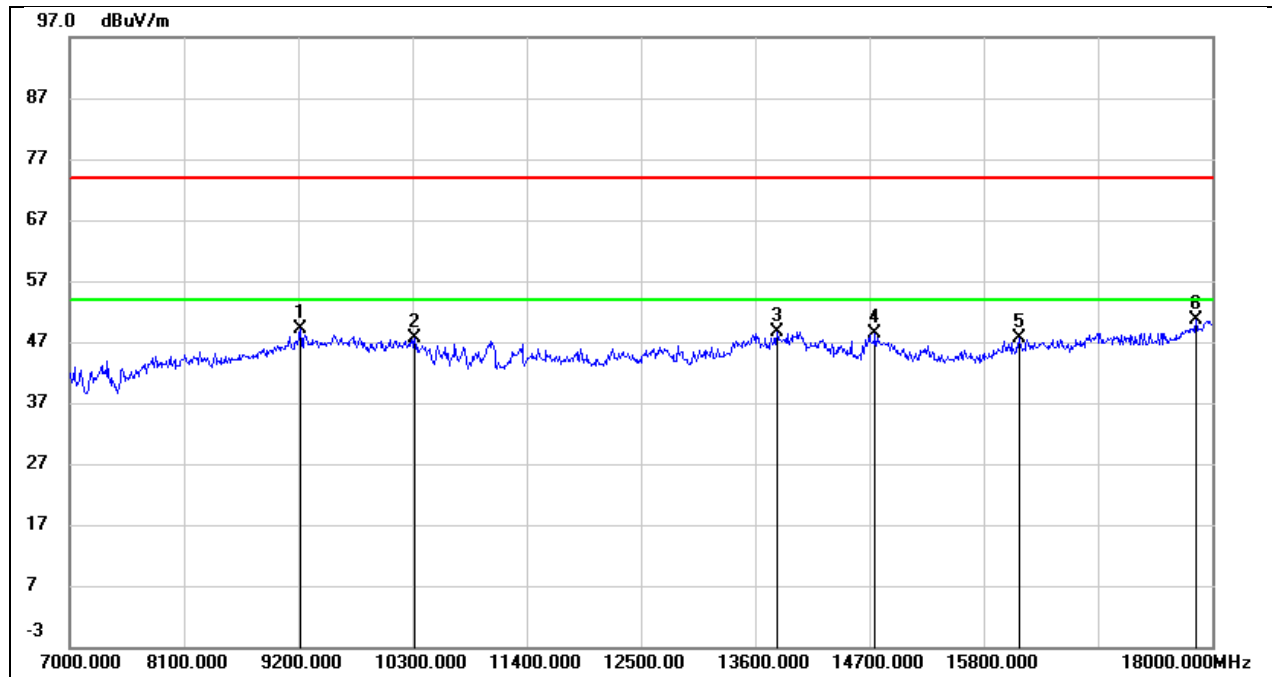


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9222.000	37.37	11.64	49.01	74.00	-24.99	peak
2	10322.000	34.30	13.28	47.58	74.00	-26.42	peak
3	13809.000	25.79	22.83	48.62	74.00	-25.38	peak
4	14755.000	27.84	20.46	48.30	74.00	-25.70	peak
5	16141.000	25.93	21.58	47.51	74.00	-26.49	peak
6	17846.000	22.59	27.97	50.56	74.00	-23.44	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5280
Polarity:	Vertical	Test Voltage:	DC 3.3V

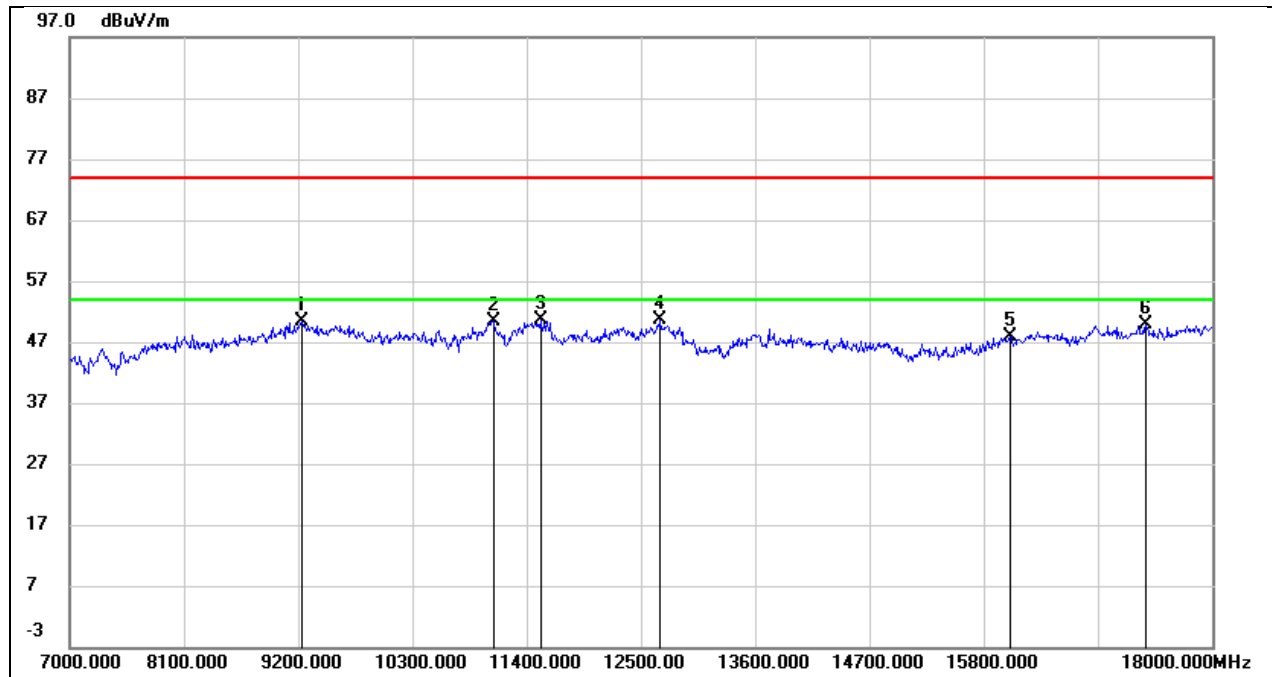


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9233.000	38.60	11.88	50.48	74.00	-23.52	peak
2	11081.000	35.84	14.59	50.43	74.00	-23.57	peak
3	11532.000	34.30	16.44	50.74	74.00	-23.26	peak
4	12687.000	32.12	18.51	50.63	74.00	-23.37	peak
5	16053.000	24.74	23.21	47.95	74.00	-26.05	peak
6	17362.000	24.77	25.03	49.80	74.00	-24.20	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5320
Polarity:	Horizontal	Test Voltage:	DC 3.3V

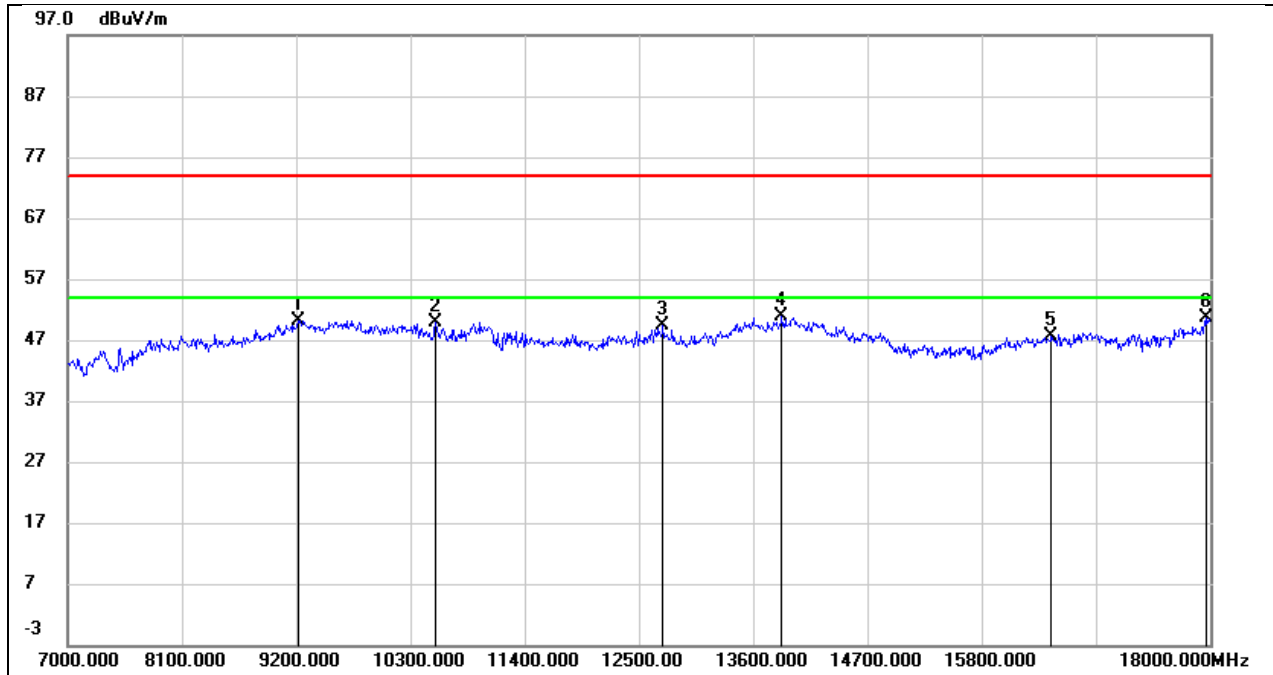


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9222.000	38.60	11.64	50.24	74.00	-23.76	peak
2	10542.000	36.18	13.66	49.84	74.00	-24.16	peak
3	12731.000	29.59	19.70	49.29	74.00	-24.71	peak
4	13875.000	27.73	23.11	50.84	74.00	-23.16	peak
5	16471.000	25.78	21.83	47.61	74.00	-26.39	peak
6	17967.000	21.41	29.26	50.67	74.00	-23.33	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5320
Polarity:	Vertical	Test Voltage:	DC 3.3V

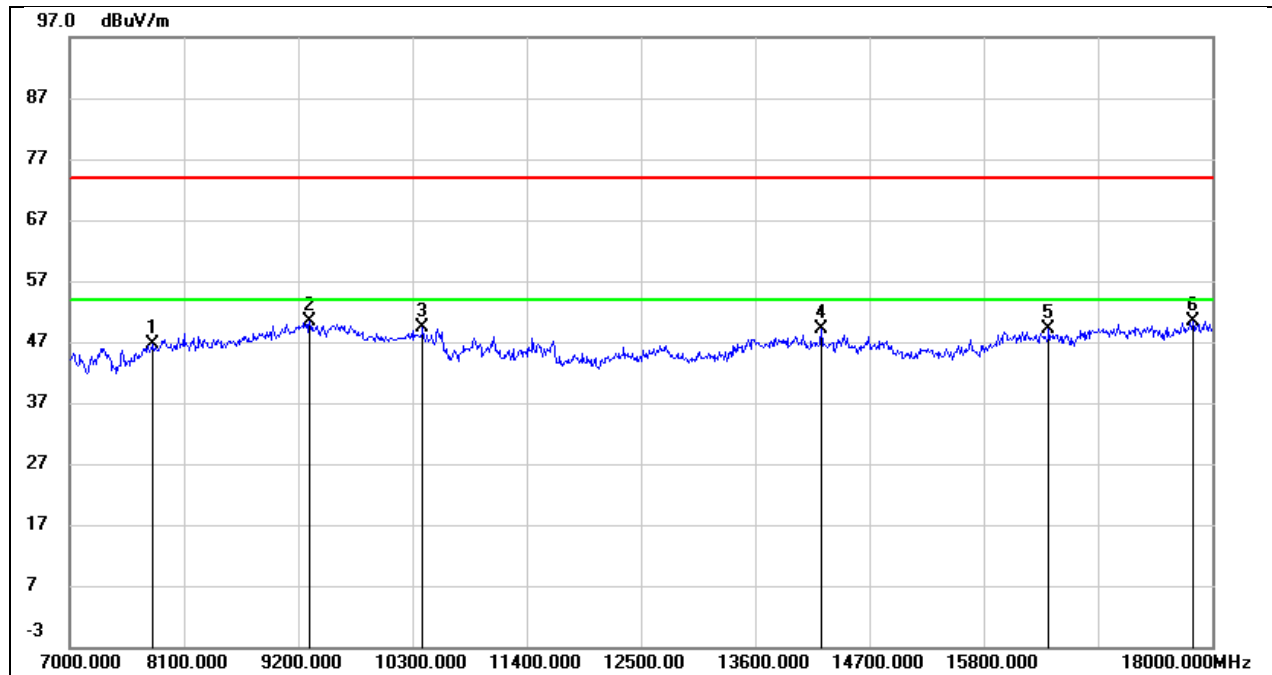


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7803.000	38.11	8.51	46.62	74.00	-27.38	peak
2	9310.000	38.35	12.07	50.42	74.00	-23.58	peak
3	10399.000	36.37	13.05	49.42	74.00	-24.58	peak
4	14238.000	27.55	21.58	49.13	74.00	-24.87	peak
5	16427.000	25.46	23.60	49.06	74.00	-24.94	peak
6	17813.000	24.13	26.24	50.37	74.00	-23.63	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5500
Polarity:	Horizontal	Test Voltage:	DC 3.3V

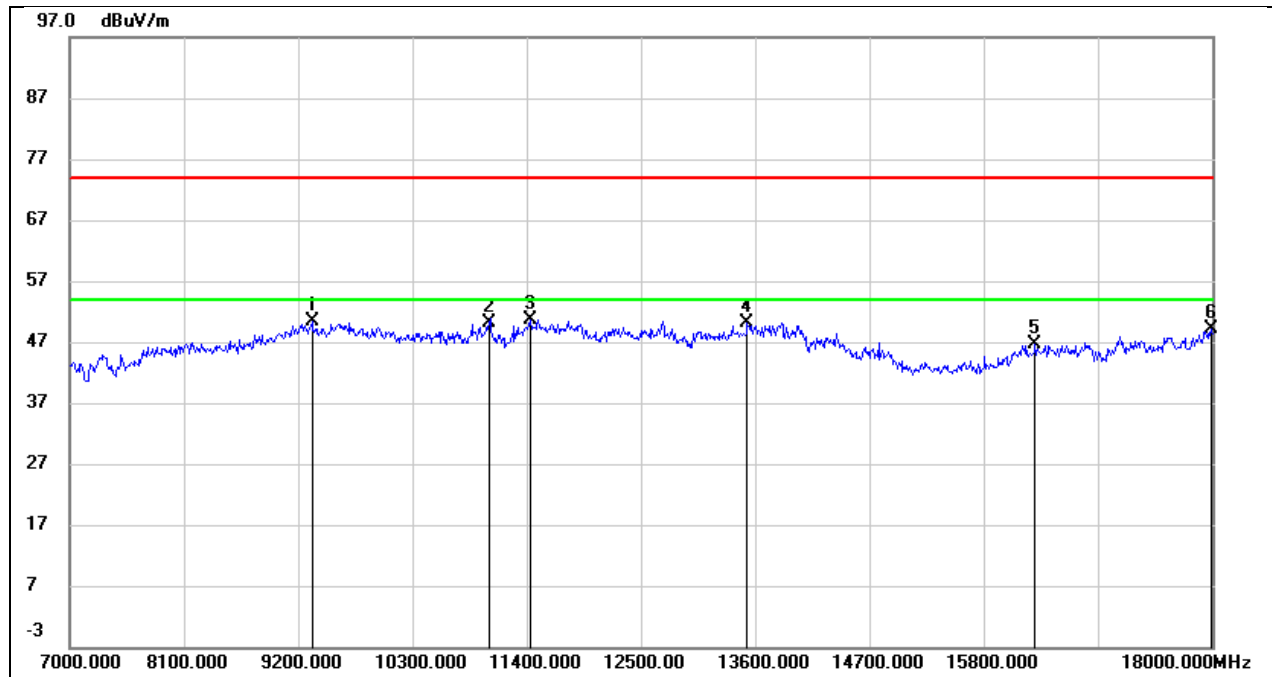


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9332.000	38.34	11.99	50.33	74.00	-23.67	peak
2	11037.000	34.86	15.27	50.13	74.00	-23.87	peak
3	11433.000	33.24	17.51	50.75	74.00	-23.25	peak
4	13523.000	28.13	22.08	50.21	74.00	-23.79	peak
5	16295.000	24.64	21.91	46.55	74.00	-27.45	peak
6	17989.000	19.53	29.49	49.02	74.00	-24.98	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5500
Polarity:	Vertical	Test Voltage:	DC 3.3V

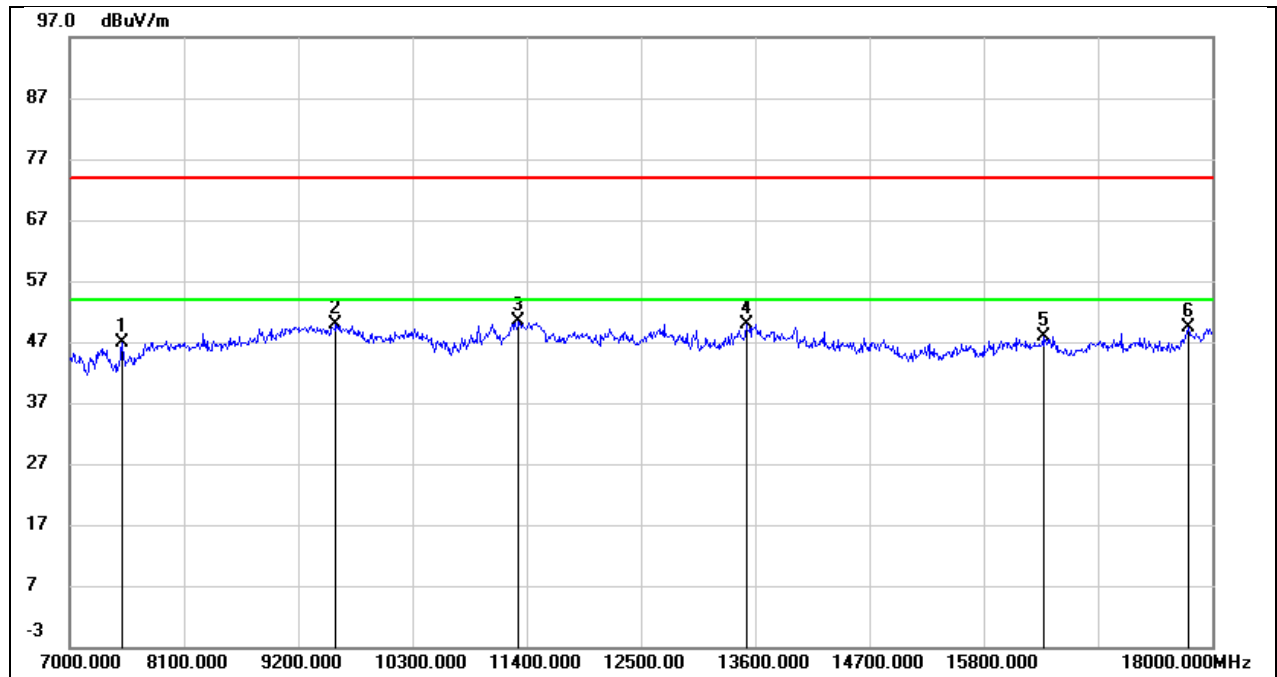


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7506.000	38.65	8.34	46.99	74.00	-27.01	peak
2	9563.000	36.63	13.14	49.77	74.00	-24.23	peak
3	11323.000	34.78	15.64	50.42	74.00	-23.58	peak
4	13512.000	29.59	20.36	49.95	74.00	-24.05	peak
5	16372.000	24.22	23.68	47.90	74.00	-26.10	peak
6	17769.000	23.28	26.00	49.28	74.00	-24.72	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5580
Polarity:	Horizontal	Test Voltage:	DC 3.3V

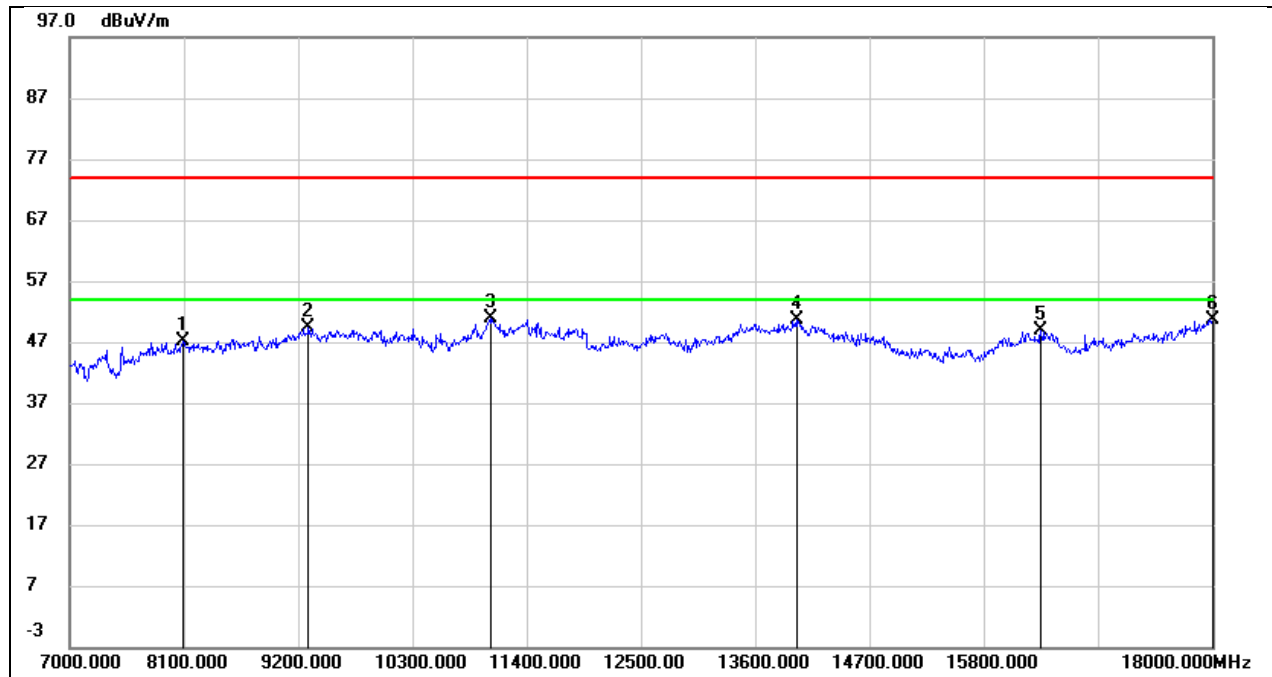


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8089.000	38.90	8.19	47.09	74.00	-26.91	peak
2	9299.000	37.61	11.88	49.49	74.00	-24.51	peak
3	11048.000	35.59	15.33	50.92	74.00	-23.08	peak
4	13996.000	27.13	23.59	50.72	74.00	-23.28	peak
5	16350.000	27.02	21.83	48.85	74.00	-25.15	peak
6	18000.000	21.05	29.61	50.66	74.00	-23.34	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5580
Polarity:	Vertical	Test Voltage:	DC 3.3V

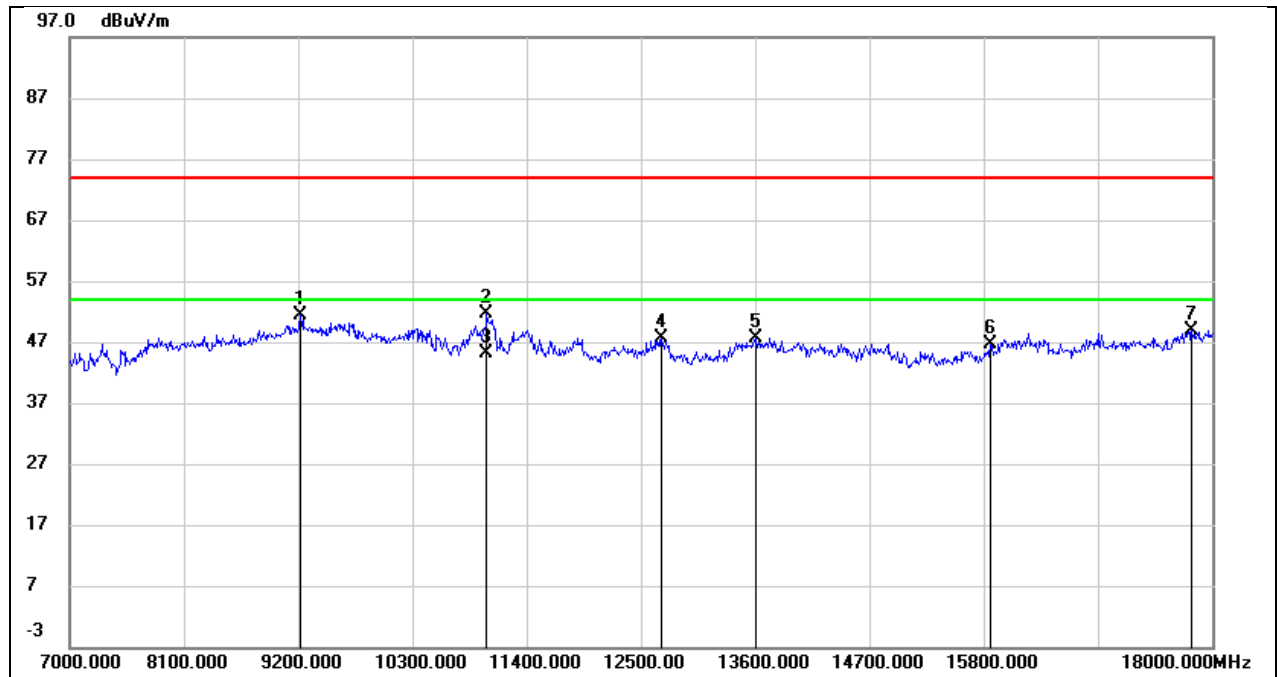


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9222.000	39.53	11.86	51.39	74.00	-22.61	peak
2	11015.000	37.35	14.32	51.67	74.00	-22.33	peak
3	11015.000	30.83	14.32	45.15	54.00	-8.85	AVG
4	12698.000	29.11	18.54	47.65	74.00	-26.35	peak
5	13611.000	27.10	20.57	47.67	74.00	-26.33	peak
6	15866.000	24.58	22.05	46.63	74.00	-27.37	peak
7	17802.000	22.78	26.18	48.96	74.00	-25.04	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5700
Polarity:	Horizontal	Test Voltage:	DC 3.3V

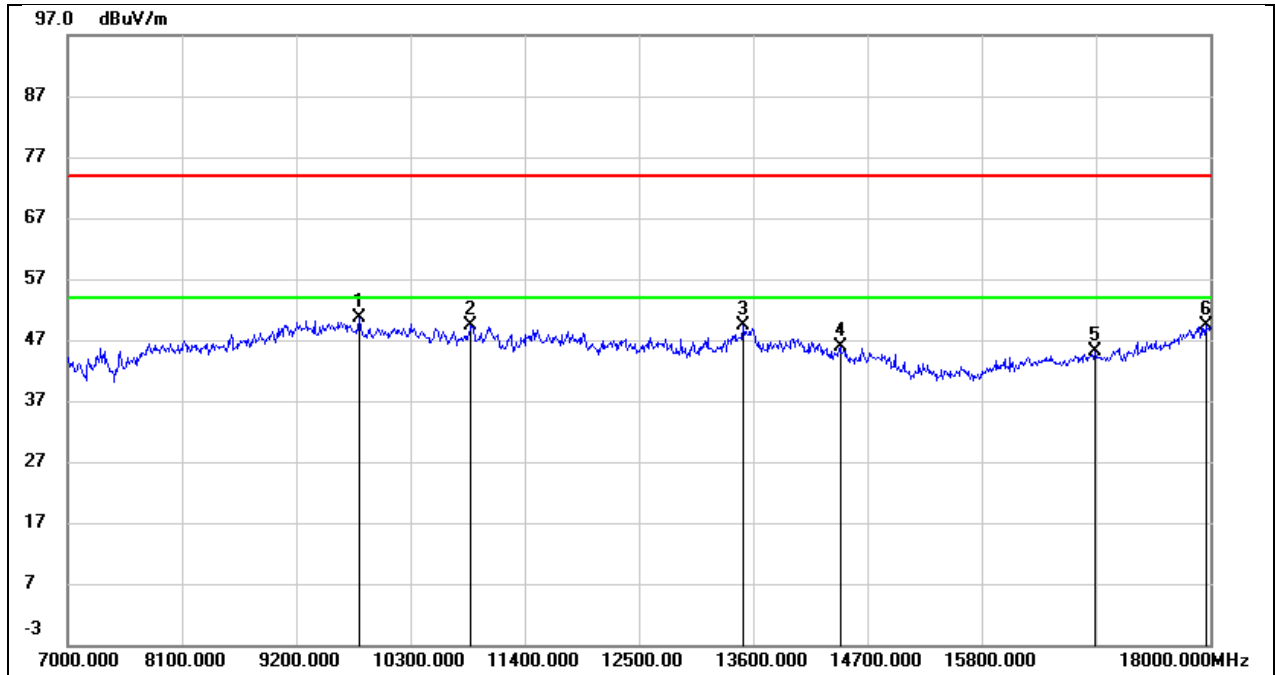


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9805.000	36.95	13.80	50.75	74.00	-23.25	peak
2	10883.000	34.67	14.68	49.35	74.00	-24.65	peak
3	13501.000	27.32	22.04	49.36	74.00	-24.64	peak
4	14436.000	24.47	21.44	45.91	74.00	-28.09	peak
5	16889.000	22.56	22.51	45.07	74.00	-28.93	peak
6	17956.000	20.33	29.14	49.47	74.00	-24.53	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5700
Polarity:	Vertical	Test Voltage:	DC 3.3V

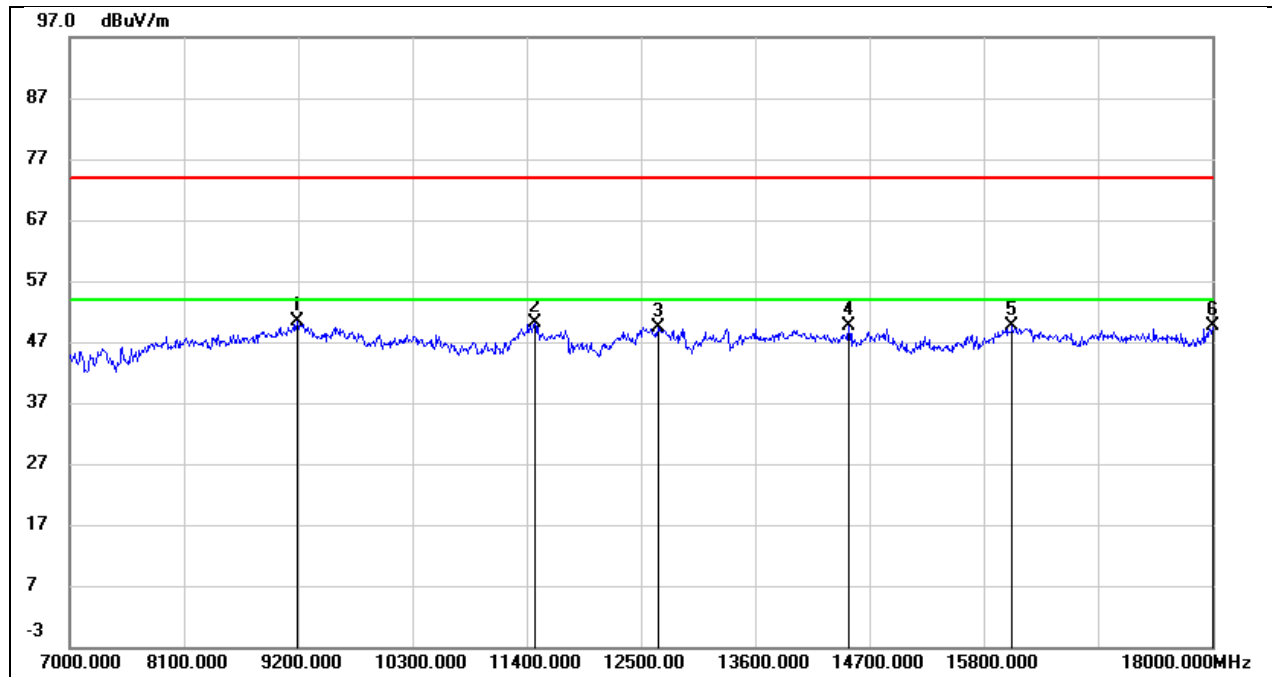


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9189.000	38.56	11.76	50.32	74.00	-23.68	peak
2	11477.000	33.78	16.26	50.04	74.00	-23.96	peak
3	12665.000	31.05	18.42	49.47	74.00	-24.53	peak
4	14502.000	28.58	20.95	49.53	74.00	-24.47	peak
5	16075.000	26.27	23.35	49.62	74.00	-24.38	peak
6	18000.000	22.13	27.41	49.54	74.00	-24.46	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5720
Polarity:	Horizontal	Test Voltage:	DC 3.3V

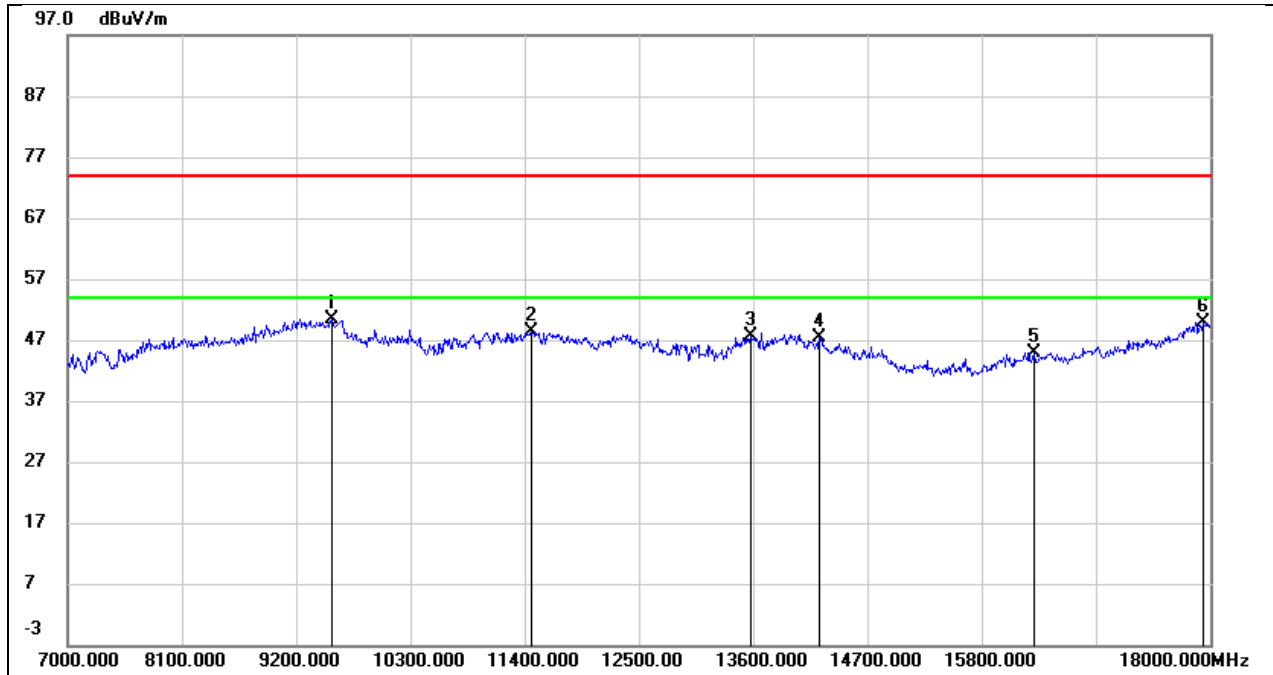


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9541.000	37.16	13.10	50.26	74.00	-23.74	peak
2	11466.000	30.59	17.68	48.27	74.00	-25.73	peak
3	13578.000	25.34	22.18	47.52	74.00	-26.48	peak
4	14238.000	24.80	22.56	47.36	74.00	-26.64	peak
5	16306.000	23.07	21.89	44.96	74.00	-29.04	peak
6	17934.000	21.01	28.91	49.92	74.00	-24.08	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5720
Polarity:	Vertical	Test Voltage:	DC 3.3V

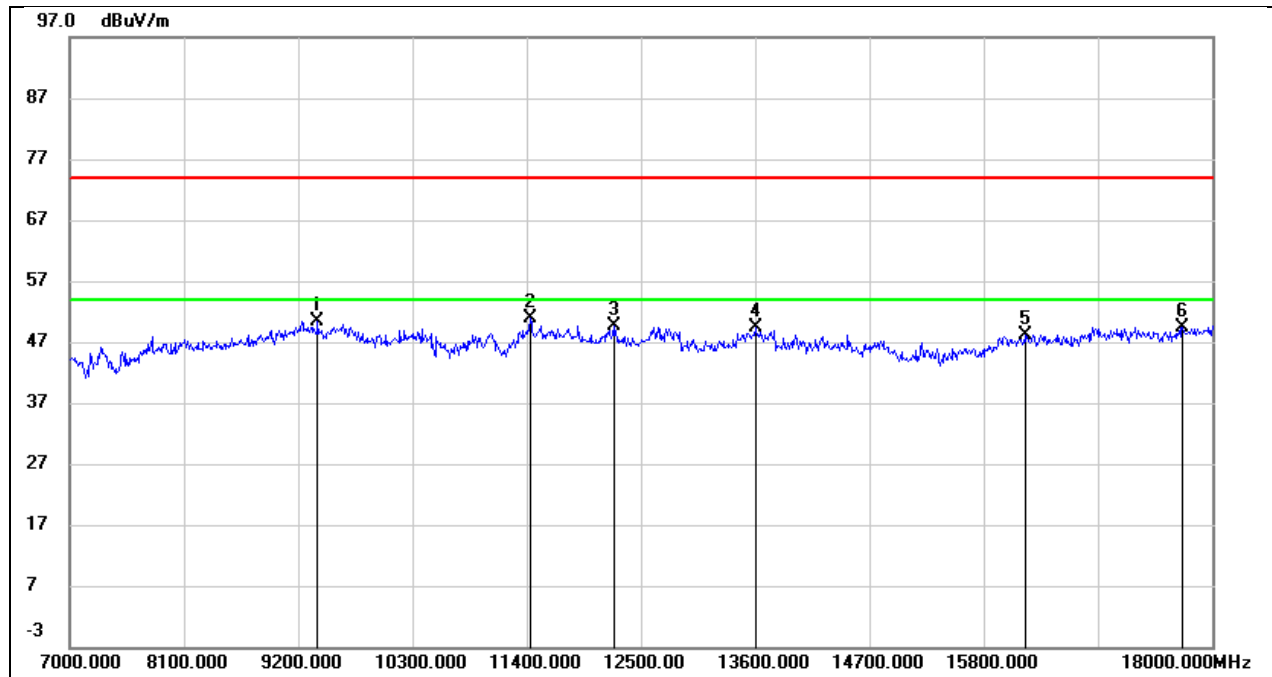


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9387.000	38.14	12.26	50.40	74.00	-23.60	peak
2	11433.000	34.88	16.11	50.99	74.00	-23.01	peak
3	12236.000	31.97	17.76	49.73	74.00	-24.27	peak
4	13600.000	28.86	20.54	49.40	74.00	-24.60	peak
5	16196.000	24.09	24.13	48.22	74.00	-25.78	peak
6	17714.000	23.75	25.71	49.46	74.00	-24.54	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5745
Polarity:	Horizontal	Test Voltage:	DC 3.3V

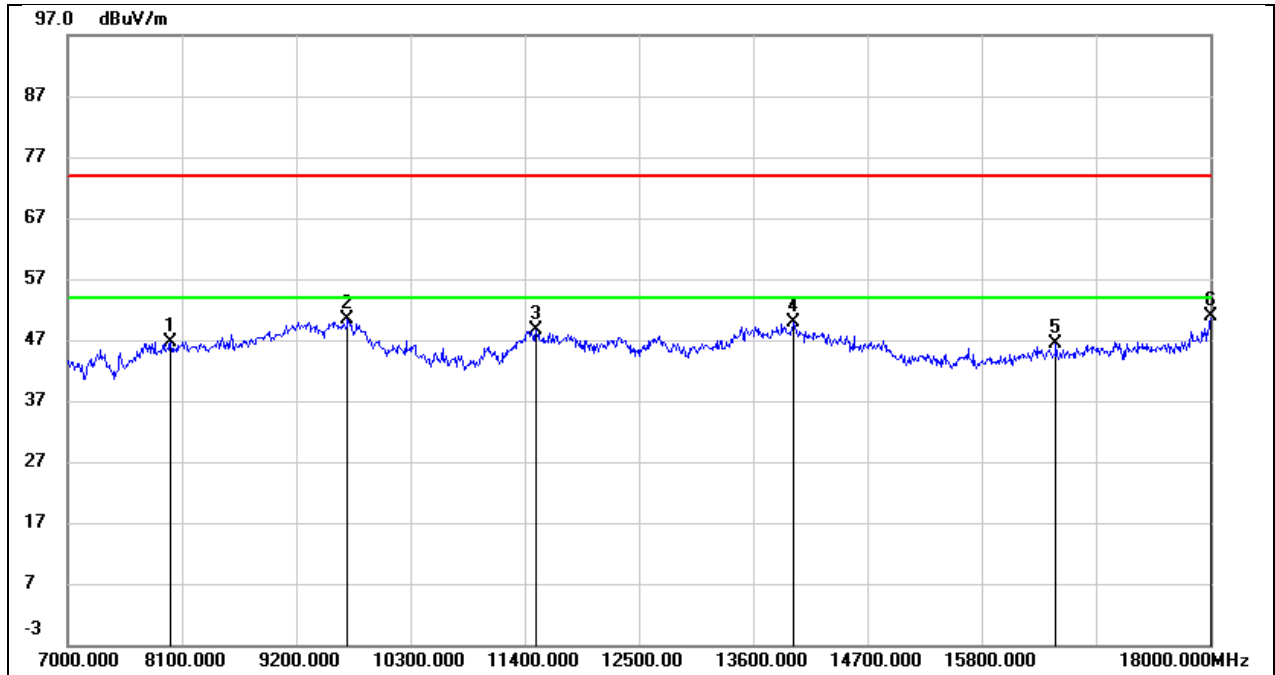


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7990.000	38.60	8.07	46.67	74.00	-27.33	peak
2	9695.000	36.88	13.62	50.50	74.00	-23.50	peak
3	11510.000	30.75	17.86	48.61	74.00	-25.39	peak
4	13985.000	26.37	23.55	49.92	74.00	-24.08	peak
5	16515.000	24.56	21.87	46.43	74.00	-27.57	peak
6	18000.000	21.15	29.61	50.76	74.00	-23.24	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5745
Polarity:	Vertical	Test Voltage:	DC 3.3V

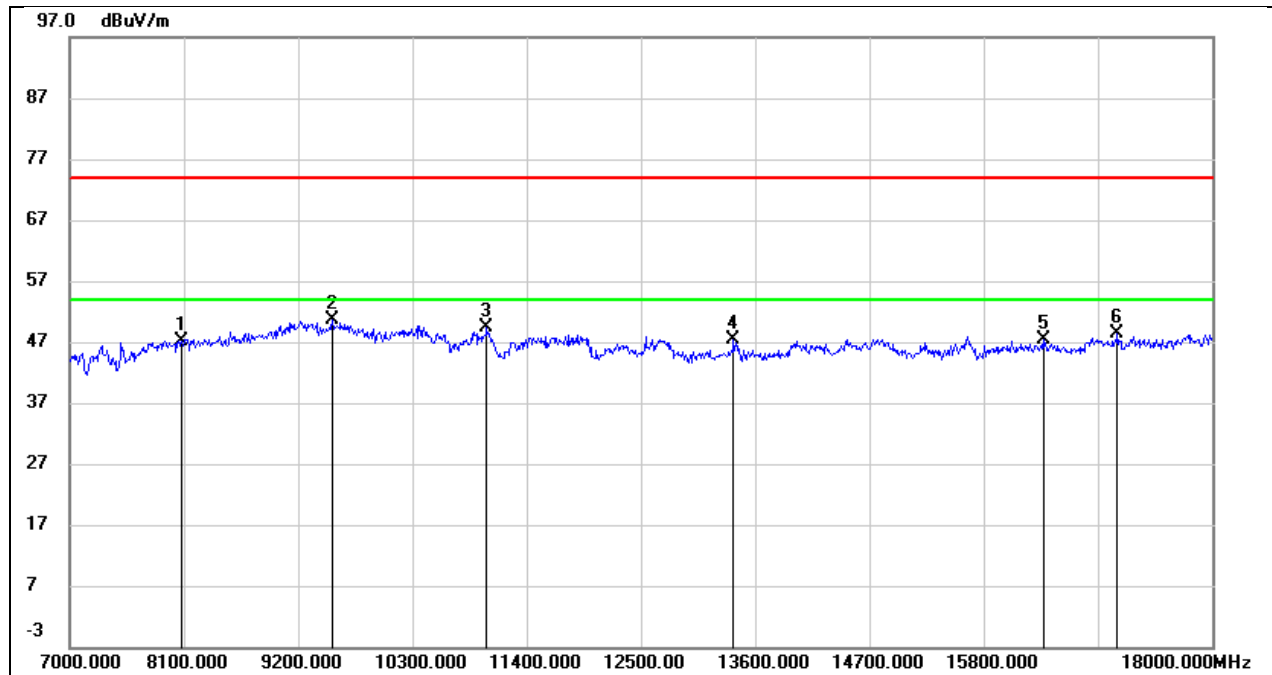


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8078.000	38.47	8.69	47.16	74.00	-26.84	peak
2	9530.000	37.60	13.00	50.60	74.00	-23.40	peak
3	11015.000	35.08	14.32	49.40	74.00	-24.60	peak
4	13391.000	27.46	20.02	47.48	74.00	-26.52	peak
5	16372.000	23.65	23.68	47.33	74.00	-26.67	peak
6	17087.000	23.75	24.63	48.38	74.00	-25.62	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5785
Polarity:	Horizontal	Test Voltage:	DC 3.3V

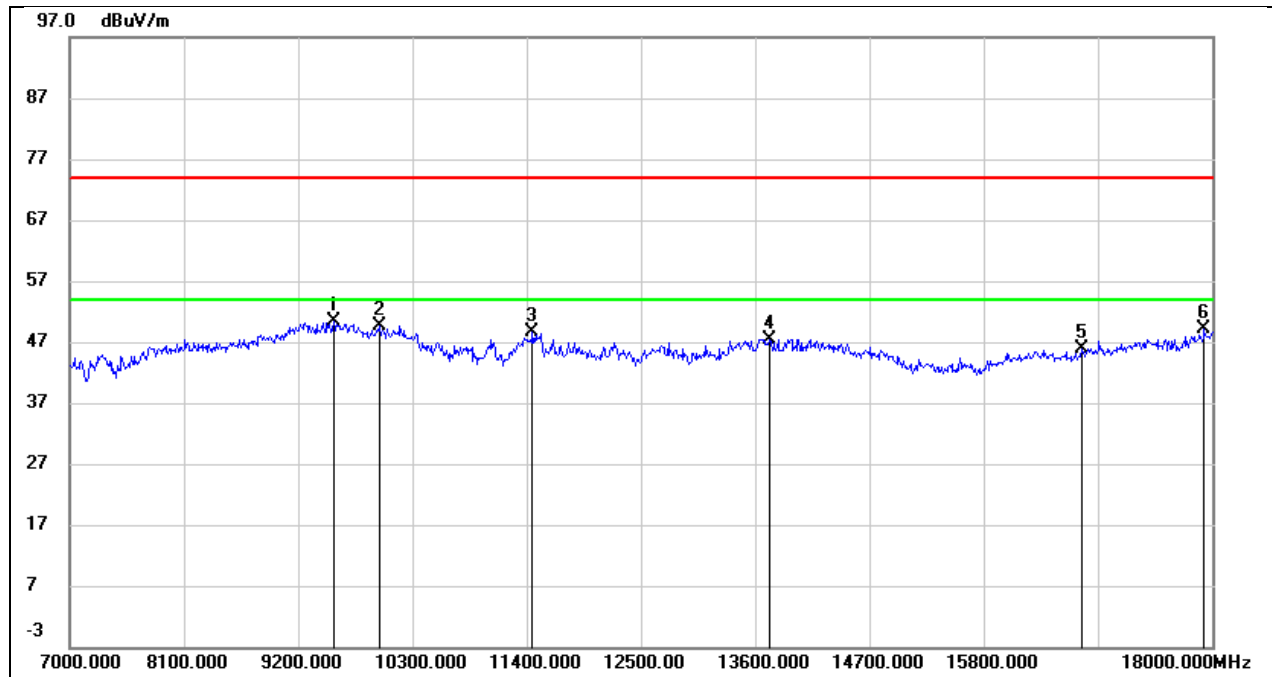


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9541.000	37.24	13.10	50.34	74.00	-23.66	peak
2	9981.000	36.26	13.39	49.65	74.00	-24.35	peak
3	11455.000	31.05	17.62	48.67	74.00	-25.33	peak
4	13743.000	24.84	22.64	47.48	74.00	-26.52	peak
5	16746.000	23.77	22.21	45.98	74.00	-28.02	peak
6	17923.000	20.45	28.78	49.23	74.00	-24.77	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5785
Polarity:	Vertical	Test Voltage:	DC 3.3V

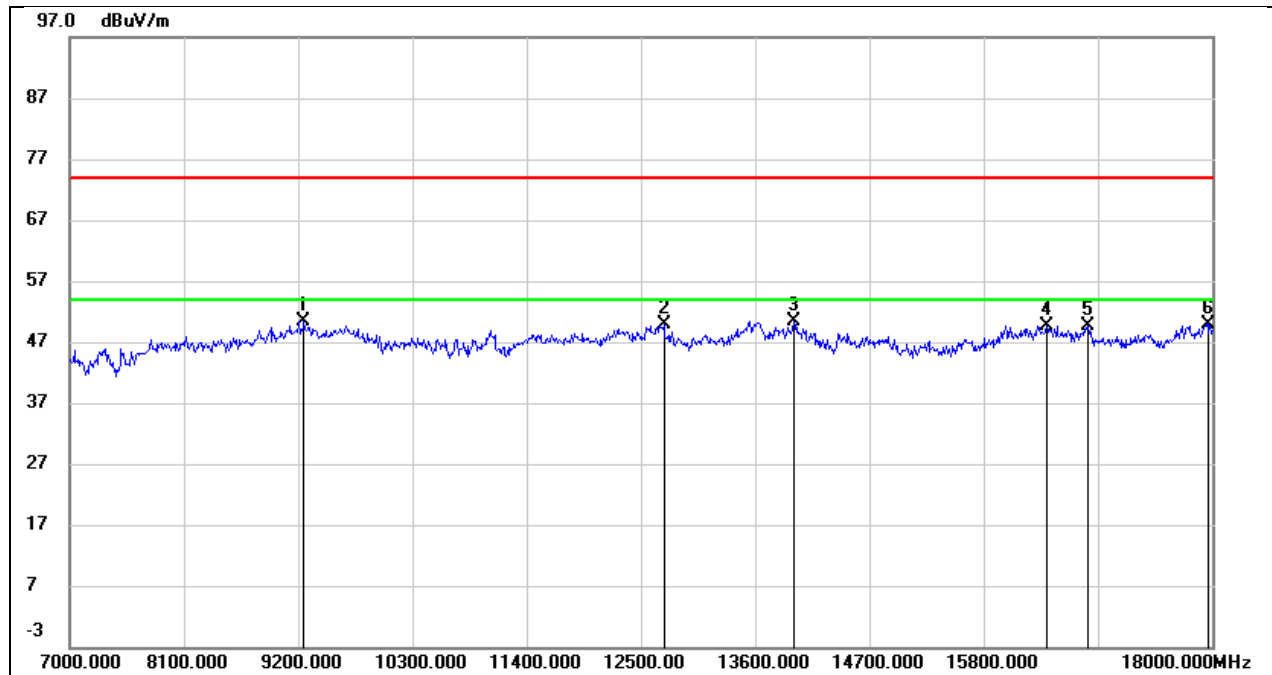


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9255.000	38.49	11.93	50.42	74.00	-23.58	peak
2	12720.000	31.26	18.62	49.88	74.00	-24.12	peak
3	13974.000	28.44	21.89	50.33	74.00	-23.67	peak
4	16405.000	26.06	23.60	49.66	74.00	-24.34	peak
5	16801.000	25.53	24.05	49.58	74.00	-24.42	peak
6	17956.000	22.87	27.13	50.00	74.00	-24.00	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5825
Polarity:	Horizontal	Test Voltage:	DC 3.3V

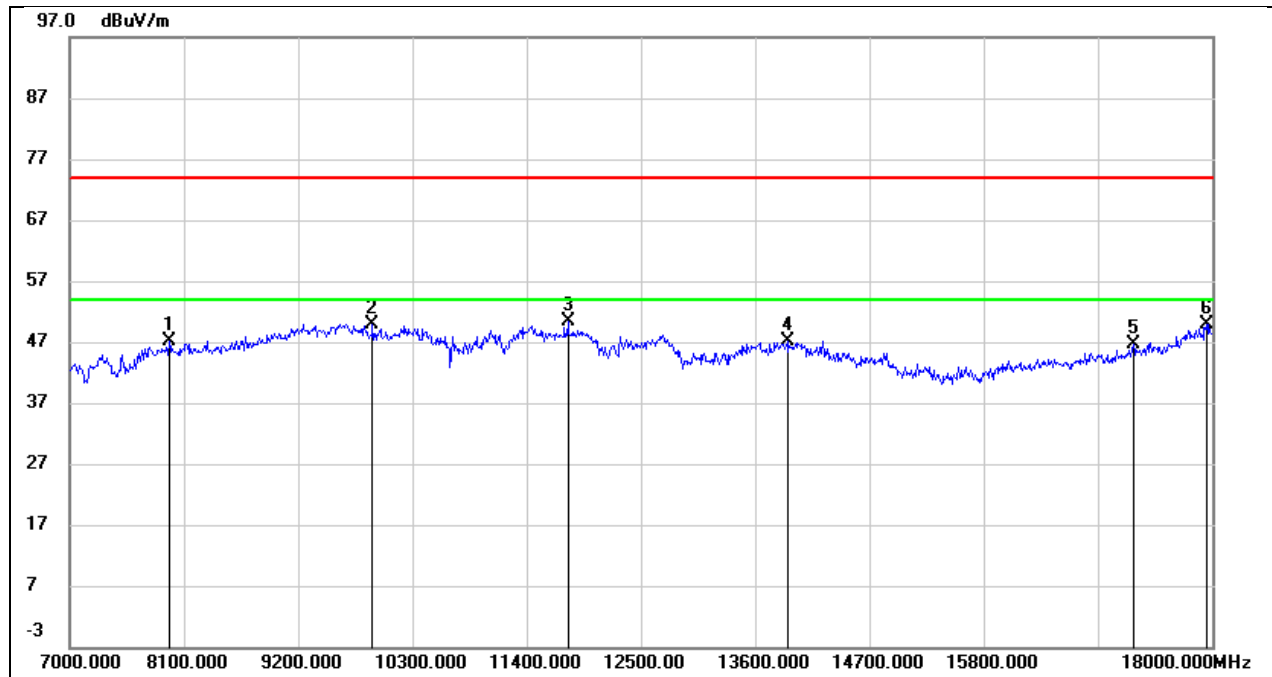


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7957.000	39.02	8.05	47.07	74.00	-26.93	peak
2	9915.000	36.33	13.54	49.87	74.00	-24.13	peak
3	11796.000	32.48	17.99	50.47	74.00	-23.53	peak
4	13908.000	23.79	23.24	47.03	74.00	-26.97	peak
5	17241.000	22.51	24.06	46.57	74.00	-27.43	peak
6	17945.000	20.96	29.03	49.99	74.00	-24.01	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5825
Polarity:	Vertical	Test Voltage:	DC 3.3V

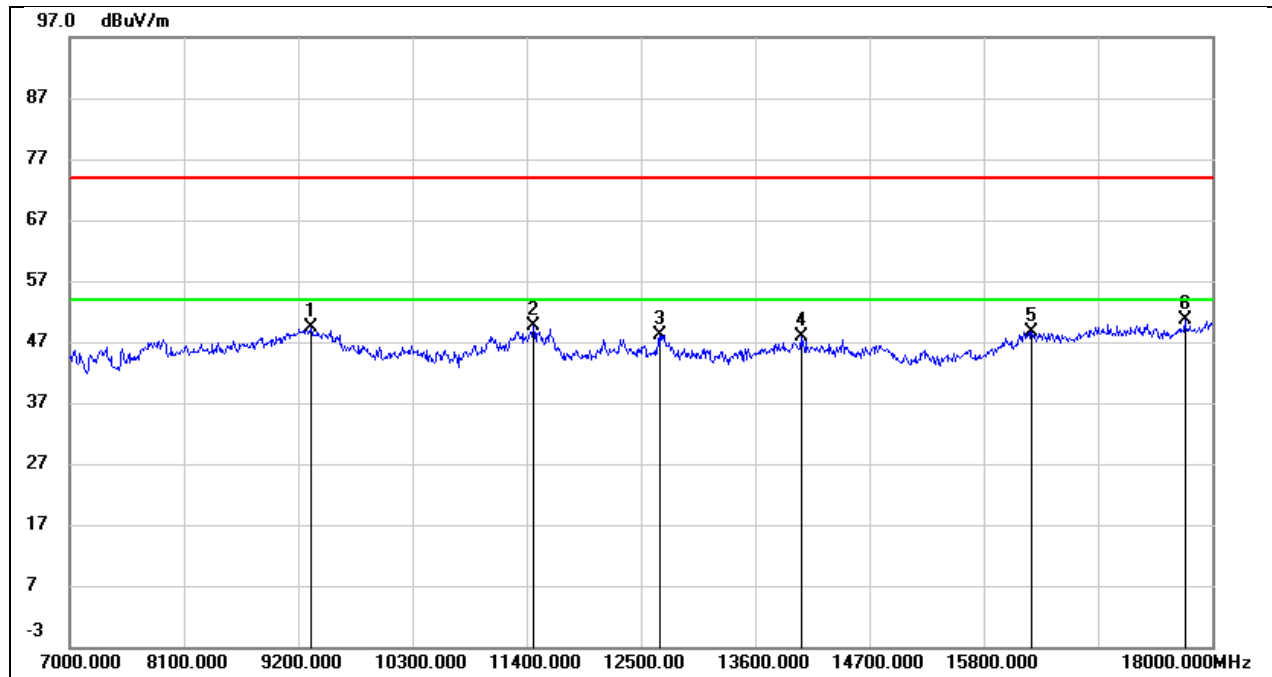


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9321.000	37.36	12.10	49.46	74.00	-24.54	peak
2	11466.000	33.30	16.22	49.52	74.00	-24.48	peak
3	12676.000	29.72	18.47	48.19	74.00	-25.81	peak
4	14040.000	25.95	21.95	47.90	74.00	-26.10	peak
5	16262.000	24.73	23.98	48.71	74.00	-25.29	peak
6	17736.000	24.72	25.83	50.55	74.00	-23.45	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5190
Polarity:	Horizontal	Test Voltage:	DC 3.3V

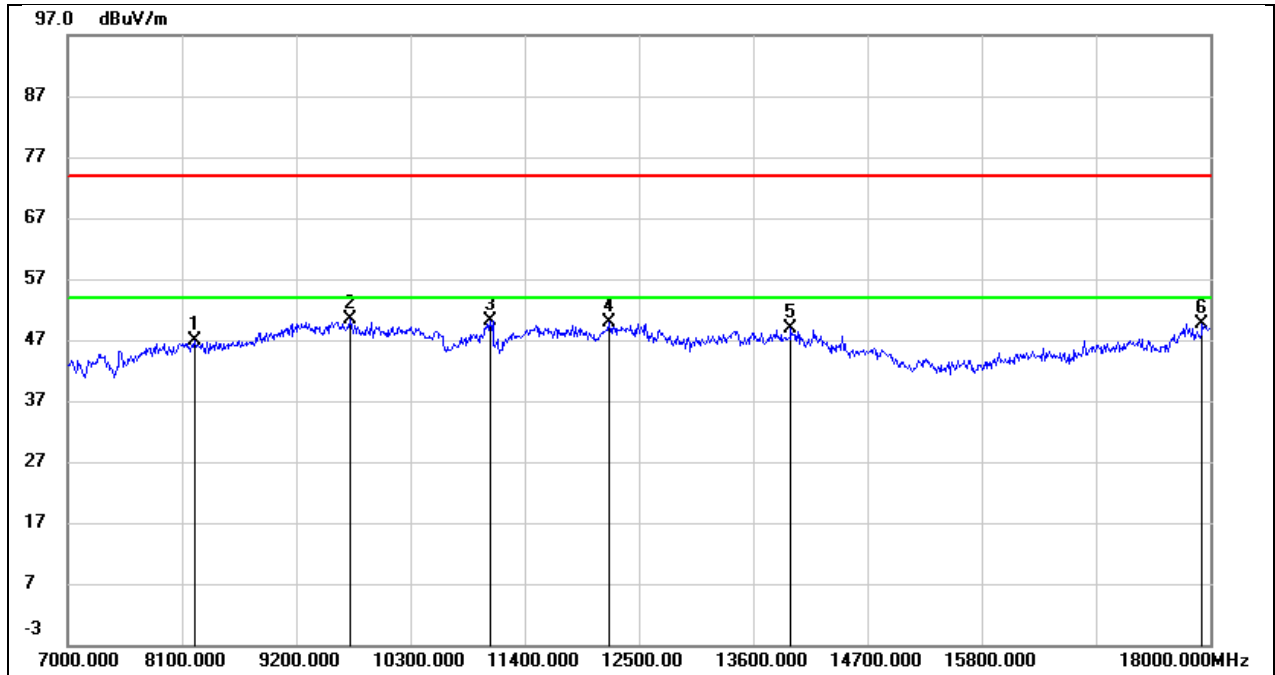


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8221.000	38.43	8.37	46.80	74.00	-27.20	peak
2	9717.000	36.72	13.66	50.38	74.00	-23.62	peak
3	11070.000	34.61	15.44	50.05	74.00	-23.95	peak
4	12214.000	31.07	18.73	49.80	74.00	-24.20	peak
5	13963.000	25.40	23.46	48.86	74.00	-25.14	peak
6	17923.000	20.79	28.78	49.57	74.00	-24.43	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5190
Polarity:	Vertical	Test Voltage:	DC 3.3V

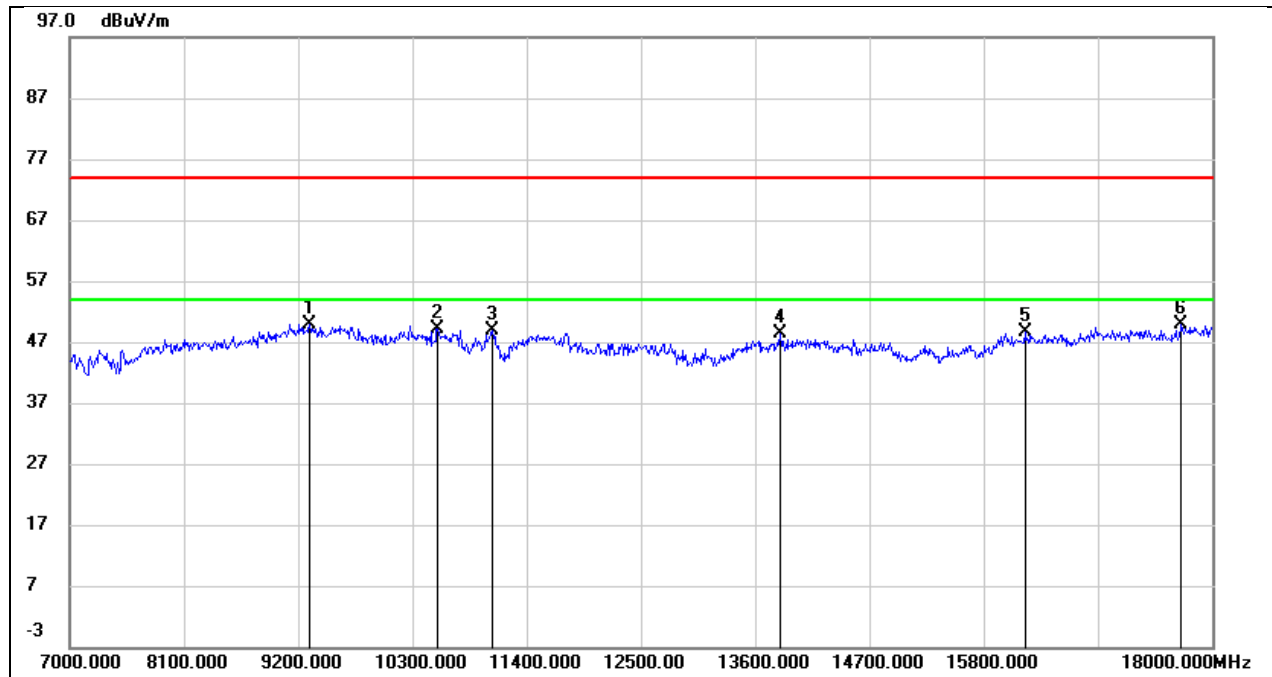


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9310.000	37.89	12.07	49.96	74.00	-24.04	peak
2	10542.000	35.79	13.41	49.20	74.00	-24.80	peak
3	11070.000	34.32	14.55	48.87	74.00	-25.13	peak
4	13842.000	27.16	21.33	48.49	74.00	-25.51	peak
5	16196.000	24.50	24.13	48.63	74.00	-25.37	peak
6	17703.000	24.15	25.65	49.80	74.00	-24.20	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5230
Polarity:	Horizontal	Test Voltage:	DC 3.3V

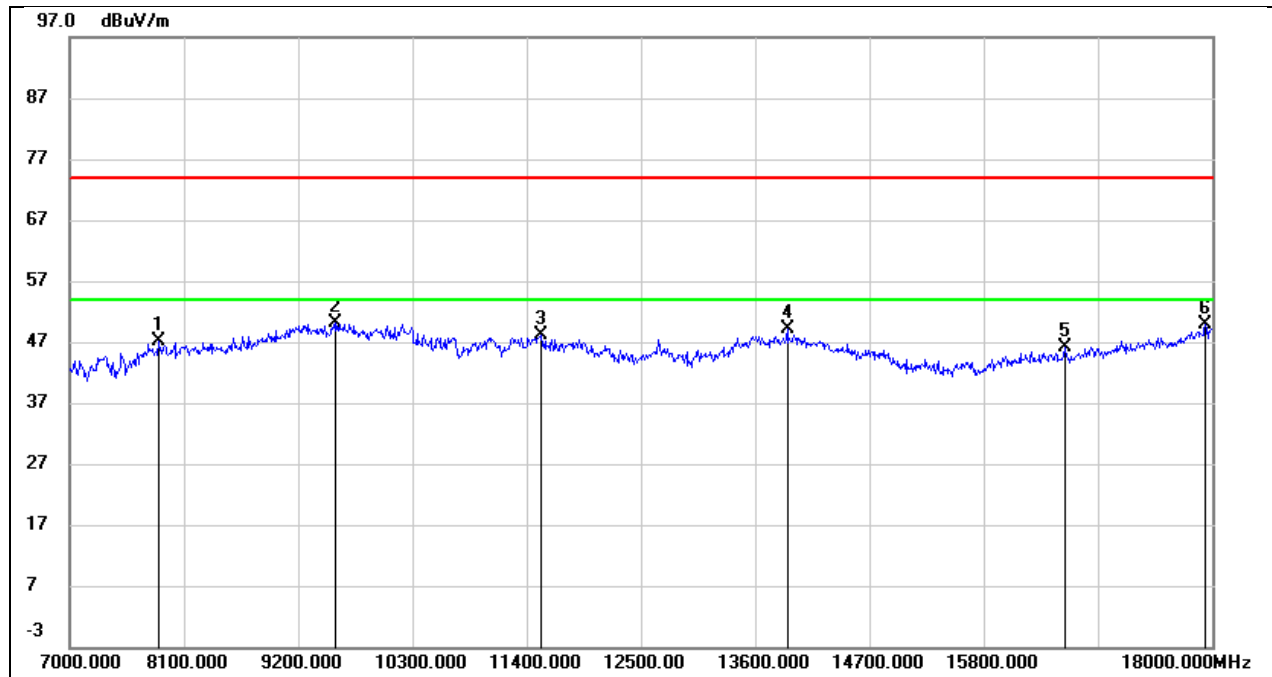


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7858.000	39.01	8.02	47.03	74.00	-26.97	peak
2	9563.000	36.95	13.23	50.18	74.00	-23.82	peak
3	11543.000	30.19	17.94	48.13	74.00	-25.87	peak
4	13908.000	25.80	23.24	49.04	74.00	-24.96	peak
5	16581.000	24.30	21.83	46.13	74.00	-27.87	peak
6	17934.000	20.93	28.91	49.84	74.00	-24.16	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5230
Polarity:	Vertical	Test Voltage:	DC 3.3V

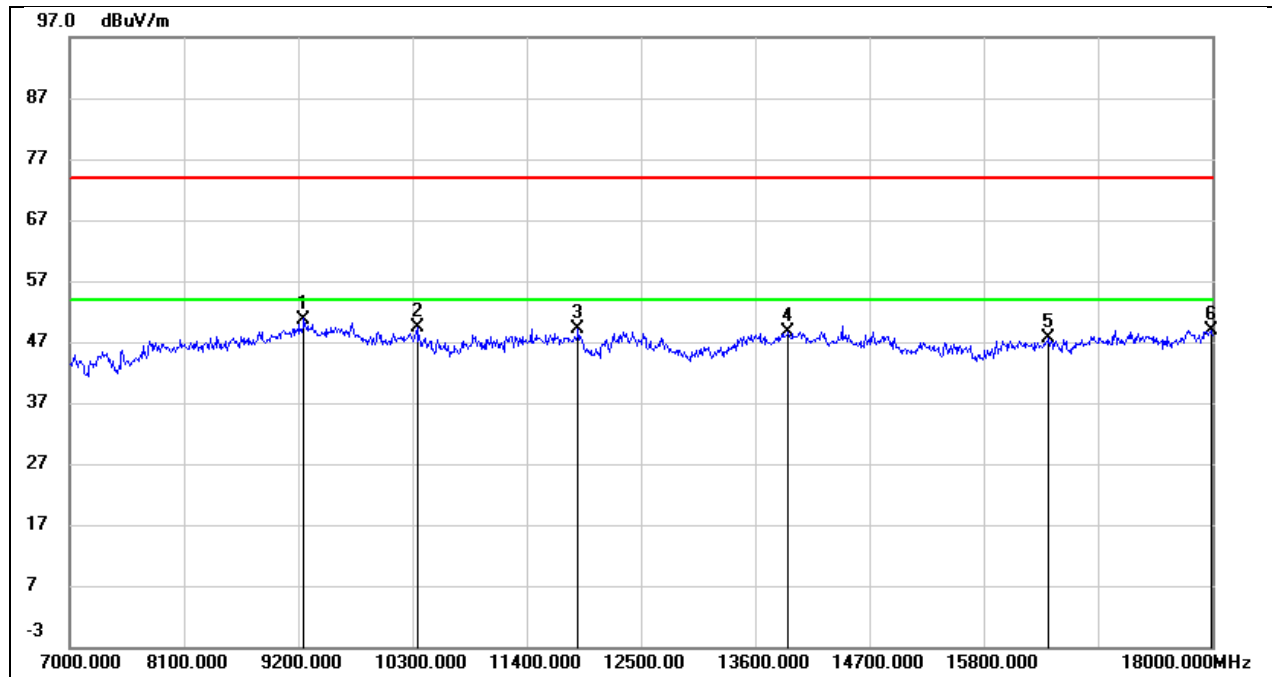


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9255.000	38.82	11.93	50.75	74.00	-23.25	peak
2	10344.000	36.55	12.94	49.49	74.00	-24.51	peak
3	11895.000	32.05	17.05	49.10	74.00	-24.90	peak
4	13919.000	26.97	21.66	48.63	74.00	-25.37	peak
5	16427.000	24.03	23.60	47.63	74.00	-26.37	peak
6	17989.000	21.57	27.33	48.90	74.00	-25.10	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5270
Polarity:	Horizontal	Test Voltage:	DC 3.3V

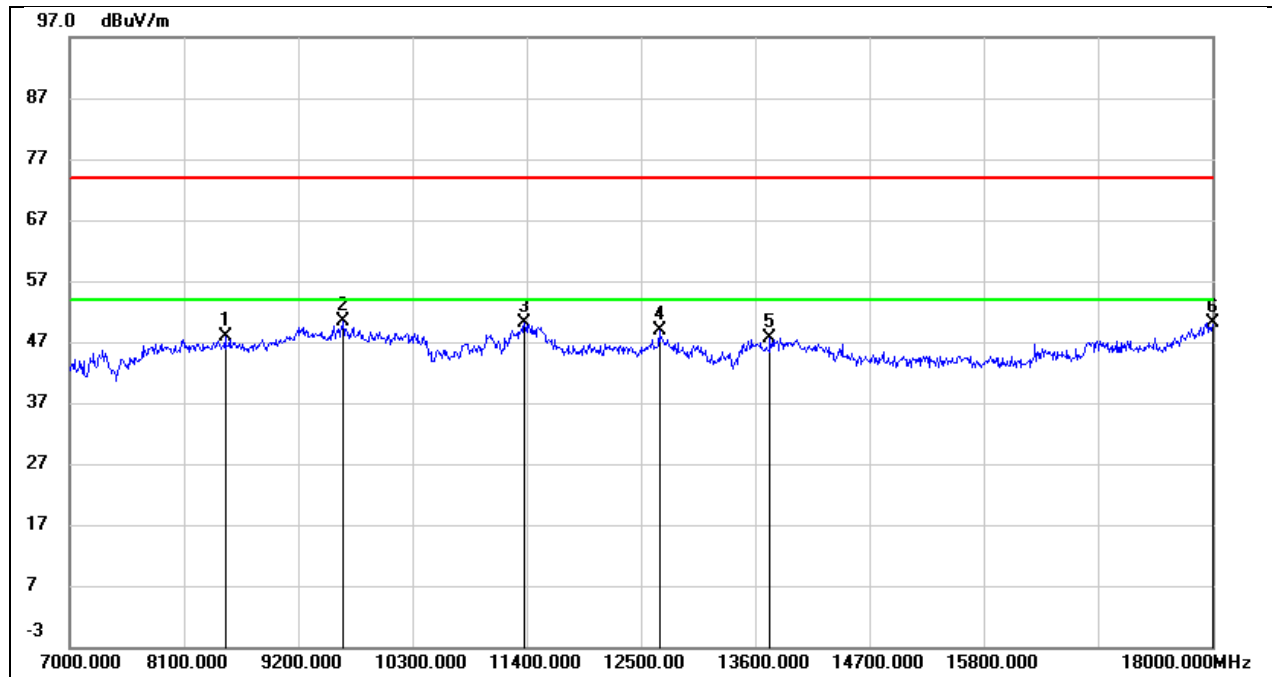


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8496.000	39.11	8.65	47.76	74.00	-26.24	peak
2	9629.000	36.81	13.51	50.32	74.00	-23.68	peak
3	11378.000	33.02	17.23	50.25	74.00	-23.75	peak
4	12676.000	29.38	19.48	48.86	74.00	-25.14	peak
5	13743.000	24.96	22.64	47.60	74.00	-26.40	peak
6	18000.000	20.50	29.61	50.11	74.00	-23.89	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5270
Polarity:	Vertical	Test Voltage:	DC 3.3V

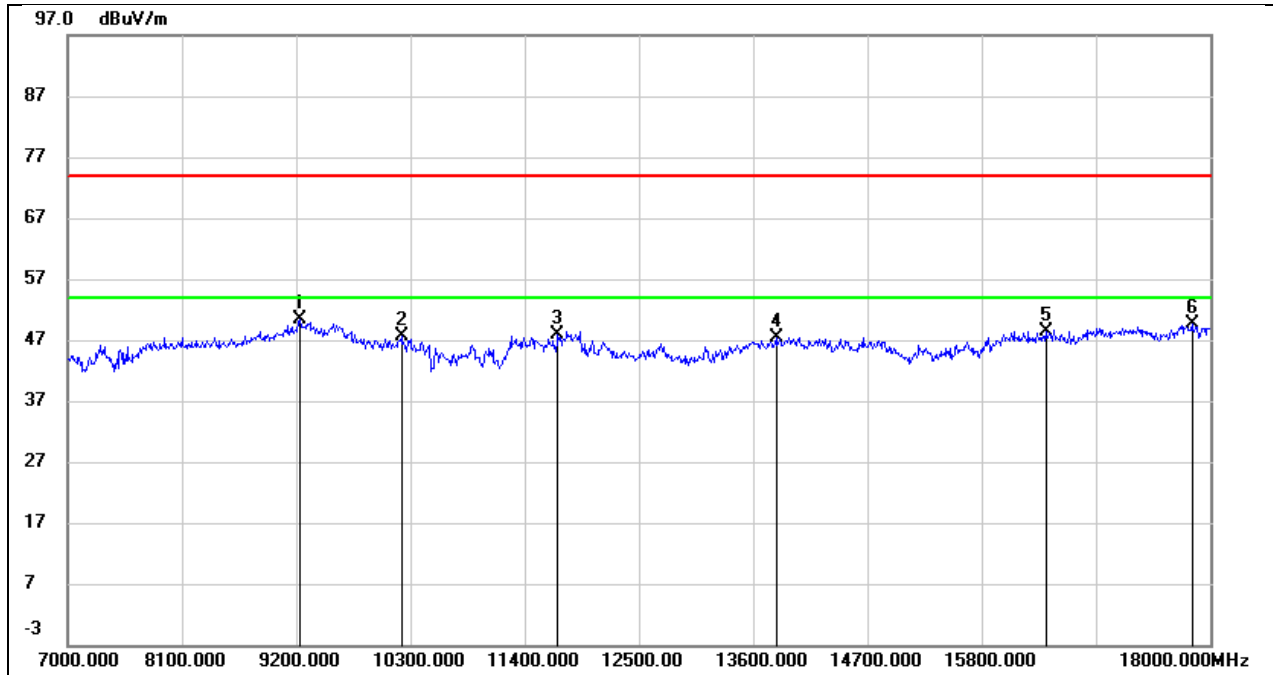


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9233.000	38.56	11.88	50.44	74.00	-23.56	peak
2	10212.000	34.95	12.71	47.66	74.00	-26.34	peak
3	11719.000	31.10	16.71	47.81	74.00	-26.19	peak
4	13820.000	26.02	21.24	47.26	74.00	-26.74	peak
5	16416.000	24.71	23.60	48.31	74.00	-25.69	peak
6	17824.000	23.22	26.31	49.53	74.00	-24.47	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5310
Polarity:	Horizontal	Test Voltage:	DC 3.3V

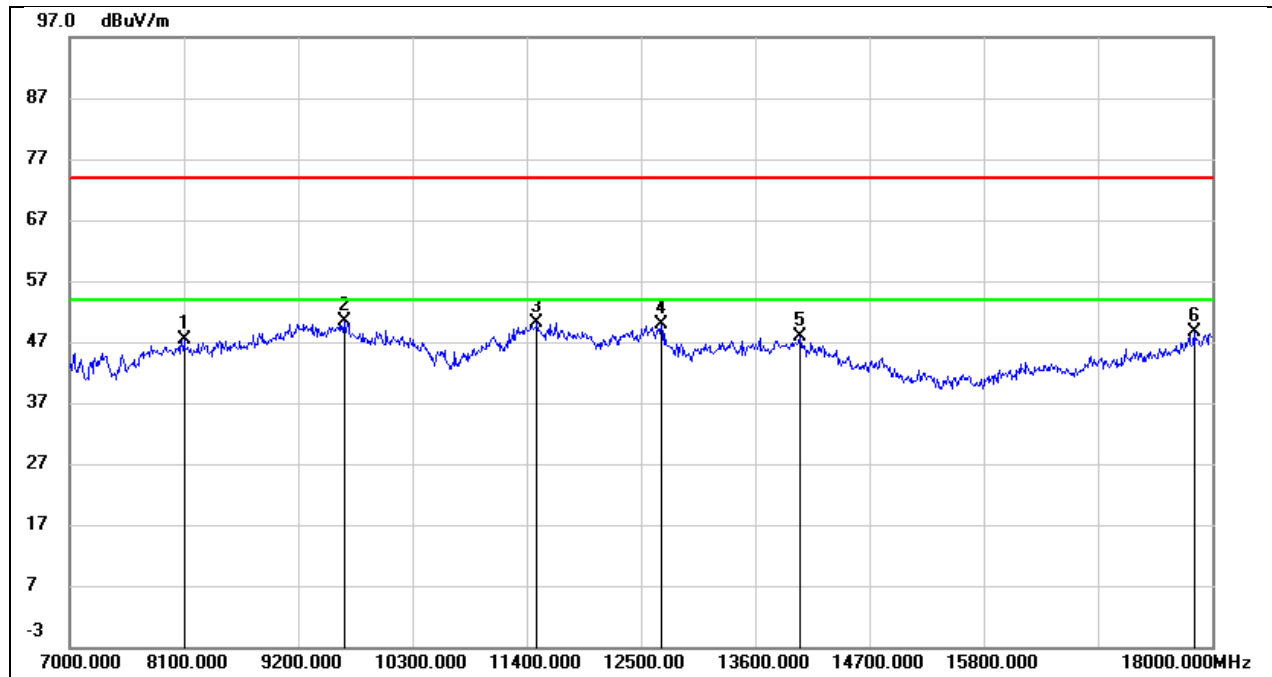


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8100.000	39.10	8.21	47.31	74.00	-26.69	peak
2	9640.000	36.87	13.53	50.40	74.00	-23.60	peak
3	11499.000	32.42	17.83	50.25	74.00	-23.75	peak
4	12698.000	30.38	19.56	49.94	74.00	-24.06	peak
5	14029.000	24.30	23.49	47.79	74.00	-26.21	peak
6	17824.000	20.79	27.73	48.52	74.00	-25.48	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5310
Polarity:	Vertical	Test Voltage:	DC 3.3V

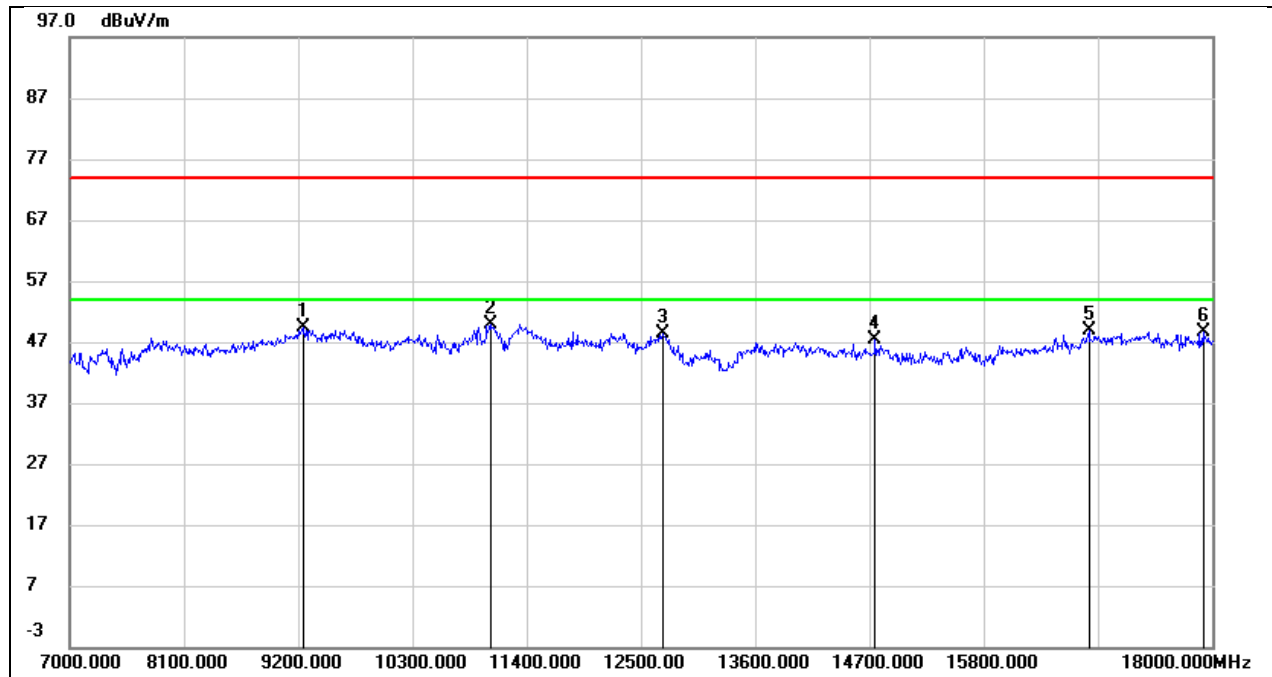


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9255.000	37.36	11.93	49.29	74.00	-24.71	peak
2	11048.000	35.44	14.46	49.90	74.00	-24.10	peak
3	12709.000	29.76	18.58	48.34	74.00	-25.66	peak
4	14755.000	26.66	20.66	47.32	74.00	-26.68	peak
5	16812.000	24.87	24.07	48.94	74.00	-25.06	peak
6	17912.000	21.82	26.87	48.69	74.00	-25.31	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5510
Polarity:	Horizontal	Test Voltage:	DC 3.3V

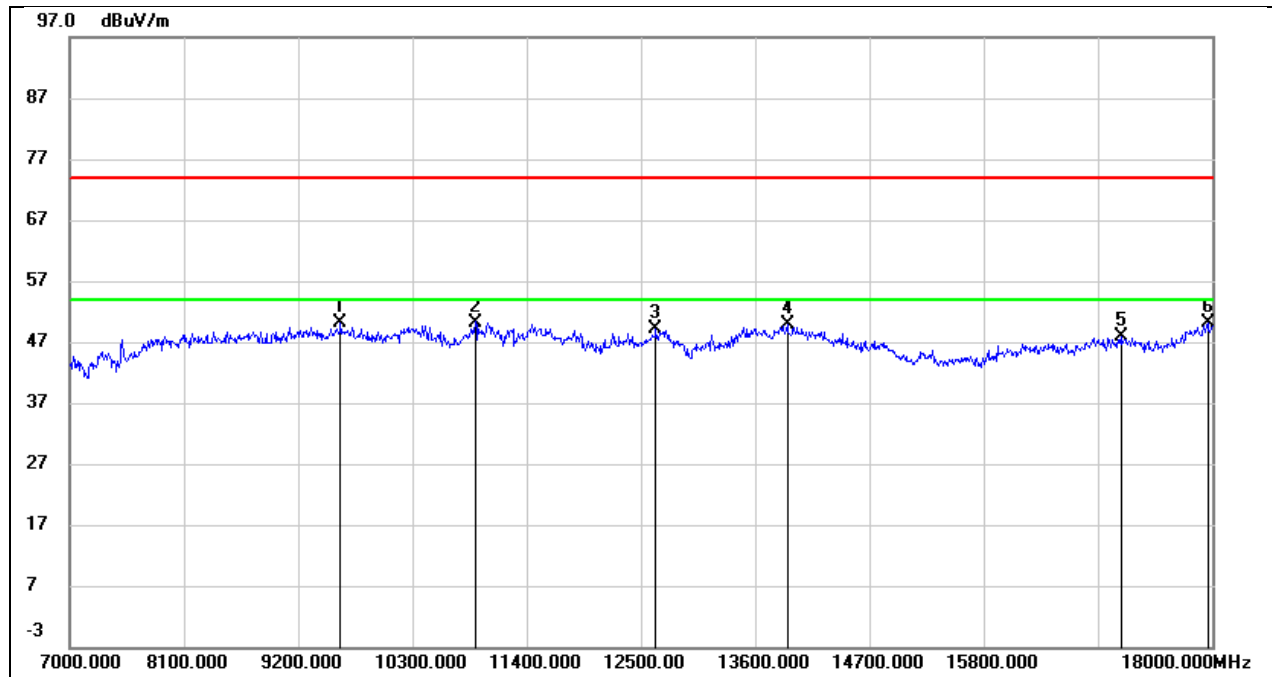


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9607.000	36.73	13.48	50.21	74.00	-23.79	peak
2	10905.000	35.50	14.75	50.25	74.00	-23.75	peak
3	12643.000	29.71	19.34	49.05	74.00	-24.95	peak
4	13908.000	26.70	23.24	49.94	74.00	-24.06	peak
5	17120.000	24.36	23.41	47.77	74.00	-26.23	peak
6	17956.000	20.88	29.14	50.02	74.00	-23.98	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5510
Polarity:	Vertical	Test Voltage:	DC 3.3V

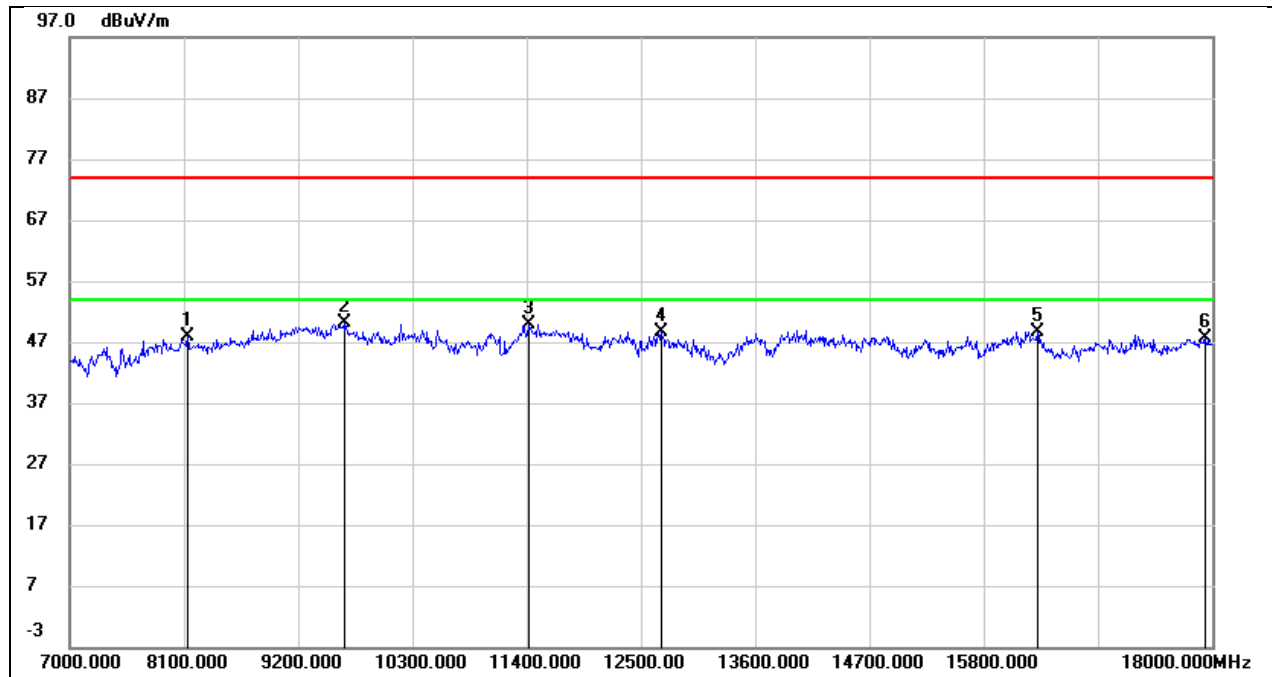


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8133.000	38.99	8.78	47.77	74.00	-26.23	peak
2	9651.000	36.71	13.34	50.05	74.00	-23.95	peak
3	11422.000	33.89	16.07	49.96	74.00	-24.04	peak
4	12698.000	30.13	18.54	48.67	74.00	-25.33	peak
5	16317.000	24.83	23.83	48.66	74.00	-25.34	peak
6	17934.000	20.59	27.00	47.59	74.00	-26.41	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5550
Polarity:	Horizontal	Test Voltage:	DC 3.3V

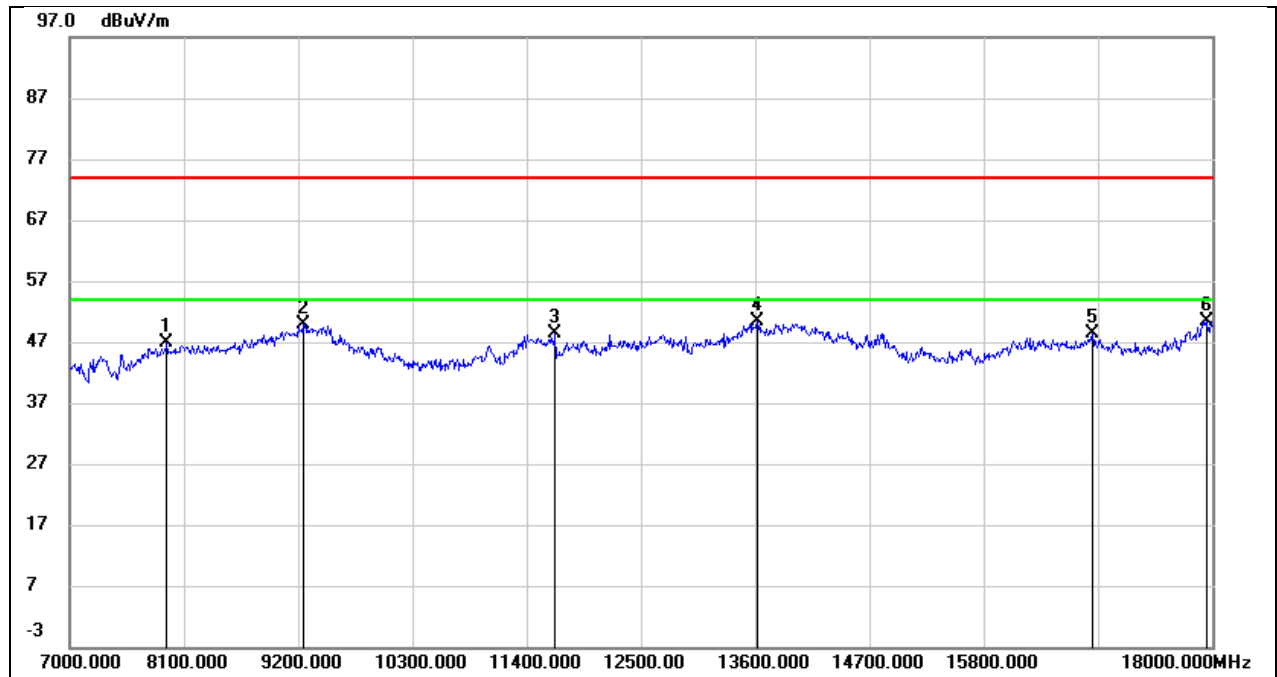


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7935.000	38.86	8.05	46.91	74.00	-27.09	peak
2	9244.000	38.27	11.71	49.98	74.00	-24.02	peak
3	11675.000	30.26	18.06	48.32	74.00	-25.68	peak
4	13622.000	28.00	22.28	50.28	74.00	-23.72	peak
5	16845.000	25.83	22.44	48.27	74.00	-25.73	peak
6	17945.000	21.46	29.03	50.49	74.00	-23.51	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5550
Polarity:	Vertical	Test Voltage:	DC 3.3V

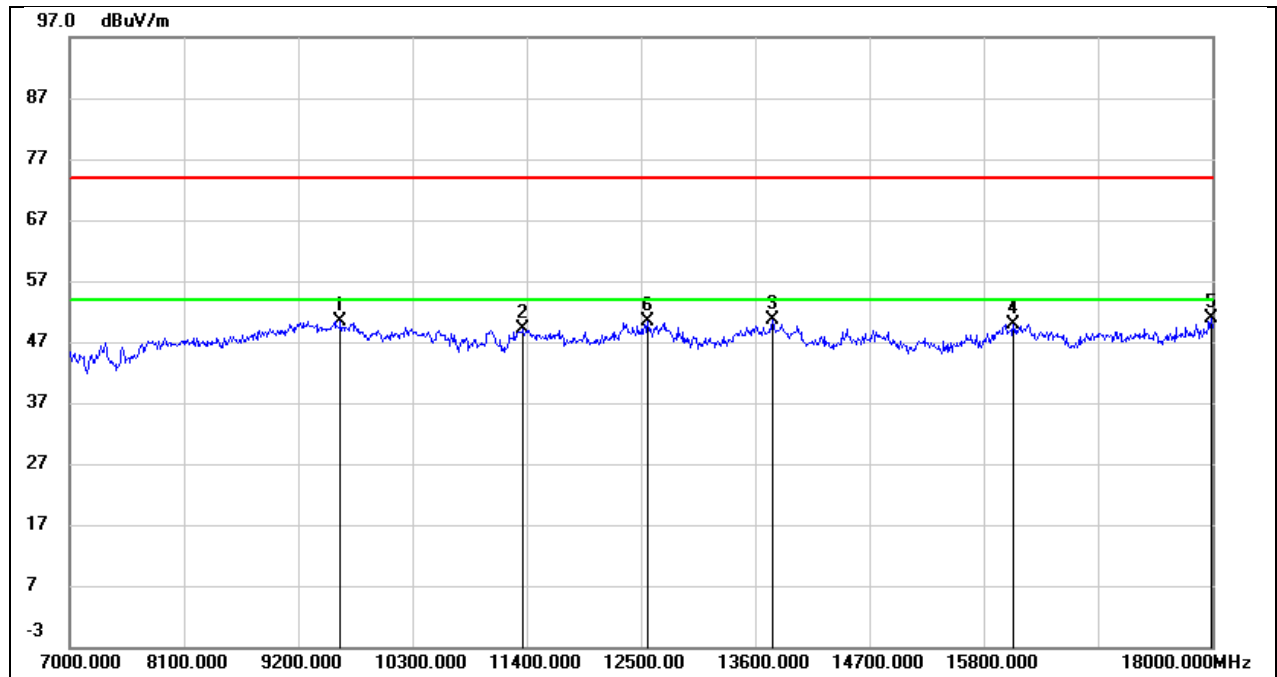


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9607.000	37.16	13.33	50.49	74.00	-23.51	peak
2	11367.000	33.22	15.85	49.07	74.00	-24.93	peak
3	13765.000	29.57	21.05	50.62	74.00	-23.38	peak
4	16086.000	26.56	23.42	49.98	74.00	-24.02	peak
5	17989.000	23.67	27.33	51.00	74.00	-23.00	peak
6	12566.000	32.11	18.16	50.27	74.00	-23.73	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5670
Polarity:	Horizontal	Test Voltage:	DC 3.3V

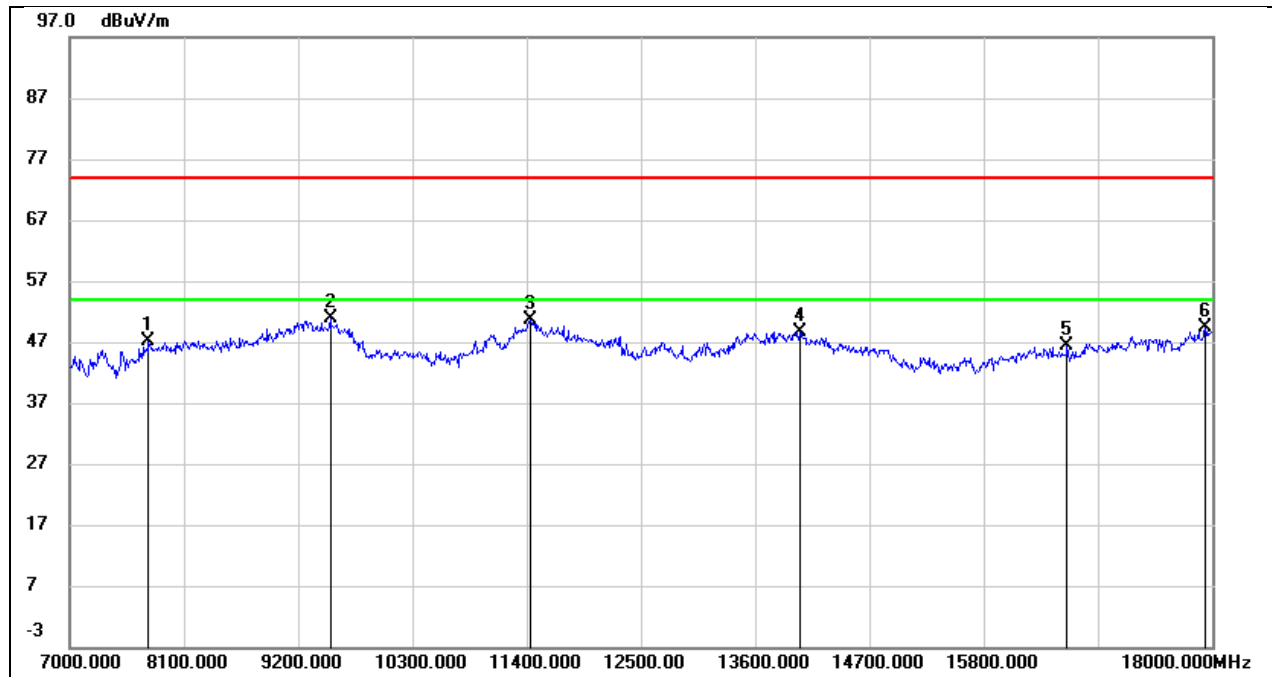


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7759.000	39.13	7.97	47.10	74.00	-26.90	peak
2	9508.000	37.85	12.91	50.76	74.00	-23.24	peak
3	11433.000	33.19	17.51	50.70	74.00	-23.30	peak
4	14029.000	25.21	23.49	48.70	74.00	-25.30	peak
5	16603.000	24.47	21.84	46.31	74.00	-27.69	peak
6	17934.000	20.51	28.91	49.42	74.00	-24.58	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5670
Polarity:	Vertical	Test Voltage:	DC 3.3V

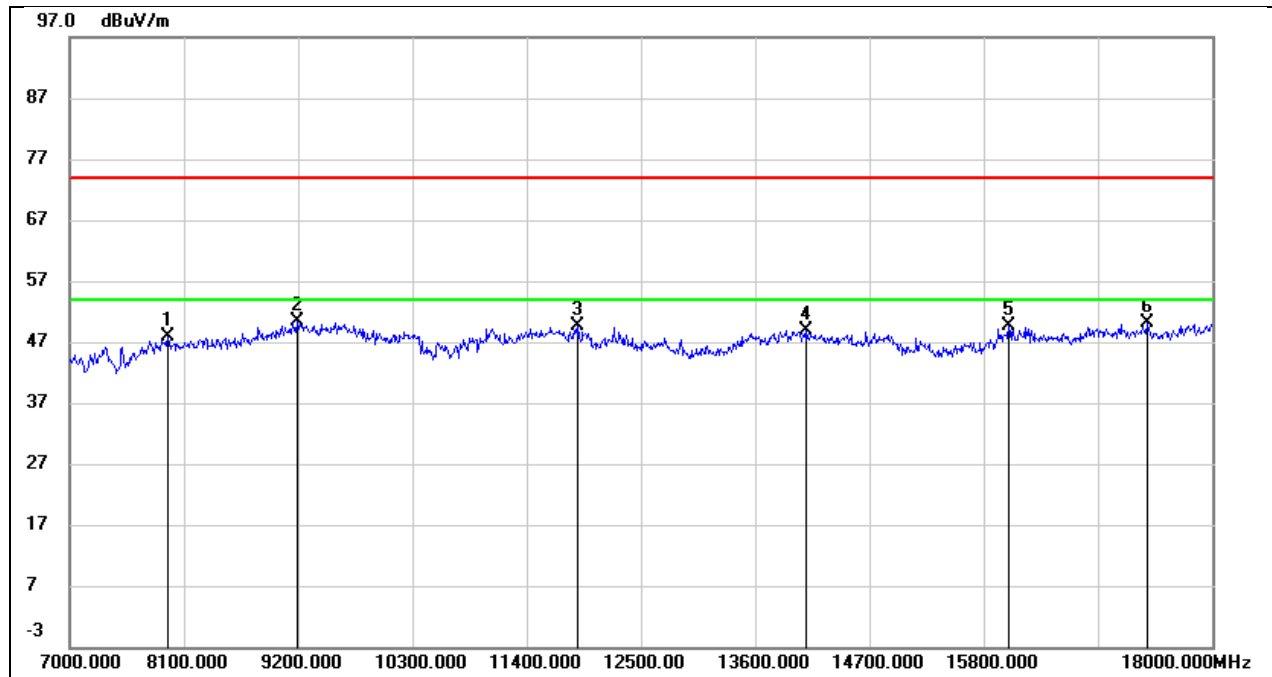


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7946.000	39.22	8.56	47.78	74.00	-26.22	peak
2	9189.000	38.73	11.76	50.49	74.00	-23.51	peak
3	11895.000	32.53	17.05	49.58	74.00	-24.42	peak
4	14095.000	27.01	21.86	48.87	74.00	-25.13	peak
5	16042.000	26.50	23.15	49.65	74.00	-24.35	peak
6	17373.000	25.16	25.04	50.20	74.00	-23.80	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5710
Polarity:	Horizontal	Test Voltage:	DC 3.3V

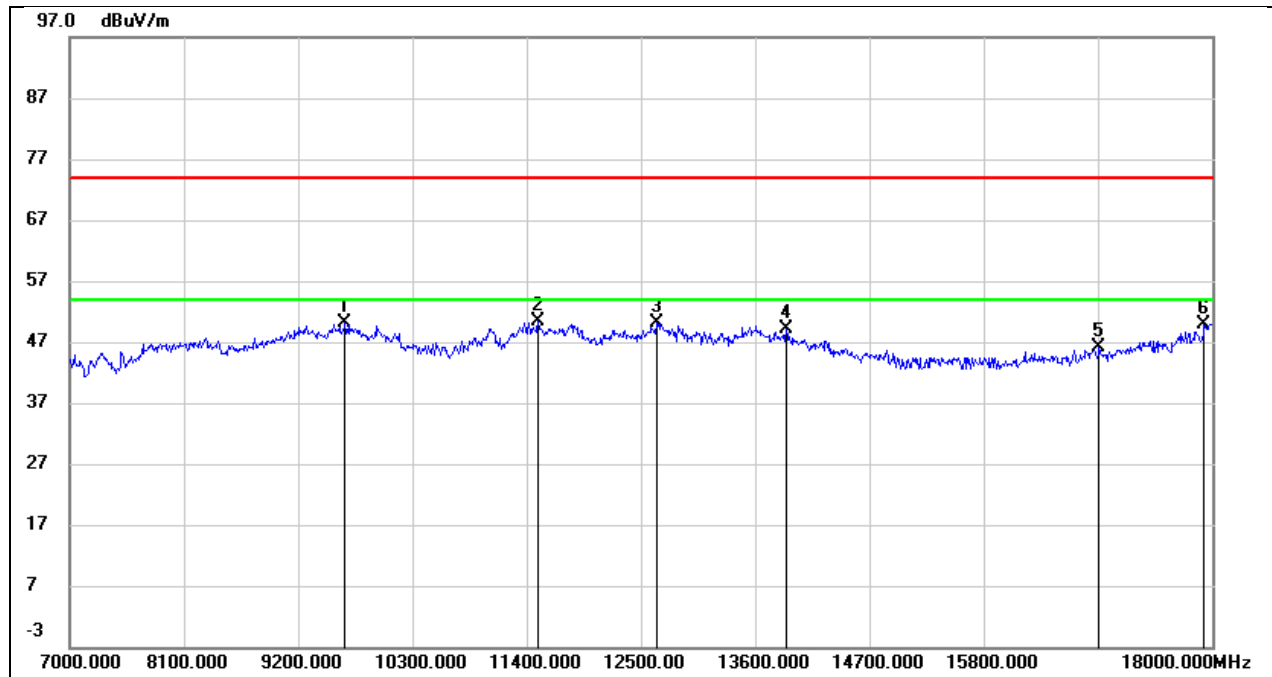


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9651.000	36.57	13.55	50.12	74.00	-23.88	peak
2	11510.000	32.42	17.86	50.28	74.00	-23.72	peak
3	12654.000	30.69	19.39	50.08	74.00	-23.92	peak
4	13897.000	25.83	23.19	49.02	74.00	-24.98	peak
5	16911.000	23.60	22.56	46.16	74.00	-27.84	peak
6	17923.000	21.11	28.78	49.89	74.00	-24.11	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5710
Polarity:	Vertical	Test Voltage:	DC 3.3V

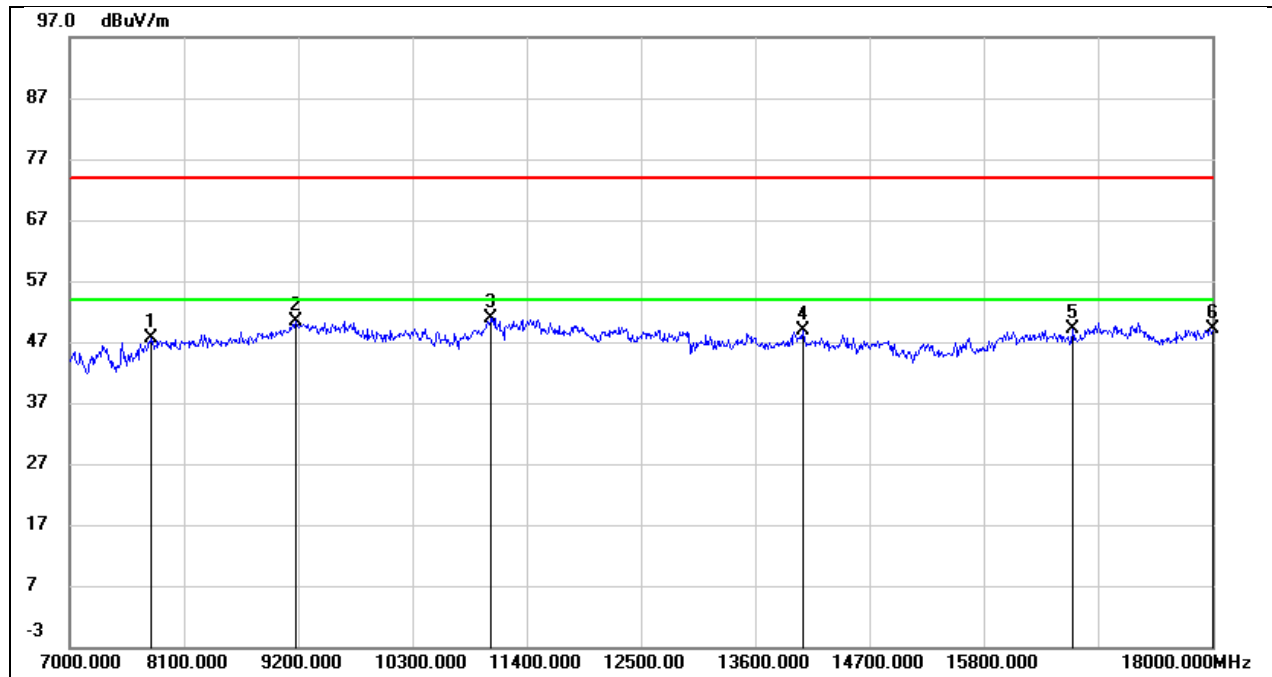


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7781.000	39.17	8.49	47.66	74.00	-26.34	peak
2	9178.000	38.55	11.71	50.26	74.00	-23.74	peak
3	11059.000	36.38	14.51	50.89	74.00	-23.11	peak
4	14062.000	26.90	21.91	48.81	74.00	-25.19	peak
5	16658.000	25.38	23.68	49.06	74.00	-24.94	peak
6	18000.000	21.81	27.41	49.22	74.00	-24.78	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5755
Polarity:	Horizontal	Test Voltage:	DC 3.3V

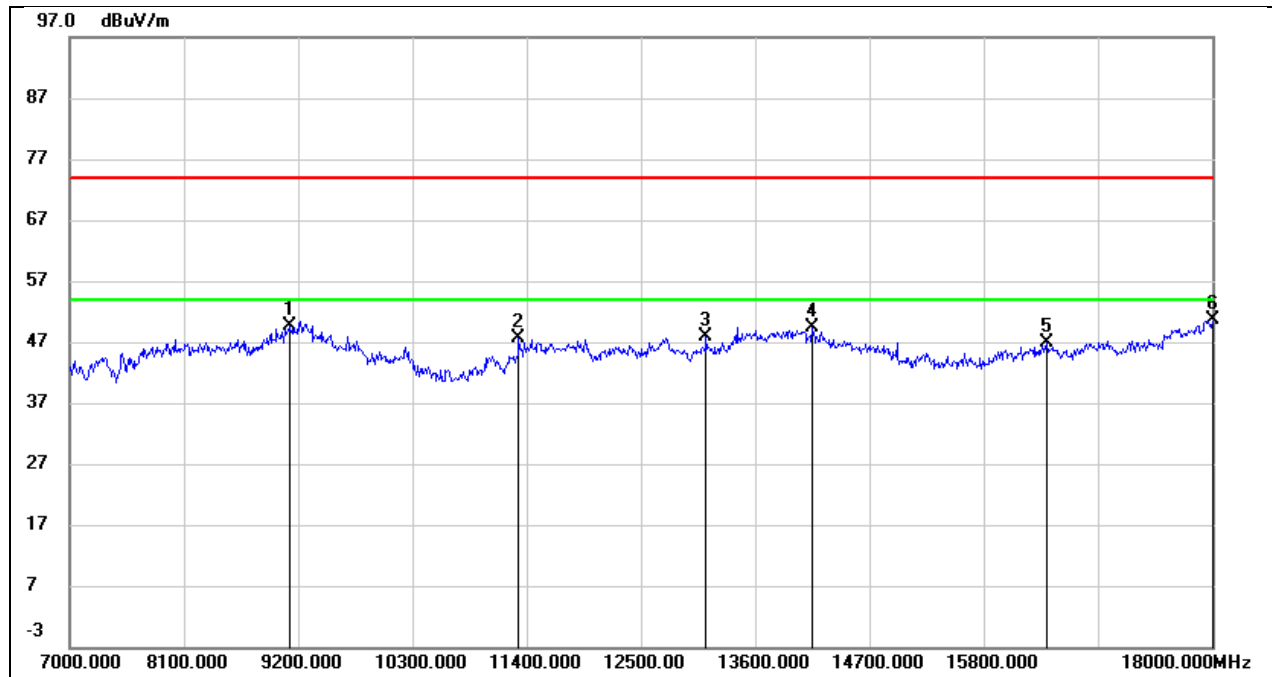


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9112.000	38.49	11.17	49.66	74.00	-24.34	peak
2	11323.000	30.74	16.89	47.63	74.00	-26.37	peak
3	13127.000	27.18	20.60	47.78	74.00	-26.22	peak
4	14150.000	26.28	23.00	49.28	74.00	-24.72	peak
5	16405.000	25.09	21.77	46.86	74.00	-27.14	peak
6	18000.000	20.97	29.61	50.58	74.00	-23.42	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5755
Polarity:	Vertical	Test Voltage:	DC 3.3V

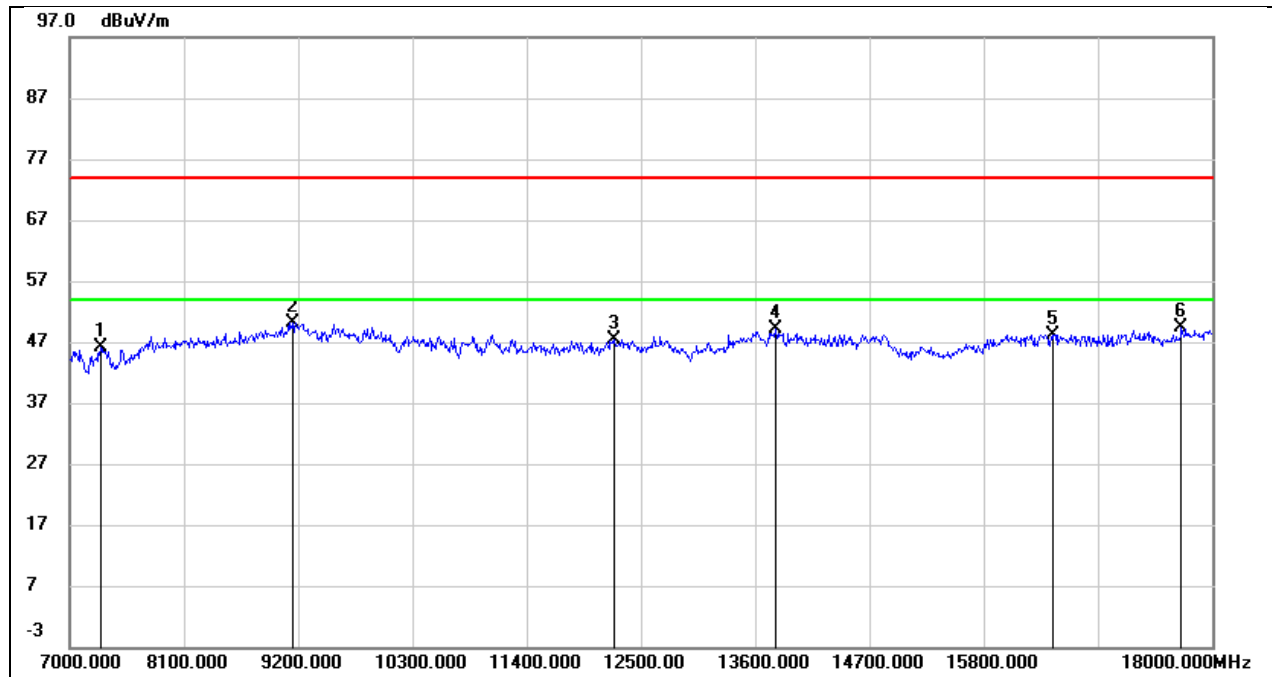


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7297.000	37.88	8.30	46.18	74.00	-27.82	peak
2	9145.000	38.65	11.60	50.25	74.00	-23.75	peak
3	12236.000	29.68	17.76	47.44	74.00	-26.56	peak
4	13798.000	27.86	21.15	49.01	74.00	-24.99	peak
5	16460.000	24.62	23.58	48.20	74.00	-25.80	peak
6	17703.000	23.65	25.65	49.30	74.00	-24.70	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5795
Polarity:	Horizontal	Test Voltage:	DC 3.3V

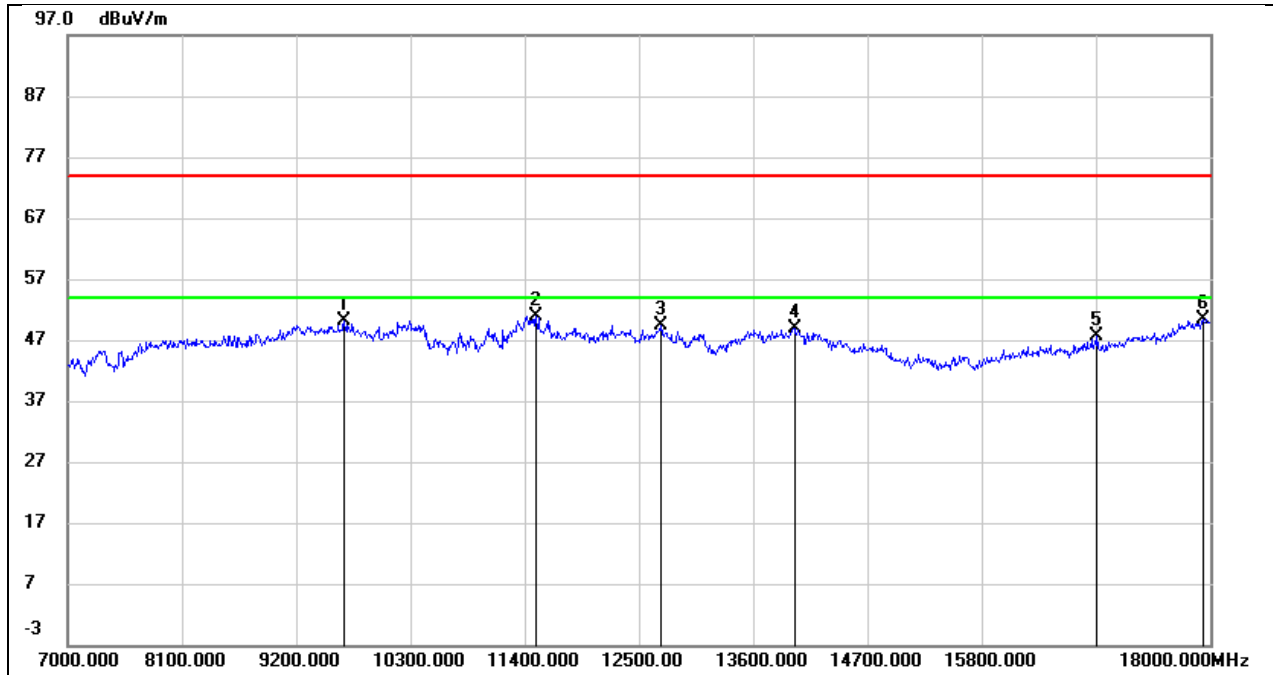


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9662.000	36.46	13.56	50.02	74.00	-23.98	peak
2	11510.000	33.11	17.86	50.97	74.00	-23.03	peak
3	12709.000	29.73	19.60	49.33	74.00	-24.67	peak
4	13996.000	25.31	23.59	48.90	74.00	-25.10	peak
5	16911.000	24.97	22.56	47.53	74.00	-26.47	peak
6	17934.000	21.56	28.91	50.47	74.00	-23.53	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5795
Polarity:	Vertical	Test Voltage:	DC 3.3V

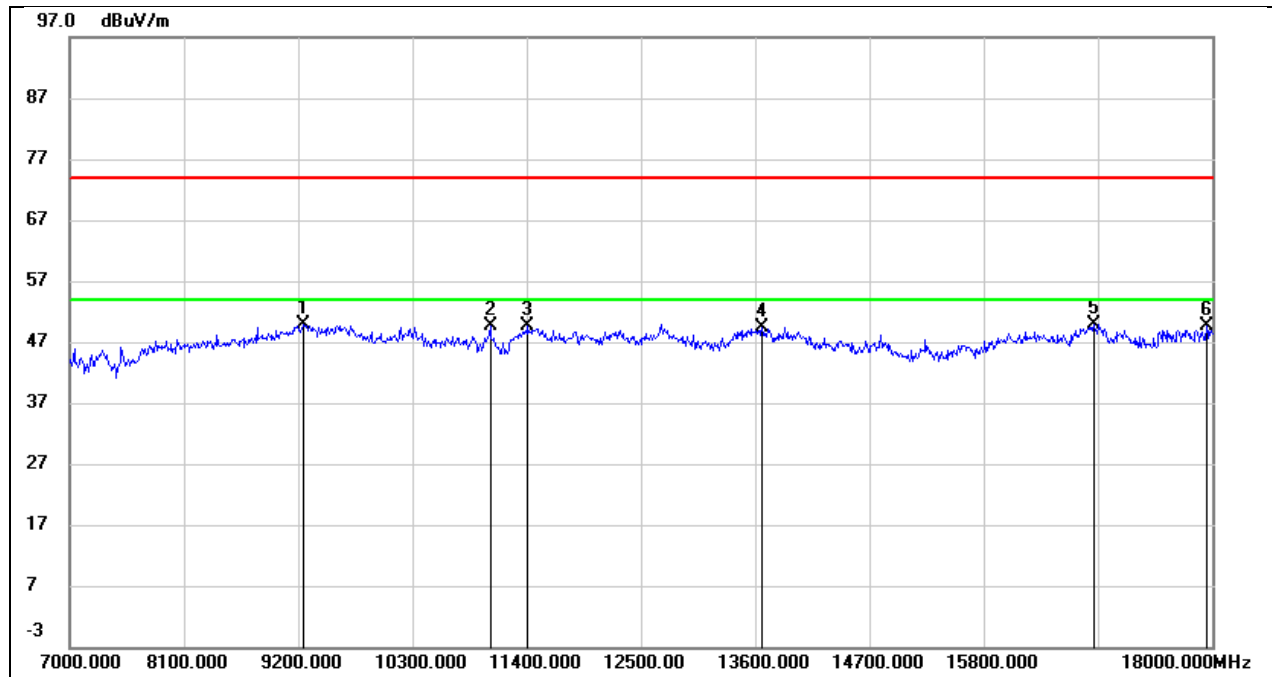


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9255.000	37.91	11.93	49.84	74.00	-24.16	peak
2	11048.000	35.16	14.46	49.62	74.00	-24.38	peak
3	11411.000	33.69	16.04	49.73	74.00	-24.27	peak
4	13666.000	28.74	20.74	49.48	74.00	-24.52	peak
5	16856.000	25.78	24.14	49.92	74.00	-24.08	peak
6	17945.000	22.58	27.07	49.65	74.00	-24.35	peak

Test Mode:	802.11ax HE80	Frequency(MHz):	5210
Polarity:	Vertical	Test Voltage:	DC 3.3V

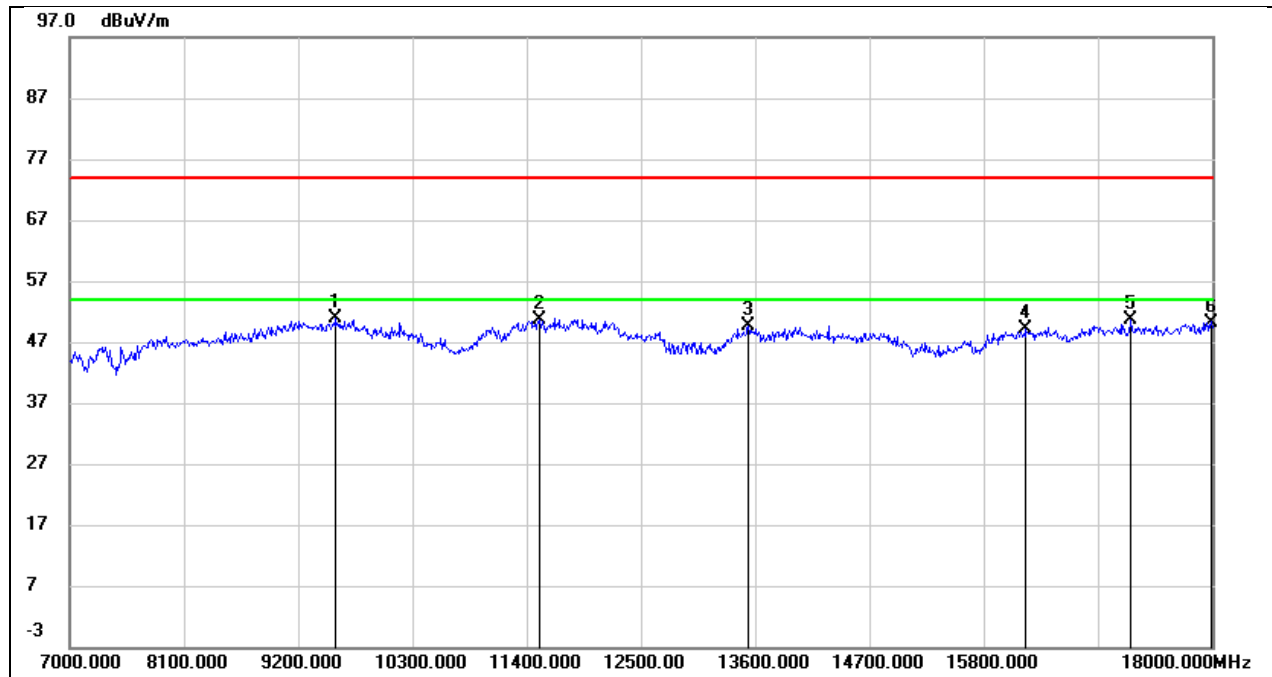


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9563.000	37.69	13.14	50.83	74.00	-23.17	peak
2	11521.000	34.33	16.40	50.73	74.00	-23.27	peak
3	13534.000	29.19	20.41	49.60	74.00	-24.40	peak
4	16207.000	24.90	24.14	49.04	74.00	-24.96	peak
5	17219.000	25.59	24.92	50.51	74.00	-23.49	peak
6	17989.000	22.92	27.33	50.25	74.00	-23.75	peak

Test Mode:	802.11ax HE80	Frequency(MHz):	5210
Polarity:	Horizontal	Test Voltage:	DC 3.3V

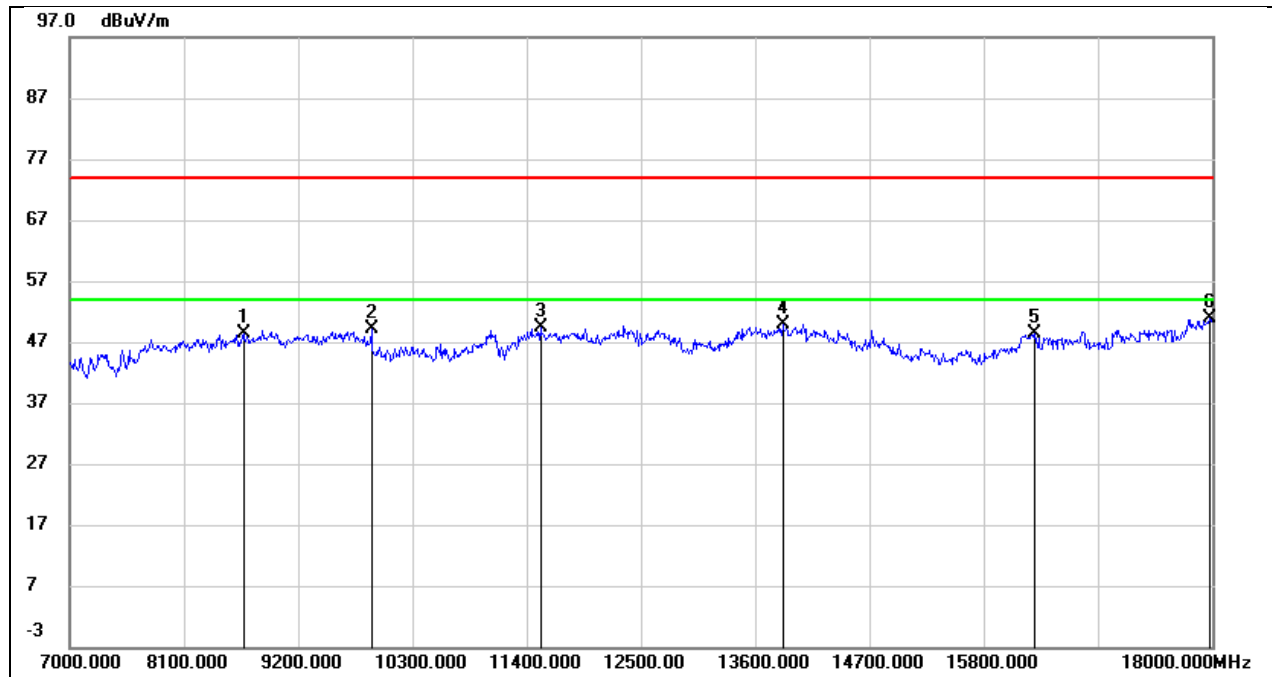


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8672.000	39.13	9.18	48.31	74.00	-25.69	peak
2	9904.000	35.62	13.56	49.18	74.00	-24.82	peak
3	11532.000	31.38	17.92	49.30	74.00	-24.70	peak
4	13864.000	26.84	23.06	49.90	74.00	-24.10	peak
5	16284.000	26.43	21.92	48.35	74.00	-25.65	peak
6	17978.000	21.49	29.38	50.87	74.00	-23.13	peak

Test Mode:	802.11ax HE80	Frequency(MHz):	5290
Polarity:	Horizontal	Test Voltage:	DC 3.3V

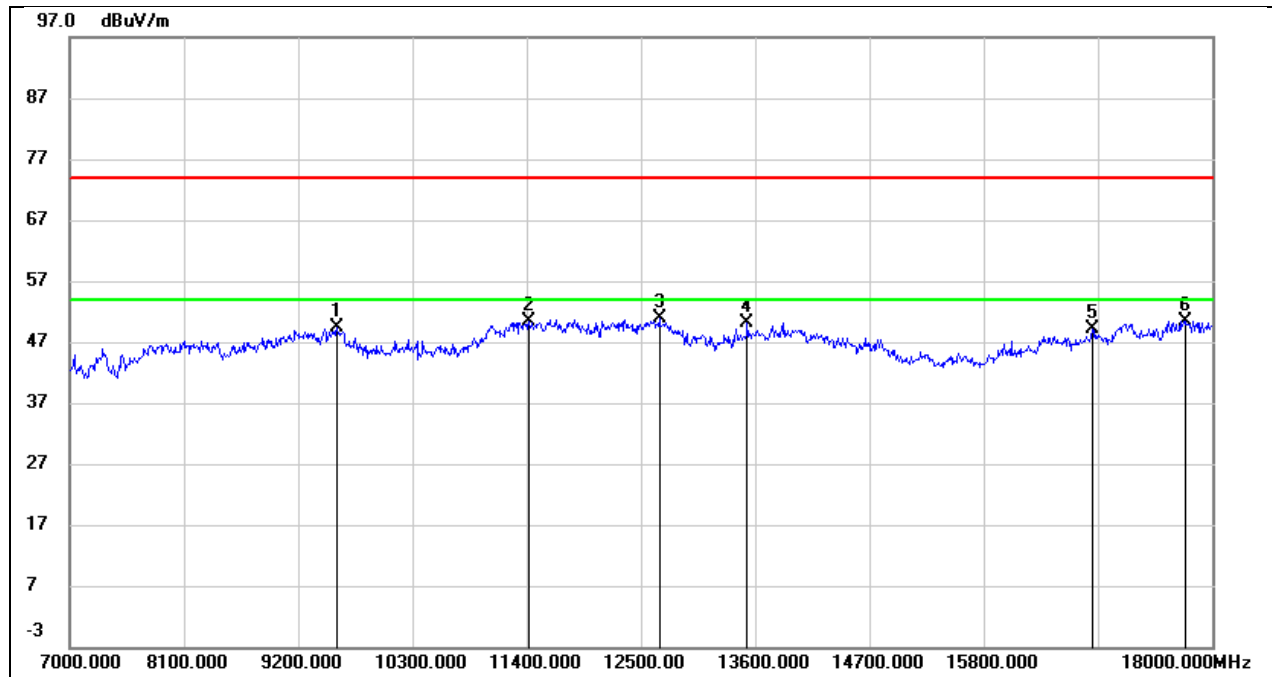


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9574.000	35.95	13.31	49.26	74.00	-24.74	peak
2	11422.000	32.94	17.46	50.40	74.00	-23.60	peak
3	12676.000	31.39	19.48	50.87	74.00	-23.13	peak
4	13523.000	28.05	22.08	50.13	74.00	-23.87	peak
5	16845.000	26.75	22.44	49.19	74.00	-24.81	peak
6	17747.000	23.52	26.98	50.50	74.00	-23.50	peak

Test Mode:	802.11ax HE80	Frequency(MHz):	5290
Polarity:	Vertical	Test Voltage:	DC 3.3V

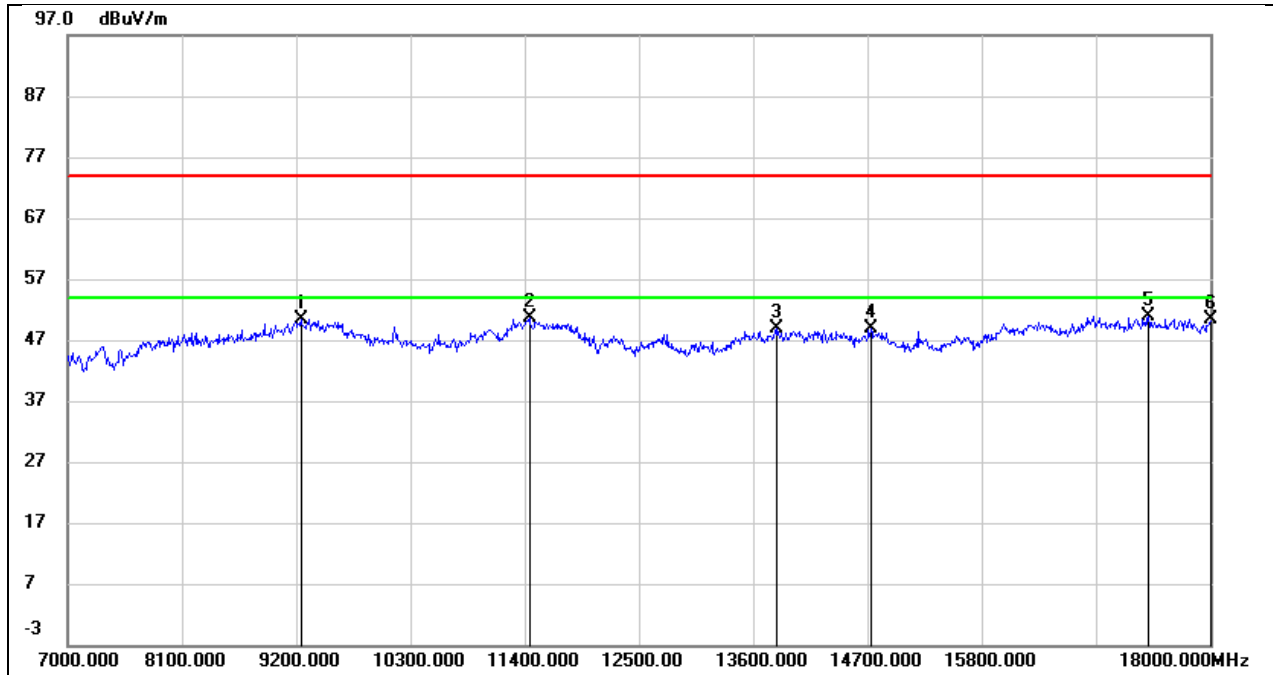


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9244.000	38.49	11.92	50.41	74.00	-23.59	peak
2	11444.000	34.51	16.15	50.66	74.00	-23.34	peak
3	13831.000	27.47	21.30	48.77	74.00	-25.23	peak
4	14733.000	28.21	20.69	48.90	74.00	-25.10	peak
5	17406.000	25.80	25.05	50.85	74.00	-23.15	peak
6	18000.000	23.05	27.41	50.46	74.00	-23.54	peak

Test Mode:	802.11ax HE80	Frequency(MHz):	5530
Polarity:	Horizontal	Test Voltage:	DC 3.3V

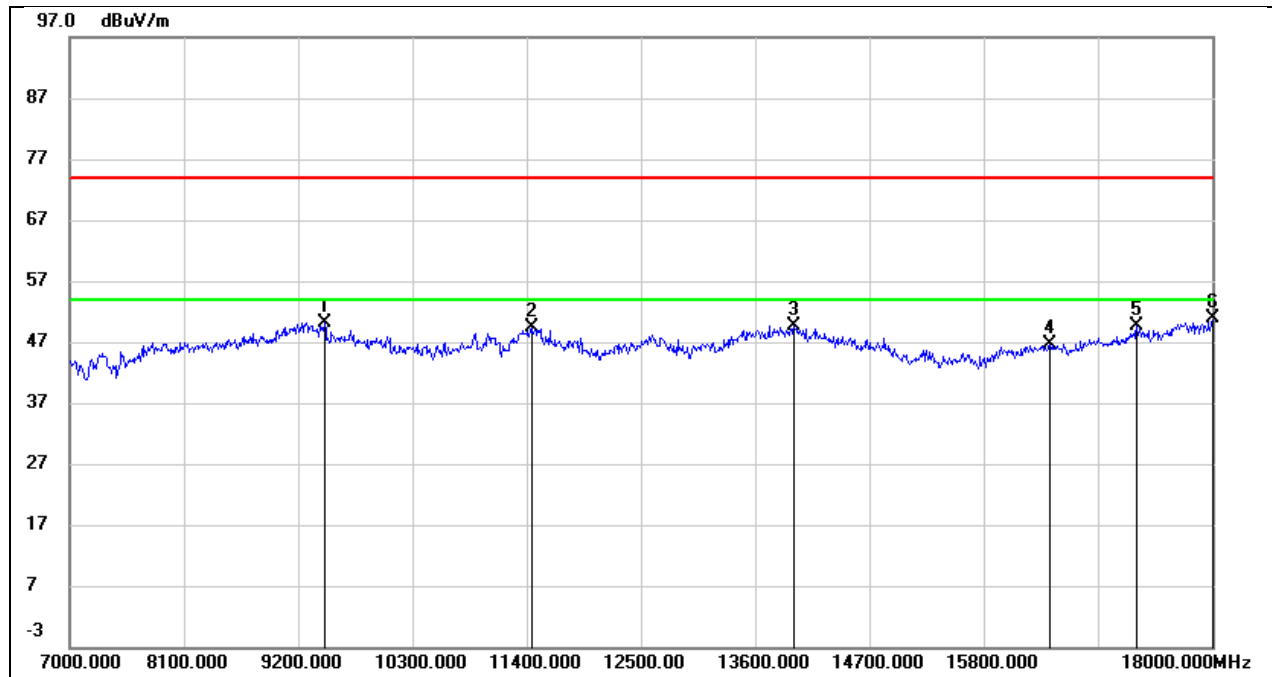


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9453.000	37.67	12.55	50.22	74.00	-23.78	peak
2	11444.000	31.74	17.57	49.31	74.00	-24.69	peak
3	13974.000	26.12	23.50	49.62	74.00	-24.38	peak
4	16438.000	24.86	21.81	46.67	74.00	-27.33	peak
5	17274.000	25.43	24.20	49.63	74.00	-24.37	peak
6	18000.000	21.33	29.61	50.94	74.00	-23.06	peak

Test Mode:	802.11ax HE80	Frequency(MHz):	5530
Polarity:	Vertical	Test Voltage:	DC 3.3V

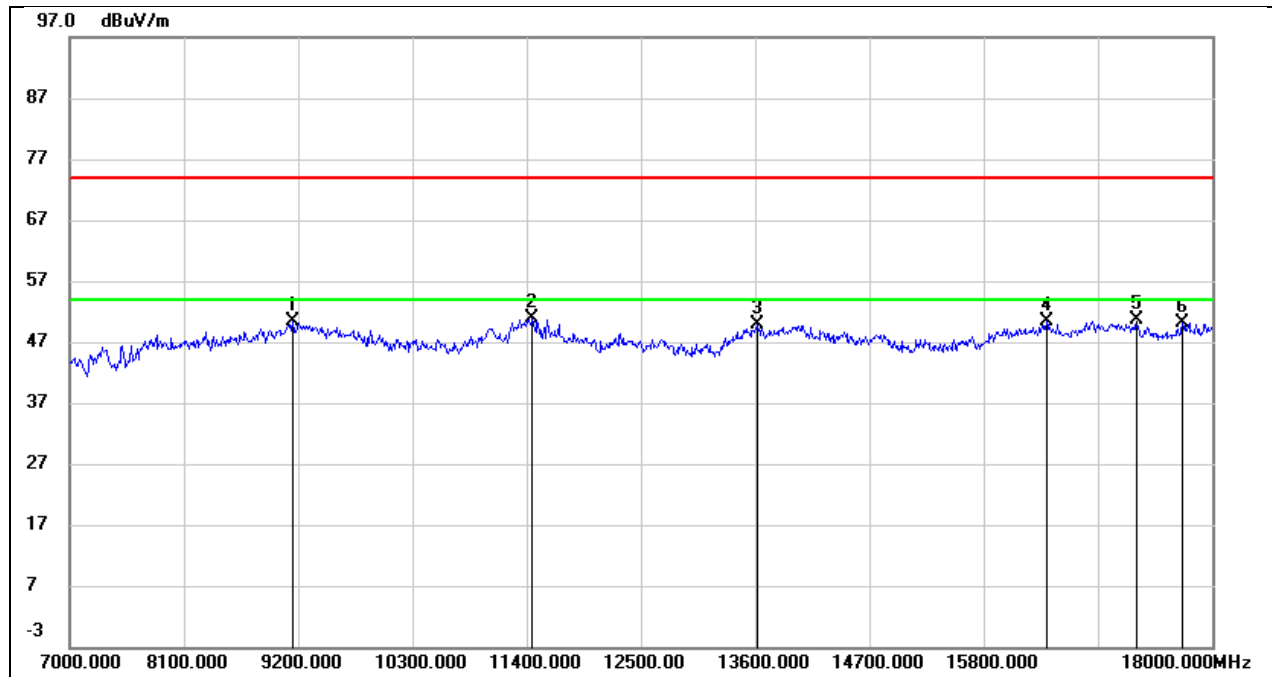


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9145.000	38.68	11.60	50.28	74.00	-23.72	peak
2	11455.000	34.72	16.18	50.90	74.00	-23.10	peak
3	13622.000	29.27	20.60	49.87	74.00	-24.13	peak
4	16405.000	26.73	23.60	50.33	74.00	-23.67	peak
5	17274.000	25.65	24.97	50.62	74.00	-23.38	peak
6	17714.000	24.34	25.71	50.05	74.00	-23.95	peak

Test Mode:	802.11ax HE80	Frequency(MHz):	5610
Polarity:	Horizontal	Test Voltage:	DC 3.3V

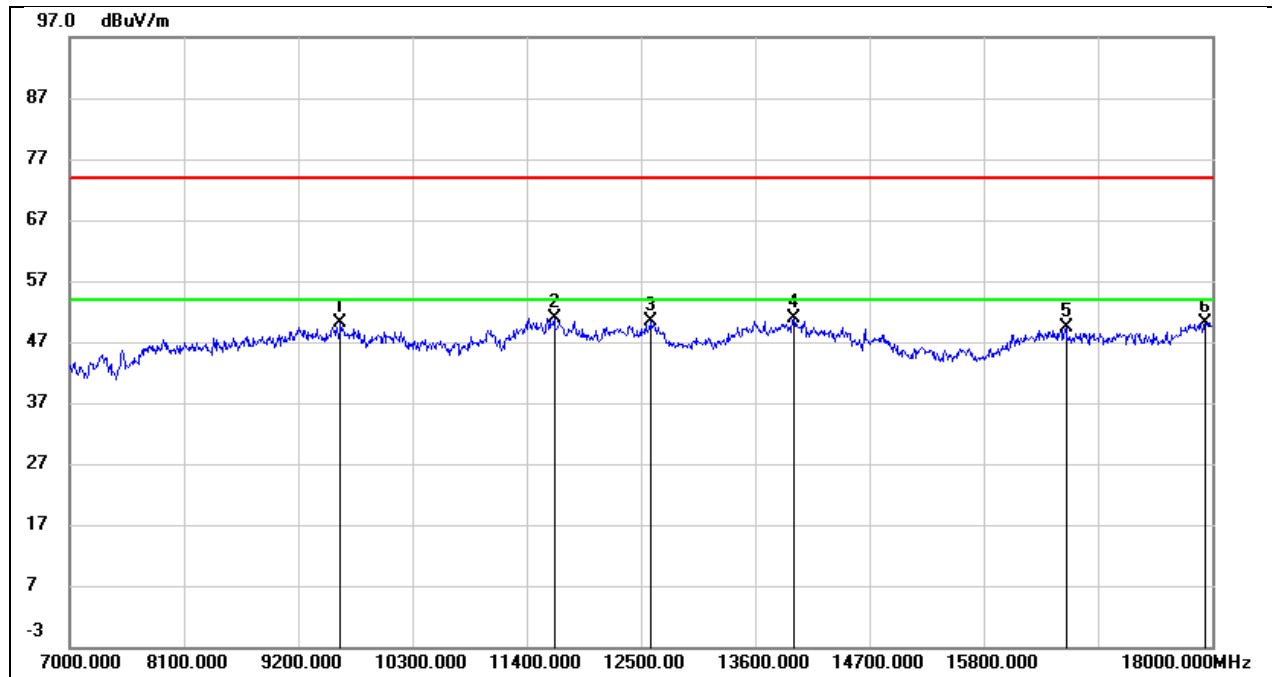


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9607.000	36.67	13.48	50.15	74.00	-23.85	peak
2	11664.000	32.87	18.05	50.92	74.00	-23.08	peak
3	12588.000	31.18	19.14	50.32	74.00	-23.68	peak
4	13974.000	27.45	23.50	50.95	74.00	-23.05	peak
5	16592.000	27.54	21.83	49.37	74.00	-24.63	peak
6	17934.000	21.14	28.91	50.05	74.00	-23.95	peak

Test Mode:	802.11ax HE80	Frequency(MHz):	5610
Polarity:	Vertical	Test Voltage:	DC 3.3V

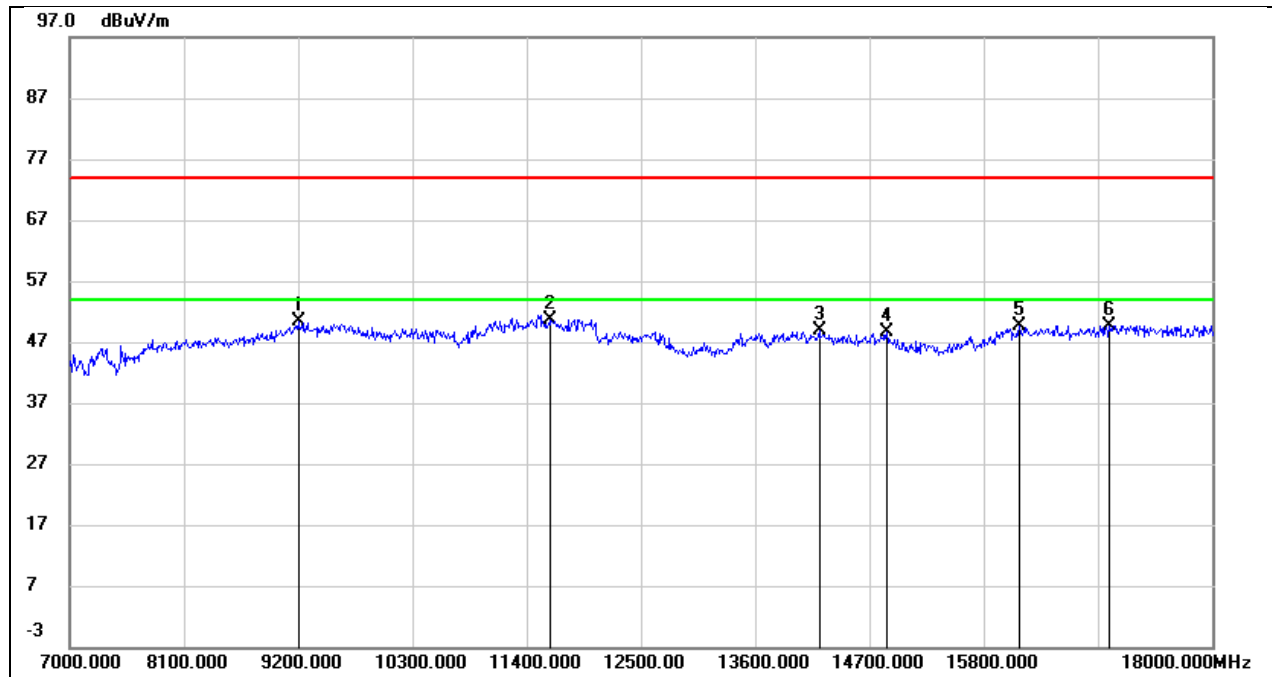


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9200.000	38.65	11.80	50.45	74.00	-23.55	peak
2	11631.000	33.97	16.68	50.65	74.00	-23.35	peak
3	14216.000	27.16	21.65	48.81	74.00	-25.19	peak
4	14865.000	28.22	20.40	48.62	74.00	-25.38	peak
5	16141.000	25.95	23.79	49.74	74.00	-24.26	peak
6	17010.000	25.27	24.45	49.72	74.00	-24.28	peak

Test Mode:	802.11ax HE80	Frequency(MHz):	5690
Polarity:	Horizontal	Test Voltage:	DC 3.3V

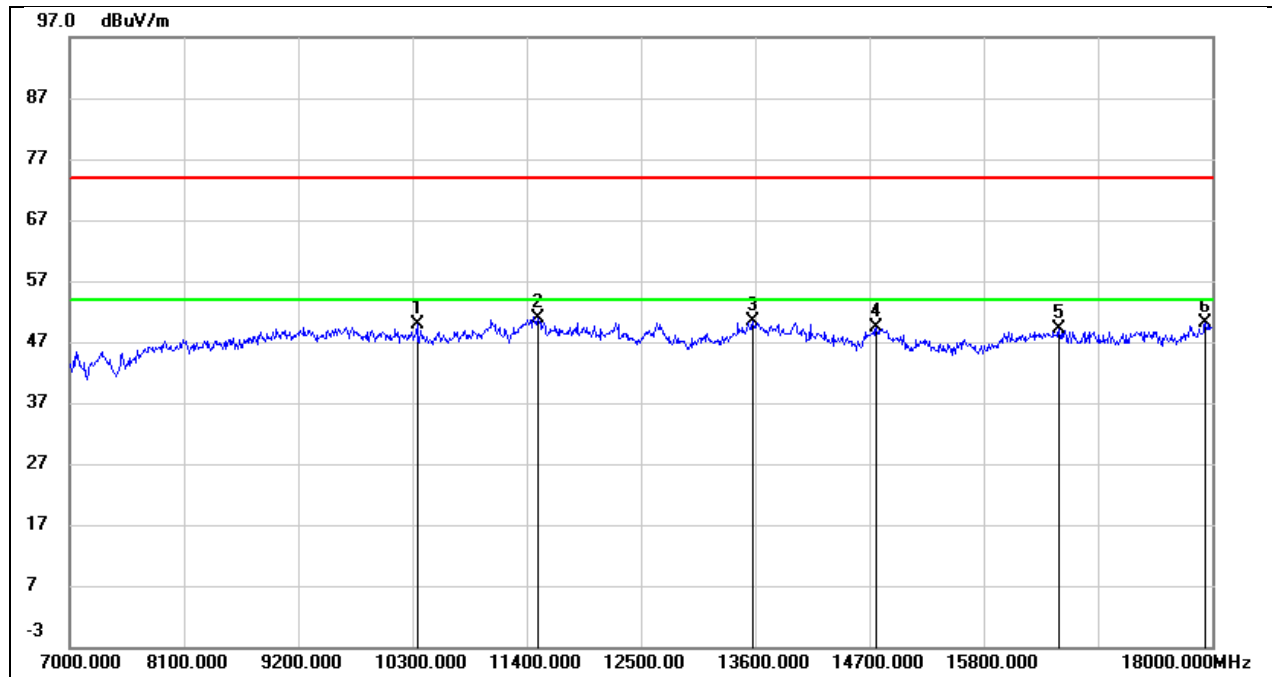


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10344.000	36.61	13.30	49.91	74.00	-24.09	peak
2	11510.000	32.94	17.86	50.80	74.00	-23.20	peak
3	13578.000	28.13	22.18	50.31	74.00	-23.69	peak
4	14766.000	29.06	20.41	49.47	74.00	-24.53	peak
5	16526.000	27.20	21.86	49.06	74.00	-24.94	peak
6	17934.000	21.12	28.91	50.03	74.00	-23.97	peak

Test Mode:	802.11ax HE80	Frequency(MHz):	5690
Polarity:	Vertical	Test Voltage:	DC 3.3V

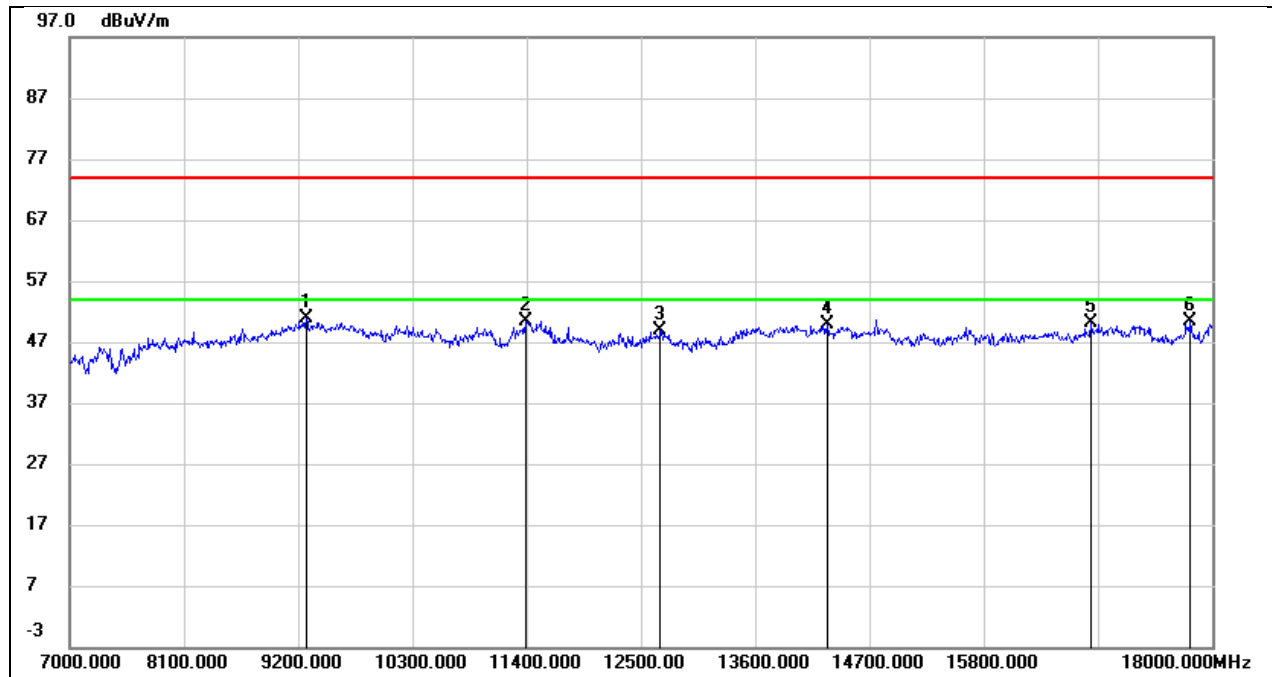


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9277.000	38.84	11.99	50.83	74.00	-23.17	peak
2	11389.000	34.40	15.95	50.35	74.00	-23.65	peak
3	12687.000	30.42	18.51	48.93	74.00	-25.07	peak
4	14293.000	28.41	21.37	49.78	74.00	-24.22	peak
5	16834.000	26.08	24.11	50.19	74.00	-23.81	peak
6	17791.000	24.16	26.11	50.27	74.00	-23.73	peak

Test Mode:	802.11ax HE80	Frequency(MHz):	5775
Polarity:	Horizontal	Test Voltage:	DC 3.3V

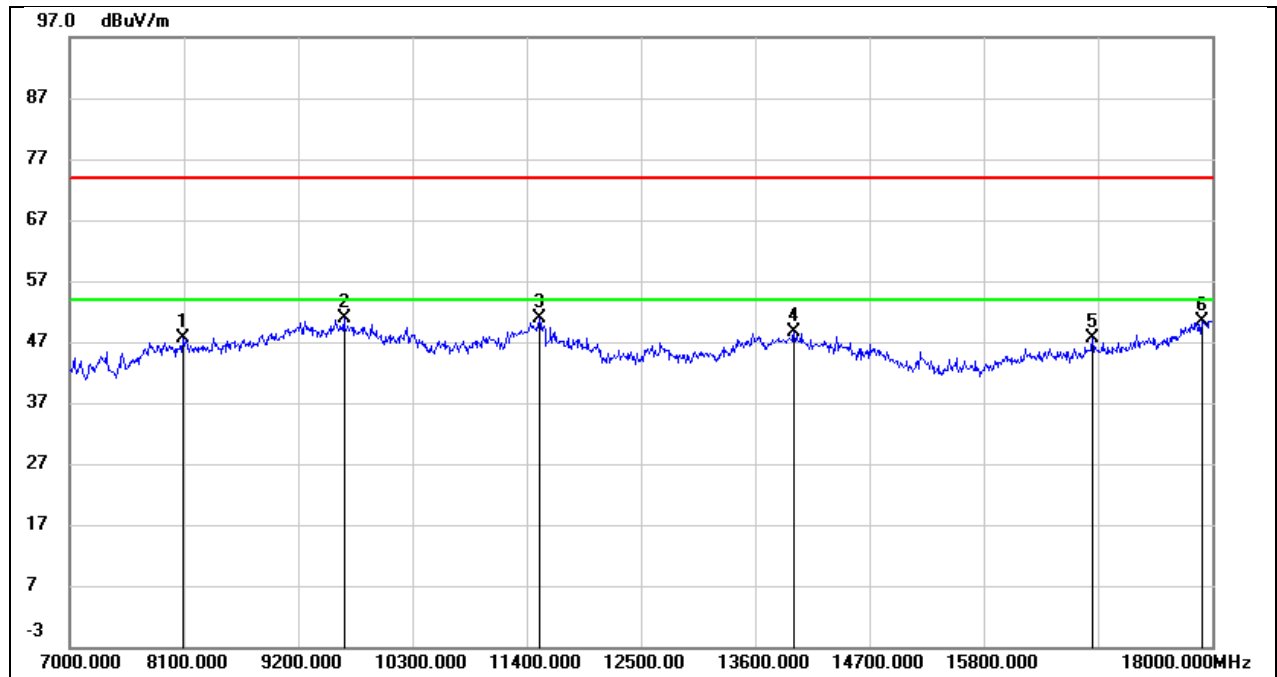

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8089.000	39.50	8.19	47.69	74.00	-26.31	peak
2	9640.000	37.23	13.53	50.76	74.00	-23.24	peak
3	11521.000	32.99	17.88	50.87	74.00	-23.13	peak
4	13974.000	25.21	23.50	48.71	74.00	-25.29	peak
5	16845.000	25.17	22.44	47.61	74.00	-26.39	peak
6	17901.000	21.91	28.56	50.47	74.00	-23.53	peak


Test Mode:	802.11ax HE80	Frequency(MHz):	5775
Polarity:	Vertical	Test Voltage:	DC 3.3V

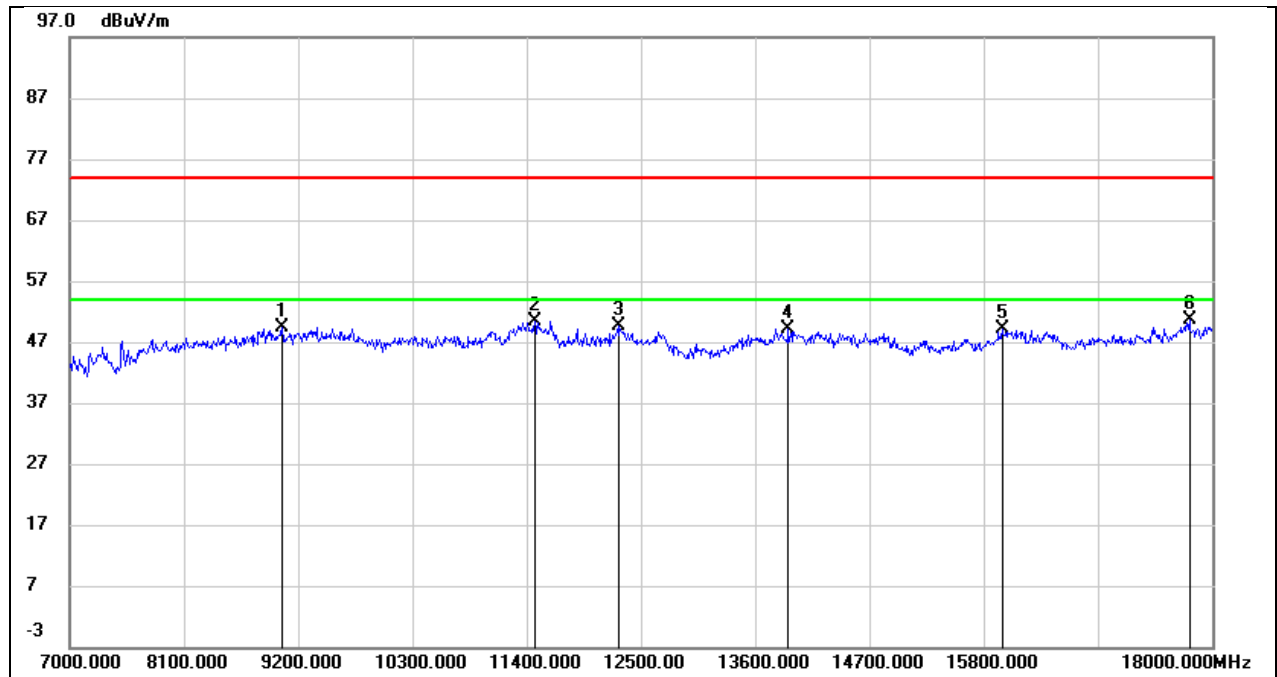

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9046.000	38.12	11.23	49.35	74.00	-24.65	peak
2	11477.000	34.15	16.26	50.41	74.00	-23.59	peak
3	12280.000	31.67	17.84	49.51	74.00	-24.49	peak
4	13919.000	27.42	21.66	49.08	74.00	-24.92	peak
5	15976.000	26.35	22.73	49.08	74.00	-24.92	peak
6	17780.000	24.52	26.06	50.58	74.00	-23.42	peak


8.4. SPURIOUS EMISSIONS(9 KHZ~30 MHZ)

Test Mode:	802.11a20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 3.3V

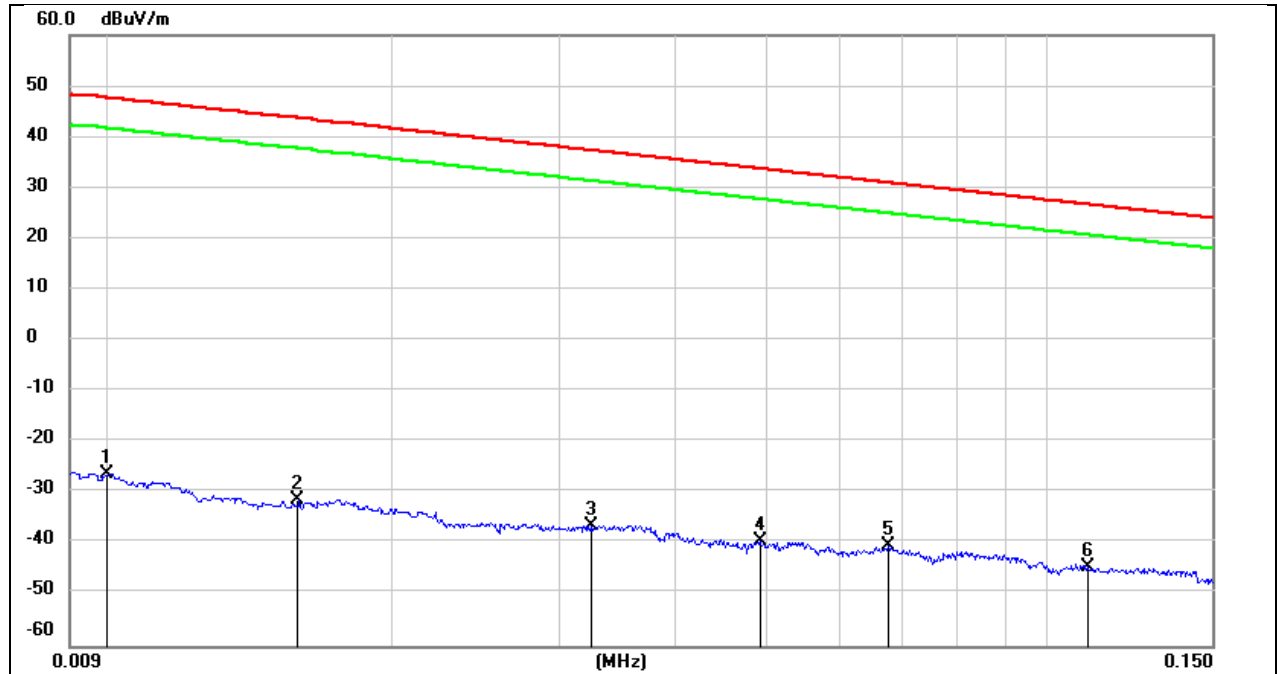


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.0100	75.22	-101.40	-26.18	47.60	-73.78	peak
2	0.0158	69.94	-101.37	-31.43	43.63	-75.06	peak
3	0.0325	64.99	-101.40	-36.41	37.36	-73.77	peak
4	0.0492	62.05	-101.47	-39.42	33.76	-73.18	peak
5	0.0675	61.14	-101.56	-40.42	31.02	-71.44	peak
6	0.1102	57.31	-101.77	-44.46	26.76	-71.22	peak

Test Mode:	802.11a20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 3.3V

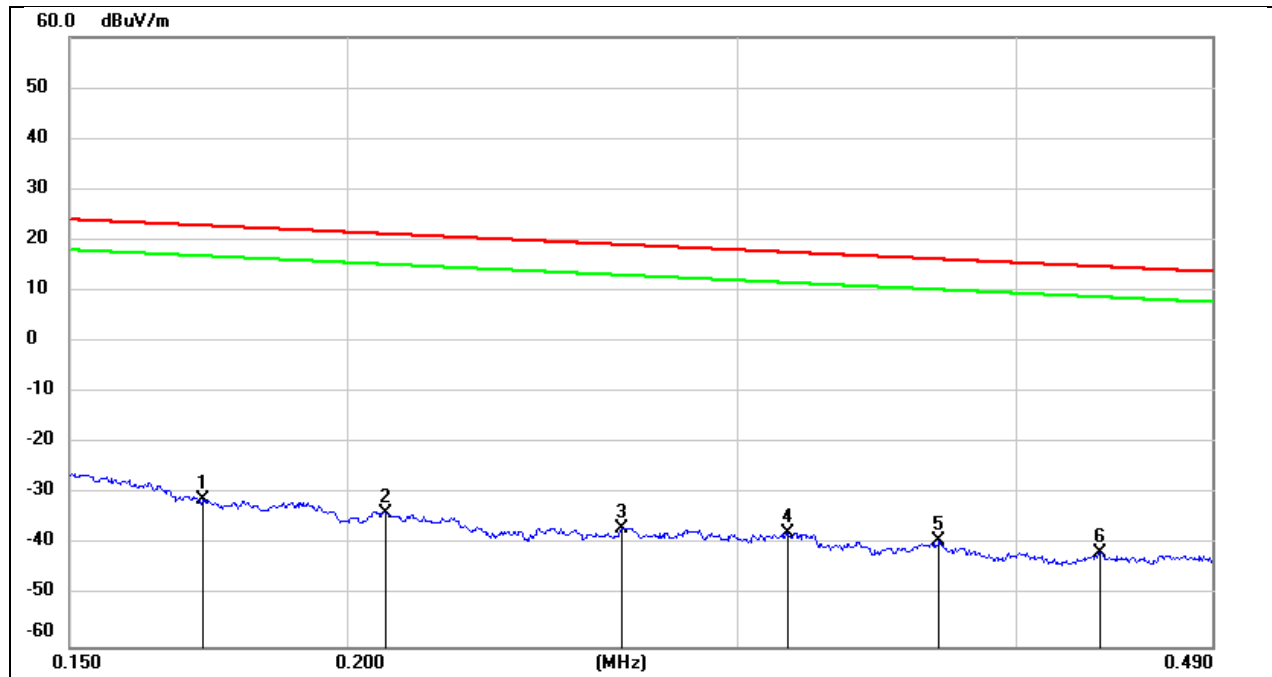

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.1723	70.50	-101.67	-31.17	22.88	-54.05	peak
2	0.2081	68.08	-101.73	-33.65	21.23	-54.88	peak
3	0.2659	65.05	-101.82	-36.77	19.11	-55.88	peak
4	0.3159	64.17	-101.87	-37.70	17.61	-55.31	peak
5	0.3694	62.84	-101.93	-39.09	16.25	-55.34	peak
6	0.4364	60.36	-101.99	-41.63	14.80	-56.43	peak


Test Mode:	802.11a20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 3.3V

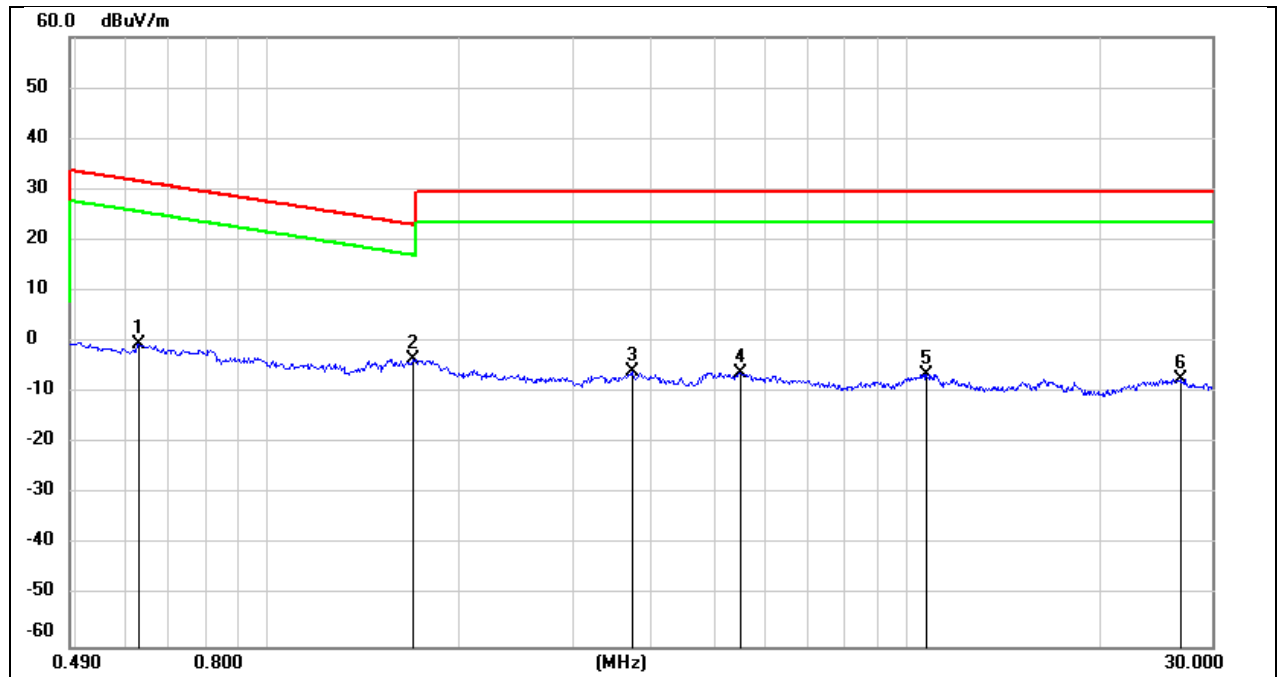

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.6298	61.67	-62.09	-0.42	31.62	-32.04	peak
2	1.6834	58.65	-61.96	-3.31	23.08	-26.39	peak
3	3.7100	55.70	-61.41	-5.71	29.54	-35.25	peak
4	5.5066	55.39	-61.42	-6.03	29.54	-35.57	peak
5	10.7299	54.48	-60.83	-6.35	29.54	-35.89	peak
6	26.8719	53.04	-60.27	-7.23	29.54	-36.77	peak


8.5. SPURIOUS EMISSIONS(18 GHZ~26 GHZ)

Test Mode:	802.11a 20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 3.3V

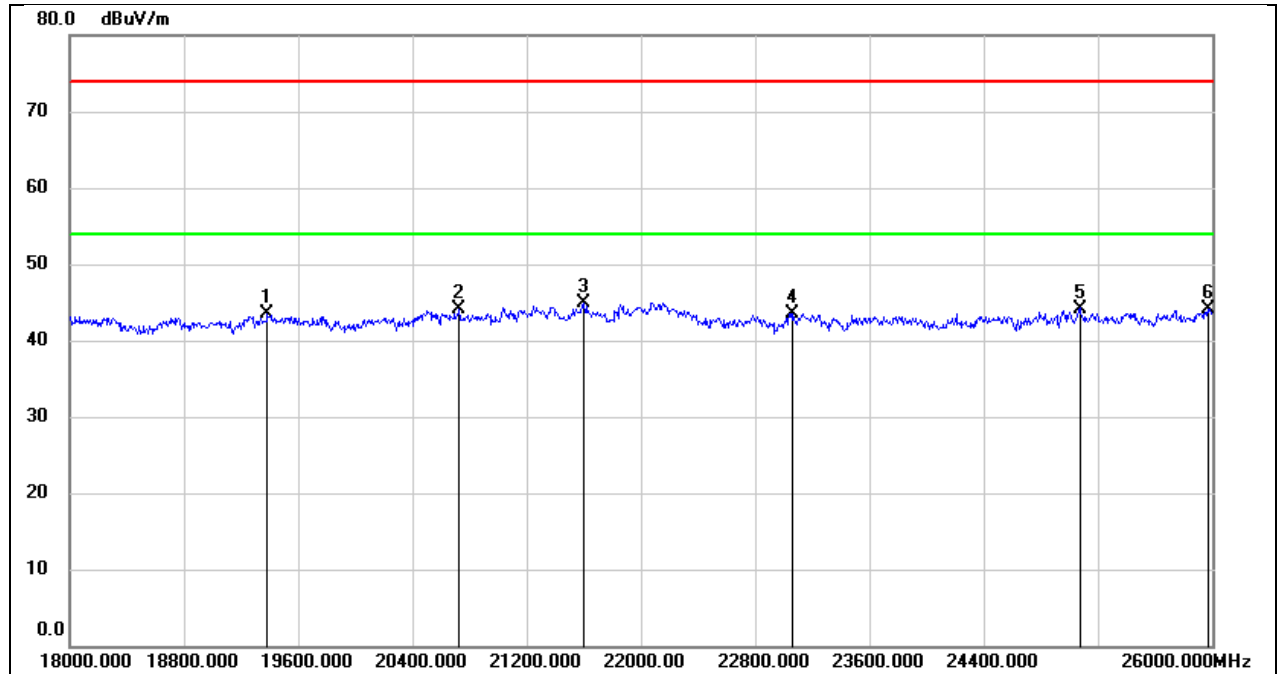

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	19384.000	49.00	-5.57	43.43	74.00	-30.57	peak
2	20728.000	49.16	-5.14	44.02	74.00	-29.98	peak
3	21600.000	49.52	-4.54	44.98	74.00	-29.02	peak
4	23064.000	46.99	-3.42	43.57	74.00	-30.43	peak
5	25072.000	46.17	-1.97	44.20	74.00	-29.80	peak
6	25968.000	45.13	-1.00	44.13	74.00	-29.87	peak


Test Mode:	802.11a 20	Frequency(MHz):	5180
Polarity:	Vertical	Test Voltage:	DC 3.3V

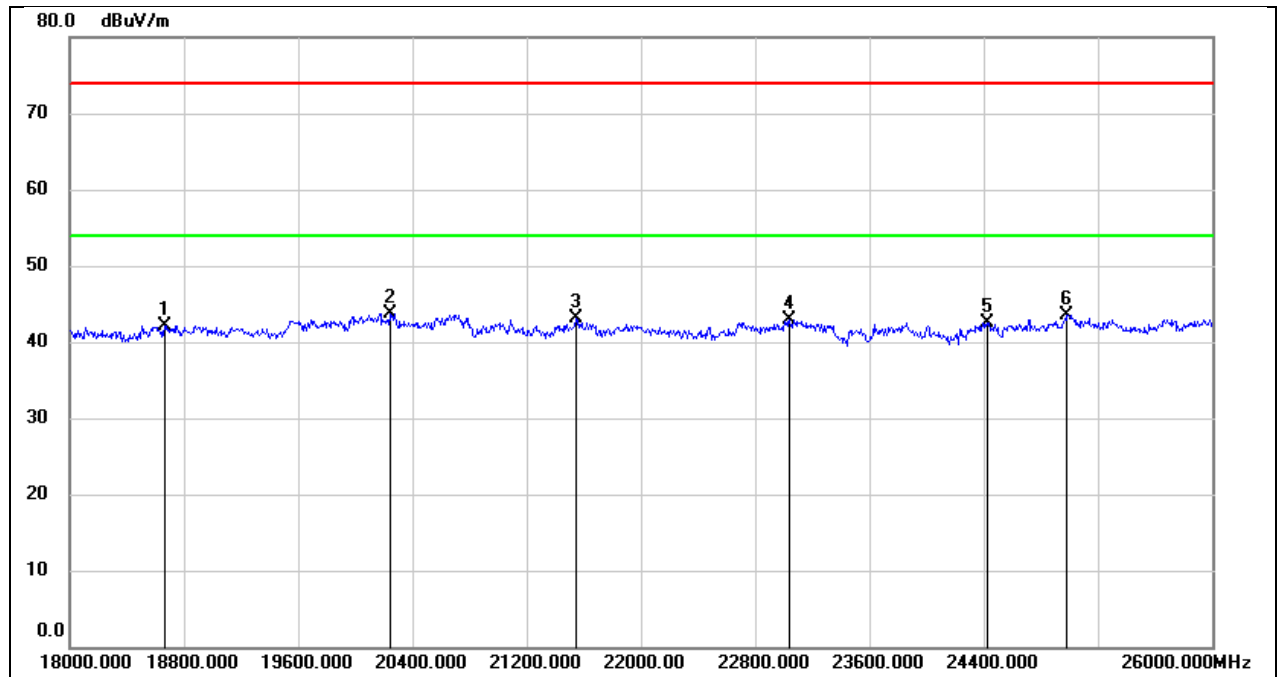

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18664.000	47.55	-5.37	42.18	74.00	-31.82	peak
2	20240.000	49.32	-5.61	43.71	74.00	-30.29	peak
3	21544.000	47.76	-4.63	43.13	74.00	-30.87	peak
4	23040.000	46.33	-3.43	42.90	74.00	-31.10	peak
5	24424.000	44.95	-2.48	42.47	74.00	-31.53	peak
6	24984.000	45.70	-2.11	43.59	74.00	-30.41	peak


8.6. SPURIOUS EMISSIONS(26 GHZ~40 GHZ)

Test Mode:	802.11a 20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 3.3V

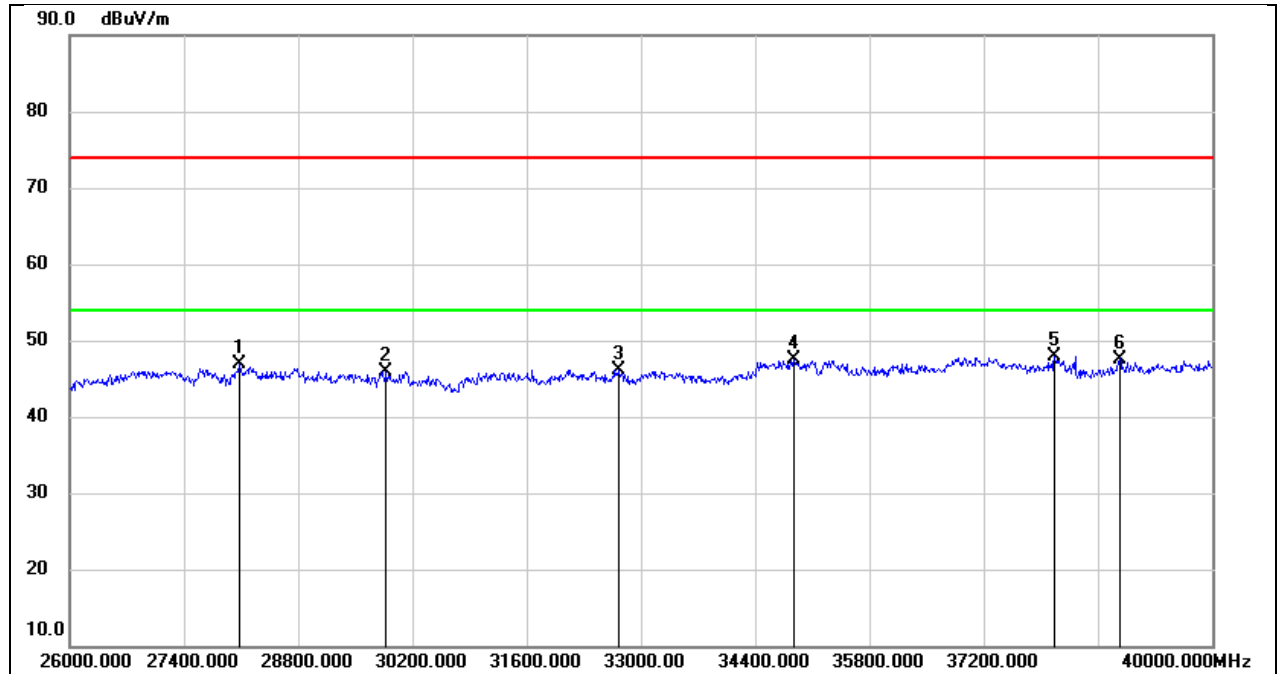

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	28072.000	50.51	-3.58	46.93	74.00	-27.07	peak
2	29878.000	47.42	-1.50	45.92	74.00	-28.08	peak
3	32720.000	47.48	-1.28	46.20	74.00	-27.80	peak
4	34876.000	46.06	1.43	47.49	74.00	-26.51	peak
5	38068.000	44.56	3.42	47.98	74.00	-26.02	peak
6	38866.000	43.38	4.22	47.60	74.00	-26.40	peak


Test Mode:	802.11a 20	Frequency(MHz):	5180
Polarity:	Vertical	Test Voltage:	DC 3.3V

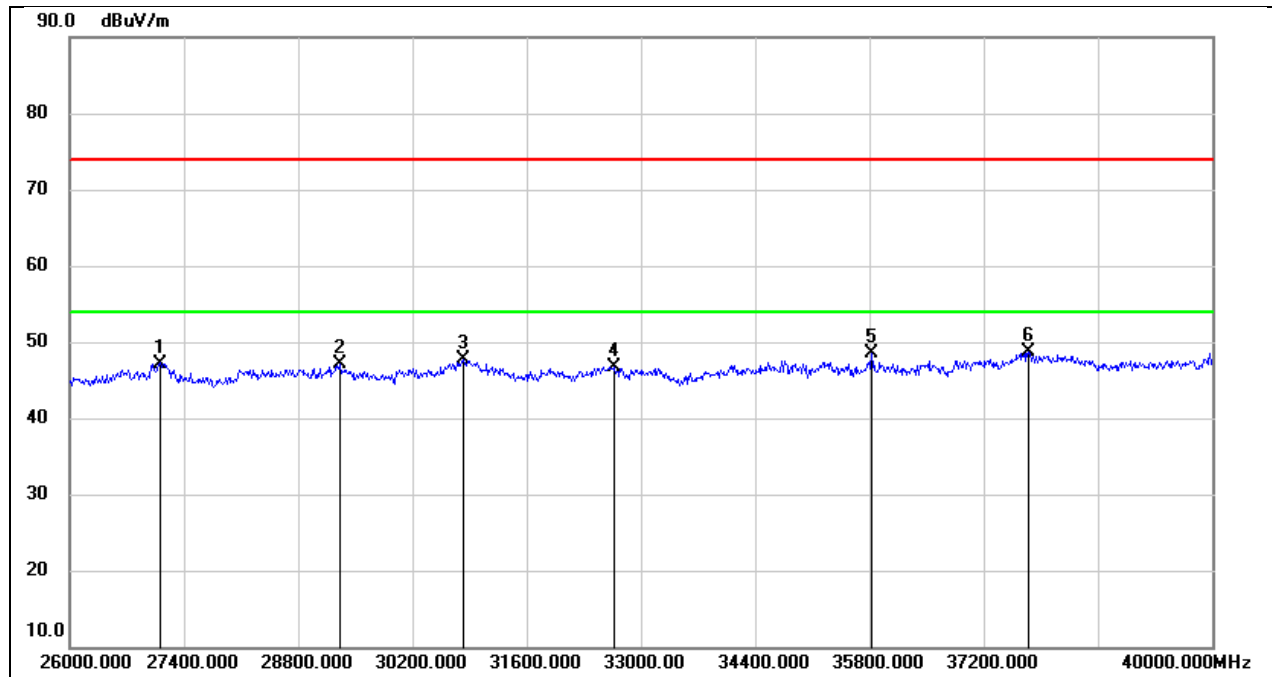

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	27106.000	51.14	-3.94	47.20	74.00	-26.80	peak
2	29304.000	48.15	-0.97	47.18	74.00	-26.82	peak
3	30816.000	48.69	-1.05	47.64	74.00	-26.36	peak
4	32664.000	48.12	-1.34	46.78	74.00	-27.22	peak
5	35828.000	44.75	3.67	48.42	74.00	-25.58	peak
6	37746.000	45.02	3.66	48.68	74.00	-25.32	peak


8.7. SPURIOUS EMISSIONS(30 MHZ~1 GHZ)

Test Mode:	802.11a 20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 3.3V

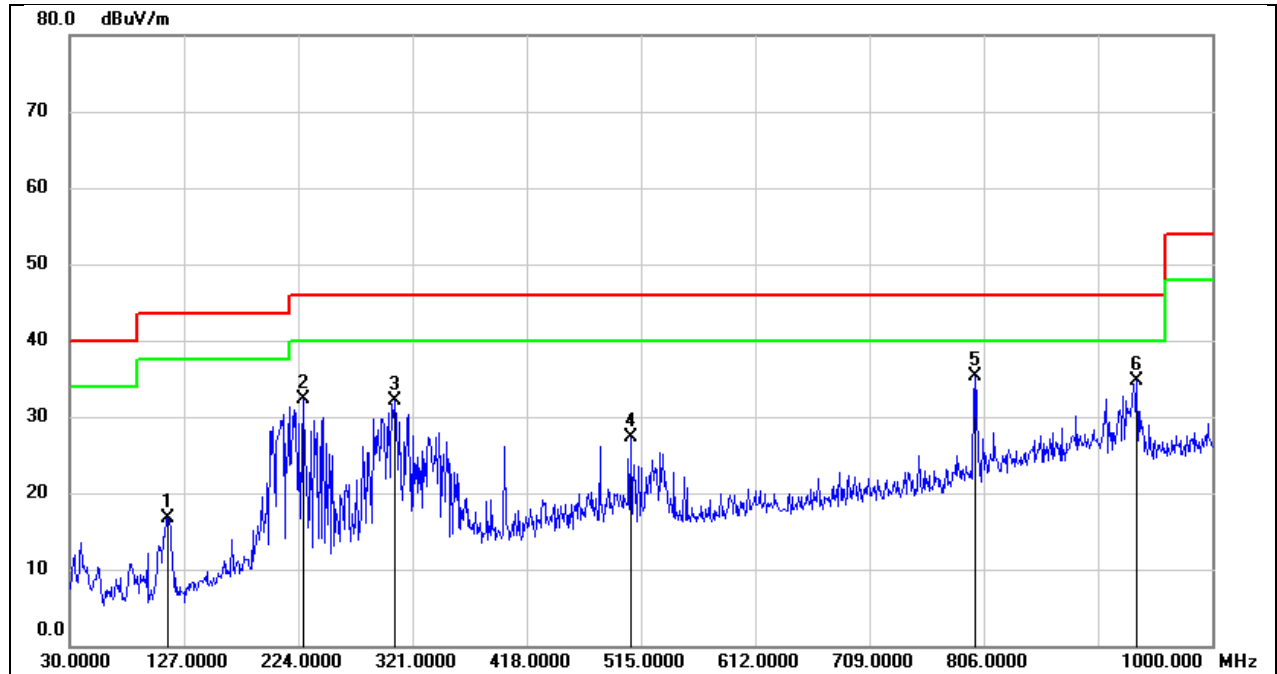

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	113.4200	31.91	-15.17	16.74	43.50	-26.76	QP
2	227.8800	45.62	-13.41	32.21	46.00	-13.79	QP
3	305.4800	43.44	-11.29	32.15	46.00	-13.85	QP
4	506.2700	34.82	-7.59	27.23	46.00	-18.77	QP
5	799.2100	37.84	-2.63	35.21	46.00	-10.79	QP
6	935.9800	35.36	-0.73	34.63	46.00	-11.37	QP

Test Mode:	802.11a 20	Frequency(MHz):	5180
Polarity:	Vertical	Test Voltage:	DC 3.3V

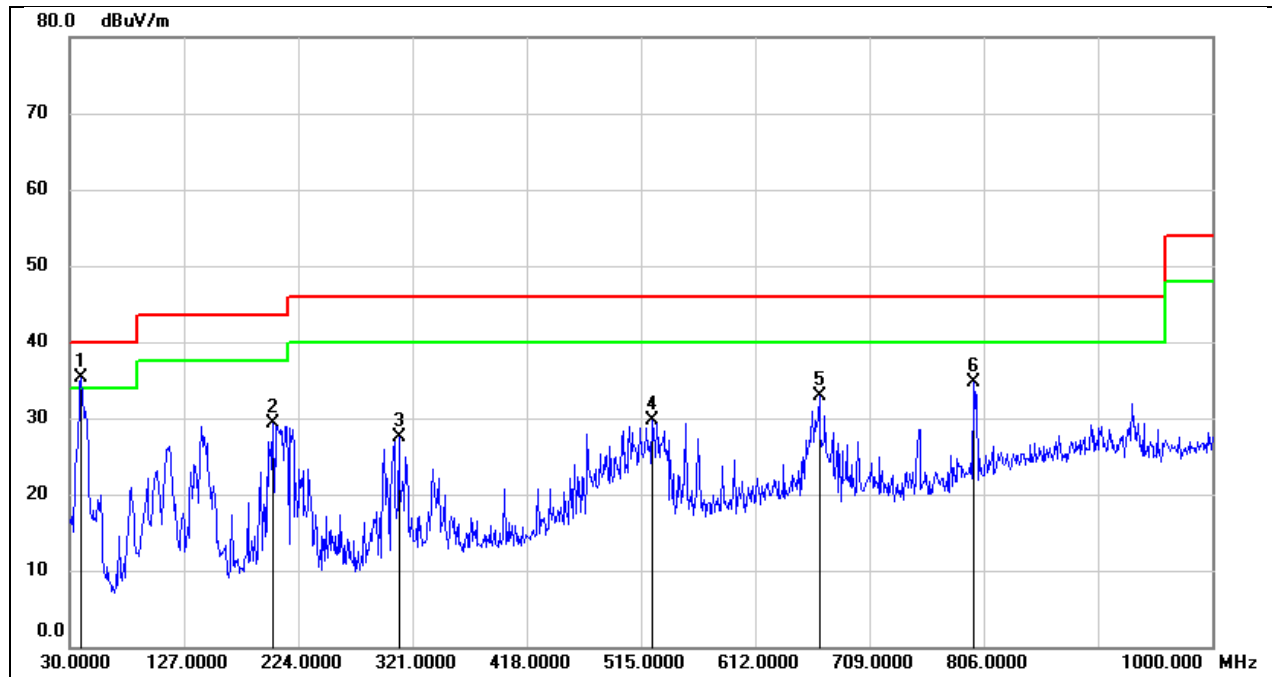

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	39.7000	50.09	-14.74	35.35	40.00	-4.65	QP
2	202.6600	41.63	-12.41	29.22	43.50	-14.28	QP
3	309.3599	38.58	-11.14	27.44	46.00	-18.56	QP
4	524.7000	37.10	-7.36	29.74	46.00	-16.26	QP
5	666.3200	38.12	-5.15	32.97	46.00	-13.03	QP
6	797.2700	37.40	-2.68	34.72	46.00	-11.28	QP

9. AC POWER LINE CONDUCTED EMISSION

LIMITS

Please refer to CFR 47 FCC §15.207 (a)

FREQUENCY (MHz)	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00


TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 6.2.

The EUT is put on a table of non-conducting material that is 80 cm high. The vertical conducting wall of shielding is located 40 cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI Measurement Receiver (R&S Test Receiver ESR3) is used to test the emissions from both sides of AC line. According to the requirements in Section 6.2 of ANSI C63.10-2013. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode. The bandwidth of EMI test receiver is set at 9 kHz.

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application.

TEST SETUP

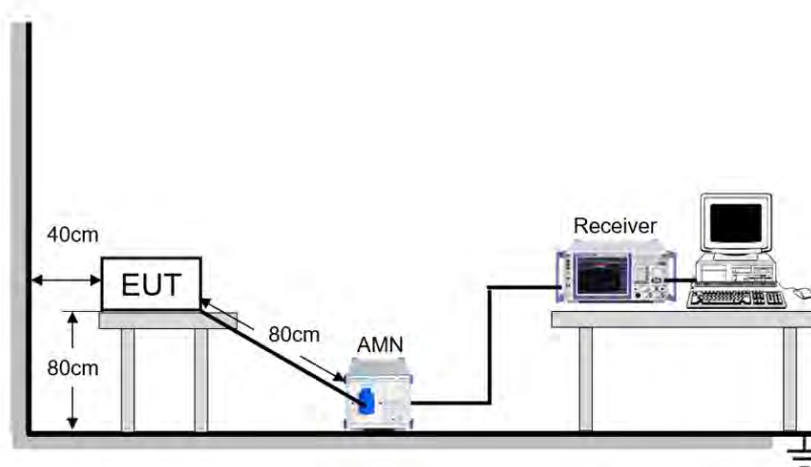

TEST ENVIRONMENT


Temperature	22.3°C	Relative Humidity	57.1%
Atmosphere Pressure	101kPa	Test Voltage	AC 120V 60Hz

TEST DATE / ENGINEER

Test Date	April 3, 2025	Test By	Deacon Tan
-----------	---------------	---------	------------

TEST RESULTS

Test Mode:	802.11a	Frequency(MHz):	5180
Line:	Line		

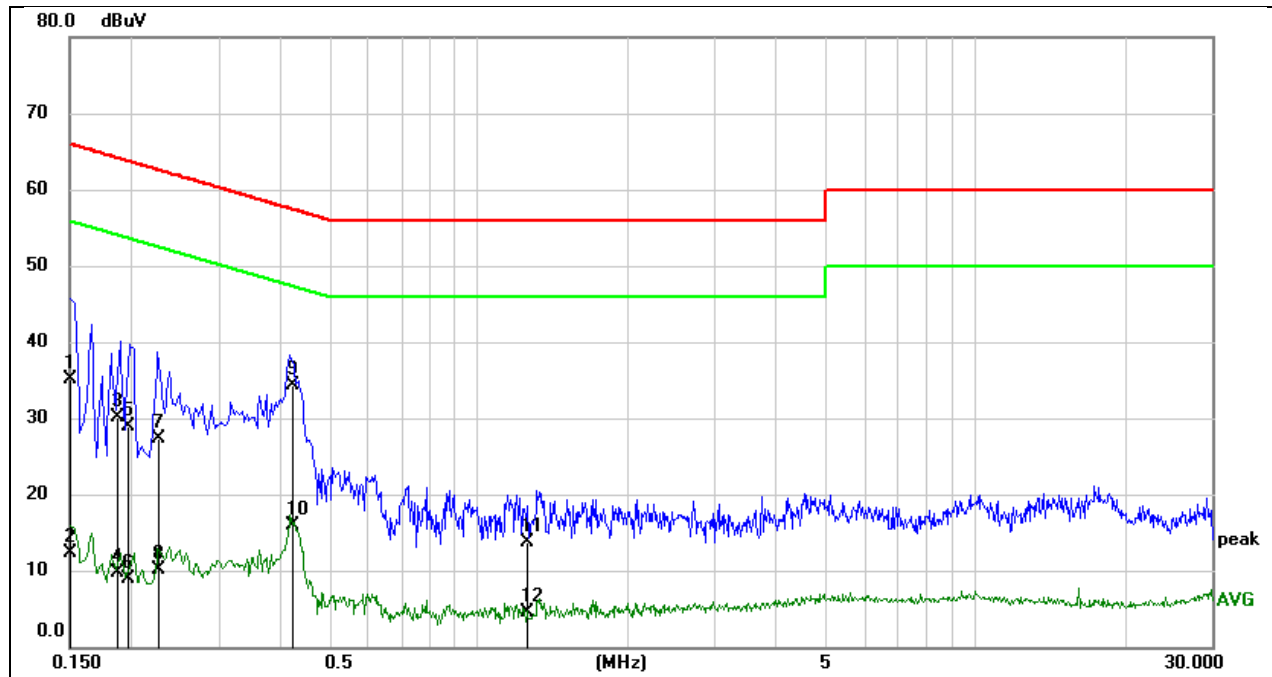


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1508	25.55	9.64	35.19	65.96	-30.77	QP
2	0.1508	2.72	9.64	12.36	55.96	-43.60	AVG
3	0.1872	20.39	9.64	30.03	64.16	-34.13	QP
4	0.1872	-0.02	9.64	9.62	54.16	-44.54	AVG
5	0.1962	19.27	9.64	28.91	63.77	-34.86	QP
6	0.1962	-0.76	9.64	8.88	53.77	-44.89	AVG
7	0.2268	17.75	9.64	27.39	62.57	-35.18	QP
8	0.2268	0.47	9.64	10.11	52.57	-42.46	AVG
9	0.4222	24.69	9.64	34.33	57.40	-23.07	QP
10	0.4222	6.32	9.64	15.96	47.40	-31.44	AVG
11	1.2519	4.15	9.63	13.78	56.00	-42.22	QP
12	1.2519	-5.03	9.63	4.60	46.00	-41.40	AVG

Note:

1. Result = Reading + Correct Factor.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).
4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

Note: All the modes have been tested, only the worst data was recorded in the report.

Test Mode:	802.11a	Frequency(MHz):	5180
Line:	Neutral		

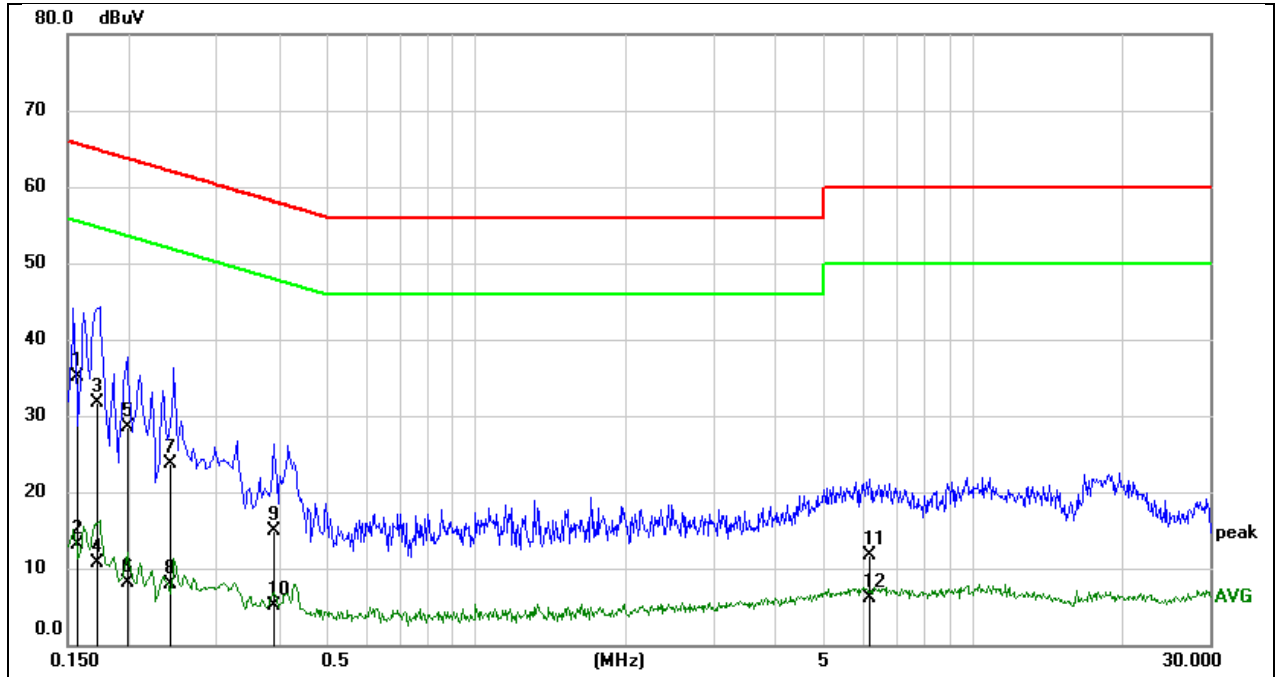

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1570	25.44	9.73	35.17	65.62	-30.45	QP
2	0.1570	3.28	9.73	13.01	55.62	-42.61	AVG
3	0.1720	22.10	9.70	31.80	64.86	-33.06	QP
4	0.1720	0.91	9.70	10.61	54.86	-44.25	AVG
5	0.1983	18.83	9.64	28.47	63.68	-35.21	QP
6	0.1983	-1.59	9.64	8.05	53.68	-45.63	AVG
7	0.2418	14.10	9.64	23.74	62.03	-38.29	QP
8	0.2418	-1.69	9.64	7.95	52.03	-44.08	AVG
9	0.3905	5.19	9.64	14.83	58.05	-43.22	QP
10	0.3905	-4.55	9.64	5.09	48.05	-42.96	AVG
11	6.2368	1.88	9.73	11.61	60.00	-48.39	QP
12	6.2368	-3.57	9.73	6.16	50.00	-43.84	AVG

Note:

1. Result = Reading + Correct Factor.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).
4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

Note: All the modes have been tested, only the worst data was recorded in the report.

10. ANTENNA REQUIREMENT

REQUIREMENT

Please refer to FCC part 15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to FCC part 15.407(a)

For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DESCRIPTION

Pass

11. TEST DATA

11.1. APPENDIX A: EMISSION BANDWIDTH

11.1.1. Test Result


Test Mode	Antenna	Frequency[MHz]	26db EBW [MHz]	FL[MHz]	FH[MHz]
11A	Ant1	5180	21.800	5169.160	5190.960
		5200	22.840	5188.320	5211.160
		5240	23.520	5228.160	5251.680
		5260	23.440	5248.080	5271.520
		5280	23.320	5268.400	5291.720
		5320	23.600	5307.920	5331.520
		5500	24.080	5487.560	5511.640
		5580	22.840	5568.280	5591.120
		5700	24.400	5688.120	5712.520
		5720	23.120	5708.640	5731.760
		5720 UNII-2C	16.36	5708.640	5725
		5720 UNII-3	6.76	5725	5731.760
		5745	22.800	5732.920	5755.720
		5785	23.200	5773.520	5796.720
		5825	23.200	5813.080	5836.280
11N20SISO	Ant1	5180	25.400	5167.800	5193.200
		5200	26.240	5186.680	5212.920
		5240	24.880	5227.480	5252.360
		5260	25.280	5247.080	5272.360
		5280	25.200	5267.240	5292.440
		5320	24.240	5308.200	5332.440
		5500	25.840	5486.920	5512.760
		5580	25.360	5566.800	5592.160
		5700	26.120	5687.600	5713.720
		5720	26.360	5707.360	5733.720
		5720 UNII-2C	17.64	5707.360	5725
		5720 UNII-3	8.72	5725	5733.720
		5745	26.720	5732.080	5758.800
		5785	25.880	5771.880	5797.760
		5825	26.360	5811.600	5837.960
11N40SISO	Ant1	5190	46.560	5166.480	5213.040
		5230	43.600	5208.320	5251.920
		5270	45.360	5246.880	5292.240
		5310	45.280	5287.120	5332.400
		5510	45.760	5487.280	5533.040
		5550	46.800	5527.840	5574.640
		5670	44.960	5648.000	5692.960
		5710	43.440	5688.240	5731.680
		5710 UNII-2C	36.76	5688.240	5725
		5710 UNII-3	6.68	5725	5731.680
		5755	46.240	5731.560	5777.800
		5795	45.760	5772.360	5818.120
11AC80SISO	Ant1	5210	86.560	5167.440	5254.000
		5290	88.640	5243.600	5332.240
		5530	87.360	5485.040	5572.400
		5610	86.080	5567.760	5653.840
		5690	86.720	5646.800	5733.520
		5690 UNII-2C	78.2	5646.800	5725
		5690 UNII-3	8.52	5725	5733.520
		5775	86.720	5732.440	5819.160
11AX20SISO	Ant1	5180	22.640	5168.720	5191.360
		5200	23.640	5188.320	5211.960


		5240	23.720	5228.680	5252.400
		5260	24.720	5247.880	5272.600
		5280	25.040	5267.720	5292.760
		5320	24.960	5308.760	5333.720
		5500	25.520	5487.080	5512.600
		5580	25.920	5567.360	5593.280
		5700	25.040	5687.640	5712.680
		5720	24.360	5707.560	5731.920
		5720 UNII-2C	17.44	5707.560	5725
		5720 UNII-3	6.92	5725	5731.920
		5745	26.560	5731.840	5758.400
		5785	26.400	5772.320	5798.720
		5825	24.800	5812.240	5837.040
11AX40SISO	Ant1	5190	43.280	5169.040	5212.320
		5230	43.920	5208.160	5252.080
		5270	42.960	5248.960	5291.920
		5310	42.720	5289.040	5331.760
		5510	42.320	5488.400	5530.720
		5550	42.400	5528.880	5571.280
		5670	44.800	5647.920	5692.720
		5710	43.360	5688.080	5731.440
		5710 UNII-2C	36.92	5688.080	5725
		5710 UNII-3	6.44	5725	5731.440
		5755	41.920	5734.360	5776.280
		5795	43.840	5772.680	5816.520
11AX80SISO	Ant1	5210	85.600	5167.280	5252.880
		5290	84.480	5248.560	5333.040
		5530	84.000	5488.560	5572.560
		5610	85.760	5568.080	5653.840
		5690	85.760	5647.440	5733.200
		5690 UNII-2C	77.56	5647.440	5725
		5690 UNII-3	8.2	5725	5733.200
		5775	84.960	5733.080	5818.040

11.1.2. Test Graphs





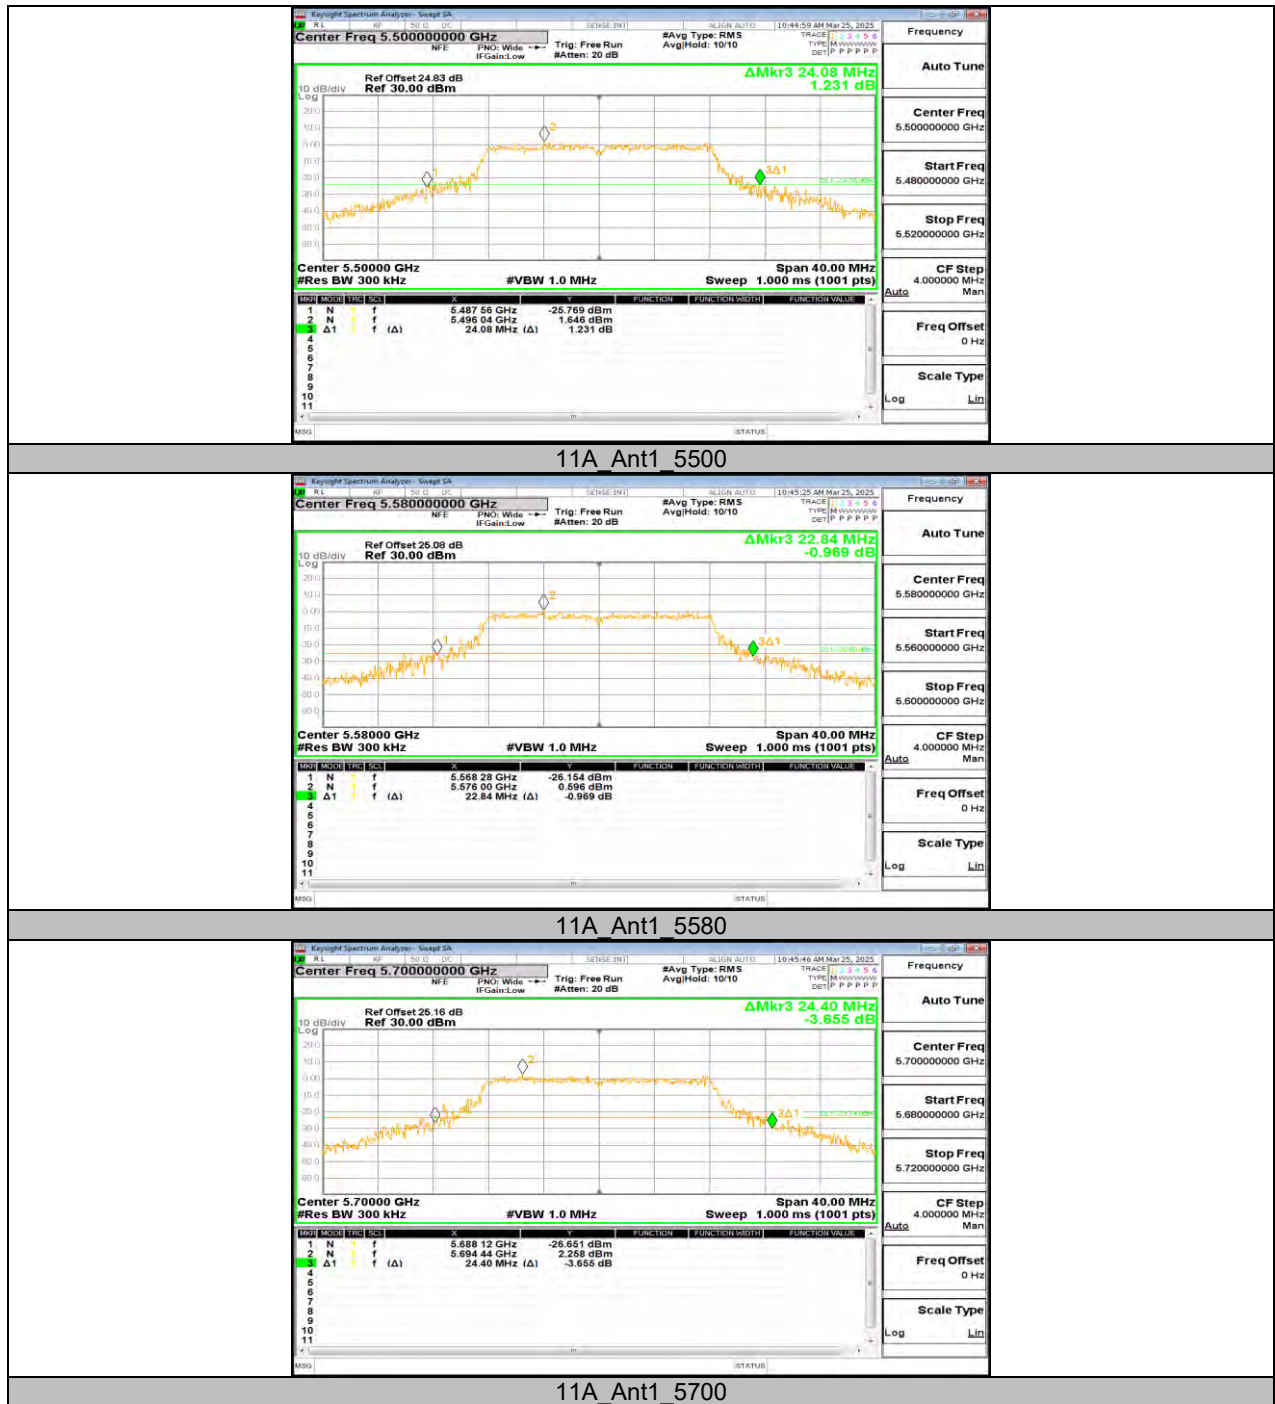


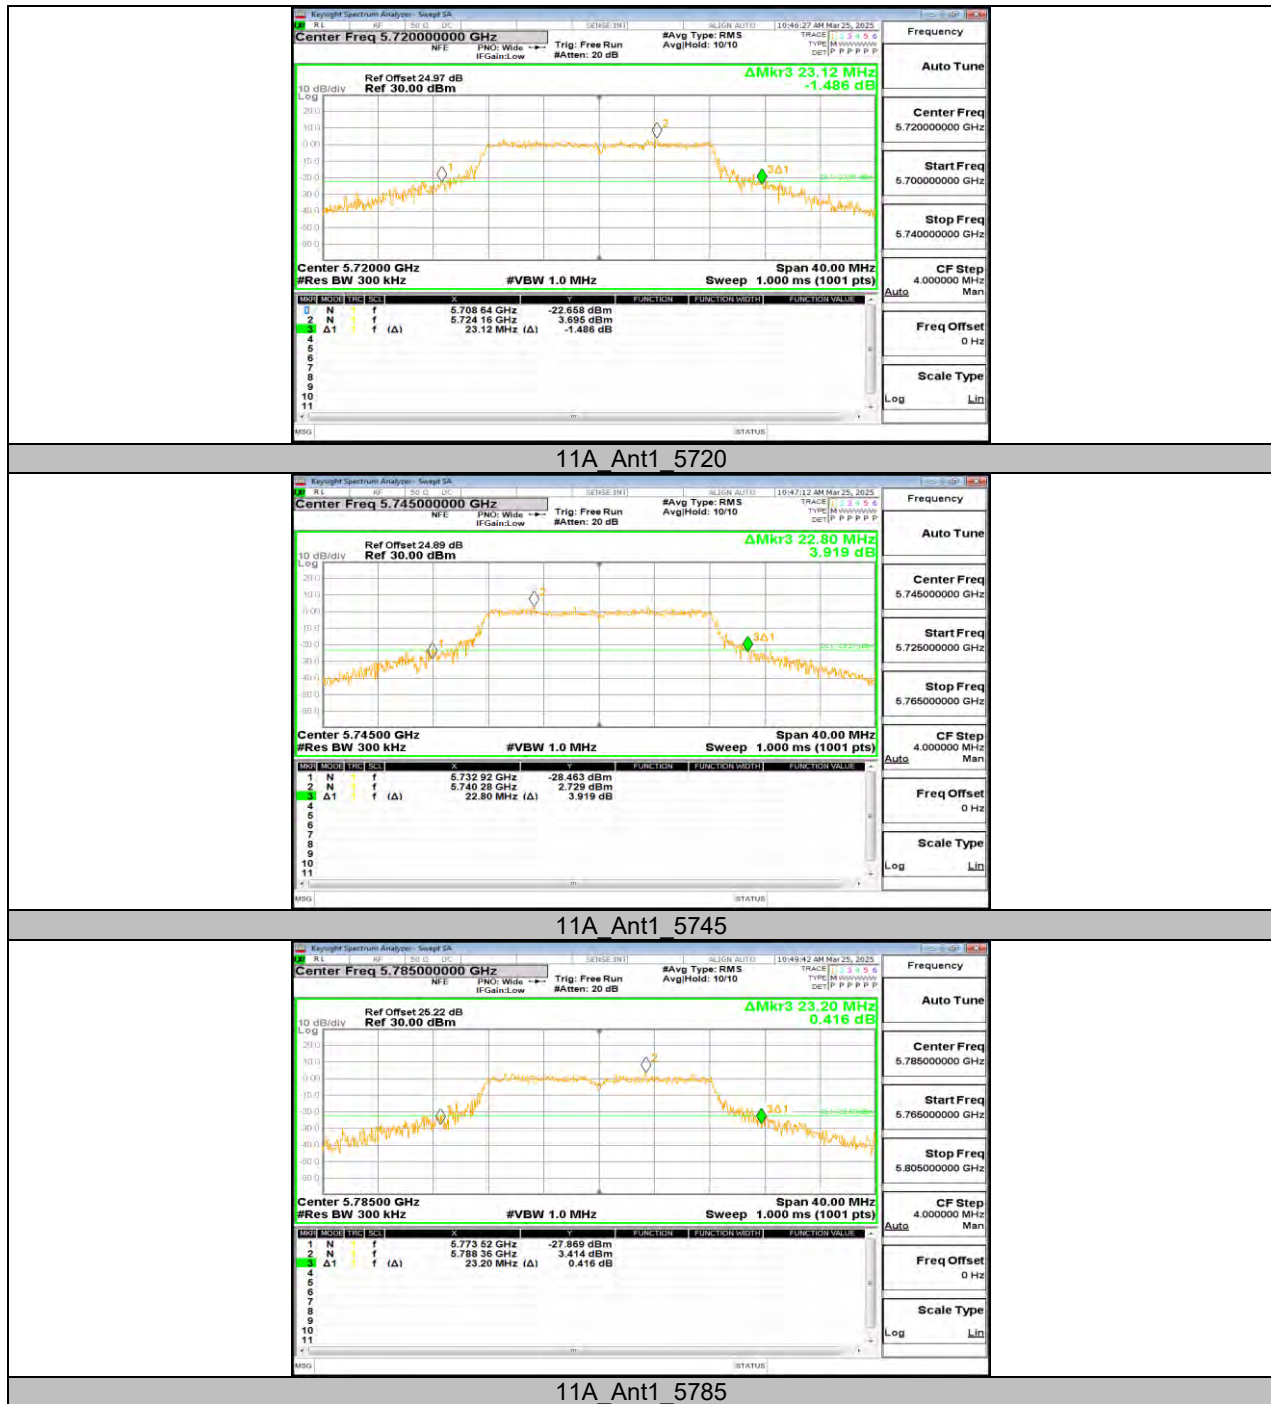







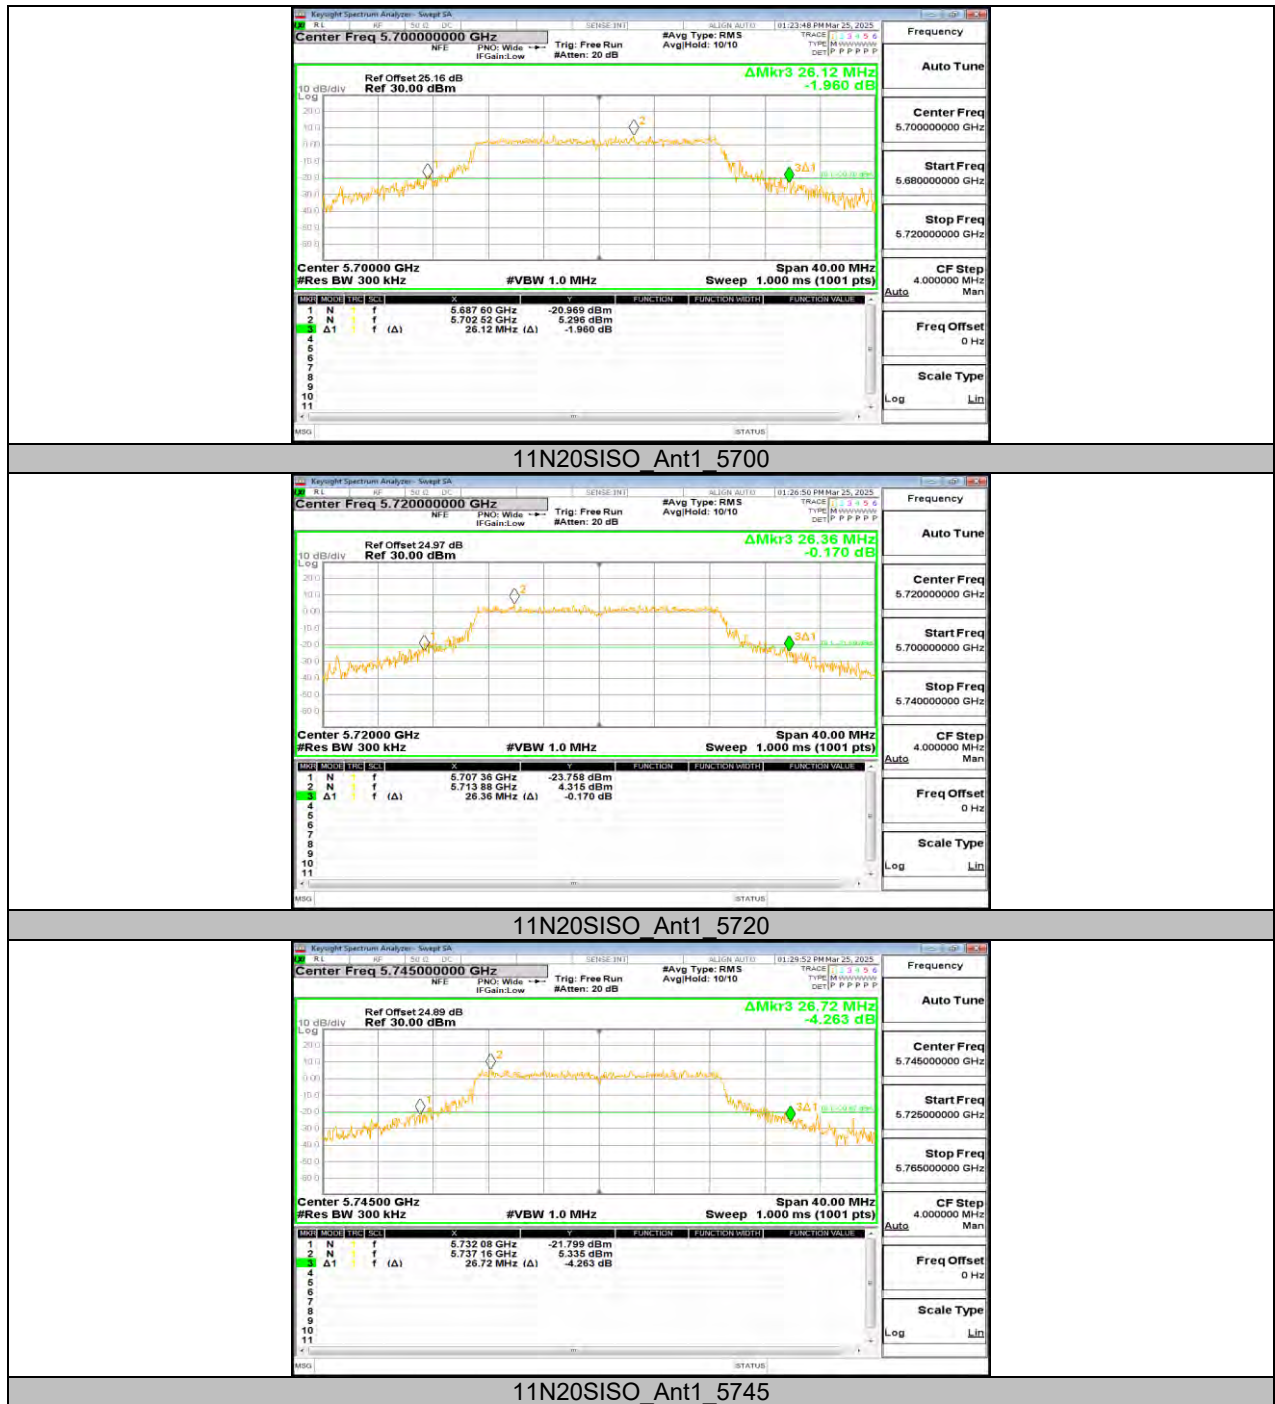










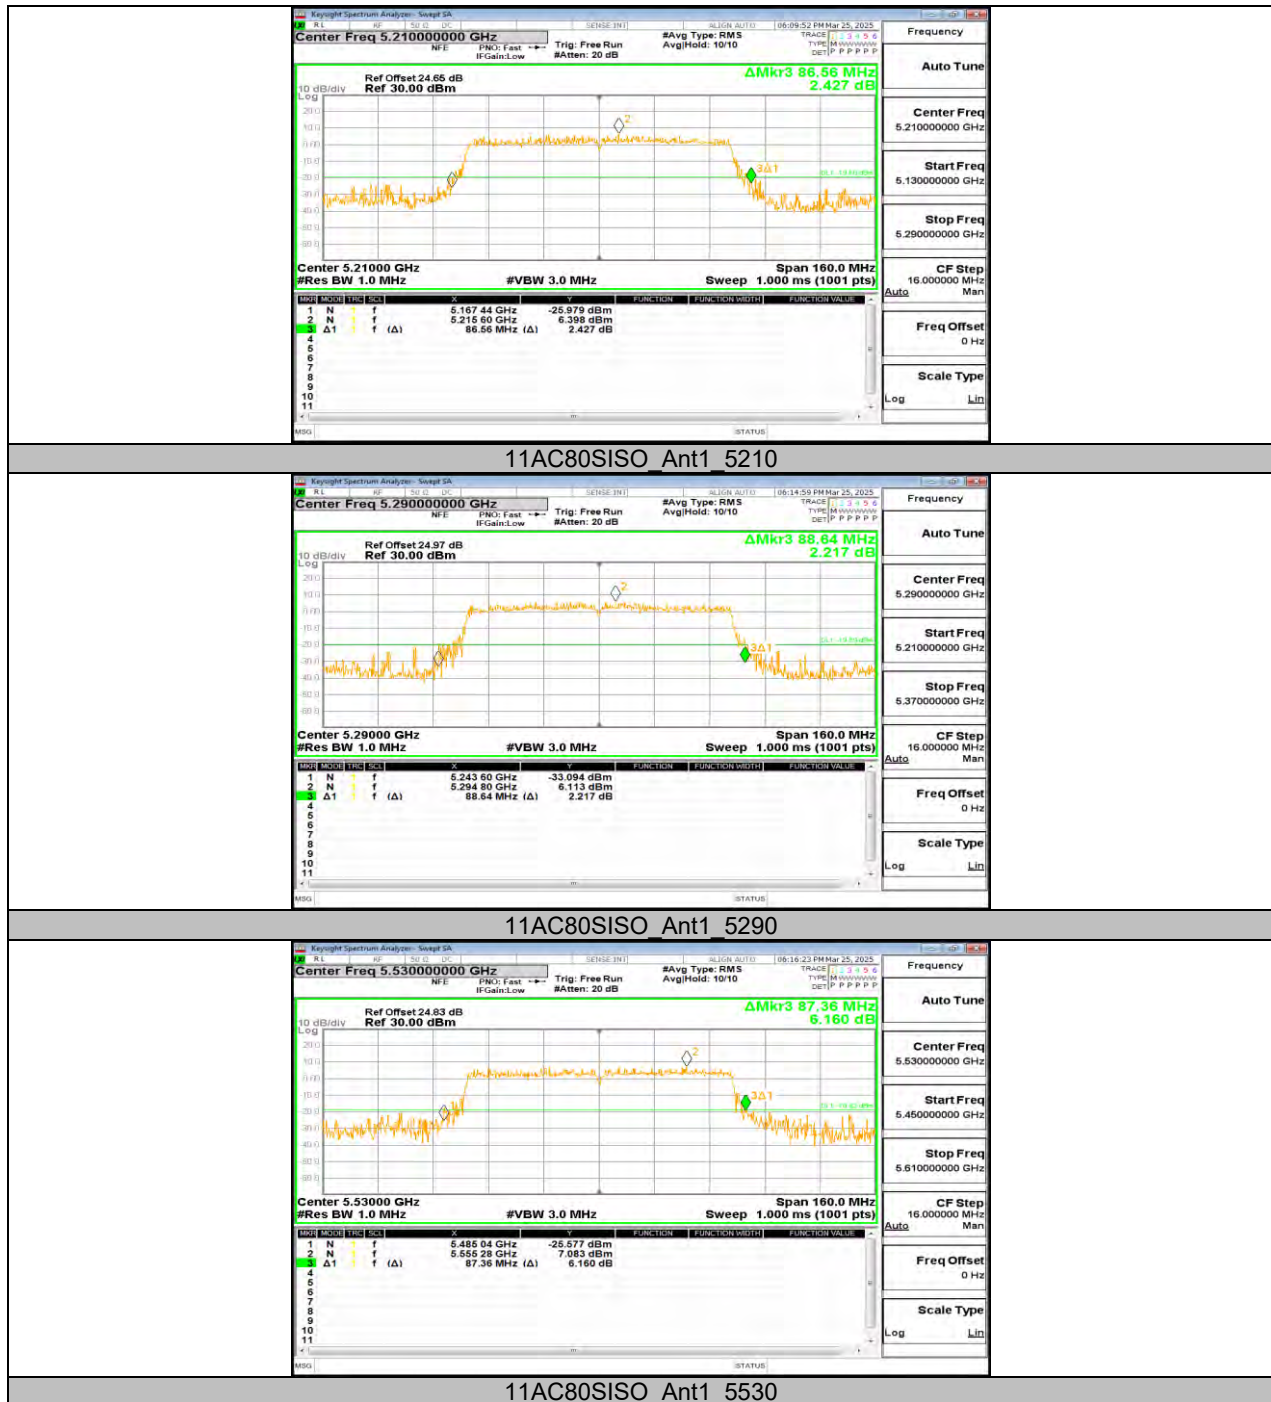






















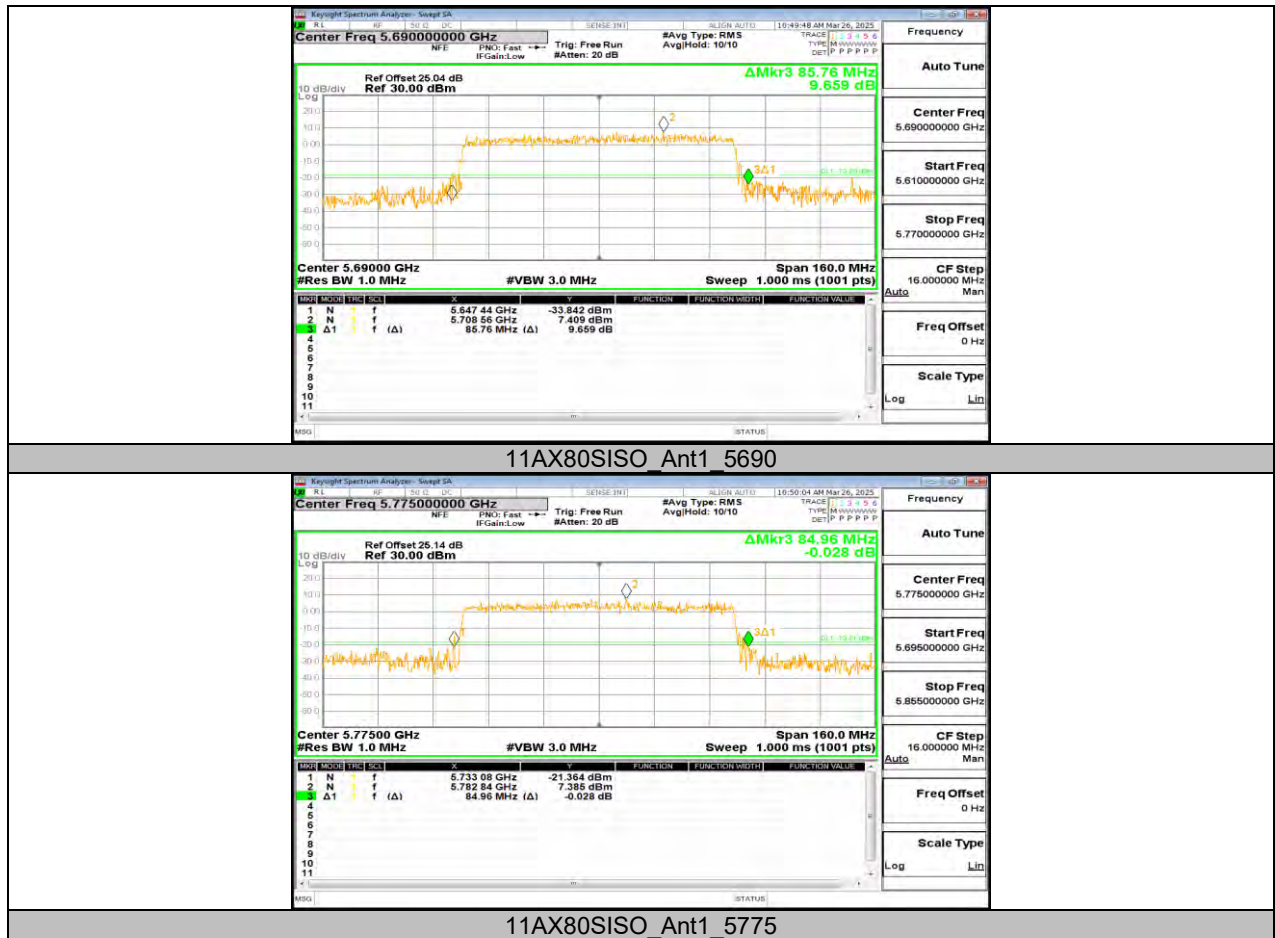

11.2. APPENDIX B: OCCUPIED CHANNEL BANDWIDTH

11.2.1. Test Result

Test Mode	Antenna	Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]
11A	Ant1	5180	16.968	5171.5159	5188.4839
		5200	16.967	5191.4693	5208.4363
		5240	16.939	5231.5353	5248.4743
		5260	16.856	5251.5789	5268.4349
		5280	16.909	5271.6494	5288.5584
		5320	17.060	5311.4961	5328.5561
		5500	17.030	5491.5699	5508.5999
		5580	17.205	5571.4417	5588.6467
		5700	17.312	5691.3897	5708.7017
		5720	17.036	5711.5200	5728.5560
		5720 UNII-2C	13.48	5711.5200	5725
		5720 UNII-3	3.556	5725	5728.5560
		5745	17.095	5736.4624	5753.5574
		5785	17.127	5776.4199	5793.5469
		5825	16.946	5816.5555	5833.5015
11N20SISO	Ant1	5180	18.050	5170.8830	5188.9330
		5200	18.178	5190.8402	5209.0182
		5240	18.114	5230.8851	5248.9991
		5260	18.052	5250.9746	5269.0266
		5280	18.139	5271.0339	5289.1729
		5320	18.259	5310.9356	5329.1946
		5500	18.412	5490.7634	5509.1754
		5580	18.274	5570.8531	5589.1271
		5700	18.322	5690.8483	5709.1703
		5720	18.385	5710.7511	5729.1361
		5720 UNII-2C	14.249	5710.7511	5725
		5720 UNII-3	4.136	5725	5729.1361
		5745	18.089	5735.9303	5754.0193
		5785	18.245	5775.8410	5794.0860
		5825	18.394	5815.7572	5834.1512
11N40SISO	Ant1	5190	36.766	5171.6361	5208.4021
		5230	36.622	5211.6727	5248.2947
		5270	36.439	5251.8171	5288.2561
		5310	36.562	5291.7701	5328.3321
		5510	36.759	5491.6768	5528.4358
		5550	36.652	5531.7348	5568.3868
		5670	36.673	5651.8293	5688.5023
		5710	36.827	5691.6656	5728.4926
		5710 UNII-2C	33.334	5691.6656	5725
		5710 UNII-3	3.493	5725	5728.4926
		5755	36.615	5736.7464	5773.3614
		5795	36.886	5776.5186	5813.4046
		5210	75.758	5172.2524	5248.0104
		5290	75.779	5252.2642	5328.0432
		5530	76.410	5492.1315	5568.5415
11AC80SISO	Ant1	5610	76.296	5572.1127	5648.4087
		5690	76.582	5651.9011	5728.4831
		5690 UNII-2C	73.099	5651.9011	5725
		5690 UNII-3	3.483	5725	5728.4831
		5775	76.446	5736.7451	5813.1911
		5180	19.096	5170.4018	5189.4978
		5200	19.103	5190.4520	5209.5550
11AX20SISO	Ant1	5240	19.093	5230.3931	5249.4861

		5260	19.169	5250.3326	5269.5016
		5280	19.089	5270.3987	5289.4877
		5320	19.017	5310.4992	5329.5162
		5500	19.167	5490.3859	5509.5529
		5580	19.257	5570.4157	5589.6727
		5700	19.209	5690.4133	5709.6223
		5720	19.344	5710.2954	5729.6394
		5720 UNII-2C	14.705	5710.2954	5725
		5720 UNII-3	4.639	5725	5729.6394
		5745	19.207	5735.4005	5754.6075
		5785	19.133	5775.4366	5794.5696
		5825	19.241	5815.3487	5834.5897
11AX40SISO	Ant1	5190	37.877	5171.1448	5209.0218
		5230	37.829	5211.1288	5248.9578
		5270	38.008	5251.0968	5289.1048
		5310	38.041	5291.0914	5329.1324
		5510	38.094	5491.0878	5529.1818
		5550	38.069	5531.0051	5569.0741
		5670	37.981	5651.1234	5689.1044
		5710	38.274	5690.9260	5729.2000
		5710 UNII-2C	34.074	5690.9260	5725
		5710 UNII-3	4.2	5725	5729.2000
		5755	38.220	5735.9612	5774.1812
		5795	38.308	5775.7707	5814.0787
11AX80SISO	Ant1	5210	77.132	5171.4930	5248.6250
		5290	77.576	5251.2567	5328.8327
		5530	77.615	5491.2391	5568.8541
		5610	77.920	5571.1156	5649.0356
		5690	77.685	5651.2361	5728.9211
		5690 UNII-2C	73.764	5651.2361	5725
		5690 UNII-3	3.921	5725	5728.9211
		5775	77.734	5735.9706	5813.7046

11.2.2. Test Graphs





