

FCC PART 15 SUBPART C TEST REPORT

for

Repeater

Model No.: G4RP-990

FCC ID: GX9G4RP

of

Applicant: **CLIMAX TECHNOLOGY CO., LTD.**

Address: **No. 258, Sinhu 2nd Rd., Neihu District 114**

Taipei City Taiwan (R.O.C.)

Tested and Prepared

by

Worldwide Testing Services (Taiwan) Co., Ltd.

FCC Registration No.: 930600

Industry Canada filed test laboratory Reg. No. IC 5679A-1, IC 5107A-1

A2LA Accredited No.: 2732.01




Report No.: W6M21512-15495-C-1

6F, NO. 58, LANE 188, RUEY-KUANG RD., NEIHU TAIPEI 114, TAIWAN, R.O.C.
TEL: 886-2-66068877 FAX: 886-2-66068879 E-mail: wts@wts-lab.com



TABLE OF CONTENTS

1	GENERAL INFORMATION	2
1.1	Notes	2
1.2	Testing laboratory	3
1.2.1	Location	3
1.2.2	Details of accreditation status	3
1.3	Details of approval holder	3
1.4	Application details	3
1.5	General information of Test item.....	4
1.6	Test standards.....	5
2	TECHNICAL TEST	6
2.1	Summary of test results.....	6
2.2	Test environment.....	6
2.3	Test Equipment List	7
2.4	General Test Procedure.....	9
3	TEST RESULTS (ENCLOSURE).....	11
3.1	Peak Output Power (transmitter).....	12
3.2	RF Exposure Compliance Requirements	15
3.3	Out of Band Radiated Emissions	16
3.4	Transmitter Radiated Emissions in restricted Bands	17
3.5	Spurious emissions (tx).....	18
3.6	Carrier Frequency Separation	20
3.7	Number of Hopping Frequencies	23
3.7.1	Pseudorandom Frequency Hopping Sequence	24
3.8	Time of Occupancy (Dwell Time).....	25
3.9	20dB Bandwidth	29
3.10	Band-edge Compliance of RF Emissions	32
3.11	Radiated Emissions from Receiver Section of Transceiver.....	35
3.12	Power Line Conducted Emission.....	37



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21512-15495-C-1
FCC ID: GX9G4RP

1 General Information

1.1 Notes

The purpose of conformity testing is to increase the probability of adherence to the essential requirements or conformity specifications, as appropriate.

The complexity of the technical specifications, however, means that full and thorough testing is impractical for both technical and economic reasons.

Furthermore, there is no guarantee that a test sample which has passed all the relevant tests conforms to a specification.

Neither is there any guarantee that such a test sample will interwork with other genuinely open systems.

The existence of the tests nevertheless provides the confidence that the test sample possesses the qualities as maintained and that its performance generally conforms to representative cases of communications equipment.

The test results of this test report relate exclusively to the item tested as specified in 1.5.

The test report may only be reproduced or published in full.

Reproduction or publication of extracts from the report requires the prior written approval of the Worldwide Testing Services(Taiwan) Co., Ltd.

Tester:

August 05, 2016

Leon Chueh

Date

WTS-Lab.

Name

Signature

Technical responsibility for area of testing:

August 05, 2016

Kevin Wang

Date

WTS

Name

Signature



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21512-15495-C-1
FCC ID: GX9G4RP

1.2 Testing laboratory

1.2.1 Location

OATS

No.5-1, Lishui, Shuang Sing Village,
Wanli Dist., New Taipei City 207,
Taiwan (R.O.C.)

3 meter semi-anechoic chamber

No.35, Aly. 21, Ln. 228, Ankang Rd., Neihu Dist., Taipei City 114, Taiwan (R.O.C.)

TEL:886-2-6613-0228

FAX:886-2-2791-5046

Company

Worldwide Testing Services(Taiwan) Co., Ltd.

6F, NO. 58, LANE 188, RUEY-KUANG RD.

NEIHU, TAIPEI 114, TAIWAN R.O.C.

Tel : 886-2-66068877

Fax : 886-2-66068879

1.2.2 Details of accreditation status

Accredited testing laboratory

A2LA accredited number: 2732.01

FCC filed test laboratory Reg. No. 930600

Industry Canada filed test laboratory Reg. No. IC 5679A-1, IC 5107A-1

Test location, where different from Worldwide Testing Services (Taiwan) Co., Ltd. :

Name: ./.

Accredited number: ./.

Street: ./.

Town: ./.

Country: ./.

Telephone: ./.

Fax: ./.

1.3 Details of approval holder

Name: CLIMAX TECHNOLOGY CO., LTD.

Street: No. 258, Sinhu 2nd Rd., Neihu District

Town: 114 Taipei City

Country: Taiwan (R.O.C.)

Telephone: +886-2-2794-0001

Fax: +886-2-2792-6618



Registration number: W6M21512-15495-C-1
FCC ID: GX9G4RP

1.4 Application details

Date of receipt of test item: December 24, 2015
Date of test: from December 25, 2015 to August 05, 2016

1.5 General information of Test item

Type of test item: Repeater
Model Number: G4RP-990
Brand Name: ./.
Multi-listing model number: ./.
Photos: see Appendix

Technical data

Frequency band: 906.32 MHz – 915.20 MHz
Frequency (ch A): 906.32 MHz
Frequency (ch B): 910.76 MHz
Frequency (ch C): 914.84 MHz

Transmitter

Unom

Power (ch A): Conducted: 5.59 dBm
Power (ch B): Conducted: 6.87 dBm
Power (ch C): Conducted: 6.19 dBm

Power supply: Adaptor: input: 100-240V~ 50/60Hz 0.5A
output: 12V 1A

Battery: 1.2 Vd.c.*6

Operation modes: Half-duplex

Modulation Type: FSK

Antenna Type: PCB antenna (RF1 & RF2)

Antenna gain: 1.8 dBi (RF1 & RF2)

Host device : none



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21512-15495-C-1
FCC ID: GX9G4RP

Classification :

Fixed Device	☐
Mobile Device (Human Body distance > 20cm)	☒
Portable Device (Human Body distance < 20cm)	☐

Manufacturer:
(if applicable)

Name : ./.
Street : ./.
Town : ./.
Country : ./.

1.6 Test standards

Technical standard : FCC RULES SUBPART C § 15.247 (2015-10)



Registration number: W6M21512-15495-C-1
FCC ID: GX9G4RP

2 Technical test

2.1 Summary of test results

No deviations from the technical specification(s) were ascertained in the course of the tests performed.



or

The deviations as specified in 3 were ascertained in the course of the tests performed.



2.2 Test environment

Temperature : 23 °C

Relative humidity content : 20 ... 75 %

Air pressure : 86 ... 103 kPa

Details of power supply : Adaptor: input: 100-240V~ 50/60Hz 0.5A
output: 12V 1A
Battery: 1.2 Vd.c.*6

Extreme conditions parameters : test voltage : -- extreme
min :-- V
max :-- V

Description of Tested System : ./.



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21512-15495-C-1

FCC ID: GX9G4RP

2.3 Test Equipment List

No.	Test equipment	Type	Serial No.	Manufacturer	Cal. Date	Next Cal. Date
ETSTW-CE 001	EMI TEST RECEIVER	ESHS10	842121/013	R&S	2016/5/20	2017/5/19
ETSTW-CE 003	AC POWER SOURCE	APS-9102	D161137	GW	Function Test	
ETSTW-CE 008	HF-EICHLITUNG RF STEP ATTENUATOR 139dB DPSP	334.6010.02	844581/024	R&S	Function Test	
ETSTW-CE 009	TEMP.&HUMIDITY CHAMBER	GTH-225-40-1P-U	MAA0305-009	GIANT FORCE	2016/7/12	2017/7/11
ETSTW-CE 016	TWO-LINE V-NETWORK	ENV216	100050	R&S	2015/9/7	2016/9/6
ETSTW-RE 003	EMI TEST RECEIVER	ESI 26	831438/001	R&S	2016/5/20	2017/5/19
ETSTW-RE 004	EMI TEST RECEIVER	ESI 40	832427/004	R&S	2016/5/25	2017/5/24
ETSTW-RE 005	EMI TEST RECEIVER	ESVS10	843207/020	R&S	2016/7/4	2017/7/3
ETSTW-RE 012	TUNABLE BANDREJECT FILTER	D.C 0309	146	K&L	Function Test	
ETSTW-RE 013	TUNABLE BANDREJECT FILTER	D.C 0336	397	K&L	Function Test	
ETSTW-RE 018	MICROWAVE HORN ANTENNA	AT4560	27212	AR	2016/6/24	2017/6/23
ETSTW-RE 027	Passive Loop Antenna	6512	00034563	ETS-Lindgren	2016/6/29	2017/6/28
ETSTW-RE 030	Double-Ridged Guide Horn Antenna	3117	00035224	ETS-Lindgren	2016/3/23	2017/3/22
ETSTW-RE 042	Biconical Antenna	HK116	100172	R&S	2016/1/25	2017/1/24
ETSTW-RE 043	Log-Periodic Dipole Antenna	HL223	100166	R&S	2016/3/28	2017/3/27
ETSTW-RE 044	Log-Periodic Antenna	HL050	100094	R&S	2016/4/14	2017/4/13
ETSTW-RE 045	ESA-E SERIES SPECTRUM ANALYZER	E4404B	MY45111242	Agilent	Pre-test Use	
ETSTW-RE 050	Attenuator 10dB	50HF-010-1	None	JFW	2016/2/25	2017/2/24
ETSTW-RE 051	Attenuator 6dB	50HF-006-1	None	JFW	2016/2/25	2017/2/24
ETSTW-RE 053	Attenuator 3dB	50HF-003-1	None	JFW	2016/2/25	2017/2/24
ETSTW-RE 055	SPECTRUM ANALYZER	FSU 26	200074	R&S	2016/2/27	2017/2/26
ETSTW-RE 060	Attenuator 30dB	5015-30	F651012z-01	ATM	2016/2/25	2017/2/24
ETSTW-RE 062	Amplifier Module	CHC 2	None	KMIC	2016/4/13	2017/4/12
ETSTW-RE 064	Bluetooth Test Set	MT8852B-042	6K00005709	Anritsu	Function Test	
ETSTW-RE 069	Double-Ridged Guide Horn Antenna	3117	00069377	ETS-Lindgren	Function Test	
ETSTW-RE 072	CELL SITE TEST SET	8921A	3339A00375	HP	2015/9/6	2016/9/5
ETSTW-RE 088	SOLID STATE AMPLIFIER	KMA180265A01	99057	KMIC	2015/9/21	2016/9/20
ETSTW-RE 099	DC Block	50DB-007-1	None	JFW	2016/2/25	2017/2/24
ETSTW-RE 112	AC POWER SOURCE	TFC-1005	T-0A023536	T-Power	Function test	
ETSTW-RE 115	2.4GHz Notch Filter	N0124411	473874	MICROWAVE CIRCUITS	2016/1/13	2017/1/12
ETSTW-RE 120	RF Player	MP9200	MP9210-111022	ADIVIC	Function test	
ETSTW-RE 122	SIGNAL GENERATOR	SMF100A	102149	R&S	2016/5/23	2017/5/22
ETSTW-RE 125	5GHz Notch filter	5NSL11-5200/E221.3-O/O	1	K&L Microwave	2015/8/11	2016/8/10



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21512-15495-C-1
FCC ID: GX9G4RP

ETSTW-RE 126	5GHz Notch filter	5NSL11-5800/E221.3-O/O	1	K&L Microwave	2015/8/11	2016/8/10
ETSTW-RE 127	RF Switch Box	RFS-01	None	WTS	2016/2/25	2017/2/24
ETSTW-RE 128	5.3GHz Notch filter	N0153001	SN487233	Microwave Circuits	2015/8/11	2016/8/10
ETSTW-RE 129	5.5GHz Notch filter	N0555984	SN487234	Microwave Circuits	2015/8/11	2016/8/10
ETSTW-RE 130	Handheld RF Spectrum Analyzer	N9340A	CN0147000204	Agilent	Pre-test Use	
ETSTW-RE 142	Amplifier	8447D	2805A03378	Agilent	2016/4/13	2017/4/12
ETSTW-RE 143	Humidity Temperature Meter	TES-1260	110104623	TES	2015/9/9	2016/9/8
ETSTW-RE 147	Bi-log Hybrid Antenna	MCTD 2786B	BLB16M04005	ETC	2016/3/31	2017/3/30
ETSTW-EMI 011	USB Compact Modulator	SFC-U	101689	R&S	2016/5/4	2017/5/3
ETSTW-GSM 002	Universal Radio Communication Tester	CMU 200	109439	R&S	2016/3/4	2017/3/3
ETSTW-GSM 003	Radio Communication Analyzer	MT8820C	6201342073	Anritsu	2016/2/3	2017/2/2
ETSTW-GSM 019	Band Reject Filter	WRCTF824/849-822/851-40 /12+9SS	3	WI	2016/1/13	2017/1/12
ETSTW-GSM 020	Band Reject Filter	WRCD1747/1748-1743/1752-32/5SS	1	WI	2016/1/13	2017/1/12
ETSTW-GSM 021	Band Reject Filter	WRCD1879.5/1880.5-1875.5/1884.5-32/5SS	3	WI	2016/1/13	2017/1/12
ETSTW-GSM 022	Band Reject Filter	WRCT901.9/903.1-904.25-50/8SS	1	WI	2016/1/13	2017/1/12
ETSTW-GSM 023	Power Divider	4901.19.A	None	SUHNER	2015/9/16	2016/9/15
ETSTW-Cable 010	BNC Cable	5 M BNC Cable	None	JYE BAO CO.,LTD.	2015/9/11	2016/9/10
ETSTW-Cable 011	BNC Cable	BNC Cable 1	None	JYE BAO CO.,LTD.	Pre-test Use NCR	
ETSTW-Cable 012	N TYPE To SMA Cable	Cable 012	None	JYE BAO CO.,LTD.	2015/9/11	2016/9/10
ETSTW-Cable 016	BNC Cable	Switch Box	B Cable 1	Schwarz beck	2016/2/24	2017/2/23
ETSTW-Cable 017	BNC Cable	X Cable	B Cable 2	Schwarz beck	2016/2/24	2017/2/23
ETSTW-Cable 018	BNC Cable	Y Cable	B Cable 3	Schwarz beck	2016/2/24	2017/2/23
ETSTW-Cable 019	BNC Cable	Z Cable	B Cable 4	Schwarz beck	2016/2/24	2017/2/23
ETSTW-Cable 020	N TYPE Cable	OATS Cable 1	N30N30-L335-15M	JYE BAO CO.,LTD.	2016/4/22	2017/4/21
ETSTW-Cable 022	N TYPE Cable	5006	0002	JYE BAO CO.,LTD.	2016/4/7	2017/4/6
ETSTW-Cable 026	Microwave Cable	SUCOFLEX 104	279075	HUBER+SUHNER	2016/2/25	2017/2/24
ETSTW-Cable 027	Microwave Cable	SUCOFLEX 104	279083	HUBER+SUHNER	2016/5/13	2017/5/12
ETSTW-Cable 028	Microwave Cable	FA147A0015M2020	30064-2	UTIFLEX	2015/9/21	2016/9/20
ETSTW-Cable 029	Microwave Cable	FA147A0015M2020	30064-3	UTIFLEX	2015/9/21	2016/9/20
ETSTW-Cable 030	Microwave Cable	SUCOFLEX 104 (S Cable 9)	279067	HUBER+SUHNER	2016/2/25	2017/2/24
ETSTW-Cable 031	Microwave Cable	SUCOFLEX 104 (S Cable 10)	238092	HUBER+SUHNER	2016/4/13	2017/4/12
ETSTW-Cable 043	Microwave Cable	SUCOFLEX 104	317576	HUBER+SUHNER	2016/4/13	2017/4/12
ETSTW-Cable 048	Microwave Cable	SUCOFLEX 104	325518	HUBER+SUHNER	2016/4/13	2017/4/12
ETSTW-Cable 058	Microwave Cable	SUCOFLEX 104	none	HUBER+SUHNER	2016/4/7	2017/4/6
ETSTW-Cable 064	Microwave Cable	SUCOFLEX 104	MY28891	HUBER+SUHNER	2016/4/13	2017/4/12
WTSTW-SW 002	EMI TEST SOFTWARE	EZ EMC	None	Farad	Version ETS-03A1	



Registration number: W6M21512-15495-C-1
FCC ID: GX9G4RP

2.4 General Test Procedure

POWER LINE CONDUCTED INTERFERENCE: The procedure used was ANSI STANDARD C63.10-2013 6.2 using a LISN (if necessary). Both lines were observed. The bandwidth of the spectrum analyzer was 10 kHz with an appropriate sweep speed.

RADIATION INTERFERENCE: The test procedure used was according to ANSI STANDARD C63.10-2013 6.3 employing a spectrum analyzer. For investigated frequency is equal to or below 1GHz, the RBW and VBW of the spectrum analyzer was 100 kHz and 100kHz respectively with an appropriate sweep speed. For investigated frequency is above 1GHz, both of RBW and VBW of the spectrum analyzer were 1 MHz with an appropriate sweep speed. The analyzer was calibrated in dB above a microvolt at the output of the antenna. The ambient temperature of the UUT was 23°C with a humidity of 40 %.

FORMULA OF CONVERSION FACTORS: The Field Strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dBμV) to the antenna correction factor supplied by the antenna manufacturer. The antenna correction factors are stated in terms of dB.

Example:

Freq (MHz)	METER READING + ACF + CABLE LOSS (to the receiver) = FS
33	20 dBμV + 10.36 dB + 6 dB = 36.36 dBμV/m @3m

The EUT was placed on a table 80 cm high and with dimensions of 1m by 1.5m (non metallic table) and arranged according to ANSI C63.10-2013 6.2.2. The table used for radiated measurements is capable of continuous rotation. The spectrum was scanned from 30 MHz to the frequency specified as follows:

- (1) If the intentional radiator operates below 10 GHz: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
- (2) If the intentional radiator operates at or above 10 GHz and below 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 100 GHz, whichever is lower.
- (3) If the intentional radiator operates at or above 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 200 GHz, whichever is lower, unless specified otherwise elsewhere in the rules.
- (4) If the intentional radiator contains a digital device, regardless of whether this digital device controls the functions of the intentional radiator or the digital device is used for additional control or function purposes other than to enable the operation of the intentional radiator, the frequency range shall be investigated up to the range specified in paragraphs (a)(1)-(a)(3) of this section or the range applicable to the digital device, as shown in paragraph (b)(1) of this Section, whichever is the higher frequency range of investigation.

For hand-held devices, a exploratory test was performed with three (3) orthogonal planes to determine the highest emissions.

Measurements were made by Worldwide Testing Services(Taiwan) Co., Ltd. at the registered open field test site located No.5-1, Lishui, Shuang Sing Village, Wanli Dist., New Taipei City 207, Taiwan (R.O.C.). The Registration Number: **930600**.



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21512-15495-C-1

FCC ID: GX9G4RP

When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes.

When the radiated emission limits are expressed in terms of the average value of the emission, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.

The formula is as follows:


Average = Peak + Duty Factor

Duty Factor = $20 \log (\text{dwell time}/T)$

T = 100ms when the pulse train period is over 100 ms or the period of the pulse train.

Modified Limits for peak according to 15.35 (b) = Max Permitted average Limits + 20dB

ANSI STANDARD C63.10-2013 B.2.7: Any measurements that utilize special test software shall be indicated and referenced in the test report. During testing, test software 'EZ EMC' was used for setting up different operation modes.



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21512-15495-C-1
FCC ID: GX9G4RP

3 Test results (enclosure)

TEST CASE	Para. Number	Required	Test passed	Test failed
Peak Output Power	15.247(b)	☒	☒	☐
Equivalent isotropically radiated Power	15.247(b)	☒	☒	☐
Spurious Emissions radiated – Transmitter operating	15.247(c)	☒	☒	☐
Spurious Emissions conducted – Transmitter operating	15.247	☐	☐	☐
Carrier Frequency Separation	15.247(a) (1)	☒	☒	☐
Number of Hopping Frequencies	15.247(a) (1)(i)	☒	☒	☐
Time of Occupancy (Dwell Time)	15.247(a) (1)(i)	☒	☒	☐
20 dB Bandwidth	15.247(a) (1)(i)	☒	☒	☐
Band-edge Compliance of RF Emission	15.247(c)	☒	☒	☐
Radiated Emission from Receiver L.O.	15.109	☐	☐	☐
Power Line Conducted Emission	15.207(a)	☒	☒	☐




Registration number: W6M21512-15495-C-1
FCC ID: GX9G4RP

3.1 Peak Output Power (transmitter)

FCC Rule: 15.247

This measurement applies to equipment with an integral antenna and to equipment with an antenna connector and equipped with an antenna as declared by the applicant.

The power was measured with modulation (declared by the applicant).

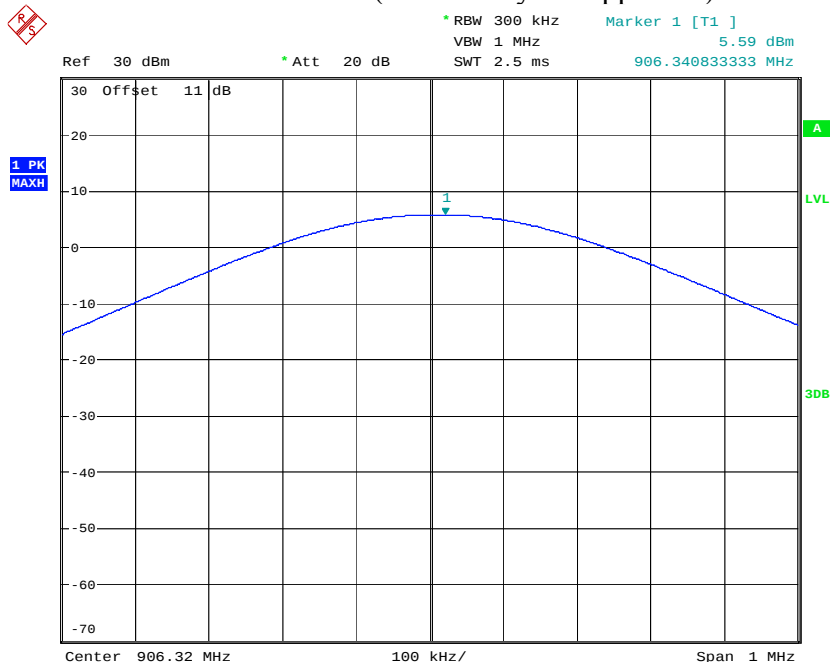


MAX OUTPUT POWER 906.32MHz
Date: 4.AUG.2016 14:04:29




Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21512-15495-C-1
FCC ID: GX9G4RP

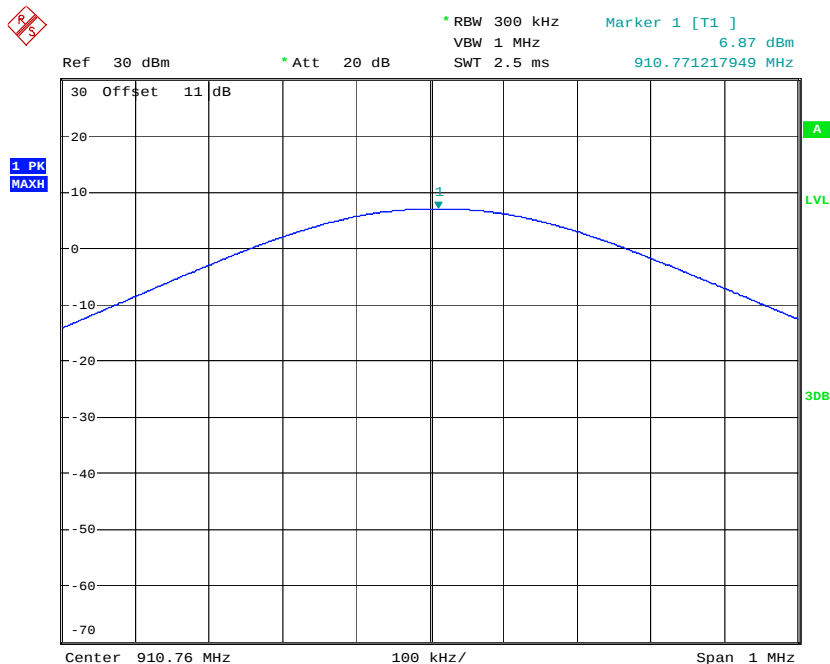

MAX OUTPUT POWER 910.76MHz
Date: 4.AUG.2016 14:04:51

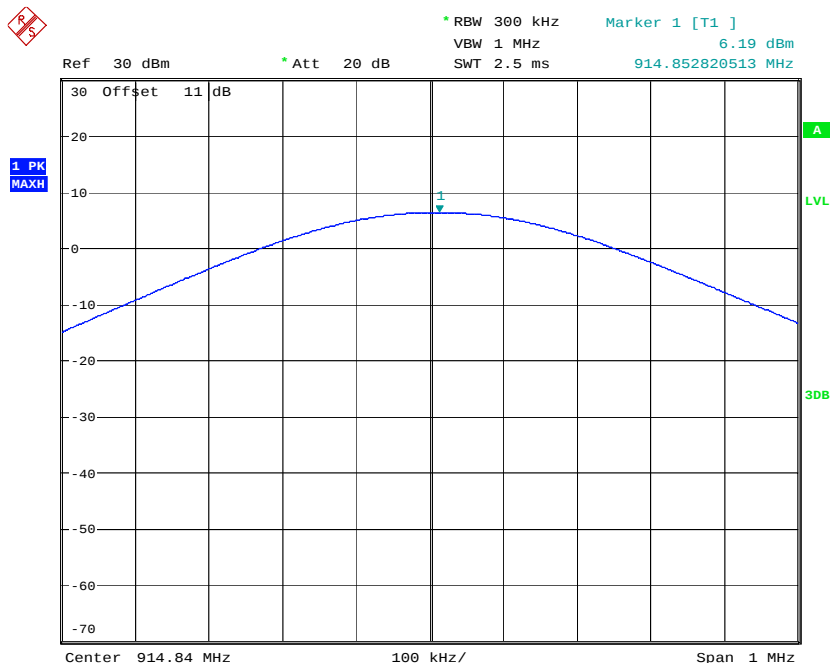

MAX OUTPUT POWER 914.84MHz
Date: 4.AUG.2016 14:05:16



Registration number: W6M21512-15495-C-1
FCC ID: GX9G4RP

Test conditions $T_{nom} = \text{--}^{\circ}\text{C}$, $V_{nom} = \text{-- V}$ Frequency[MHz]	Signal Field strength TX highest power mode dB μ V/m
--	--
Measurement uncertainty	$<\pm 2.05 \text{ dB}$


Maximum Peak Output Power

Limits:

Frequency MHz	Number of hopping channels			
	≥ 75	≥ 50	$49 \geq 25$	$74 \geq 15$
902-928		30 dBm	24 dBm	
2400-2483.5 MHz	30 dBm	-		21 dbm
5725-5850 MHz	30 dBm	-		

In case of employing transmitter antennas having antenna gain >dBi and using fixed poin-to point operation consider §15.247 (b)(4).

Test equipment used: ETSTW-RE 055, ETSTW-RE 064



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21512-15495-C-1

FCC ID: GX9G4RP

3.2 RF Exposure Compliance Requirements

FCC Rule: 15.247(b)(3)

Test exclusion = max. conducted output power + adjusted for tune-up tolerance

Test exclusion = 6.87 dBm

Test equipment used: ETSTW-RE 055

RF Exposure Compliance Requirements

FCC OET Bulletin 65 Edition 97.01 determines the equations for predicting RF fields and applicable limits.

The prediction for power density in the far-field but will over-predict power density in the near field, where it could be used for walking a “worst case” or conservative prediction.

$$S = \frac{PG}{4\pi R^2}$$

S – Power Density

P – Output power ERP

R – Distance


D – Cable Loss

AG – Antenna Gain

Item	Unit	Value	Remarks
P	mW	4.8641	Peak value
D	dB		
AG	dBi	1.8	
G		1.5136	Calculated Value
R	cm	20	Assumed value
S	mW/cm ²	0.0015	Calculated value

Limits:

Limit for General Population / Uncontrolled Exposure	
Frequency (MHz)	Power Density (mW/cm ²)
1500 – 100.000	1.0



Registration number: W6M21512-15495-C-1
FCC ID: GX9G4RP

3.3 Out of Band Radiated Emissions

FCC Rule: 15.247(c) , 15.35

For out of band emissions that are close to or that exceed the 20 dB attenuation requirement described in the specification, radiated measurements were performed at a 3 m separation distance to determine whether these emissions complied with the general radiated emission requirement.

Limits:

For frequencies below 1GHz :

Max. reading – 20 dB

Guidance on Measurement of FHSS Systems:

“If the emission is pulsed, modify the unit for continuous operation , use the settings shown above, then correct the reading by subtracting the peak-average correction factor, derived from the appropriate duty cycle calculation.” Here the correction was added to the limit instead subtracted from the reading.

Duty Cycle correction = $20 \log (\text{dwell time}/100\text{ms})$

For frequencies above 1GHz (Peak measurements).

Limit = max. aver. reading-20dB +20dB(because Peak detector is used)

For frequencies above 1GHz (Average measurements).

Max. reading – 20 dB - duty cycle correction:

No duty cycle correction was added to the reading

Test equipment used: ETSTW-RE 003, ETSTW-RE 004, ETSTW-RE 030, ETSTW-RE 042,
ETSTW-RE 043, ETSTW-RE 044, ETSTW-RE 064



Registration number: W6M21512-15495-C-1
FCC ID: GX9G4RP

3.4 Transmitter Radiated Emissions in restricted Bands

FCC Rules: 15.247 (c), 15.205, 15.209, 15.35

Radiated emission measurements were performed from 30 MHz to 26000 MHz.

For radiated emission tests, the analyzer setting was as followings:

RES BW VID BW

Frequency <1 GHz 100 kHz 100 kHz (Peak measurements)

Frequency >1 GHz 1 MHz 1 MHz (Peak measurements)

1 MHz 1 MHz (Average measurements)

Limits:

For frequencies below 1GHz :

Frequency of Emission (MHz)	Field strength (microvolts/meter)	Field Strength (dB microvolts/meter)
30 – 88	100	40.0
88 – 216	150	43.5
216 – 960	200	46.0
Above 960	500	54.0

For frequencies above 1GHz (Average measurements).

Guidance on Measurement of FHSS Systems:

“If the emission is pulsed, modify the unit for continues operation , use the settings shown above, then correct the reading by subtracting the peak-average correction factor, derived from the appropriate duty cycle calculation.” Here the correction was added to the limit instead subtracted from the reading.

Duty cycle correction = $20 \log (\text{dwell time}/100\text{ms})$

For frequencies above 1GHz (Average measurements).

Limit – duty cycle correction

No duty cycle correction was added to the reading.

54.0dB μ V/m


For frequencies above 1GHz (Peak measurements).

Limit + 20dB

54.0dB μ V/m + 20 dB= 74 dB μ V/m

Note: See attached diagrams.

Test equipment used: ETSTW-RE 004, ETSTW-RE 030, ETSTW-RE 042,
ETSTW-RE 043, ETSTW-RE 044, ETSTW-RE 064



Registration number: W6M21512-15495-C-1
FCC ID: GX9G4RP

3.5 Spurious emissions (tx)

Spurious emission was measured with modulation (declared by manufacturer).

In any 100 kHz bandwidth outside the frequency band in which the intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c))

SAMPLE CALCULATION OF LIMIT. All results will be updated by an automatic measuring system in accordance to point 2.3.

Calculation of test results:

Such factors like antenna correction, cable loss, external attenuation etc. are already included in the provided measurement results. This is done by using validated test software and calibrated test system according the accreditation requirements.

The peak and average spurious emission plots was measured with the average limits.

In the Table being listed the critical peak and average value an exhibit the compliance with the above calculated Limits.

If in the column's correction factor states a value then the max. Field strength in the same row is corrected by a value gained from the "Marker-Delta-Method" or the „Duty-Cycle Correction Factor“.

Model: G4RP-990

Date: --

Mode: --


Temperature: -- °C Engineer: --

Polarization: Horizontal

Humidity: -- %

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--

Frequency (MHz)	Reading (dBuV)		Factor (dB)	Result @3m (dBuV/m)		Limit @3m (dBuV/m)		Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
	Peak	Ave.	Corr.	Peak	Ave.	Peak	Ave.			
--	--	--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--	--	--



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21512-15495-C-1
FCC ID: GX9G4RP

Polarization: Vertical

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--

Frequency (MHz)	Reading (dBuV)		Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)		Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
	Peak	Ave.		Peak	Ave.	Peak	Ave.			
--	--	--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--	--	--

- Note**
1. **Correction Factor = Antenna factor + Cable loss - Preamplifier**
 2. **The formula of measured value as: Test Result = Reading + Correction Factor**
 3. **Detector function in the form : PK = Peak, QP = Quasi Peak, AV = Average**
 4. **All not in the table noted test results are more than 20 dB below the relevant limits.**
 5. **Measurement uncertainty above 1GHz: 30-1000 MHz = ± 3.9 dB, 1-18 GHz = ± 4.78 dB, 18-40 GHz = ± 2.44 dB ; Reported uncertainties represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor of k = 2.**
 6. **Up Line: PK Limit Line, Down Line: Ave Limit Line.**
 7. **Please See attached diagrams as appendix.**

All other not noted test plots do not contain significant test results in relation to the limits.

TEST RESULT (Transmitter): The unit DOES meet the FCC requirements.

Test equipment used: ETSTW-RE 004, ETSTW-RE 030, ETSTW-RE 042,
ETSTW-RE 043, ETSTW-RE 044, ETSTW-RE 064




Registration number: W6M21512-15495-C-1
FCC ID: GX9G4RP

3.6 Carrier Frequency Separation

Carrier Frequency Separation was measured with modulation (declared by manufacturer).

According to FCC rules part 15 subpart C §15.247 frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or 20 dB bandwidth of the hopping channel, whichever is greater.

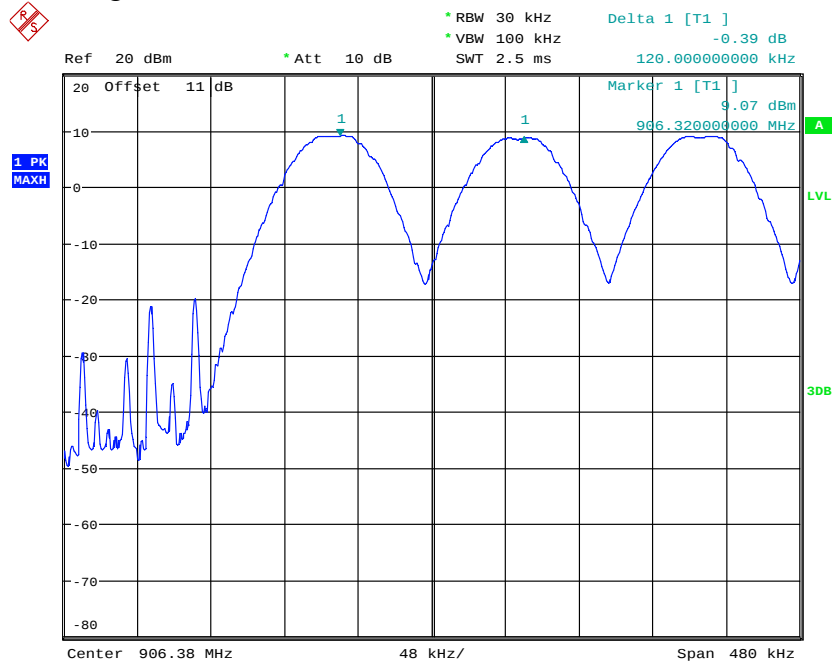


FREQUENCY SEPARATION 906.32MHz

Date: 14.JUL.2016 14:40:37




Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21512-15495-C-1
FCC ID: GX9G4RP

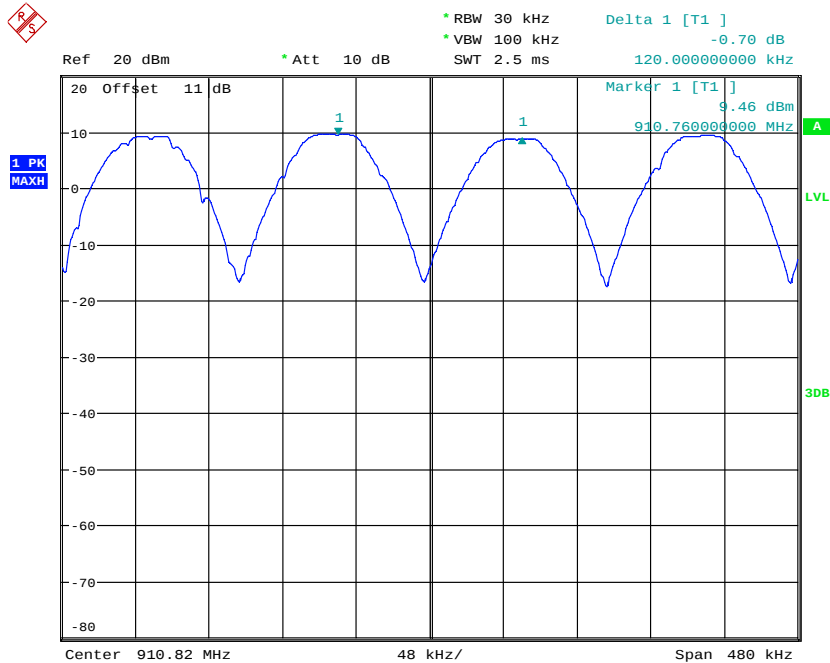

FREQUENCY SEPARATION 910.76MHz
Date: 14.JUL.2016 14:42:47

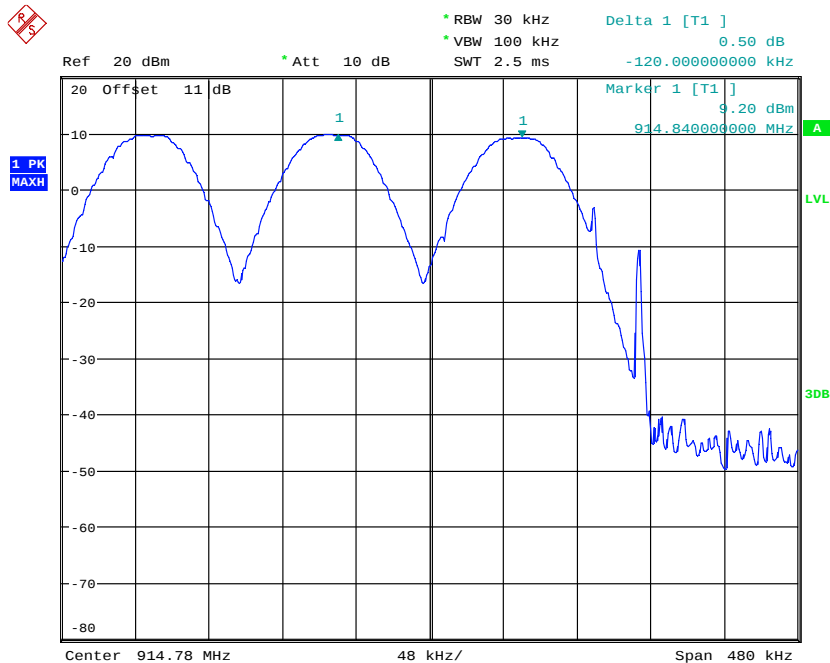

FREQUENCY SEPARATION 914.84MHz
Date: 14.JUL.2016 14:45:51



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21512-15495-C-1
FCC ID: GX9G4RP

Limits:

Frequency Range MHz	Limits	
	20 dB bandwidth < 25 kHz	20 dB bandwidth > 25 kHz
902-928	25 kHz	20 dB bandwidth
2400-2483.5 5725-5850.0	25 kHz	20 dB bandwidth

Test equipment used: ETSTW-RE 055, ETSTW-RE 064




Registration number: W6M21512-15495-C-1
FCC ID: GX9G4RP

3.7 Number of Hopping Frequencies

According to FCC rules part 15 subpart C §15.247 frequency hopping systems operating in the 2400-2483.5 MHz band shall use at least 15 hopping frequencies. Frequency hopping systems in 5725-5850 MHz bands shall use least 75 hopping frequencies.

For frequency hopping systems operating in the 902-928 MHz band: if the 20dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies; if the 20dB bandwidth of the hopping channel 250 kHz or greater, the system shall use at least 25 hopping frequencies.

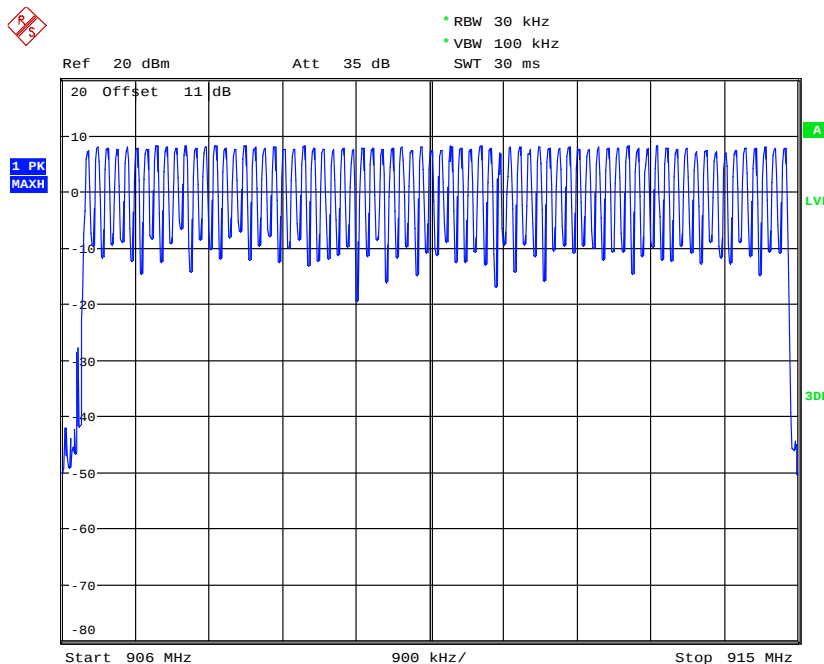

NUMBER OF HOPPING
Date: 14.JUL.2016 14:17:25

Limits:

Frequency Range MHz	Limit	
	20dB Bandwidth	Number of Channels
902-928 MHz	Bandwidth < 250 kHz	≥ 50
	Bandwidth ≥ 250 kHz	≥ 25
2400-2483.5	not defined	15
5725-5850.0 MHz	1 MHz	75

Test equipment used: ETSTW-RE 055, ETSTW-RE 064



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21512-15495-C-1
FCC ID: GX9G4RP

3.7.1 Pseudorandom Frequency Hopping Sequence

This FHSS transmitter is controlled by a microchip to generate the Pseudorandom Frequency Hopping Sequence. There are three hopping sequences listed below:

Channel Group					Group1		Group2		Group3	
No. of channel					Frequency	Data (hex)	Frequency	Data (hex)	Frequency	Data (hex)
24	18	12	6							
1	1	1	1		906.32	71 4A 3D	906.44	71 4E 14	906.56	71 51 EB
2	2				906.68	71 55 C2	906.80	71 59 99	906.92	71 5D 70
3	3	2			907.04	71 61 47	907.16	71 65 1E	907.28	71 68 F6
4					907.40	71 6C CD	907.52	71 70 A4	907.64	71 74 7B
5	4	3	2		907.76	71 78 52	907.88	71 7C 29	908.00	71 80 00
6	5				908.12	71 83 D7	908.24	71 87 AE	908.36	71 8B 85
7	6	4			908.48	71 8F 5C	908.60	71 93 33	908.72	71 97 0A
8					908.84	71 9A E1	908.96	71 9E B8	909.08	71 A2 8F
9	7	5	3		909.20	71 A6 66	909.32	71 AA 3D	909.44	71 AE 14
10	8				909.56	71 B1 EB	909.68	71 B5 C2	909.80	71 B9 99
11	9	6			909.92	71 BD 70	910.04	71 C1 47	910.16	71 C5 1E
12					910.28	71 C8 F6	910.40	71 CC CD	910.52	71 D0 A4
13	10	7	4		910.64	71 D4 7B	910.76	71 D8 52	910.88	71 DC 29
14	11				911.00	71 E0 00	911.12	71 E3 D7	911.24	71 E7 AE
15	12	8			911.36	71 EB 85	911.48	71 EF 5C	911.60	71 F3 33
16					911.72	71 F7 0A	911.84	71 FA E1	911.96	71 FE B8
17	13	9	5		912.08	72 02 8F	912.20	72 06 66	912.32	72 0A 3D
18	14				912.44	72 0E 14	912.56	72 11 EB	912.68	72 15 C2
19	15	10			912.80	72 19 99	912.92	72 1D 70	913.04	72 21 47
20					913.16	72 25 1E	913.28	72 28 F6	913.40	72 2C CD
21	16	11	6		913.52	72 30 A4	913.64	72 34 7B	913.76	72 38 52
22	17				913.88	72 3C 29	914.00	72 40 00	914.12	72 43 D7
23	18	12			914.24	72 47 AE	914.36	72 4B 85	914.48	72 4F 5C
24					914.60	72 53 33	914.72	72 57 0A	914.84	72 5A E1
					914.96	72 5E B8	915.08	72 62 8F	915.20	72 66 66




Registration number: W6M21512-15495-C-1
FCC ID: GX9G4RP

3.8 Time of Occupancy (Dwell Time)

Frequency hopping systems operating in the 5725-5850 MHz band shall use an average time of occupancy on any frequency not greater than 0.4 seconds within a 30 second period.

In 2400-2483.5 MHz band the average time of occupancy on any channel shall not be greater than 0.4 seconds multiplied by the number of hopping channels employed.

For frequency hopping systems operating in the 902-928 MHz band: if the 20dB bandwidth of the hopping channel is less than 250 kHz, the average time of occupancy on any frequency shall not greater than 0.4 seconds within a 20 second period; if the 20dB bandwidth of the hopping channel is 250 kHz or greater, the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period.

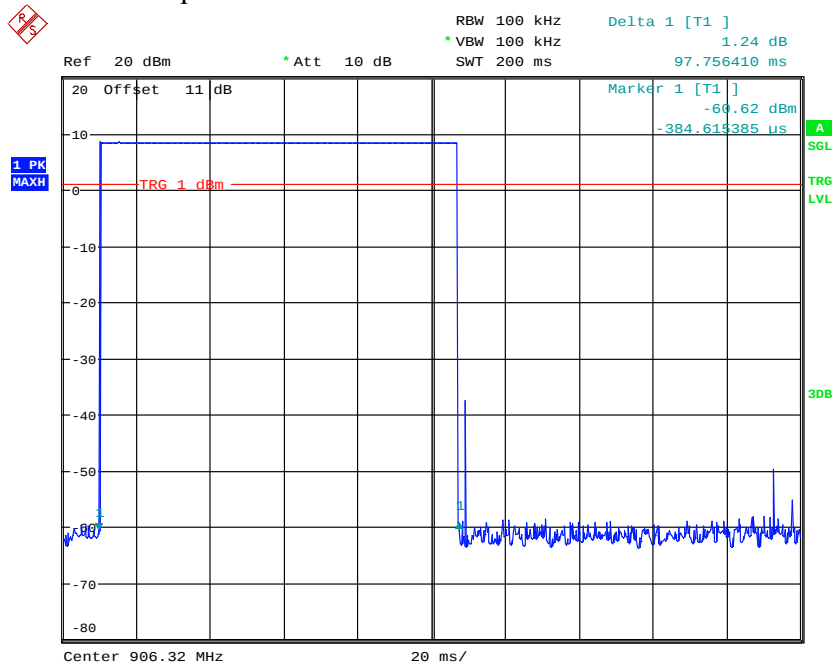


DWELL TIME 906.32MHz(97.756ms * 2events = 195.512ms)

Date: 14.JUL.2016 15:30:10




Registration number: W6M21512-15495-C-1
FCC ID: GX9G4RP

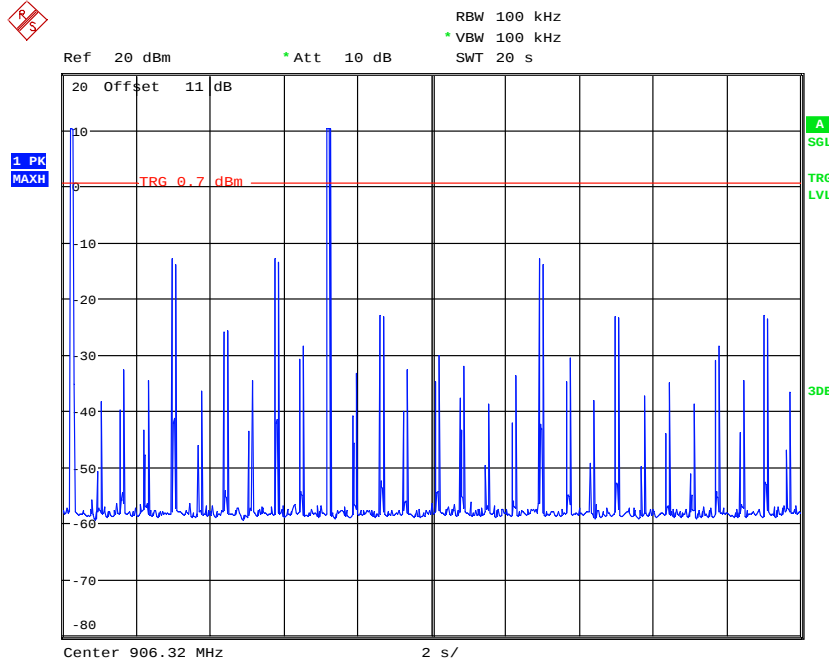

DWELL TIME 906.32MHz

Date: 14.JUL.2016 15:20:02

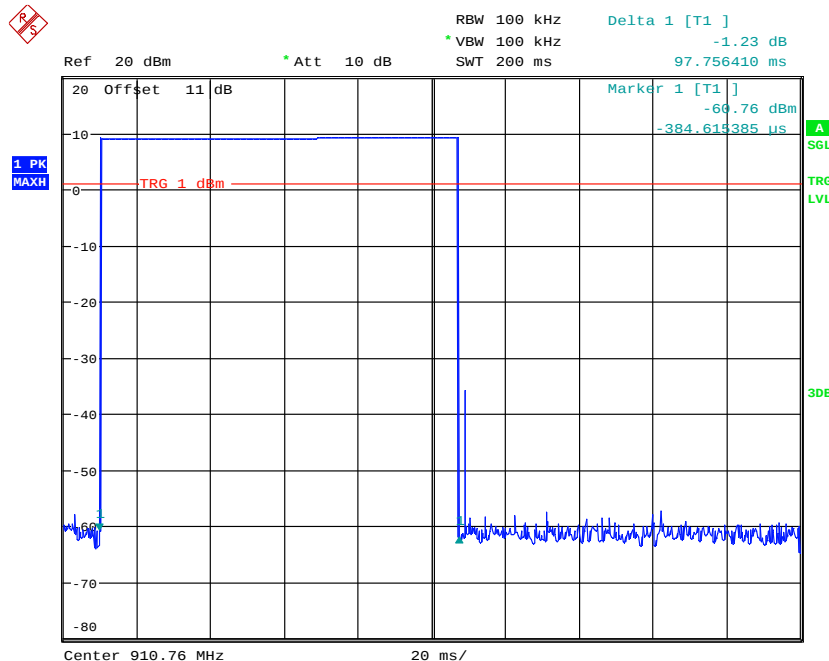


DWELL TIME 910.76MHz(97.756ms * 2events = 195.512ms)

Date: 14.JUL.2016 15:29:22




Registration number: W6M21512-15495-C-1
FCC ID: GX9G4RP

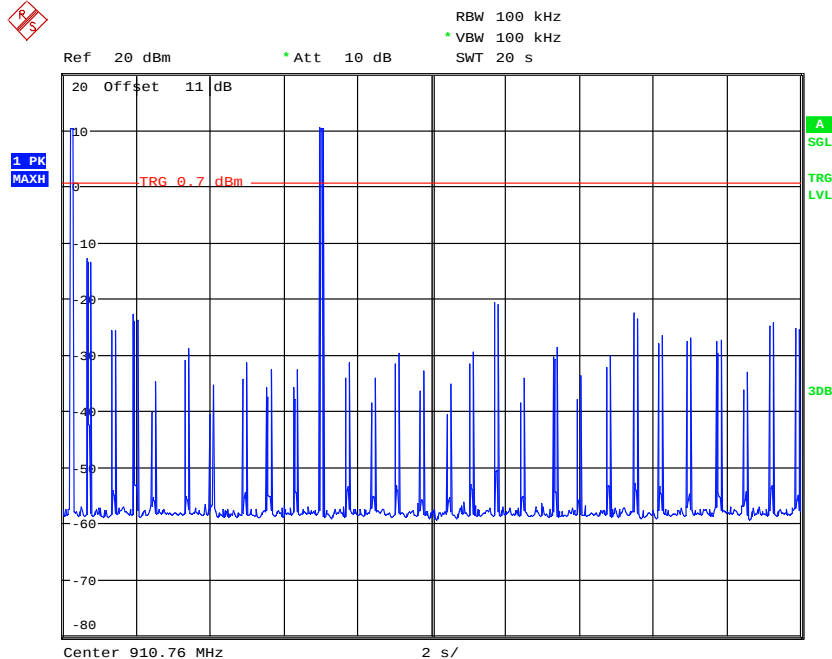

DWELL TIME 910.76MHz

Date: 14.JUL.2016 15:21:42

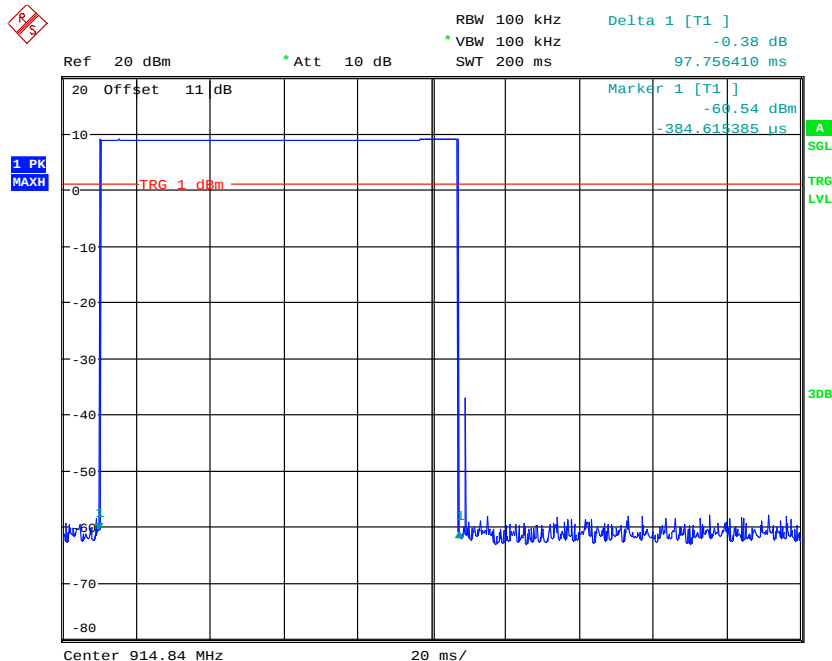


DWELL TIME 914.84MHz(97.756ms * 2events = 195.512ms)

Date: 14.JUL.2016 15:28:20



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21512-15495-C-1
FCC ID: GX9G4RP

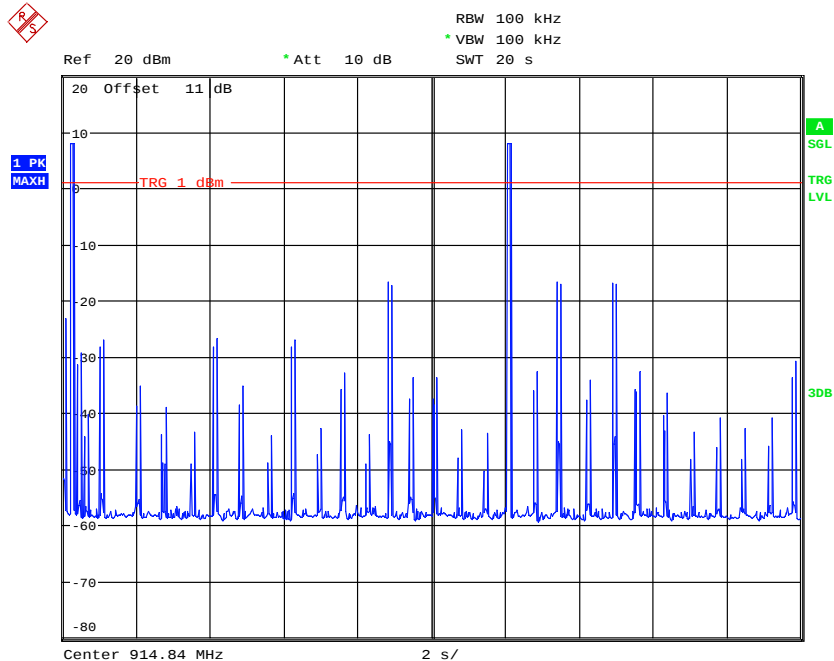

DWELL TIME 914.84MHz
Date: 14.JUL.2016 15:24:59

Limits and measurement periods:

Frequency MHz	Number of channels	Measurement Period	Limit
902 – 928	≥ 50	20 s	0.4 s
	$49 \geq 25$	10 s	0.4 s
2400 – 2483.5	≥ 15	0.4 s * number of used channels	0.4 s
5725- 5850	≥ 75	30 s	0.4s

Test equipment used: ETSTW-RE 055, ETSTW-RE 064




Registration number: W6M21512-15495-C-1
FCC ID: GX9G4RP

3.9 20dB Bandwidth

Frequency hopping systems operating in the 5725-5850 MHz bands shall use a maximum 20dB bandwidth of 1 MHz.

The 20dB bandwidth is measured on the lowest, middle and highest hopping channel.

For frequency hopping systems operating in the 902-928 MHz band the maximum 20dB bandwidth of the hopping channel is 500 kHz.

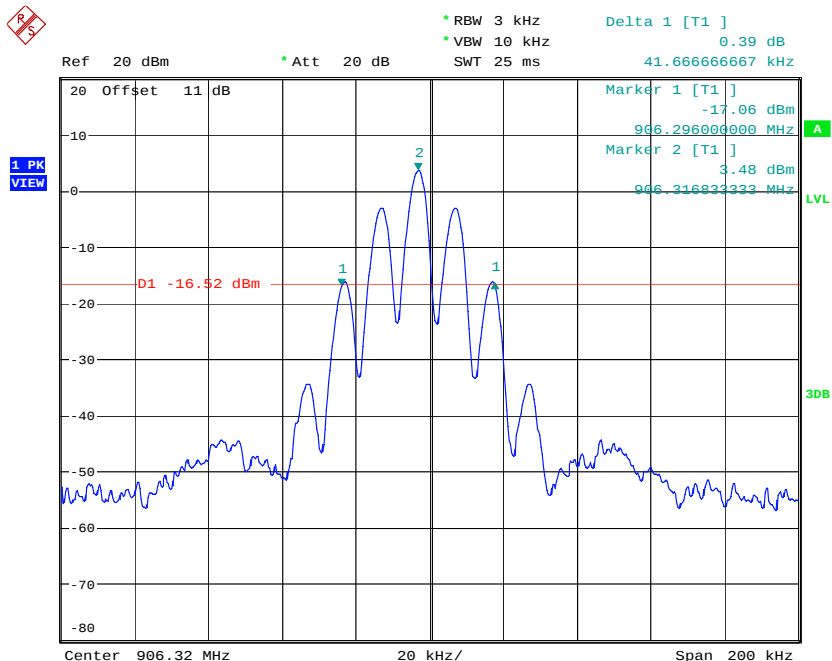


20DB BANDWIDTH 906.32MHz
Date: 4.AUG.2016 14:15:32




Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21512-15495-C-1
FCC ID: GX9G4RP

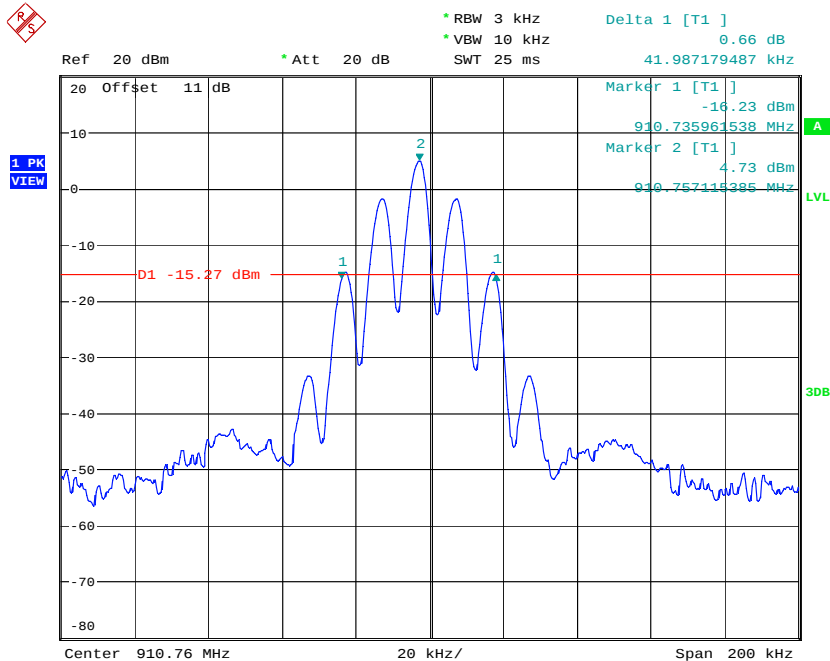

20DB BANDWIDTH 910.76MHz
Date: 4.AUG.2016 14:14:04

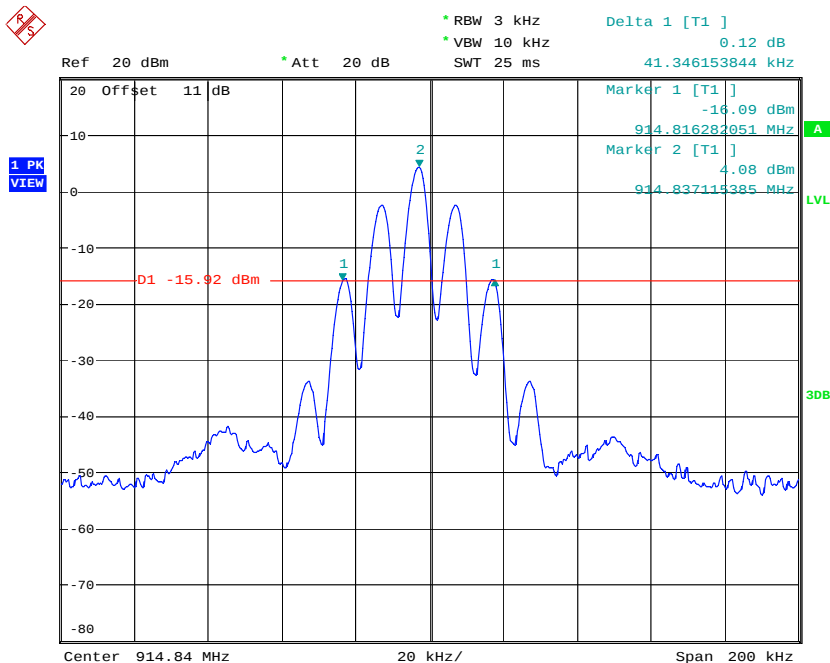

20DB BANDWIDTH 914.84MHz
Date: 4.AUG.2016 14:13:06



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21512-15495-C-1
FCC ID: GX9G4RP

Limits:

Frequency Range / MHz	Limit
902-928	≤ 500 kHz
2400-2483.5	not defined
5725-5850	≤ 1 MHz

Test equipment used: ETSTW-RE 055, ETSTW-RE 064




Registration number: W6M21512-15495-C-1
FCC ID: GX9G4RP



3.10 Band-edge Compliance of RF Emissions

According to FCC rules part 15 subpart C §15.247(c) in any 100 kHz bandwidth outside the frequency band in which the intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in § 15.209(a) is not required.

In addition radiated emission which fall in the restricted bands, as defined in section 15.205(a), must also with the radiated emission limits.

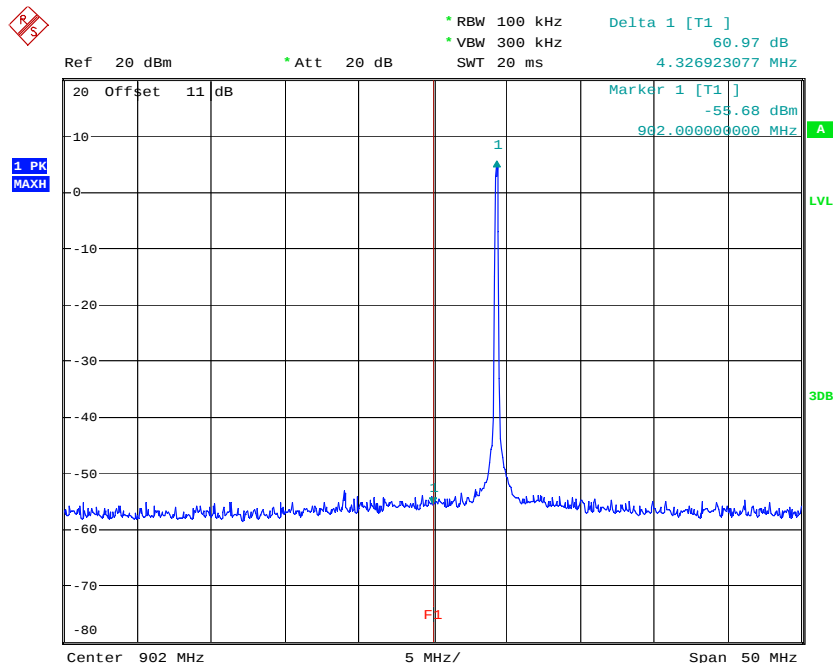


BANDEDGE 906.32MHz
Date: 4.AUG.2016 14:07:16





Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21512-15495-C-1
FCC ID: GX9G4RP

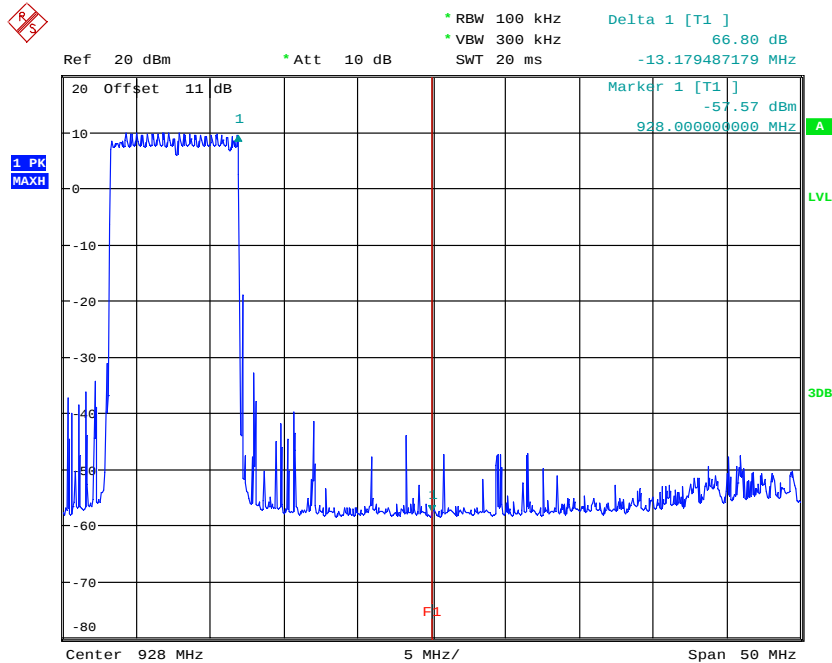


BANDEDGE HOPPING MODE 914.84MHz
Date: 14.JUL.2016 14:31:38

Limits:

Frequency Range / MHz	Limit
902 – 928	- 20 dB
2400 – 2483.5	
5725 - 5850	

Test equipment used: ETSTW-RE 055, ETSTW-RE 064



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21512-15495-C-1
FCC ID: GX9G4RP

3.11 Radiated Emissions from Receiver Section of Transceiver

FCC Rule: 15.109

Model: G4RP-990 Date: --
Mode: -- Temperature: -- °C Engineer: --
Polarization: Horizontal Humidity: -- %

Frequency (MHz)	Reading (dBUV)	Detector	Factor (dB)	Result (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--

Frequency (MHz)	Reading (dBUV)		Factor (dB) Corr.	Result @3m (dBUV/m)		Limit @3m (dBUV/m)		Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
	Peak	Ave.		Peak	Ave.	Peak	Ave.			
--	--	--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--	--	--

Polarization: Vertical

Frequency (MHz)	Reading (dBUV)	Detector	Factor (dB)	Result (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--

Frequency (MHz)	Reading (dBUV)		Factor (dB) Corr.	Result @3m (dBUV/m)		Limit @3m (dBUV/m)		Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
	Peak	Ave.		Peak	Ave.	Peak	Ave.			
--	--	--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--	--	--

- Note**
1. Correction Factor = Antenna factor + Cable loss - Preamplifier
 2. The formula of measured value as: Test Result = Reading + Correction Factor
 3. Detector function in the form : PK = Peak, QP = Quasi Peak, AV = Average
 4. All not in the table noted test results are more than 20 dB below the relevant limits.
 5. Measurement uncertainty above 1GHz: 30-1000 MHz = ± 4.69 dB, 1-18 GHz = ± 4.78 dB, 18-40 GHz = ± 2.44 dB ; Reported uncertainties represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor of k = 2.
 6. Up Line: QP Limit Line, Down Line: Ave Limit Line.
 7. Please refer to separated test report no.: W6M21512-15495-P-15B.




Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21512-15495-C-1
FCC ID: GX9G4RP

Except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency of Emission (MHz)	Field Strength (microvolts/meter)	Field Strength (dBmicrovolts/meter)
30 – 88	100	40.0
88 – 216	150	43.5
216 – 960	200	46.0
Above 960	500	54.0

Test equipment used: ETSTW-RE 004, ETSTW-RE 030, ETSTW-RE 042,
ETSTW-RE 043, ETSTW-RE 044, ETSTW-RE 064



Worldwide Testing Services(Taiwan) Co., Ltd.


Registration number: W6M21512-15495-C-1
FCC ID: GX9G4RP

3.12 Power Line Conducted Emission

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the table bellows with this provision shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminals.

This measurement was transact first with instrumentation using an average and peak detector and a 10 kHz bandwidth. If the peak detector achieves a calculated level, the measurement is repeated by an instrumentation using a quasi-peak detector.

Frequency	Level (dBμV)	
	quasi-peak	average
150 kHz	lower limit line	Lower limit line

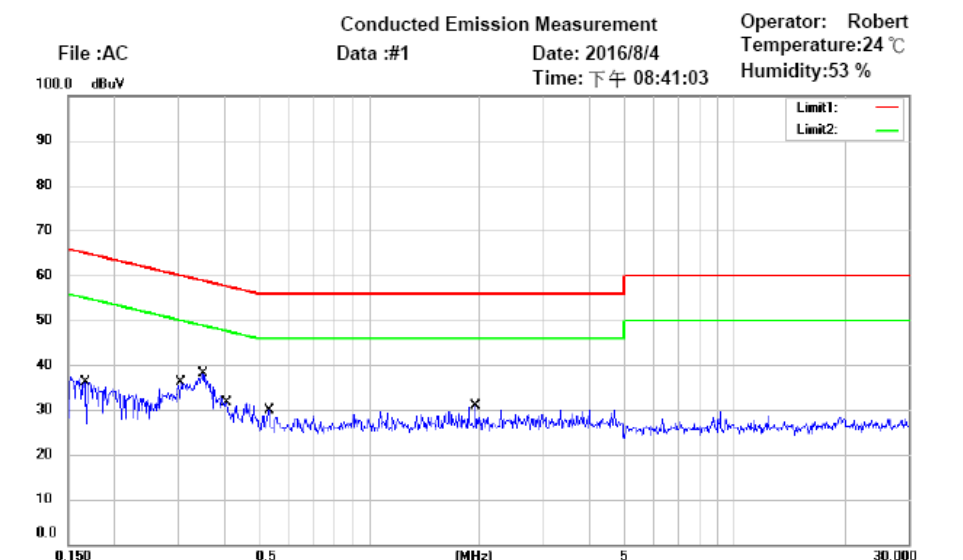

Site : Chamber_03

Condition : FCC Part 15 Class B Conduction (QP)

EUT : W6M21512-15495

M/N:


Test Mode :

Note :

Phase: N


Power : 120 V.a.c.

Mk.	Frequency (MHz)	Reading (dBμV)	Detector	Corrected factor(dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Comment
	0.1660	19.24	QP	9.74	28.98	65.16	-36.18	
	0.1660	4.24	AVG	9.74	13.98	55.16	-41.18	
	0.3040	17.63	QP	9.72	27.35	60.13	-32.78	
	0.3040	2.63	AVG	9.72	12.35	50.13	-37.78	
*	0.3484	21.56	QP	9.73	31.29	59.00	-27.71	
	0.3484	7.29	AVG	9.73	17.02	49.00	-31.98	
	0.4063	12.09	QP	9.73	21.82	57.72	-35.90	
	0.4063	1.43	AVG	9.73	11.16	47.72	-36.56	
	0.5315	7.16	QP	9.73	16.89	56.00	-39.11	
	0.5315	1.10	AVG	9.73	10.83	46.00	-35.17	
	1.9535	6.96	QP	9.79	16.75	56.00	-39.25	
	1.9535	-3.94	AVG	9.79	5.85	46.00	-40.15	



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21512-15495-C-1
FCC ID: GX9G4RP

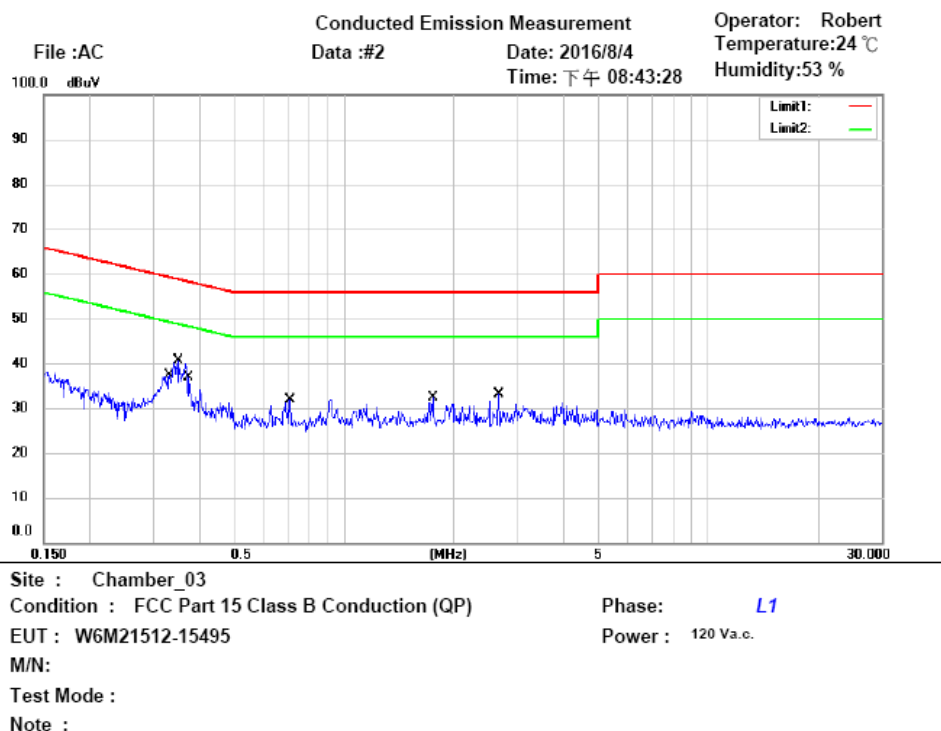

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corrected factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Comment
	0.3313	20.11	QP	9.73	29.84	59.42	-29.58	
	0.3313	9.11	AVG	9.73	18.84	49.42	-30.58	
	0.3500	21.66	QP	9.73	31.39	58.96	-27.57	
*	0.3500	11.87	AVG	9.73	21.60	48.96	-27.36	
	0.3733	15.93	QP	9.73	25.66	58.43	-32.77	
	0.3733	6.25	AVG	9.73	15.98	48.43	-32.45	
	0.7093	10.38	QP	9.74	20.12	56.00	-35.88	
	0.7093	1.95	AVG	9.74	11.69	46.00	-34.31	
	1.7510	9.37	QP	9.78	19.15	56.00	-36.85	
	1.7510	1.01	AVG	9.78	10.79	46.00	-35.21	
	2.6510	6.98	QP	9.82	16.80	56.00	-39.20	
	2.6510	1.48	AVG	9.82	11.30	46.00	-34.70	

Note The formula of measured value as: Test Result = Reading + Correction Factor

1. The Correction Factor = Cable Loss + LISN Insertion Loss + Pulse Limit Loss
2. Detector function in the form : PK = Peak, QP = Quasi Peak, AV = Average
3. All not in the table noted test results are more than 20 dB below the relevant limits.
4. Measurement uncertainty = ± 1.14 dB; Reported uncertainties represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.
5. Up Line: QP Limit Line, Down Line: Ave Limit Line.

Limits:

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi Peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

Test equipment used: ETSTW-CE 001, ETSTW-CE 004, ETSTW-RE 064




Registration number: W6M21512-15495-C-1
FCC ID: GX9G4RP

Appendix

Measurement diagrams

Spurious Emissions radiated_TX



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21512-15495-C-1
FCC ID: GX9G4RP

RF1



Radiated Emission Measurement

Operator: Roy

File :1

Data :#1


Date: 2016/3/17

Temperature:24 °C

80.0 dBuV/m

Time: 下午 10:08:45

Humidity:60 %

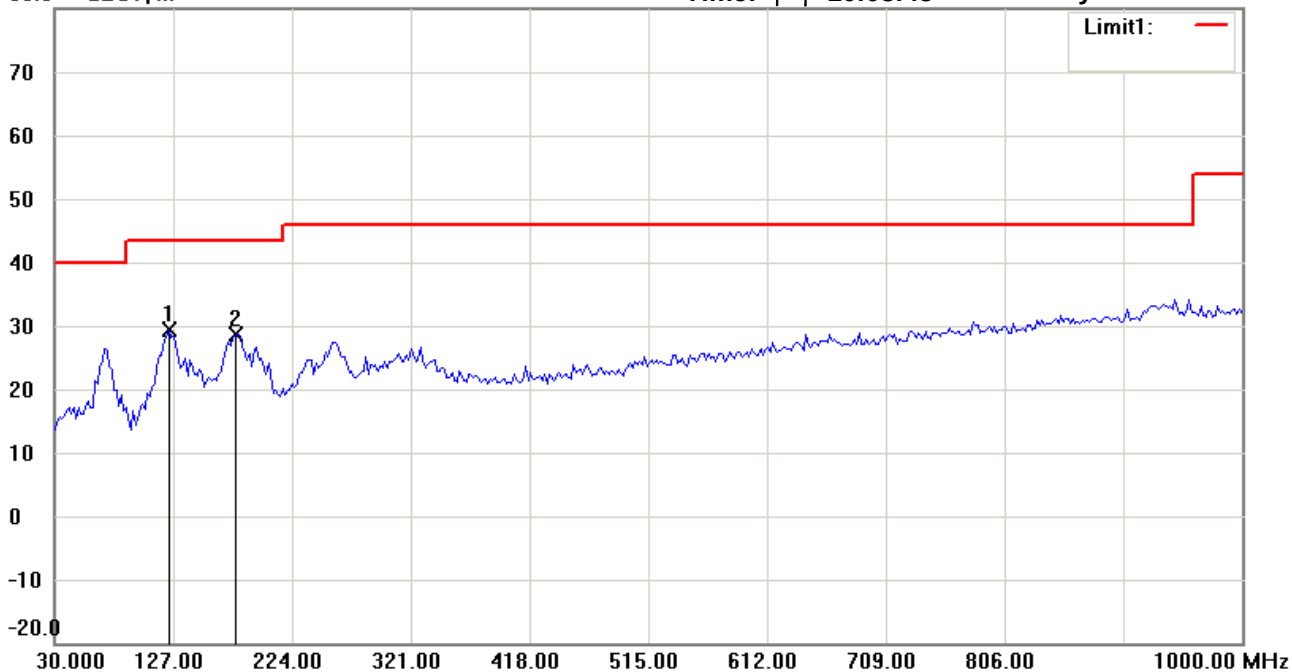

Site : Chamber

Condition : FCC_part 15 RE-Class C_30-1000MHz

EUT : W6M21512-15495

M/N:

Test Mode : TX 906.32MHz

Note :

Polarization: *Horizontal*

Power : 120 V.a.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	123.3066	15.50	peak	13.95	29.45	43.50	100	160	-14.05	
	177.7355	14.73	peak	13.95	28.68	43.50	100	250	-14.82	



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Roy

File :1

Data :#2


Date: 2016/3/17

Temperature:24 °C

80.0 dBuV/m

Time: 下午 10:09:30

Humidity:60 %

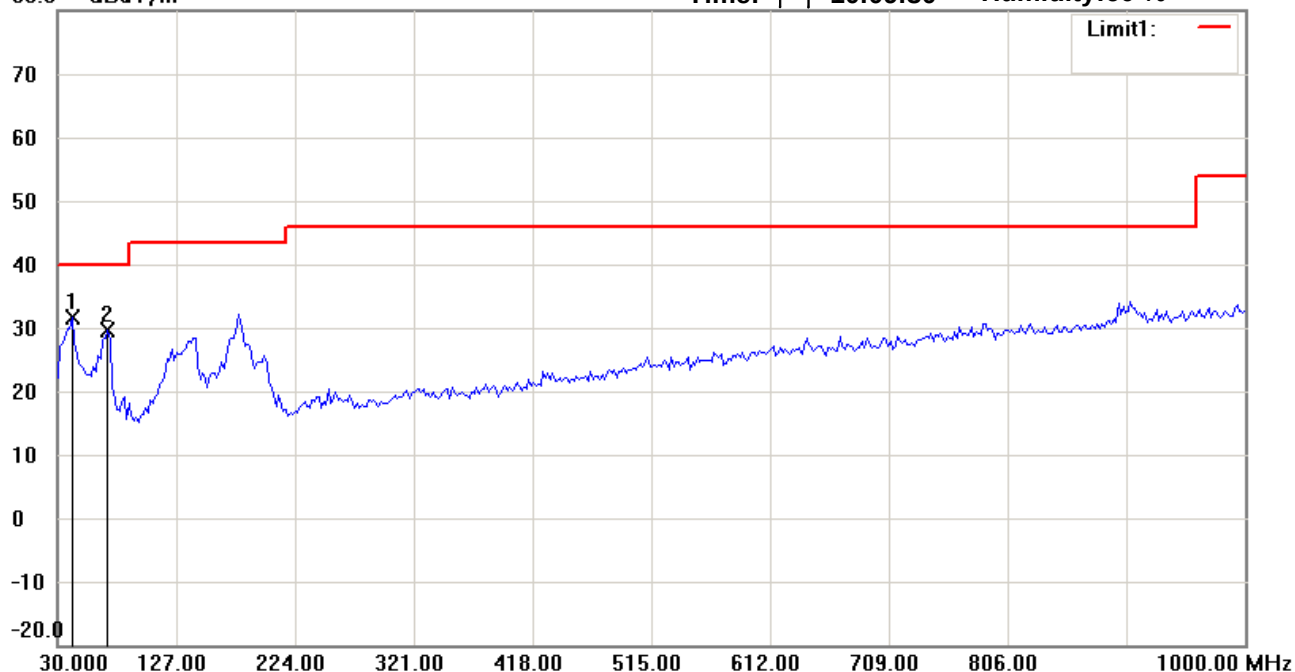

Site : Chamber

Condition : FCC_part 15 RE-Class C_30-1000MHz

EUT : W6M21512-15495

M/N:

Test Mode : TX 906.32MHz

Note :

Polarization: **Vertical**

Power : 120 V.a.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	41.6633	17.70	peak	13.97	31.67	40.00	100	215	-8.33	
	70.8215	18.33	peak	11.21	29.54	40.00	100	50	-10.46	

*:Maximum data x:Over limit !:over margin

Radiated Emission Measurement

Operator: Roy

File :3

Data :#1


Date: 2016/3/16

Temperature:24 °C

90.0 dBuV/m

Time: 下午 10:48:00

Humidity:60 %

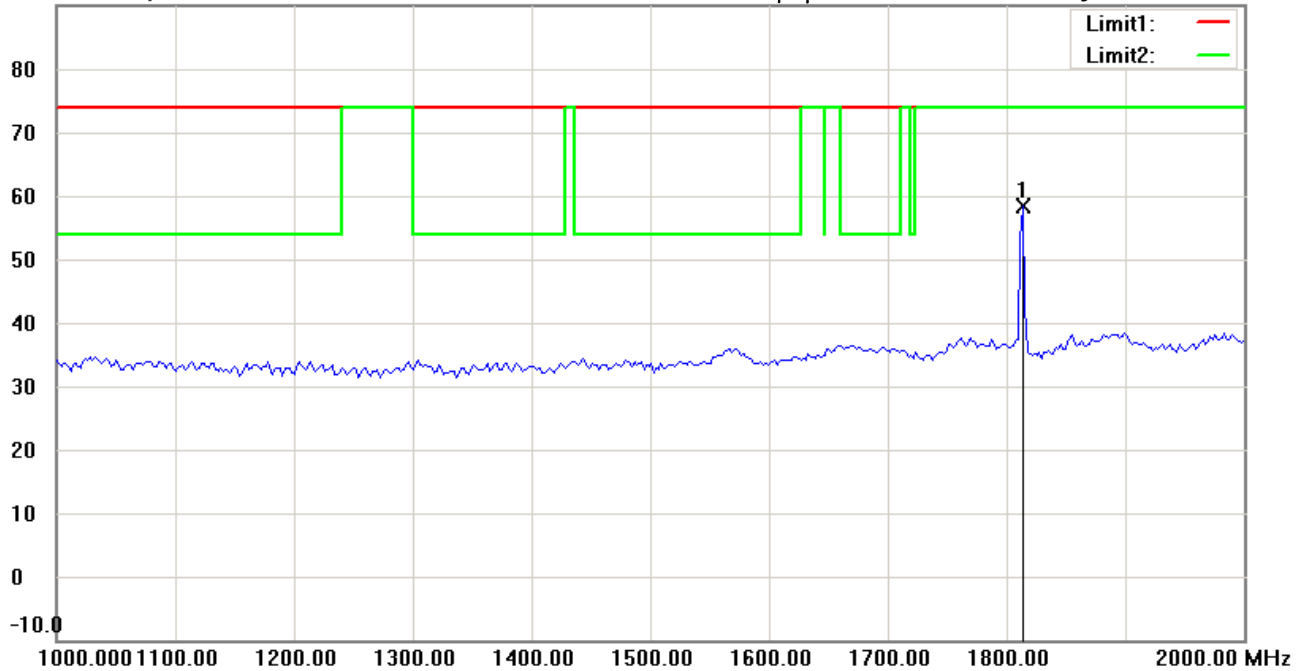

Site : Chamber_01

Condition : FCC Restriction Band_Above 1GHz_PK

Polarization: Horizontal

EUT : W6M21512-15495

Power : 120 V.a.c.

M/N:

Distance: 3m

Test Mode : TX 906.32MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	1813.627	65.18	peak	-6.81	58.37	74.00	100	90	-15.63	

Radiated Emission Measurement

Operator: Roy

File :3

Data :#5


Date: 2016/3/16

Temperature:24 °C

90.0 dBuV/m

Time: 下午 10:53:10

Humidity:60 %

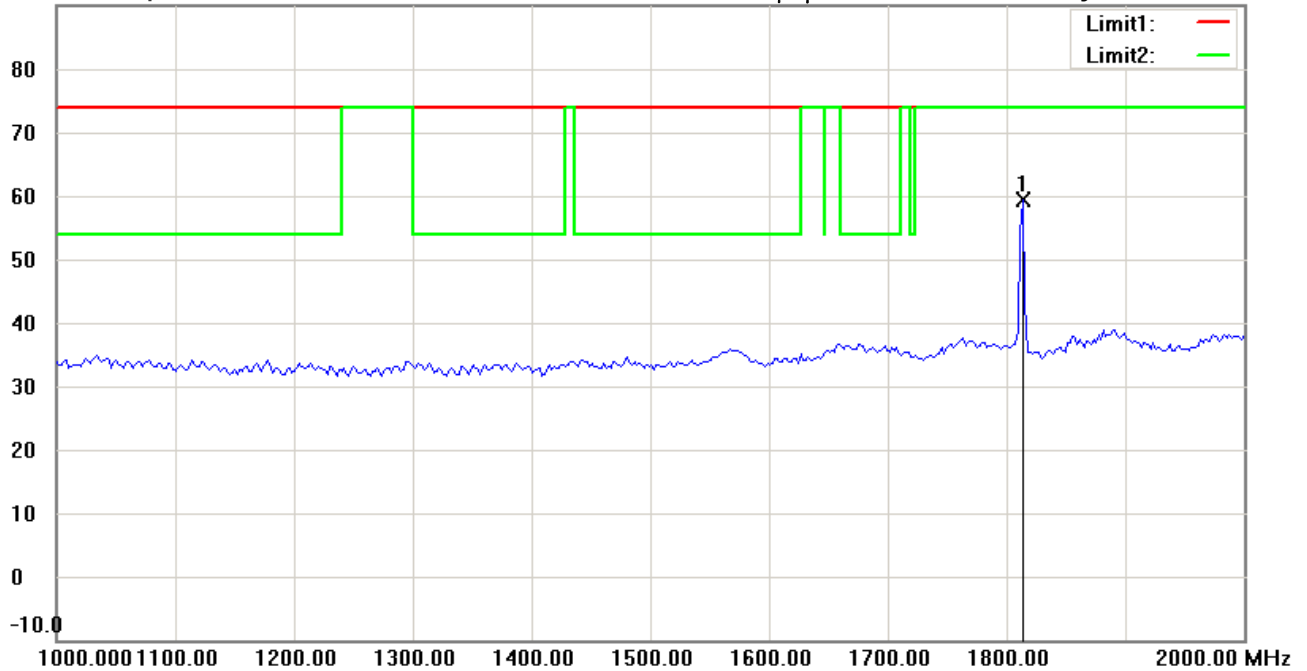

Site : Chamber_01

Condition : FCC Restriction Band_Above 1GHz_PK

Polarization: **Vertical**

EUT : W6M21512-15495

Power : 120 V.a.c.

M/N:

Distance: 3m

Test Mode : TX 906.32MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	1813.627	66.08	peak	-6.81	59.27	74.00	100	80	-14.73	

Radiated Emission Measurement

Operator: Roy

File :3

Data :#2


Date: 2016/3/16

Temperature:24 °C

90.0 dBuV/m

Time: 下午 10:50:30

Humidity:60 %

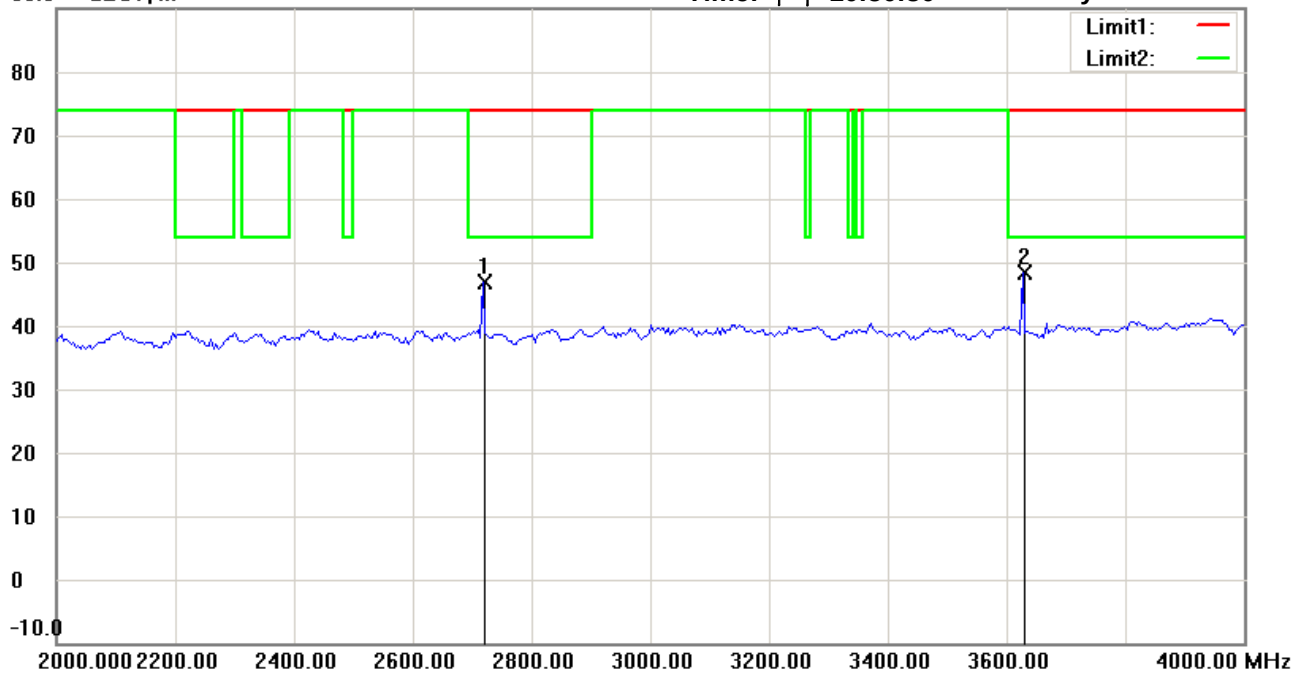

Site : Chamber_01

Condition : FCC Restriction Band_Above 1GHz_PK

EUT : W6M21512-15495

M/N:

Test Mode : TX 906.32MHz

Note :

Polarization: *Horizontal*

Power : 120 V.a.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	2717.435	51.01	peak	-4.10	46.91	74.00	100	115	-27.09	
*	3627.255	50.53	peak	-2.26	48.27	74.00	100	30	-25.73	

Radiated Emission Measurement

Operator: Roy

File :3

Data :#6


Date: 2016/3/16

Temperature:24 °C

90.0 dBuV/m

Time: 下午 10:53:56

Humidity:60 %

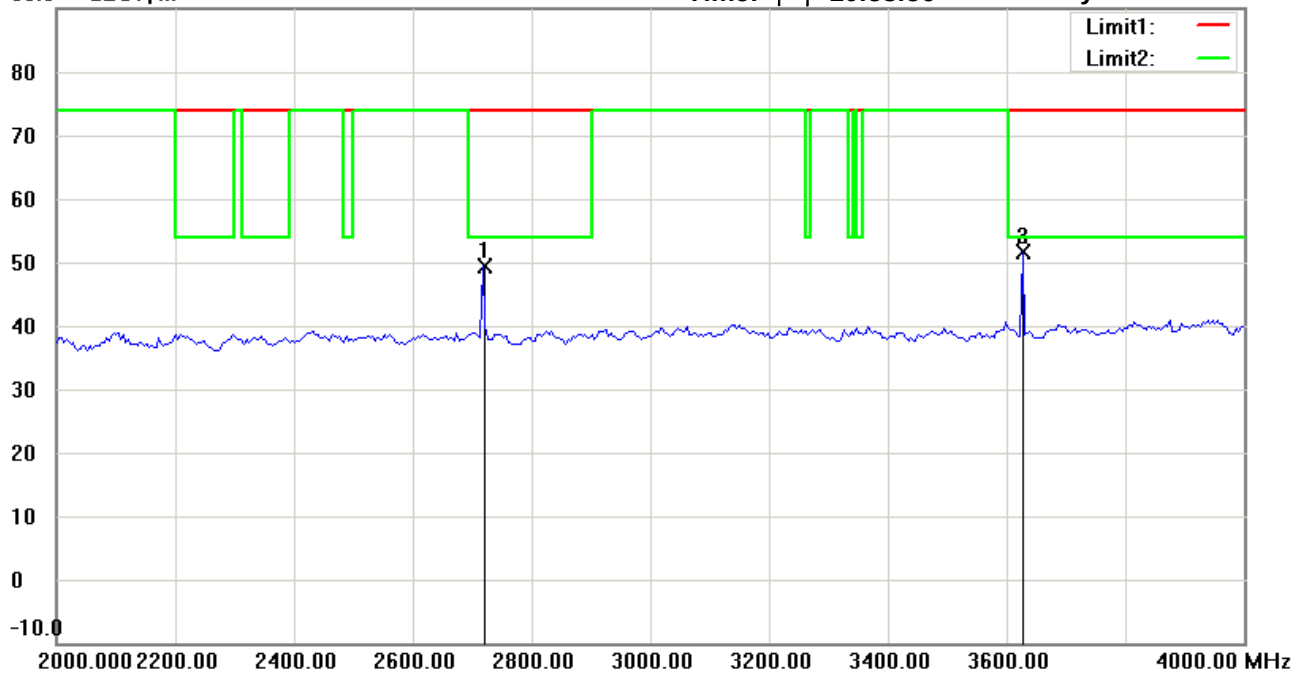

Site : Chamber_01

Condition : FCC Restriction Band_Above 1GHz_PK

Polarization: **Vertical**

EUT : W6M21512-15495

Power : 120 V.a.c.

M/N:

Distance: 3m

Test Mode : TX 906.32MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	2717.435	53.54	peak	-4.10	49.44	74.00	100	60	-24.56	
	3625.311	53.98	peak	-2.27	51.71	74.00	100	15	-22.29	
*	3625.311	53.82	AVG	-2.27	51.55	54.00	100	15	-2.45	

Radiated Emission Measurement

Operator: Roy

File :3

Data :#3


Date: 2016/3/16

Temperature:24 °C

90.0 dBuV/m

Time: 下午 10:51:16

Humidity:60 %

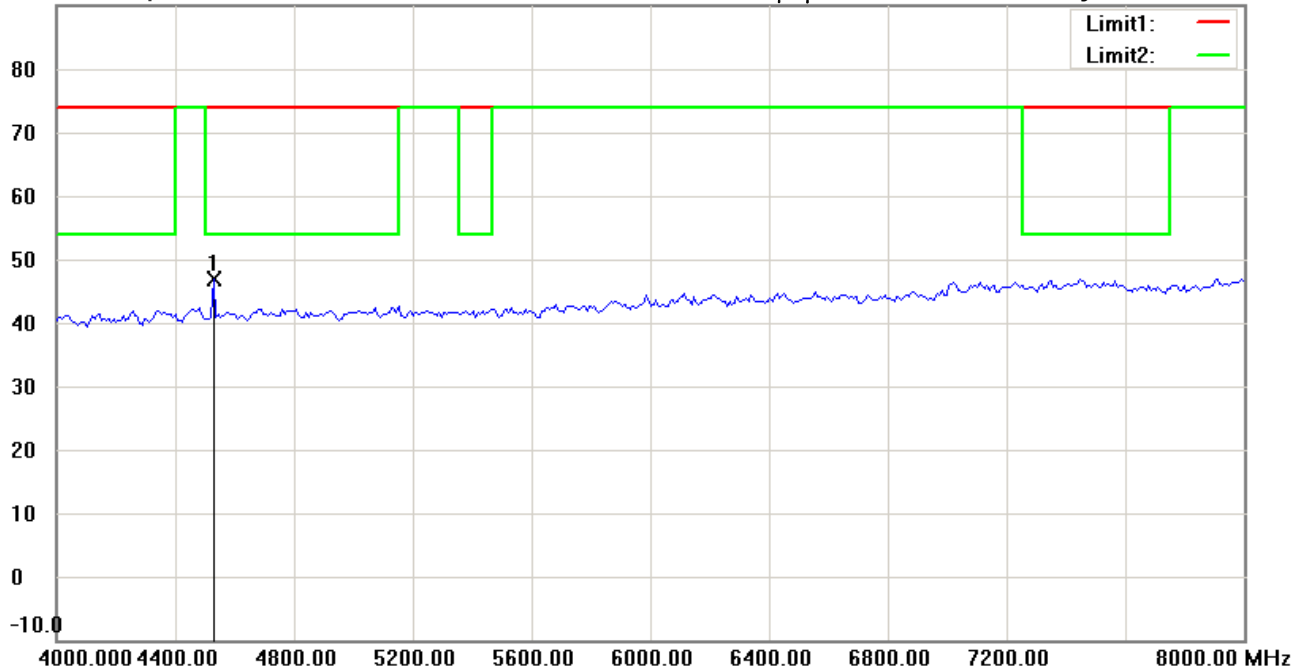

Site : Chamber_01

Condition : FCC Restriction Band_Above 1GHz_PK

EUT : W6M21512-15495

M/N:

Test Mode : TX 906.32MHz

Note :

Polarization: *Horizontal*

Power : 120 V.a.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	4529.058	47.32	peak	-0.50	46.82	74.00	100	240	-27.18	

Radiated Emission Measurement

Operator: Roy

File :3

Data :#7


Date: 2016/3/16

Temperature:24 °C

90.0 dBuV/m

Time: 下午 10:54:42

Humidity:60 %

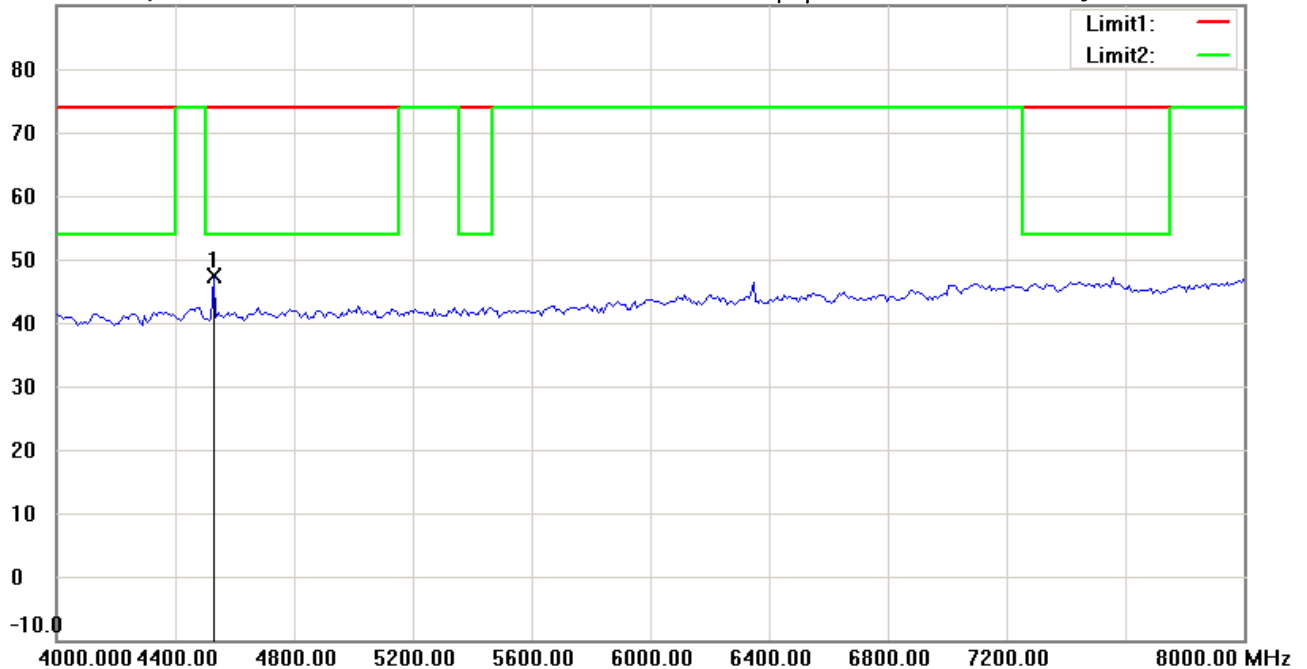

Site : Chamber_01

Condition : FCC Restriction Band_Above 1GHz_PK

Polarization: **Vertical**

EUT : W6M21512-15495

Power : 120 V.a.c.

M/N:

Distance: 3m

Test Mode : TX 906.32MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	4529.058	47.82	peak	-0.50	47.32	74.00	100	30	-26.68	

Radiated Emission Measurement

Operator: Roy

File :3

Data :#4


Date: 2016/3/16

Temperature:24 °C

90.0 dBuV/m

Time: 下午 10:52:01

Humidity:60 %

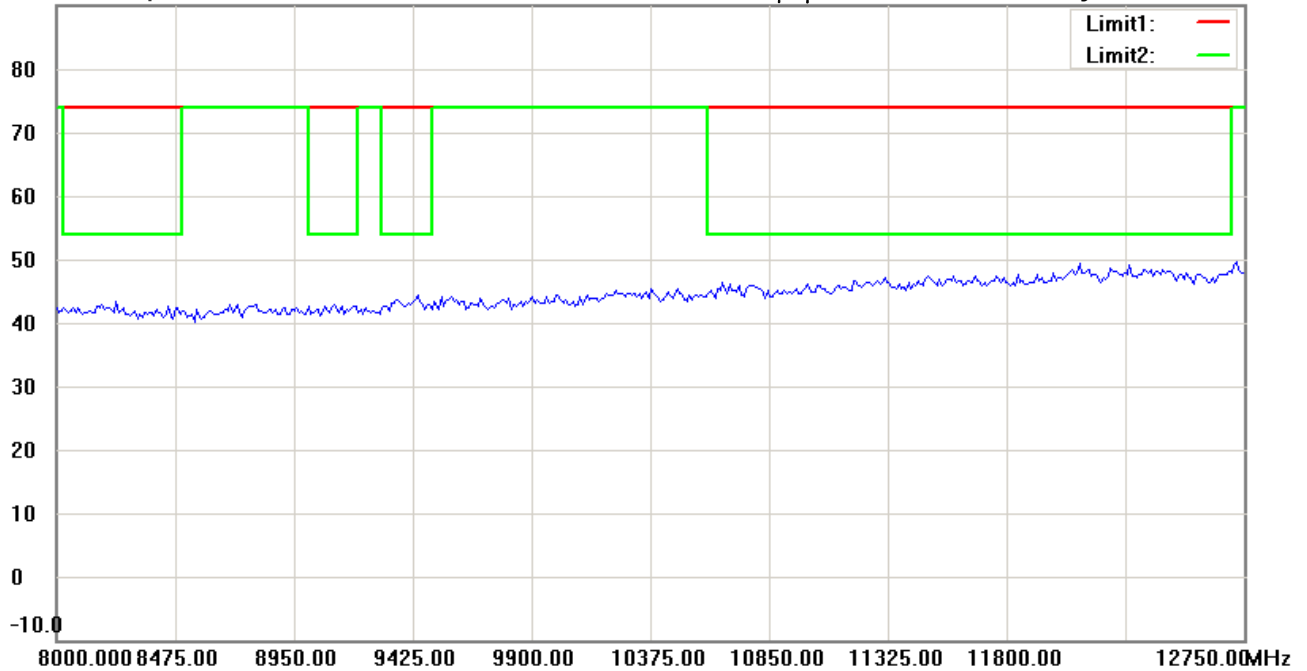

Site : Chamber_01

Condition : FCC Restriction Band_Above 1GHz_PK

EUT : W6M21512-15495

M/N:

Test Mode : TX 906.32MHz

Note :

Polarization: *Horizontal*

Power : 120 V.a.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

Radiated Emission Measurement

Operator: Roy

File :3

Data :#8


Date: 2016/3/16

Temperature:24 °C

90.0 dBuV/m

Time: 下午 10:55:27

Humidity:60 %

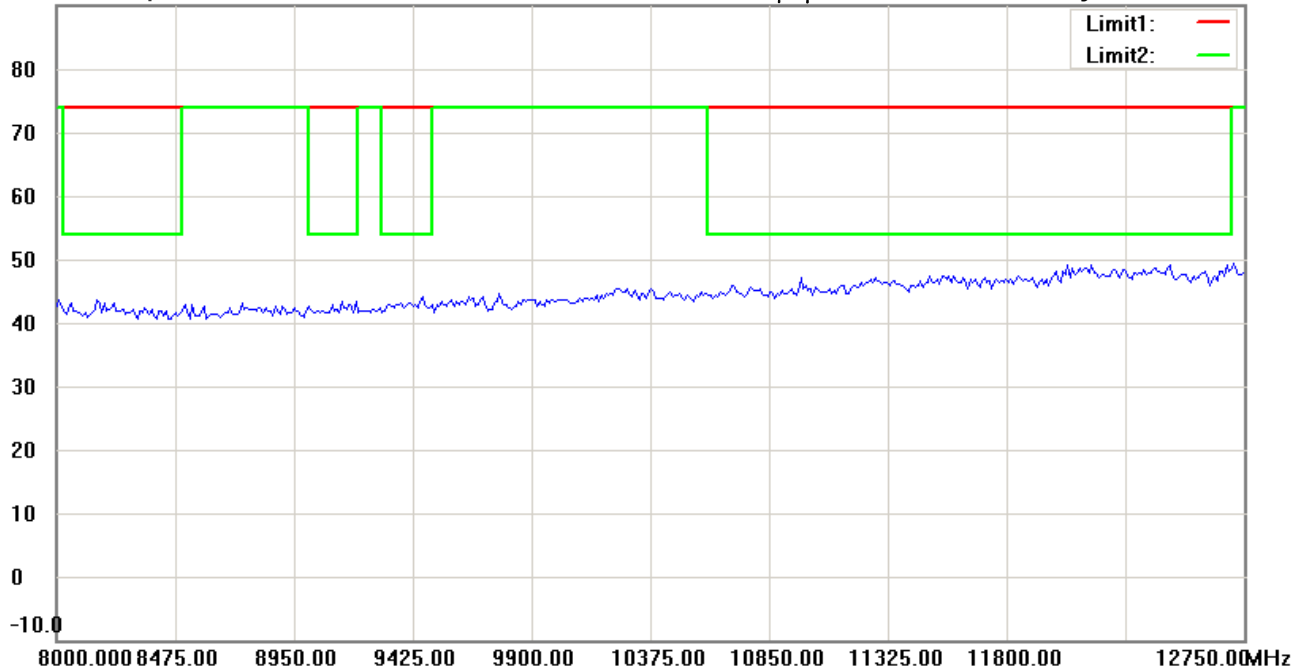

Site : Chamber_01

Condition : FCC Restriction Band_Above 1GHz_PK

EUT : W6M21512-15495

M/N:

Test Mode : TX 906.32MHz

Note :

Polarization: Vertical

Power : 120 V.a.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

Radiated Emission Measurement

Operator: Roy

File :1

Data :#1


Date: 2016/3/17

Temperature:24 °C

80.0 dBuV/m

Time: 下午 10:11:11

Humidity:60 %

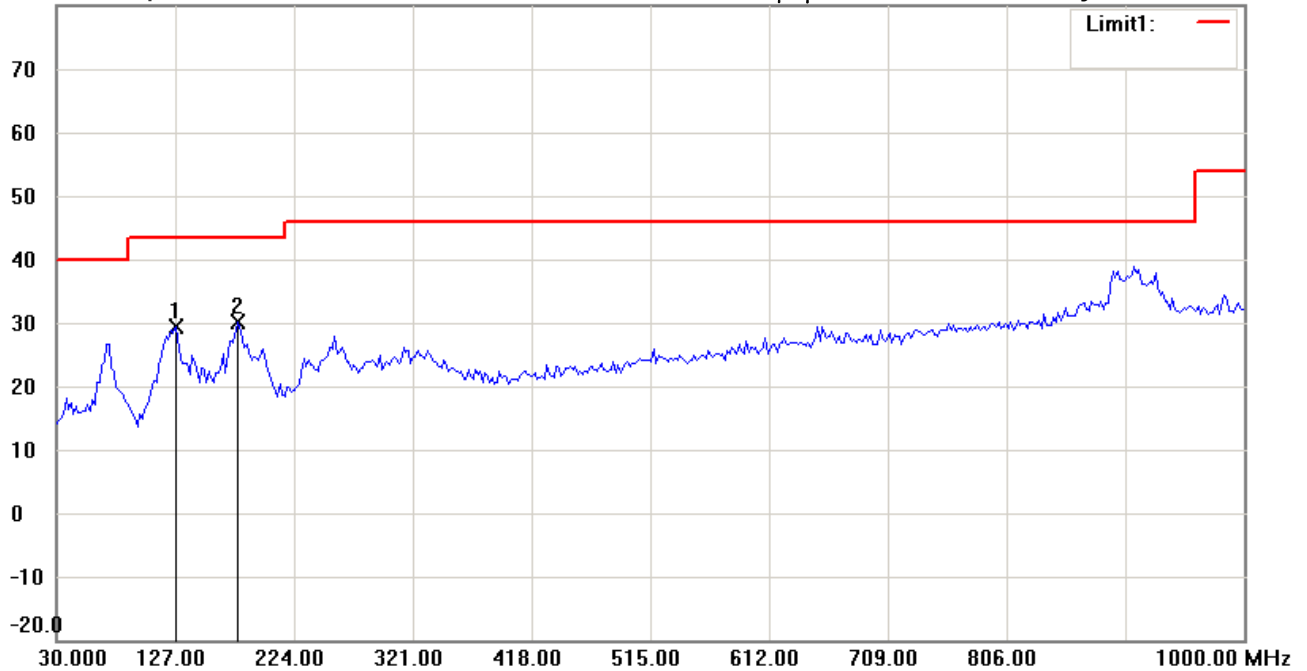

Site : Chamber_01

Condition : FCC_part 15 RE-Class C_30-1000MHz

EUT : W6M21512-15495

M/N:

Test Mode : TX 910.76MHz

Note :

Polarization: *Horizontal*

Power : 120 V.a.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	127.1944	15.21	peak	14.29	29.50	43.50	100	235	-14.00	
*	177.7355	16.19	peak	13.95	30.14	43.50	100	80	-13.36	

Radiated Emission Measurement

Operator: Roy

File :1

Data :#2


Date: 2016/3/17

Temperature:24 °C

80.0 dBuV/m

Time: 下午 10:11:56

Humidity:60 %

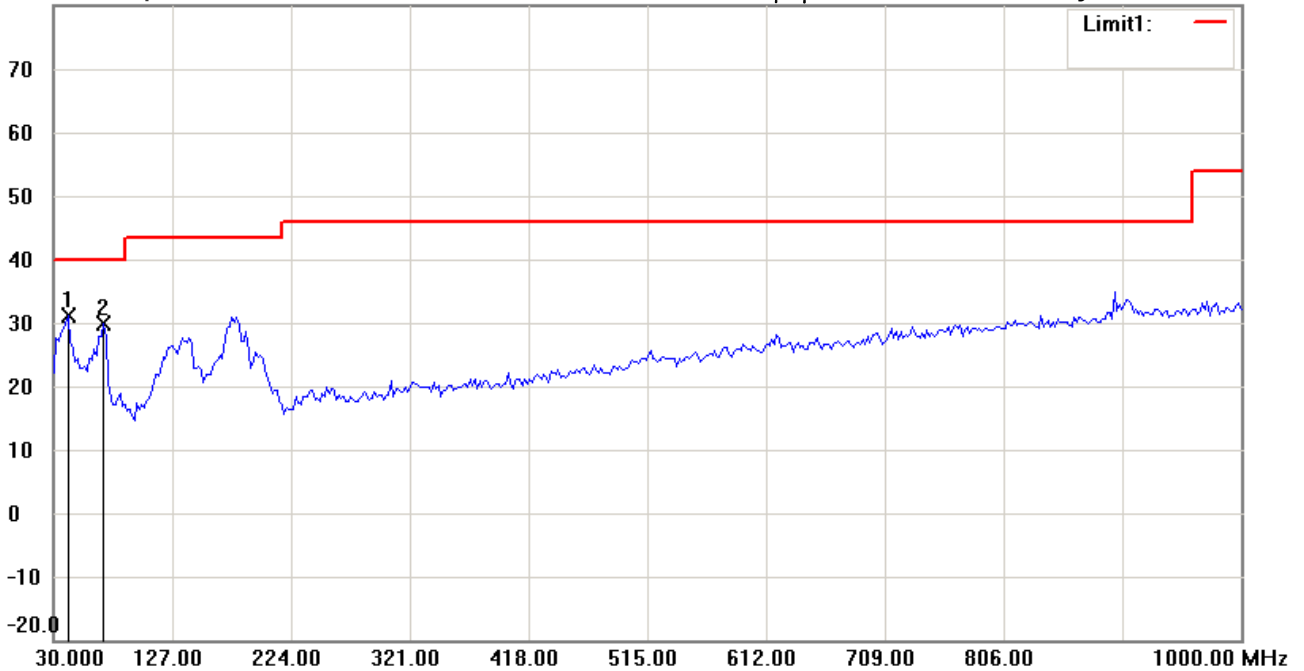

Site : Chamber_01

Condition : FCC_part 15 RE-Class C_30-1000MHz

EUT : W6M21512-15495

M/N:

Test Mode : TX 910.76MHz

Note :

Polarization: **Vertical**

Power : 120 V.a.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	41.6633	17.16	peak	13.97	31.13	40.00	100	140	-8.87	
	70.8215	18.77	peak	11.21	29.98	40.00	100	100	-10.02	

Radiated Emission Measurement

Operator: Roy

File :3

Data :#1


Date: 2016/3/16

Temperature:24 °C

90.0 dBuV/m

Time: 下午 11:16:54

Humidity:60 %

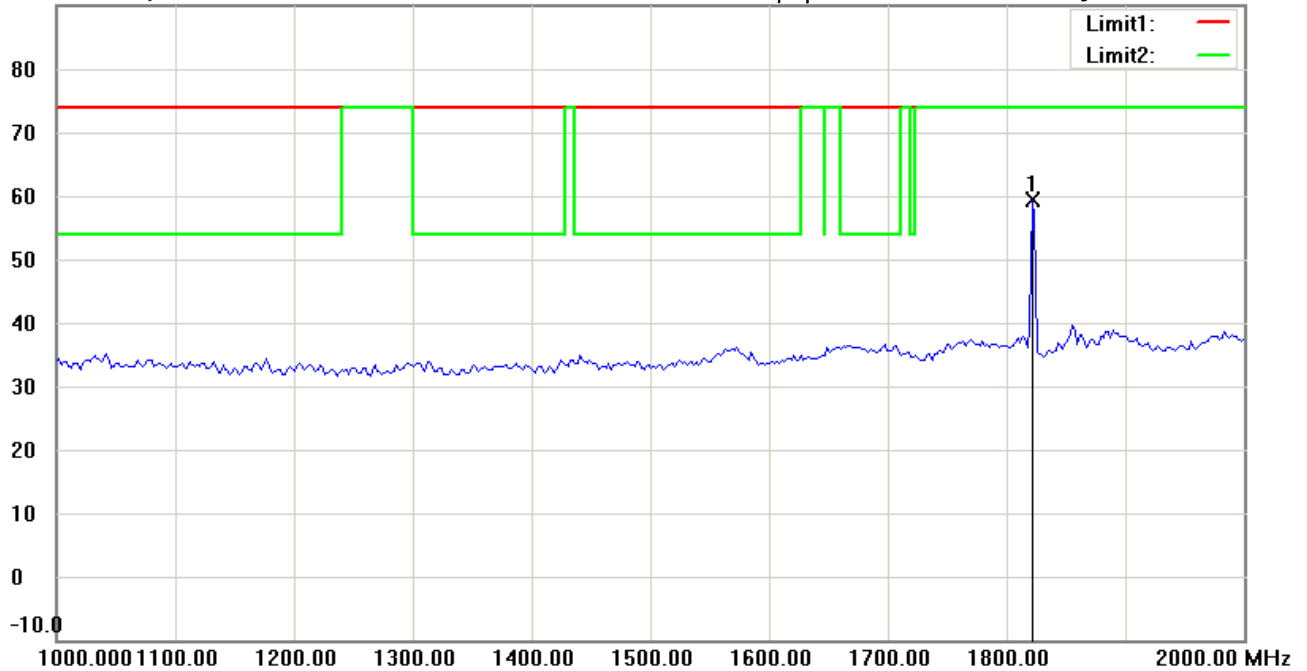

Site : Chamber_01

Condition : FCC Restriction Band_Above 1GHz_PK

EUT : W6M21512-15495

M/N:

Test Mode : TX 910.76MHz

Note :

Polarization: *Horizontal*

Power : 120 V.a.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	1821.643	66.22	peak	-6.73	59.49	74.00	100	240	-14.51	

Radiated Emission Measurement

Operator: Roy

File :3

Data :#7


Date: 2016/3/16

Temperature:24 °C

90.0 dBuV/m

Time: 下午 11:20:19

Humidity:60 %

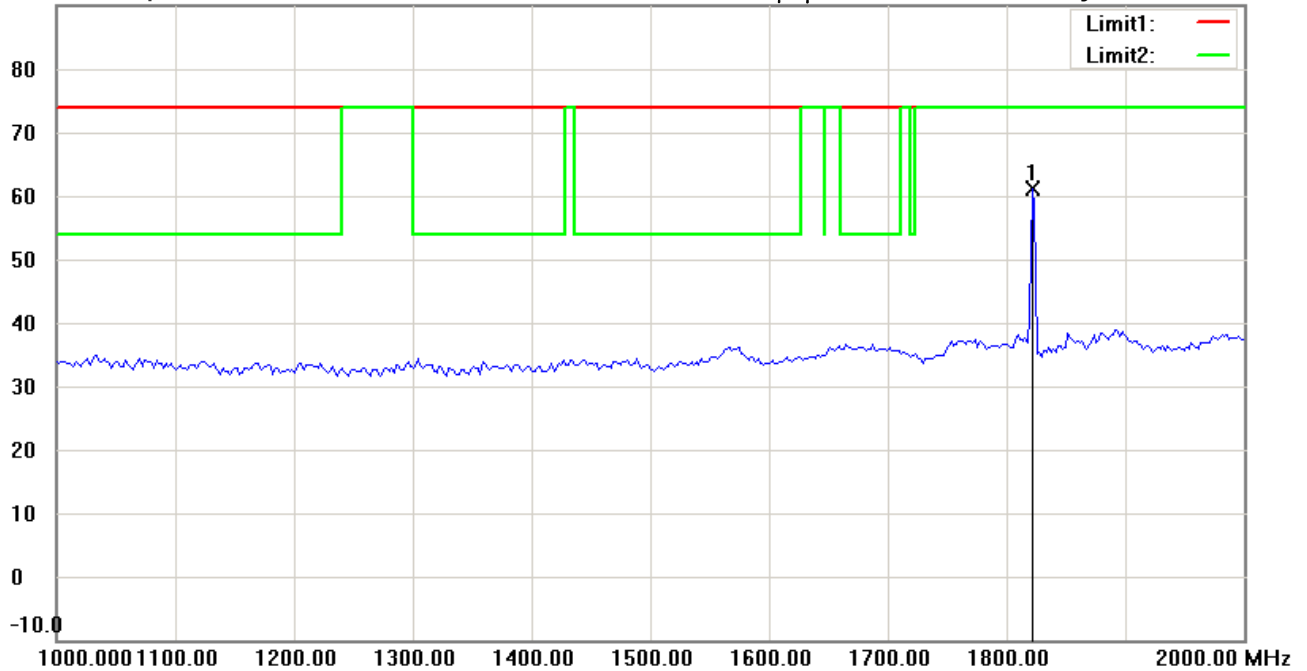

Site : Chamber_01

Condition : FCC Restriction Band_Above 1GHz_PK

Polarization: **Vertical**

EUT : W6M21512-15495

Power : 120 V.a.c.

M/N:

Distance: 3m

Test Mode : TX 910.76MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	1821.643	67.97	peak	-6.73	61.24	74.00	100	80	-12.76	

Radiated Emission Measurement

Operator: Roy

File :3

Data :#2


Date: 2016/3/16

Temperature:24 °C

90.0 dBuV/m

Time: 下午 11:17:39

Humidity:60 %

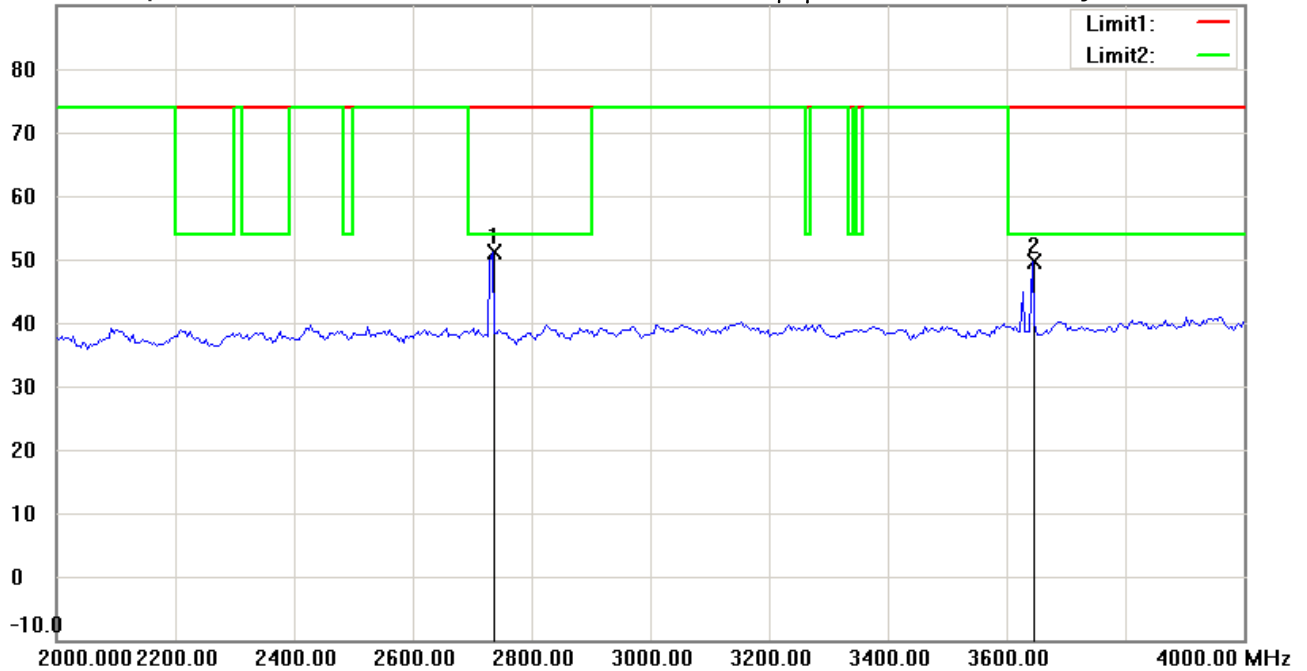

Site : Chamber_01

Condition : FCC Restriction Band_Above 1GHz_PK

EUT : W6M21512-15495

M/N:

Test Mode : TX 910.76MHz

Note :

Polarization: *Horizontal*

Power : 120 V.a.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	2733.467	55.22	peak	-4.10	51.12	74.00	100	155	-22.88	
	3643.287	51.85	peak	-2.24	49.61	74.00	100	100	-24.39	



Data :#8

Date: 2016/3/16

Temperature:24 °C

Humidity:60 %

Radiated Emission Measurement

Operator: Roy

File :3

Data :#3


Date: 2016/3/16

Temperature:24 °C

90.0 dBuV/m

Time: 下午 11:18:25

Humidity:60 %

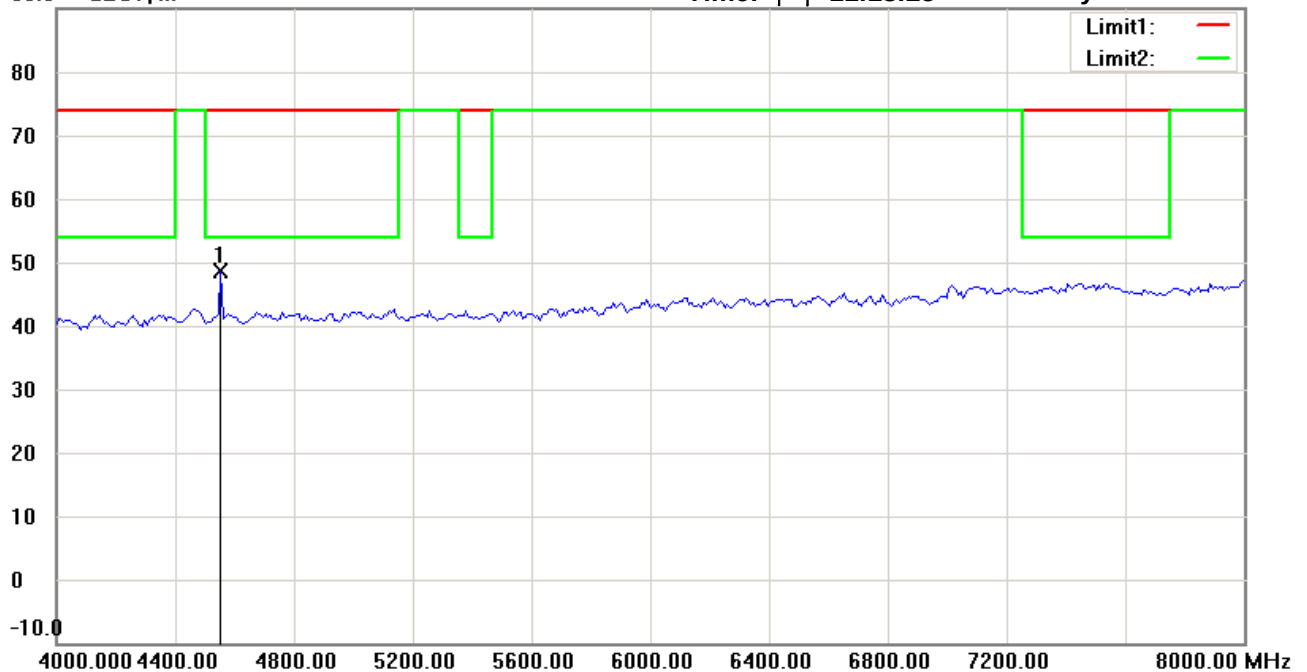

Site : Chamber_01

Condition : FCC Restriction Band_Above 1GHz_PK

Polarization: *Horizontal*

EUT : W6M21512-15495

Power : 120 V.a.c.

M/N:

Distance: 3m

Test Mode : TX 910.76MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	4553.106	49.22	peak	-0.53	48.69	74.00	100	65	-25.31	

Radiated Emission Measurement

Operator: Roy

File :3

Data :#9


Date: 2016/3/16

Temperature:24 °C

90.0 dBuV/m

Time: 下午 11:21:50

Humidity:60 %

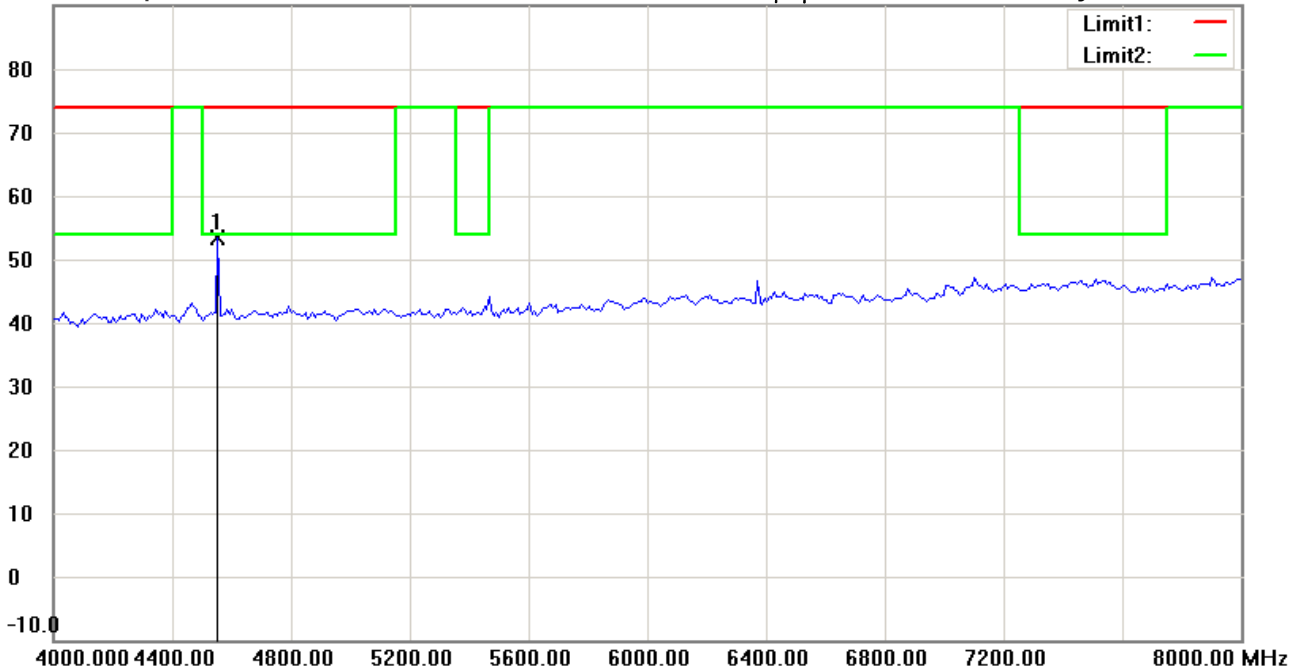

Site : Chamber_01

Condition : FCC Restriction Band_Above 1GHz_PK

Polarization: **Vertical**

EUT : W6M21512-15495

Power : 120 V.a.c.

M/N:

Distance: 3m

Test Mode : TX 910.76MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	4553.106	53.99	peak	-0.53	53.46	74.00	100	35	-20.54	

Radiated Emission Measurement

Operator: Roy

File :3

Data :#4


Date: 2016/3/16

Temperature:24 °C

90.0 dBuV/m

Time: 下午 11:19:10

Humidity:60 %

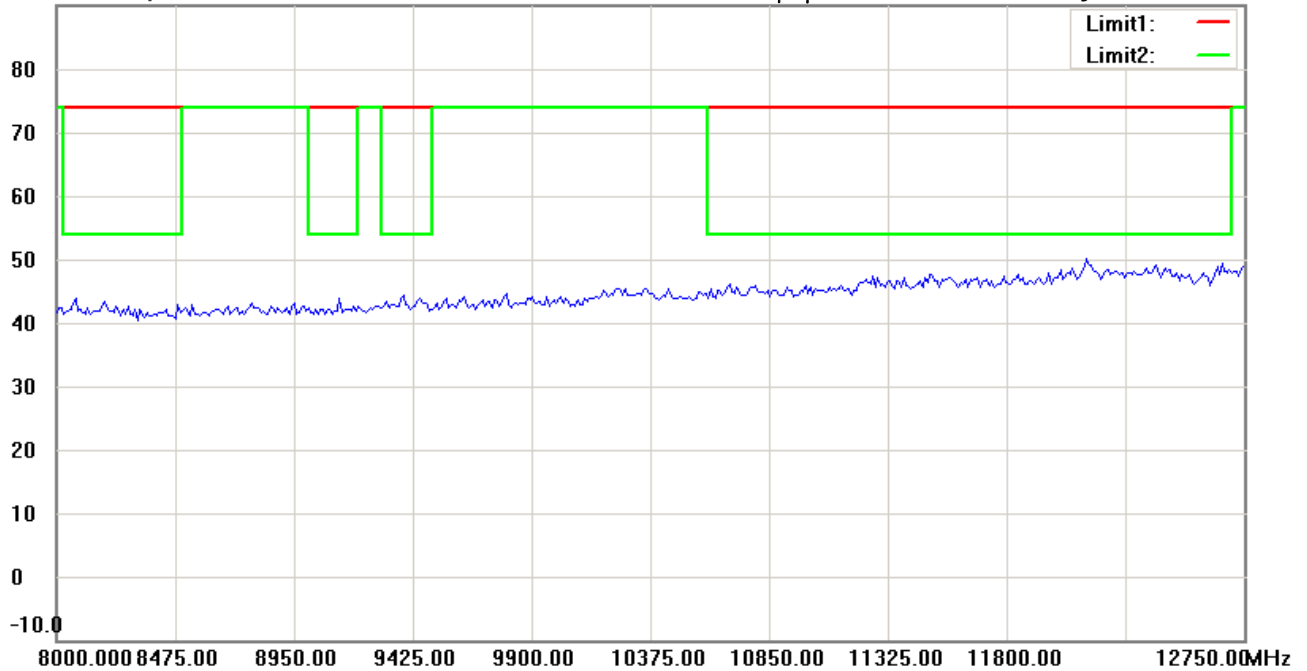

Site : Chamber_01

Condition : FCC Restriction Band_Above 1GHz_PK

EUT : W6M21512-15495

M/N:

Test Mode : TX 910.76MHz

Note :

Polarization: *Horizontal*

Power : 120 V.a.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

Radiated Emission Measurement

Operator: Roy

File :3

Data :#10


Date: 2016/3/16

Temperature:24 °C

90.0 dBuV/m

Time: 下午 11:22:35

Humidity:60 %

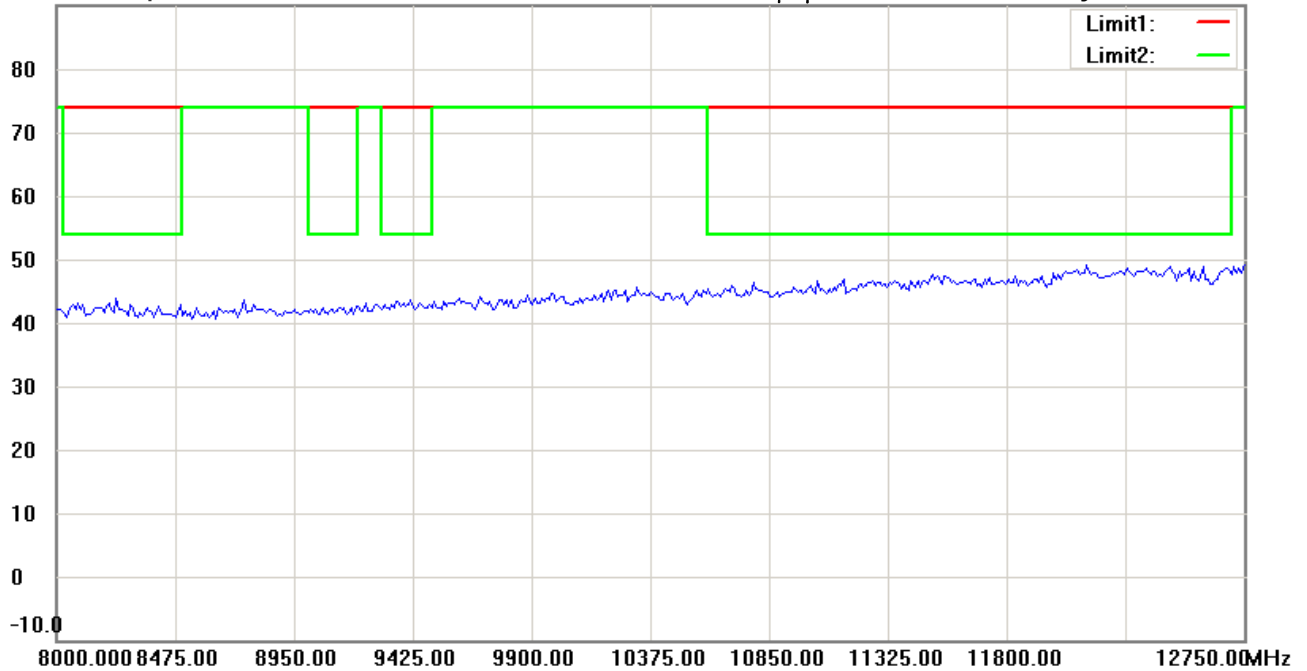

Site : Chamber_01

Condition : FCC Restriction Band_Above 1GHz_PK

Polarization: Vertical

EUT : W6M21512-15495

Power : 120 V.a.c.

M/N:

Distance: 3m

Test Mode : TX 910.76MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

Radiated Emission Measurement

Operator: Roy

File :1

Data :#1


Date: 2016/3/17

Temperature:24 °C

80.0 dBuV/m

Time: 下午 10:17:52

Humidity:60 %

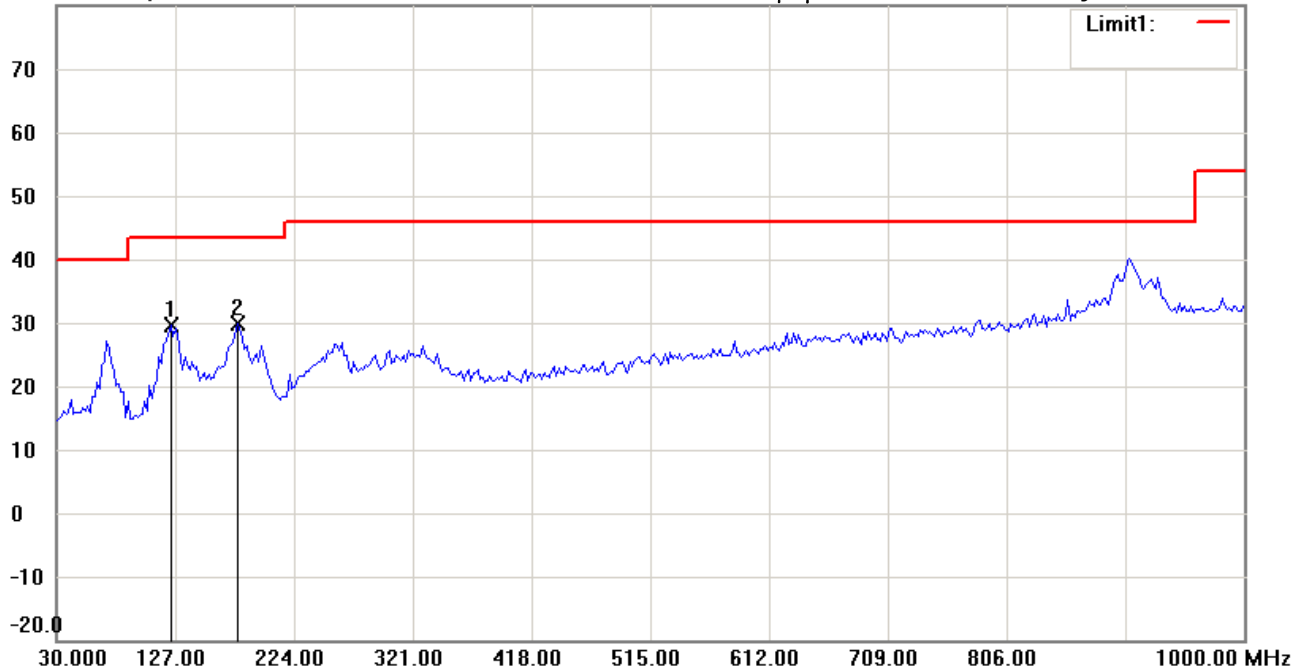

Site : Chamber_01

Condition : FCC_part 15 RE-Class C_30-1000MHz

EUT : W6M21512-15495

M/N:

Test Mode : TX 914.84MHz

Note :

Polarization: *Horizontal*

Power : 120 V.a.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	123.3066	15.78	peak	13.95	29.73	43.50	100	155	-13.77	
*	177.7355	15.91	peak	13.95	29.86	43.50	100	65	-13.64	

Radiated Emission Measurement

Operator: Roy

File :1

Data :#2


Date: 2016/3/17

Temperature:24 °C

80.0 dBuV/m

Time: 下午 10:19:02

Humidity:60 %

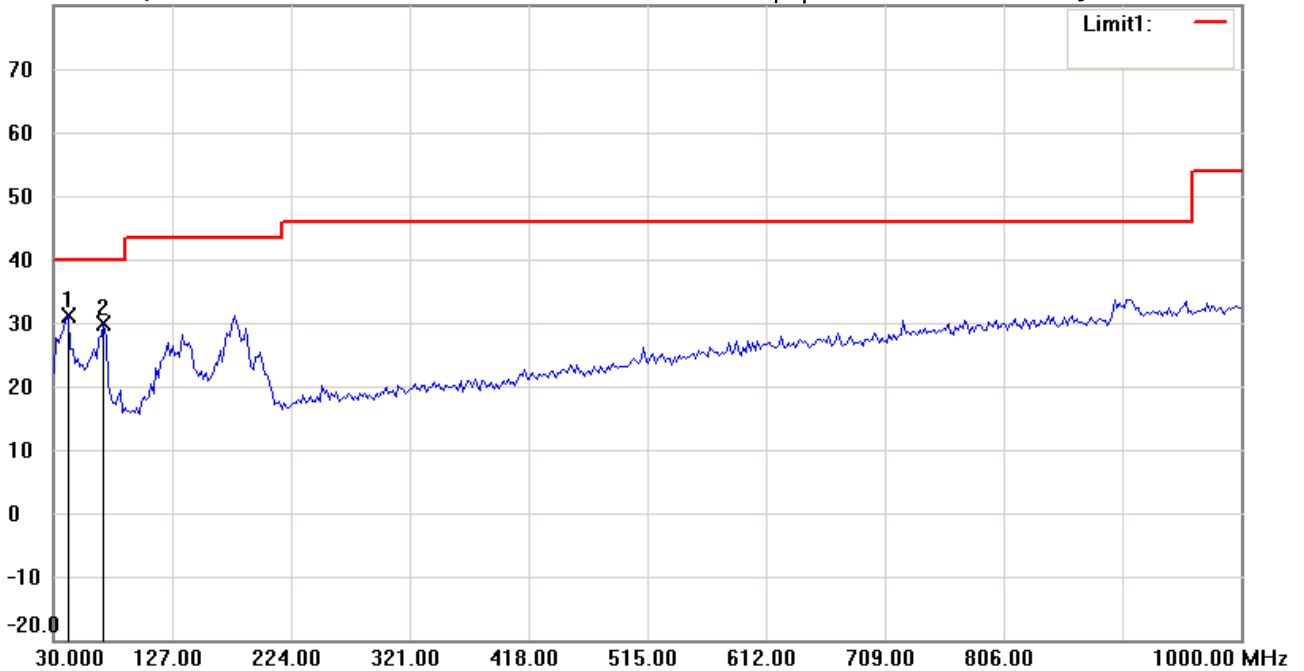

Site : Chamber_01

Condition : FCC_part 15 RE-Class C_30-1000MHz

EUT : W6M21512-15495

M/N:

Test Mode : TX 914.84MHz

Note :

Polarization: **Vertical**

Power : 120 V.a.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	41.6633	17.08	peak	13.97	31.05	40.00	100	120	-8.95	
	70.8215	18.61	peak	11.21	29.82	40.00	100	35	-10.18	

Radiated Emission Measurement

Operator: Roy

File :3

Data :#1


Date: 2016/3/17

Temperature:24 °C

90.0 dBuV/m

Time: 上午 12:01:09

Humidity:60 %

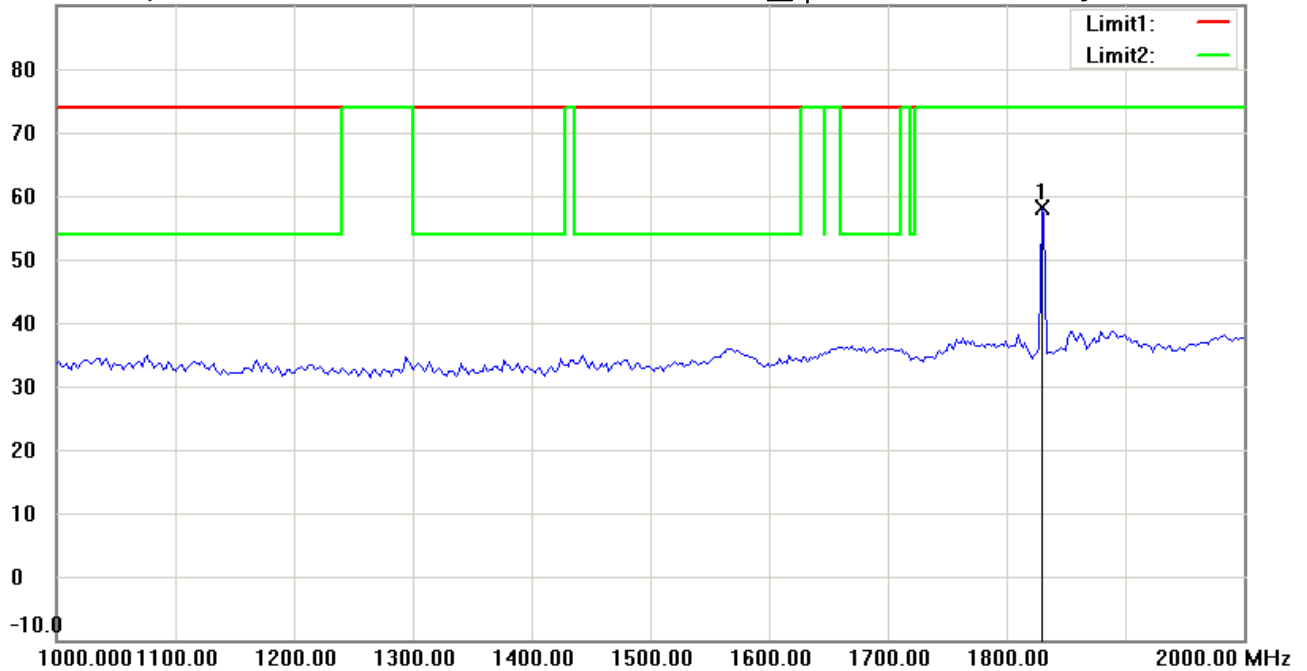

Site : Chamber_01

Condition : FCC Restriction Band_Above 1GHz_PK

EUT : W6M21512-15495

M/N:

Test Mode : TX 914.84MHz

Note :

Polarization: *Horizontal*

Power : 120 V.a.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	1829.659	64.83	peak	-6.65	58.18	74.00	100	65	-15.82	

Radiated Emission Measurement

Operator: Roy

File :3

Data :#7


Date: 2016/3/17

Temperature:24 °C

90.0 dBuV/m

Time: 上午 12:05:00

Humidity:60 %

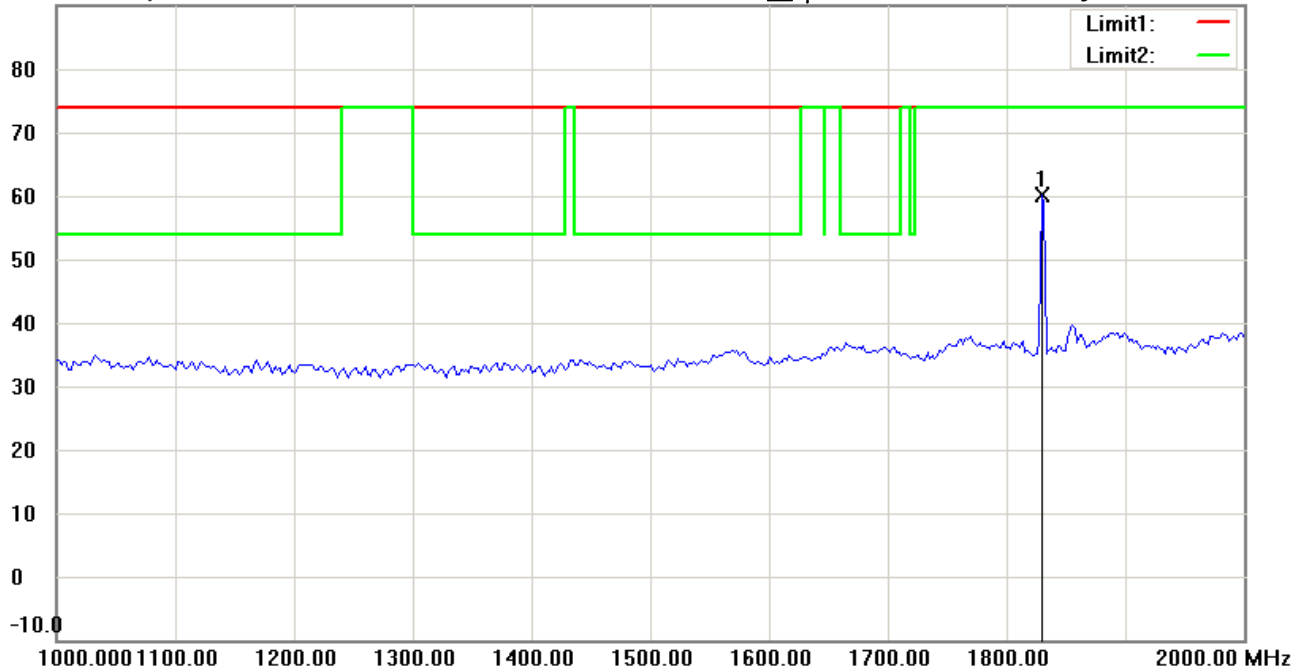

Site : Chamber_01

Condition : FCC Restriction Band_Above 1GHz_PK

Polarization: **Vertical**

EUT : W6M21512-15495

Power : 120 V.a.c.

M/N:

Distance: 3m

Test Mode : TX 914.84MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	1829.659	66.76	peak	-6.65	60.11	74.00	100	90	-13.89	

Radiated Emission Measurement

Operator: Roy

File :3

Data :#2


Date: 2016/3/17

Temperature:24 °C

90.0 dBuV/m

Time: 上午 12:02:21

Humidity:60 %

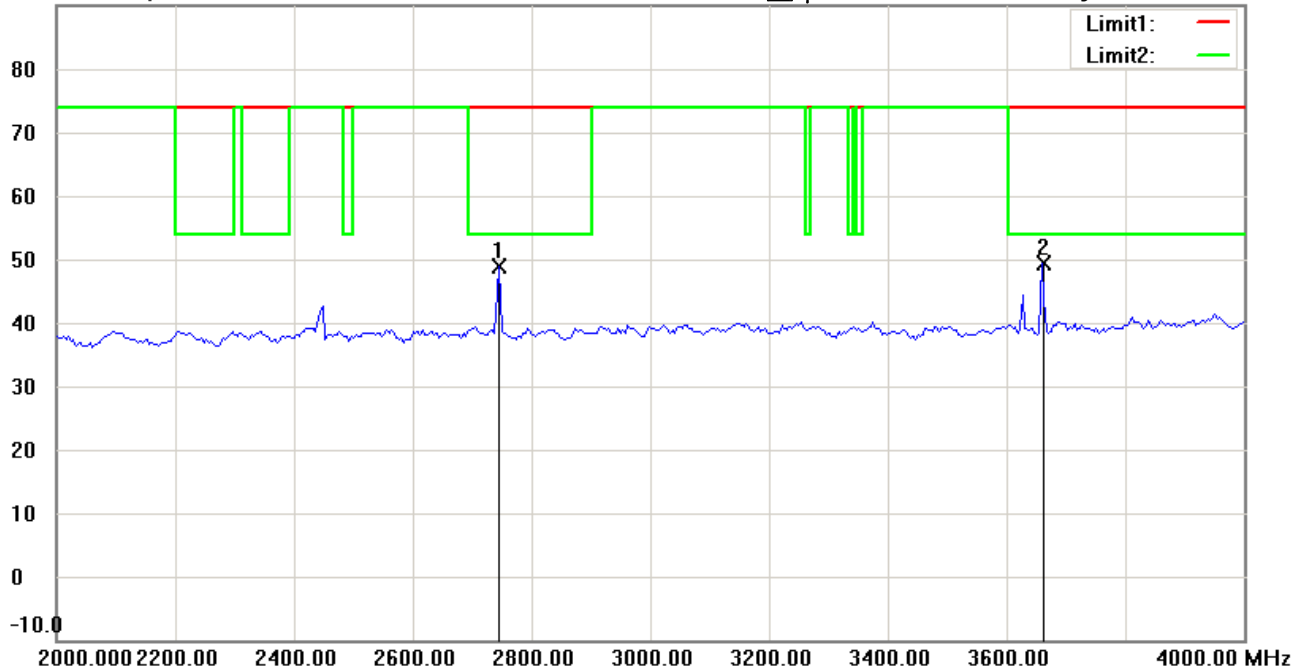

Site : Chamber_01

Condition : FCC Restriction Band_Above 1GHz_PK

EUT : W6M21512-15495

M/N:

Test Mode : TX 914.84MHz

Note :

Polarization: *Horizontal*

Power : 120 V.a.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	2745.491	52.96	peak	-4.10	48.86	74.00	100	55	-25.14	
*	3659.319	51.62	peak	-2.22	49.40	74.00	100	205	-24.60	

Radiated Emission Measurement

Operator: Roy

File :3

Data :#8


Date: 2016/3/17

Temperature:24 °C

90.0 dBuV/m

Time: 上午 12:05:46

Humidity:60 %

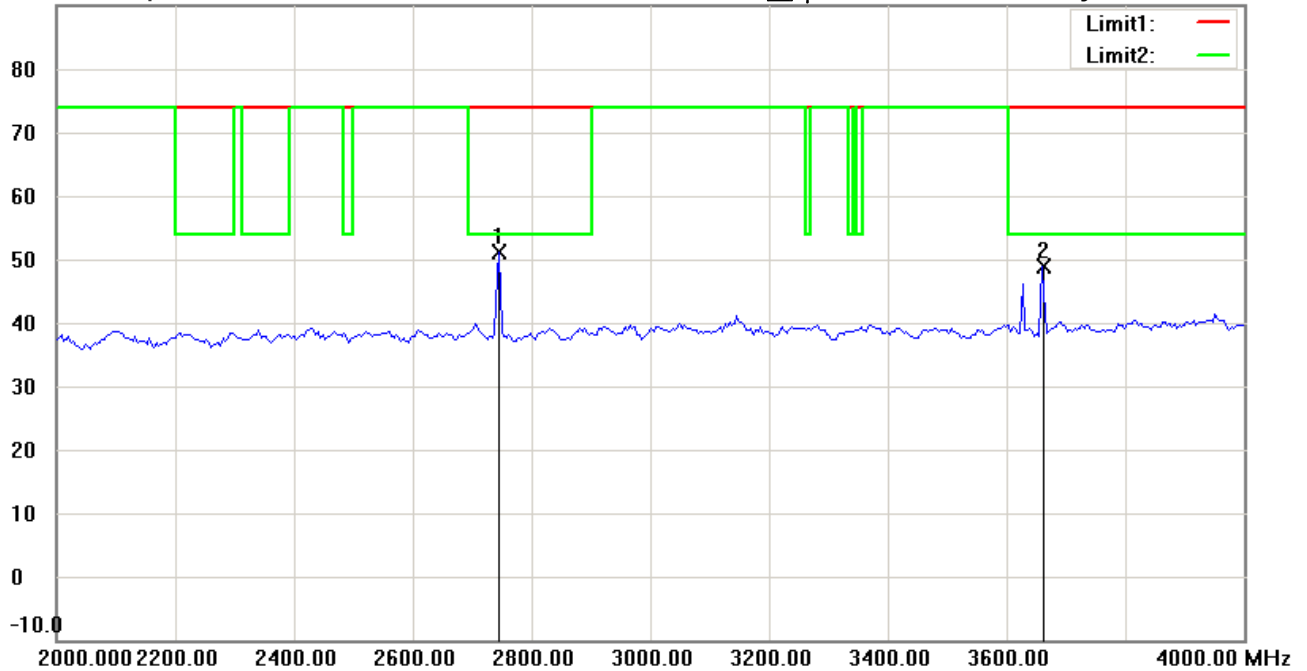

Site : Chamber_01

Condition : FCC Restriction Band_Above 1GHz_PK

Polarization: Vertical

EUT : W6M21512-15495

Power : 120 V.a.c.

M/N:

Distance: 3m

Test Mode : TX 914.84MHz


Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	2745.491	55.32	peak	-4.10	51.22	74.00	100	230	-22.78	
	3659.319	51.17	peak	-2.22	48.95	74.00	100	75	-25.05	

Operator: Roy

Temperature: 24 °C

Humidity:60 %

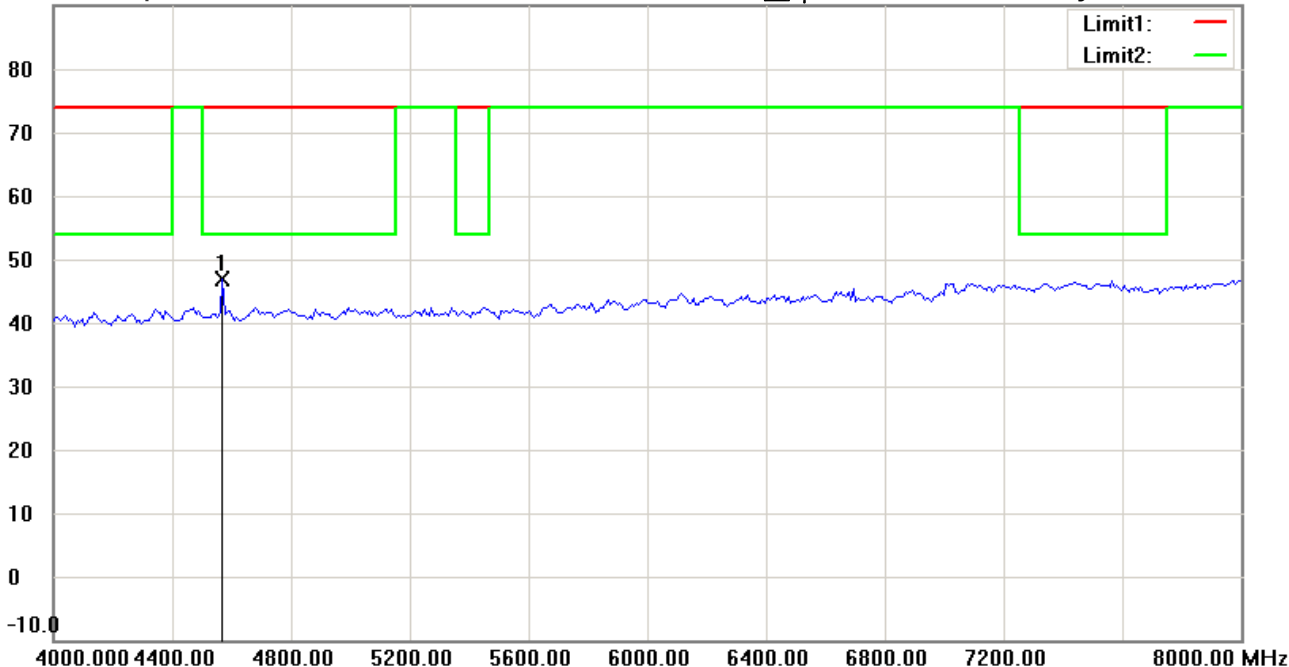

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	4569.138	47.48	peak	-0.55	46.93	74.00	100	40	-27.07	

***:Maximum data x:Over limit !:over margin**

Radiated Emission Measurement

Operator: Roy

File :3

Data :#9


Date: 2016/3/17

Temperature:24 °C

90.0 dBuV/m

Time: 上午 12:06:32

Humidity:60 %

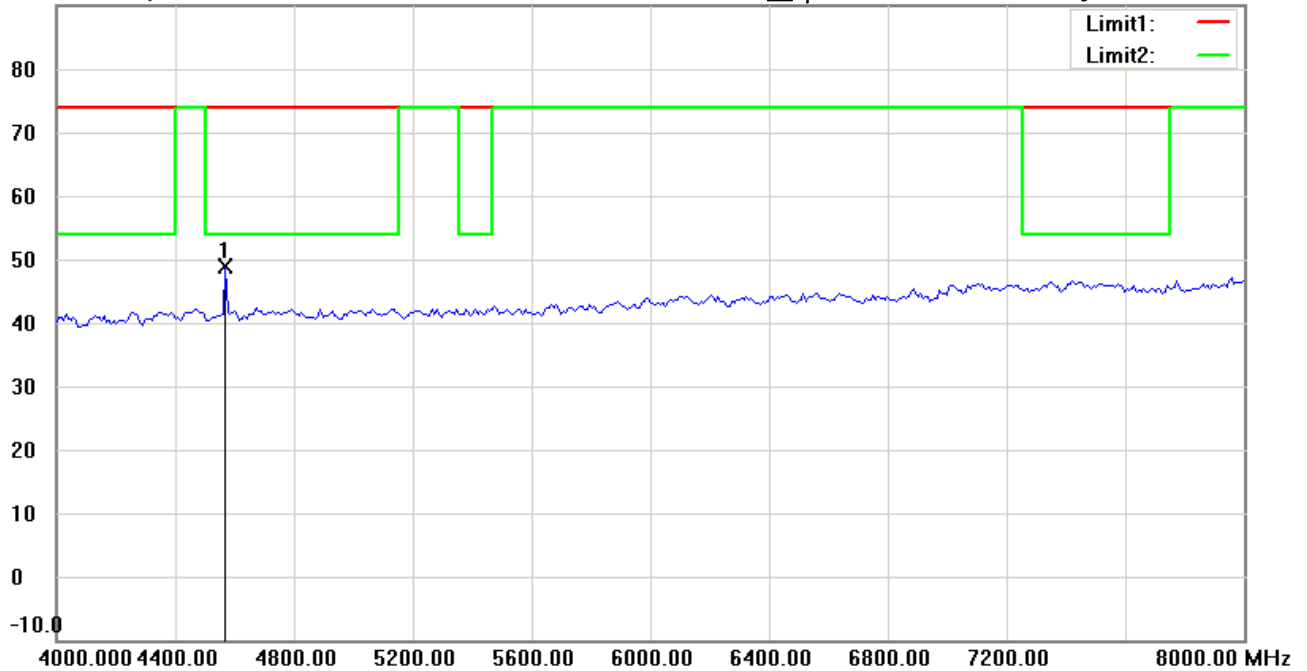

Site : Chamber_01

Condition : FCC Restriction Band_Above 1GHz_PK

Polarization: **Vertical**

EUT : W6M21512-15495

Power : 120 V.a.c.

M/N:

Distance: 3m

Test Mode : TX 914.84MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	4569.138	49.53	peak	-0.55	48.98	74.00	100	100	-25.02	

Radiated Emission Measurement

Operator: Roy

File :3

Data :#4


Date: 2016/3/17

Temperature:24 °C

90.0 dBuV/m

Time: 上午 12:03:51

Humidity:60 %

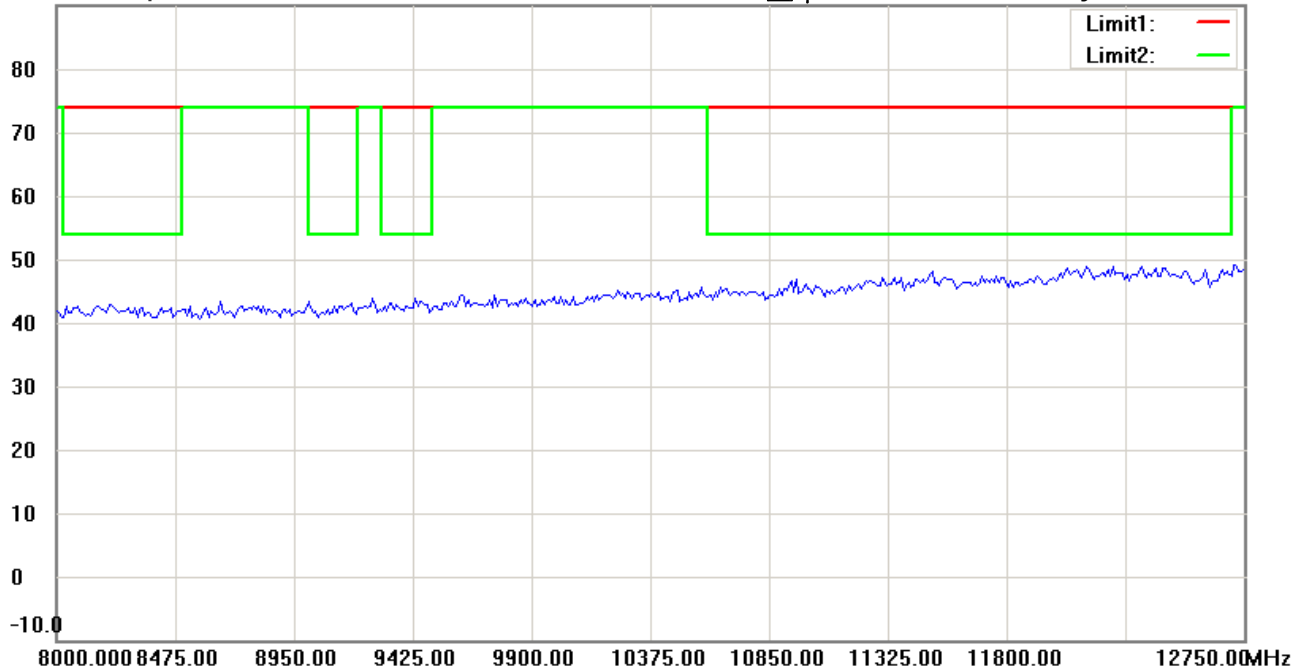

Site : Chamber_01

Condition : FCC Restriction Band_Above 1GHz_PK

Polarization: Horizontal

EUT : W6M21512-15495

Power : 120 V.a.c.

M/N:

Distance: 3m

Test Mode : TX 914.84MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

Radiated Emission Measurement

Operator: Roy

File :3

Data :#10


Date: 2016/3/17

Temperature:24 °C

90.0 dBuV/m

Time: 上午 12:07:17

Humidity:60 %

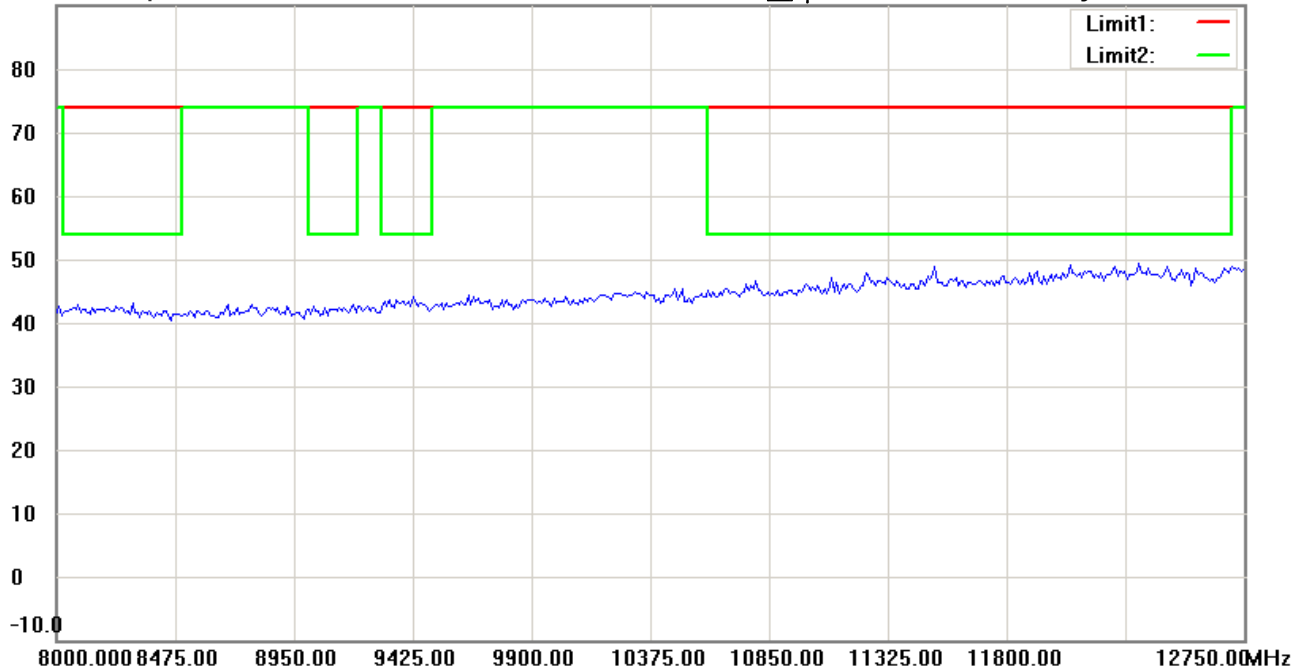

Site : Chamber_01

Condition : FCC Restriction Band_Above 1GHz_PK

EUT : W6M21512-15495

M/N:

Test Mode : TX 914.84MHz


Note :

Polarization: **Vertical**

Power : 120 V.a.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21512-15495-C-1
FCC ID: GX9G4RP

RF2

Radiated Emission Measurement

Operator: Roy

File :1

Data :#1


Date: 2016/3/17

Temperature:24 °C

80.0 dBuV/m

Time: 下午 10:56:41

Humidity:60 %

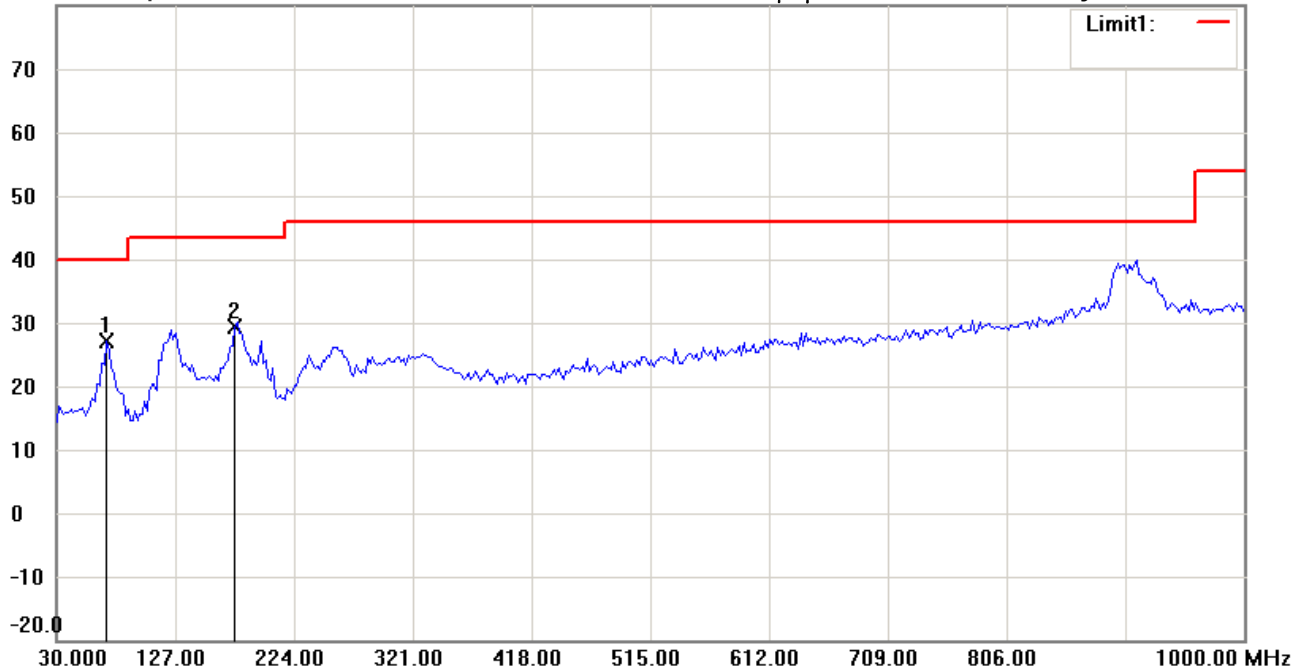

Site : Chamber_01

Condition : FCC_part 15 RE-Class C_30-1000MHz

EUT : W6M21512-15495

M/N:

Test Mode : TX 906.32MHz

Note :

Polarization: *Horizontal*

Power : 120 V.a.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	70.8215	15.87	peak	11.21	27.08	40.00	100	265	-12.92	
	175.7915	15.22	peak	14.17	29.39	43.50	100	95	-14.11	

Radiated Emission Measurement

Operator: Roy

File :1

Data :#2


Date: 2016/3/17

Temperature:24 °C

80.0 dBuV/m

Time: 下午 10:57:27

Humidity:60 %

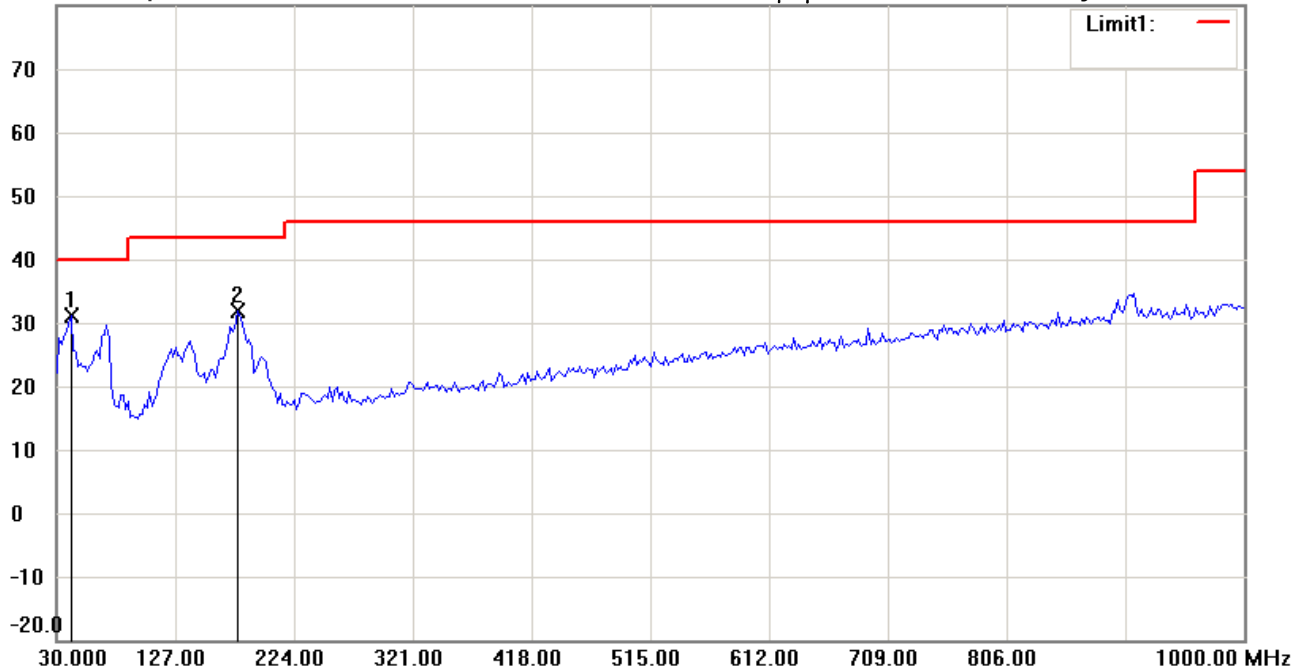

Site : Chamber_01

Condition : FCC_part 15 RE-Class C_30-1000MHz

EUT : W6M21512-15495

M/N:

Test Mode : TX 906.32MHz

Note :

Polarization: **Vertical**

Power : 120 V.a.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	41.6633	17.14	peak	13.97	31.11	40.00	100	110	-8.89	
	177.7355	18.05	peak	13.95	32.00	43.50	100	45	-11.50	

Radiated Emission Measurement

Operator: Roy

File :3

Data :#1


Date: 2016/3/17

Temperature:24 °C

90.0 dBuV/m

Time: 下午 11:42:09

Humidity:60 %

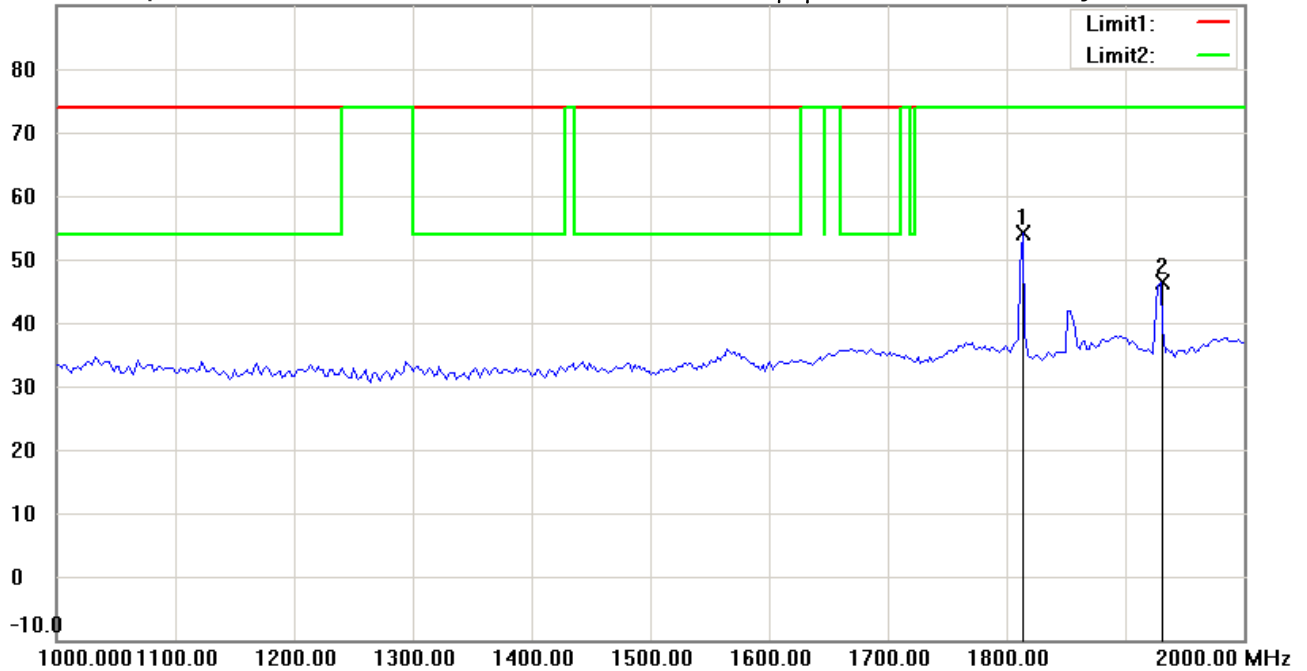

Site : Chamber_01

Condition : FCC Restriction Band_Above 1GHz_PK

EUT : W6M21512-15495

M/N:

Test Mode : TX 906.32MHz

Note :

Polarization: Horizontal

Power : 120 V.a.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	1813.627	61.02	peak	-6.81	54.21	74.00	100	170	-19.79	
	1929.860	52.12	peak	-5.86	46.26	74.00	100	45	-27.74	

Radiated Emission Measurement

Operator: Roy

File :3

Data :#7


Date: 2016/3/17

Temperature:24 °C

90.0 dBuV/m

Time: 下午 11:46:13

Humidity:60 %

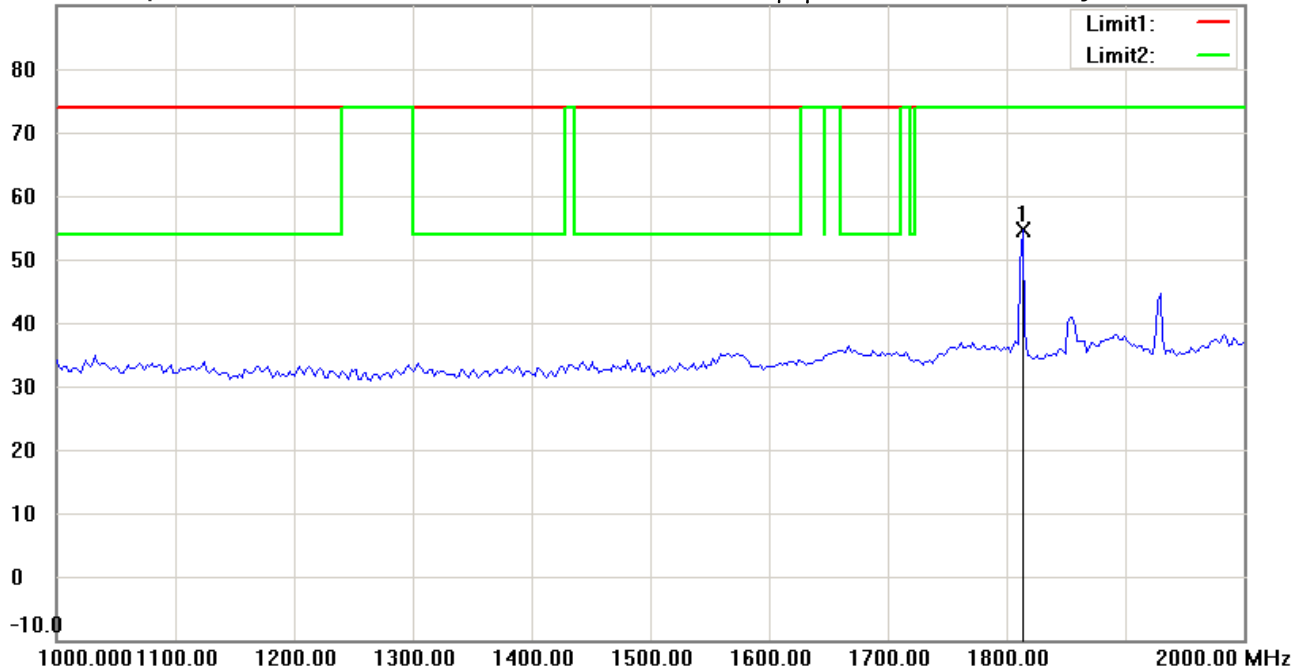

Site : Chamber_01

Condition : FCC Restriction Band_Above 1GHz_PK

EUT : W6M21512-15495

M/N:

Test Mode : TX 906.32MHz

Note :

Polarization: Vertical

Power : 120 V.a.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	1813.627	61.38	peak	-6.81	54.57	74.00	100	100	-19.43	

Radiated Emission Measurement

Operator: Roy

File :3

Data :#2


Date: 2016/3/17

Temperature:24 °C

90.0 dBuV/m

Time: 下午 11:42:55

Humidity:60 %

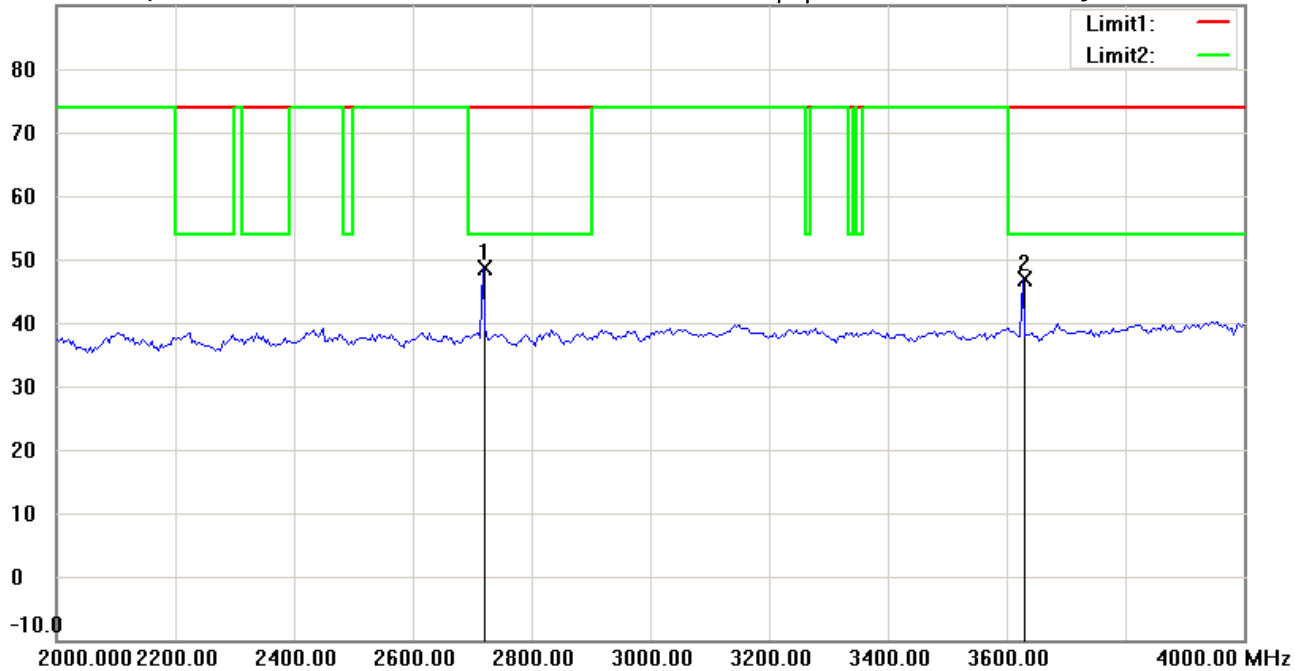

Site : Chamber_01

Condition : FCC Restriction Band_Above 1GHz_PK

EUT : W6M21512-15495

M/N:

Test Mode : TX 906.32MHz

Note :

Polarization: *Horizontal*

Power : 120 V.a.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	2717.435	52.65	peak	-4.10	48.55	74.00	100	155	-25.45	
	3627.255	49.05	peak	-2.26	46.79	74.00	100	200	-27.21	

Radiated Emission Measurement

Operator: Roy

File :3

Data :#8


Date: 2016/3/17

Temperature:24 °C

90.0 dBuV/m

Time: 下午 11:47:05

Humidity:60 %

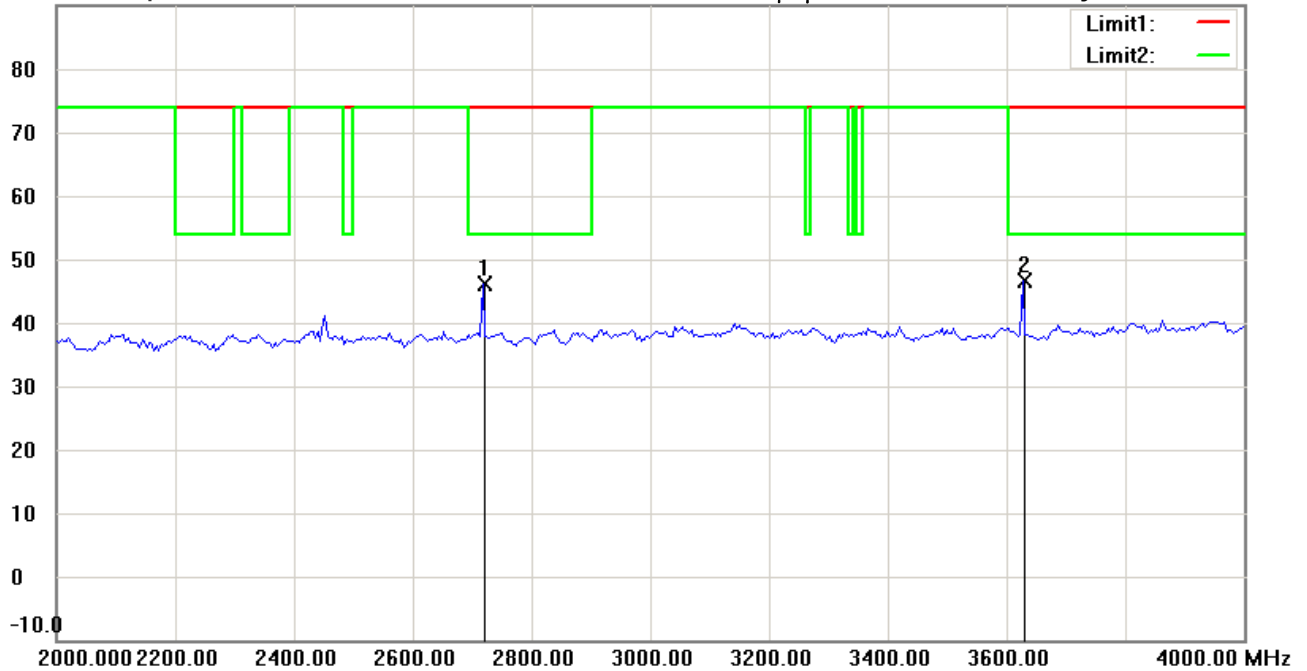

Site : Chamber_01

Condition : FCC Restriction Band_Above 1GHz_PK

EUT : W6M21512-15495

M/N:

Test Mode : TX 906.32MHz

Note :

Polarization: Vertical

Power : 120 V.a.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	2717.435	50.32	peak	-4.10	46.22	74.00	100	225	-27.78	
*	3627.255	48.96	peak	-2.26	46.70	74.00	100	145	-27.30	

Radiated Emission Measurement

Operator: Roy

File :3

Data :#3


Date: 2016/3/17

Temperature:24 °C

90.0 dBuV/m

Time: 下午 11:43:41

Humidity:60 %

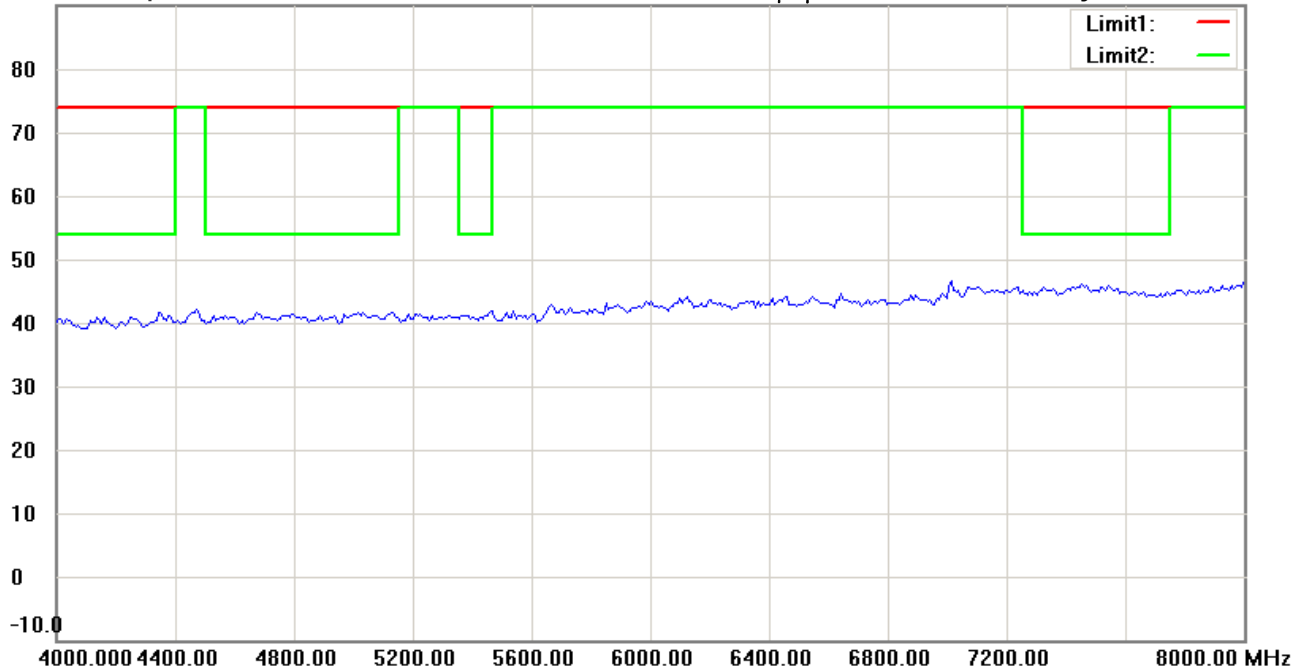

Site : Chamber_01

Condition : FCC Restriction Band_Above 1GHz_PK

EUT : W6M21512-15495

M/N:

Test Mode : TX 906.32MHz

Note :

Polarization: Horizontal

Power : 120 V.a.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

Radiated Emission Measurement

Operator: Roy

File :3

Data :#9


Date: 2016/3/17

Temperature:24 °C

90.0 dBuV/m

Time: 下午 11:47:51

Humidity:60 %

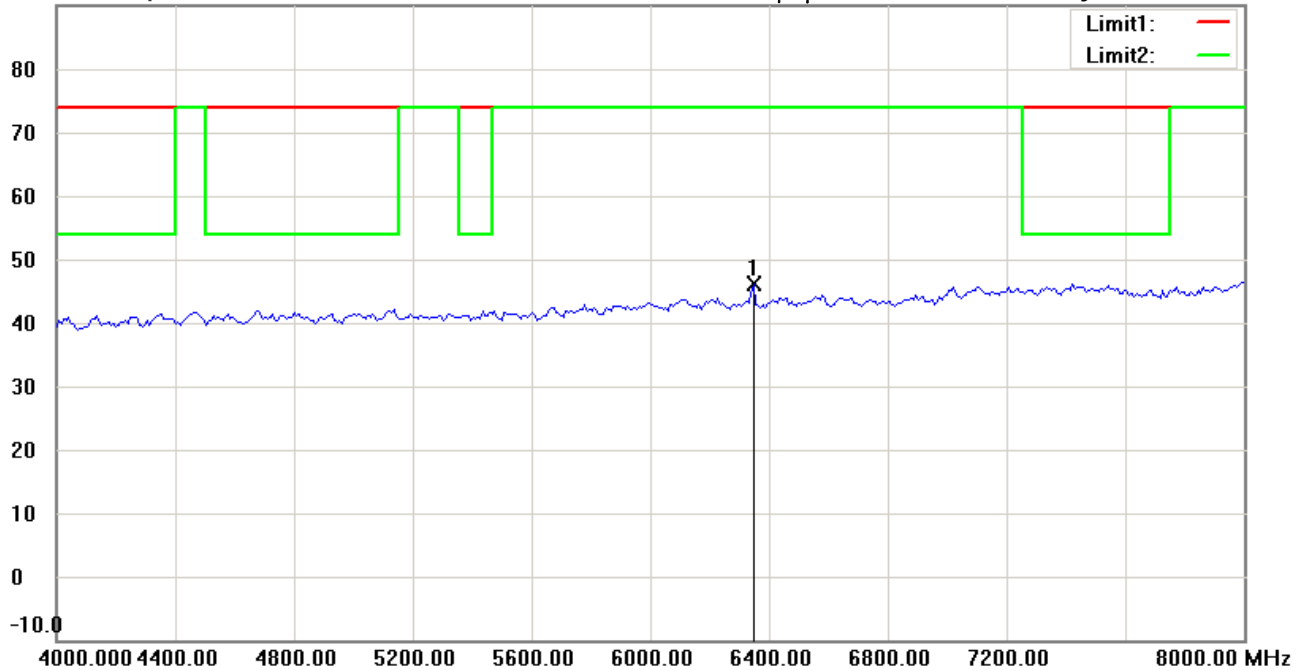

Site : Chamber_01

Condition : FCC Restriction Band_Above 1GHz_PK

EUT : W6M21512-15495

M/N:

Test Mode : TX 906.32MHz

Note :

Polarization: **Vertical**

Power : 120 V.a.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	6348.697	42.64	peak	3.41	46.05	74.00	100	85	-27.95	

Radiated Emission Measurement

Operator: Roy

File :3

Data :#4


Date: 2016/3/17

Temperature:24 °C

90.0 dBuV/m

Time: 下午 11:45:04

Humidity:60 %

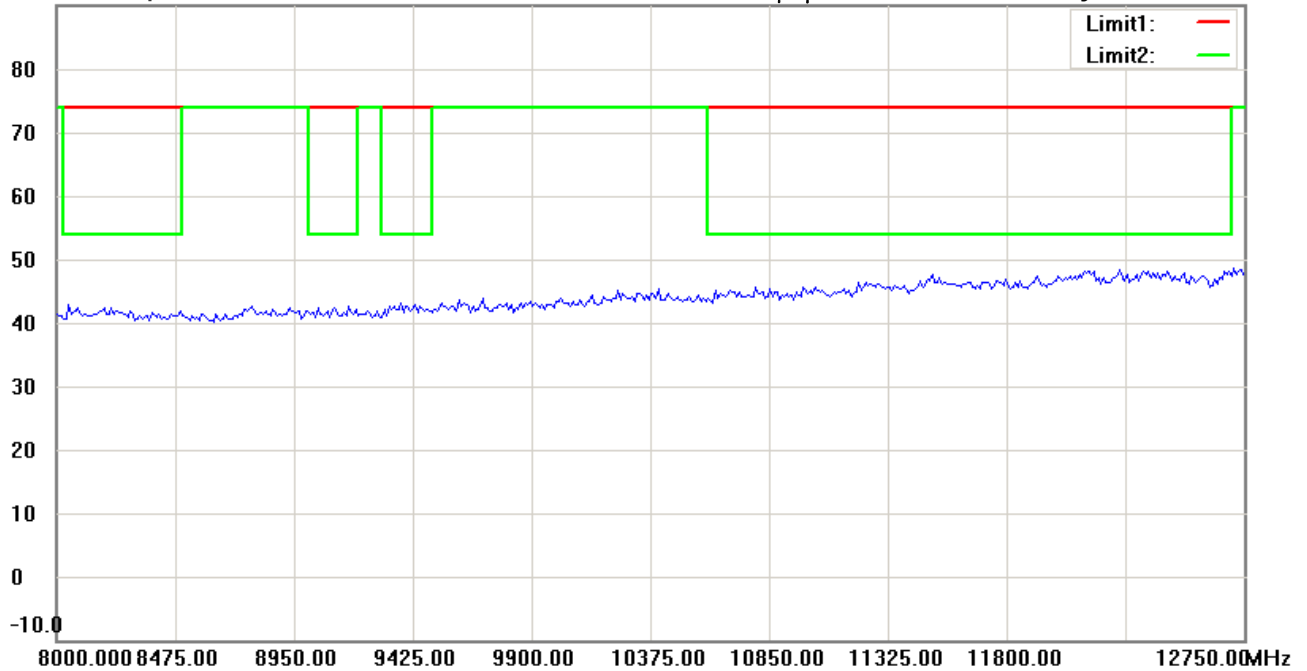

Site : Chamber_01

Condition : FCC Restriction Band_Above 1GHz_PK

EUT : W6M21512-15495

M/N:

Test Mode : TX 906.32MHz

Note :

Polarization: *Horizontal*

Power : 120 V.a.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

Radiated Emission Measurement

Operator: Roy

File :3

Data :#10


Date: 2016/3/17

Temperature:24 °C

90.0 dBuV/m

Time: 下午 11:48:36

Humidity:60 %

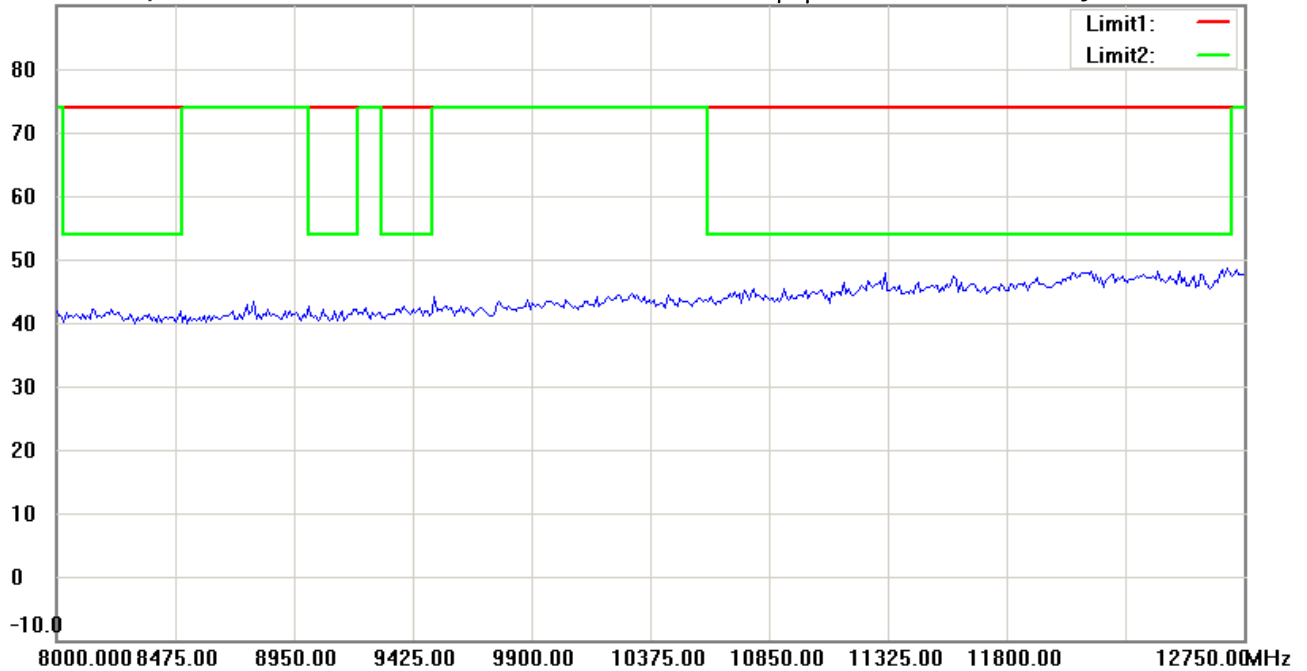

Site : Chamber_01

Condition : FCC Restriction Band_Above 1GHz_PK

Polarization: Vertical

EUT : W6M21512-15495

Power : 120 V.a.c.

M/N:

Distance: 3m

Test Mode : TX 906.32MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

Radiated Emission Measurement

Operator: Roy

File :1

Data :#1

Date: 2016/3/17

Temperature:24 °C

80.0 dBuV/m

Time: 下午 10:50:25

Humidity:60 %



Site : Chamber_01

Condition : FCC_part 15 RE-Class C_30-1000MHz

EUT : W6M21512-15495

M/N:

Test Mode : TX 910.76MHz

Note :

Polarization: *Horizontal*

Power : 120 V.a.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	123.3066	14.52	peak	13.95	28.47	43.50	100	200	-15.03	
*	177.7355	16.33	peak	13.95	30.28	43.50	100	260	-13.22	

Radiated Emission Measurement

Operator: Roy

File :1

Data :#2


Date: 2016/3/17

Temperature:24 °C

80.0 dBuV/m

Time: 下午 10:51:10

Humidity:60 %

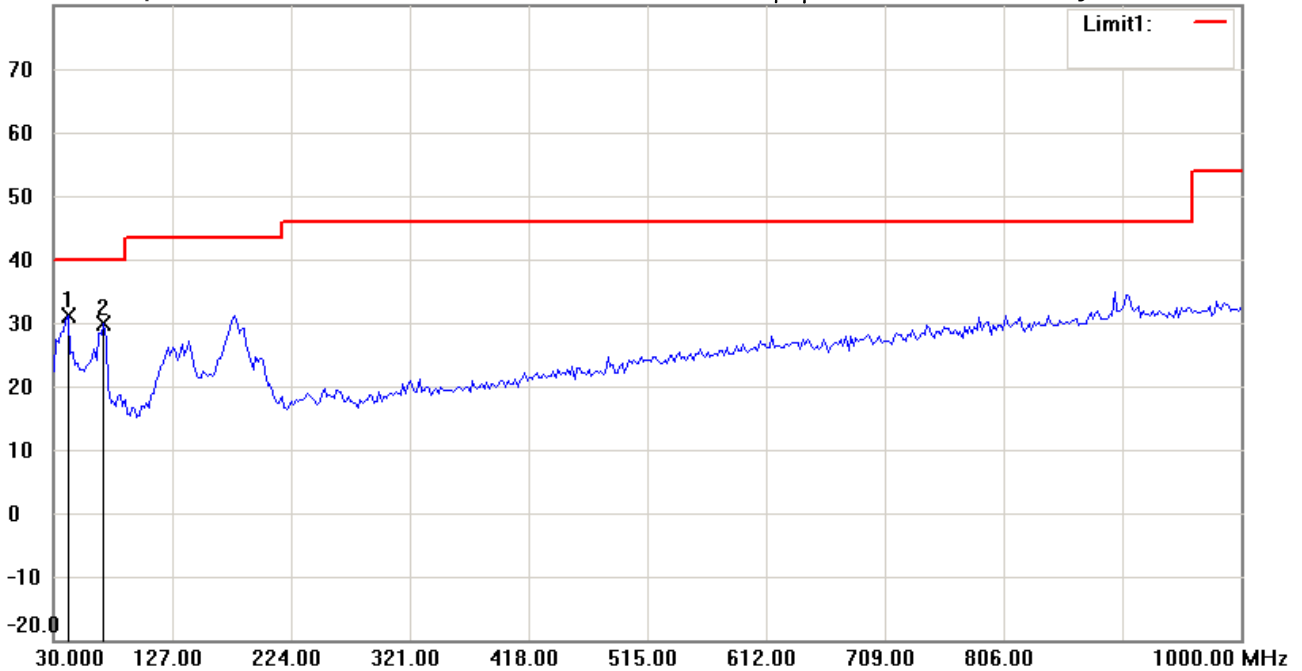

Site : Chamber_01

Condition : FCC_part 15 RE-Class C_30-1000MHz

EUT : W6M21512-15495

M/N:

Test Mode : TX 910.76MHz

Note :

Polarization: **Vertical**

Power : 120 V.a.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	41.6633	17.20	peak	13.97	31.17	40.00	100	315	-8.83	
	70.8215	18.71	peak	11.21	29.92	40.00	100	150	-10.08	

Radiated Emission Measurement

Operator: Roy

File :3

Data :#1


Date: 2016/3/17

Temperature:24 °C

90.0 dBuV/m

Time: 下午 11:56:27

Humidity:60 %

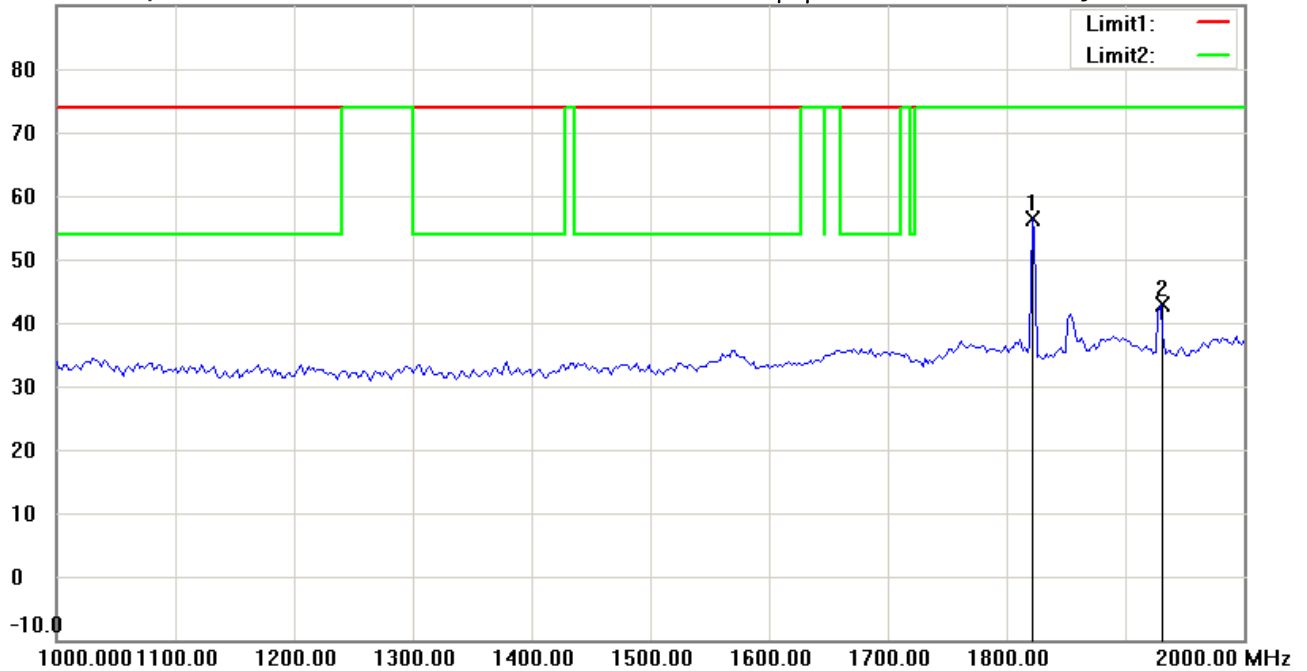

Site : Chamber_01

Condition : FCC Restriction Band_Above 1GHz_PK

EUT : W6M21512-15495

M/N:

Test Mode : TX 910.76MHz

Note :

Polarization: *Horizontal*

Power : 120 V.a.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	1821.643	63.17	peak	-6.73	56.44	74.00	100	80	-17.56	
	1929.860	48.76	peak	-5.86	42.90	74.00	100	240	-31.10	

Radiated Emission Measurement

Operator: Roy

File :3

Data :#7


Date: 2016/3/18

Temperature:24 °C

90.0 dBuV/m

Time: 上午 12:00:52

Humidity:60 %

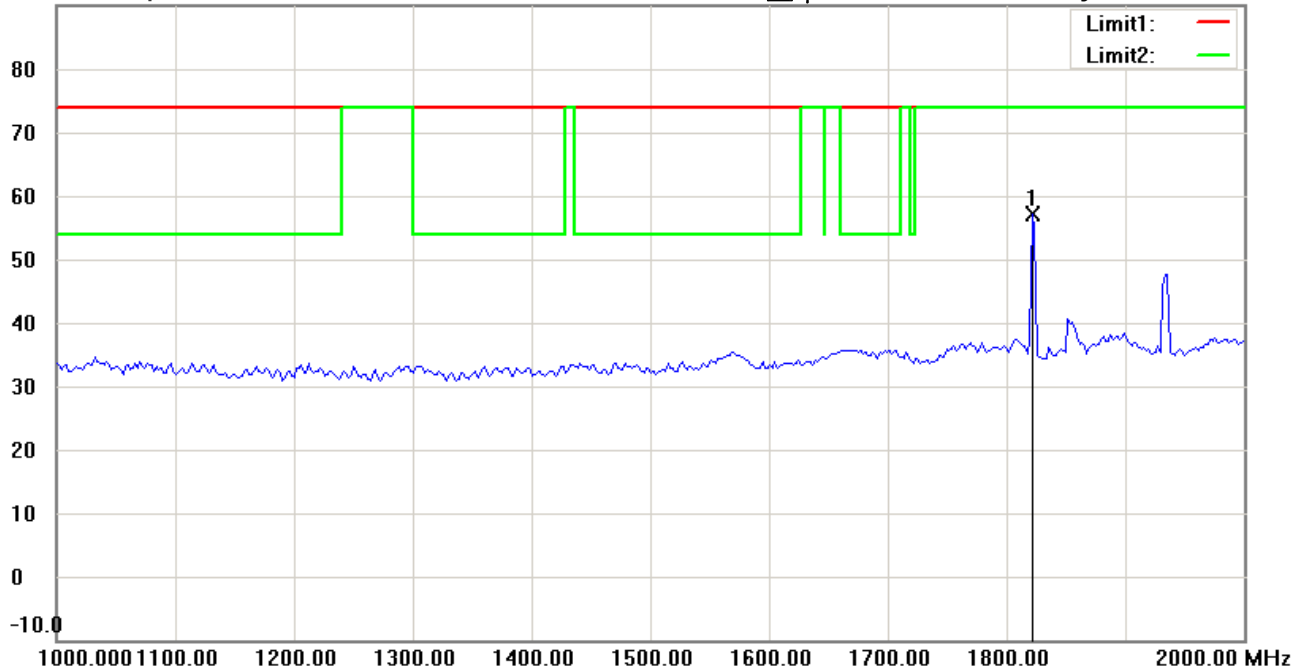

Site : Chamber_01

Condition : FCC Restriction Band_Above 1GHz_PK

EUT : W6M21512-15495

M/N:

Test Mode : TX 910.76MHz

Note :

Polarization: **Vertical**

Power : 120 V.a.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	1821.643	63.76	peak	-6.73	57.03	74.00	100	100	-16.97	

Radiated Emission Measurement

Operator: Roy

File :3

Data :#2


Date: 2016/3/17

Temperature:24 °C

90.0 dBuV/m

Time: 下午 11:58:12

Humidity:60 %

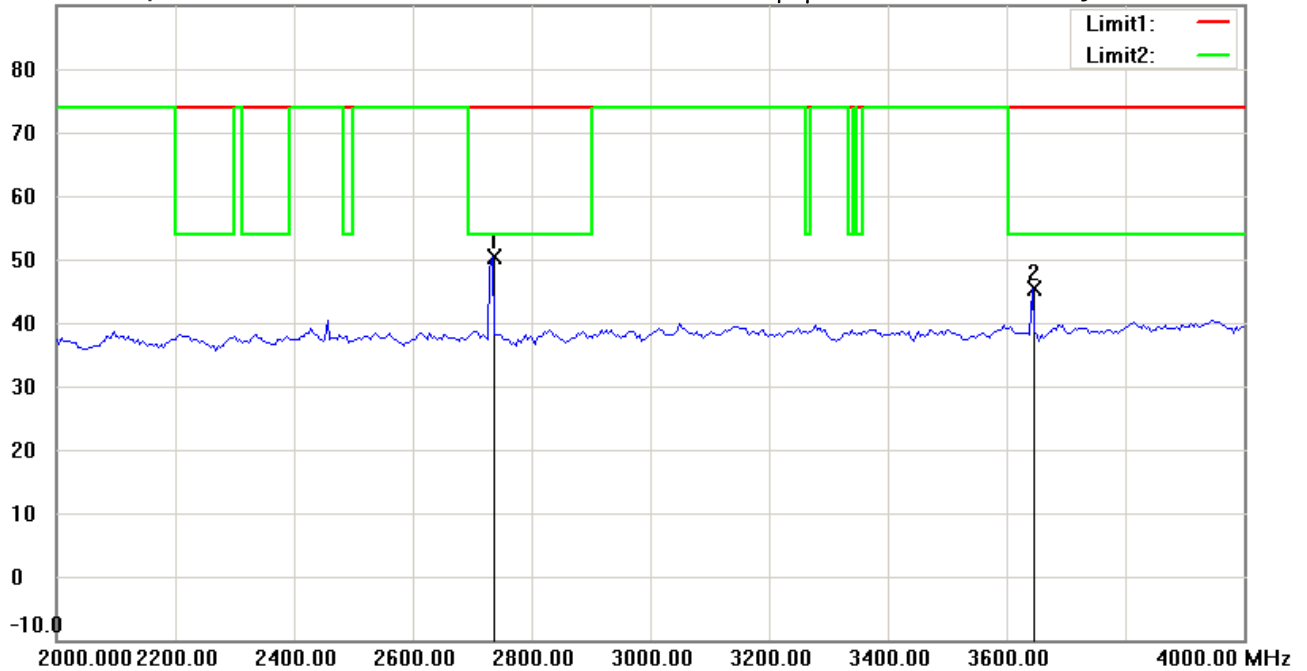

Site : Chamber_01

Condition : FCC Restriction Band_Above 1GHz_PK

EUT : W6M21512-15495

M/N:

Test Mode : TX 910.76MHz

Note :

Polarization: *Horizontal*

Power : 120 V.a.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	2733.467	54.56	peak	-4.10	50.46	74.00	100	250	-23.54	
	3643.287	47.63	peak	-2.24	45.39	74.00	100	75	-28.61	

Radiated Emission Measurement

Operator: Roy

File :3

Data :#8


Date: 2016/3/18

Temperature:24 °C

90.0 dBuV/m

Time: 上午 12:01:37

Humidity:60 %

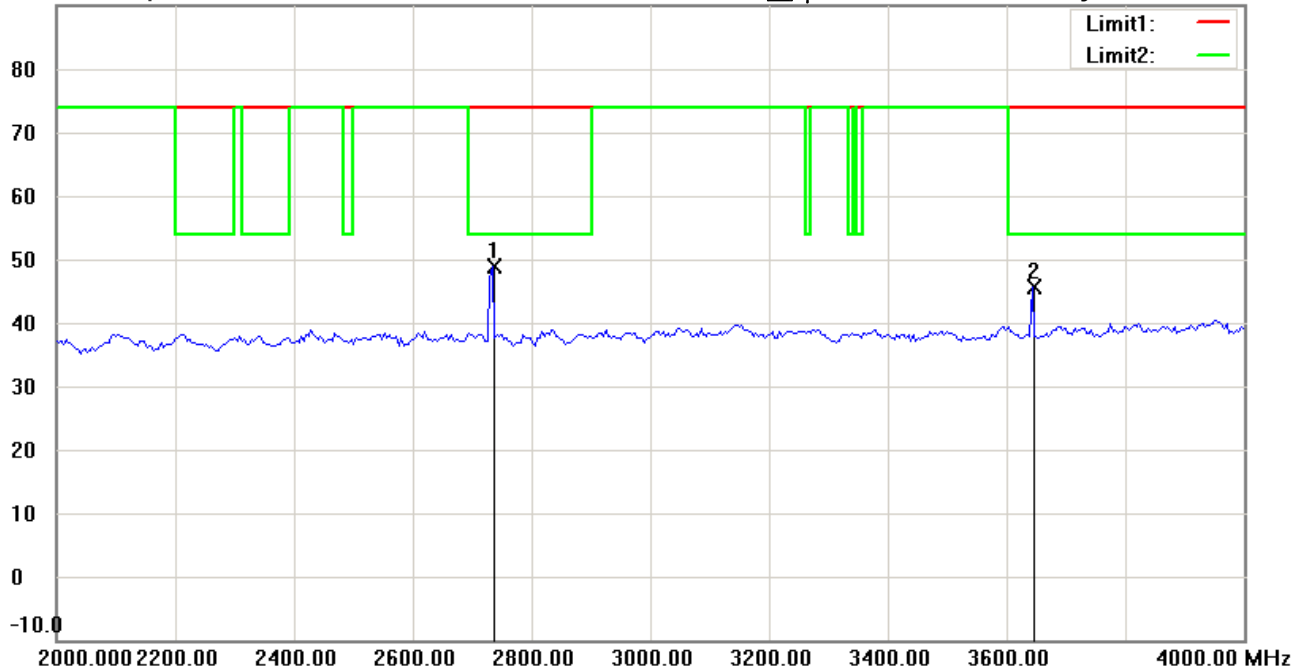

Site : Chamber_01

Condition : FCC Restriction Band_Above 1GHz_PK

EUT : W6M21512-15495

M/N:

Test Mode : TX 910.76MHz

Note :

Polarization: Vertical

Power : 120 V.a.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	2733.467	53.00	peak	-4.10	48.90	74.00	100	220	-25.10	
	3643.287	47.76	peak	-2.24	45.52	74.00	100	265	-28.48	

Radiated Emission Measurement

Operator: Roy

File :3

Data :#3


Date: 2016/3/17

Temperature:24 °C

90.0 dBuV/m

Time: 下午 11:58:58

Humidity:60 %

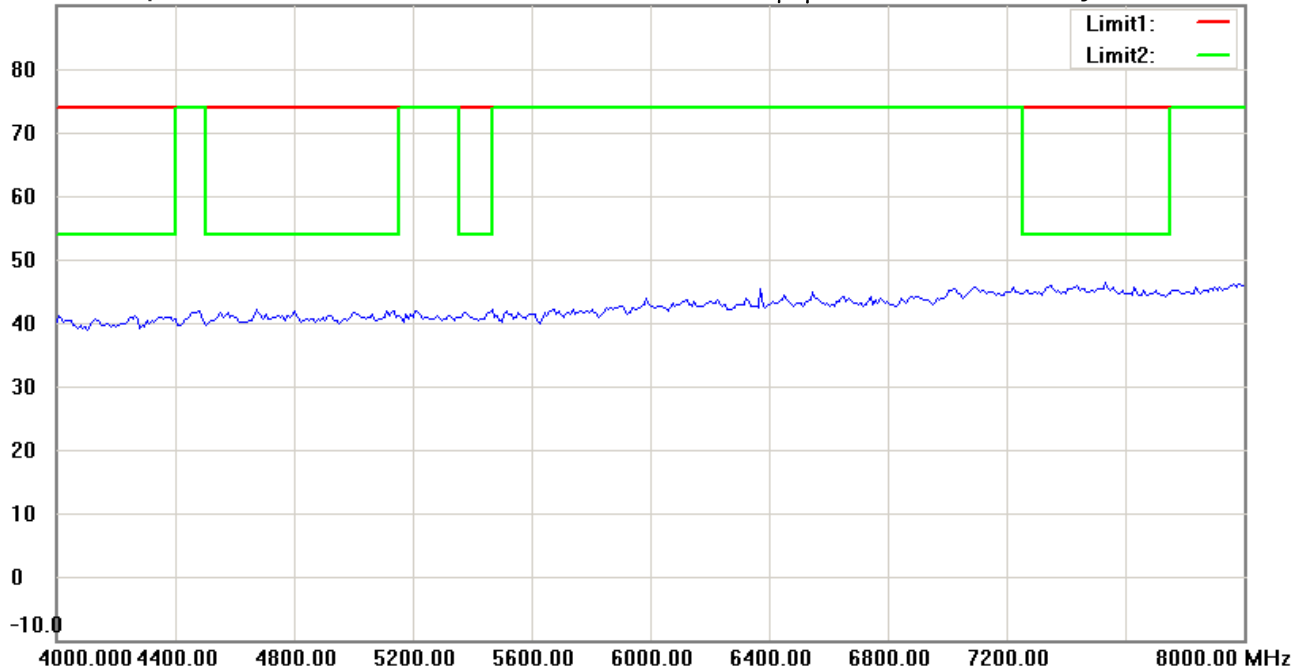

Site : Chamber_01

Condition : FCC Restriction Band_Above 1GHz_PK

EUT : W6M21512-15495

M/N:

Test Mode : TX 910.76MHz

Note :

Polarization: *Horizontal*

Power : 120 V.a.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

Radiated Emission Measurement

Operator: Roy

File :3

Data :#9


Date: 2016/3/18

Temperature:24 °C

90.0 dBuV/m

Time: 上午 12:02:23

Humidity:60 %

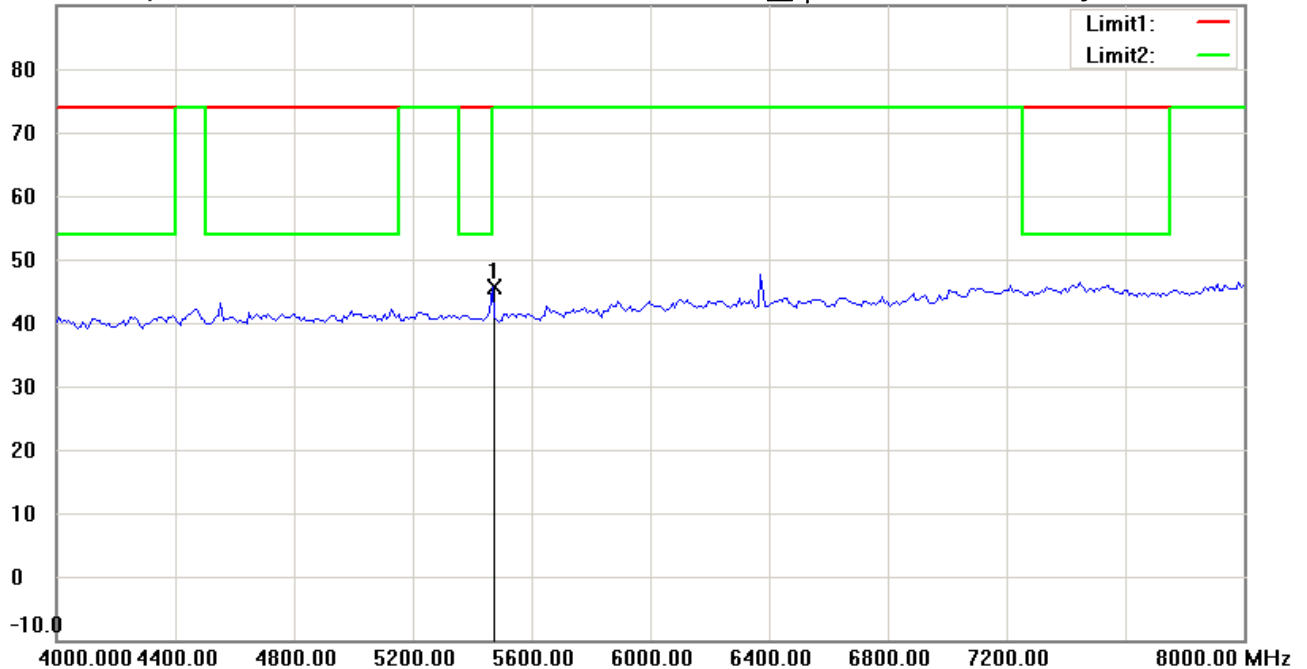

Site : Chamber_01

Condition : FCC Restriction Band_Above 1GHz_PK

Polarization: **Vertical**

EUT : W6M21512-15495

Power : 120 V.a.c.

M/N:

Distance: 3m

Test Mode : TX 910.76MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	5466.934	44.39	peak	1.27	45.66	74.00	100	45	-28.34	

Radiated Emission Measurement

Operator: Roy

File :3

Data :#4


Date: 2016/3/17

Temperature:24 °C

90.0 dBuV/m

Time: 下午 11:59:42

Humidity:60 %

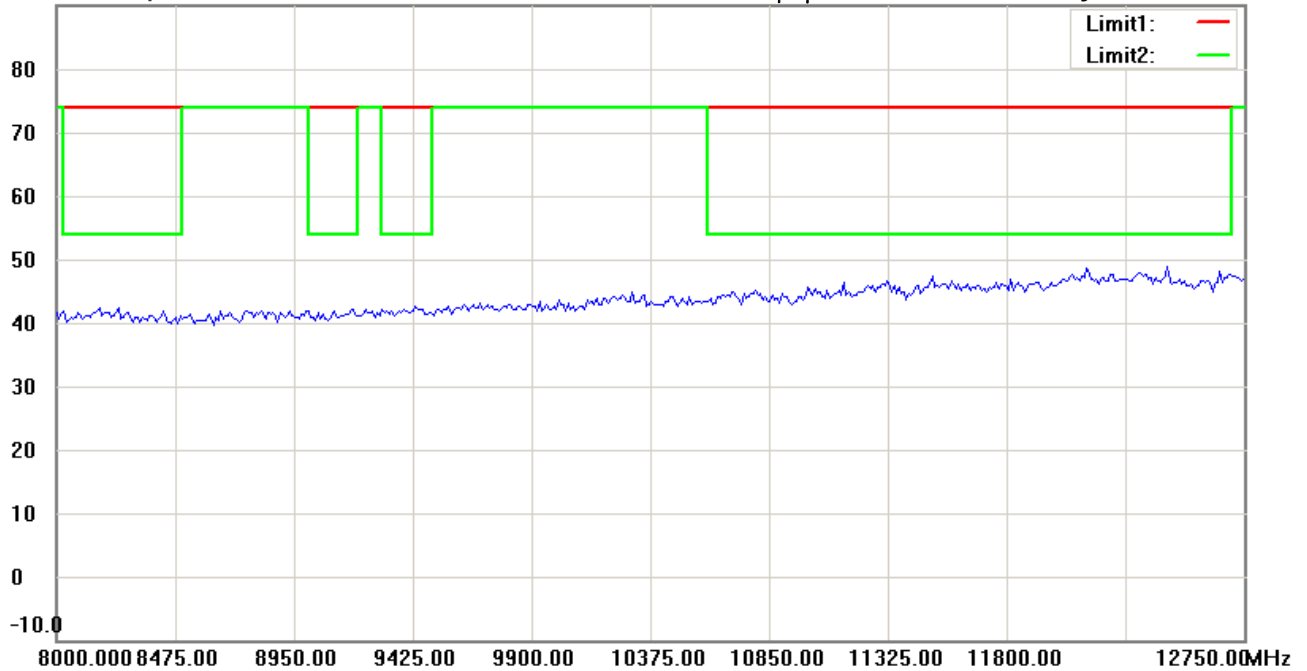

Site : Chamber_01

Condition : FCC Restriction Band_Above 1GHz_PK

Polarization: *Horizontal*

EUT : W6M21512-15495

Power : 120 V.a.c.

M/N:

Distance: 3m

Test Mode : TX 910.76MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

Radiated Emission Measurement

Operator: Roy

File :3

Data :#10


Date: 2016/3/18

Temperature:24 °C

90.0 dBuV/m

Time: 上午 12:03:50

Humidity:60 %

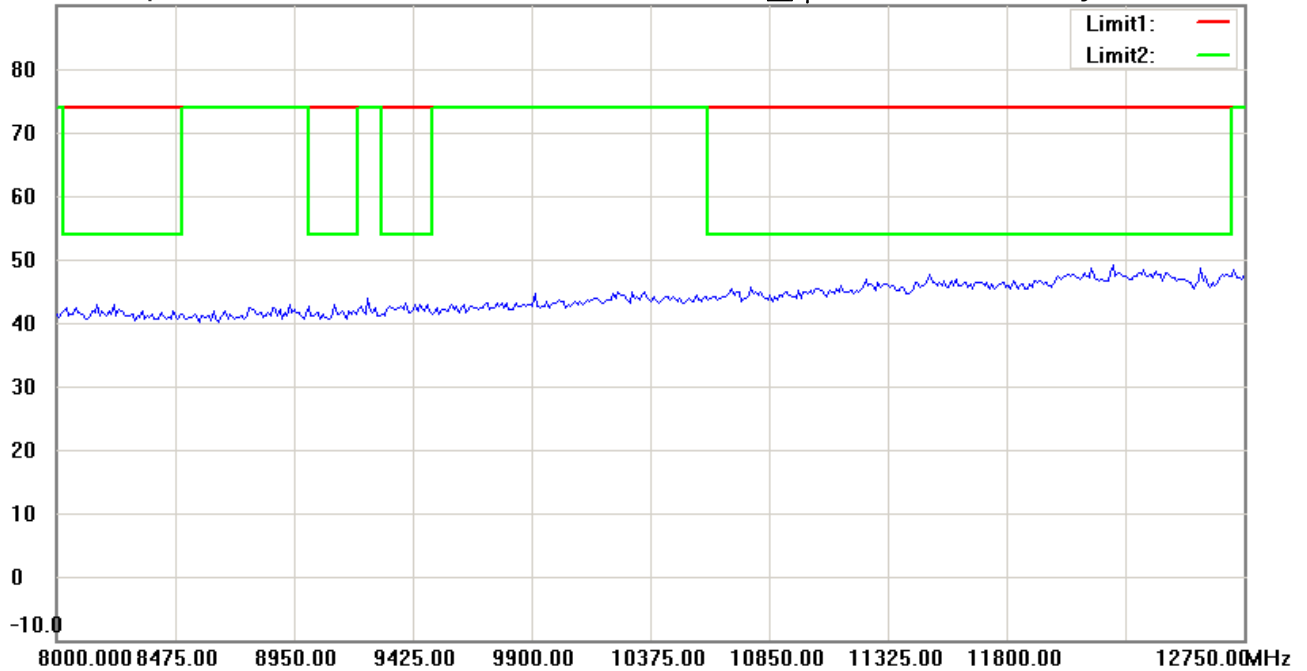

Site : Chamber_01

Condition : FCC Restriction Band_Above 1GHz_PK

EUT : W6M21512-15495

M/N:

Test Mode : TX 910.76MHz

Note :

Polarization: **Vertical**

Power : 120 V.a.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

Radiated Emission Measurement

Operator: Roy

File :1

Data :#1


Date: 2016/3/17

Temperature:24 °C

80.0 dBuV/m

Time: 下午 10:24:27

Humidity:60 %

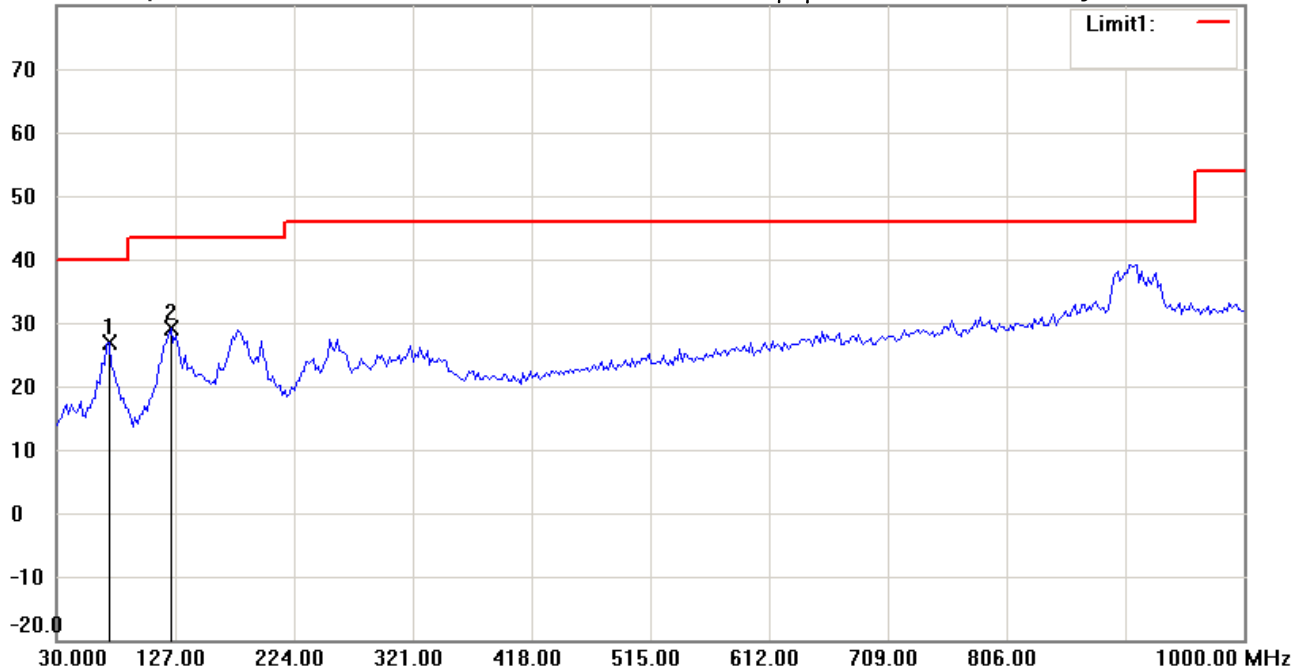

Site : Chamber_01

Condition : FCC_part 15 RE-Class C_30-1000MHz

EUT : W6M21512-15495

M/N:

Test Mode : TX 914.84MHz

Note :

Polarization: *Horizontal*

Power : 120 V.a.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	72.7655	15.93	peak	10.88	26.81	40.00	100	80	-13.19	
	123.3066	15.21	peak	13.95	29.16	43.50	100	310	-14.34	

Radiated Emission Measurement

Operator: Roy

File :1

Data :#2


Date: 2016/3/17

Temperature:24 °C

80.0 dBuV/m

Time: 下午 10:25:12

Humidity:60 %

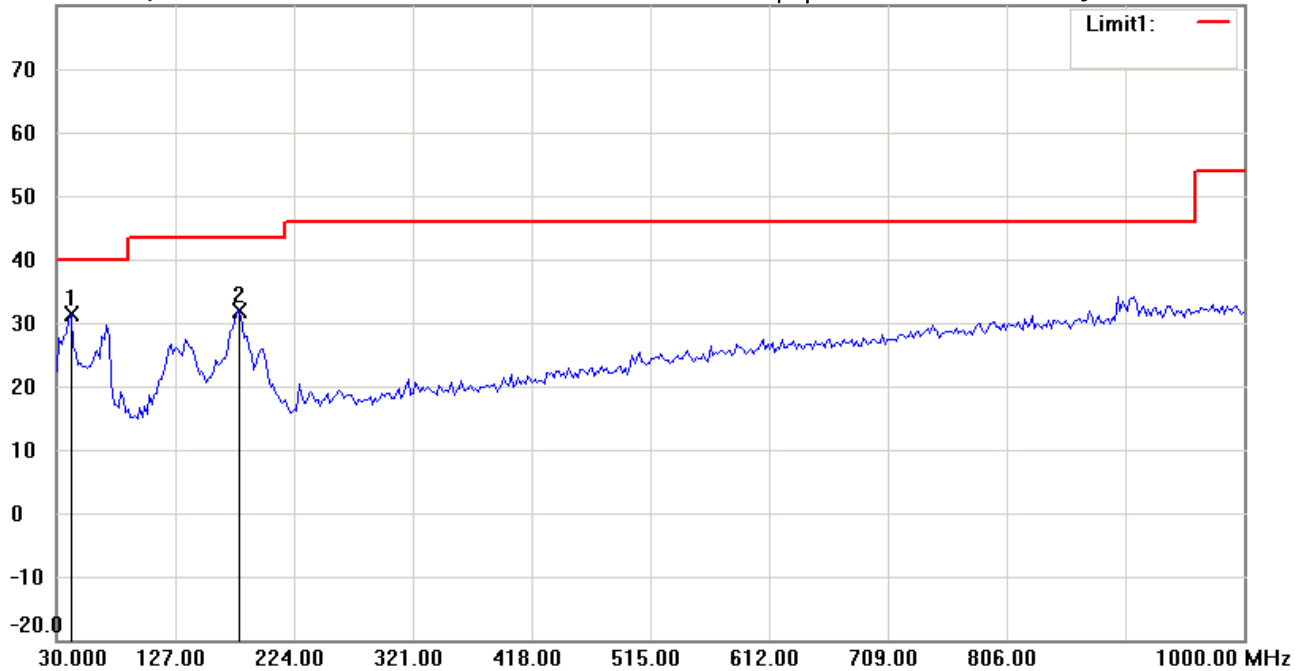

Site : Chamber_01

Condition : FCC_part 15 RE-Class C_30-1000MHz

EUT : W6M21512-15495

M/N:

Test Mode : TX 914.84MHz

Note :

Polarization: Vertical

Power : 120 V.a.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	41.6632	17.39	peak	13.97	31.36	40.00	100	235	-8.64	
	179.6793	18.26	peak	13.73	31.99	43.50	100	100	-11.51	

Radiated Emission Measurement

Operator: Roy

File :3

Data :#1


Date: 2016/3/18

Temperature:24 °C

90.0 dBuV/m

Time: 上午 12:07:54

Humidity:60 %

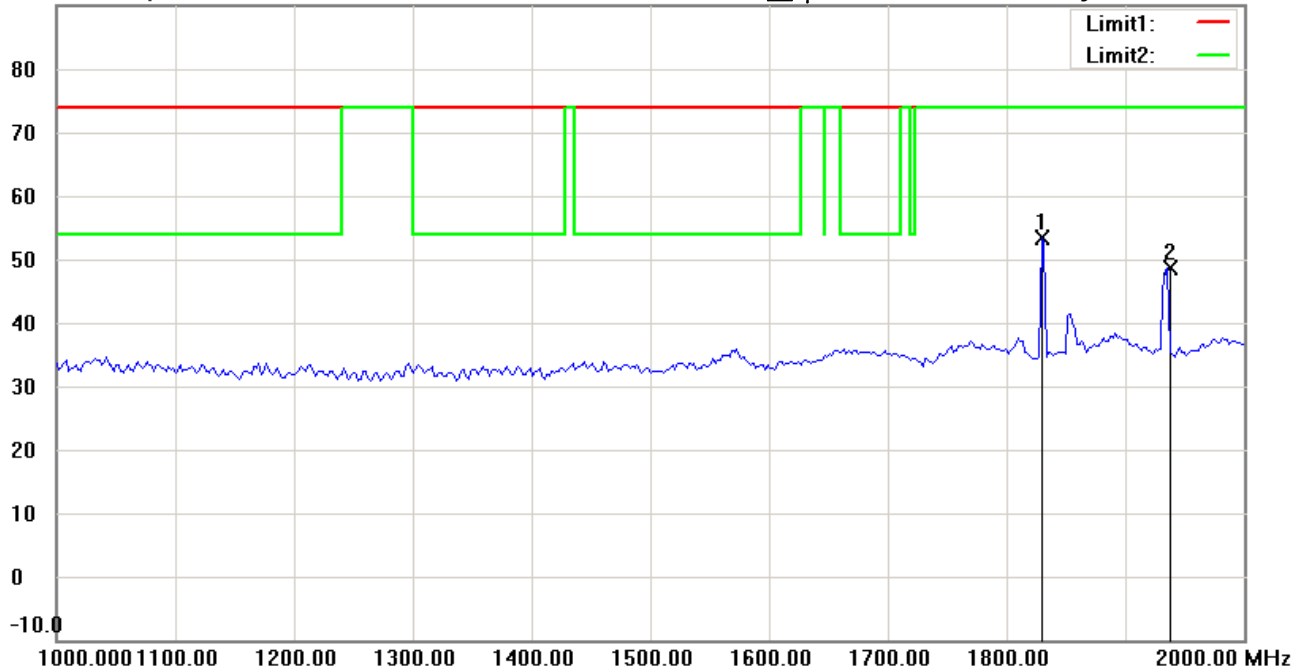

Site : Chamber_01

Condition : FCC Restriction Band_Above 1GHz_PK

EUT : W6M21512-15495

M/N:

Test Mode : TX 914.84MHz

Note :

Polarization: *Horizontal*

Power : 120 V.a.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	1829.659	60.09	peak	-6.65	53.44	74.00	100	255	-20.56	
	1935.872	54.38	peak	-5.84	48.54	74.00	100	145	-25.46	

Radiated Emission Measurement

Operator: Roy

File :3

Data :#7


Date: 2016/3/18

Temperature:24 °C

90.0 dBuV/m

Time: 上午 12:11:20

Humidity:60 %

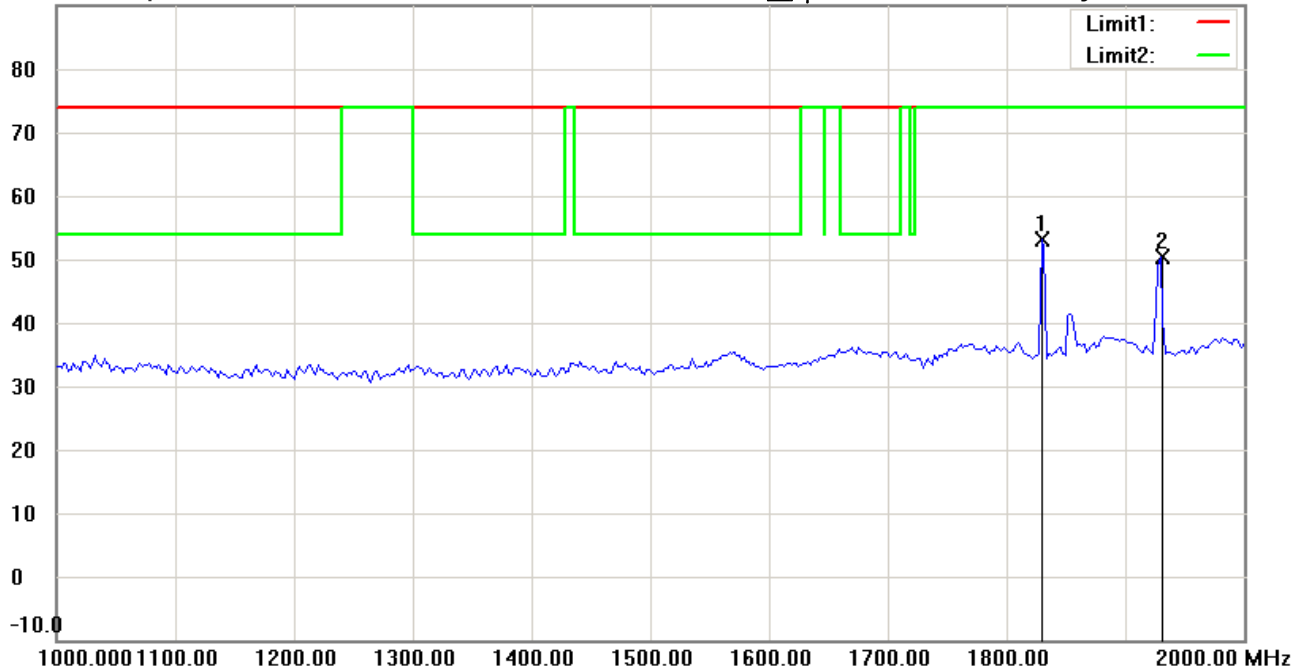

Site : Chamber_01

Condition : FCC Restriction Band_Above 1GHz_PK

EUT : W6M21512-15495

M/N:

Test Mode : TX 914.84MHz

Note :

Polarization: **Vertical**

Power : 120 V.a.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	1829.659	59.83	peak	-6.65	53.18	74.00	100	30	-20.82	
	1929.860	56.28	peak	-5.86	50.42	74.00	100	100	-23.58	

Radiated Emission Measurement

Operator: Roy

File :3

Data :#2


Date: 2016/3/18

Temperature:24 °C

90.0 dBuV/m

Time: 上午 12:08:40

Humidity:60 %

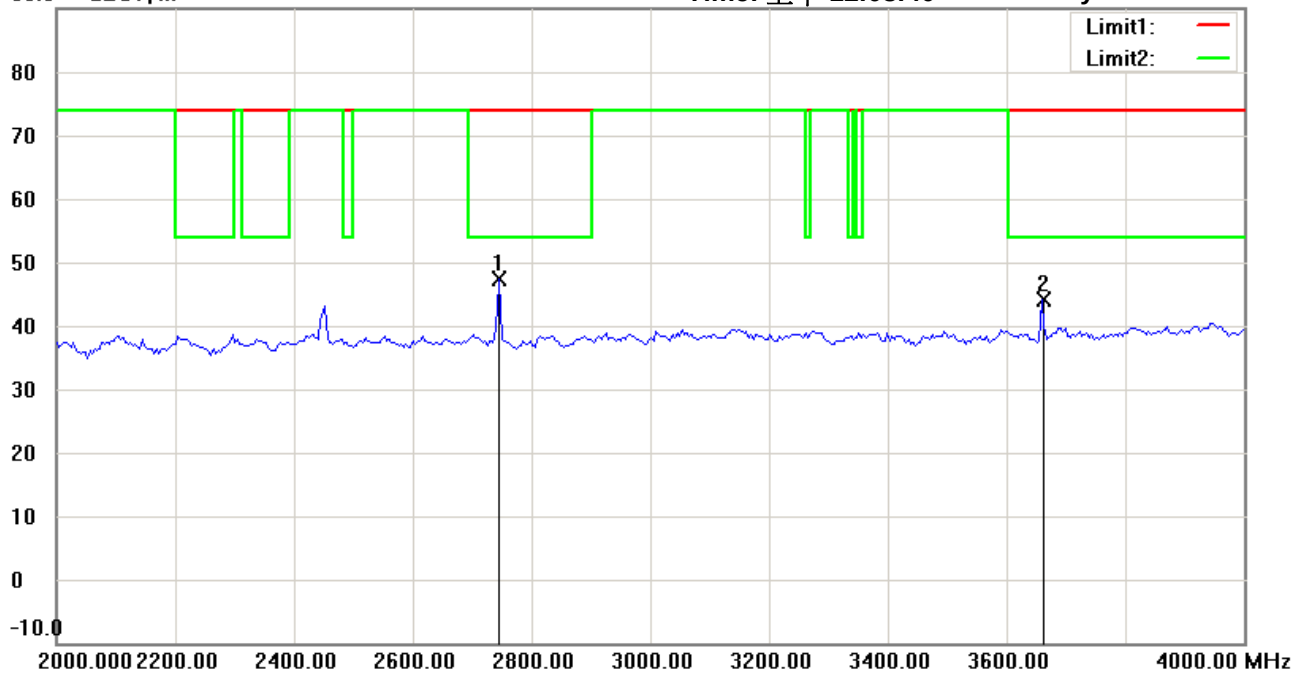

Site : Chamber_01

Condition : FCC Restriction Band_Above 1GHz_PK

Polarization: *Horizontal*

EUT : W6M21512-15495

Power : 120 V.a.c.

M/N:

Distance: 3m

Test Mode : TX 914.84MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	2745.491	51.52	peak	-4.10	47.42	74.00	100	295	-26.58	
	3659.319	46.39	peak	-2.22	44.17	74.00	100	85	-29.83	

Radiated Emission Measurement

Operator: Roy

File :3

Data :#8


Date: 2016/3/18

Temperature:24 °C

90.0 dBuV/m

Time: 上午 12:12:05

Humidity:60 %

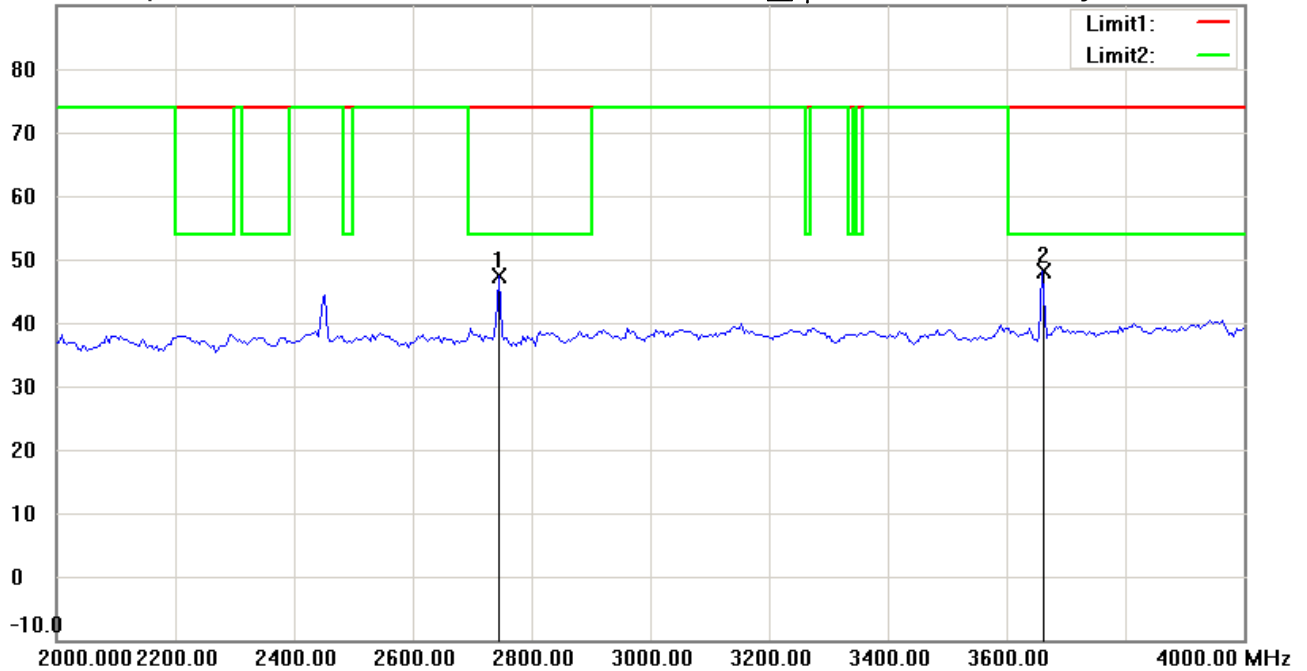

Site : Chamber_01

Condition : FCC Restriction Band_Above 1GHz_PK

Polarization: Vertical

EUT : W6M21512-15495

Power : 120 V.a.c.

M/N:

Distance: 3m

Test Mode : TX 914.84MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	2745.491	51.37	peak	-4.10	47.27	74.00	100	55	-26.73	
*	3659.319	50.38	peak	-2.22	48.16	74.00	100	245	-25.84	

Radiated Emission Measurement

Operator: Roy

File :3

Data :#3


Date: 2016/3/18

Temperature:24 °C

90.0 dBuV/m

Time: 上午 12:09:26

Humidity:60 %

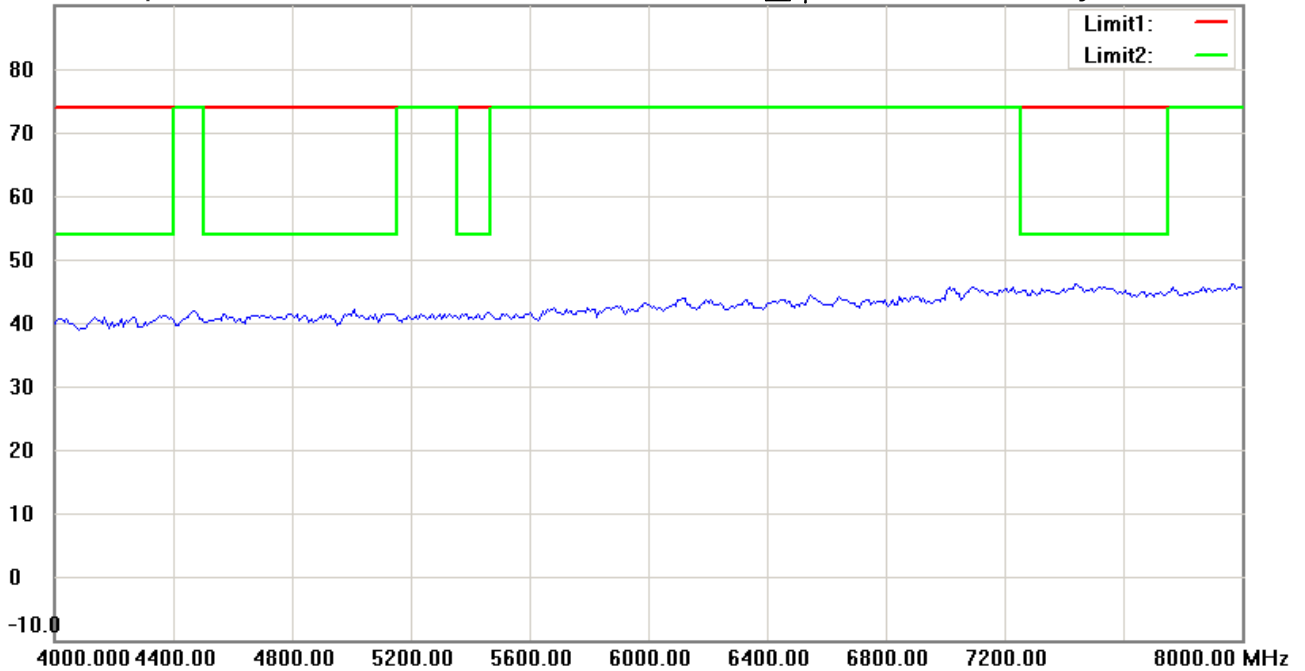

Site : Chamber_01

Condition : FCC Restriction Band_Above 1GHz_PK

EUT : W6M21512-15495

M/N:

Test Mode : TX 914.84MHz

Note :

Polarization: Horizontal

Power : 120 V.a.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

Radiated Emission Measurement

Operator: Roy

File :3

Data :#9


Date: 2016/3/18

Temperature:24 °C

90.0 dBuV/m

Time: 上午 12:12:51

Humidity:60 %

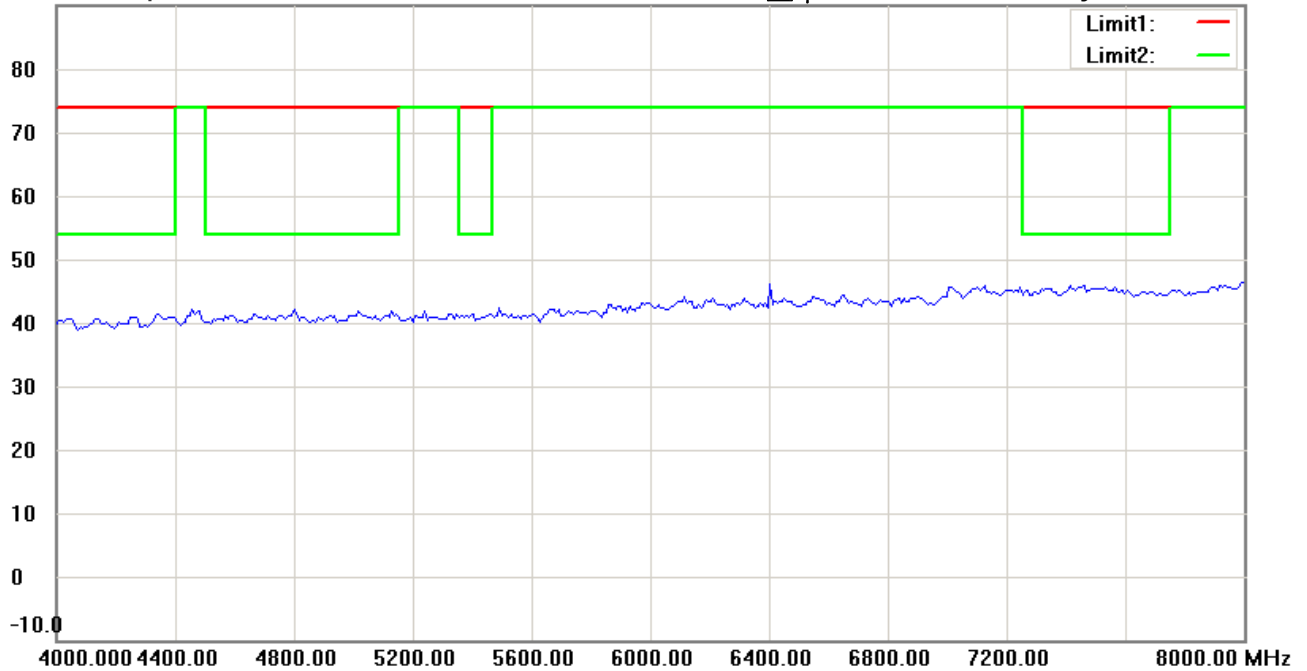

Site : Chamber_01

Condition : FCC Restriction Band_Above 1GHz_PK

EUT : W6M21512-15495

M/N:

Test Mode : TX 914.84MHz

Note :

Polarization: *Vertical*

Power : 120 V.a.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

Radiated Emission Measurement

Operator: Roy

File :3

Data :#4


Date: 2016/3/18

Temperature:24 °C

90.0 dBuV/m

Time: 上午 12:10:10

Humidity:60 %

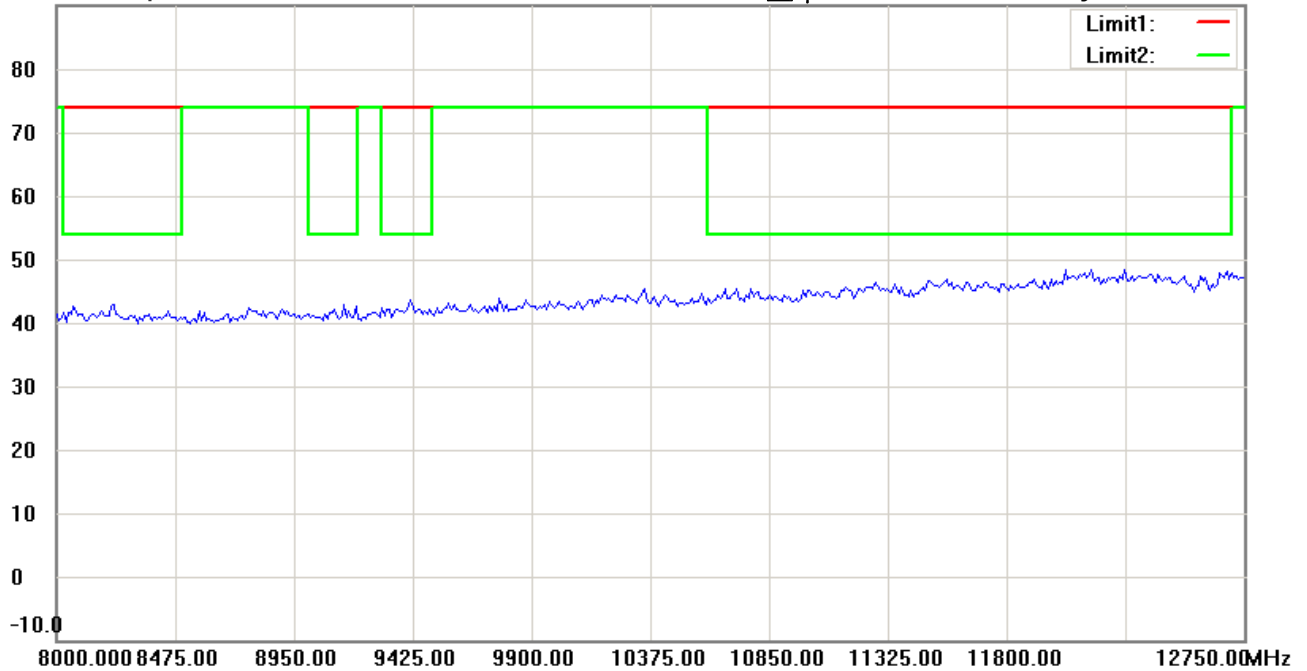

Site : Chamber_01

Condition : FCC Restriction Band_Above 1GHz_PK

Polarization: Horizontal

EUT : W6M21512-15495

Power : 120 V.a.c.

M/N:

Distance: 3m

Test Mode : TX 914.84MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

Radiated Emission Measurement

Operator: Roy

File :3

Data :#10


Date: 2016/3/18

Temperature:24 °C

90.0 dBuV/m

Time: 上午 12:13:56

Humidity:60 %

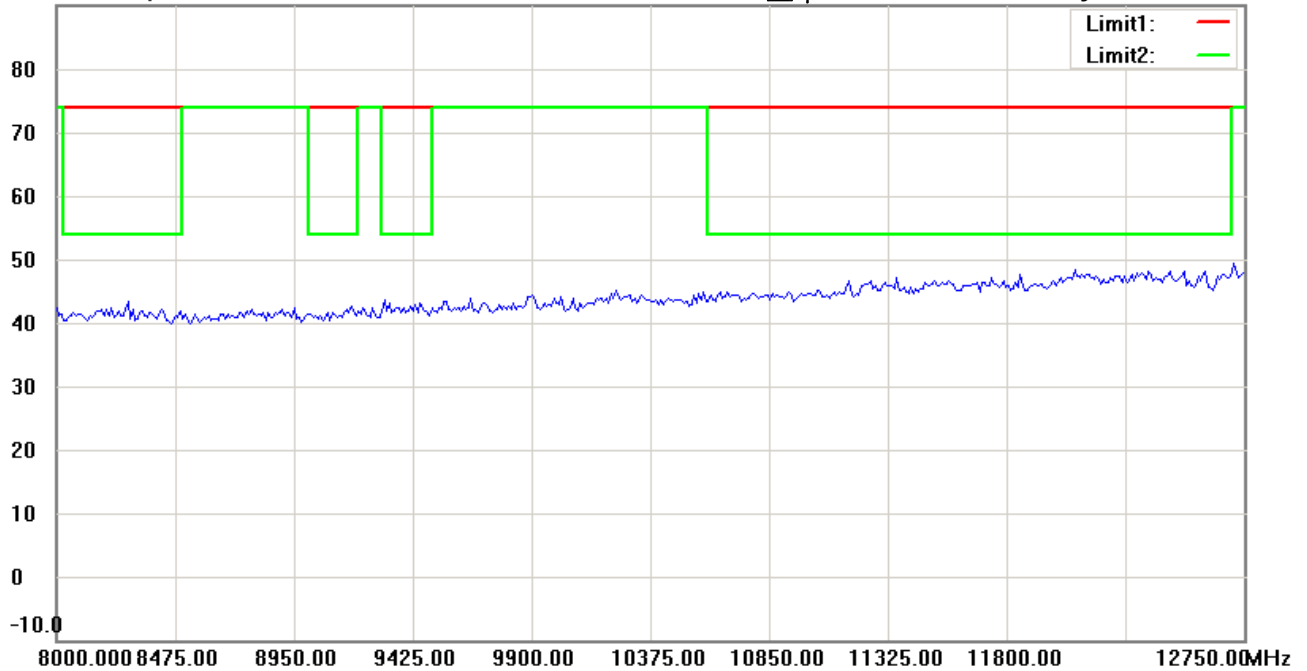

Site : Chamber_01

Condition : FCC Restriction Band_Above 1GHz_PK

Polarization: Vertical

EUT : W6M21512-15495

Power : 120 V.a.c.

M/N:

Distance: 3m

Test Mode : TX 914.84MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------