

**47 CFR PART 15 SUBPART C TEST REPORT**

**for**

**Smart Home Alarm System**

**Model No.: HSGW<sub>x</sub>-xxxxx-xxxxx Series**

**(x=0~9, A~Z or blank)**

**FCC ID: GX9HSGWCATM1**

**of**

**Applicant: CLIMAX TECHNOLOGY CO., LTD.**

**Address: No. 258, Sinhu 2nd Rd., Neihu District, Taipei City 114,  
Taiwan ( R.O.C.)**

**Tested and Prepared**

**by**

**Worldwide Testing Services (Taiwan) Co., Ltd.**

**FCC Registration No.: TW1477, TW1072**

**Industry Canada filed test laboratory Reg. No.: 20037, 5107A**



**Report No.: W6M22302-22480-C-2**

6F, NO. 58, LANE 188, RUEY-KUANG RD., NEIHU TAIPEI 114, TAIWAN, R.O.C.  
TEL: 886-2-66068877 FAX: 886-2-66068879 E-mail: [wts@wts-lab.com](mailto:wts@wts-lab.com)



## **TABLE OF CONTENTS**

|       |                                                          |    |
|-------|----------------------------------------------------------|----|
| 1     | General Information.....                                 | 2  |
| 1.1   | Notes .....                                              | 2  |
| 1.2   | Testing laboratory .....                                 | 3  |
| 1.2.1 | Location .....                                           | 3  |
| 1.2.2 | Details of accreditation status .....                    | 3  |
| 1.3   | Details of approval holder.....                          | 3  |
| 1.4   | Application details .....                                | 4  |
| 1.5   | Test item .....                                          | 4  |
| 1.6   | Test standards .....                                     | 4  |
| 2     | Technical test .....                                     | 5  |
| 2.1   | Summary of test results.....                             | 5  |
| 2.2   | Test environment .....                                   | 5  |
| 2.3   | Test Mode .....                                          | 5  |
| 2.4   | Test equipment utilized.....                             | 6  |
| 2.5   | General Test Procedure.....                              | 9  |
| 3     | Test results (enclosure) .....                           | 10 |
| 3.1   | Transmission Requirements.....                           | 11 |
| 3.1.1 | Limit of Transmission Time .....                         | 11 |
| 3.1.2 | Active Time .....                                        | 11 |
| 3.2   | Output Power (Field Strength).....                       | 12 |
| 3.3   | Out of Band Radiated Emissions .....                     | 14 |
| 3.4   | Transmitter Radiated Emissions in restricted Bands ..... | 15 |
| 3.5   | Spurious Emission radiated, Transmitter.....             | 16 |
| 3.6   | Channel Bandwidth.....                                   | 17 |
| 3.7   | Antenna requirement.....                                 | 18 |
| 3.8   | Duty Cycle .....                                         | 19 |
| 3.9   | Conducted Measurement at (AC) Power Line.....            | 20 |

Appendix: Diagrams



Registration number: W6M22302-22480-C-2

FCC ID: GX9HSGWCATM1

## **1 General Information**

### **1.1 Notes**

The purpose of conformity testing is to increase the probability of adherence to the essential requirements or conformity specifications, as appropriate.

The complexity of the technical specifications, however, means that full and thorough testing is impractical for both technical and economic reasons.

Furthermore, there is no guarantee that a test sample which has passed all the relevant tests conforms to a specification.

Neither is there any guarantee that such a test sample will interwork with other genuinely open systems.

The existence of the tests nevertheless provides the confidence that the test sample possesses the qualities as maintained and that its performance generally conforms to representative cases of communications equipment.

Laboratory disclaimer-


1. The test results of this test report relate exclusively to the item tested as specified in 1.5.
2. The test report may only be reproduced or published in full.
3. Reproduction or publication of extracts from the report requires the prior written approval of the Worldwide Testing Services(Taiwan) Co., Ltd.

### **Tester:**

|                |           |                   |
|----------------|-----------|-------------------|
| April 17, 2023 | Rick Chen | <i>Rick Chen.</i> |
| Date           | WTS-Lab.  | Name              |
|                |           | Signature         |

### **Technical responsibility for area of testing:**

|                |            |                   |
|----------------|------------|-------------------|
| April 17, 2023 | Kevin Wang | <i>Kevin Wang</i> |
| Date           | WTS        | Name              |
|                |            | Signature         |



Registration number: W6M22302-22480-C-2

FCC ID: GX9HSGWCATM1

## **1.2 Testing laboratory**

### **1.2.1 Location**

10m OATS

No.5-1, Lishui, Shuang Sing Village, Wanli Dist.,  
New Taipei City 207, Taiwan (R.O.C.)

3 meter semi-anechoic chamber

No.35, Aly. 21, Ln. 228, Ankang Rd., Neihu Dist.,  
Taipei City 114, Taiwan (R.O.C.)

Tel: 886-2-6613-0228

Worldwide Testing Services (Taiwan) Co., Ltd.

6F., No. 58, Ln. 188, Ruiguang Rd., Neihu Dist.,  
Taipei City 114, Taiwan (R.O.C.)

Tel: 886-2-6606-8877

### **1.2.2 Details of accreditation status**

Accredited testing laboratory

FCC filed test laboratory Reg. No.: TW1477, TW1072

Industry Canada filed test laboratory Reg. No.: 20037, 5107A

### **Test location, where different from Worldwide Testing Services (Taiwan) Co., Ltd. :**

Name: ./.

Accredited number: ./.

Street: ./.

Town: ./.

Country: ./.


## **1.3 Details of approval holder**

Name: CLIMAX TECHNOLOGY CO., LTD.

Street: No. 258, Sinhu 2nd Rd., Neihu District,

Town: Taipei City 114,

Country: Taiwan ( R.O.C.)



Registration number: W6M22302-22480-C-2

FCC ID: GX9HSGWCATM1

## **1.4 Application details**

Date of receipt of test item: February 21, 2023  
Date of test: from February 22, 2023 to April 14, 2023

## **1.5 Test item**

Description of test item: Smart Home Alarm System  
Type identification: HSGWx-xxxxx-xxxxx Series(x=0~9, A~Z or blank)  
Brand name: ./.  
Multi-listing model number: ./.  
Transmitting frequency: 433.82 MHz  
Operation mode: Half-duplex  
Voltage supply: Adaptor (I/P: 100-240V~0.4A, 50/60Hz  
O/P: 12.0V, 1.0A, 12.0W)  
Battery 7.2Vd.c.  
Antenna type: Monopole antenna  
Antenna gain: -5.45 dBi  
Sample no.: #01

### **Manufacturer (if applicable)**


Name: ./.  
Street: ./.  
Town: ./.  
Country: ./.

## **1.6 Test standards**

Technical standard: 47 CFR PART 15 SUBPART C § 15.231 (a) (2021-10)

### **Special statement:**

1. This test report is valid in connection to the model has been tested, any modification to the product which is different from the test model will avoid the certification of the test report.
2. This test report shall always be duplicated in full pages unless the written approval of the testing.
3. The x in model number is representing different case shape, case colors, led mask color, and control ID.
4. The model number of EUT is HSGW-MAX8-DT32. This model does not contain logo.



Registration number: W6M22302-22480-C-2

FCC ID: GX9HSGWCATM1

## **2 Technical test**

### **2.1 Summary of test results**

No deviations from the technical specification(s) were ascertained in the course of the tests performed. ☒

**or**

The deviations were ascertained in the course of the tests performed. ☐

### **2.2 Test environment**

Relative humidity content: 20 ... 75 %

Air pressure: 86 ... 103 kPa

| Test item Name                                                                                                                                                                                                     | Uncertainty                                                                                                            |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------|
| Estimation Result of Uncertainty of Conducted Emission<br>(Conducted Measurement at (AC) Power Line)                                                                                                               | Expanded Uncertainty :<br>AMN : 0.94 dB<br>Voltage probe : 0.96 dB<br>Include Pulse Limiter : 1.52 dB                  |
| Estimation Result of Uncertainty of Radiated Emission(3M)<br>(Output Power (Field Strength), Out of Band Radiated Emissions,<br>Transmitter Radiated Emissions in restricted Bands, Spurious<br>Emission radiated) | Expanded Uncertainty :<br>0.009-30 MHz : 3.48 dB<br>30-1000 MHz : 3.96 dB<br>1-18 GHz : 2.46 dB<br>18-40 GHz : 2.44 dB |
| Estimation Result of Uncertainty of Bandwidth Measurement<br>(Channel Bandwidth)                                                                                                                                   | Expanded Uncertainty : 0.45 kHz                                                                                        |
| Estimation Result of Uncertainty of Frequency Drift Measurement<br>(Frequency Tolerance)                                                                                                                           | Expanded Uncertainty : 6.11 Hz                                                                                         |
| Estimation Result of Uncertainty of Duty Cycle Measurement<br>(Active Time)                                                                                                                                        | Expanded Uncertainty : 0.1 ms                                                                                          |

The decision rule is: Measurement uncertainty is not included in the calculation of test results.

### **2.3 Test Mode**

This EUT is the portable device. So the EUT was tested on three different axes. Please see assessment test results as section 3 of this test report.



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22302-22480-C-2

FCC ID: GX9HSGWCATM1

## 2.4 Test equipment utilized

| No.          | Test equipment                                     | Type            | Serial No.  | Manufacturer          | Cal. Date     | Next Cal. Date |
|--------------|----------------------------------------------------|-----------------|-------------|-----------------------|---------------|----------------|
| ETSTW-CE 001 | EMI TEST RECEIVER                                  | ESHS10          | 842121/013  | R&S                   | 2022/6/22     | 2023/6/21      |
| ETSTW-CE 003 | AC POWER SOURCE                                    | APS-9102        | D161137     | GW                    | Function Test |                |
| ETSTW-CE 004 | ZWEILEITER-V-NETZNACHBILDUNG<br>TWO-LINE V-NETWORK | ESH3-Z5         | 840731/011  | R&S                   | 2022/10/24    | 2023/10/23     |
| ETSTW-CE 006 | IMPULSBEGRENZER<br>PULSE LIMITER                   | ESH3-Z2         | 100226      | R&S                   | 2022/10/24    | 2023/10/23     |
| ETSTW-CE 008 | HF-EICHLITUNG RF<br>STEP ATTENUATOR<br>139dB DPSP  | 334.6010.02     | 844581/024  | R&S                   | Function Test |                |
| ETSTW-CE 009 | TEMP.&HUMIDITY<br>CHAMBER                          | GTH-225-40-1P-U | MAA0305-009 | GIANT FORCE           | 2022/8/3      | 2023/8/2       |
| ETSTW-CE 016 | TWO-LINE V-NETWORK                                 | ENV216          | 100050      | R&S                   | 2022/11/9     | 2023/11/8      |
| ETSTW-CE 028 | MXE EMI Receiver                                   | N9038A          | MY53220110  | Agilent               | 2022/7/29     | 2023/7/28      |
| ETSTW-RE 003 | EMI TEST RECEIVER                                  | ESI 26          | 831438/001  | R&S                   | 2022/6/21     | 2023/6/20      |
| ETSTW-RE 004 | EMI TEST RECEIVER                                  | ESI 40          | 832427/004  | R&S                   | 2022/10/17    | 2023/10/16     |
| ETSTW-RE 012 | TUNABLE BANDREJECT<br>FILTER                       | D.C 0309        | 146         | K&L                   | Function Test |                |
| ETSTW-RE 013 | TUNABLE BANDREJECT<br>FILTER                       | D.C 0336        | 397         | K&L                   | Function Test |                |
| ETSTW-RE 018 | MICROWAVE HORN<br>ANTENNA                          | AT4560          | 27212       | AR                    | 2022/8/18     | 2023/8/17      |
| ETSTW-RE 019 | MICROWAVE HORN<br>ANTENNA                          | 22240-25        | 121074      | FM                    | 2022/6/13     | 2023/6/12      |
| ETSTW-RE 027 | Passive Loop Antenna                               | 6512            | 00034563    | ETS-Lindgren          | 2022/6/22     | 2023/6/21      |
| ETSTW-RE 030 | Double-Ridged Guide Horn<br>Antenna                | 3117            | 00035224    | ETS-Lindgren          | 2022/5/23     | 2023/5/22      |
| ETSTW-RE 042 | Biconical Antenna                                  | HK116           | 100172      | R&S                   | 2023/3/2      | 2024/3/1       |
| ETSTW-RE 043 | Log-Periodic Dipole<br>Antenna                     | HL223           | 100166      | R&S                   | 2022/6/28     | 2023/6/27      |
| ETSTW-RE 044 | Log-Periodic Antenna                               | HL050           | 100094      | R&S                   | 2022/8/1      | 2023/7/31      |
| ETSTW-RE 045 | ESA-E SERIES<br>SPECTRUM ANALYZER                  | E4404B          | MY45111242  | Agilent               | Pre-test Use  |                |
| ETSTW-RE 050 | Attenuator 10dB                                    | 50HF-010-1      | None        | JFW                   | 2023/2/17     | 2024/2/16      |
| ETSTW-RE 051 | Attenuator 6dB                                     | 50HF-006-1      | None        | JFW                   | 2023/2/17     | 2024/2/16      |
| ETSTW-RE 053 | Attenuator 3dB                                     | 50HF-003-1      | None        | JFW                   | 2023/2/17     | 2024/2/16      |
| ETSTW-RE 055 | SPECTRUM ANALYZER                                  | FSU 26          | 200074      | R&S                   | 2023/3/22     | 2024/3/21      |
| ETSTW-RE 060 | Attenuator 30dB                                    | 5015-30         | F651012z-01 | ATM                   | 2023/2/17     | 2024/2/16      |
| ETSTW-RE 062 | Amplifier Module                                   | CHC 2           | None        | KMIC                  | 2023/2/20     | 2024/2/19      |
| ETSTW-RE 064 | Bluetooth Test Set                                 | MT8852B-042     | 6K00005709  | Anritsu               | Function Test |                |
| ETSTW-RE 069 | Double-Ridged Guide Horn<br>Antenna                | 3117            | 00069377    | ETS-Lindgren          | Function Test |                |
| ETSTW-RE 072 | CELL SITE TEST SET                                 | 8921A           | 3339A00375  | HP                    | 2022/11/5     | 2023/11/4      |
| ETSTW-RE 088 | SOLID STATE<br>AMPLIFIER                           | KMA180265A01    | 99057       | KMIC                  | 2022/9/16     | 2023/9/15      |
| ETSTW-RE 091 | Match Pad                                          | MDCS1500        | None        | WOKEN                 | 2022/6/9      | 2023/6/8       |
| ETSTW-RE 099 | DC Block                                           | 50DB-007-1      | None        | JFW                   | 2023/2/17     | 2024/2/16      |
| ETSTW-RE 112 | AC POWER SOURCE                                    | TFC-1005        | T-0A023536  | T-Power               | Function test |                |
| ETSTW-RE 115 | 2.4GHz Notch Filter                                | N0124411        | 473874      | MICROWAVE<br>CIRCUITS | 2023/1/4      | 2024/1/3       |



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22302-22480-C-2

FCC ID: GX9HSGWCATM1

|                 |                                           |                                        |                 |                    |              |            |
|-----------------|-------------------------------------------|----------------------------------------|-----------------|--------------------|--------------|------------|
| ETSTW-RE 120    | RF Player                                 | MP9200                                 | MP9210-111022   | ADIVIC             | 2022/11/8    | 2023/11/7  |
| ETSTW-RE 122    | SIGNAL GENERATOR                          | SMF100A                                | 102149          | R&S                | 2022/6/20    | 2023/6/19  |
| ETSTW-RE 125    | 5GHz Notch filter                         | 5NSL11-5200/E221.3-O/O                 | 1               | K&L Microwave      | 2022/8/5     | 2023/8/4   |
| ETSTW-RE 126    | 5GHz Notch filter                         | 5NSL12-5800/E221.3-O/O                 | 1               | K&L Microwave      | 2022/8/5     | 2023/8/4   |
| ETSTW-RE 127    | RF Switch Box                             | RFS-01                                 | None            | WTS                | 2023/2/17    | 2024/2/16  |
| ETSTW-RE 128    | 5.3GHz Notch filter                       | N0153001                               | SN487233        | Microwave Circuits | 2022/8/5     | 2023/8/4   |
| ETSTW-RE 129    | 5.5GHz Notch filter                       | N0555984                               | SN487234        | Microwave Circuits | 2022/8/5     | 2023/8/4   |
| ETSTW-RE 130    | Handheld RF Spectrum Analyzer             | N9340A                                 | CN0147000204    | Agilent            | Pre-test Use |            |
| ETSTW-RE 142    | Amplifier                                 | 8447D                                  | 2805A03378      | Agilent            | 2023/2/20    | 2024/2/19  |
| ETSTW-RE 146    | Preamplifier                              | JPA-10M1G                              | 15090004        | JPT                | 2022/5/27    | 2023/5/26  |
| ETSTW-RE 152    | Bi-log Hybrid Antenna                     | MCTD 2786B                             | BLB20J04029     | ETC                | 2023/1/31    | 2024/1/30  |
| ETSTW-RE 153    | Signal Analyzer                           | FSV40                                  | 101929          | R&S                | 2022/10/3    | 2023/10/2  |
| ETSTW-RE 159    | Bi-log Hybrid Antenna (30M~1000 MHz)      | MCTD 2786B                             | BLB21N04035     | ETC                | 2022/12/22   | 2023/12/21 |
| ETSTW-RE 177    | Bi-log Hybrid Antenna with 6dB Attenuator | VULB 9168&EMCI-N-6-06                  | 01380&AT-06007  | SCHWARZBECK&EMC    | 2022/9/1     | 2023/8/31  |
| ETSTW-RF 002    | Electromagnetic field probe               | LF-30                                  | K-0007          | STT                | 2022/7/14    | 2023/7/13  |
| ETSTW-EMI 011   | USB Compact Modulator                     | SFC-U                                  | 101689          | R&S                | 2022/6/10    | 2023/6/9   |
| ETSTW-GSM 002   | Universal Radio Communication Tester      | CMU 200                                | 109439          | R&S                | 2023/3/22    | 2024/3/21  |
| ETSTW-GSM 003   | Radio Communication Analyzer              | MT8820C                                | 6201342073      | Anritsu            | 2022/5/9     | 2023/5/8   |
| ETSTW-GSM 004   | Wideband Radio Communication Tester       | CMW500                                 | 128092          | R&S                | 2022/10/24   | 2023/10/23 |
| ETSTW-GSM 019   | Band Reject Filter                        | WRCTF824/849-822/851-40 /12+9SS        | 3               | WI                 | 2023/1/4     | 2024/1/3   |
| ETSTW-GSM 020   | Band Reject Filter                        | WRCD1747/1748-1743/1752-32/5SS         | 1               | WI                 | 2023/1/4     | 2024/1/3   |
| ETSTW-GSM 021   | Band Reject Filter                        | WRCD1879.5/1880.5-1875.5/1884.5-32/5SS | 3               | WI                 | 2023/1/4     | 2024/1/3   |
| ETSTW-GSM 022   | Band Reject Filter                        | WRCT901.9/903.1-904.25-50/8SS          | 1               | WI                 | 2023/1/4     | 2024/1/3   |
| ETSTW-GSM 023   | Power Divider                             | 4901.19.A                              | None            | SUHNER             | 2022/9/2     | 2023/9/1   |
| ETSTW-GSM 024   | Radio Communication Analyzer              | MT8821C                                | None            | Anritsu            | 2022/5/3     | 2023/5/2   |
| ETSTW-GSM 025   | Band Reject Filter                        | BRM19835                               | 001             | Micro-Tronics      | 2022/8/5     | 2023/8/4   |
| ETSTW-Cable 016 | BNC Cable                                 | Switch Box                             | B Cable 1       | Schwarz beck       | 2023/2/4     | 2024/2/3   |
| ETSTW-Cable 017 | BNC Cable                                 | X Cable                                | B Cable 2       | Schwarz beck       | 2023/2/4     | 2024/2/3   |
| ETSTW-Cable 018 | BNC Cable                                 | Y Cable                                | B Cable 3       | Schwarz beck       | 2023/2/4     | 2024/2/3   |
| ETSTW-Cable 019 | BNC Cable                                 | Z Cable                                | B Cable 4       | Schwarz beck       | 2023/2/4     | 2024/2/3   |
| ETSTW-Cable 020 | N TYPE Cable                              | OATS Cable 1                           | N30N30-L335-15M | JYE BAO CO.,LTD.   | 2022/6/29    | 2023/6/28  |
| ETSTW-Cable 027 | Microwave Cable                           | SUCOFLEX 104                           | 279083          | HUBER+SUHNER       | 2022/5/6     | 2023/5/5   |
| ETSTW-Cable 028 | Microwave Cable                           | FA147A0015M2020                        | 30064-2         | UTIFLEX            | 2022/9/16    | 2023/9/15  |
| ETSTW-Cable 029 | Microwave Cable                           | FA147A0015M2020                        | 30064-3         | UTIFLEX            | 2022/9/16    | 2023/9/15  |
| ETSTW-Cable 030 | Microwave Cable                           | SUCOFLEX 104 (S_Cable 9)               | 279067          | HUBER+SUHNER       | 2023/02/17   | 2024/2/16  |
| ETSTW-Cable 058 | Microwave Cable                           | SUCOFLEX 104                           | none            | HUBER+SUHNER       | 2022/5/27    | 2023/5/26  |
| ETSTW-Cable 064 | Microwave Cable                           | SUCOFLEX 104                           | MY28891         | HUBER+SUHNER       | 2023/2/20    | 2024/2/19  |





# ***Worldwide Testing Services(Taiwan) Co., Ltd.***

Registration number: W6M22302-22480-C-2

FCC ID: GX9HSGWCATM1

|                 |                          |                       |          |              |                                       |            |
|-----------------|--------------------------|-----------------------|----------|--------------|---------------------------------------|------------|
| ETSTW-Cable 071 | N TYPE CABLE             | EMCCFD400-NM-NM-25000 | 170239   | EMCI         | 2022/5/27                             | 2023/5/26  |
| ETSTW-Cable 072 | SMA type cable (8m)      | SUCOFLEX 104          | 805800/4 | HUBER+SUHNER | 2023/2/20                             | 2024/2/19  |
| ETSTW-Cable 074 | SMA type cable (2m)      | SUCOFLEX 104          | 802563/4 | HUBER+SUHNER | 2023/2/20                             | 2024/2/19  |
| ETSTW-Cable 076 | SMA type cable (1m)      | N/A                   | 812652/4 | HUBER+SUHNER | 2023/2/20                             | 2024/2/19  |
| WTSTW-SW 002    | EMI TEST SOFTWARE        | EZ EMC                | None     | Farad        | Version ETS-03A1<br>Version EMEC-3A1+ |            |
| WTSTW-SW 006    | EMI TEST SOFTWARE        | e3                    | None     | AUDIX        | Version 9.161014                      |            |
| WTSTW-SW 008    | Signal studio            | Agilent               | None     | AUDIX        | Version 2.0.0.1                       |            |
| ETSTW-TH 002    | Thermohygrometer         | 608-H1                | 45204317 | Testo        | 2022/9/16                             | 2023/9/15  |
| ETSTW-TH 003    | Wireless weather station | GAIA                  | N/A      | TFA          | 2022/10/28                            | 2023/10/27 |



Registration number: W6M22302-22480-C-2  
FCC ID: GX9HSGWCATM1

## **2.5 General Test Procedure**

**POWER LINE CONDUCTED INTERFERENCE:** The procedure used was ANSI STANDARD C63.10-2013 6.2 using a LISN (if necessary). Both lines were observed. The bandwidth of the spectrum analyzer was 10 kHz with an appropriate sweep speed.

**RADIATION INTERFERENCE:** The test procedure used was ANSI STANDARD C63.10-2013 6.3 using a spectrum analyzer. The bandwidth of the spectrum analyzer was 100 kHz with an appropriate sweep speed. The analyzer was calibrated in dB above a microvolt at the output of the antenna. The resolution bandwidth was the 100 kHz and the video bandwidth was 300 kHz.

**FORMULA OF CONVERSION FACTORS:** The Field Strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dB $\mu$ V) to the antenna correction factor supplied by the antenna manufacturer. The antenna correction factors are stated in terms of dB.

Example:


|            |                                                            |
|------------|------------------------------------------------------------|
| Freq (MHz) | METER READING + ACF + CABLE LOSS (to the receiver) = FS    |
| 33         | 20 dB $\mu$ V + 10.36 dB/m + 6 dB = 36.36 dB $\mu$ V/m @3m |

**ANSI STANDARD C63.10-2013 6.2.2 MEASUREMENT PROCEDURES:** The EUT was placed on a table 80 cm high and with dimensions of 1m by 1.5m (non metallic table). The EUT was placed in the center of the table. The table used for radiated measurements is capable of continuous rotation. The spectrum was scanned from 30 MHz to 10<sup>th</sup> harmonic of the fundamental.

Peak readings were taken in three (3) orthogonal planes and the highest readings.

When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes.

**ANSI STANDARD C63.10-2013 B.2.7:** Any measurements that utilize special test software shall be indicated and referenced in the test report. During testing, test software 'EZ EMC' was used for setting up different operation modes.



Registration number: W6M22302-22480-C-2

FCC ID: GX9HSGWCATM1

### **3 Test results (enclosure)**

☒ 1st test

☐ test after modification

☐ production test

| TEST CASE                                    | Para. Number | Required                            | Test passed                         | Test failed              |
|----------------------------------------------|--------------|-------------------------------------|-------------------------------------|--------------------------|
| Transmission Requirements                    | 15.231(a)    | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| Radiated Emission                            | 15.231(b)    | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| Bandwidth of Emission                        | 15.231(c)    | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| Frequency Tolerance                          | 15.231(d)    | <input type="checkbox"/>            | <input type="checkbox"/>            | <input type="checkbox"/> |
| Period Alternate Field Strength Requirements | 15.231(b)    | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| Antenna Requirement                          | 15.203       | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| Conducted Measurement at (AC) Power Line     | 15.207       | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> |

The following is intentionally left blank.



Registration number: W6M22302-22480-C-2

FCC ID: GX9HSGWCATM1

### **3.1 Transmission Requirements**

FCC 15.231(a)

Test date: February 23, 2023

Temperature: 20.9 °C

Humidity: 58.6 %

Tester: Kent

#### **3.1.1 Limit of Transmission Time**

☒ According to 15.231(a)(1), a manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

☐ According to 15.231(a)(2), a transmitter activated automatically shall cease transmission within 5 seconds after activation.

#### **3.1.2 Active Time**

Test date: February 23, 2023

Temperature: 20.9 °C

Humidity: 58.6 %

Tester: Kent

☒ This manually operated transmitter employs a switch that automatically deactivate the transmitter within 336.538462 ms of being released.

☐ This transmitter is operated by automatic activation and active will cease transmission in \_\_ ms after activation..

Test equipment used : ETSTW-RE 004


Explanation: See attached diagrams in appendix.




Registration number: W6M22302-22480-C-2

FCC ID: GX9HSGWCATM1

## 3.2 Output Power (Field Strength)

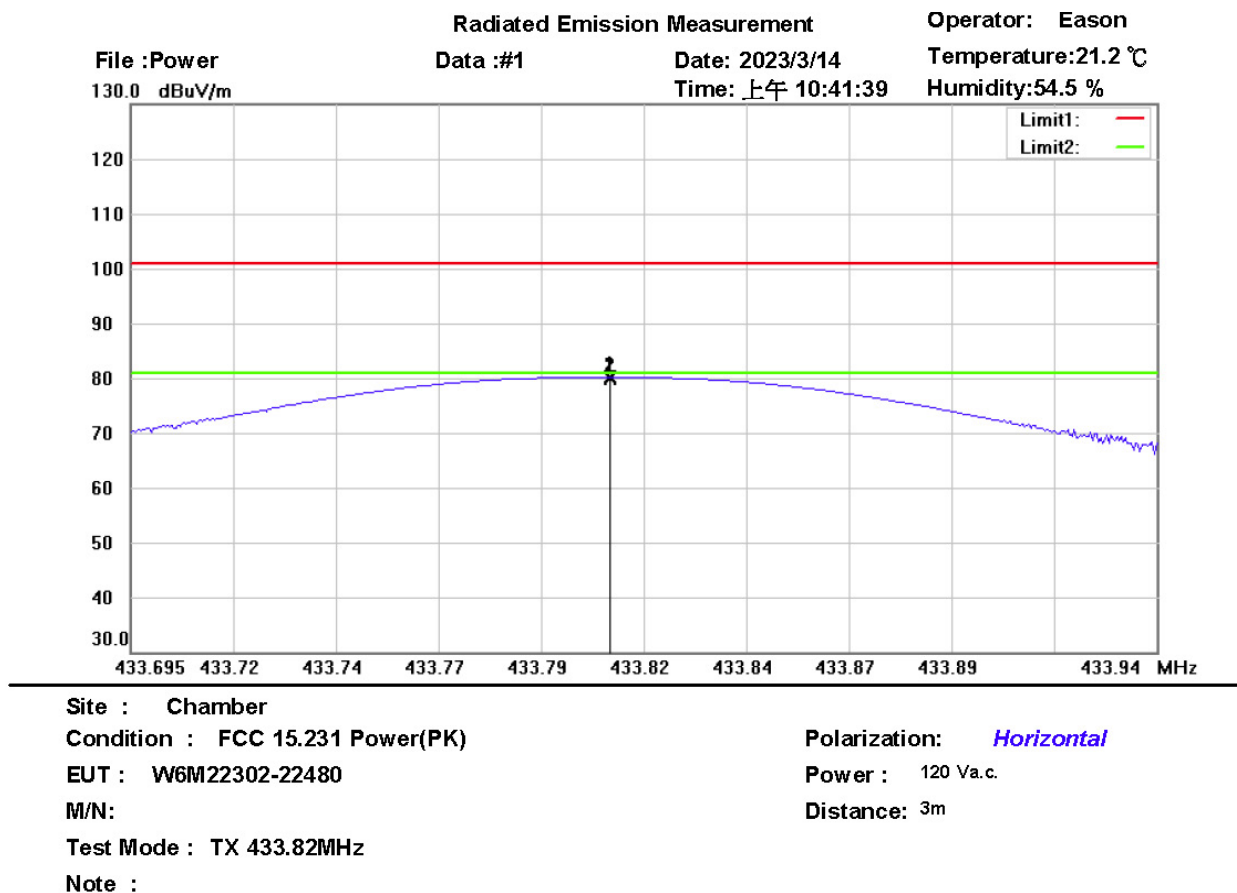

| Mk. | Frequency (MHz) | Reading (dBuV) | Detector | Corr. factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Ant.Pos (cm) | Tab.Pos (deg.) | Margin (dB) | Comment |
|-----|-----------------|----------------|----------|---------------------|-----------------|----------------|--------------|----------------|-------------|---------|
|     | 433.8115        | 55.06          | peak     | 25.11               | 80.17           | 100.80         | 100          | 115            | -20.63      |         |
| *   | 433.8115        | 54.65          | AVG      | 25.11               | 79.76           | 80.80          | 100          | 115            | -1.04       |         |



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22302-22480-C-2

FCC ID: GX9HSGWCATM1

## Radiated Emission Measurement

Operator: Eason

File :Power

Data :#2


Date: 2023/3/14

Temperature:21.2 °C

130.0 dBuV/m

Time: 上午 10:52:53

Humidity:54.5 %

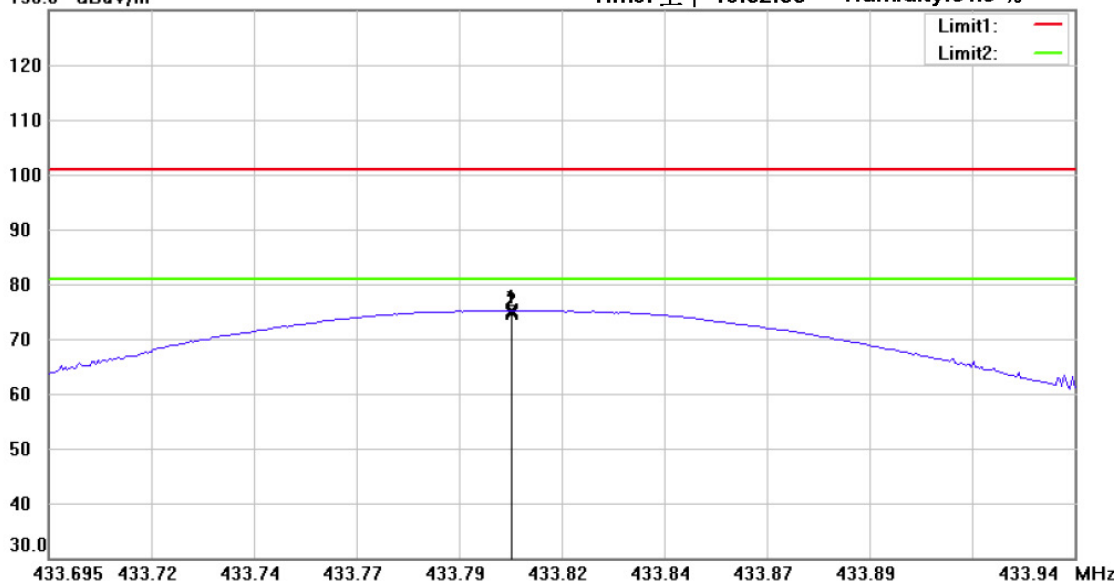

Site : Chamber

Condition : FCC 15.231 Power(PK)

EUT : W6M22302-22480

M/N:

Test Mode : TX 433.82MHz

Note :

Polarization: **Vertical**

Power : 120 V.a.c.

Distance: 3m

| Mk. | Frequency (MHz) | Reading (dBuV) | Detector | Corr. factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Ant.Pos (cm) | Tab.Pos (deg.) | Margin (dB) | Comment |
|-----|-----------------|----------------|----------|---------------------|-----------------|----------------|--------------|----------------|-------------|---------|
|     | 433.8077        | 50.01          | peak     | 25.11               | 75.12           | 100.80         | 100          | 220            | -25.68      |         |
| *   | 433.8077        | 49.60          | AVG      | 25.11               | 74.71           | 80.80          | 100          | 220            | -6.09       |         |

Limit 15.231(b)

| Fundamental Frequency (MHz) | Field strength of fundamental, limit $\mu\text{V/m}$                                     |
|-----------------------------|------------------------------------------------------------------------------------------|
| 40.66 – 40.70               | 2,250                                                                                    |
| 70 – 130                    | 1,250                                                                                    |
| 130 – 174                   | 1,250 to 3,750                                                                           |
| 174 – 260                   | 3,750                                                                                    |
| 260 – 470                   | 3,750 to 12,500**<br>(433.82 MHz: 80.82 dB $\mu\text{V/m}$ = 10,992.51 $\mu\text{V/m}$ ) |
| Above 470                   | 12,500                                                                                   |

\*\* linear interpolation

Test equipment used: ETSTW-RE 004, ETSTW-RE 062, ETSTW-RE 142, ETSTW-RE 152



Registration number: W6M22302-22480-C-2

FCC ID: GX9HSGWCATM1

## **3.3 Out of Band Radiated Emissions**

FCC Rule: 15.231(b) , 15.35

For out of band emissions that are close to or that exceed the 20 dB attenuation requirement described in the specification, radiated measurements were performed at a 3 m separation distance to determine whether these emissions complied with the general radiated emission requirement.

Guidance on Measurement of pulsed emission: 15.35(c)

“the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.”

Duty Cycle correction =  $20 \log (\text{dwell time}/100\text{ms or one period})$

Limits:

For frequencies (Average measurements)

Correction factor conform 15.35 (c) (Average measurements)

Duty cycle correction :

Max. Peak reading – duty cycle correction

Max permitted average Limits = Max permitted Fundamental limit – 20 dB

For example for 433.82 fundamental carrier:

Max permitted average Limit:  $80.82 \text{ dB}\mu\text{V/m} - 20 \text{ dB} = 60.82 \text{ dB}\mu\text{V/m}$

For frequencies above 1GHz (Peak measurements).

Modified Limits for peak conform 15.35 (b) = Max Permitted average Limits + 20dB (because Peak detector is used)



Registration number: W6M22302-22480-C-2

FCC ID: GX9HSGWCATM1

## **3.4 Transmitter Radiated Emissions in restricted Bands**

FCC Rules: 15.231 (b), 15.205, 15.209, 15.35

Radiated emission measurements were performed from 30 MHz to 8000 MHz.

For radiated emission tests, the analyzer setting was as followings:

RES BW VID BW

Frequency <1 GHz 100 kHz 100 kHz (Peak measurements)

Frequency >1 GHz 1 MHz 1 MHz (Peak measurements)

1 MHz 1 MHz (Average measurements)

Limits:

For frequencies below 1GHz :

| Frequency of Emission<br>(MHz) | Field strength<br>(microvolts/meter) | Field Strength<br>(dB microvolts/meter) |
|--------------------------------|--------------------------------------|-----------------------------------------|
| 30 – 88                        | 100                                  | 40.0                                    |
| 88 – 216                       | 150                                  | 43.5                                    |
| 216 – 960                      | 200                                  | 46.0                                    |
| Above 960                      | 500                                  | 54.0                                    |

For frequencies above 1GHz (Average measurements).

Guidance on Measurement of pulsed emission:

“If the emission is pulsed, modify the unit for continues operation , use the settings shown above, then correct the reading by subtracting the peak-average correction factor, derived from the appropriate duty cycle calculation.

For frequencies above 1GHz (Average measurements).

The correction factor, based on the channel dwell time in a 100 ms period, may be mathematically applied to a measurement made with an average detector, to further reduce the value.

Duty cycle correction =  $20 \log (\text{dwell time}/100\text{ms})$

No duty cycle correction was added to the reading

Modified Limits for peak conform 15.35 (b) = Max Permitted average Limits + 20dB (because Peak detector is used)

Above 960 MHz

For mode DSSS CW:  $54 \text{ dB}\mu\text{V/m} + 20 \text{ dB} = 74 \text{ dB}\mu\text{V/m}$

Explanation: See attached diagrams in appendix.





Registration number: W6M22302-22480-C-2

FCC ID: GX9HSGWCATM1

## **3.5 Spurious Emission radiated, Transmitter**

Spurious emission was measured with modulation (declared by manufacturer).

The limits on the field strength of the spurious emission in the table § 15.231(b) are based on the fundamental frequency of the intentional radiator. Spurious emission shall be attenuated to the average (or alternatively, CISPR quasi-peak) limits shown in this table or to the general limits shown in § 15.209, whichever limit permits a higher field strength.

In addition, radiated emission which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

SAMPLE CALCULATION OF LIMIT. All results will be updated by an automatic measuring system in accordance to point 2.3.

Calculation of test results:

Such factors like antenna correction, cable loss, external attenuation etc. are already included in the provided measurement results. This is done by using validated test software and calibrated test system according the accreditation requirements.

The peak and average spurious emission plots was measured with the average limits.

In the Table being listed the critical peak and average value an exhibit the compliance with the above calculated Limits.

HSGWx-xxxxx-xxxxx Series

Model: (x=0~9, A~Z or blank) Date: --  
Mode: -- Temperature: -- °C Engineer: --  
Polarization: Horizontal Humidity: -- %

| Frequency (MHz) | Reading (dBuV) | Detector | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Table Degree (Deg.) | Ant. High (cm) |
|-----------------|----------------|----------|-------------|-----------------|----------------|-------------|---------------------|----------------|
| --              | --             | --       | --          | --              | --             | --          | --                  | --             |
| --              | --             | --       | --          | --              | --             | --          | --                  | --             |

Polarization: Vertical

| Frequency (MHz) | Reading (dBuV) | Detector | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Table Degree (Deg.) | Ant. High (cm) |
|-----------------|----------------|----------|-------------|-----------------|----------------|-------------|---------------------|----------------|
| --              | --             | --       | --          | --              | --             | --          | --                  | --             |
| --              | --             | --       | --          | --              | --             | --          | --                  | --             |

**Note:**

- 1. Correction Factor = Antenna factor + Cable loss - Preamplifier**
- 2. The formula of measured value as: Test Result = Reading + Correction Factor**
- 3. Detector function in the form : PK = Peak, QP = Quasi Peak, AV = Average**
- 4. All not in the table noted test results are more than 20 dB below the relevant limits.**
- 5. Up Line: PK Limit Line, Down Line: Ave Limit Line.**
- 6. Please see attached diagrams in appendix.**

All other not noted test plots do not contain significant test results in relation to the limits  
Test results: The unit meet the FCC requirements.

Test equipment used: ETSTW-RE 004, ETSTW-RE 030, ETSTW-RE 062, ETSTW-RE 142,  
ETSTW-RE 152



Registration number: W6M22302-22480-C-2

FCC ID: GX9HSGWCATM1

### **3.6 Channel Bandwidth**

Measurement of Necessary Bandwidth (BN)

Test date: February 23, 2023

Temperature: 20.9 °C

Humidity: 58.6%

Tester: Rick

| Used frequency | Bandwidth   | Limit       |
|----------------|-------------|-------------|
| 433.82 MHz     | 54.1667 kHz | 1.08455 MHz |

Limits:

The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.

Test equipment used: ETSTW-RE 004

Explanation: See attached diagrams in appendix.



Registration number: W6M22302-22480-C-2


FCC ID: GX9HSGWCATM1

### **3.7 Antenna requirement**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

Explanation: This Monopole antenna is integral antenna which passes antenna requirement.

|                                      |                                                   |                                |
|--------------------------------------|---------------------------------------------------|--------------------------------|
| The equipment meets the requirements | yes<br><input checked="checked" type="checkbox"/> | no<br><input type="checkbox"/> |
|--------------------------------------|---------------------------------------------------|--------------------------------|



Registration number: W6M22302-22480-C-2

FCC ID: GX9HSGWCATM1

## **3.8 Duty Cycle**

The correction factor, based on the channel dwell time in a 100ms period, may be mathematically applied to a measurement made with an average detector, to further reduce the measured value.

Average Reading = Peak Reading (dBuV/m) + Duty Cycle Correction

Test date: February 23, 2023

Temperature: 20.9 °C

Humidity: 58.6%

Tester: Kent


Duty Cycle Correction =  $20 \log(\text{Cycle})$

In order to determine the Duty Cycle, the EUT is measured as:

| Testing Mode      | T period<br>(ms) | T on<br>(ms) | Duty Cycle | Duty Cycle Correction<br>$20 \cdot \log(\text{Duty Cycle})$ |
|-------------------|------------------|--------------|------------|-------------------------------------------------------------|
| Transmitting mode | 100              | 95.35        | 0.9535     | -0.41                                                       |

Test equipment used: ETSTW-RE 055, ETSTW-RE 004

Explanation: See attached diagrams in appendix.




Registration number: W6M22302-22480-C-2

FCC ID: GX9HSGWCATM1


## 3.9 Conducted Measurement at (AC) Power Line

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the table bellows with this provision shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminals.

This measurement was transact first with instrumentation using an average and peak detector and a 10 kHz bandwidth. If the peak detector achieves a calculated level, the measurement is repeated by an instrumentation using a quasi-peak detector.

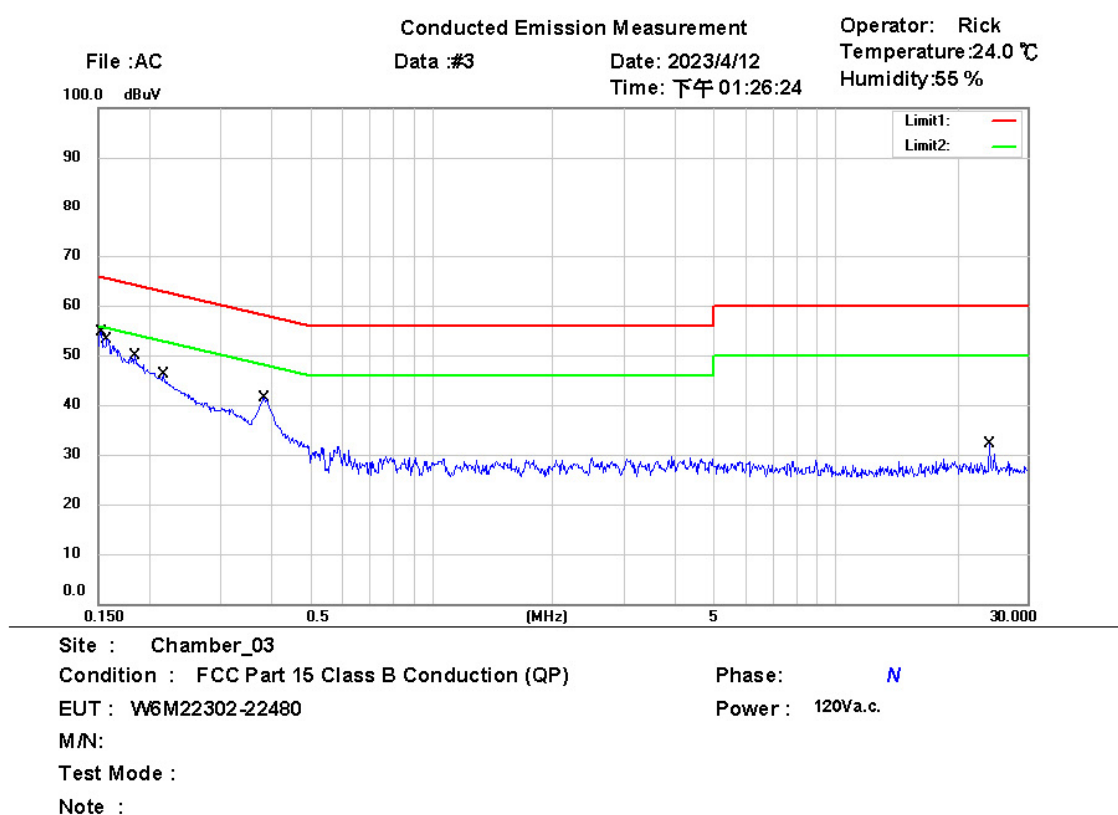

| Mk. | Frequency (MHz) | Reading (dBuV) | Detector | Corrected factor (dB) | Result (dBuV) | Limit (dBuV) | Margin (dB) | Comment |
|-----|-----------------|----------------|----------|-----------------------|---------------|--------------|-------------|---------|
| *   | 0.1518          | 37.37          | QP       | 9.59                  | 46.96         | 65.90        | -18.94      |         |
|     | 0.1518          | 22.79          | AVG      | 9.59                  | 32.38         | 55.90        | -23.52      |         |
|     | 0.1568          | 36.29          | QP       | 9.59                  | 45.88         | 65.63        | -19.75      |         |
|     | 0.1568          | 23.75          | AVG      | 9.59                  | 33.34         | 55.63        | -22.29      |         |
|     | 0.1840          | 33.79          | QP       | 9.59                  | 43.38         | 64.30        | -20.92      |         |
|     | 0.1840          | 22.03          | AVG      | 9.59                  | 31.62         | 54.30        | -22.68      |         |
|     | 0.2165          | 29.78          | QP       | 9.59                  | 39.37         | 62.95        | -23.58      |         |
|     | 0.2165          | 10.89          | AVG      | 9.59                  | 20.48         | 52.95        | -32.47      |         |
|     | 0.3833          | 25.81          | QP       | 9.64                  | 35.45         | 58.21        | -22.76      |         |
|     | 0.3833          | 18.50          | AVG      | 9.64                  | 28.14         | 48.21        | -20.07      |         |
|     | 24.0000         | 14.71          | QP       | 10.08                 | 24.79         | 60.00        | -35.21      |         |
|     | 24.0000         | 13.10          | AVG      | 10.08                 | 23.18         | 50.00        | -26.82      |         |



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22302-22480-C-2

FCC ID: GX9HSGWCATM1

Conducted Emission Measurement

Data :#2


Date: 2023/4/12

Time: 下午 01:23:02

Operator: Rick

Temperature: 24.0 °C

Humidity: 55 %

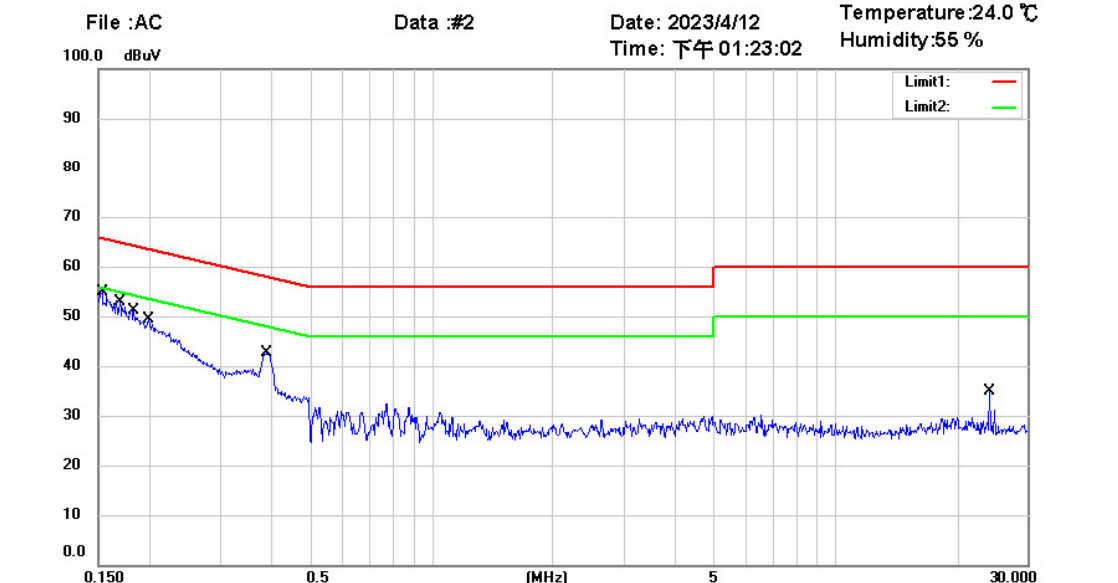

Site : Chamber\_03

Condition : FCC Part 15 Class B Conduction (QP)

Phase: L1

EUT : W6M22302-22480

Power : 120Va.c.

M/N:

Test Mode :

Note :

| Mk. | Frequency (MHz) | Reading (dBuV) | Detector | Corrected factor(dB) | Result (dBuV) | Limit (dBuV) | Margin (dB) | Comment |
|-----|-----------------|----------------|----------|----------------------|---------------|--------------|-------------|---------|
| *   | 0.1530          | 38.49          | QP       | 9.63                 | 48.12         | 65.84        | -17.72      |         |
|     | 0.1530          | 23.75          | AVG      | 9.63                 | 33.38         | 55.84        | -22.46      |         |
|     | 0.1686          | 36.89          | QP       | 9.63                 | 46.52         | 65.03        | -18.51      |         |
|     | 0.1686          | 18.03          | AVG      | 9.63                 | 27.66         | 55.03        | -27.37      |         |
|     | 0.1833          | 34.71          | QP       | 9.63                 | 44.34         | 64.33        | -19.99      |         |
|     | 0.1833          | 20.84          | AVG      | 9.63                 | 30.47         | 54.33        | -23.86      |         |
|     | 0.1988          | 32.39          | QP       | 9.63                 | 42.02         | 63.66        | -21.64      |         |
|     | 0.1988          | 13.13          | AVG      | 9.63                 | 22.76         | 53.66        | -30.90      |         |
|     | 0.3911          | 28.03          | QP       | 9.67                 | 37.70         | 58.04        | -20.34      |         |
|     | 0.3911          | 16.46          | AVG      | 9.67                 | 26.13         | 48.04        | -21.91      |         |
|     | 24.0000         | 17.97          | QP       | 10.19                | 28.16         | 60.00        | -31.84      |         |
|     | 24.0000         | 14.46          | AVG      | 10.19                | 24.65         | 50.00        | -25.35      |         |


## Note:

1. The formula of measured value as: Test Result = Reading + Correction Factor
2. The Correction Factor = Cable Loss + LISN Insertion Loss + Pulse Limit Loss
3. Detector function in the form : PK = Peak, QP = Quasi Peak, AV = Average
4. All not in the table noted test results are more than 20 dB below the relevant limits.
5. Up Line: QP Limit Line, Down Line: Ave Limit Line.

## Limits:

| Frequency of Emission (MHz) | Conducted Limit (dBuV) |          |
|-----------------------------|------------------------|----------|
|                             | Quasi Peak             | Average  |
| 0.15-0.5                    | 66 to 56               | 56 to 46 |
| 0.5-5                       | 56                     | 46       |
| 5-30                        | 60                     | 50       |


Test equipment used: ETSTW-CE 001, ETSTW-CE 016, ETSTW-RE 045.



## **Appendix**

### **Measurement diagrams**


1. Active Time
2. Duty Cycle
3. Bandwidth
4. Spurious Emissions radiated



Registration number: W6M22302-22480-C-2


FCC ID: GX9HSGWCATM1

## Active Time

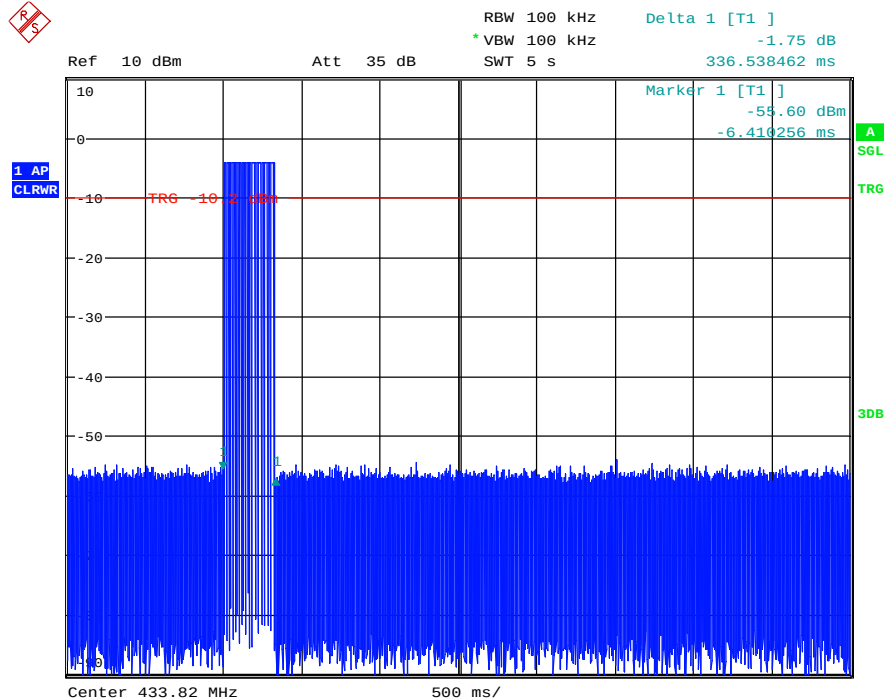


Date: 23.FEB.2023 21:11:34

## Duty Cycle

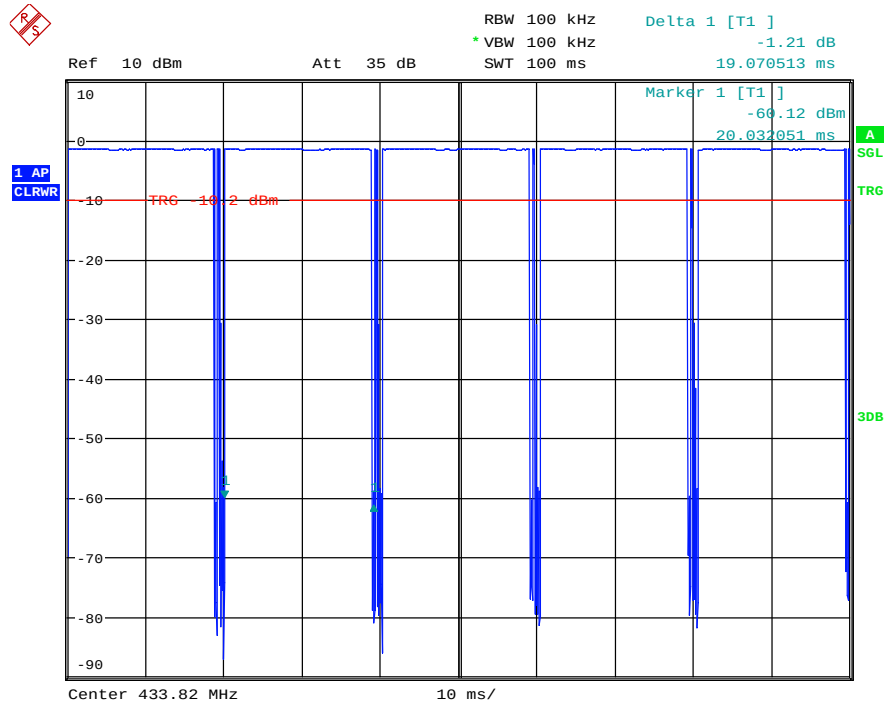

Date: 23.FEB.2023 21:16:13






# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22302-22480-C-2

FCC ID: GX9HSGWCATM1

## Bandwidth

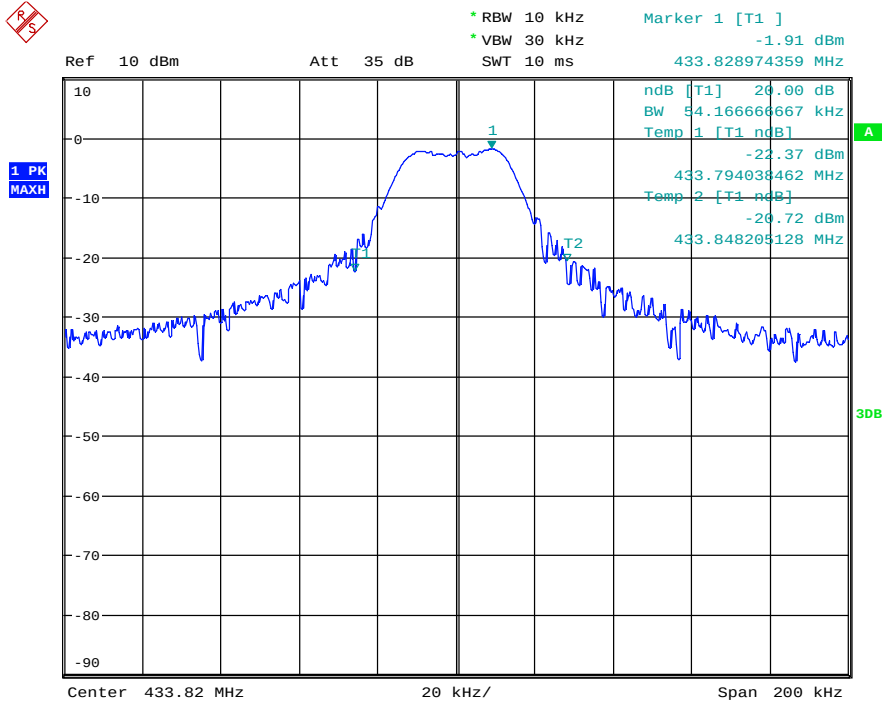

Date: 23.FEB.2023 21:08:39



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei  
Tel:+886-2-6606-8877  
Fax:+886-2-6606-8879

# Radiated Emission Measurement

Operator: Sky

File :1

Data :#1


Date: 2023/3/13

Temperature:21.1 °C

100.0 dBuV/m

Time: 下午 08:07:15

Humidity:57.0 %

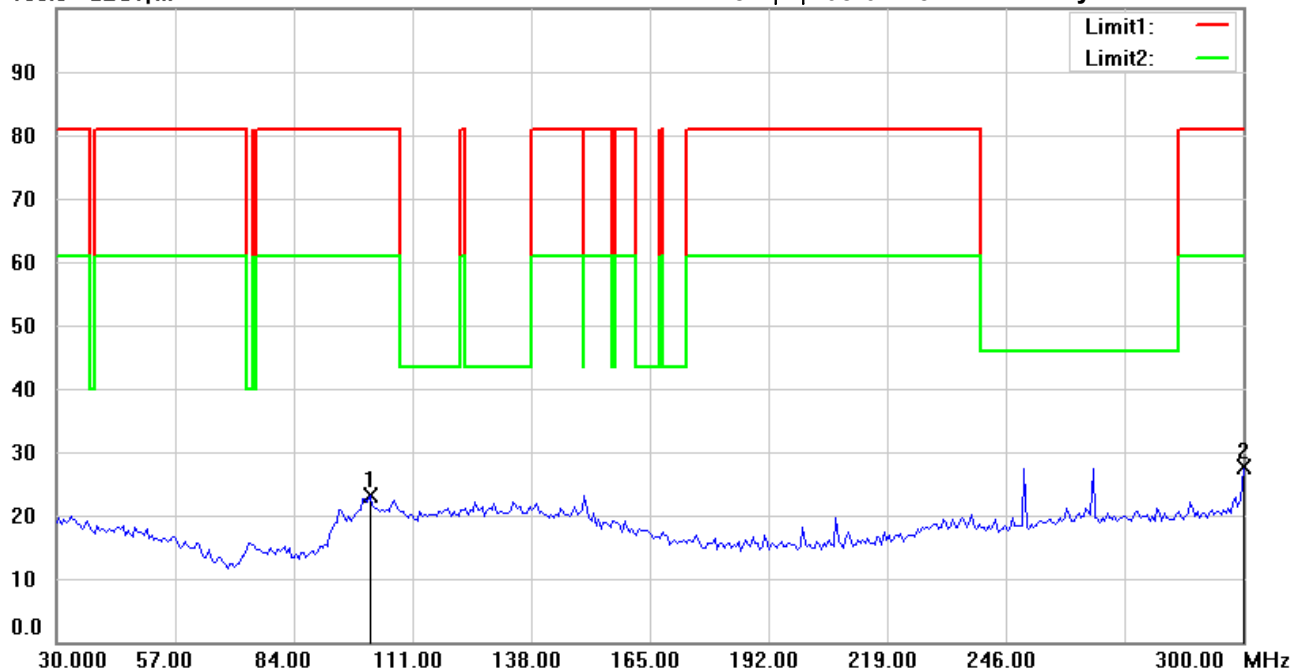

Site : Chamber

Condition : FCC 15.231(433MHz) 30-300(PK)

EUT : W6M22302-22480

M/N:

Test Mode : TX 433.82MHz

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

| Mk. | Frequency (MHz) | Reading (dBuV) | Detector | Corr. factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Ant.Pos (cm) | Tab.Pos (deg.) | Margin (dB) | Comment |
|-----|-----------------|----------------|----------|---------------------|-----------------|----------------|--------------|----------------|-------------|---------|
|     | 101.4228        | 31.97          | peak     | -8.79               | 23.18           | 80.80          | 100          | 40             | -57.62      |         |
| *   | 300.0000        | 33.75          | peak     | -6.07               | 27.68           | 80.80          | 100          | 21             | -53.12      |         |

\*:Maximum data    x:Over limit    !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei  
Tel: +886-2-6606-8877  
Fax: +886-2-6606-8879

### Radiated Emission Measurement

Operator: Sky

File :1

Data :#2


Date: 2023/3/13

Temperature: 21.1 °C

100.0 dBuV/m

Time: 下午 08:09:57

Humidity: 57.0 %

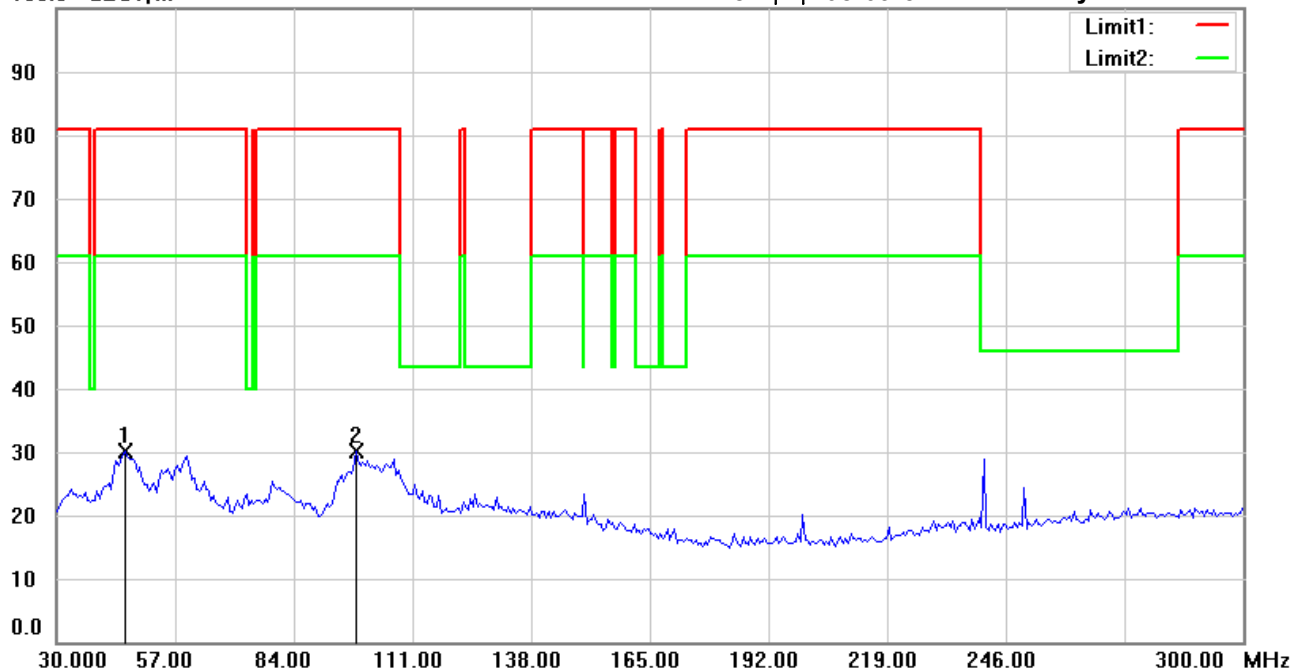

Site : Chamber

Condition : FCC 15.231(433MHz) 30-300(PK)

EUT : W6M22302-22480

M/N:

Test Mode : TX 433.82MHz

Note :

Polarization: **Vertical**

Power : 120 Va.c.

Distance: 3m

| Mk. | Frequency (MHz) | Reading (dBuV) | Detector | Corr. factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Ant.Pos (cm) | Tab.Pos (deg.) | Margin (dB) | Comment |
|-----|-----------------|----------------|----------|---------------------|-----------------|----------------|--------------|----------------|-------------|---------|
| *   | 45.6914         | 39.54          | peak     | -9.34               | 30.20           | 80.80          | 100          | 130            | -50.60      |         |
|     | 98.1764         | 39.72          | peak     | -9.69               | 30.03           | 80.80          | 100          | 104            | -50.77      |         |

\*:Maximum data    x:Over limit    !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei  
Tel:+886-2-6606-8877  
Fax:+886-2-6606-8879

# Radiated Emission Measurement

Operator: Sky

File :2

Data :#1


Date: 2023/3/13

Temperature:21.1 °C

100.0 dBuV/m

Time: 下午 07:55:56

Humidity:57.0 %

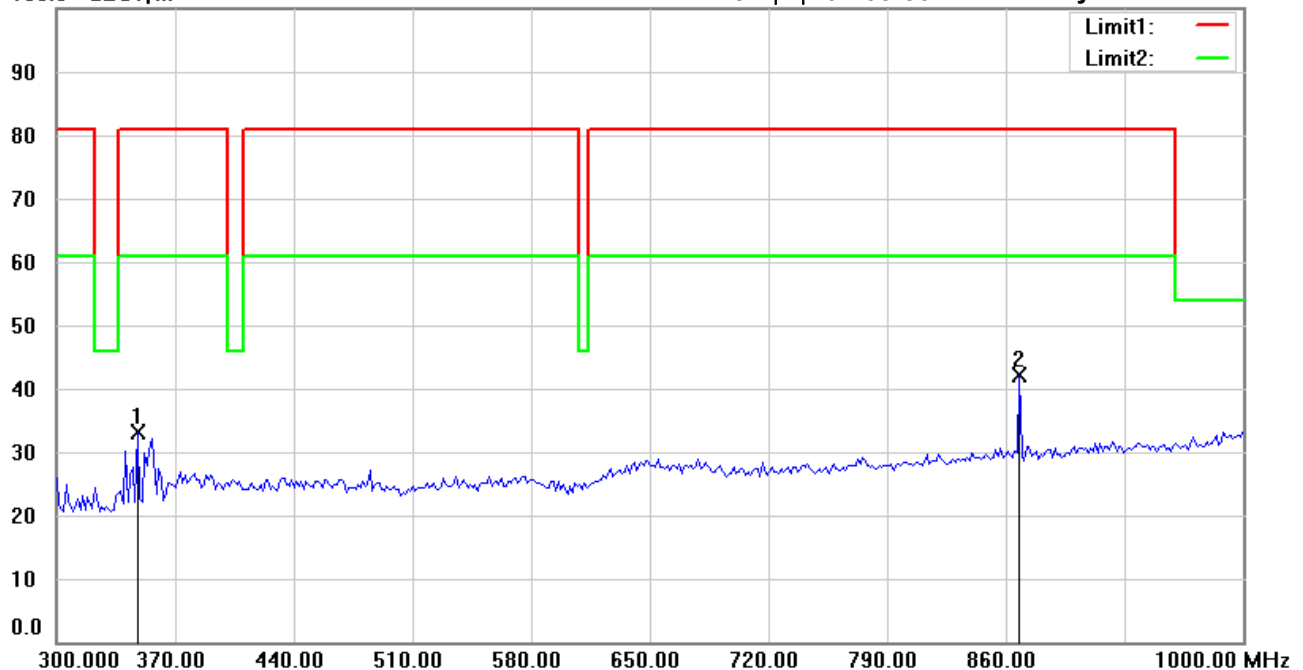

Site : Chamber

Condition : FCC 15.231(433MHz) 300-1000(PK)

EUT : W6M22302-22480

M/N:

Test Mode : TX 433.82MHz

Note :

Polarization: *Horizontal*

Power : 120 Va.c.

Distance: 3m

| Mk. | Frequency (MHz) | Reading (dBuV) | Detector | Corr. factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Ant.Pos (cm) | Tab.Pos (deg.) | Margin (dB) | Comment |
|-----|-----------------|----------------|----------|---------------------|-----------------|----------------|--------------|----------------|-------------|---------|
|     | 347.6954        | 38.30          | peak     | -5.23               | 33.07           | 80.80          | 100          | 255            | -47.73      |         |
| *   | 868.1363        | 39.01          | peak     | 3.06                | 42.07           | 80.80          | 100          | 310            | -38.73      |         |

\*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei  
Tel:+886-2-6606-8877  
Fax:+886-2-6606-8879

# Radiated Emission Measurement

Operator: Sky

File :2

Data :#2


Date: 2023/3/13

Temperature:21.1 °C

100.0 dBuV/m

Time: 下午 07:57:40

Humidity:57.0 %

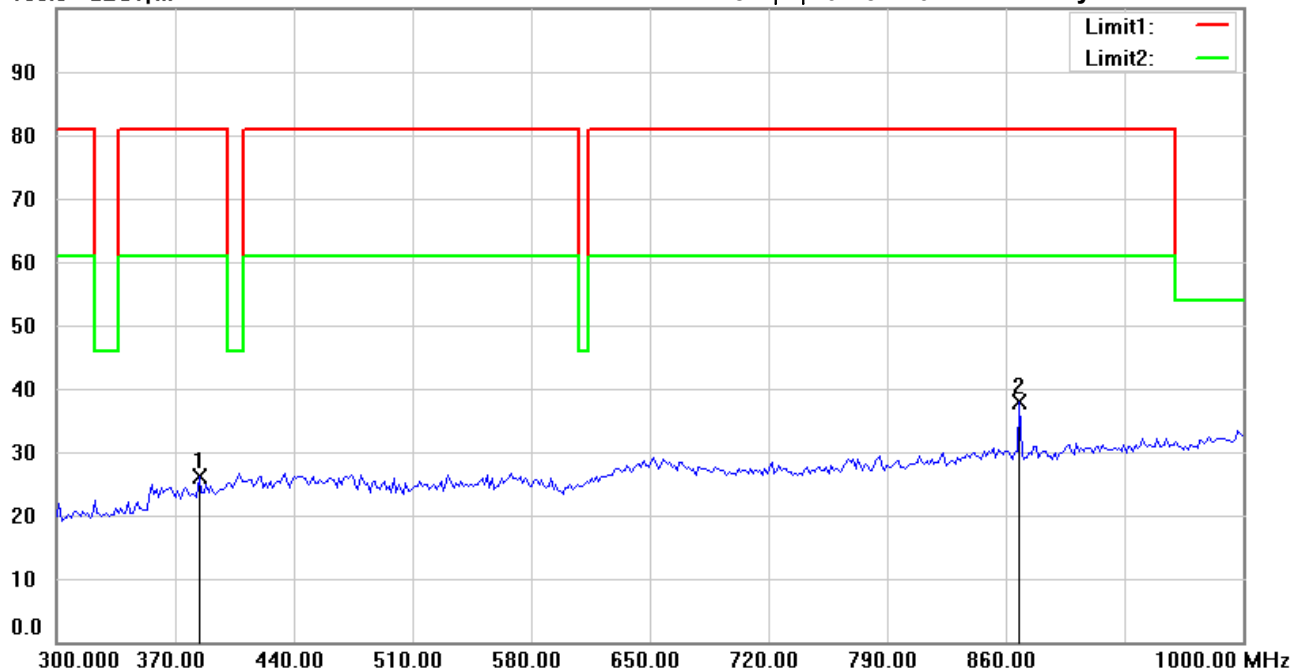

Site : Chamber

Condition : FCC 15.231(433MHz) 300-1000(PK)

EUT : W6M22302-22480

M/N:

Test Mode : TX 433.82MHz

Note :

Polarization: **Vertical**

Power : 120 Va.c.

Distance: 3m

| Mk. | Frequency (MHz) | Reading (dBuV) | Detector | Corr. factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Ant.Pos (cm) | Tab.Pos (deg.) | Margin (dB) | Comment |
|-----|-----------------|----------------|----------|---------------------|-----------------|----------------|--------------|----------------|-------------|---------|
|     | 384.1681        | 30.44          | peak     | -4.19               | 26.25           | 80.80          | 100          | 73             | -54.55      |         |
| *   | 868.1363        | 34.81          | peak     | 3.06                | 37.87           | 80.80          | 100          | 18             | -42.93      |         |

\*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei  
Tel: +886-2-6606-8877  
Fax: +886-2-6606-8879

### Radiated Emission Measurement

Operator: Sky

File : 3

Data : #1


Date: 2023/3/13

Temperature: 21.1 °C

100.0 dBuV/m

Time: 下午 08:42:34

Humidity: 57.0 %

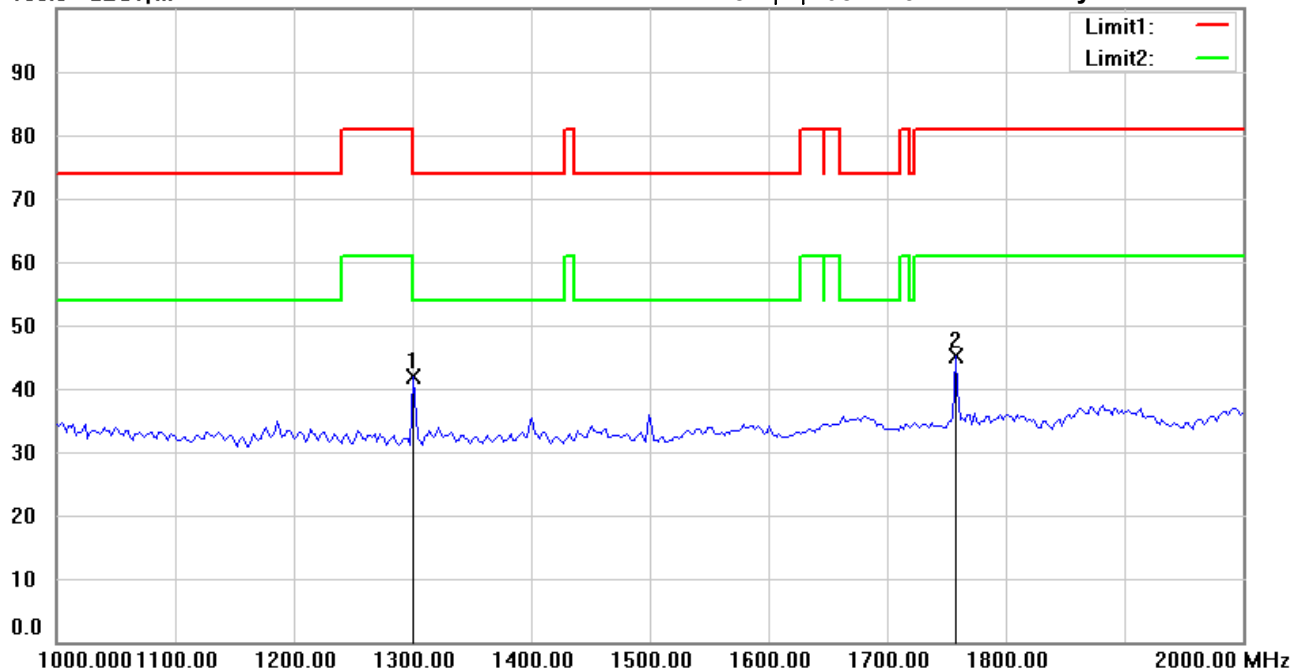

Site : Chamber

Condition : FCC 15.231(433MHz) 1000-2000(PK)

EUT : W6M22302-22480

M/N:

Test Mode : TX 433.82MHz

Note :

Polarization: *Horizontal*

Power : 120 Va.c.

Distance: 3m

| Mk. | Frequency (MHz) | Reading (dBuV) | Detector | Corr. factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Ant.Pos (cm) | Tab.Pos (deg.) | Margin (dB) | Comment |
|-----|-----------------|----------------|----------|---------------------|-----------------|----------------|--------------|----------------|-------------|---------|
| *   | 1300.601        | 51.45          | peak     | -9.57               | 41.88           | 74.00          | 150          | 214            | -32.12      |         |
|     | 1757.515        | 52.51          | peak     | -7.28               | 45.23           | 80.80          | 150          | 71             | -35.57      |         |

\*:Maximum data    x:Over limit    !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei  
Tel: +886-2-6606-8877  
Fax: +886-2-6606-8879

### Radiated Emission Measurement

Operator: Sky

File : 3

Data : #4


Date: 2023/3/13

Temperature: 21.1 °C

100.0 dBuV/m

Time: 下午 08:45:36

Humidity: 57.0 %

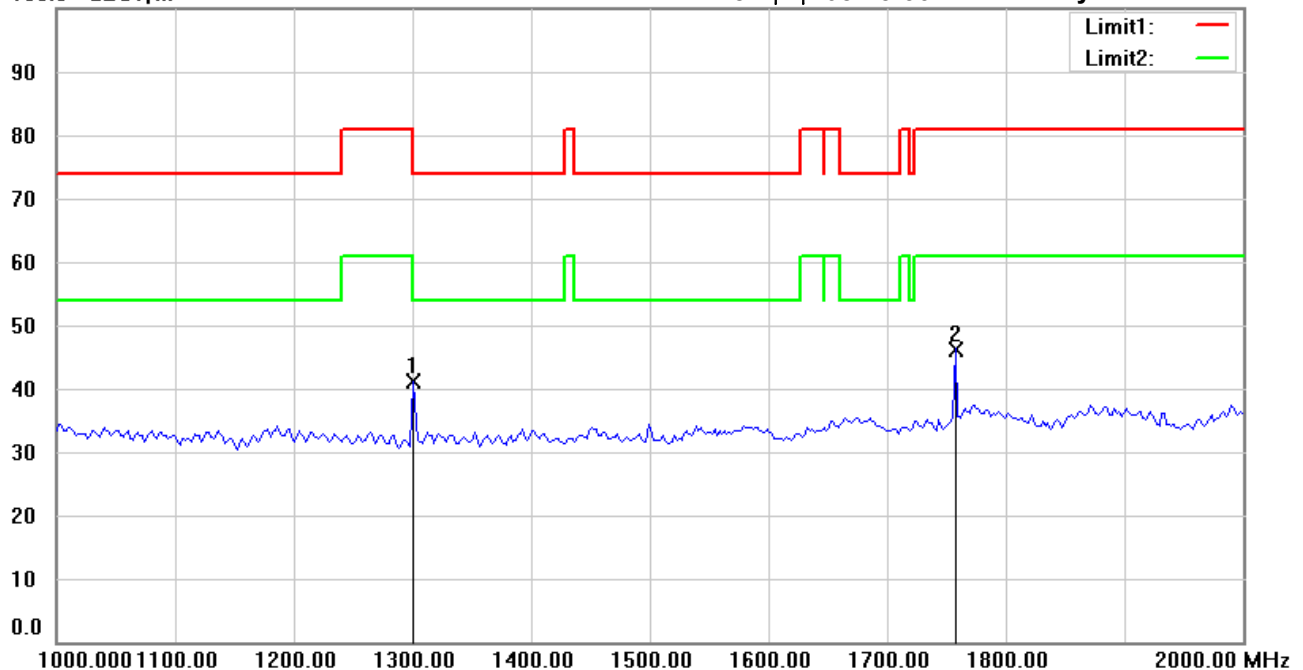

Site : Chamber

Condition : FCC 15.231(433MHz) 1000-2000(PK)

EUT : W6M22302-22480

M/N:

Test Mode : TX 433.82MHz

Note :

Polarization: **Vertical**

Power : 120 Va.c.

Distance: 3m

| Mk. | Frequency (MHz) | Reading (dBuV) | Detector | Corr. factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Ant.Pos (cm) | Tab.Pos (deg.) | Margin (dB) | Comment |
|-----|-----------------|----------------|----------|---------------------|-----------------|----------------|--------------|----------------|-------------|---------|
| *   | 1300.601        | 50.74          | peak     | -9.57               | 41.17           | 74.00          | 150          | 43             | -32.83      |         |
|     | 1757.515        | 53.53          | peak     | -7.28               | 46.25           | 80.80          | 150          | 100            | -34.55      |         |

\*:Maximum data    x:Over limit    !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei  
Tel:+886-2-6606-8877  
Fax:+886-2-6606-8879

# Radiated Emission Measurement

Operator: Sky

File :3

Data :#2


Date: 2023/3/13

Temperature:21.1 °C

100.0 dBuV/m

Time: 下午 08:43:34

Humidity:57.0 %

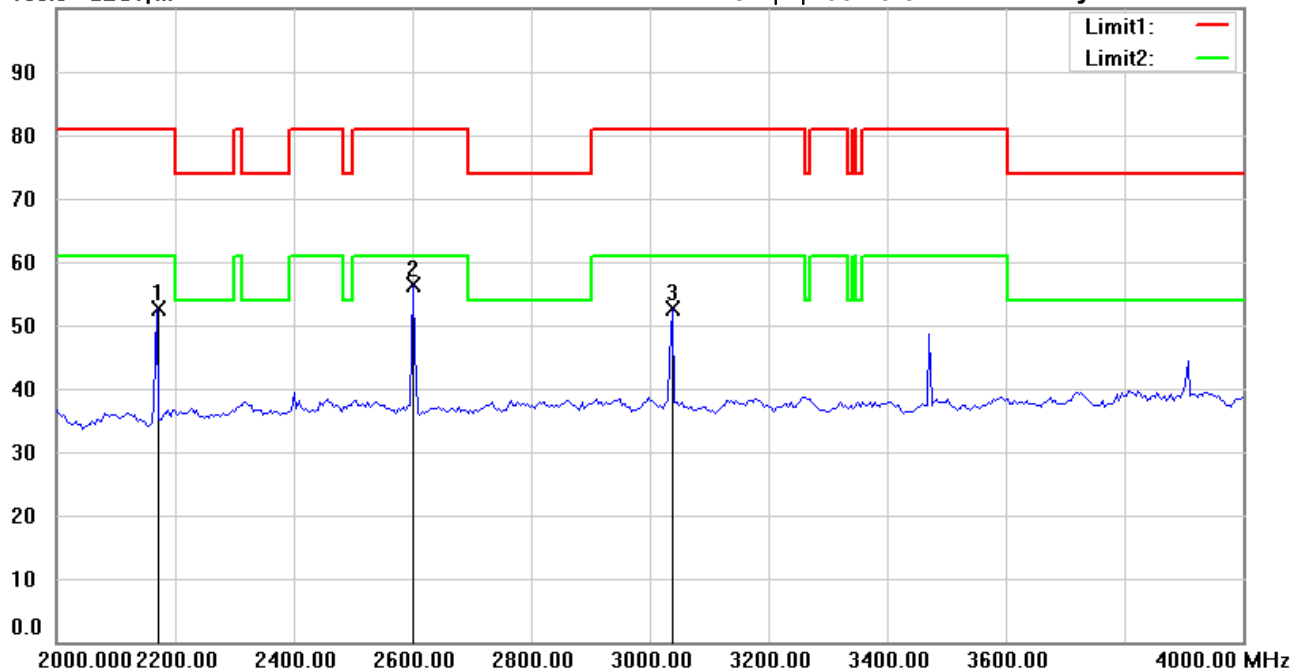

Site : Chamber

Condition : FCC 15.231(433MHz) 2000-4000(PK)

EUT : W6M22302-22480

M/N:

Test Mode : TX 433.82MHz

Note :

Polarization: *Horizontal*

Power : 120 Va.c.

Distance: 3m

| Mk. | Frequency (MHz) | Reading (dBuV) | Detector | Corr. factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Ant.Pos (cm) | Tab.Pos (deg.) | Margin (dB) | Comment |
|-----|-----------------|----------------|----------|---------------------|-----------------|----------------|--------------|----------------|-------------|---------|
|     | 2168.337        | 59.04          | peak     | -6.52               | 52.52           | 80.80          | 150          | 115            | -28.28      |         |
| *   | 2601.202        | 61.34          | peak     | -4.93               | 56.41           | 80.80          | 150          | 25             | -24.39      |         |
|     | 3038.076        | 56.72          | peak     | -4.01               | 52.71           | 80.80          | 150          | 159            | -28.09      |         |

\*:Maximum data    x:Over limit    !:over margin





Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei  
Tel:+886-2-6606-8877  
Fax:+886-2-6606-8879

# Radiated Emission Measurement

Operator: Sky

File :3

Data :#5


Date: 2023/3/13

Temperature:21.1 °C

100.0 dBuV/m

Time: 下午 08:46:38

Humidity:57.0 %

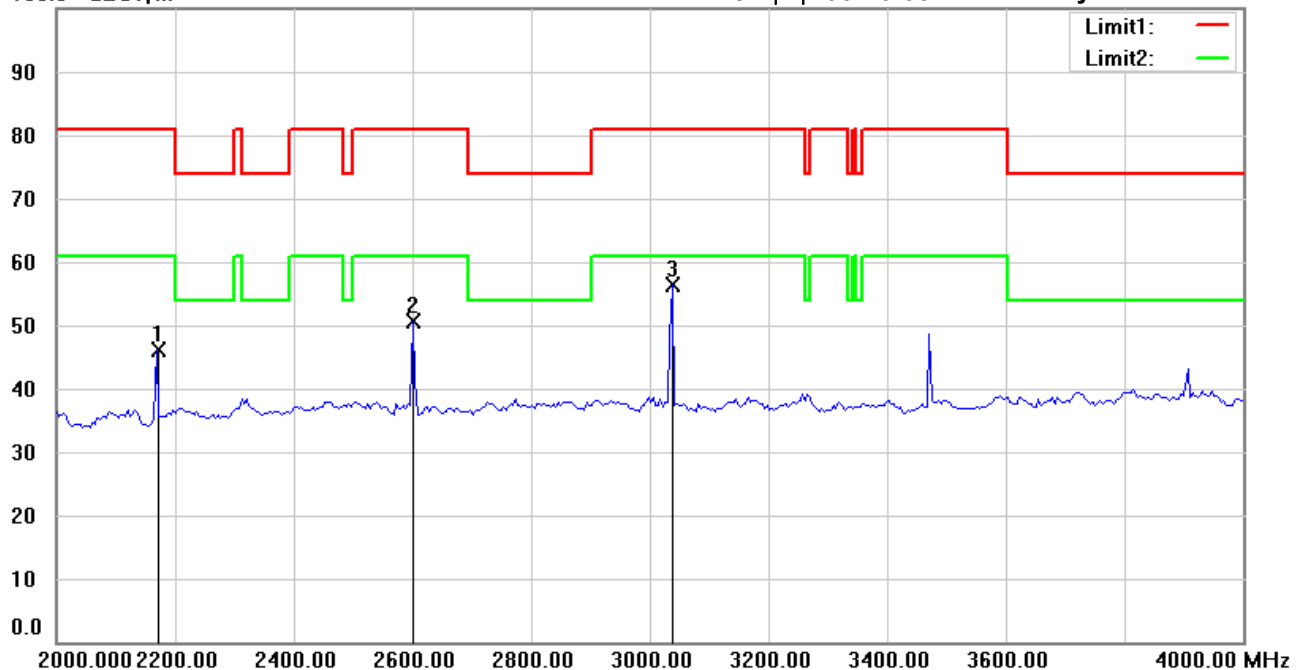

Site : Chamber

Condition : FCC 15.231(433MHz) 2000-4000(PK)

EUT : W6M22302-22480

M/N:

Test Mode : TX 433.82MHz

Note :

Polarization: **Vertical**

Power : 120 Va.c.

Distance: 3m

| Mk. | Frequency (MHz) | Reading (dBuV) | Detector | Corr. factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Ant.Pos (cm) | Tab.Pos (deg.) | Margin (dB) | Comment |
|-----|-----------------|----------------|----------|---------------------|-----------------|----------------|--------------|----------------|-------------|---------|
|     | 2168.337        | 52.76          | peak     | -6.52               | 46.24           | 80.80          | 150          | 8              | -34.56      |         |
|     | 2601.202        | 55.59          | peak     | -4.93               | 50.66           | 80.80          | 150          | 32             | -30.14      |         |
| *   | 3038.076        | 60.27          | peak     | -4.01               | 56.26           | 80.80          | 150          | 109            | -24.54      |         |

\*:Maximum data    x:Over limit    !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei  
Tel: +886-2-6606-8877  
Fax: +886-2-6606-8879

# Radiated Emission Measurement

Operator: Sky

File : 3

Data : #3


Date: 2023/3/13

Temperature: 21.1 °C

100.0 dBuV/m

Time: 下午 08:44:35

Humidity: 57.0 %

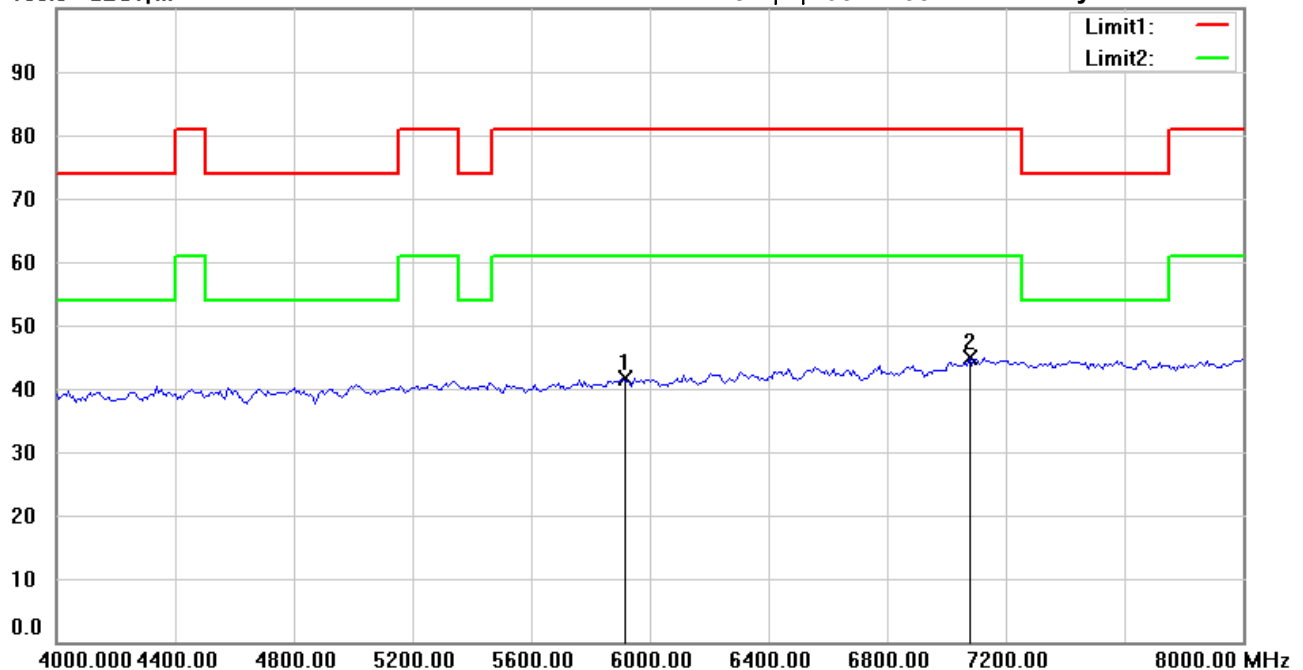

Site : Chamber

Condition : FCC 15.231(433MHz) 4000-8000(PK)

EUT : W6M22302-22480

M/N:

Test Mode : TX 433.82MHz

Note :

Polarization: Horizontal

Power : 120 Va.c.

Distance: 3m

| Mk. | Frequency (MHz) | Reading (dBuV) | Detector | Corr. factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Ant.Pos (cm) | Tab.Pos (deg.) | Margin (dB) | Comment |
|-----|-----------------|----------------|----------|---------------------|-----------------|----------------|--------------|----------------|-------------|---------|
|     | 5907.816        | 40.45          | peak     | 1.25                | 41.70           | 80.80          | 150          | 3              | -39.10      |         |
| *   | 7078.156        | 41.12          | peak     | 3.86                | 44.98           | 80.80          | 150          | 81             | -35.82      |         |

\*:Maximum data    x:Over limit    !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei  
Tel: +886-2-6606-8877  
Fax: +886-2-6606-8879

# Radiated Emission Measurement

Operator: Sky

File : 3

Data : #6


Date: 2023/3/13

Temperature: 21.1 °C

100.0 dBuV/m

Time: 下午 08:47:39

Humidity: 57.0 %

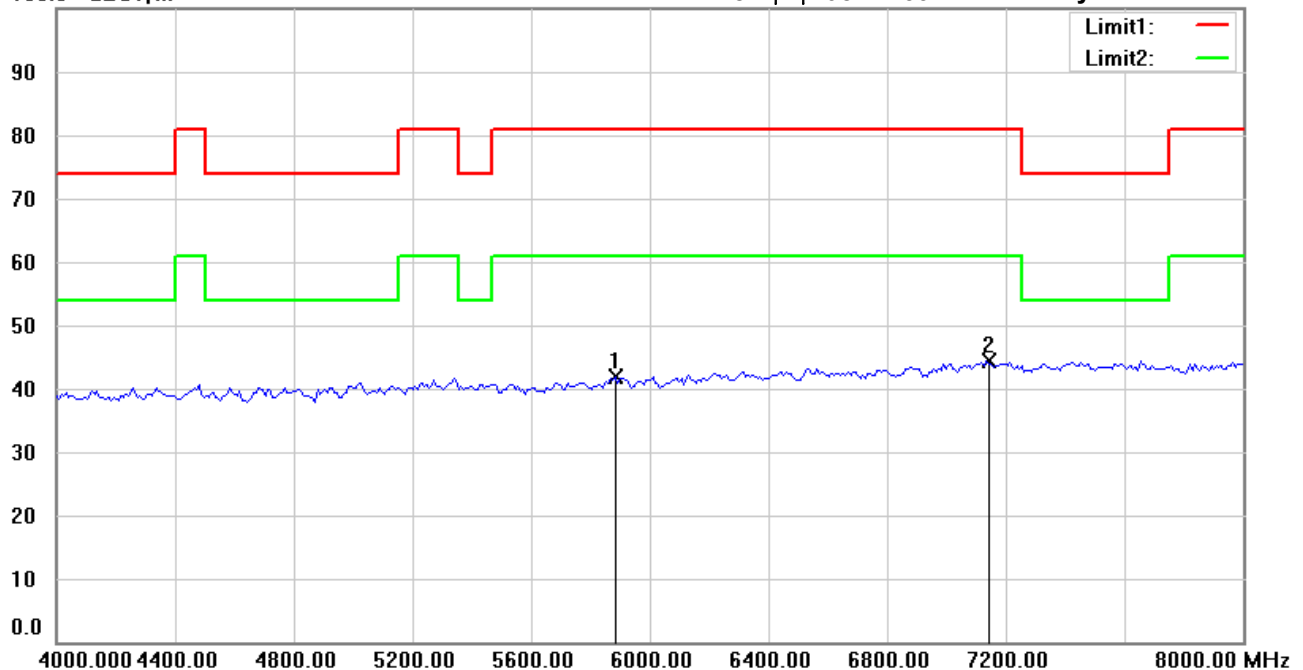

Site : Chamber

Condition : FCC 15.231(433MHz) 4000-8000(PK)

EUT : W6M22302-22480

M/N:

Test Mode : TX 433.82MHz

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

| Mk. | Frequency (MHz) | Reading (dBuV) | Detector | Corr. factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Ant.Pos (cm) | Tab.Pos (deg.) | Margin (dB) | Comment |
|-----|-----------------|----------------|----------|---------------------|-----------------|----------------|--------------|----------------|-------------|---------|
|     | 5883.767        | 40.67          | peak     | 1.14                | 41.81           | 80.80          | 150          | 7              | -38.99      |         |
| *   | 7134.269        | 40.46          | peak     | 3.93                | 44.39           | 80.80          | 150          | 110            | -36.41      |         |

\*:Maximum data    x:Over limit    !:over margin