



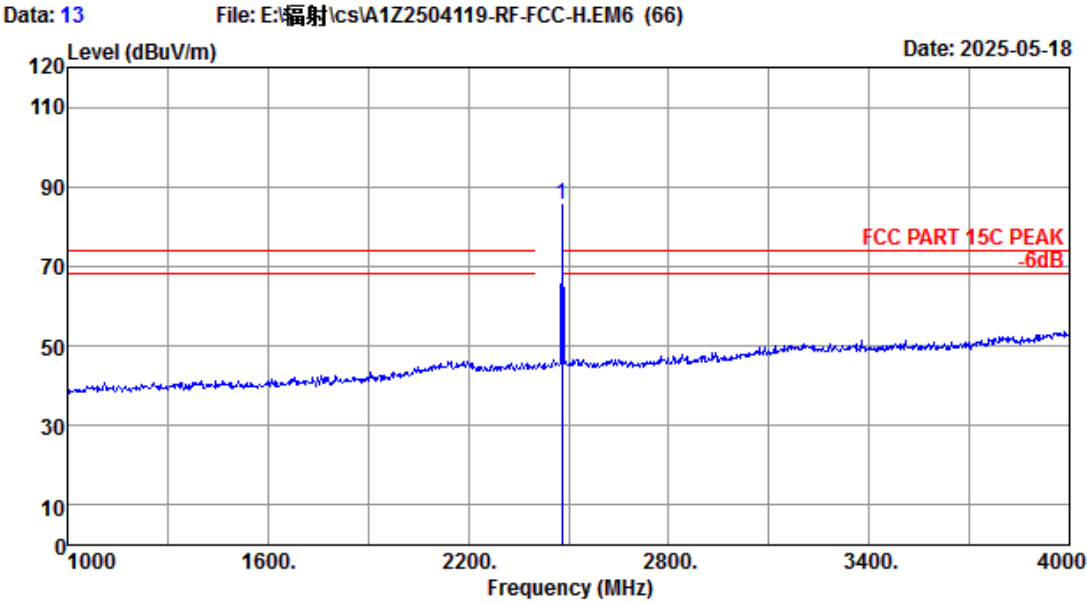


Site no.	: RF Chamber	Data no.	: 13
Dis. / Ant.	: 3m 2024 MCTD1209-3007	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK	Engineer	: Epoch
Env. / Ins.	: 22.3°C/50%		
Test Mode	: GFSK 2480MHz TX Mode		

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Emission				
					Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.000	27.84	4.68	49.57	102.57	85.52	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
-Amp Factor
2. The emission levels that are 20dB below the official
limit are not reported.

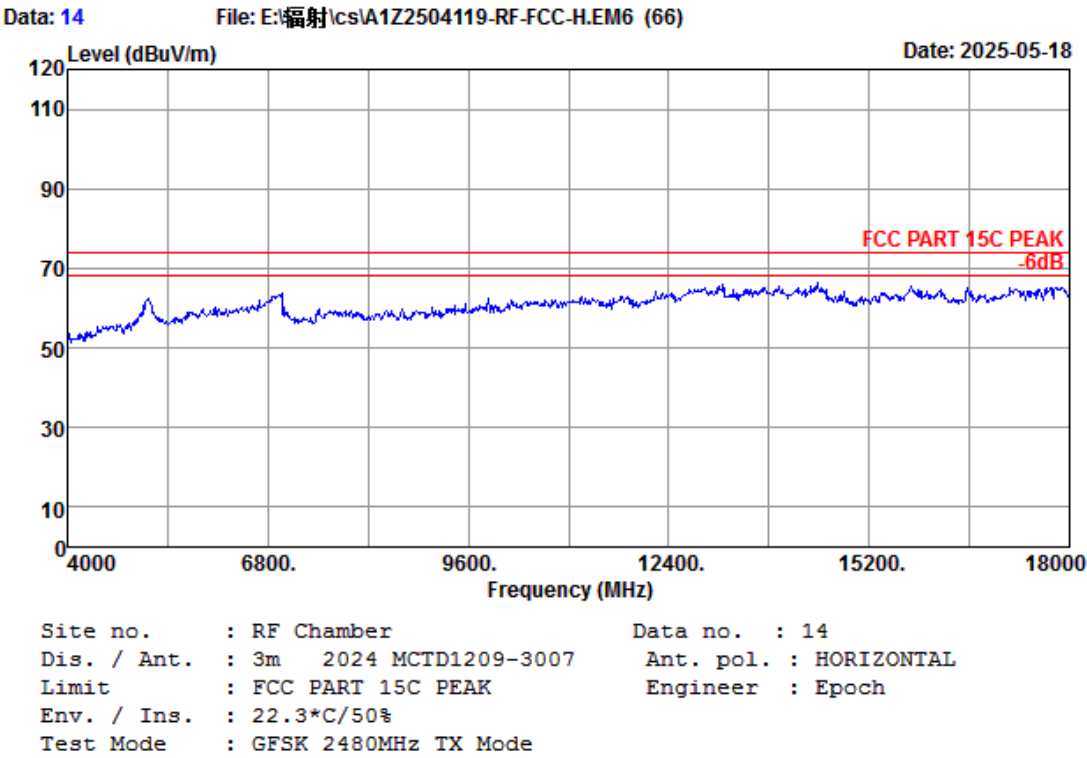


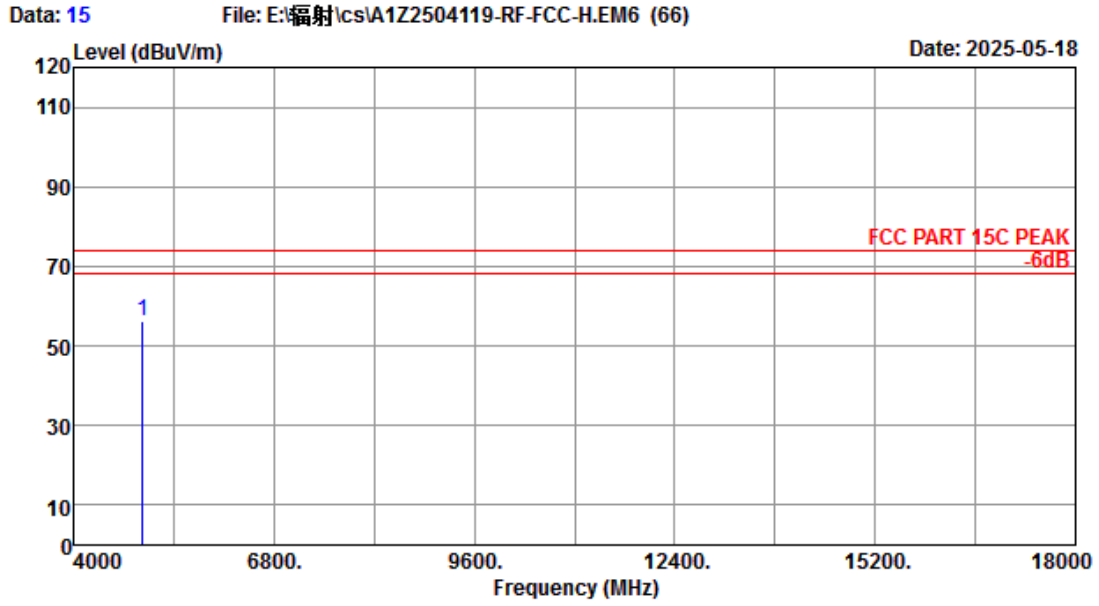

Site no. : RF Chamber Data no. : 15
 Dis. / Ant. : 3m 2024 MCTD1209-3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Engineer : Epoch
 Env. / Ins. : 22.3°C/50%
 Test Mode : GFSK 2480MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4960.000	33.60	6.68	48.20	64.08	56.16	74.00	17.84	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

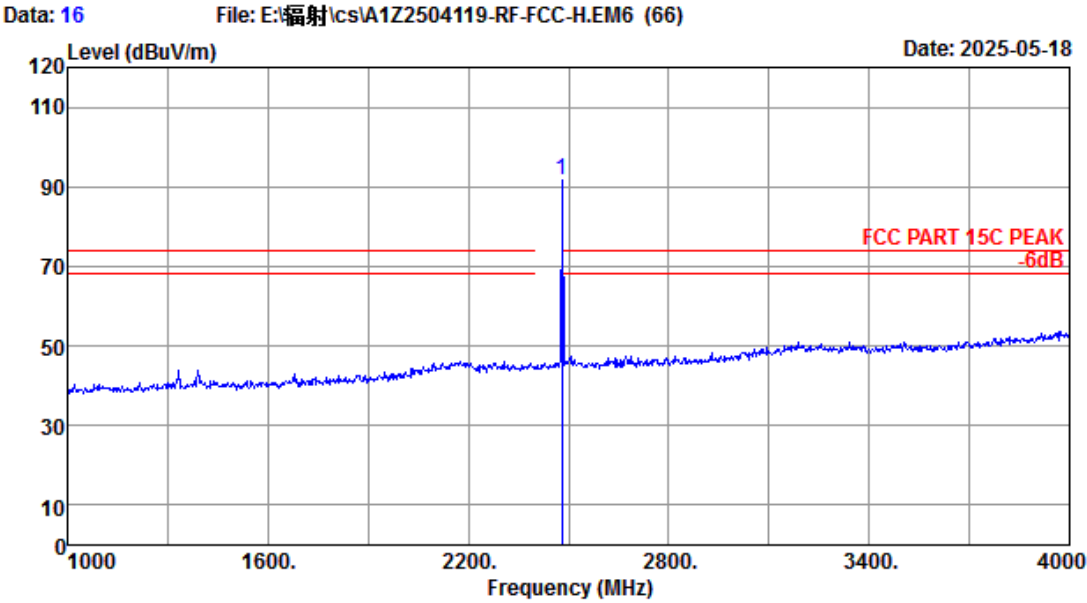


Site no.	: RF Chamber	Data no.	: 16
Dis. / Ant.	: 3m 2024 MCTD1209-3007	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK	Engineer	: Epoch
Env. / Ins.	: 22.3°C/50%		
Test Mode	: GFSK 2480MHz TX Mode		

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Emission				
					Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.000	27.84	4.68	49.57	108.49	91.44	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
-Amp Factor
2. The emission levels that are 20dB below the official
limit are not reported.

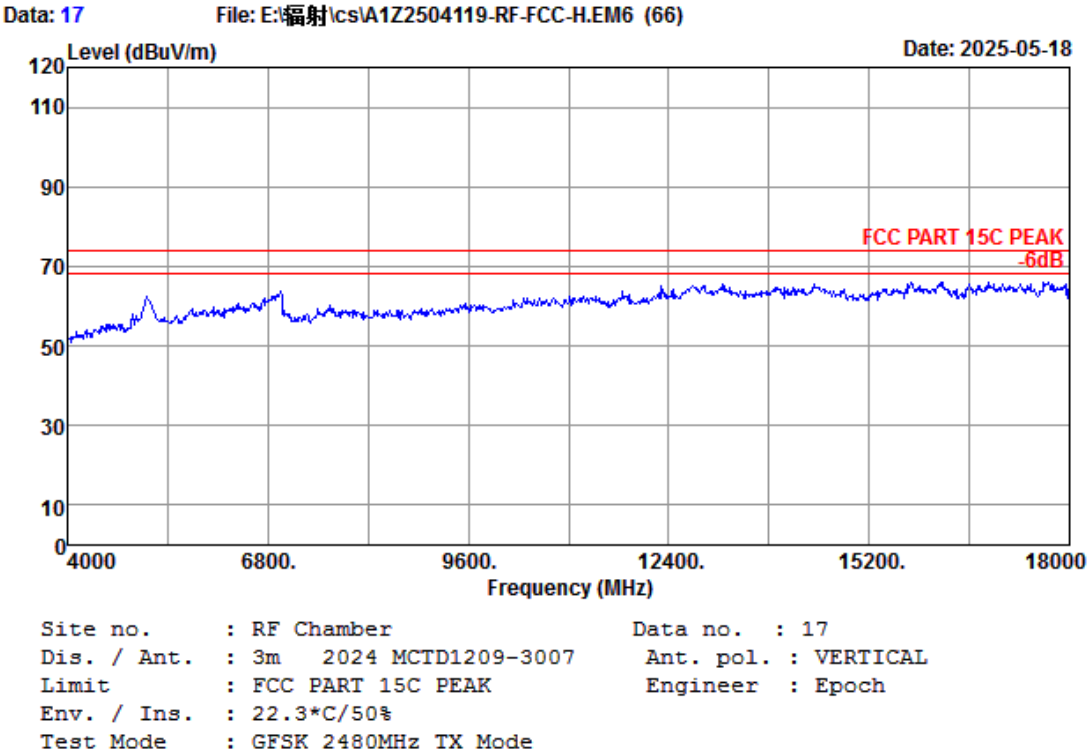


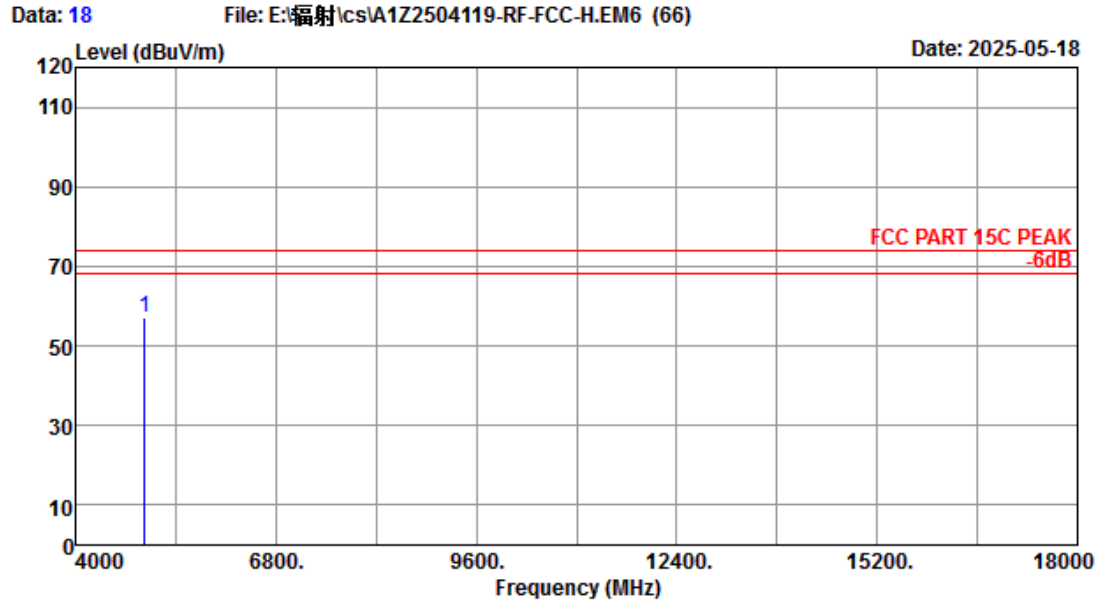

Site no. : RF Chamber Data no. : 18
 Dis. / Ant. : 3m 2024 MCTD1209-3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Engineer : Epoch
 Env. / Ins. : 22.3°C/50%
 Test Mode : GFSK 2480MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4960.000	33.60	6.68	48.20	65.13	57.21	74.00	16.79	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

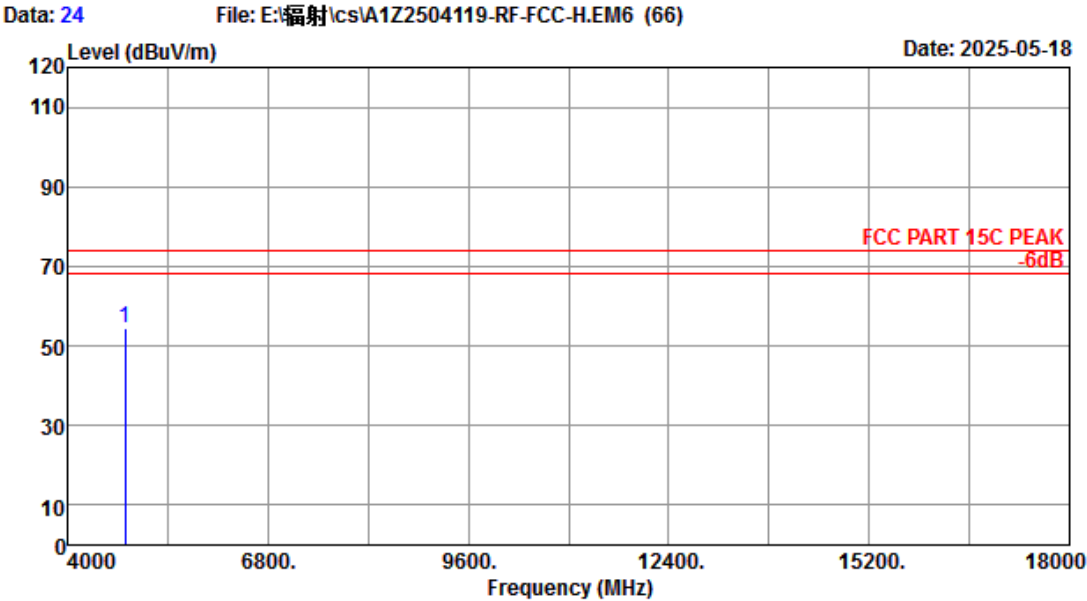



Site no.	: RF Chamber	Data no.	: 24
Dis. / Ant.	: 3m 2024 MCTD1209-3007	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK	Engineer	: Epoch
Env. / Ins.	: 22.3°C/50%		
Test Mode	: 8-DPSK 2402MHz TX Mode		

No.	Freq. (MHz)	Ant. Cable AMP			Emission				
		Factor (dB/m)	Loss (dB)	factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4804.000	31.92	6.59	48.18	64.17	54.50	74.00	19.50	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
-Amp Factor

2. The emission levels that are 20dB below the official
limit are not reported.

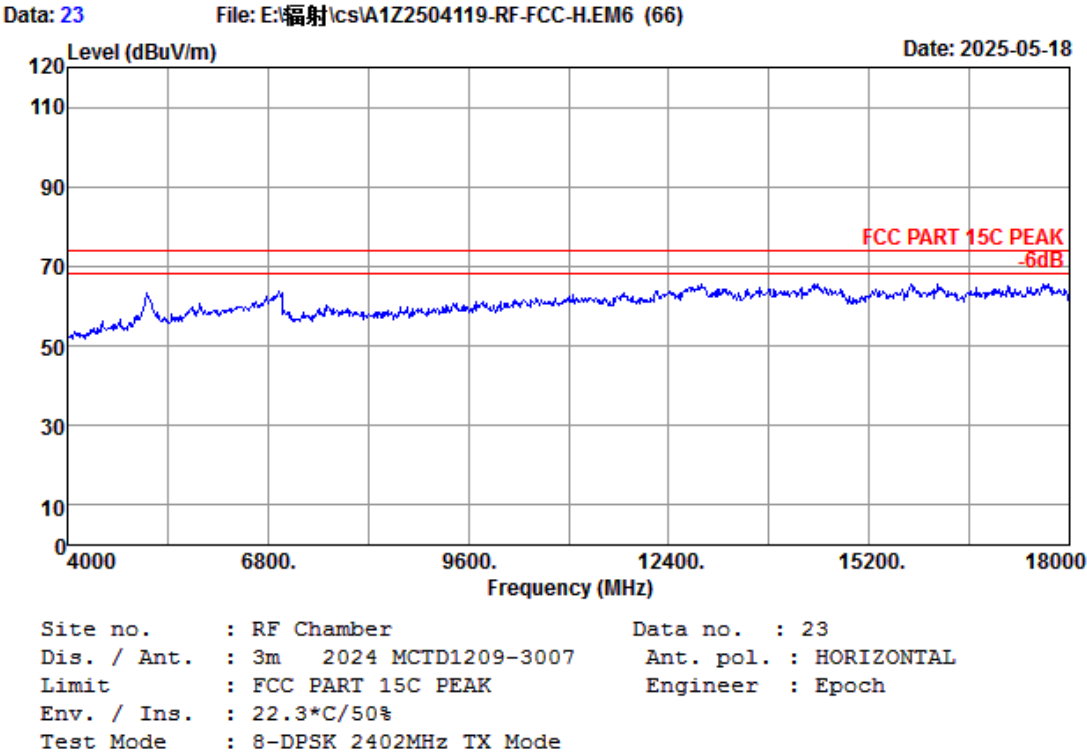

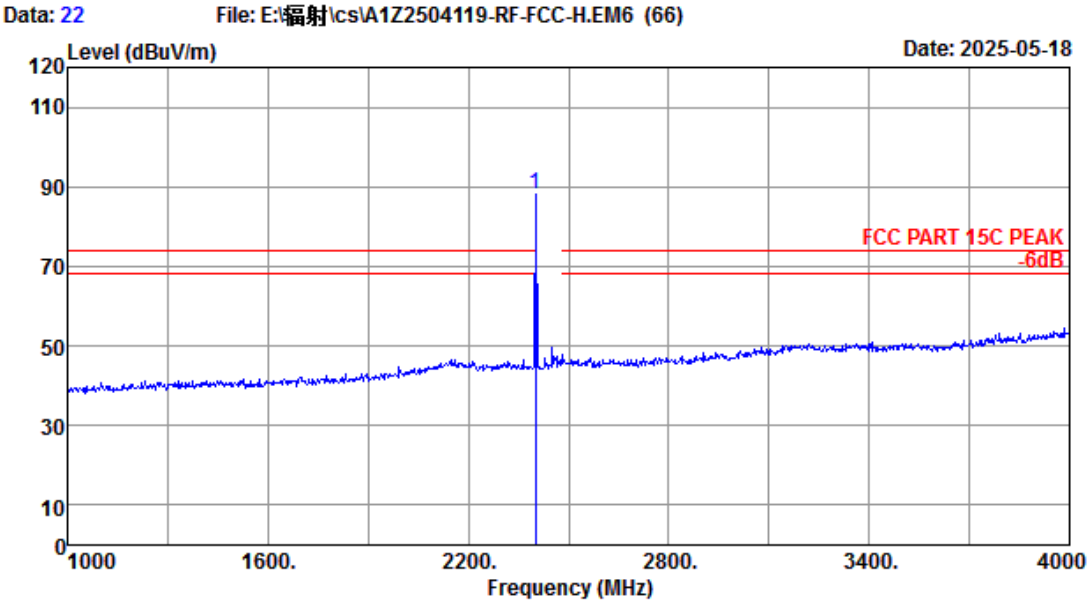


Site no.	: RF Chamber	Data no.	: 22
Dis. / Ant.	: 3m 2024 MCTD1209-3007	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK	Engineer	: Epoch
Env. / Ins.	: 22.3°C/50%		
Test Mode	: 8-DPSK 2402MHz TX Mode		

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission			
						Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2402.000	27.60	4.58	49.64	105.71	88.25	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
-Amp Factor


2. The emission levels that are 20dB below the official
limit are not reported.

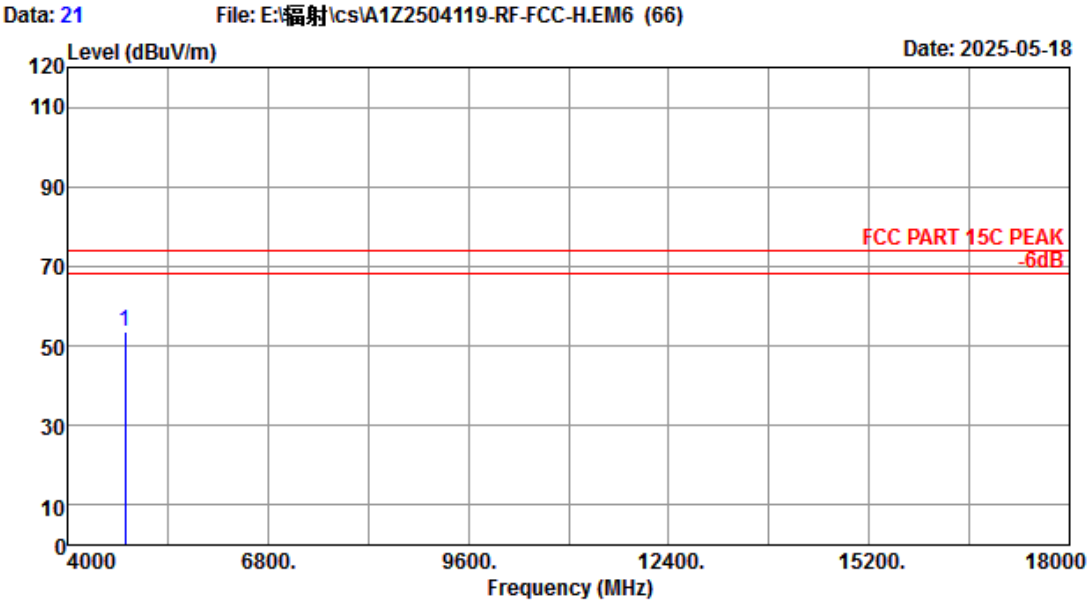


Site no. : RF Chamber Data no. : 21
 Dis. / Ant. : 3m 2024 MCTD1209-3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Engineer : Epoch
 Env. / Ins. : 22.3°C/50%
 Test Mode : 8-DPSK 2402MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4804.000	31.92	6.59	48.18	63.22	53.55	74.00	20.45	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

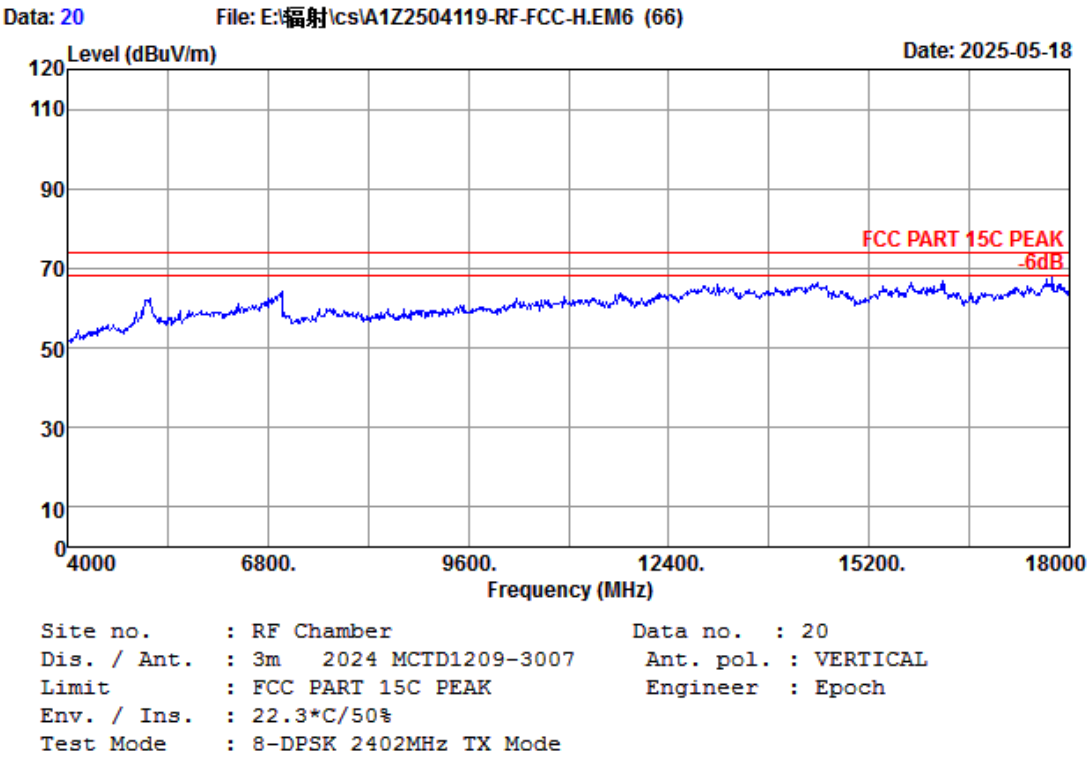

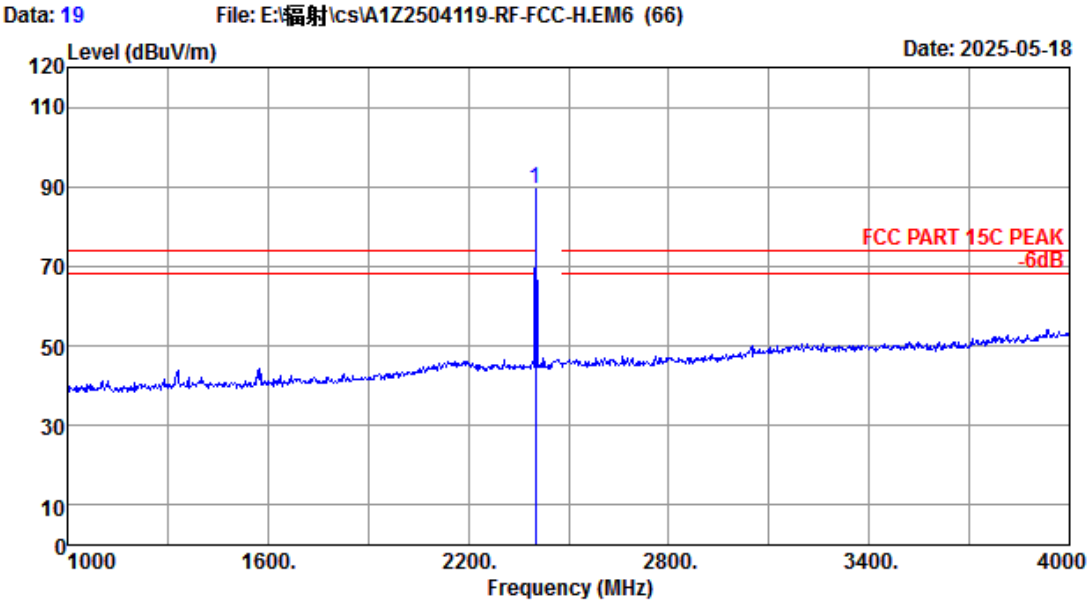


Site no.	: RF Chamber	Data no.	: 19
Dis. / Ant.	: 3m 2024 MCTD1209-3007	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK	Engineer	: Epoch
Env. / Ins.	: 22.3°C/50%		
Test Mode	: 8-DPSK 2402MHz TX Mode		

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2402.000	27.60	4.58	49.64	107.10	89.64	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
-Amp Factor


2. The emission levels that are 20dB below the official
limit are not reported.

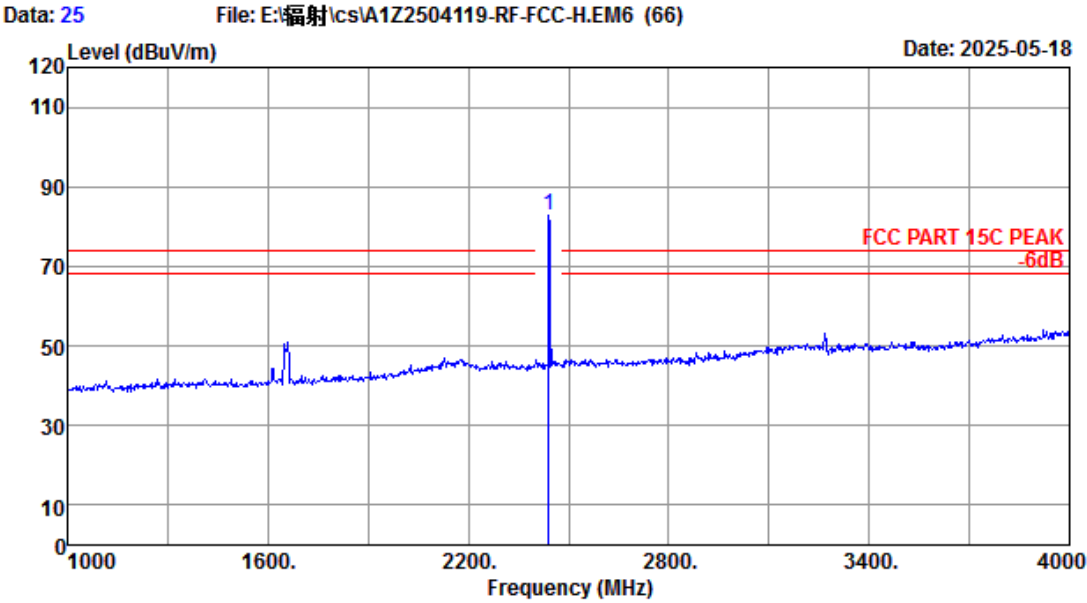


Site no. : RF Chamber Data no. : 25
 Dis. / Ant. : 3m 2024 MCTD1209-3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Engineer : Epoch
 Env. / Ins. : 22.3°C/50%
 Test Mode : 8-DPSK 2441MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2441.000	27.60	4.64	49.60	100.31	82.95	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

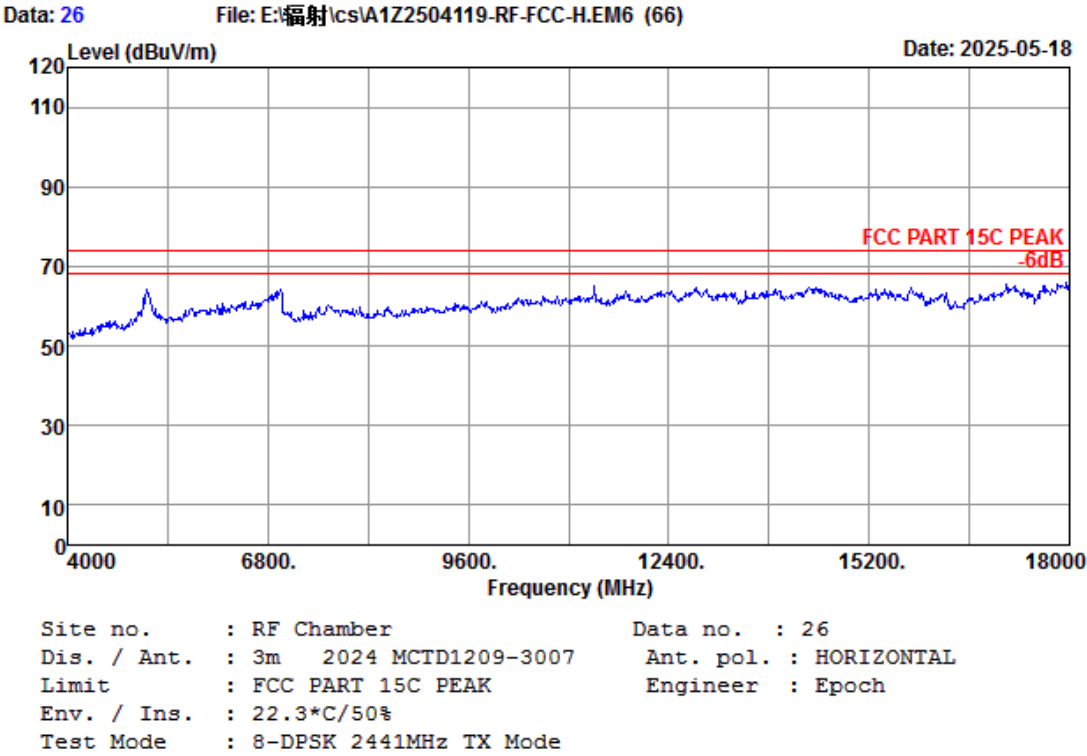


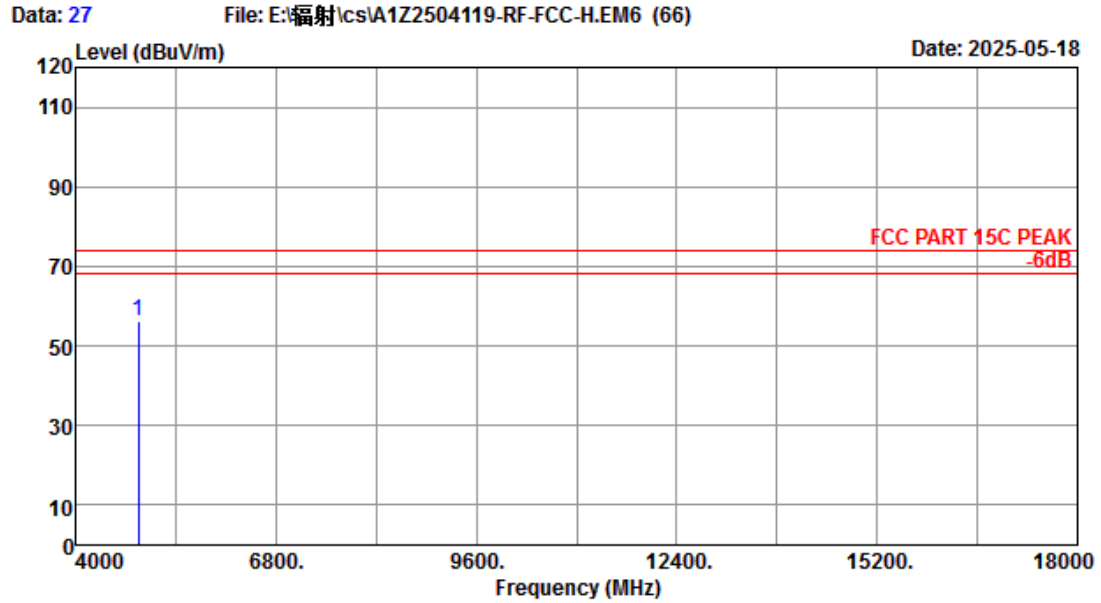

Site no. : RF Chamber Data no. : 27
 Dis. / Ant. : 3m 2024 MCTD1209-3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Engineer : Epoch
 Env. / Ins. : 22.3°C/50%
 Test Mode : 8-DPSK 2441MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4882.000	32.55	6.63	48.19	65.23	56.22	74.00	17.78	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

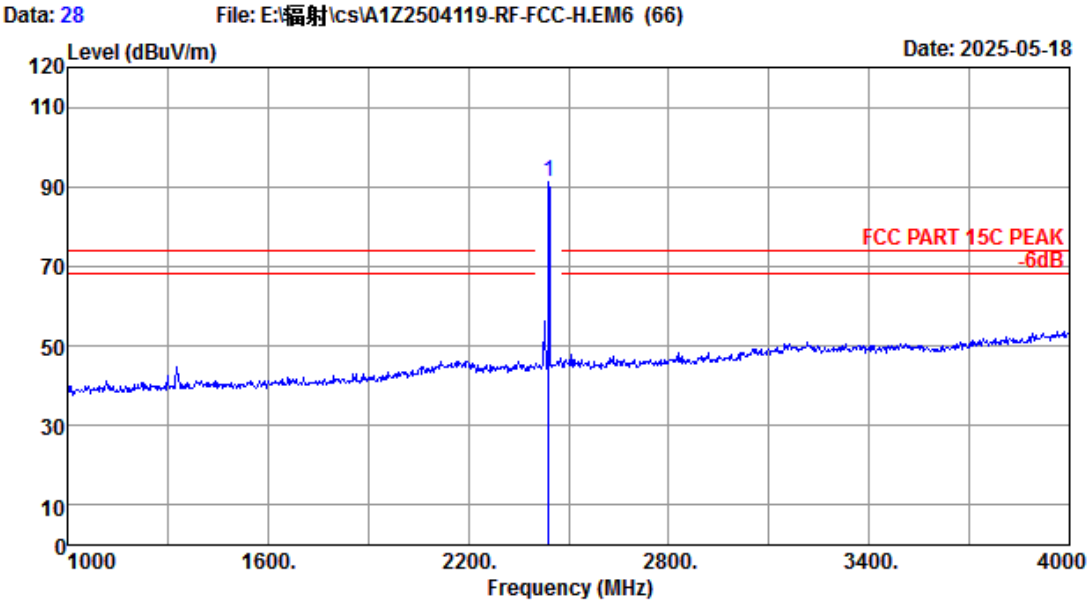


Site no.	: RF Chamber	Data no.	: 28
Dis. / Ant.	: 3m 2024 MCTD1209-3007	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK	Engineer	: Epoch
Env. / Ins.	: 22.3°C/50%		
Test Mode	: 8-DPSK 2441MHz TX Mode		

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Emission				
					Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2441.000	27.60	4.64	49.60	108.61	91.25	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
-Amp Factor
2. The emission levels that are 20dB below the official
limit are not reported.

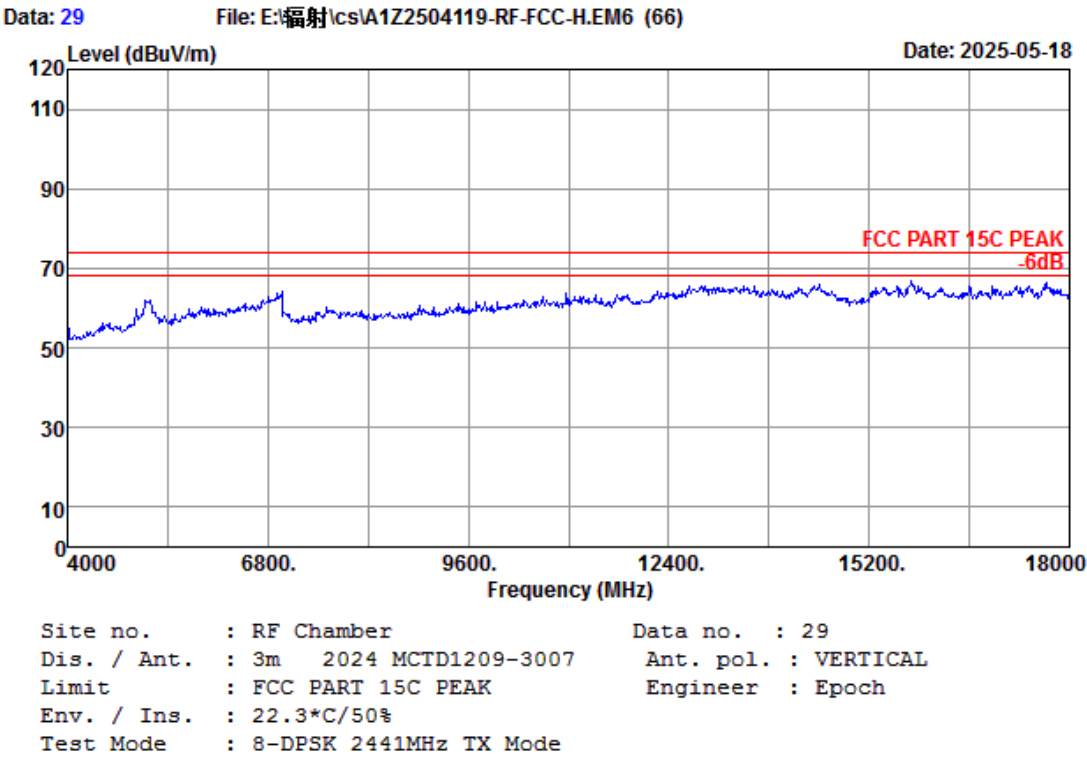


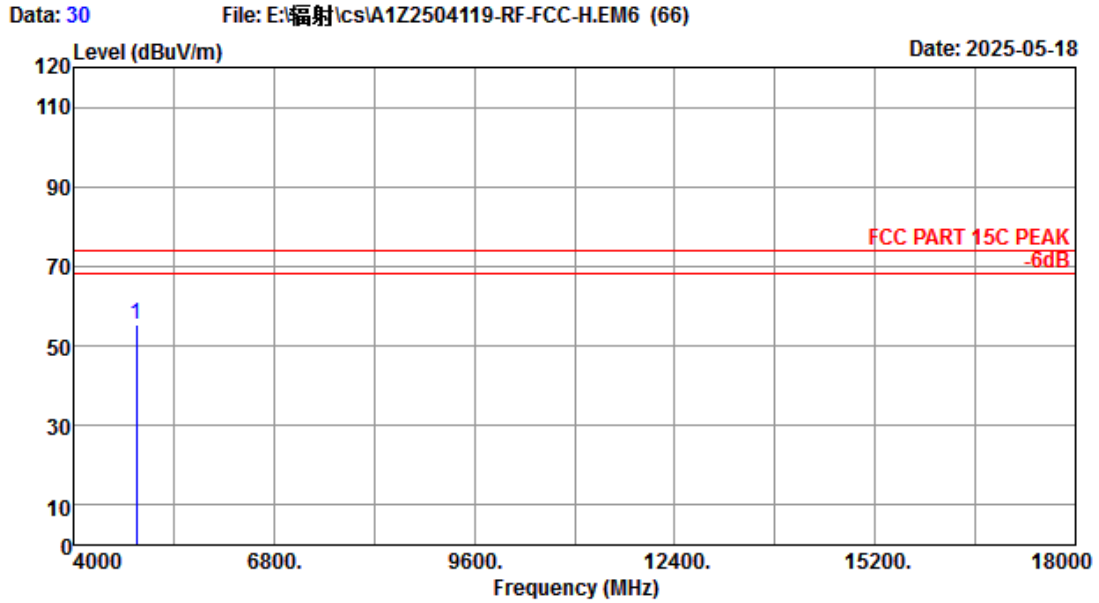

Site no. : RF Chamber Data no. : 30
 Dis. / Ant. : 3m 2024 MCTD1209-3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Engineer : Epoch
 Env. / Ins. : 22.3°C/50%
 Test Mode : 8-DPSK 2441MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4882.000	32.55	6.63	48.19	64.35	55.34	74.00	18.66	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

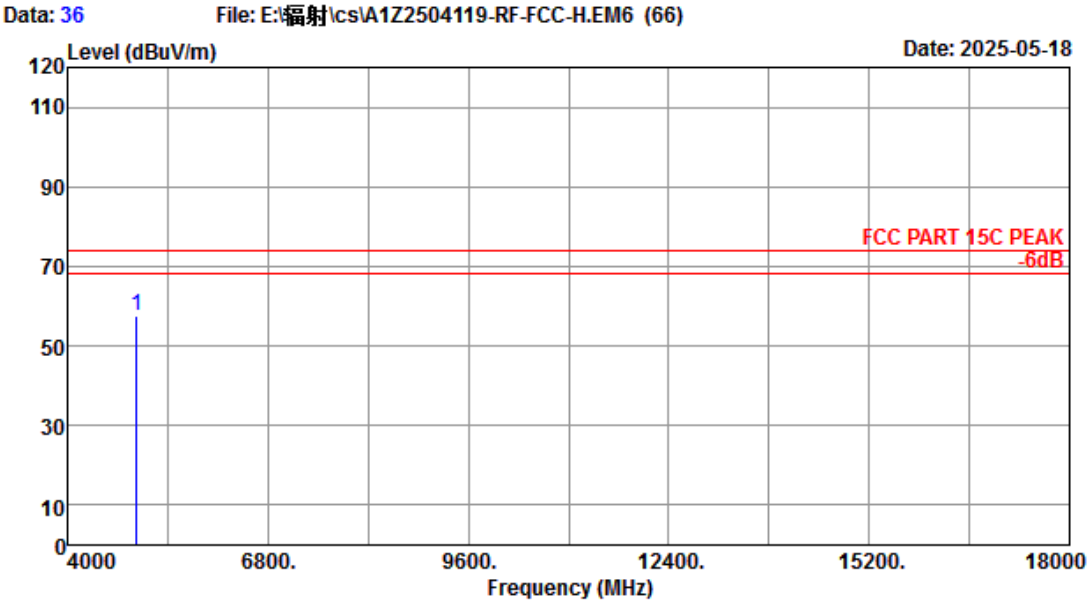

Site no. : RF Chamber Data no. : 36
 Dis. / Ant. : 3m 2024 MCTD1209-3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Engineer : Epoch
 Env. / Ins. : 22.3°C/50%
 Test Mode : 8-DPSK 2480MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4960.000	33.60	6.68	48.20	65.37	57.45	74.00	16.55	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.