

FCC Radio Test Report

FCC ID: H4IDG9087

This report concerns (check one): Original Grant Class II Change

Project No. : 1605171
Equipment : Wireless Dongle
Test Model : SD-9087
Applicant : Lite-On Technology Corporation
Address : 16F, 392, Ruey Kuang Road, NeiHu, Taipei 11492, Taiwan, R.O.C.

Date of Receipt : May 17, 2016
Date of Test : May 17, 2016 ~ May 29, 2016
Issued Date : Jun. 03, 2016
Tested by : BTL Inc.

Testing Engineer : Rush Kao
(Rush Kao)

Technical Manager : Jeff Yang
(Jeff Yang)

Authorized Signatory : Andy Chiu
(Andy Chiu)

B T L I N C .

B1, No. 37, Lane 365, Yang-Guang St.,
Nei-Hu District, Taipei City 114, Taiwan.
TEL: +886-2-2657-3299 FAX: +886-2-2657-3331

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

BTL's report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL**'s authorized written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Table of Contents	Page
1 . CERTIFICATION	6
2 . SUMMARY OF TEST RESULTS	7
2.1 TEST FACILITY	7
2.2 MEASUREMENT UNCERTAINTY	8
3 . GENERAL INFORMATION	9
3.1 DESCRIPTION OF EUT	9
3.2 DESCRIPTION OF TEST MODES	11
3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	12
3.5 DESCRIPTION OF SUPPORT UNITS	12
4 . EMC EMISSION TEST	13
4.1 CONDUCTED EMISSION MEASUREMENT	13
4.1.1 POWER LINE CONDUCTED EMISSION LIMITS	13
4.1.2 TEST PROCEDURE	13
4.1.3 DEVIATION FROM TEST STANDARD	13
4.1.4 TEST SETUP	14
4.1.5 EUT OPERATING CONDITIONS	14
4.1.6 EUT TEST CONDITIONS	14
4.1.7 TEST RESULTS	14
4.2 RADIATED EMISSION MEASUREMENT	15
4.2.1 RADIATED EMISSION LIMITS	15
4.2.2 TEST PROCEDURE	16
4.2.3 DEVIATION FROM TEST STANDARD	16
4.2.4 TEST SETUP	17
4.2.5 EUT OPERATING CONDITIONS	18
4.2.6 EUT TEST CONDITIONS	18
4.2.7 TEST RESULTS (9KHZ TO 30MHZ)	18
4.2.8 TEST RESULTS (30MHZ TO 1000MHZ)	18
4.2.9 TEST RESULTS (ABOVE 1000 MHZ)	19
5 . BANDWIDTH TEST	20
5.1 TEST PROCEDURE	20
5.2 DEVIATION FROM STANDARD	20
5.3 TEST SETUP	20
5.4 EUT OPERATION CONDITIONS	20
5.5 EUT TEST CONDITIONS	20
5.6 TEST RESULTS	20
6 . MEASUREMENT INSTRUMENTS LIST	21
7 . EUT TEST PHOTO	22

Table of Contents	Page
ATTACHMENT A - CONDUCTED EMISSION	26
ATTACHMENT B -RADIATED EMISSION (9KHZ TO 30MHZ)	29
ATTACHMENT C -RADIATED EMISSION (30MHZ TO 1000MHZ)	34
ATTACHMENT D -RADIATED EMISSION (ABOVE 1000MHZ)	37
ATTACHMENT E - BANDWIDTH	50

REPORT ISSUED HISTORY

Issued No.	Description	Issued Date
BTL-FCCP-1-1605171	Original Issue.	Jun. 03, 2016

1. CERTIFICATION

Equipment : Wireless Dongle
Brand Name : DELL
Test Model. : SD-9087
Applicant : Lite-On Technology Corporation
Date of Test : May 17, 2016 ~ May 29, 2016
Test Sample : Engineering Sample
Standard(s) : FCC Part15, Subpart C (15.249) / ANSI C63.10-2013

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCP-1-1605171) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

Applied Standard(s): FCC Part15, Subpart C (15.249)			
Standard(s) Section	Test Item	Judgment	Remark
15.207(a)	Conducted Emission	PASS	
15.205	Restricted Band of Operation	PASS	
15.209 15.249(a)	Radiated Emissions	PASS	
15.215(c)	20dB Bandwidth Test	PASS	

NOTE:

(1)" N/A" denotes test is not applicable to this device.

2.1 TEST FACILITY

The test facilities used to collect the test data in this report:

Conducted emission Test:

C05: (VCCI RN: C-4742; FCC RN:965108; FCC DN:TW1082)
No. 68-1, Ln. 169, Sec.2, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan

Radiated emission Test (Below 1 GHz):

CB11: (VCCI RN: R-4260; FCC RN:949005; FCC DN:TW1082; IC Assigned Code:20088)
No. 68-1, Ln. 169, Sec.2, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan

Radiated emission Test (Above 1 GHz):

CB11: (VCCI RN: G-868; FCC RN:949005; FCC DN:TW1082; IC Assigned Code:20088)
No. 68-1, Ln. 169, Sec.2, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan

2.2 MEASUREMENT UNCERTAINTY

The measurement uncertainty is not specified by FCC rules for reference only.

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95%.

The measurement instrumentation uncertainty considerations contained in CISPR 16-4-2.

The BTL measurement uncertainty is less than the CISPR 16-4-2 U_{CISPR} requirement.

A. Conducted Measurement :

Test Site	Method	Measurement Frequency Range	U , (dB)
C05	CISPR	150 kHz~30MHz	2.04

B. Radiated Measurement :

Test Site	Method	Measurement Frequency Range	U ,(dB)
CB11 (3m)	CISPR	9kHz ~ 150kHz	4.00
		150kHz ~ 30MHz	4.00

Test Site	Method	Measurement Frequency Range	Ant. H / V	U ,(dB)
CB11 (3m)	CISPR	30MHz ~ 200MHz	V	3.06
		30MHz ~ 200MHz	H	2.58
		200MHz ~ 1,000MHz	V	3.50
		200MHz ~ 1,000MHz	H	3.10

Test Site	Method	Measurement Frequency Range	Ant. H / V	U ,(dB)
CB11 (3m)	CISPR	1GHz ~ 6GHz	V	4.14
		1GHz ~ 6GHz	H	4.14
		6GHz ~ 18GHz	V	5.34
		6GHz ~ 18GHz	H	5.34

Note: unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

Our calculated Measurement Instrumentation Uncertainty is shown in the tables above. These are our U_{lab} values in CISPR 16-4-2 terminology.

Since Table 1 of CISPR 16-4-2 has values of measurement instrumentation uncertainty, called U_{CISPR} , as follows:

Conducted Disturbance (mains port) – 150 kHz – 30 MHz : 3.6 dB

Radiated Disturbance (electric field strength on an open area test site or alternative test site) – 30 MHz – 1000 MHz : 5.2 dB

It can be seen that our U_{lab} values are smaller than U_{CISPR} .

3. GENERAL INFORMATION

3.1 DESCRIPTION OF EUT

Product Name	Wireless Dongle				
Brand	DELL				
Test Model	SD-9087				
Model Difference	N/A				
Product Description	Operation Frequency	2403-2480 MHz			
	Modulation Technology	GFSK			
	Bit Rate of Transmitter	1 Mbps			
	Field Strength	92.41 dBuV/m (AVG Max) 92.61 dBuV/m (Peak Max)			
Power Source	Supplied from PC USB port.				
EUT Power Rating	DC 5V 100mA				

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
2. Channel List:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2403	27	2429	53	2455
02	2404	28	2430	54	2456
03	2405	29	2431	55	2457
04	2406	30	2432	56	2458
05	2407	31	2433	57	2459
06	2408	32	2434	58	2460
07	2409	33	2435	59	2461
08	2410	34	2436	60	2462
09	2411	35	2437	61	2463
10	2412	36	2438	62	2464
11	2413	37	2439	63	2465
12	2414	38	2440	64	2466
13	2415	39	2441	65	2467
14	2416	40	2442	66	2468
15	2417	41	2443	67	2469
16	2418	42	2444	68	2470
17	2419	43	2445	69	2471
18	2420	44	2446	70	2472
19	2421	45	2447	71	2473
20	2422	46	2448	72	2474
21	2423	47	2449	73	2475
22	2424	48	2450	74	2476
23	2425	49	2451	75	2477
24	2426	50	2452	76	2478
25	2427	51	2453	77	2479
26	2428	52	2454	78	2480

3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	Note
1	N/A	N/A	Printed	N/A	2.25	

3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	TX Mode

The EUT system operated these modes were found to be the worst case during the pre-scanning test as following:


For Conducted Test	
Final Test Mode	Description
Mode 1	TX Mode

For Radiated Test	
Final Test Mode	Description
Mode 1	TX Mode NOTE (1)

Note:

(1) The measurements are performed at the high, middle, low available channels.

3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

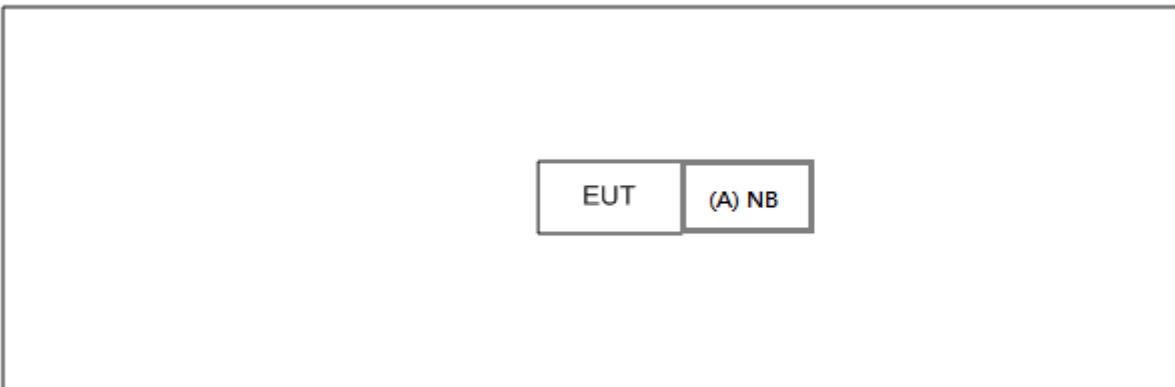

3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.
A	Notebook PC	Acer	MS2351	DOC	NXV7JTA005334043D 42000

Item	Shielded Type	Ferrite Core	Length	Note
-	-	-	-	-

Note:

- (1) The support equipment was authorized by Declaration of Conformity (DOC).

4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 -0.5	66 to 56*	56 to 46*
0.50 -5.0	56	46
5.0 -30.0	60	50

Note:

(1) The limit of " * " decreases with the logarithm of the frequency

(2) The test result calculated as following:

Measurement Value = Reading Level + Correct Factor

Correct Factor = Insertion Loss + Cable Loss - Amplifier Gain(if use)

Margin Level = Measurement Value - Limit Value

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


4.1.2 TEST PROCEDURE

- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation

4.1.4 TEST SETUP

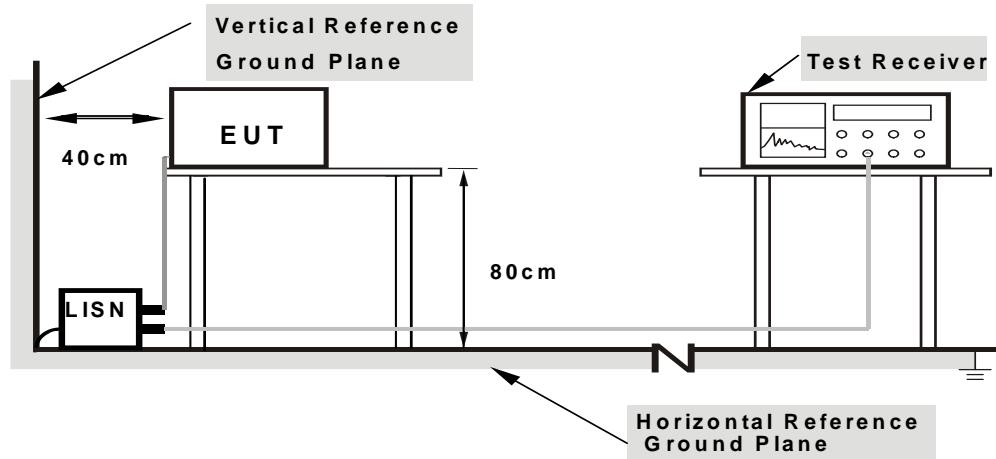

Note:

1. Support units were connected to second LISN.
2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical function (as a customer would normally use it), EUT was programmed to be in continuously transmitting/receiving data or hopping on mode.

4.1.6 EUT TEST CONDITIONS

Temperature: 25°C

Relative Humidity: 55%

Test Voltage: DC 5V

4.1.7 TEST RESULTS

Please refer to the Attachment A.

Remark:

- (1) All readings are QP Mode value unless otherwise stated AVG in column of 『Note』. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a “*” marked in AVG Mode column of Interference Voltage Measured.
- (2) Measuring frequency range from 150KHz to 30MHz.
- (3) “N/A” denotes test is not applicable to this device.

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 RADIATED EMISSION LIMITS (FCC 15.209)

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

Harmonic emissions limits comply with below 54 dBuV/m at 3m. Other emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or comply with the radiated emissions limits specified in section 15.209(a) limit in the table below has to be followed.

Note:

- (1) The tighter limit applies at the band edges.
- (2) Emission level (dBuV/m)=20log Emission level (uV/m).

LIMITS OF RADIATED EMISSION MEASUREMENT (FCC 15.209)

FREQUENCY (MHz)	(dBuV/m) (at 3m)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

LIMITS OF RADIATED EMISSION MEASUREMENT (FCC Part 15.249)

FCC Part15 (15.249) , Subpart C	
Limit	Frequency Range(MHz)
Field strength of fundamental 50000 μ V/m (94 dB μ V/m) @ 3 m	2400-2483.5
Field strength of harmonics 500 μ V/m (54 dB μ V/m) @ 3 m	Above 2483.5

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9KHz~90KHz for PK/AVG detector
Start ~ Stop Frequency	90KHz~110KHz for QP detector
Start ~ Stop Frequency	110KHz~490KHz for PK/AVG detector
Start ~ Stop Frequency	490KHz~30MHz for QP detector
Start ~ Stop Frequency	30MHz~1000MHz for QP detector

4.2.2 TEST PROCEDURE


- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8 m or 1.5m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- i. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.2.3 DEVIATION FROM TEST STANDARD


No deviation

4.2.4 TEST SETUP


(A) Radiated Emission Test Set-Up Frequency Below 1 GHz

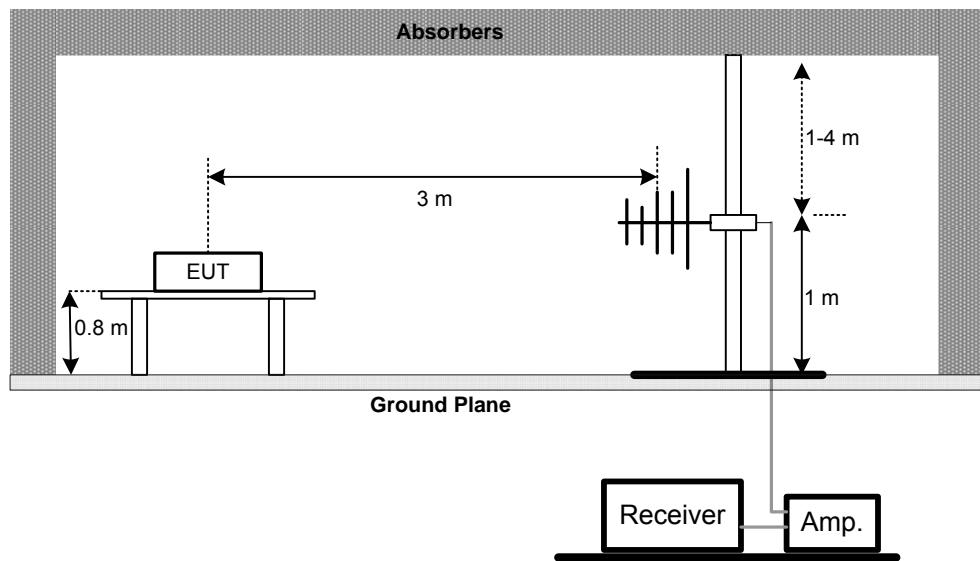

(B) Radiated Emission Test Set-Up Frequency Above 1 GHz

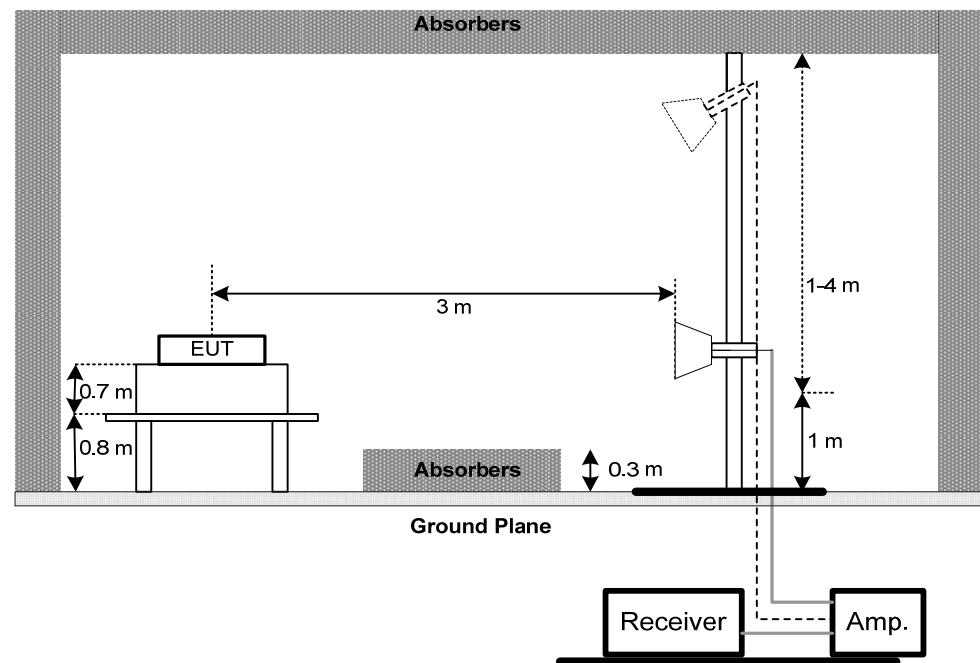

(C) For radiated emissions below 30MHz

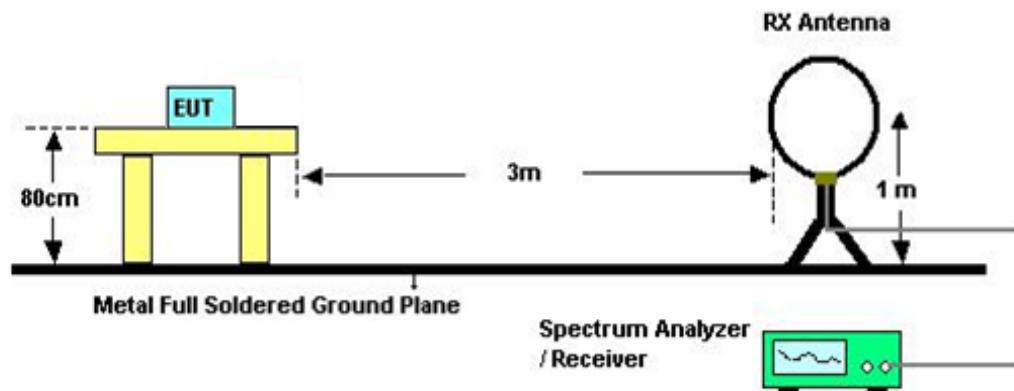

4.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

4.2.6 EUT TEST CONDITIONS

Temperature: 25°C

Relative Humidity: 55%

Test Voltage: DC 5V

4.2.7 TEST RESULTS (9KHZ TO 30MHZ)

Please refer to the Attachment B

Remark:

- (1) The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.
- (2) Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB).
- (3) Limit line = specific limits (dBuV) + distance extrapolation factor.

4.2.8 TEST RESULTS (30MHZ TO 1000MHZ)

Please refer to the Attachment C.

Remark:

- (1) Measuring frequency range from 30MHz to 1000MHz.
- (2) If the peak scan value lower limit more than 20dB, then this signal data does not show in table.

4.2.9 TEST RESULTS (ABOVE 1000 MHZ)

Please refer to the Attachment D.

Remark:

- (1) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission
- (2) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (3) EUT Orthogonal Axis:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (4) During the measurements above 1 GHz it is taken care of that the EUT is always within the 3 dB cone of radiation BW of the used antenna
- (5) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

5. BANDWIDTH TEST

5.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- b. Spectrum Setting: RBW= 100KHz, VBW=100KHz, Sweep time = Auto.

5.2 DEVIATION FROM STANDARD

No deviation.

5.3 TEST SETUP



5.4 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

5.5 EUT TEST CONDITIONS

Temperature: 25°C

Relative Humidity: 55%

Test Voltage: DC 5V

5.6 TEST RESULTS

Please refer to the Attachment E.

6. MEASUREMENT INSTRUMENTS LIST

Conducted Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	TWO-LINE V-NETWORK	R&S	ENV216	101050	Jan. 25, 2017
2	Test Cable	TIMES	CFD300-NL	C02	Jun. 14, 2016
3	EMI Test Receiver	R&S	ESR7	101433	Dec. 09, 2016
4	Measurement Software	EZ	EZ_EMC (Version NB-03A)	N/A	N/A

Radiated Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	Agilent	N9038A	MY51210215	Jun. 07, 2016
2	Loop Antenna	EMCO	6502	00042960	Nov. 15, 2016
3	Pre-Amplifier	HP	8447D	2944A08891	Mar. 08, 2017
4	Trilog-Broadband Antenna	Schwarzbeck	VULB9168	9168-364	Feb. 03, 2017
5	5dB Attenuator	EMCI	EMCI-N-6-05	AT-N0624	Feb. 03, 2017
6	Pre-Amplifier	Agilent	8449B	3008A02331	Jan. 23, 2017
7	Horn Antenna	Schwarzbeck	BBHA 9120	D-546	Nov. 04, 2016
8	Test Cable	EMCI	EMC8D-NM-NM-8000	150301	Mar. 08, 2017
9	Test Cable	EMCI	EMC104-SM-SM-2500	150303	Mar. 08, 2017
10	Test Cable	EMCI	EMC104-NM-SM-1000	150304	Mar. 08, 2017
11	Test Cable	EMCI	EMC104-SM-SM-800	150305	Mar. 08, 2017
12	Test Cable	EMCI	EMC104-SM-SM-2500	150306	Mar. 08, 2017
13	Test Cable	EMCI	EMC104-SM-SM-6000	151203	Mar. 08, 2017
14	Test Cable	EMCI	S104-SMAP-1	130503	Mar. 28, 2017
15	Preamplifier With Adaptor	EMC	EMC2654045	980030	Feb. 14, 2017
16	Measurement Software	Farad	EZ_EMC (Version NB-03A)	N/A	N/A

Bandwidth Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP-40	100129	Jan. 17, 2017

Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of equipment list is one year.

ATTACHMENT A - CONDUCTED EMISSION

Test Mode: TX Mode

Line



No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Comment
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV	dB	Detector	
1		0.1500	37.80	9.68	47.48	65.99	-18.51	QP
2		0.1500	24.20	9.68	33.88	55.99	-22.11	AVG
3		0.4412	23.00	9.69	32.69	57.04	-24.35	QP
4		0.4412	17.30	9.69	26.99	47.04	-20.05	AVG
5		3.3350	21.30	9.82	31.12	56.00	-24.88	QP
6		3.3350	13.00	9.82	22.82	46.00	-23.18	AVG
7		9.1000	24.60	9.94	34.54	60.00	-25.46	QP
8		9.1000	16.20	9.94	26.14	50.00	-23.86	AVG
9	*	15.6000	35.00	9.87	44.87	60.00	-15.13	QP
10		15.6000	24.30	9.87	34.17	50.00	-15.83	AVG
11		21.7000	23.80	9.94	33.74	60.00	-26.26	QP
12		21.7000	17.40	9.94	27.34	50.00	-22.66	AVG

Test Mode: TX Mode


Neutral

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1500	38.80	9.69	48.49	65.99	-17.50	QP	
2		0.1500	24.40	9.69	34.09	55.99	-21.90	AVG	
3		0.4293	23.50	9.69	33.19	57.27	-24.08	QP	
4		0.4293	17.30	9.69	26.99	47.27	-20.28	AVG	
5		3.4340	22.10	9.84	31.94	56.00	-24.06	QP	
6		3.4340	12.40	9.84	22.24	46.00	-23.76	AVG	
7		9.7500	32.00	9.97	41.97	60.00	-18.03	QP	
8		9.7500	22.80	9.97	32.77	50.00	-17.23	AVG	
9	*	15.5500	34.90	9.87	44.77	60.00	-15.23	QP	
10		15.5500	23.30	9.87	33.17	50.00	-16.83	AVG	
11		21.8000	27.90	9.94	37.84	60.00	-22.16	QP	
12		21.8000	19.90	9.94	29.84	50.00	-20.16	AVG	

ATTACHMENT B -RADIATED EMISSION (9KHZ TO 30MHZ)

Test Mode TX Mode_2403 MHz


Open

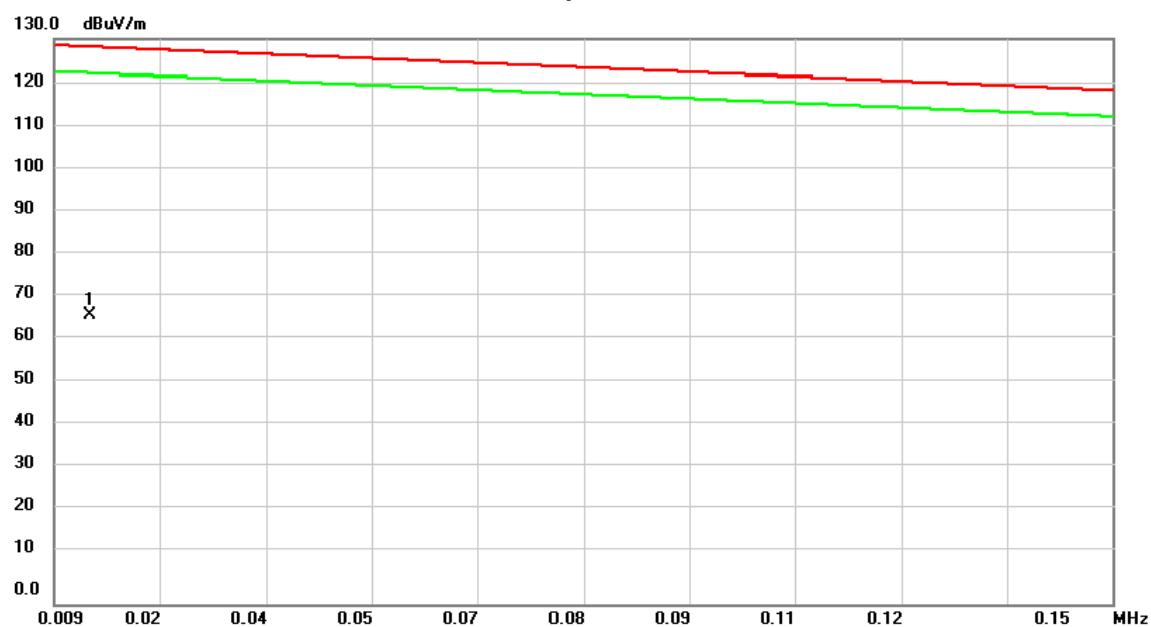

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	0.0137	47.07	19.48	66.55	128.18	-61.63	peak	

Test Mode TX Mode_2403 MHz


Open

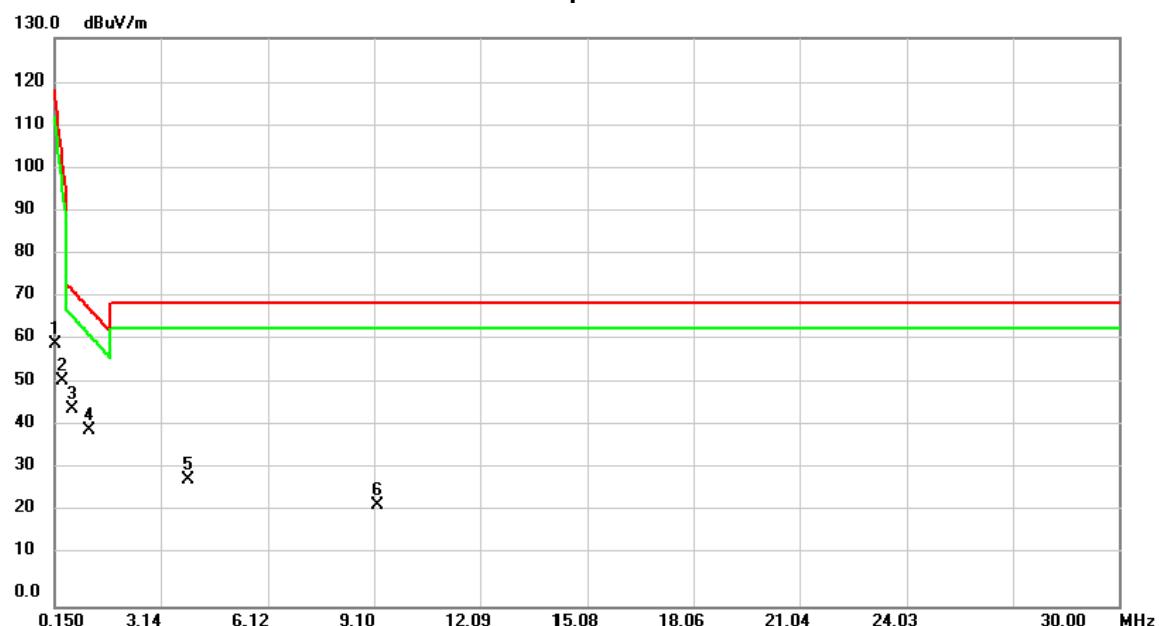

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		0.1500	47.93	12.03	59.96	118.34	-58.38	peak	
2		0.3490	39.98	11.80	51.78	103.98	-52.20	peak	
3	*	0.6276	33.55	11.85	45.40	72.57	-27.17	peak	
4		1.1052	28.43	11.95	40.38	68.32	-27.94	peak	
5		3.8912	17.70	11.23	28.93	69.54	-40.61	peak	
6		9.1846	11.89	11.32	23.21	69.54	-46.33	peak	

Test Mode TX Mode_2403 MHz


Close

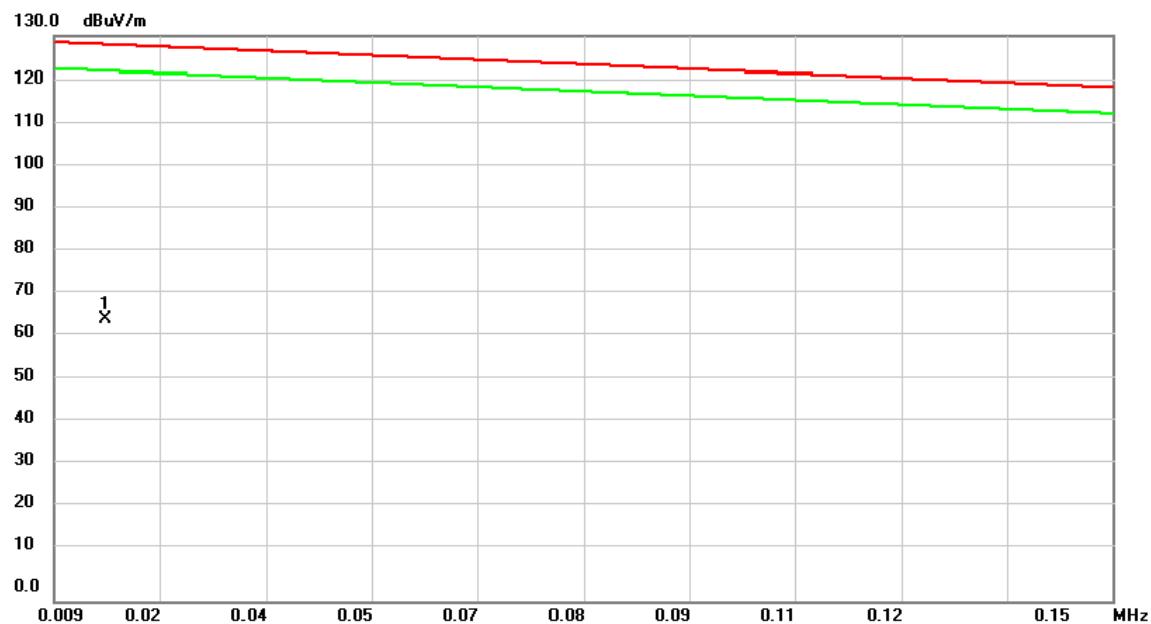

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	0.0158	45.98	18.91	64.89	128.03	-63.14	peak	

Test Mode TX Mode_2403 MHz

Close

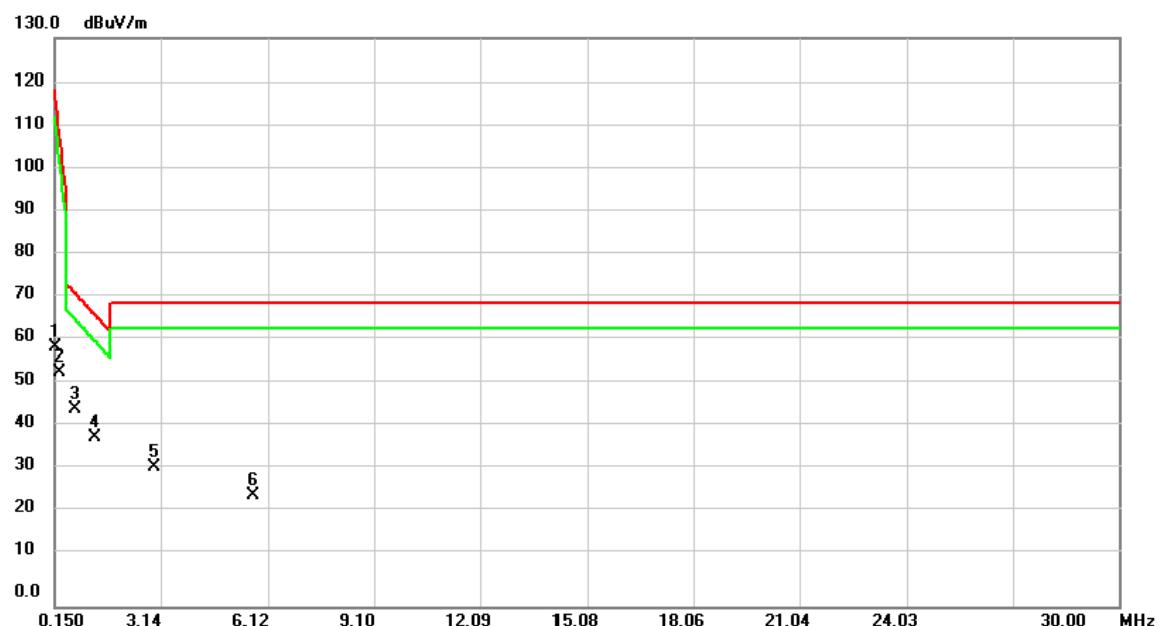


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
			MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1		0.1500	47.16	12.03	59.19	118.34	-59.15	peak	
2		0.2694	42.03	11.85	53.88	109.72	-55.84	peak	
3	*	0.7072	33.53	11.88	45.41	71.86	-26.45	peak	
4		1.2644	27.03	11.88	38.91	66.90	-27.99	peak	
5		2.9360	20.81	11.13	31.94	69.54	-37.60	peak	
6		5.6822	14.27	11.39	25.66	69.54	-43.88	peak	

ATTACHMENT C -RADIATED EMISSION (30MHZ TO 1000MHZ)

Test Mode TX Mode_2403 MHz


Vertical

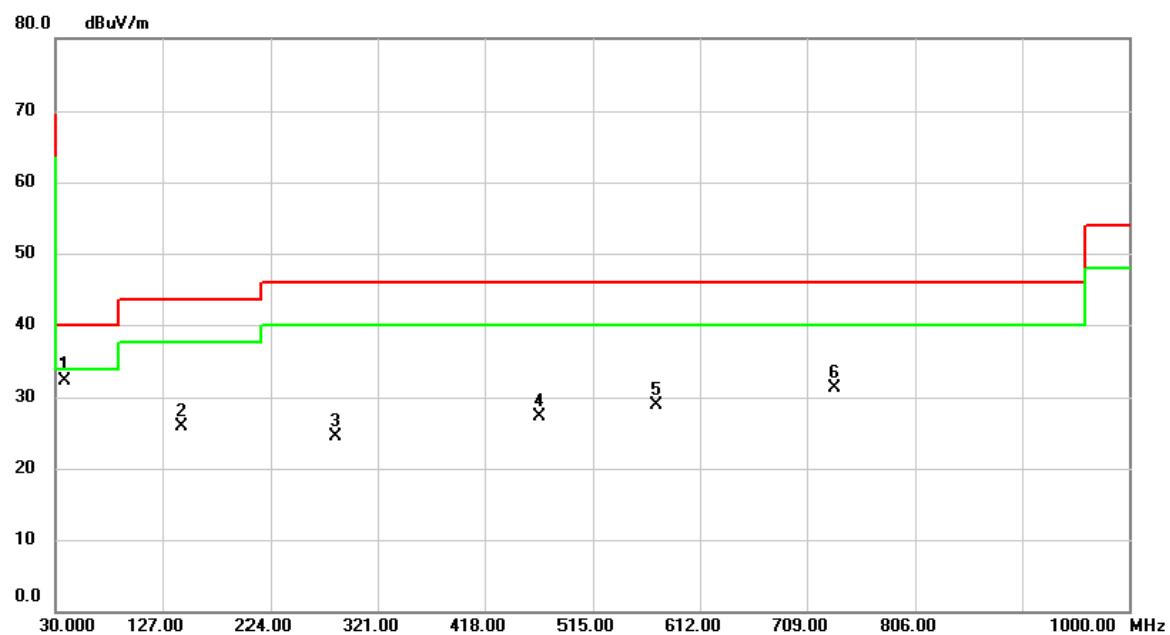

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	37.7600	41.11	-8.81	32.30	40.00	-7.70	peak	
2		144.4600	34.60	-8.69	25.91	43.50	-17.59	peak	
3		282.2000	32.45	-7.87	24.58	46.00	-21.42	peak	
4		467.4700	30.50	-3.20	27.30	46.00	-18.70	peak	
5		572.2300	29.90	-0.95	28.95	46.00	-17.05	peak	
6		734.2200	29.27	2.01	31.28	46.00	-14.72	peak	

Test Mode TX Mode_2403 MHz


Horizontal

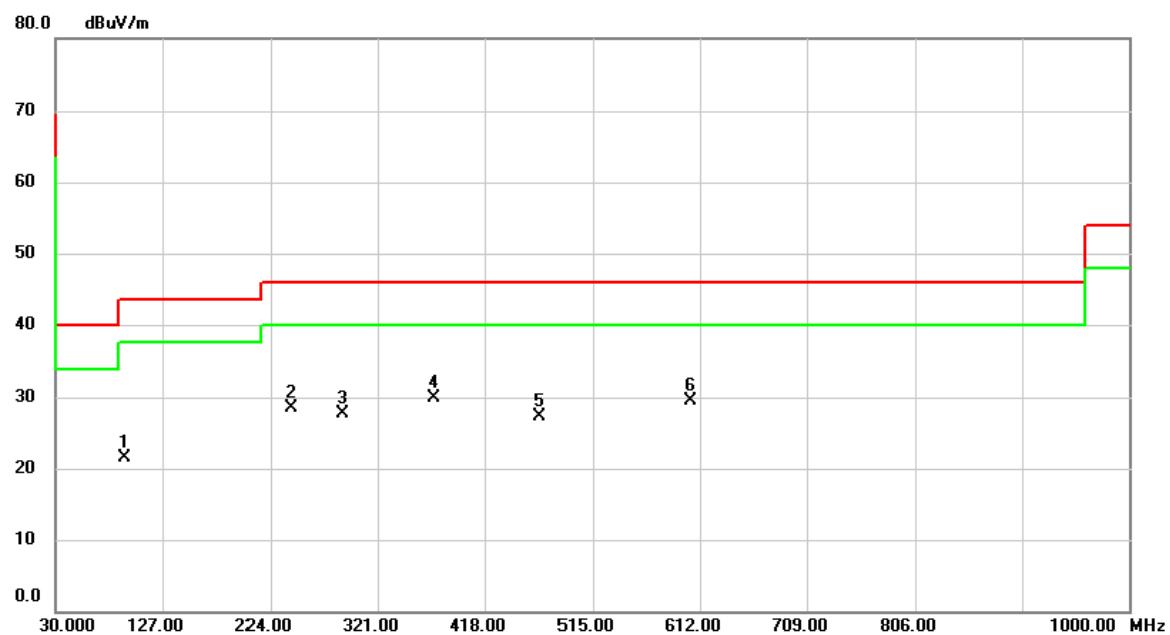

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		92.0800	34.79	-13.35	21.44	43.50	-22.06	peak	
2		242.4300	37.88	-9.38	28.50	46.00	-17.50	peak	
3		289.9600	35.39	-7.62	27.77	46.00	-18.23	peak	
4	*	372.4100	35.31	-5.50	29.81	46.00	-16.19	peak	
5		467.4700	30.44	-3.20	27.24	46.00	-18.76	peak	
6		603.2700	29.78	-0.19	29.59	46.00	-16.41	peak	


ATTACHMENT D -RADIATED EMISSION (ABOVE 1000MHZ)

Test Mode TX Mode_2403 MHz

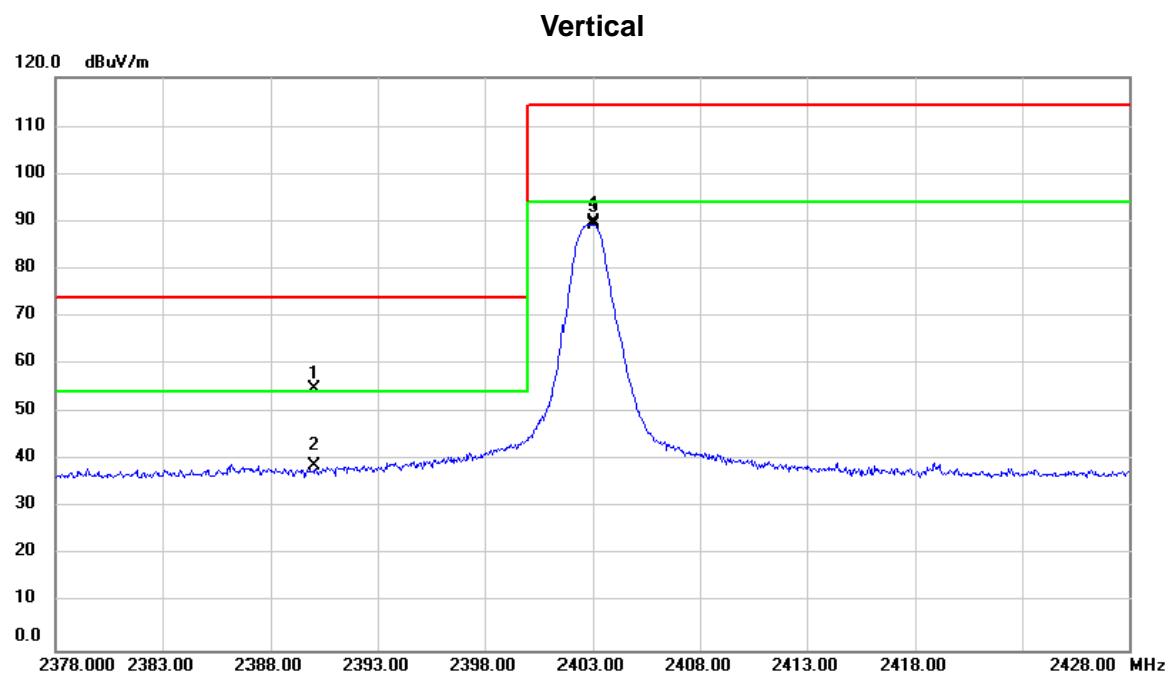


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		2390.000	22.94	31.70	54.64	74.00	-19.36	peak	
2		2390.000	7.30	31.70	39.00	54.00	-15.00	AVG	
3		2403.000	57.98	31.76	89.74	114.00	-24.26	peak	
4	*	2403.000	57.62	31.76	89.38	94.00	-4.62	AVG	

Test Mode TX Mode_2403 MHz

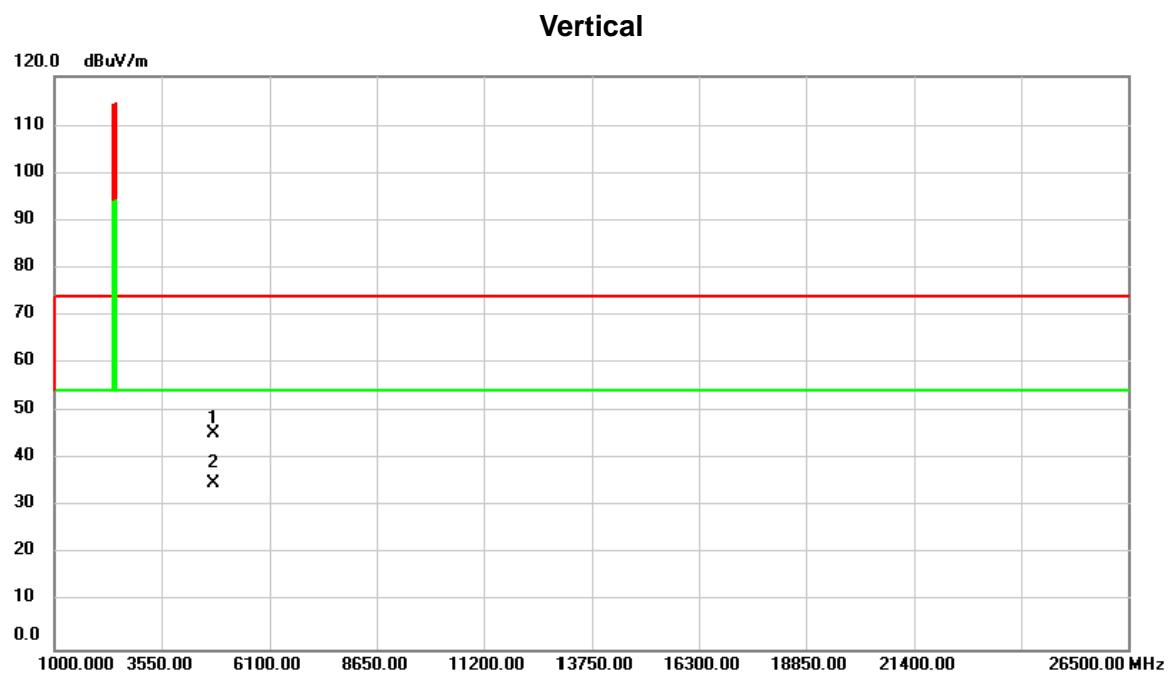


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		4806.000	55.83	-10.51	45.32	74.00	-28.68	peak	
2	*	4806.000	45.35	-10.51	34.84	54.00	-19.16	AVG	

Test Mode TX Mode_2403 MHz

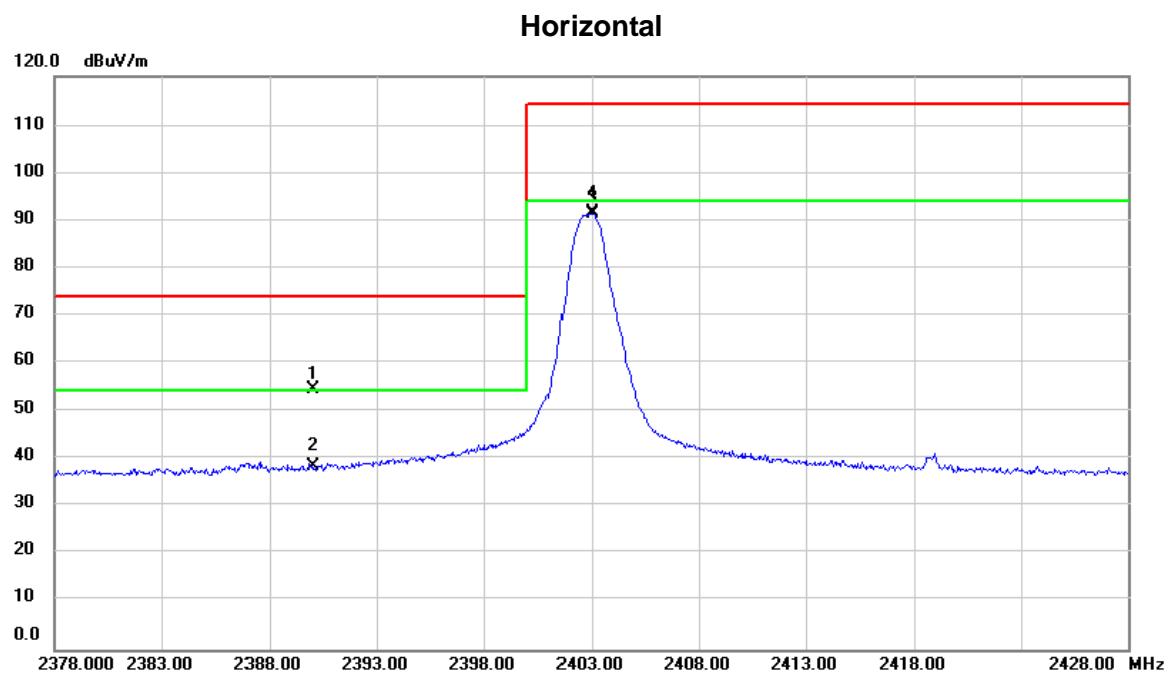


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		2390.000	22.68	31.70	54.38	74.00	-19.62	peak	
2		2390.000	6.78	31.70	38.48	54.00	-15.52	AVG	
3		2403.000	59.89	31.76	91.65	114.00	-22.35	peak	
4	*	2403.000	59.65	31.76	91.41	94.00	-2.59	AVG	

Test Mode TX Mode_2403 MHz

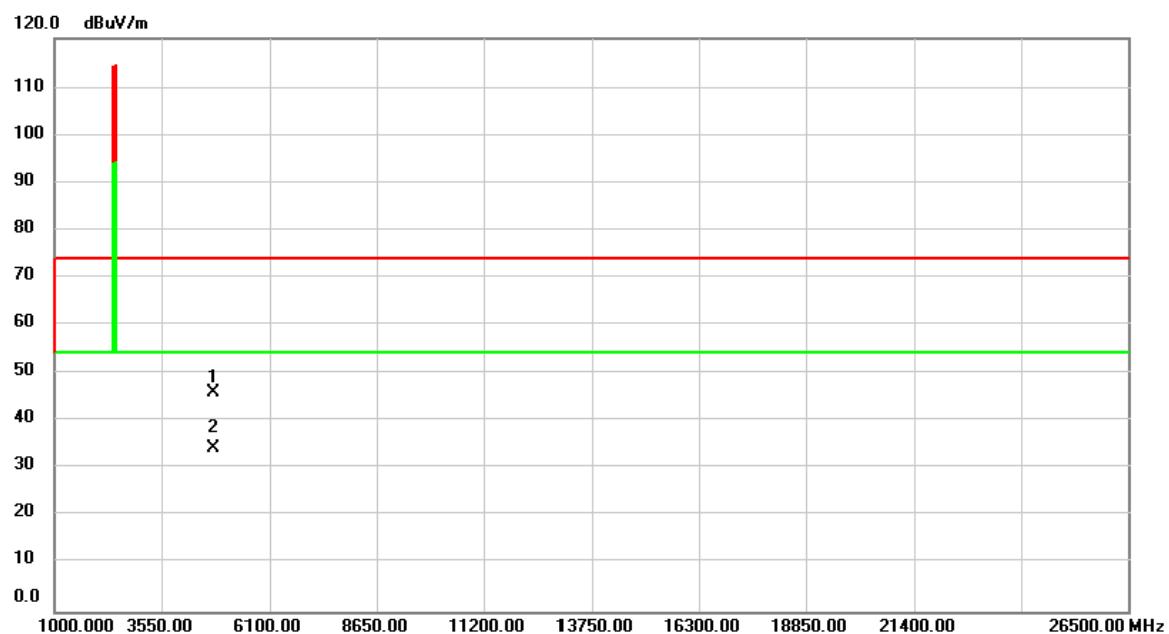Horizontal


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4806.000	56.60	-10.51	46.09	74.00	-27.91	peak	
2	*	4806.000	44.94	-10.51	34.43	54.00	-19.57	AVG	

Test Mode TX Mode_2441 MHz

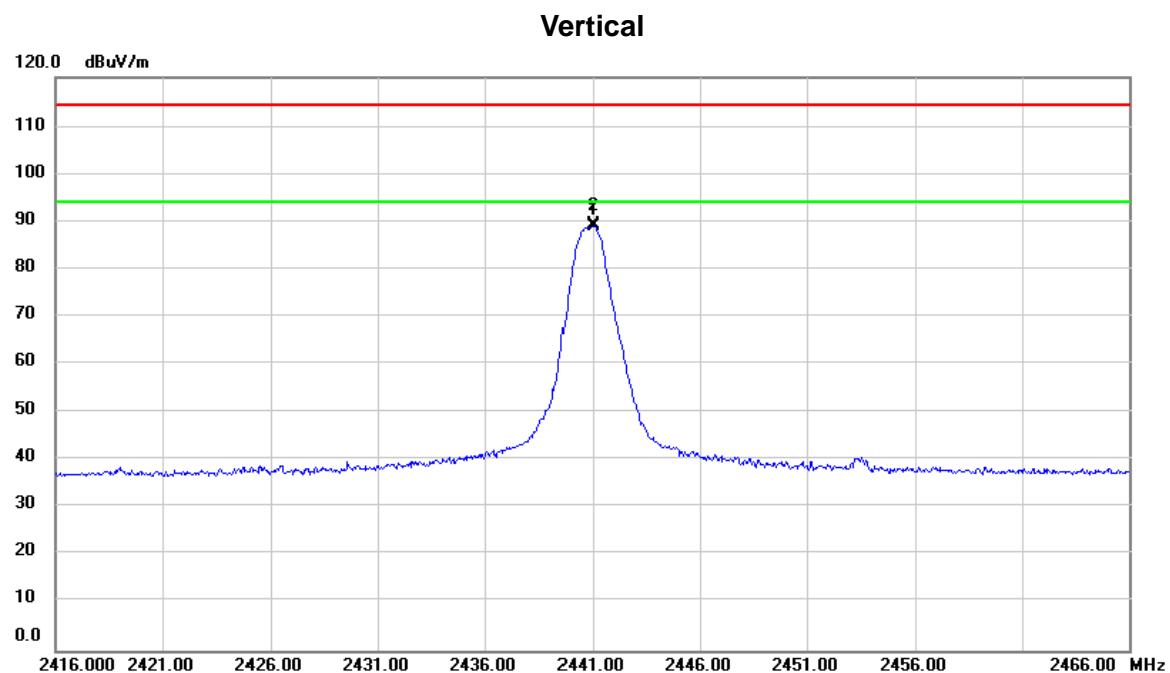


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		2441.000	57.29	31.90	89.19	114.00	-24.81	peak	
2	*	2441.000	57.02	31.90	88.92	94.00	-5.08	AVG	

Test Mode TX Mode_2441 MHz

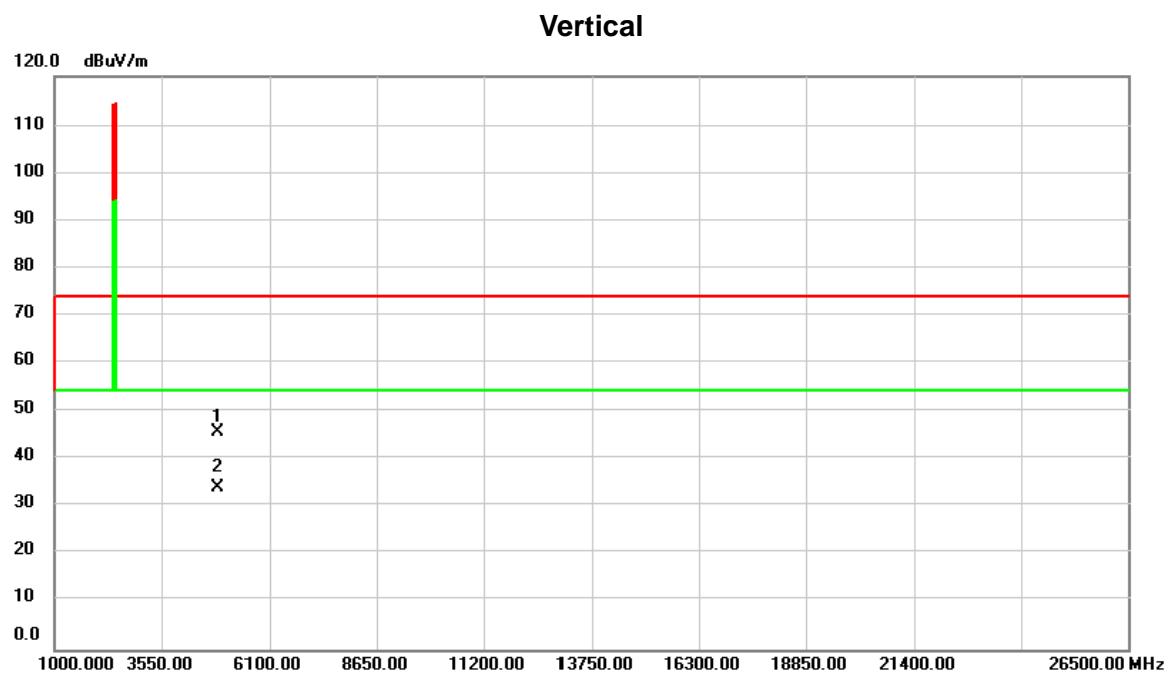


Test Mode TX Mode_2441 MHz

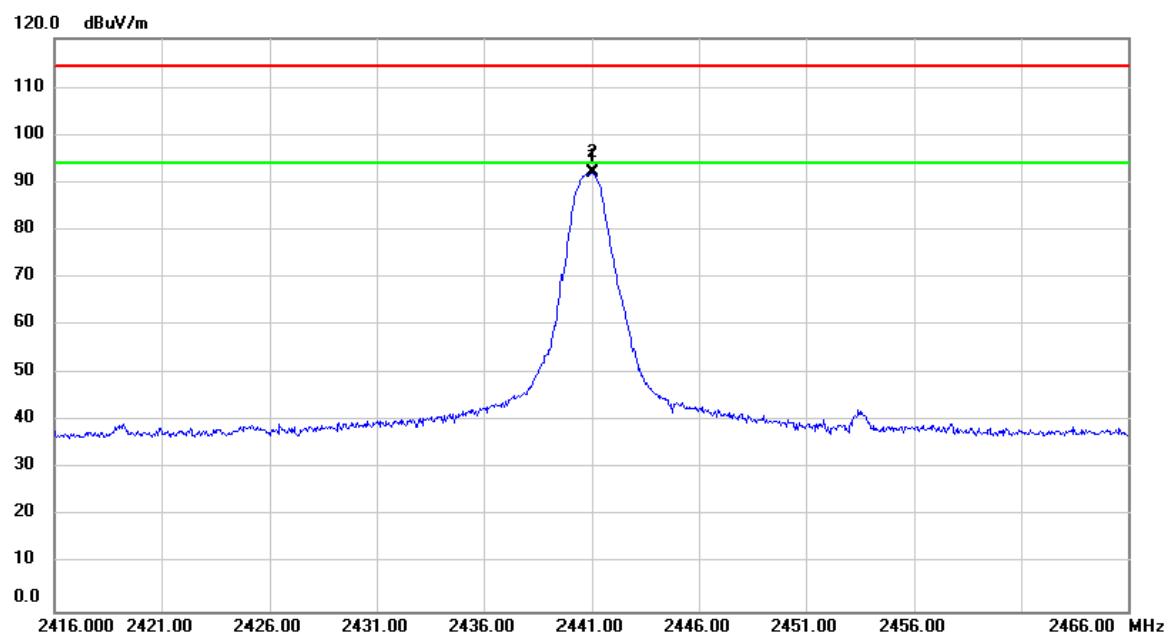Horizontal


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		2441.000	60.23	31.90	92.13	114.00	-21.87	peak	
2	*	2441.000	59.97	31.90	91.87	94.00	-2.13	AVG	

Test Mode TX Mode_2441 MHz

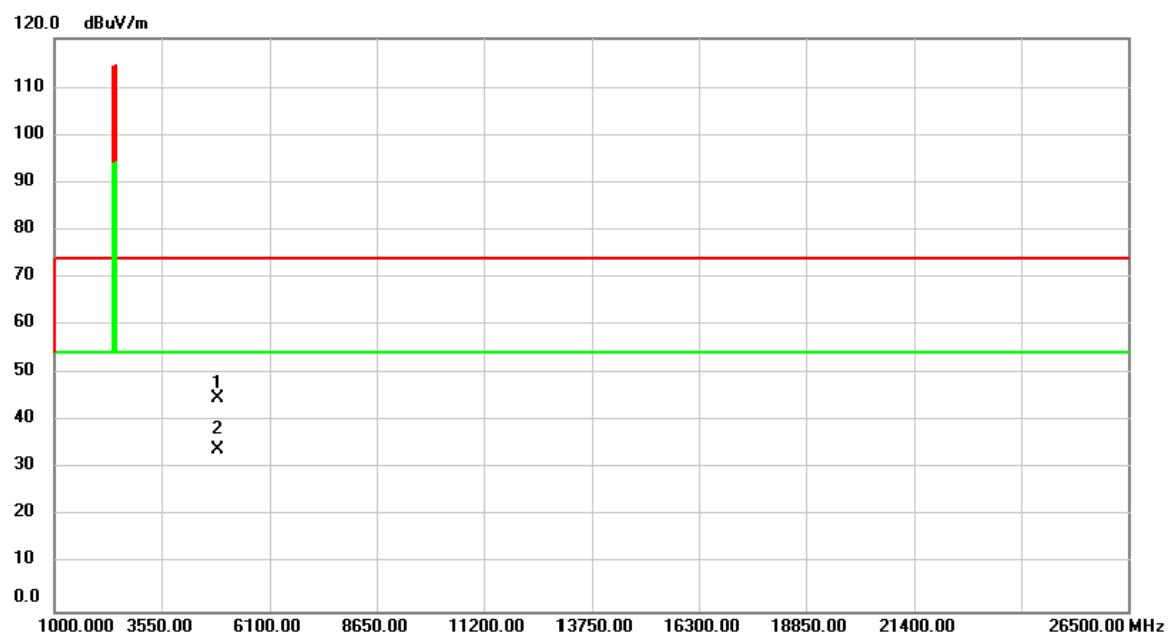Horizontal


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector Comment
1		4882.000	55.23	-10.39	44.84	74.00	-29.16	peak
2	*	4882.000	44.44	-10.39	34.05	54.00	-19.95	AVG

Test Mode TX Mode 2480 MHz

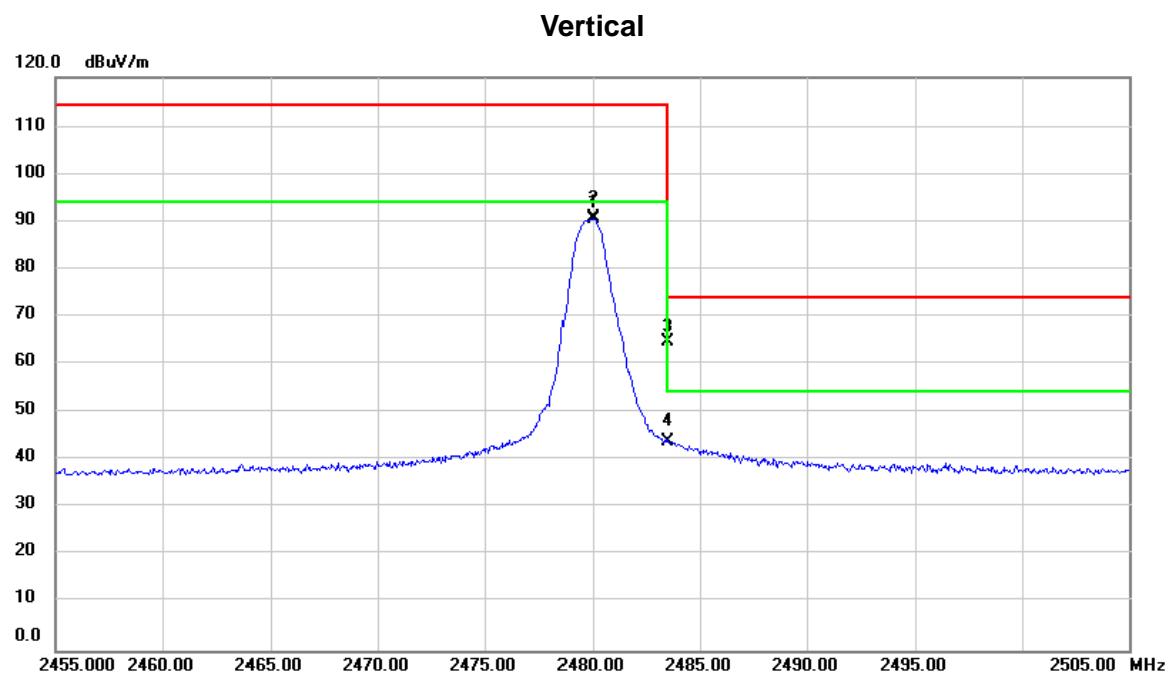

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over							
							MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		2480.000	58.72	32.05	90.77	114.00	-23.23	peak						
2	*	2480.000	58.47	32.05	90.52	94.00	-3.48	AVG						
3		2483.500	32.48	32.06	64.54	74.00	-9.46	peak						
4		2483.500	11.76	32.06	43.82	54.00	-10.18	AVG						


Test Mode TX Mode_2480 MHz

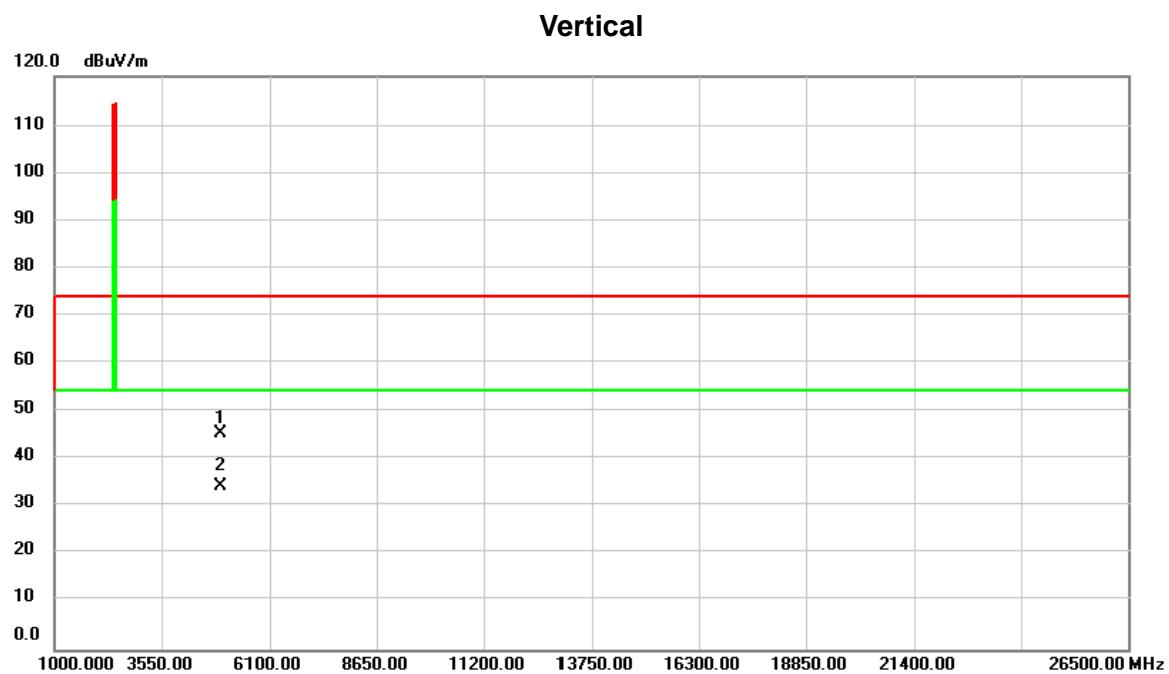

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4960.000	55.70	-10.26	45.44	74.00	-28.56	peak	
2	*	4960.000	44.61	-10.26	34.35	54.00	-19.65	AVG	


Test Mode	TX Mode_2480 MHz
-----------	------------------

Horizontal

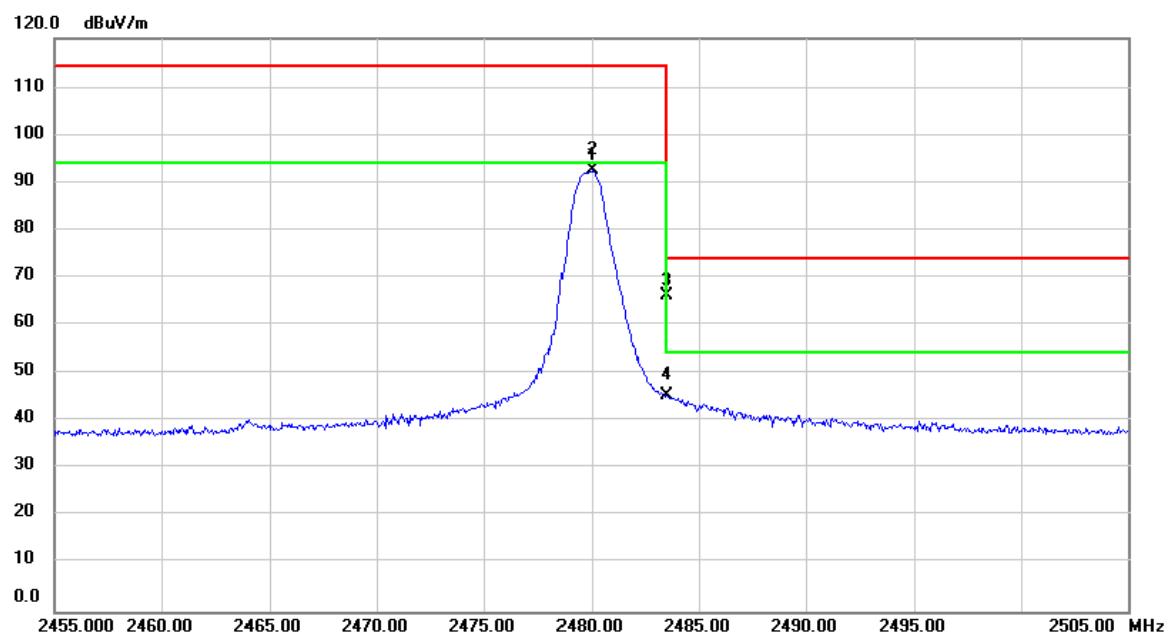

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
			MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1		2480.000	60.56	32.05	92.61	114.00	-21.39	peak	
2	*	2480.000	60.36	32.05	92.41	94.00	-1.59	AVG	
3		2483.500	34.22	32.06	66.28	74.00	-7.72	peak	
4		2483.500	13.50	32.06	45.56	54.00	-8.44	AVG	

Test Mode TX Mode_2480 MHz

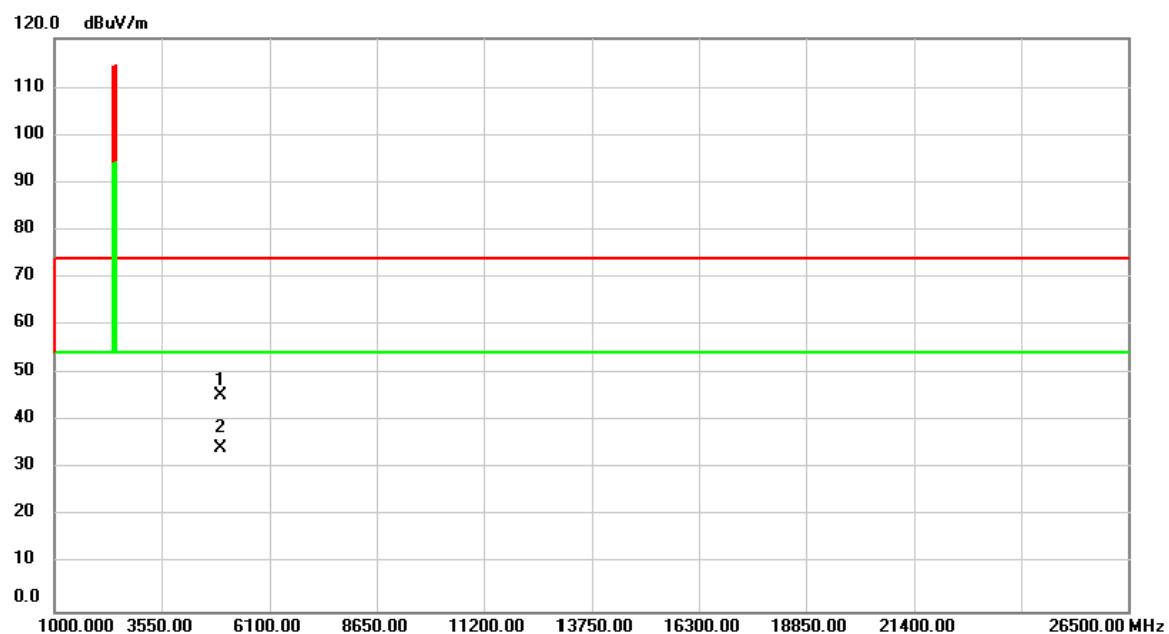Horizontal


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		4960.000	55.72	-10.26	45.46	74.00	-28.54	peak	
2	*	4960.000	44.66	-10.26	34.40	54.00	-19.60	AVG	

ATTACHMENT E - BANDWIDTH

Test Mode: TX Mode_2403 MHz/2441 MHz/2480 MHz


Frequency (MHz)	20dB Bandwidth (MHz)	99% Occupied BW (MHz)
2403	1.79	1.70
2441	1.79	1.73
2480	1.81	1.72

TX Mode_2403 MHz

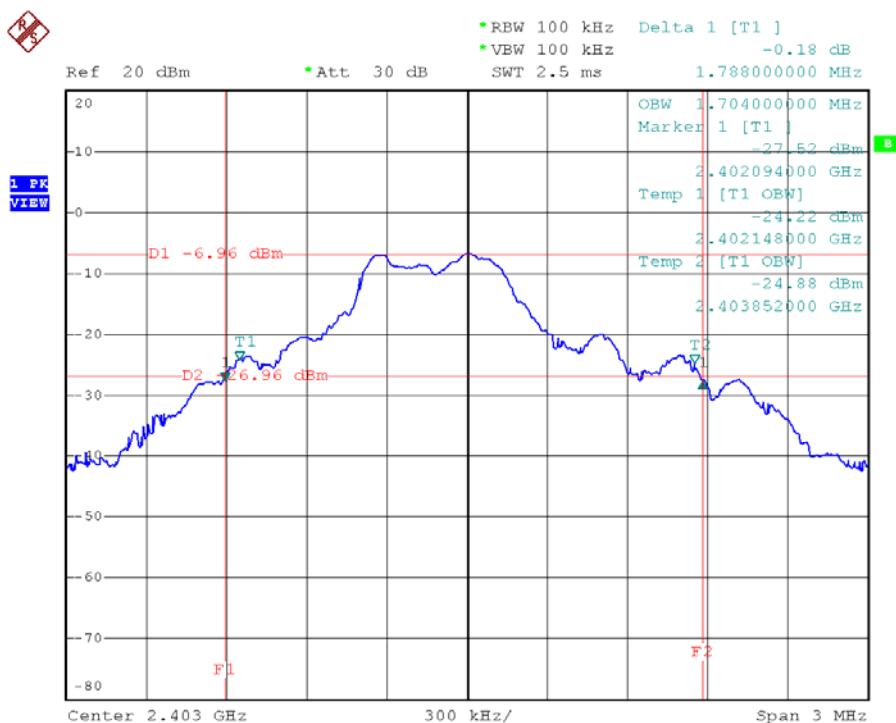


Date: 29.MAY.2016 12:47:56

TX Mode_2441 MHz

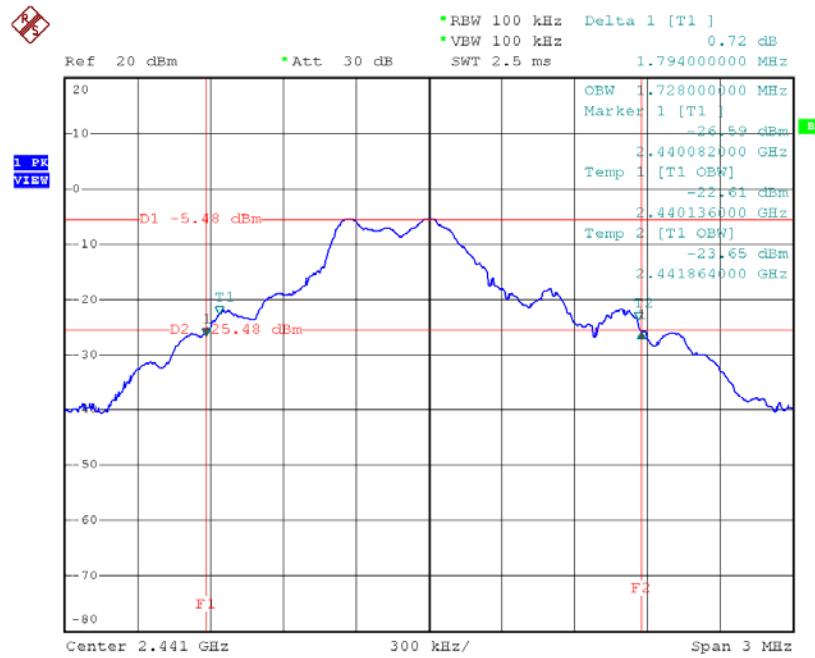

Date: 29.MAY.2016 12:51:05

TX Mode_2480 MHz

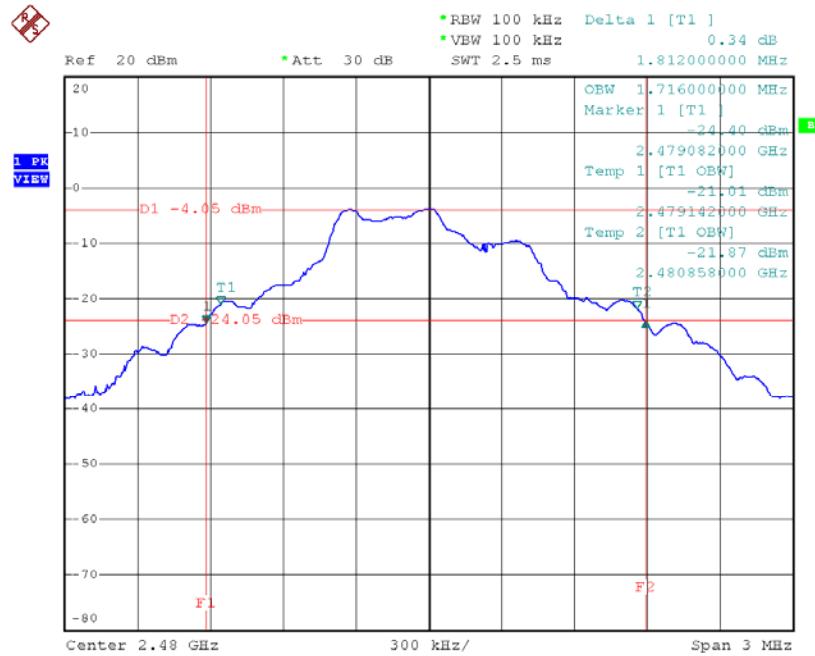

Date: 29.MAY.2016 12:56:26