



FCC TEST REPORT

REPORT NO.: RF920624R01

MODEL NO.: WLL3050

RECEIVED: June 24, 2003

TESTED: June 26 ~ 30, 2003

APPLICANT: ASKEY COMPUTER CORP.

ADDRESS: 10F, NO.119, CHIENKANG RD., CHUNG-HO,
TAIPEI TAIWAN R.O.C.

ISSUED BY: Advance Data Technology Corporation

LAB LOCATION: 47 14th Lin, Chiapau Tsun, Linko, Taipei,
Taiwan, R.O.C.

This test report consists of 63 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, NVLAP or any government agencies. The test results in the report only apply to the tested sample.



0528
ILAC MRA



Table of Contents

1	CERTIFICATION.....	4
2	SUMMARY OF TEST RESULTS	5
3	GENERAL INFORMATION	6
3.1	GENERAL DESCRIPTION OF EUT	6
3.2	DESCRIPTION OF TEST MODES.....	7
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS	7
3.4	DESCRIPTION OF SUPPORT UNITS.....	8
4	TEST TYPES AND RESULTS	9
4.1	CONDUCTED EMISSION MEASUREMENT	9
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT.....	9
4.1.2	TEST INSTRUMENTS	9
4.1.3	TEST PROCEDURES.....	10
4.1.4	DEVIATION FROM TEST STANDARD	10
4.1.5	TEST SETUP	11
4.1.6	EUT OPERATING CONDITIONS.....	11
4.1.7	TEST RESULTS.....	12
4.2	RADIATED EMISSION MEASUREMENT.....	18
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT.....	18
4.2.2	TEST INSTRUMENTS	19
4.2.3	TEST PROCEDURES.....	20
4.2.4	DEVIATION FROM TEST STANDARD	20
4.2.5	TEST SETUP	21
4.2.6	EUT OPERATING CONDITIONS.....	21
4.2.7	TEST RESULTS.....	22
4.3	6dB BANDWIDTH MEASUREMENT	29
4.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT.....	29
4.3.2	TEST INSTRUMENTS	29
4.3.3	TEST PROCEDURE	30
4.3.4	DEVIATION FROM TEST STANDARD	30
4.3.5	TEST SETUP	30
4.3.6	EUT OPERATING CONDITIONS.....	30
4.3.7	TEST RESULTS.....	31
4.4	MAXIMUM PEAK OUTPUT POWER	40
4.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	40
4.4.2	TEST INSTRUMENTS	40
4.4.3	TEST PROCEDURES.....	41

4.4.4	DEVIATION FROM TEST STANDARD	41
4.4.5	TEST SETUP	41
4.4.6	EUT OPERATING CONDITIONS.....	41
4.4.7	TEST RESULTS.....	42
4.5	POWER SPECTRAL DENSITY MEASUREMENT	43
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	43
4.5.2	TEST INSTRUMENTS	43
4.5.3	TEST PROCEDURE	44
4.5.4	DEVIATION FROM TEST STANDARD	44
4.5.5	TEST SETUP	44
4.5.6	EUT OPERATING CONDITIONS.....	44
4.5.7	TEST RESULTS.....	45
4.6	BAND EDGES MEASUREMENT	53
4.6.1	LIMITS OF BAND EDGES MEASUREMENT	53
4.6.2	TEST INSTRUMENTS	53
4.6.3	TEST PROCEDURE	53
4.6.4	DEVIATION FROM TEST STANDARD	53
4.6.5	EUT OPERATING CONDITION	54
4.6.6	TEST RESULTS.....	54
4.7	ANTENNA REQUIREMENT	60
4.7.1	STANDARD APPLICABLE	60
4.7.2	ANTENNA CONNECTED CONSTRUCTION.....	60
5	PHOTOGRAPHS OF THE TEST CONFIGURATION	61
6	INFORMATION ON THE TESTING LABORATORIES	65



1 CERTIFICATION

PRODUCT : Mini-PCI CARD

MODEL NO. : WLL3050

BRAND NAME : ASKEY

APPLICANT : ASKEY TECHNOLOGY INC.

STANDARDS : 47 CFR Part 15, Subpart C (Section 15.247),
ANSI C63.4-1992

We, **Advance Data Technology Corporation**, hereby certify that one sample of the designation has been tested in our facility from June 26 to 30, 2003. The test record, data evaluation and Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions herein specified.

PREPARED BY: Wendy Liao, **DATE:** July 08, 2003
Wendy Liao

APPROVED BY: Dr. Alan Lane, **DATE:** July 08, 2003
Dr. Alan Lane
Manager

2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: 47 CFR Part 15, Subpart C			
Standard Section	Test Type and Limit	Result	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit Minimum passing margin is -16.22dBuV at 0.170MHz
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit: min. 500kHz	PASS	Meet the requirement of limit
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit
15.247(c)	Transmitter Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit Minimum passing margin is -11.70dBuV at 160.00MHz
15.247(d)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit
15.247(c)	Band Edge Measurement Limit: 20 dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Mini-PCI CARD
MODEL NO.	WLL3050
SOURCE VOLTAGE	$V_{\text{nom}} = 230$ $V_{\text{min}} = 207$ $V_{\text{max}} = 253$
POWER SUPPLY	3.3VDC from host equipment
MODULATION TYPE	DSSS, OFDM
TRANSFER RATE	up to 54Mbps
FREQUENCY RANGE	2412MHz ~ 2462MHz
CHANNEL SPACING	5MHz
NUMBER OF CHANNEL	11
OUTPUT POWER	16.98dBm
ANTENNA TYPE	Printed Dipole antenna, Patch antenna (with 3dBi gain)
DATA CABLE	NA
I/O PORTS	NA
ASSOCIATED DEVICES	NA

NOTE:

1. Fully compatible with the 802.11g standard to provide a wireless data rate of up to 54Mbps.
2. The EUT complies with IEEE 802.11g draft standards, and backwards compatible with IEEE 802.11b products.
3. There are two sets of antenna were provided to this EUT. One of the antenna is printed antenna, and the other is printed antenna. Both of them are 3dBi gain.
4. For more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 DESCRIPTION OF TEST MODES

Channel	Frequency	Channel	Frequency
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

NOTE:

1. Below 1GHz, the channel 1, 6, and 11 were pre-tested in chamber. The channel 11, the worst case, was chosen for final test.
2. Above 1GHz, the channel 1, 6, and 11 were tested individually.
3. Transfer rate, 11Mbps with CCK technique and 6Mbps with OFDM technique, the worst cases, were chosen for final test.

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a Mini-PCI CARD. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC 47 CFR Part 15, Subpart C. (15.247)
ANSI C63.4 : 1992

All tests have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.



3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	Notebook	Dell	PP01L	TW-09C748-12800-19O-B220	FCC DoC
2	PRINTER	EPSON	LQ-300+	DCGY017096	FCC DoC Approved
3	MODEM	ACEEX	1414	980020527	IFAXDM1414

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA
2	1.2m braid shielded wire, terminated with DB25 and Centronics connector via metallic frame, w/o core
3	1.2 m braid shielded wire, terminated with DB25 and DB9 connector via metallic frame, w/o core.

NOTE: All power cords of the above support units are non shielded (1.8m).

4 TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
ROHDE & SCHWARZ Test Receiver	ESCS30	834115/016	Mar. 02, 2004
ROHDE & SCHWARZ Artificial Mains Network (For EUT)	ESH2-Z5	892107/003	July 10, 2003
* ROHDE & SCHWARZ 4-wire ISN	ENY41	838119/028	Nov. 29, 2003
* ROHDE & SCHWARZ 2-wire ISN	ENY22	837497/018	Nov. 29, 2003
EMCO L.I.S.N. (For peripherals)	3825/2	9504-2359	July 10, 2003
Software	Cond-V2M1	NA	NA
RF cable (JYEBAO)	5D-FB	Cable-C03.01	July 11, 2003
Terminator (For EMCO LISN)	NA	E1-01-300	Feb. 23, 2004
Terminator (For EMCO LISN)	NA	E1-01-301	Feb. 23, 2004

NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. “*”: These equipment are used for conducted telecom port test only (if tested).
3. The test was performed in ADT Shielded Room No. 3.
4. The VCCI Site Registration No. is C-274.


4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels over 10dB under the prescribed limits could not be reported

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

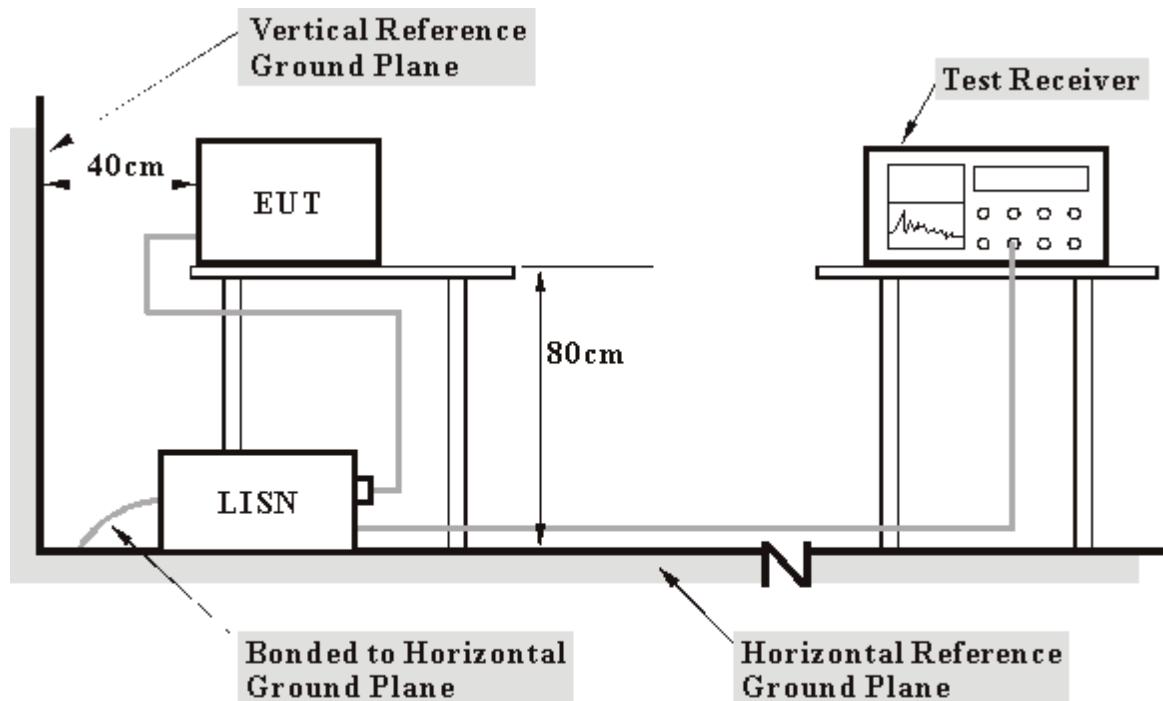

Note:

1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.1.6 EUT OPERATING CONDITIONS

- a. Connected the EUT to a computer system placed on a testing table.
- b. The computer system ran a test program to enable EUT under transmission/receiving condition continuously at specific channel frequency.
- c. The computer system sent "H" messages to its screen.
- d. The computer system sent "H" messages to modem.
- e. The computer system sent "H" messages to printer, and the printer prints them on paper.
- f. Repeat steps b-e.


4.1.7 TEST RESULTS

EUT	Mini-PCI CARD	MODEL	WLL3050
MODE	Channel 01	6dB BANDWIDTH	9kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	25deg. C, 60%RH, 991hPa		TESTED BY: Gary Chang

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.173	0.10	47.17	-	47.27	-	64.79	54.79	-17.52	-
2	0.283	0.14	36.72	-	36.86	-	60.73	50.73	-23.87	-
3	0.396	0.20	30.29	-	30.49	-	57.93	47.93	-27.45	-
4	0.455	0.21	31.47	-	31.68	-	56.79	46.79	-25.11	-
5	3.926	0.40	27.78	-	28.18	-	56.00	46.00	-27.82	-
6	13.664	0.60	28.09	-	28.69	-	60.00	50.00	-31.31	-

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value.
5. Correction factor = Insertion loss + Cable loss.
6. Emission Level = Correction Factor + Reading Value.
- 7.

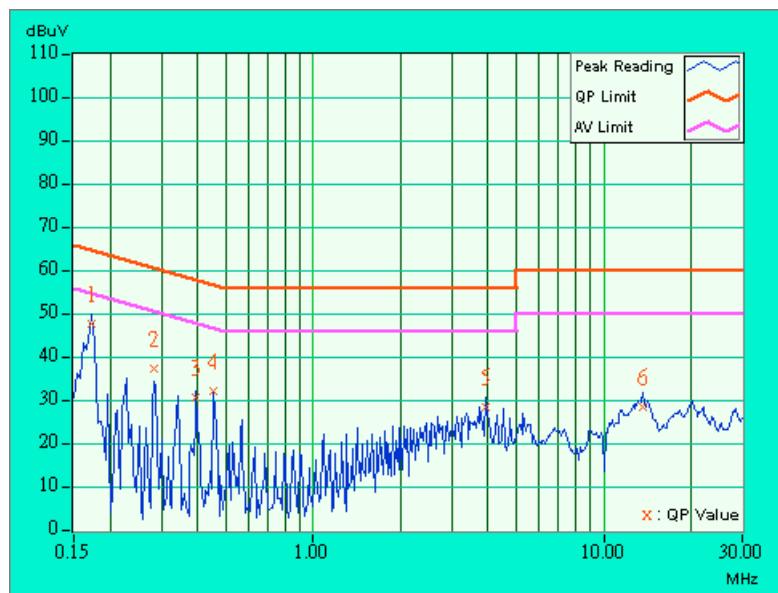


EUT	Mini-PCI CARD	MODEL	WLL3050
MODE	Channel 01	6dB BANDWIDTH	9kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	25deg. C, 60%RH, 991hPa		TESTED BY: Gary Chang

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.166	0.10	42.22	-	42.32	-	65.18	55.18	-22.86	-
2	0.228	0.11	43.41	-	43.52	-	62.52	52.52	-18.99	-
3	0.283	0.14	35.57	-	35.71	-	60.73	50.73	-25.02	-
4	0.396	0.20	27.37	-	27.57	-	57.93	47.93	-30.37	-
5	3.926	0.50	30.69	-	31.19	-	56.00	46.00	-24.81	-
6	13.297	0.77	23.22	-	23.99	-	60.00	50.00	-36.01	-

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value.
5. Correction factor = Insertion loss + Cable loss.
6. Emission Level = Correction Factor + Reading Value.

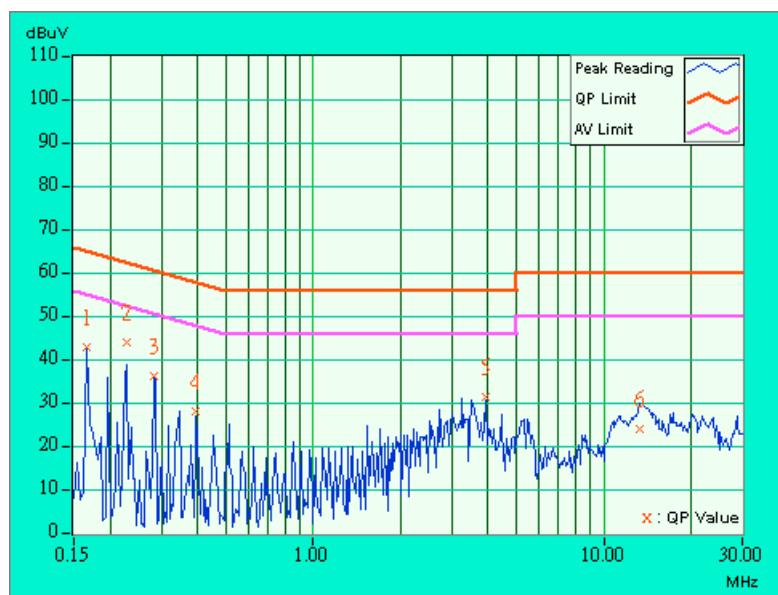


EUT	Mini-PCI CARD	MODEL	WLL3050
MODE	Channel 06	6dB BANDWIDTH	9kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	25deg. C, 60%RH, 991hPa		TESTED BY: Gary Chang

No	Freq.	Corr. Factor	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.173	0.10	47.23	-	47.33	-	64.79	54.79	-17.46	-
2	0.232	0.12	38.76	-	38.88	-	62.38	52.38	-23.50	-
3	0.287	0.14	36.21	-	36.35	-	60.61	50.61	-24.26	-
4	0.341	0.17	35.68	-	35.85	-	59.17	49.17	-23.32	-
5	3.871	0.40	26.63	-	27.03	-	56.00	46.00	-28.97	-
6	13.219	0.60	27.44	-	28.04	-	60.00	50.00	-31.96	-

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value.
5. Correction factor = Insertion loss + Cable loss.
6. Emission Level = Correction Factor + Reading Value.

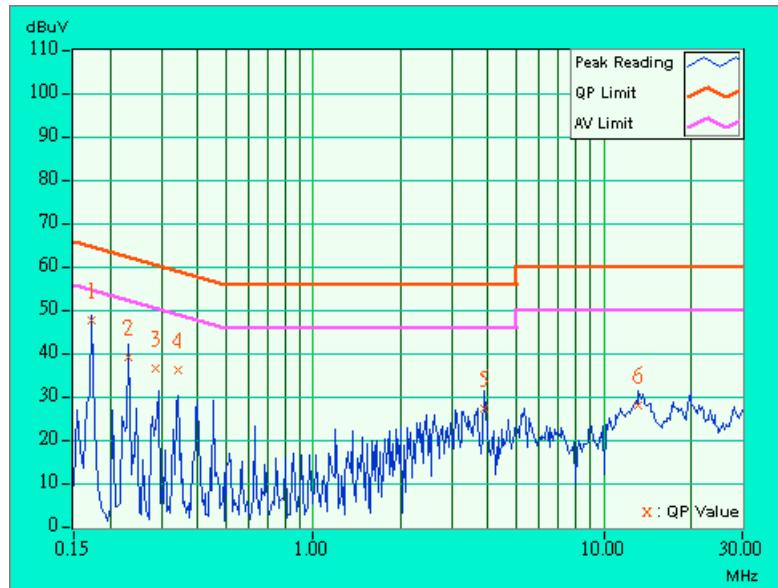


EUT	Mini-PCI CARD	MODEL	WLL3050
MODE	Channel 06	6dB BANDWIDTH	9kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	25deg. C, 60%RH, 991hPa		TESTED BY: Gary Chang

No	Freq.	Corr. Factor	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.170	0.10	47.73	-	47.83	-	64.98	54.98	-17.15	-
2	0.232	0.12	37.23	-	37.35	-	62.38	52.38	-25.03	-
3	0.287	0.14	34.98	-	35.12	-	60.62	50.62	-25.50	-
4	0.400	0.20	28.67	-	28.87	-	57.85	47.85	-28.98	-
5	3.699	0.48	29.68	-	30.16	-	56.00	46.00	-25.84	-
6	13.387	0.77	27.28	-	28.05	-	60.00	50.00	-31.95	-

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value.
5. Correction factor = Insertion loss + Cable loss.
6. Emission Level = Correction Factor + Reading Value.

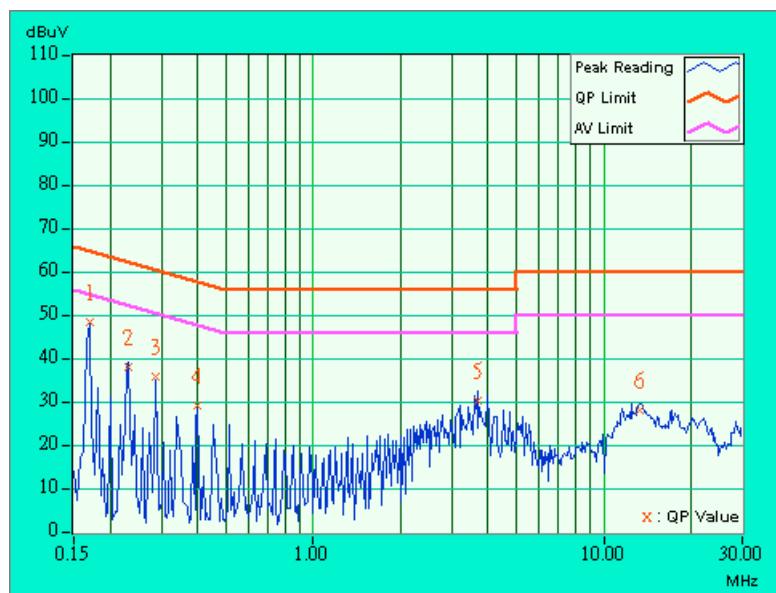


EUT	Mini-PCI CARD	MODEL	WLL3050
MODE	Channel 11	6dB BANDWIDTH	9kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	25deg. C, 60%RH, 991hPa		TESTED BY: Gary Chang

No	Freq.	Corr. Factor	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.170	0.10	48.66	-	48.76	-	64.98	54.98	-16.22	-
2	0.228	0.11	43.81	-	43.92	-	62.52	52.52	-18.59	-
3	0.287	0.14	36.47	-	36.61	-	60.62	50.62	-24.01	-
4	0.341	0.17	35.60	-	35.77	-	59.17	49.17	-23.40	-
5	3.934	0.40	28.31	-	28.71	-	56.00	46.00	-27.29	-
6	13.055	0.60	26.24	-	26.84	-	60.00	50.00	-33.16	-

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value.
5. Correction factor = Insertion loss + Cable loss.
6. Emission Level = Correction Factor + Reading Value.

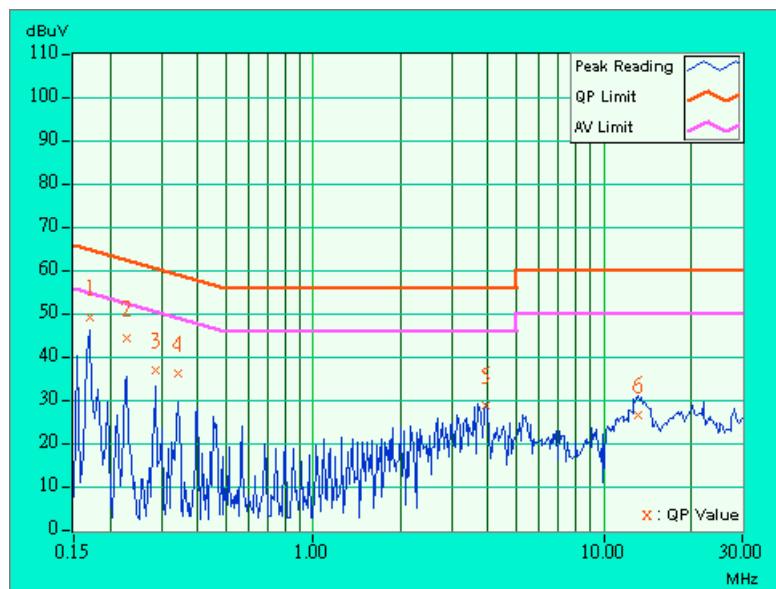


EUT	Mini-PCI CARD	MODEL	WLL3050
MODE	Channel 11	6dB BANDWIDTH	9kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	25deg. C, 60%RH, 991hPa		TESTED BY: Gary Chang

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.170	0.10	47.51	-	47.61	-	64.98	54.98	-17.37	-
2	0.228	0.11	42.34	-	42.45	-	62.52	52.52	-20.06	-
3	0.287	0.14	35.17	-	35.31	-	60.62	50.62	-25.31	-
4	3.531	0.48	28.04	-	28.52	-	56.00	46.00	-27.48	-
5	3.875	0.49	30.88	-	31.37	-	56.00	46.00	-24.63	-
6	13.566	0.77	27.13	-	27.90	-	60.00	50.00	-32.10	-

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value.
5. Correction factor = Insertion loss + Cable loss.
6. Emission Level = Correction Factor + Reading Value.

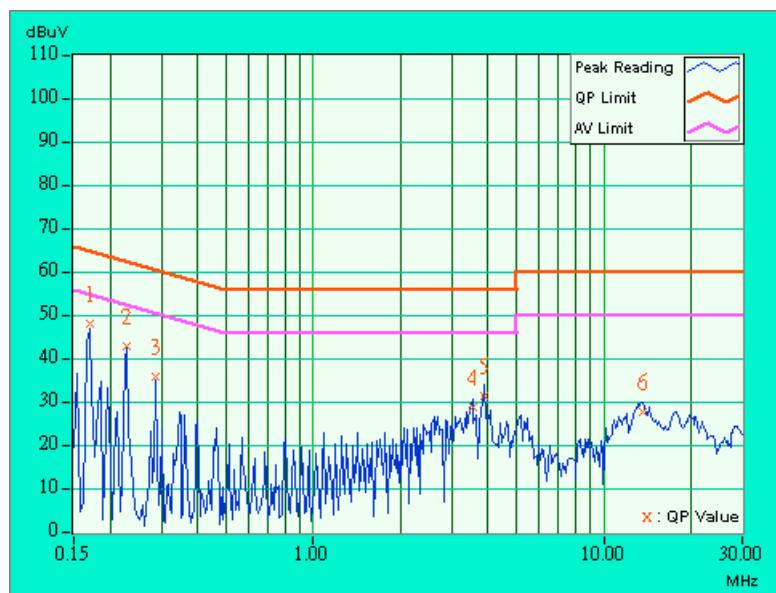

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dB_uV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
*HP Spectrum Analyzer	8590L	3520A00667	Aug. 26, 2003
*CHASE Preamplifier	CPA9231A/4	3215	Nov. 06, 2003
HP Spectrum Analyzer	8593E	3926A04191	Mar. 24, 2004
* HP Preamplifier	8449B	3008A01201	Dec. 01, 2003
* HP Preamplifier	8449B	3008A01292	Aug. 07, 2003
* ROHDE & SCHWARZ TEST RECEIVER	ESVS10	846285/012	Sept. 16, 2003
* ROHDE & SCHWARZ TEST RECEIVER	ESMI	839013/007 839379/002	Feb. 13, 2004
SCHAFFNER Tunable Dipole Antenna SCHWARZBECK Tunable Dipole Antenna	VHBA 9123 UHA 9105	459 977	Nov. 22, 2003
* CHASE BILOG Antenna	CBL6112B	2751	Mar. 21, 2004
* SCHWARZBECK Horn Antenna	BBHA9120-D1	D130	Aug. 08, 2004
* EMCO Horn Antenna	3115	9312-4192	Mar. 23, 2004
* CHANCE Turn Table & Tower Controller	ACS-I	NA	NA
* Software	ADT_Radiated _V5.09	NA	NA
* ANRITSU RF Switches	MP59B	M51167	Aug. 21, 2003
* TIMES RF cable	LMR-600	CABLE-ST6-01	Aug. 21, 2003

NOTE:

1. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.
2. “*” = These equipment are used for the final measurement.
3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
4. The test was performed in ADT Open Site No. 6.
5. The VCCI Site Registration No. is R-728.

4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 300 Hz for Average detection (AV) at frequency above 1GHz.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation

4.2.5 TEST SETUP

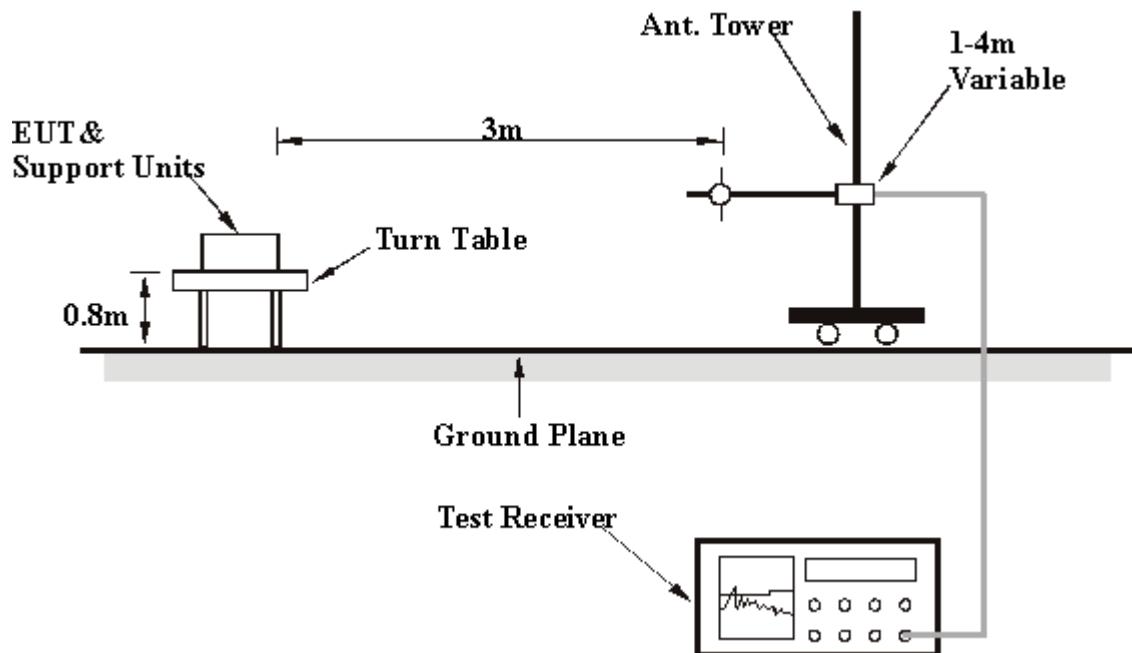

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6

4.2.7 TEST RESULTS

EUT	Mini-PCI CARD	MODEL	WLL3050
CHANNEL	Channel 01	FREQUENCY RANGE	Below 1000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	25deg. C, 60%RH, 991hPa		TESTED BY: Gary Chang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	128.00	30.2 QP	43.50	-13.30	1.17 H	185	17.80	12.40
2	160.00	30.8 QP	43.50	-12.70	1.30 H	85	20.20	10.60
3	256.00	28.5 QP	46.00	-17.50	1.10 H	320	14.50	14.00
4	288.00	29.4 QP	46.00	-16.60	1.30 H	35	15.20	14.20
5	384.00	30.2 QP	46.00	-15.80	1.52 H	22	13.20	17.00
6	480.00	31.0 QP	46.00	-15.00	1.15 H	85	12.10	18.90

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	128.10	29.5 QP	43.50	-14.00	1.15 V	342	17.10	12.40
2	160.00	31.8 QP	43.50	-11.70	1.52 V	360	21.20	10.60
3	192.10	28.5 QP	43.50	-15.00	1.30 V	85	18.50	10.00
4	320.00	27.5 QP	46.00	-18.50	1.24 V	118	12.50	15.00
5	480.20	29.8 QP	46.00	-16.20	1.14 V	307	10.90	18.90
6	512.20	30.4 QP	46.00	-15.60	1.03 V	32	10.70	19.70

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

EUT	Mini- PCI CARD	MODEL	WLL3050
MODE	CCK	FREQUENCY RANGE	Above 1000MHz
CHANNEL	Channel 01		
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 60%RH, 991hPa	TESTED BY: Gary Chang	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2412.00	109.3 PK			1.02 H	287	79.60	29.70
1	*2412.00	101.6 AV			1.02 H	287	71.90	29.70
2	4824.00	48.0 PK	74.00	-26.00	1.43 H	297	12.80	35.30

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2412.00	107.0 PK			1.20 V	208	77.30	29.70
1	*2412.00	98.1 AV			1.20 V	208	68.40	29.70
2	4824.00	48.4 PK	74.00	-25.60	1.10 V	85	13.10	35.30

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “*”: Fundamental frequency

EUT	Mini-PCI CARD	MODEL	WLL3050
MODE	CCK	FREQUENCY RANGE	Above 1000MHz
CHANNEL	Channel 06		
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 60%RH, 991hPa	TESTED BY: Gary Chang	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	108.2 PK			1.87 H	325	78.50	29.70
1	*2437.00	99.3 AV			1.87 H	325	69.60	29.70
2	4874.00	48.7 PK	74.00	-25.30	1.15 H	34	13.20	35.50
3	9748.00	53.5 PK	88.20	-34.70	1.30 H	65	9.80	43.70
3	9748.00	43.9 AV	79.30	-35.40	1.30 H	65	0.20	43.70

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	104.3 PK			1.85 V	34	74.50	29.70
1	*2437.00	96.2 AV			1.85 V	34	66.50	29.70
2	4874.00	48.7 PK	74.00	-25.30	1.09 V	216	13.20	35.50

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “*”: Fundamental frequency

EUT	Mini-PCI CARD	MODEL	WLL3050
MODE	CCK	FREQUENCY RANGE	Above 1000MHz
CHANNEL	Channel 11		
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 60%RH, 991hPa	TESTED BY: Gary Chang	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	107.0 PK			1.05 H	251	77.20	29.80
1	*2462.00	98.4 AV			1.05 H	251	68.60	29.80
2	4924.00	46.8 PK	74.00	-27.20	1.12 H	85	11.10	35.70
3	9848.00	54.4 PK	87.00	-32.60	1.10 H	306	10.70	43.80
3	9848.00	43.0 AV	78.40	-35.40	1.10 H	306	-0.80	43.80

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	105.8 PK			1.00 V	251	76.00	29.80
1	*2462.00	96.1 AV			1.00 V	251	66.30	29.80
2	4924.00	47.1 PK	74.00	-26.90	1.09 V	251	11.40	35.70

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “*”: Fundamental frequency

EUT	Mini-PCI CARD	MODEL	WLL3050
MODE	OFDM	FREQUENCY RANGE	Above 1000MHz
CHANNEL	Channel 01		
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 60%RH, 991hPa	TESTED BY: Gary Chang	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2412.00	105.4 PK			1.48 H	25	75.80	29.70
1	*2412.00	96.0 AV			1.48 H	25	66.30	29.70
2	4824.00	44.7 PK	74.00	-29.30	1.33 H	304	9.40	35.30
3	9648.00	53.1 PK	85.40	-32.30	1.48 H	25	9.60	43.60
3	9648.00	43.9 AV	76.00	-32.10	1.48 H	25	0.30	43.60

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2412.00	102.2 PK			1.15 V	324	72.50	29.70
1	*2412.00	94.4 AV			1.15 V	324	64.70	29.70
2	4824.00	44.1 PK	74.00	-29.90	1.94 V	101	8.90	35.30

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “*”: Fundamental frequency

EUT	Mini-PCI CARD	MODEL	WLL3050
MODE	OFDM	FREQUENCY RANGE	Above 1000MHz
CHANNEL	Channel 06		
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 60%RH, 991hPa	TESTED BY: Gary Chang	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	104.0 PK			1.10 H	228	74.30	29.70
1	*2437.00	92.3 AV			1.10 H	228	62.60	29.70
2	4874.00	43.6 PK	74.00	-30.40	1.10 H	228	8.10	35.50

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	104.0 PK			1.02 V	356	74.30	29.70
1	*2437.00	95.2 AV			1.02 V	356	65.50	29.70
2	4874.00	44.2 PK	74.00	-29.80	1.27 V	81	8.70	35.50

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “*”: Fundamental frequency

EUT	Mini-PCI CARD	MODEL	WLL3050
MODE	OFDM	FREQUENCY RANGE	Above 1000MHz
CHANNEL	Channel 11		
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 60%RH, 991hPa	TESTED BY: Gary Chang	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	104.3 PK			1.12 H	220	74.50	29.80
1	*2462.00	95.6 AV			1.12 H	220	65.80	29.80
2	4924.00	44.3 PK	74.00	-29.70	1.00 H	318	8.60	35.70

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	103.7 PK			1.12 V	220	73.90	29.80
1	*2462.00	94.8 AV			1.12 V	220	65.00	29.80
2	4924.00	47.8 PK	74.00	-26.20	1.30 V	65	12.10	35.70

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “*”: Fundamental frequency

4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	July 24, 2003

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100kHz RBW and 100kHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation

4.3.5 TEST SETUP

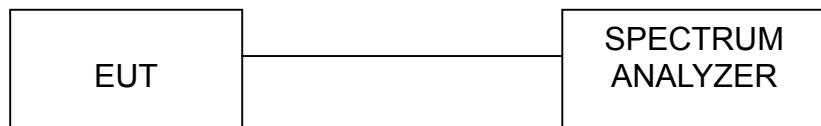

For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.


4.3.7 TEST RESULTS

EUT	Mini- PCI CARD	MODEL	WLL3050
MODE	CCK	ENVIRONMENTAL CONDITIONS	27deg. C, 57%RH, 991hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TESTED BY: Steven Lei	

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	11.20	0.5	PASS
6	2437	11.28	0.5	PASS
11	2462	11.32	0.5	PASS




CH1

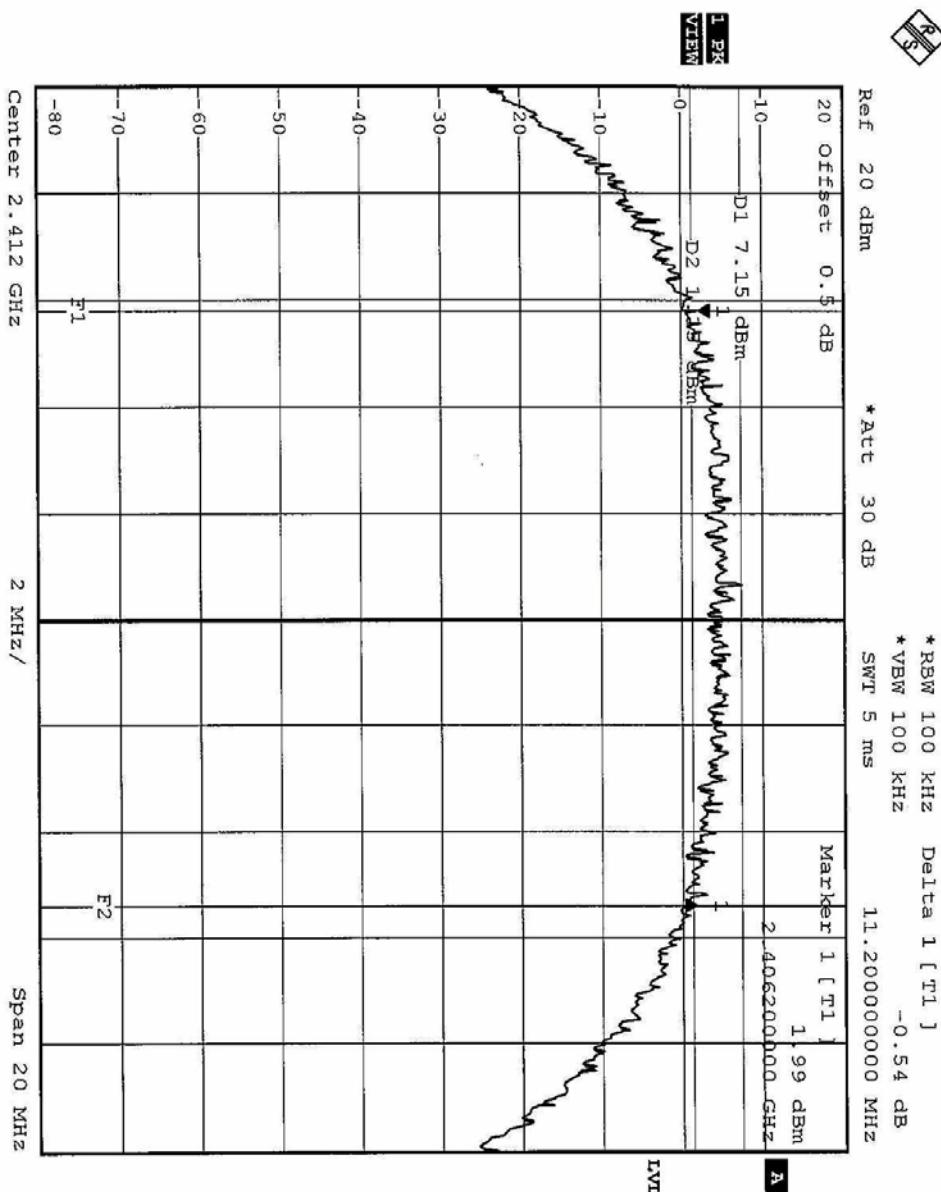


Date: 26.JUN.2003 14:37:41

CH6

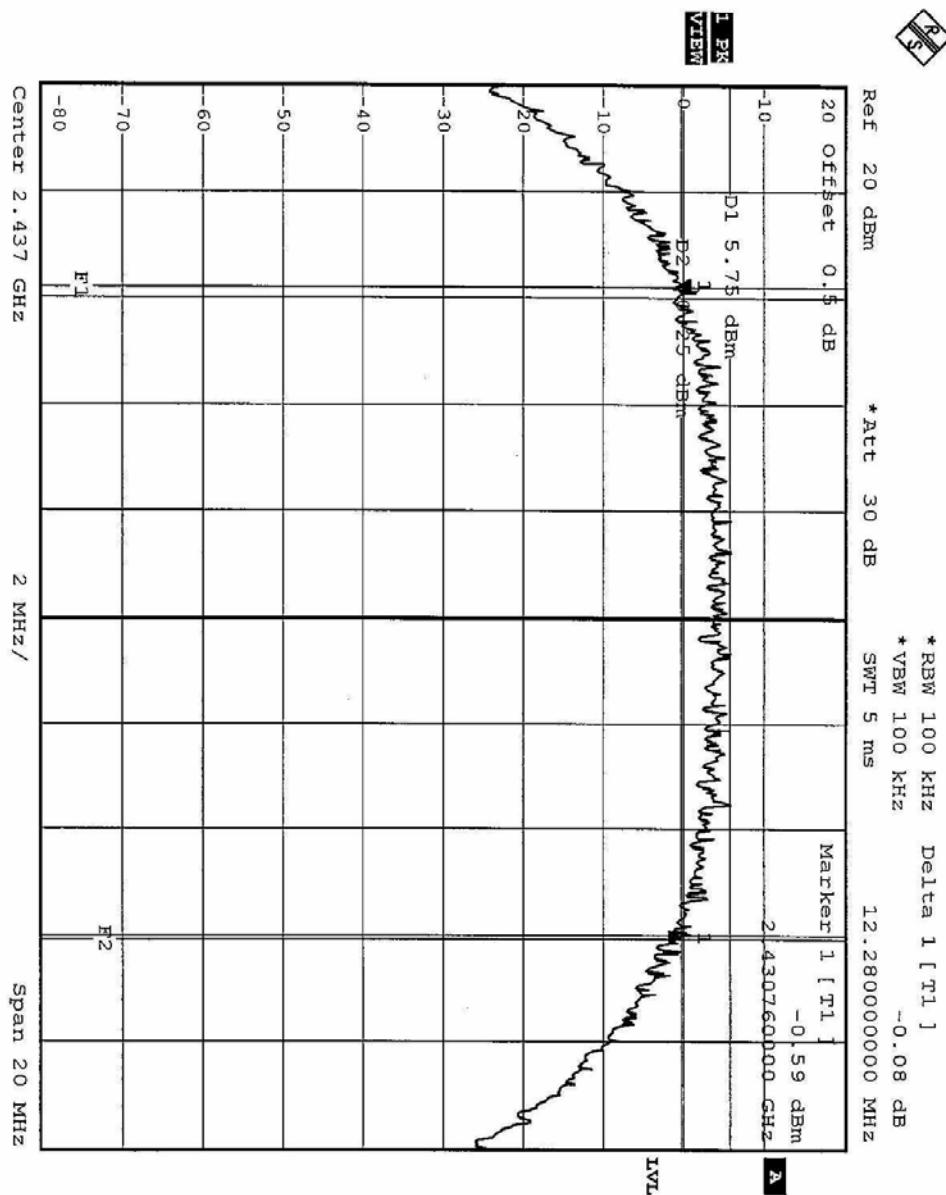

Date: 26.JUN.2003 14:42:11


FCC ID: H8NWLL3050



FCC ID: H8NWLL3050



CH11

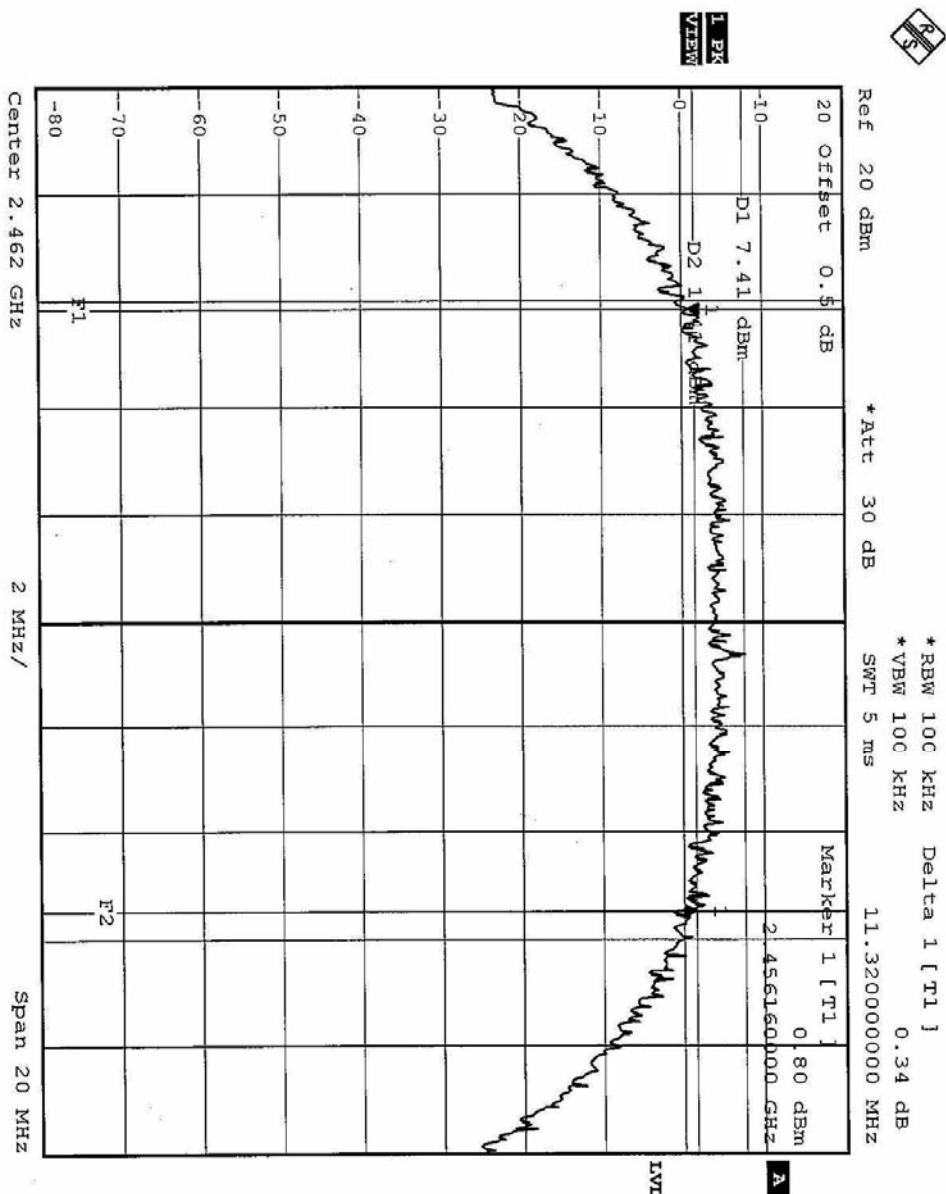


Date: 26.JUN.2003 14:51:11

EUT	Mini-PCI CARD	MODEL	WLL3050
MODE	OFDM	ENVIRONMENTAL CONDITIONS	27deg. C, 57%RH, 991hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TESTED BY: Steven Lei	

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	16.36	0.5	PASS
6	2437	16.44	0.5	PASS
11	2462	16.52	0.5	PASS


CH1

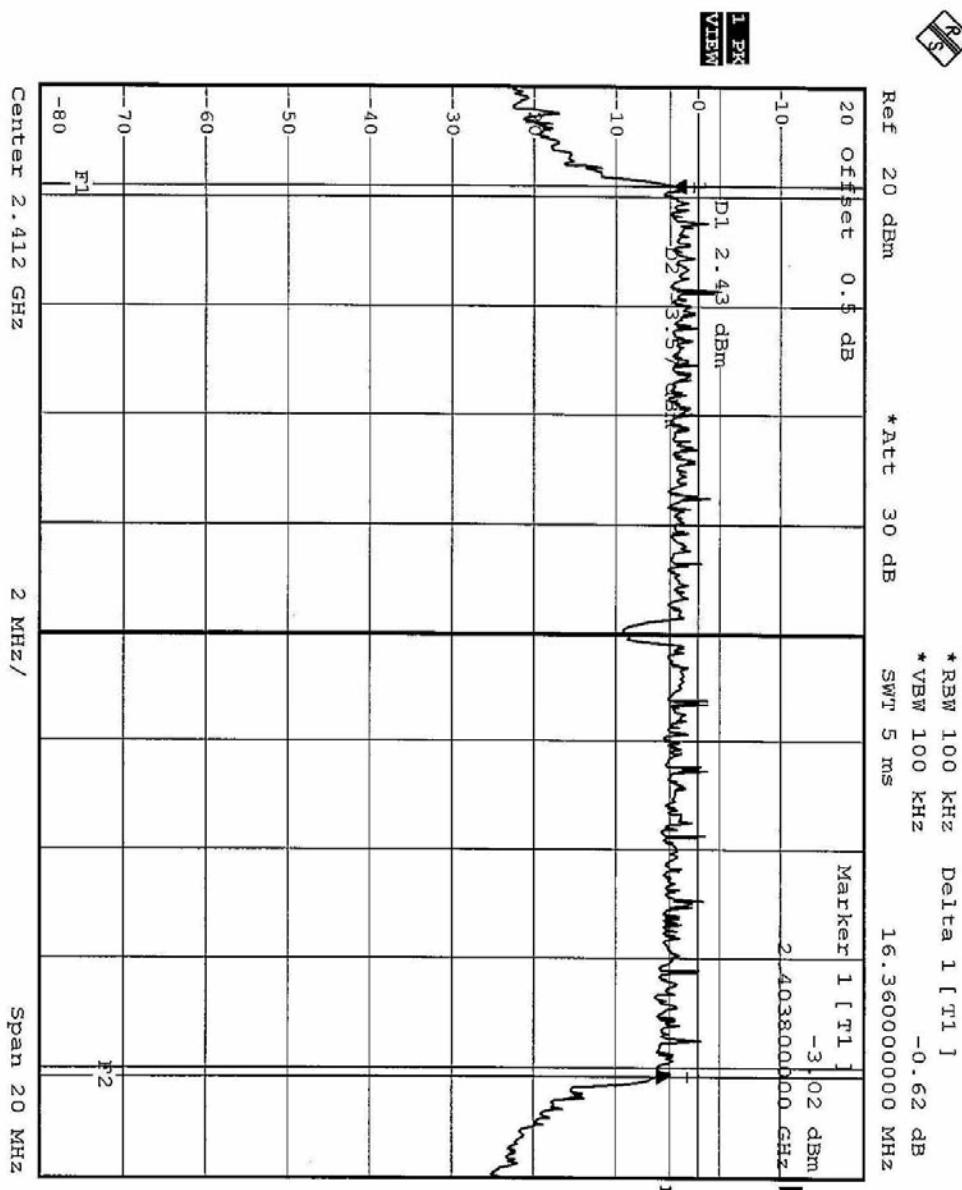

Date: 26.JUN.2003 15:11:09

CH6


Date: 26.JUN.2003 15:19:52

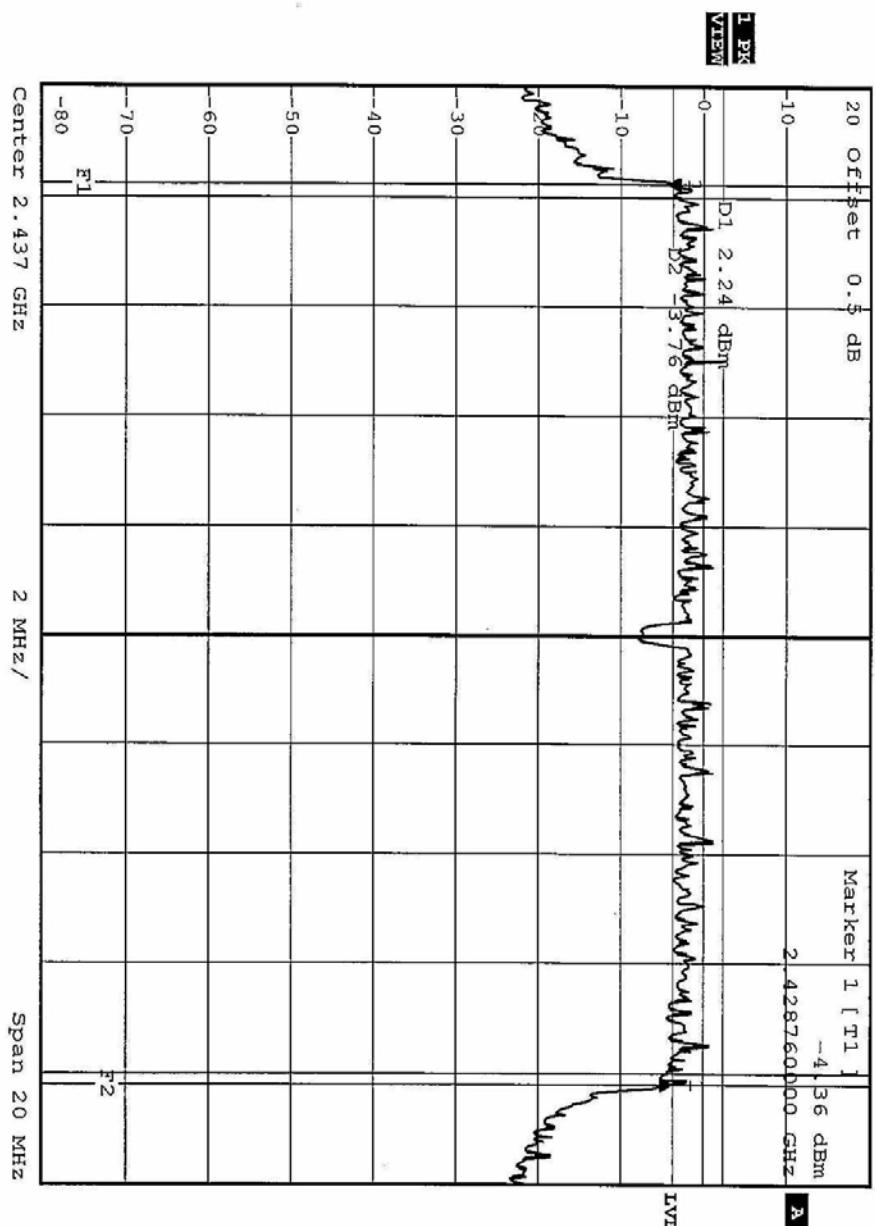

* RBW 100 kHz Delta 1 [T1] 0.33 dB
 * VBW 100 kHz 16.440000000 MHz

CH11

Date: 26.JUN.2003 11:57:52

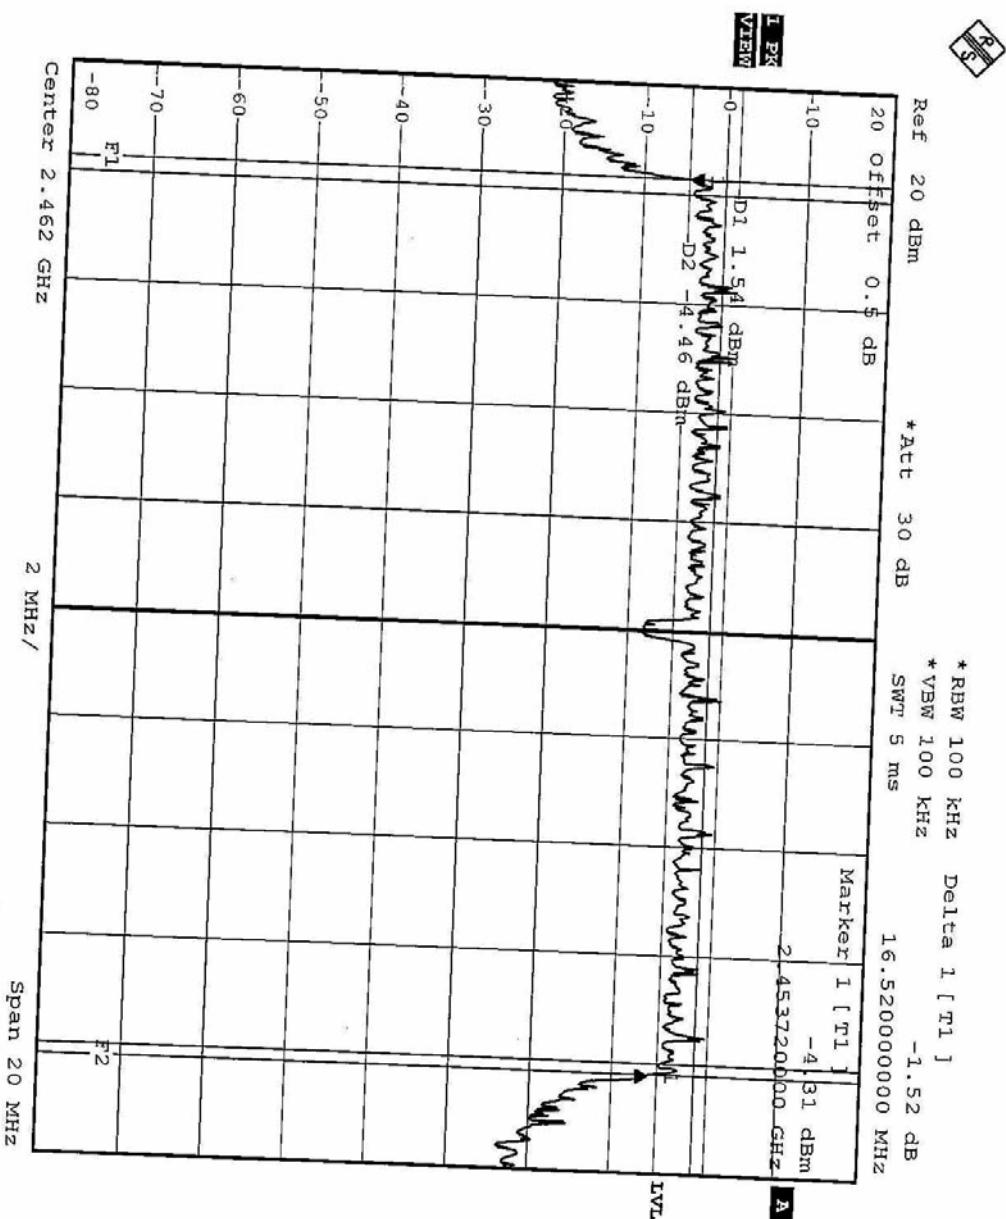

4.4 MAXIMUM PEAK OUTPUT POWER

4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

4.4.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	Jul. 24, 2003
R&S SIGNAL GENERATOR	SMP04	100011	May 28, 2004
TEKTRONIX OSCILLOSCOPE	TDS 220	B048470	Mar. 05, 2004
NARDA DETECTOR	4503A	FSCM99899	NA

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.4.3 TEST PROCEDURES

1. A detector was used on the output port of the EUT. An oscilloscope was used to read the response of the detector.
2. Replaced the EUT by the signal generator . The center frequency of the S.G was adjusted to the center frequency of the measured channel.
3. Adjusted the power to have the same reading on oscilloscope. Record the power level.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation

4.4.5 TEST SETUP

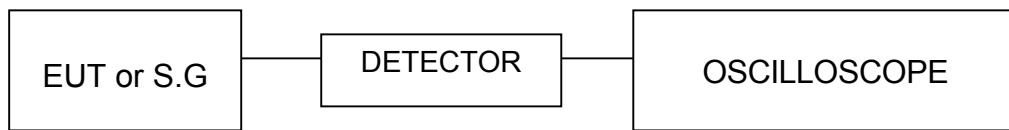

4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6

4.4.7 TEST RESULTS

EUT	Mini-PCI CARD	MODEL	WLL3050
MODE	CCK	ENVIRONMENTAL CONDITIONS	27deg. C, 57%RH, 991hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TESTED BY: Steven Lei	

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	16.98	30	PASS
6	2437	16.95	30	PASS
11	2462	16.97	30	PASS

EUT	Mini-PCI CARD	MODEL	WLL3050
MODE	OFDM	ENVIRONMENTAL CONDITIONS	27deg. C, 57%RH, 991hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TESTED BY: Steven Lei	

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	16.89	30	PASS
6	2437	16.92	30	PASS
11	2462	16.90	30	PASS

4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	July 24, 2003

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.5.3 TEST PROCEDURE


The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3kHz RBW and 30kHz VBW, set sweep time=span/3kHz. The power spectral density was measured and recorded.

The sweep time is allowed to be longer than span/3KHz for a full response of the mixer in the spectrum analyzer.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation

4.5.5 TEST SETUP

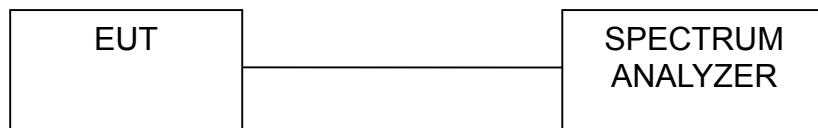

4.5.6 EUT OPERATING CONDITIONS

Same as 4.3.6


4.5.7 TEST RESULTS

EUT	Mini-PCI CARD	MODEL	WLL3050
MODE	CCK	ENVIRONMENTAL CONDITIONS	27deg. C, 57%RH, 991hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TESTED BY: Steven Lei	

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN3 kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-7.91	8	PASS
6	2437	-8.52	8	PASS
11	2462	-8.76	8	PASS




CH1

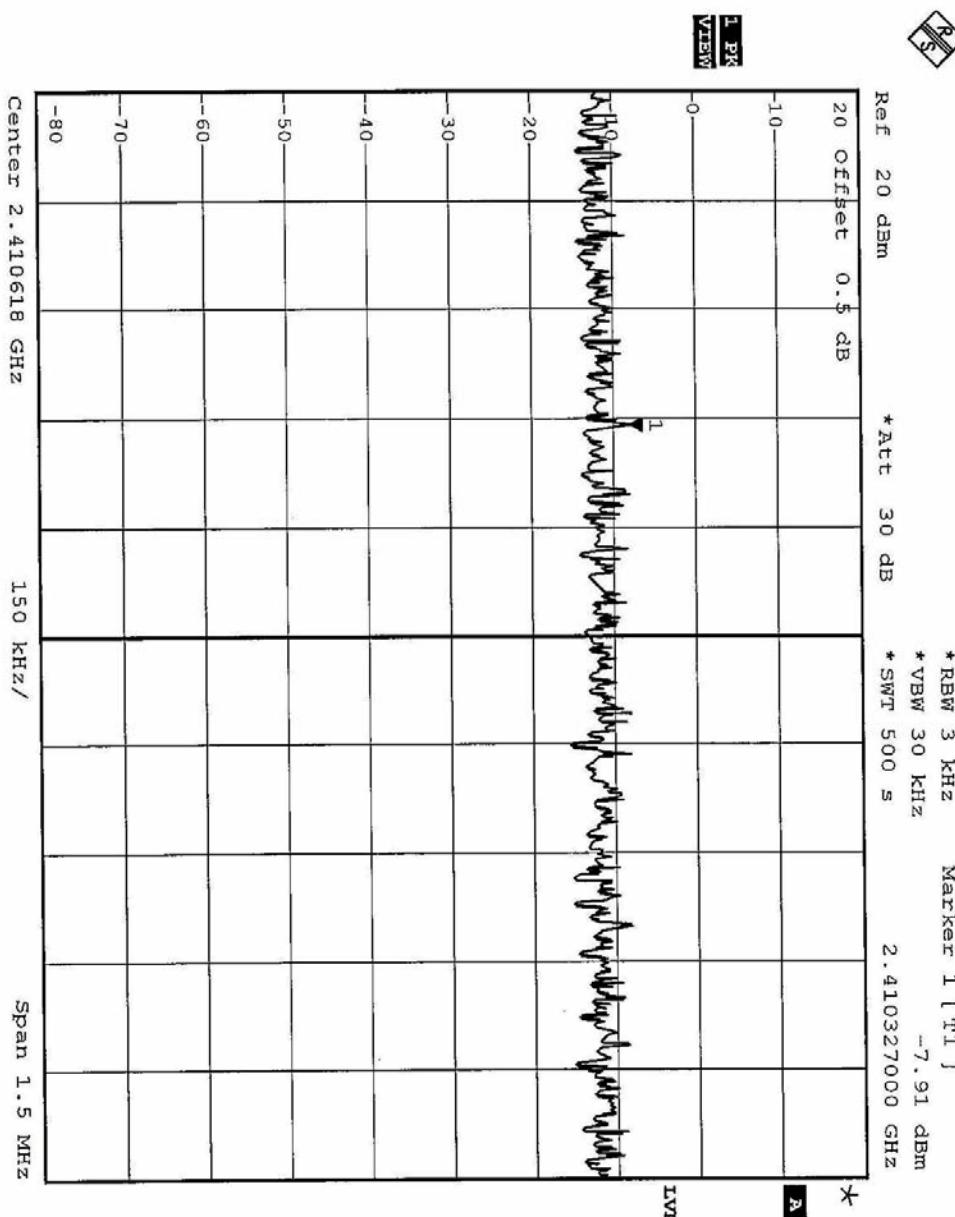

Date: 26.JUN.2003 14:39:11




CH6

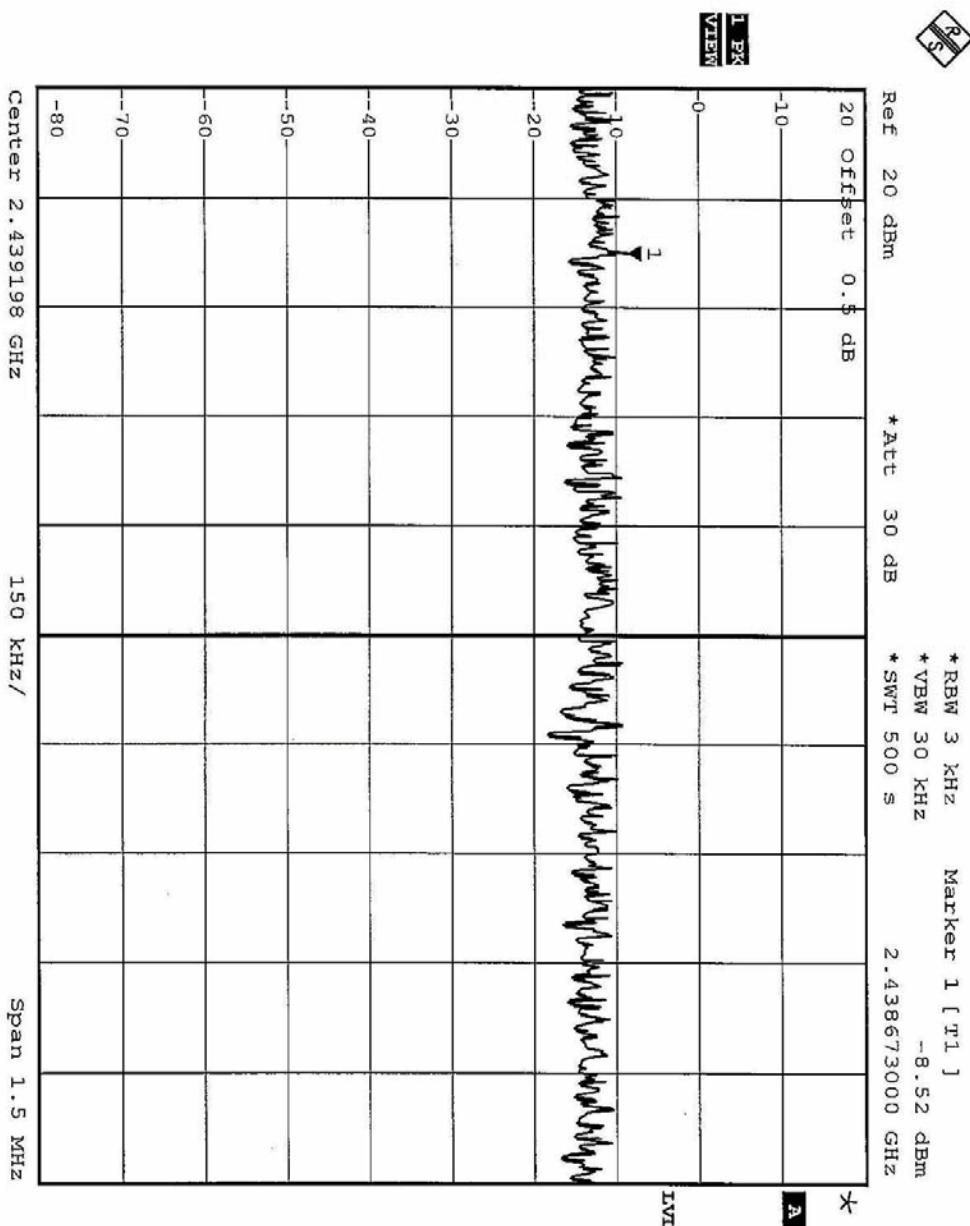



CH11

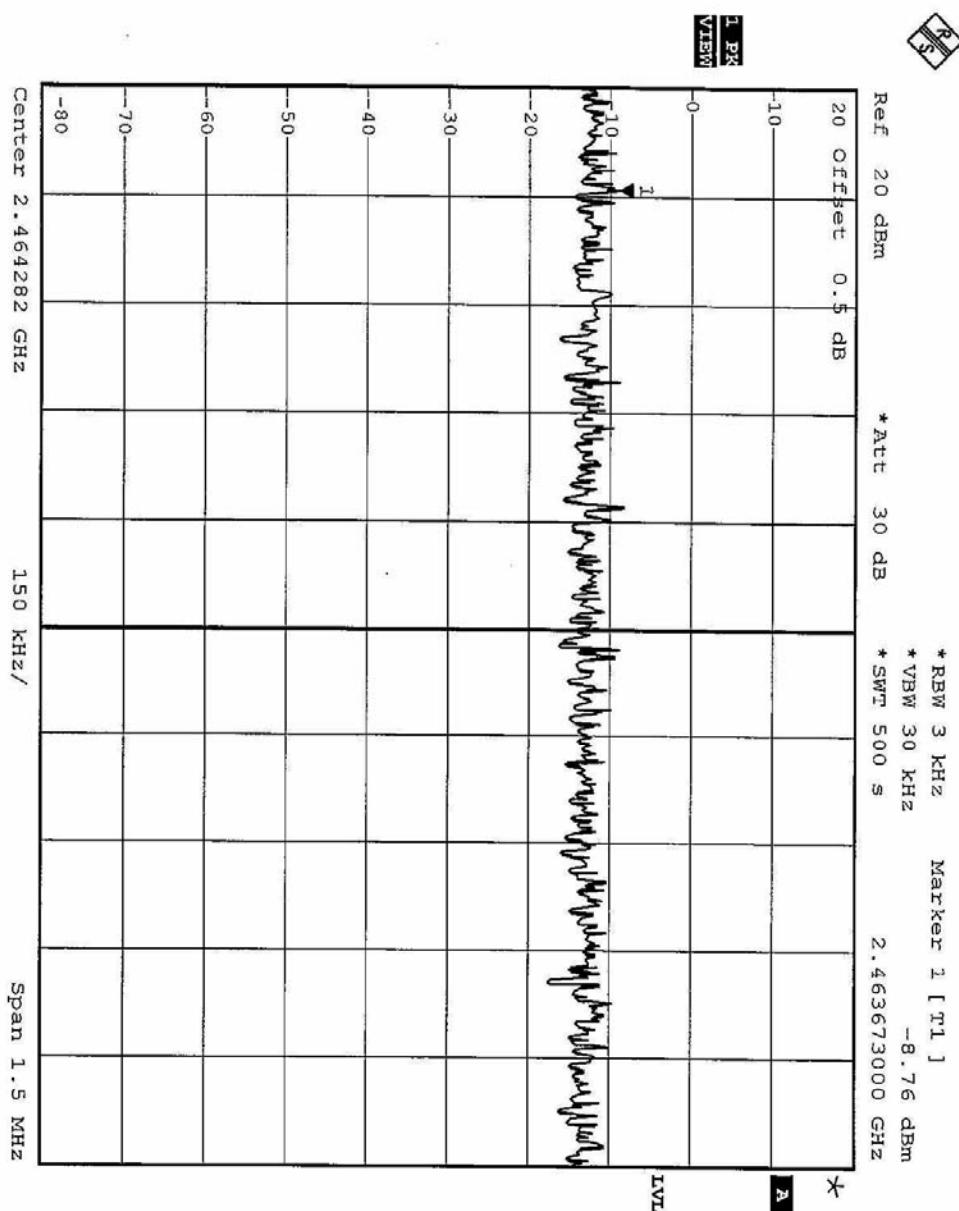

FCC ID: H8NWLL3050




EUT	Mini-PCI CARD	MODEL	WLL3050
MODE	OFDM	ENVIRONMENTAL CONDITIONS	27deg. C, 57%RH, 991hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TESTED BY: Steven Lei	

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-12.06	8	PASS
6	2437	-12.15	8	PASS
11	2462	-11.12	8	PASS




CH1

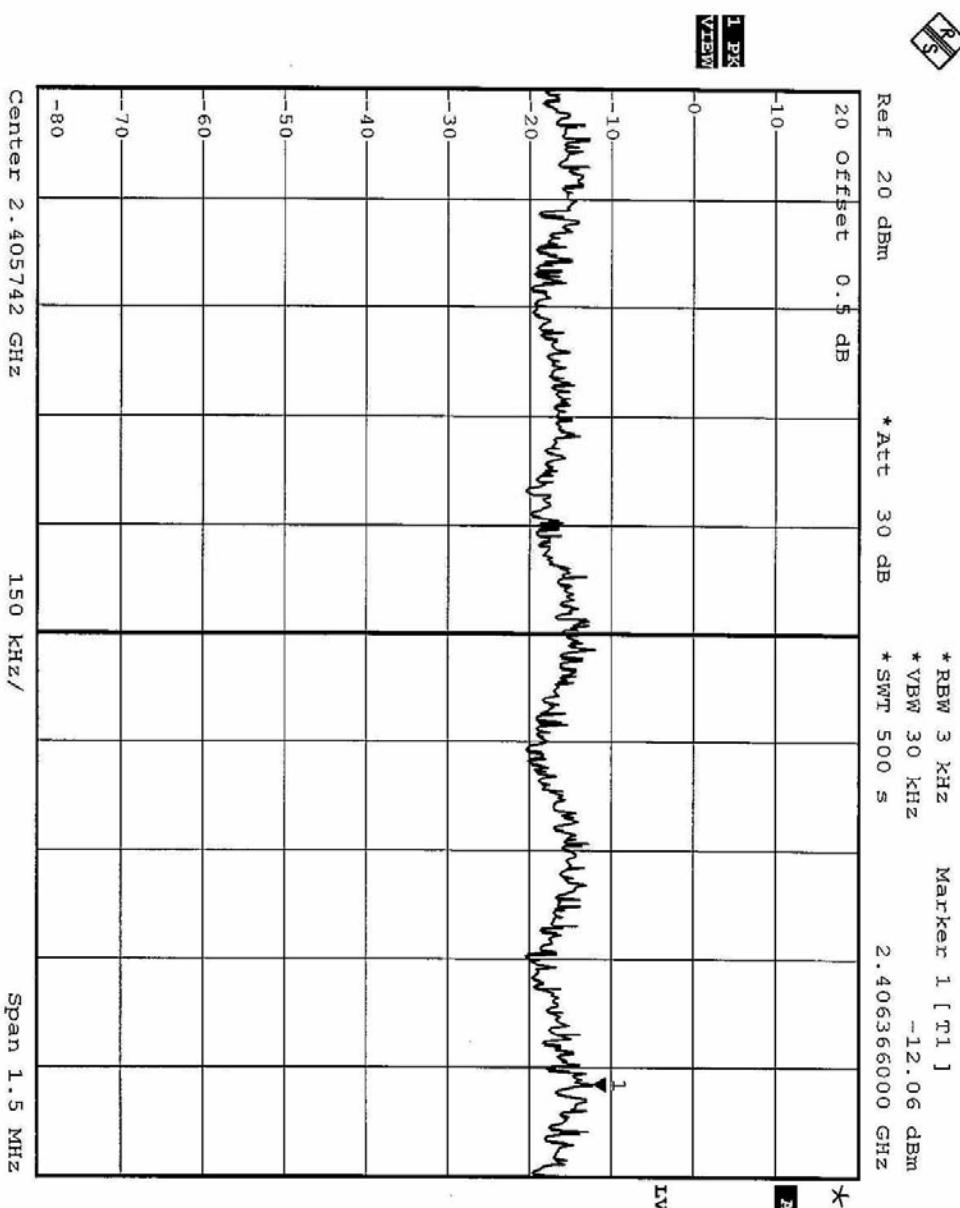

Date: 26.JUN.2003 15:10:06



CH6

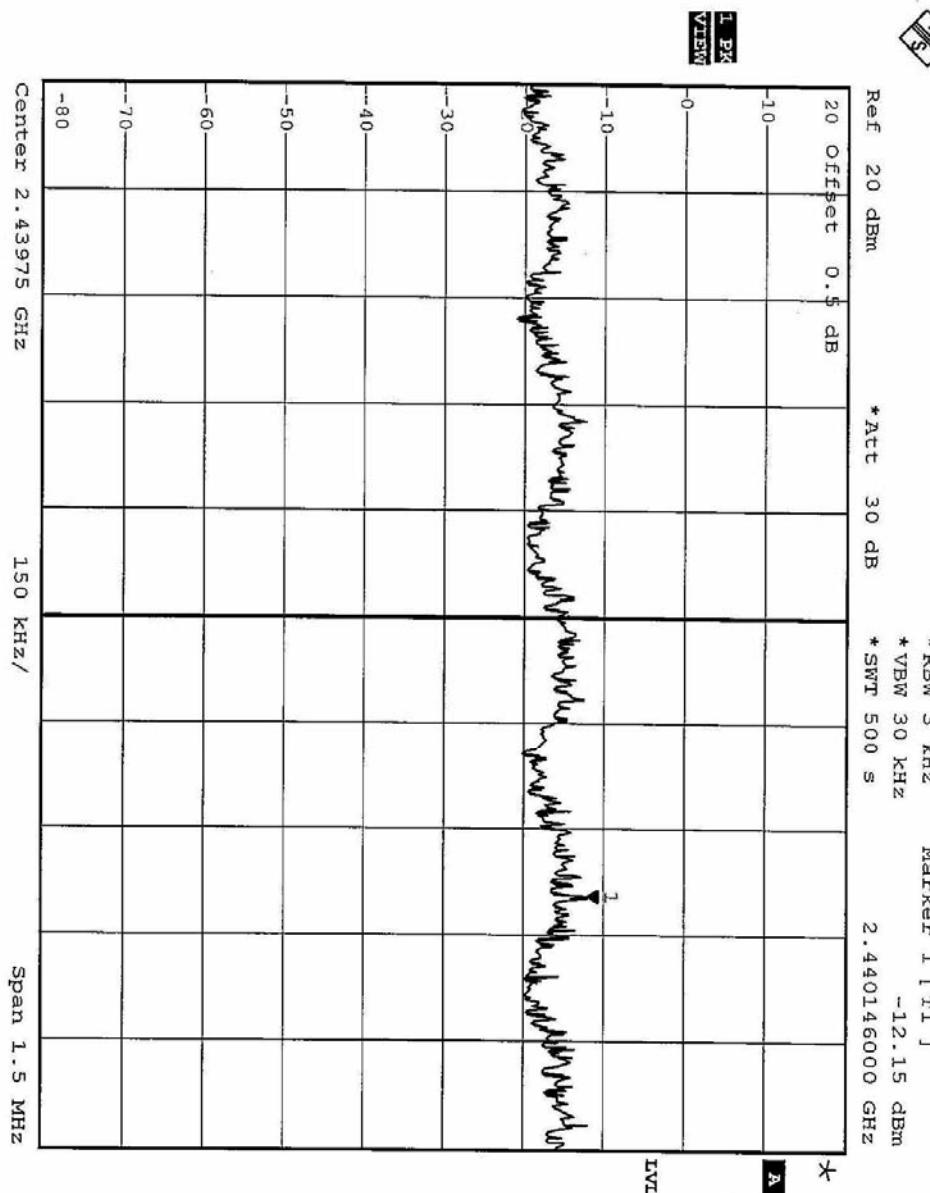


Date: 26.JUN.2003 15:21:51

FCC ID: H8NWLL3050



CH11

Date: 26.JUN.2003 15:09:01

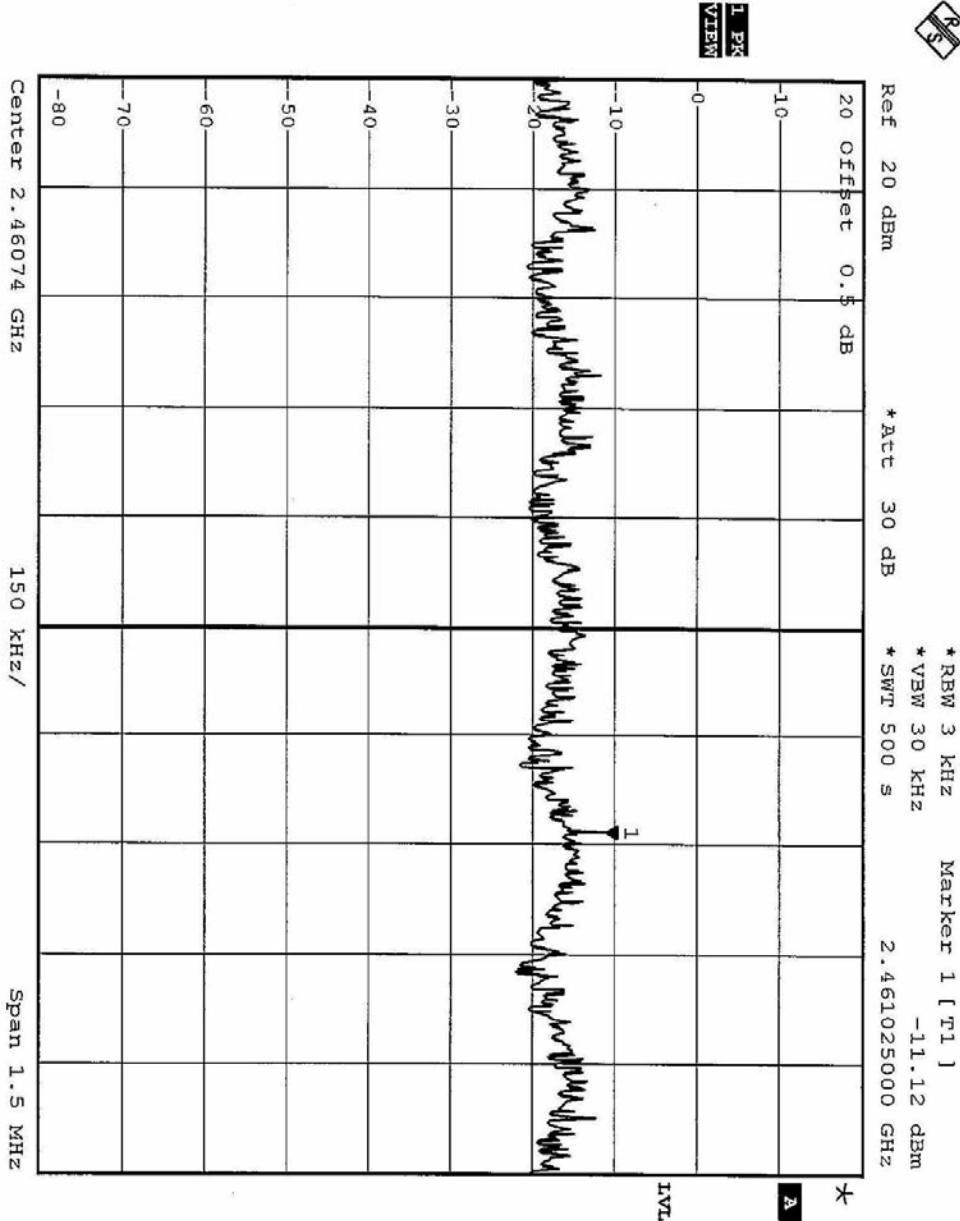

4.6 BAND EDGES MEASUREMENT

4.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below –20dB of the highest emission level of operating band (in 100KHz Resolution Bandwidth).

4.6.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	July 24, 2003

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low loss cable. Set both RBW and VBW of spectrum analyzer to 100kHz for CCK technique and 1MHz and 300Hz for OFDM technique with suitable frequency span including 100kHz bandwidth from band edge. The band edges was measured and recorded.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation

4.6.5 EUT OPERATING CONDITION

Same as Item 4.3.6

4.6.6 TEST RESULTS


The spectrum plots are attached on the following 2 pages. D2 line indicates the highest level, D1 line indicates the 20dB offset below D2. It shows compliance with the requirement in part 15.247(C).


NOTE1: The band edge emission plot of CCK technique on the following page shows 48.85dB delta between carrier maximum power and local maximum emission in restrict band (2.3886GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 (Page 23) is 101.6dB_{UV}/m, so the maximum field strength in restrict band is $101.6 - 48.85 = 52.75$ dB_{UV}/m which is under 54dB_{UV}/m limit.

NOTE2: The band edge emission plot of CCK on the following page shows 51.04dB delta between carrier maximum power and local maximum emission in restrict band (2.4879GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 (Page 25) is 98.4dB_{UV}/m, so the maximum field strength in restrict band is $98.4 - 51.04 = 47.36$ dB_{UV}/m which is under 54 dB_{UV}/m limit.


NOTE3: The band edge emission plot of OFDM technique on the following page shows 45.13dB delta between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 (Page 26) is 96.0dB_{UV}/m, so the maximum field strength in restrict band is $96.0 - 45.13 = 50.87$ dB_{UV}/m which is under 54 dB_{UV}/m limit.

NOTE4: The band edge emission plot of OFDM on the following page shows 44.08dB delta between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 (Page 28) is 95.6dB_{UV}/m, so the maximum field strength in restrict band is $95.6 - 44.08 = 51.52$ dB_{UV}/m which is under 54dB_{UV}/m limit.

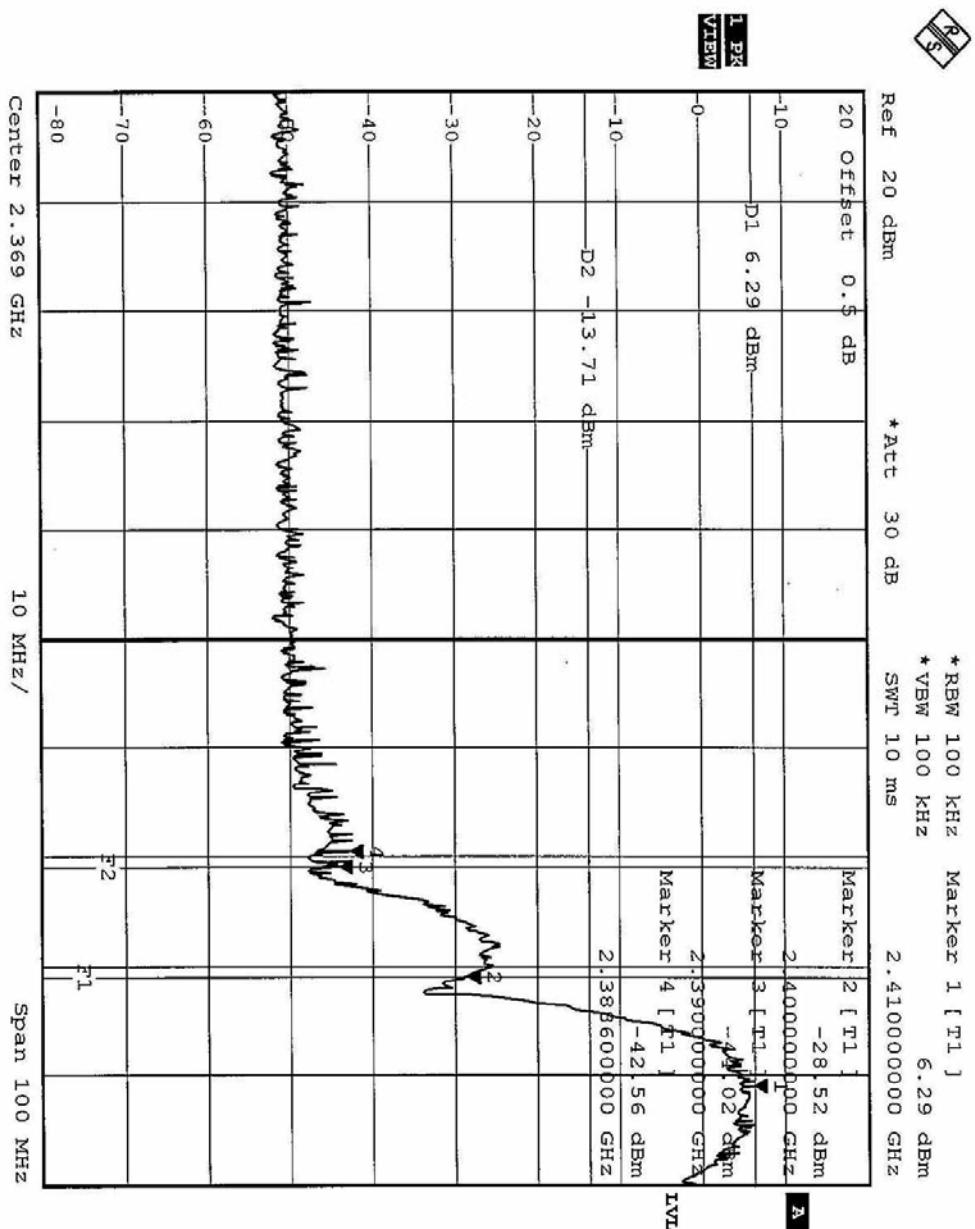

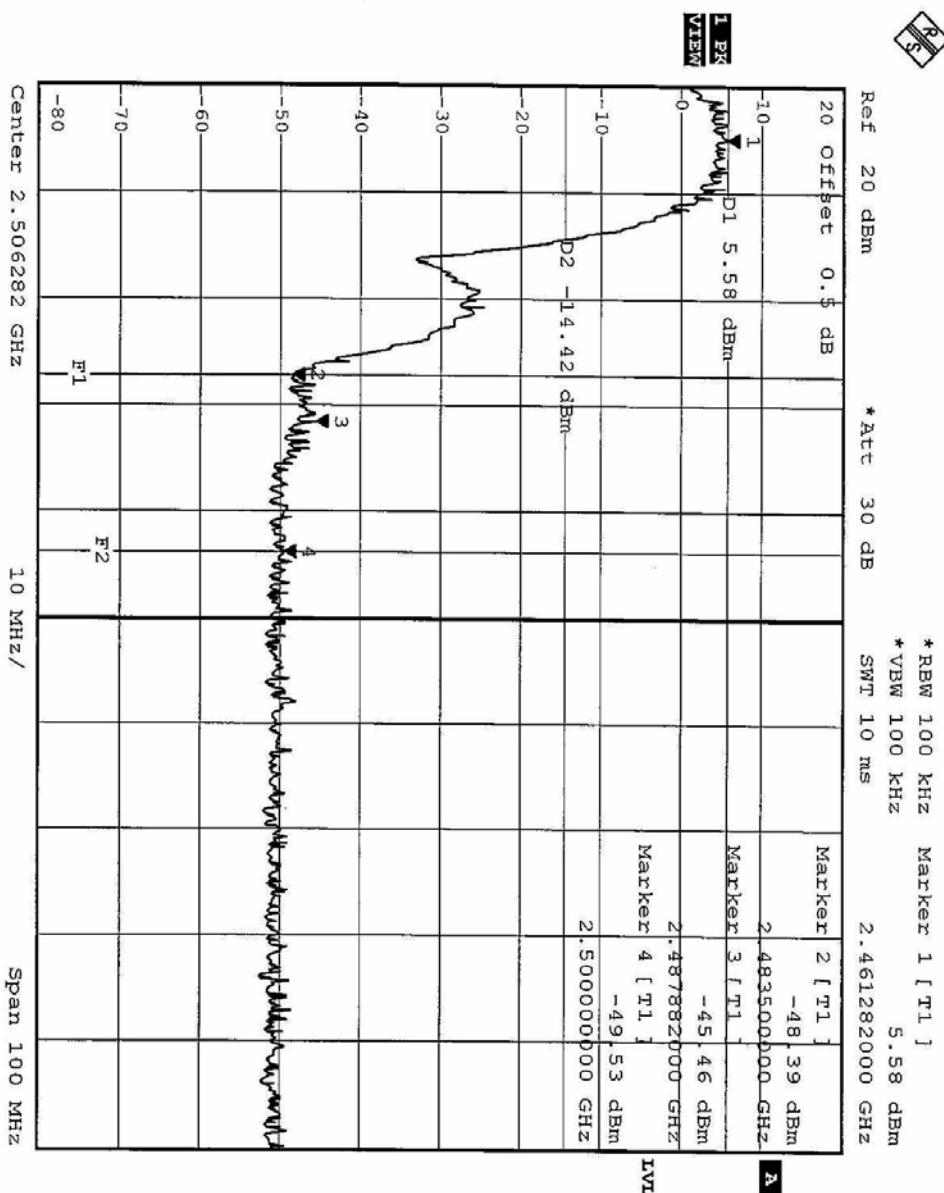


Date: 26.JUN.2003 14:45:56

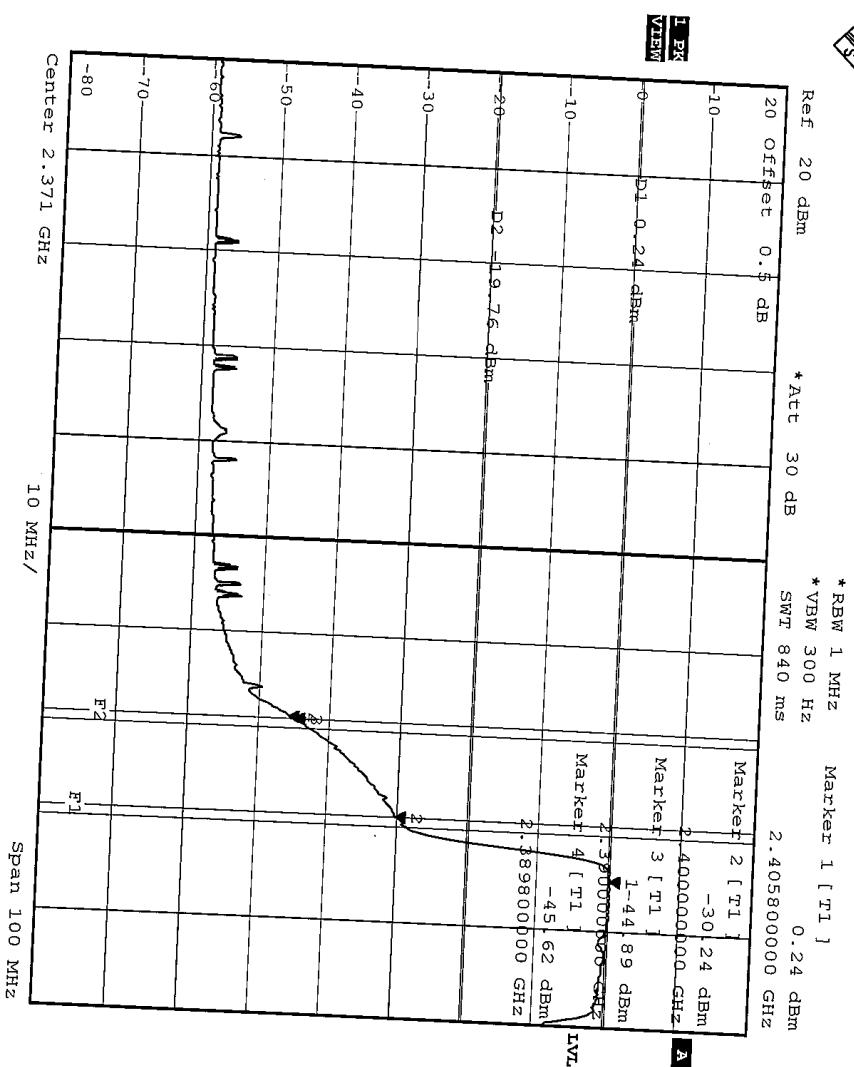

Date: 26.JUN.2003 15:25:09

FCC ID: H8NWLL3050



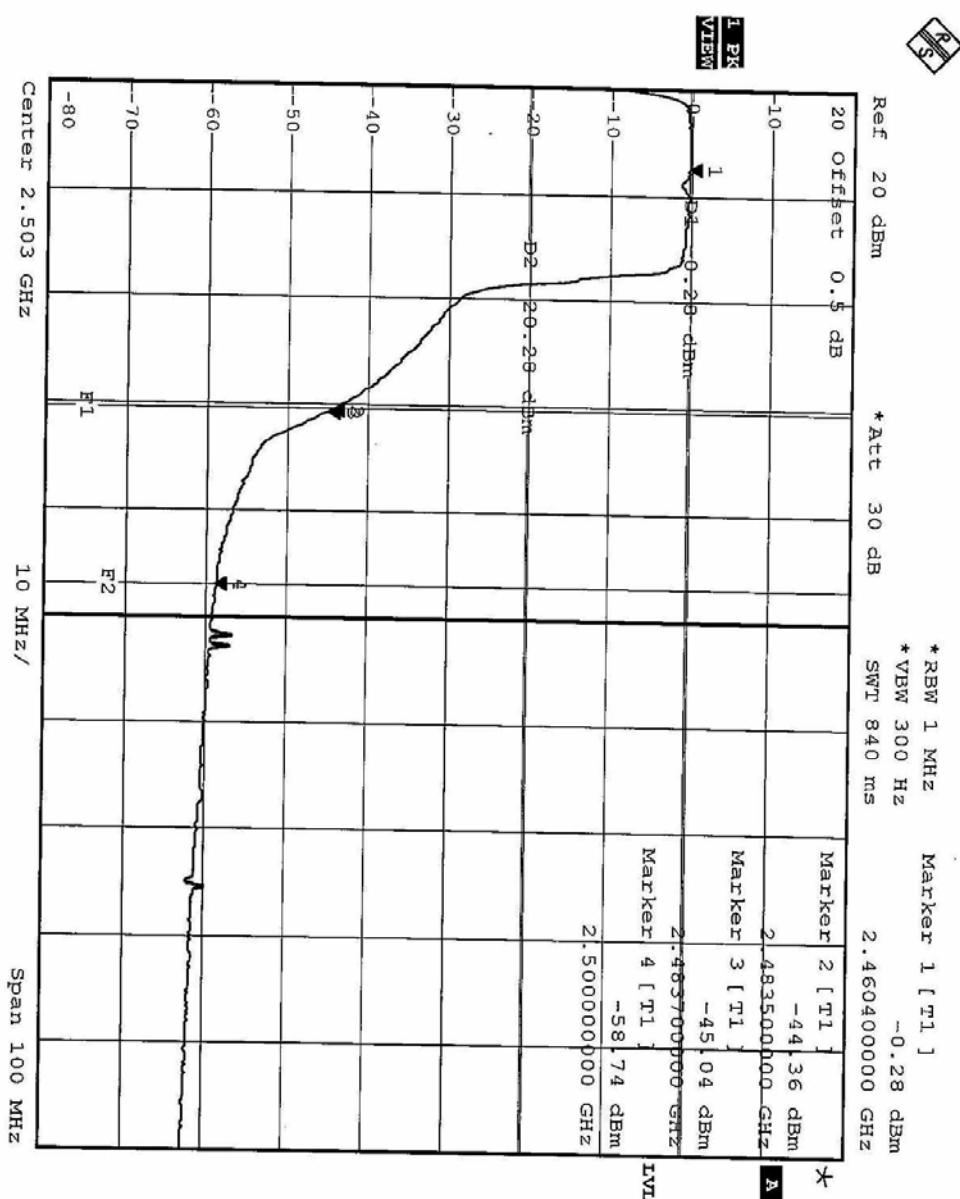

Date: 26.JUN.2003 15:24:04

4.7 ANTENNA REQUIREMENT

4.7.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.7.2 ANTENNA CONNECTED CONSTRUCTION

The antenna types used in this product are Printed Dipole and patch antennas with UFL connector. The maximum Gain of this antenna is 3dBi.

5 PHOTOGRAPHS OF THE TEST CONFIGURATION

CONDUCTED EMISSION TEST





RADIATED EMISSION TEST





6 INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025, Guide 25 or EN 45001:

USA	FCC, NVLAP
Germany	TUV Rheinland
Japan	VCCI
New Zealand	MoC
Norway	NEMKO
R.O.C.	BSMI, DGT, CNLA

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site:

www.adt.com.tw/index.5/phtml.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC Lab:

Tel: 886-2-26052180
Fax: 886-2-26052943

Hsin Chu EMC Lab:

Tel: 886-35-935343
Fax: 886-35-935342

Lin Kou Safety Lab:

Tel: 886-2-26093195
Fax: 886-2-26093184

Lin Kou RF&Telecom Lab

Tel: 886-3-3270910
Fax: 886-3-3270892

Email: service@mail.adt.com.tw

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.