

FCC Test Report (BT-EDR)

Report No.: RF171130C29-8

FCC ID: HD5-CN80L1N

Test Model: CN80L1N

Received Date: Dec. 25, 2017

Test Date: Jan. 25, 2018

Issued Date: Mar. 08, 2018

Applicant: Honeywell International Inc.

Address: 9680 Old Bailes Road, Fort Mill, SC 29707 USA

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Hsin Chu Laboratory

Lab Address: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan R.O.C.

Test Location : E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan R.O.C.

**FCC Registration /
Designation Number:** 723255 / TW2022



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

Table of Contents

Release Control Record	4
1 Certificate of Conformity.....	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Modification Record	6
3 General Information.....	7
3.1 General Description of EUT (BT-EDR).....	7
3.2 Description of Test Modes	9
3.2.1 Test Mode Applicability and Tested Channel Detail.....	10
3.3 Description of Support Units	11
3.3.1 Configuration of System under Test	11
3.4 General Description of Applied Standards	12
4 Test Types and Results	13
4.1 Radiated Emission and Bandedge Measurement.....	13
4.1.1 Limits of Radiated Emission and Bandedge Measurement	13
4.1.2 Test Instruments	14
4.1.3 Test Procedures.....	15
4.1.4 Deviation from Test Standard	15
4.1.5 Test Setup.....	16
4.1.6 EUT Operating Conditions.....	17
4.1.7 Test Results	18
4.2 Number of Hopping Frequency Used.....	25
4.2.1 Limits of Hopping Frequency Used Measurement	25
4.2.2 Test Setup.....	25
4.2.3 Test Instruments	25
4.2.4 Test Procedure	25
4.2.5 Deviation from Test Standard	25
4.2.6 Test Results	26
4.3 Dwell Time on Each Channel	27
4.3.1 Limits of Dwell Time on Each Channel Measurement.....	27
4.3.2 Test Setup.....	27
4.3.3 Test Instruments	27
4.3.4 Test Procedures.....	27
4.3.5 Deviation from Test Standard	27
4.3.6 Test Results	28
4.4 Channel Bandwidth	32
4.4.1 Limits of Channel Bandwidth Measurement.....	32
4.4.2 Test Setup.....	32
4.4.3 Test Instruments	32
4.4.4 Test Procedure	32
4.4.5 Deviation from Test Standard	32
4.4.6 EUT Operating Condition	32
4.4.7 Test Results	33
4.5 Hopping Channel Separation	34
4.5.1 Limits of Hopping Channel Separation Measurement.....	34
4.5.2 Test Setup.....	34
4.5.3 Test Instruments	34
4.5.4 Test Procedure	34
4.5.5 Deviation from Test Standard	34
4.5.6 Test Results	35
4.6 Maximum Output Power.....	36
4.6.1 Limits of Maximum Output Power Measurement	36
4.6.2 Test Setup.....	36

4.6.3	Test Instruments	36
4.6.4	Test Procedure	36
4.6.5	Deviation from Test Standard	36
4.6.6	EUT Operating Condition	36
4.6.7	Test Results	37
4.7	Conducted Out of Band Emission Measurement	38
4.7.1	Limits of Conducted Out of Band Emission Measurement	38
4.7.2	Test Instruments	38
4.7.3	Test Procedure	38
4.7.4	Deviation from Test Standard	38
4.7.5	EUT Operating Condition	38
4.7.6	Test Results	38
5	Pictures of Test Arrangements	41
Appendix – Information on the Testing Laboratories		42

Release Control Record

Issue No.	Description	Date Issued
RF171130C29-8	Original release.	Mar. 08, 2018

1 Certificate of Conformity

Product: Dolphin CN80

Brand: Honeywell

Test Model: CN80L1N

Sample Status: ENGINEERING SAMPLE

Applicant: Honeywell International Inc.

Test Date: Jan. 25, 2018

Standards: 47 CFR FCC Part 15, Subpart C (Section 15.247)

ANSI C63.10: 2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by : Phoenix Huang, **Date:** Mar. 08, 2018

Phoenix Huang / Specialist

Approved by : May Chen, **Date:** Mar. 08, 2018

May Chen / Manager

2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (SECTION 15.247)			
FCC Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	NA	Without AC power port of the EUT.
15.247(a)(1) (iii)	Number of Hopping Frequency Used	PASS	Meet the requirement of limit.
15.247(a)(1) (iii)	Dwell Time on Each Channel	PASS	Meet the requirement of limit.
15.247(a)(1)	1. Hopping Channel Separation 2. Spectrum Bandwidth of a Frequency Hopping Sequence Spread Spectrum System	PASS	Meet the requirement of limit.
15.247(b)	Maximum Peak Output Power	PASS	Meet the requirement of limit.
15.205 & 209 & 15.247(d)	Radiated Emissions & Band Edge Measurement	PASS	Meet the requirement of limit. Minimum passing margin is -12.7dB at 758.49MHz.
15.247(d)	Antenna Port Emission	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	Antenna connector is PIFA not a standard connector.

Note: If The Frequency Hopping System operating in 2400-2483.5MHz band and the output power less than 125mW. The hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of hopping channel whichever is greater.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Radiated Emissions up to 1 GHz	30MHz ~ 1GHz	5.53 dB
Radiated Emissions above 1 GHz	1GHz ~ 6GHz	5.08 dB
	6GHz ~ 18GHz	4.98 dB
	18GHz ~ 40GHz	5.19 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT (BT-EDR)

Product	Dolphin CN80
Brand	Honeywell
Test Model	CN80L1N
Status of EUT	ENGINEERING SAMPLE
HW Version	Rev 1.1
HW P/N	DVT1
SW Version	OS.01.004-HON.01.004
SW P/N	351D
Power Supply Rating	3.85Vdc from battery
Modulation Type	GFSK, $\pi/4$ -DQPSK, 8DPSK
Modulation Technology	FHSS
Transfer Rate	Up to 3Mbps
Operating Frequency	2402MHz ~ 2480MHz
Number of Channel	79
Output Power	11.066mW
Antenna Type	Refer to Note
Antenna Connector	Refer to Note
Accessory Device	Battery x 1 Touch pen x 1
Data Cable Supplied	NA

Note:

1. There are WWAN, WLAN, Bluetooth, Zigbee and NFC technology used for the EUT. The EUT has three radios as following table:

Radio 1	Radio 2	Radio 3
WLAN+WWAN+BT 1	Zigbee+BT 2	NFC

Note: For Bluetooth technology the Radio 1 support BT 5.0 dual mode, the Radio 2 support BT-LE (4.2) single mode only.

2. There're 2 configurations for the EUT listed as below.

Sample A: Short K/B-number

Sample B: Short K/B-Qwety

From the above samples, the worst cases were found in **Sample A**. Therefore only the test data of the mode was recorded in this report.

3. Simultaneously transmission condition.

Condition	Technology			
1	WLAN 2.4GHz	NFC	WWAN	Zigbee
2	WLAN 5GHz	NFC	WWAN	Zigbee
3	Bluetooth	NFC	WWAN	Zigbee

Note: The emission of the simultaneous operation has been evaluated and no non-compliance was found.

4. The EUT needs to be supplied from battery, the information is as below table:

Brand	Model No.	Spec.
Inventus Power, Inc. / Honeywell	CW-BAT	3.85Vdc, 5800mAh, 22.3Wh

5. The antennas provided to the EUT, please refer to the following table:

Radio 1							
WLAN Antenna Spec. / Bluetooth Antenna No. 1 Spec.							
Chain No.	Antenna Gain include trace loss and cable loss (dBi)	Frequency range (GHz)	Antenna type	Connector type	Trace loss and cable loss (dB)		
Chain 0	-0.38	2.4~2.4835	PIFA	POGO pin	1.6		
	-0.39	5.15~5.25			3		
	-0.39	5.25~5.35					
	-0.39	5.47~5.725					
	-0.39	5.725~5.85					
Chain 1	3.36	2.4~2.4835	PIFA	POGO pin	0.6		
	3.46	5.15~5.25			1.2		
	3.46	5.25~5.35					
	3.46	5.47~5.725					
	3.46	5.725~5.85					
WWAN Antenna Spec.							
Chain No.	Antenna Gain include path loss (dBi)	Frequency range	Antenna type	Connector type	Trace loss (dB)		
Chain 0	0.28	700~960MHz	PIFA	POGO pin	0.4		
	1.15	1.70~2.0GHz			0.6		
	1.37	2.1~2.4GHz			0.8		
	1.02	2.4~2.7GHz			0.9		
Chain 1 (RX only)	0.79	700~960MHz	PIFA	POGO pin	0.4		
	-0.35	1.70~2.0GHz			0.6		
	1.05	2.1~2.4GHz			0.8		
	0.37	2.4~2.7GHz			0.9		
Radio 2							
Bluetooth Antenna No. 2 Spec. / Zigbee Antenna Spec.							
Antenna Gain include trace loss (dBi)	Frequency range (GHz)	Antenna type	Connector type	Trace loss (dB)			
-0.03	2.4~2.4835	PIFA	POGO pin	0.8			
Radio 3							
NFC Antenna Spec.							
Frequency range (MHz)	Antenna type		Connector type				
13~14	Loop		NA				

6. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3.2 Description of Test Modes

79 channels are provided for BT-EDR mode:

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461		

3.2.1 Test Mode Applicability and Tested Channel Detail

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE≥1G	RE<1G	PLC	APCM	
-	√	√	-	√	-

Where **RE≥1G**: Radiated Emission above 1GHz **RE<1G**: Radiated Emission below 1GHz

PLC: Power Line Conducted Emission

APCM: Antenna Port Conducted Measurement

Note: 1. No need to concern of Conducted Emission due to the EUT is powered by battery.

2. The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **Z-plane** (below 1GHz) & **X-plane** (above 1GHz).

Radiated Emission Test (Above 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE
0 to 78	0, 39, 78	FHSS	GFSK	DH5
0 to 78	0, 39, 78	FHSS	8DPSK	3DH5

Radiated Emission Test (Below 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE
0 to 78	0	FHSS	GFSK	DH5

Antenna Port Conducted Measurement:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE
0 to 78	0, 39, 78	FHSS	GFSK	DH5
0 to 78	0, 39, 78	FHSS	8DPSK	3DH5

Test Condition:


APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE≥1G	26deg. C, 70%RH	DC 3.85V	Weiwei Lo
RE<1G	24deg. C, 68%RH	DC 3.85V	Weiwei Lo
APCM	25deg. C, 60%RH	DC 3.85V	Jyunchun Lin

3.3 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	SIM Card	NA	NA	NA	NA	Supplied by client
B.	SD Card	NA	NA	NA	NA	Supplied by client

3.3.1 Configuration of System under Test

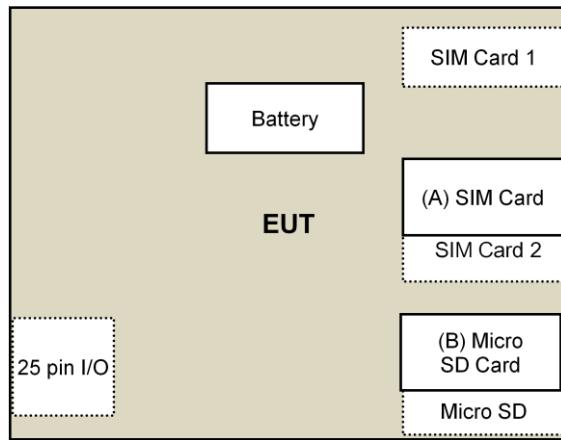

3.4 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (15.247)

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

Note: The EUT has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC).
The test report has been issued separately.

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

Note:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.1.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver Keysight	N9038A	MY54450088	July 08, 2017	July 07, 2018
Loop Antenna ^(*) TESEQ	HLA 6121	45745	May 19, 2017	May 18, 2018
Pre-Amplifier Mini-Circuits	ZFL-1000VH2B	AMP-ZFL-01	Nov. 09, 2017	Nov. 08, 2018
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-406	Nov. 29, 2017	Nov. 28, 2018
RF Cable	8D	966-4-1 966-4-2 966-4-3	Apr. 01, 2017	Mar. 31, 2018
Fixed attenuator Mini-Circuits	UNAT-5+	PAD-3m-4-01	Oct. 03, 2017	Oct. 02, 2018
Horn_Antenna SCHWARZBECK	BBHA 9120D	9120D-783	Dec. 12, 2017	Dec. 11, 2018
Pre-Amplifier EMCI	EMC12630SE	980385	Feb. 02, 2017	Feb. 01, 2018
RF Cable	EMC104-SM-SM-1200 EMC104-SM-SM-2000 EMC104-SM-SM-5000	160923 150318 150321	Feb. 02, 2017 Mar. 29, 2017 Mar. 29, 2017	Feb. 01, 2018 Mar. 28, 2018 Mar. 28, 2018
Pre-Amplifier EMCI	EMC184045SE	980387	Feb. 02, 2017	Feb. 01, 2018
Horn_Antenna SCHWARZBECK	BBHA 9170	BBHA9170608	Dec. 14, 2017	Dec. 13, 2018
RF Cable	SUCOFLEX 102	36432/2 36433/2	Jan. 11, 2018	Jan. 10, 2019
Software	ADT_Radiated_V8.7.08	NA	NA	NA
Antenna Tower & Turn Table Max-Full	MF-7802	MF780208410	NA	NA
Boresight Antenna Fixture	FBA-01	FBA-SIP02	NA	NA
Spectrum Analyzer R&S	FSV40	100964	July 1, 2017	June 30, 2018
Power meter Anritsu	ML2495A	1014008	May 11, 2017	May 10, 2018
Power sensor Anritsu	MA2411B	0917122	May 11, 2017	May 10, 2018

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. *The calibration interval of the above test instruments is 24 months and the calibrations are traceable to NML/ROC and NIST/USA.
3. The test was performed in 966 Chamber No. 3.
4. Loop antenna was used for all emissions below 30 MHz.
5. The CANADA Site Registration No. is 20331-1
6. Tested Date: Jan. 25, 2018

4.1.3 Test Procedures

For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Both X and Y axes of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Setup


For Radiated emission below 30MHz

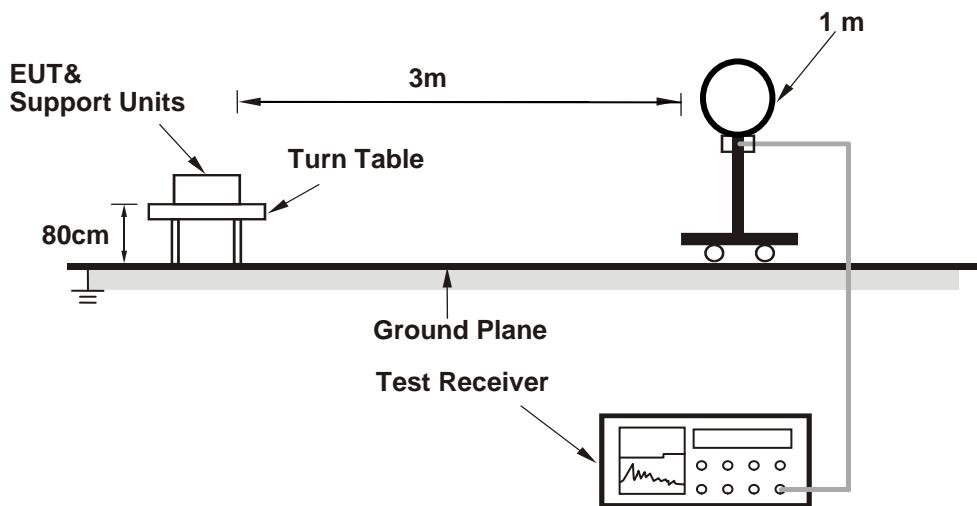

For Radiated emission 30MHz to 1GHz

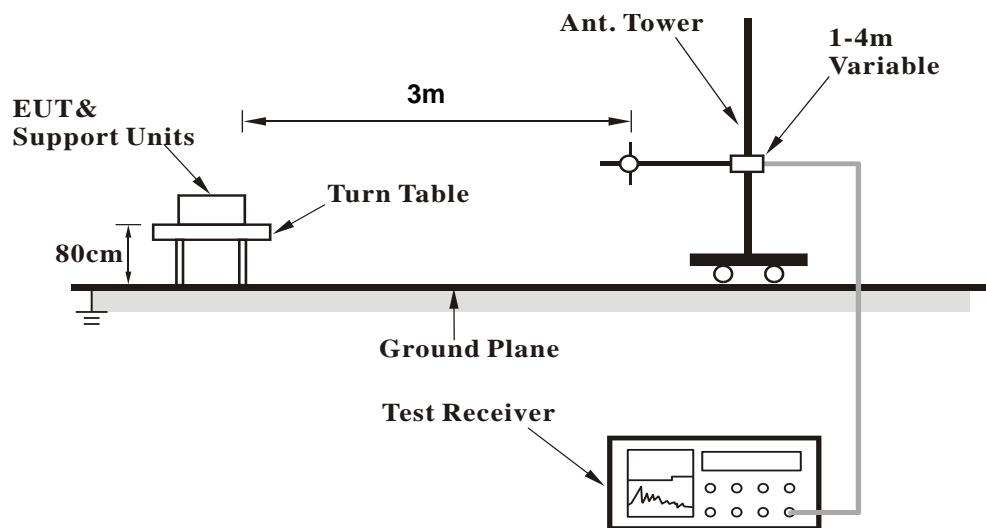

For Radiated emission above 1GHz

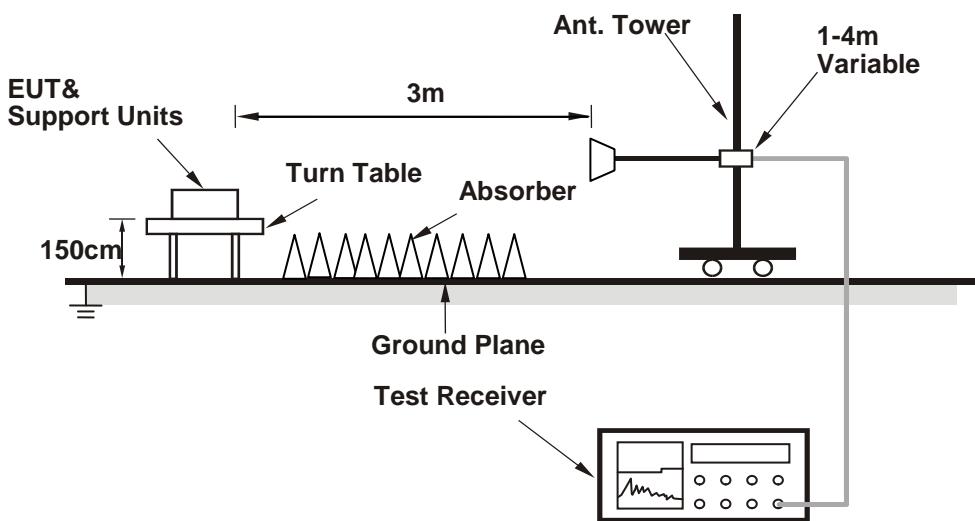

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Conditions

- Connected the EUT with the Laptop.
- Controlling software (QRCT.exe V3.0.268.0) has been activated to set the EUT on specific status.

4.1.7 Test Results

Above 1GHz Data:

BT_GFSK

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 25GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	43.8 PK	74.0	-30.2	1.98 H	135	45.0	-1.2
2	2390.00	32.7 AV	54.0	-21.3	1.98 H	135	33.9	-1.2
3	*2402.00	98.5 PK			1.98 H	135	99.8	-1.3
4	*2402.00	68.4 AV			1.98 H	135	69.7	-1.3
5	4804.00	39.7 PK	74.0	-34.3	2.94 H	199	36.6	3.1
6	4804.00	9.6 AV	54.0	-44.4	2.94 H	199	6.5	3.1
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	43.5 PK	74.0	-30.5	1.53 V	169	44.7	-1.2
2	2390.00	32.8 AV	54.0	-21.2	1.53 V	169	34.0	-1.2
3	*2402.00	99.9 PK			1.53 V	169	101.2	-1.3
4	*2402.00	69.8 AV			1.53 V	169	71.1	-1.3
5	4804.00	41.6 PK	74.0	-32.4	1.60 V	230	38.5	3.1
6	4804.00	11.5 AV	54.0	-42.5	1.60 V	230	8.4	3.1

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: $20\log(3.125 / 100) = -30.1 \text{ dB}$
7. The average value of fundamental and harmonic frequency is: Average = Peak value + 20 log(Duty cycle)

CHANNEL	TX Channel 39	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	97.9 PK			1.97 H	130	99.5	-1.6
2	*2441.00	67.8 AV			1.97 H	130	69.4	-1.6
3	4882.00	39.3 PK	74.0	-34.7	2.98 H	187	36.0	3.3
4	4882.00	9.2 AV	54.0	-44.8	2.98 H	187	5.9	3.3
5	7323.00	41.2 PK	74.0	-32.8	1.78 H	216	32.3	8.9
6	7323.00	11.1 AV	54.0	-42.9	1.78 H	216	2.2	8.9
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	99.5 PK			1.51 V	197	101.1	-1.6
2	*2441.00	69.4 AV			1.51 V	197	71.0	-1.6
3	4882.00	41.0 PK	74.0	-33.0	1.72 V	247	37.7	3.3
4	4882.00	10.9 AV	54.0	-43.1	1.72 V	247	7.6	3.3
5	7323.00	41.1 PK	74.0	-32.9	1.42 V	149	32.2	8.9
6	7323.00	11.0 AV	54.0	-43.0	1.42 V	149	2.1	8.9

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: $20\log(3.125 / 100) = -30.1 \text{ dB}$
7. The average value of fundamental and harmonic frequency is: Average = Peak value + 20 log(Duty cycle)

CHANNEL	TX Channel 78	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	98.3 PK			2.01 H	133	99.8	-1.5
2	*2480.00	68.2 AV			2.01 H	133	69.7	-1.5
3	2483.50	42.8 PK	74.0	-31.2	2.01 H	133	44.3	-1.5
4	2483.50	12.7 AV	54.0	-41.3	2.01 H	133	14.2	-1.5
5	4960.00	39.6 PK	74.0	-34.4	3.00 H	201	36.3	3.3
6	4960.00	9.5 AV	54.0	-44.5	3.00 H	201	6.2	3.3
7	7440.00	41.2 PK	74.0	-32.8	1.77 H	208	32.1	9.1
8	7440.00	11.1 AV	54.0	-42.9	1.77 H	208	2.0	9.1

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	99.9 PK			1.52 V	192	101.4	-1.5
2	*2480.00	69.8 AV			1.52 V	192	71.3	-1.5
3	2483.50	42.9 PK	74.0	-31.1	1.52 V	192	44.4	-1.5
4	2483.50	12.8 AV	54.0	-41.2	1.52 V	192	14.3	-1.5
5	4960.00	41.3 PK	74.0	-32.7	1.66 V	241	38.0	3.3
6	4960.00	11.2 AV	54.0	-42.8	1.66 V	241	7.9	3.3
7	7440.00	41.4 PK	74.0	-32.6	1.38 V	158	32.3	9.1
8	7440.00	11.3 AV	54.0	-42.7	1.38 V	158	2.2	9.1

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: $20\log(3.125 / 100) = -30.1$ dB
7. The average value of fundamental and harmonic frequency is: Average = Peak value + 20 log(Duty cycle)

BT_8DPSK

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	43.0 PK	74.0	-31.0	1.98 H	147	44.2	-1.2
2	2390.00	31.7 AV	54.0	-22.3	1.98 H	147	32.9	-1.2
3	*2402.00	95.6 PK			1.98 H	147	96.9	-1.3
4	*2402.00	65.5 AV			1.98 H	147	66.8	-1.3
5	4804.00	39.4 PK	74.0	-34.6	2.88 H	212	36.3	3.1
6	4804.00	9.3 AV	54.0	-44.7	2.88 H	212	6.2	3.1

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	44.0 PK	74.0	-30.0	1.55 V	179	45.2	-1.2
2	2390.00	32.5 AV	54.0	-21.5	1.55 V	179	33.7	-1.2
3	*2402.00	96.1 PK			1.55 V	179	97.4	-1.3
4	*2402.00	66.0 AV			1.55 V	179	67.3	-1.3
5	4804.00	41.4 PK	74.0	-32.6	1.60 V	219	38.3	3.1
6	4804.00	11.3 AV	54.0	-42.7	1.60 V	219	8.2	3.1

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: $20\log(3.125 / 100) = -30.1 \text{ dB}$
7. The average value of fundamental and harmonic frequency is: Average = Peak value + 20 log(Duty cycle)

CHANNEL	TX Channel 39	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	94.0 PK			1.99 H	127	95.6	-1.6
2	*2441.00	63.9 AV			1.99 H	127	65.5	-1.6
3	4882.00	39.7 PK	74.0	-34.3	2.93 H	197	36.4	3.3
4	4882.00	9.6 AV	54.0	-44.4	2.93 H	197	6.3	3.3
5	7323.00	42.3 PK	74.0	-31.7	1.74 H	214	33.4	8.9
6	7323.00	12.2 AV	54.0	-41.8	1.74 H	214	3.3	8.9
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	95.6 PK			1.46 V	194	97.2	-1.6
2	*2441.00	65.5 AV			1.46 V	194	67.1	-1.6
3	4882.00	40.9 PK	74.0	-33.1	1.59 V	232	37.6	3.3
4	4882.00	10.8 AV	54.0	-43.2	1.59 V	232	7.5	3.3
5	7323.00	41.5 PK	74.0	-32.5	1.32 V	144	32.6	8.9
6	7323.00	11.4 AV	54.0	-42.6	1.32 V	144	2.5	8.9

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: $20\log(3.125 / 100) = -30.1 \text{ dB}$
7. The average value of fundamental and harmonic frequency is: Average = Peak value + 20 log(Duty cycle)

CHANNEL	TX Channel 78	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	93.8 PK			1.99 H	147	95.3	-1.5
2	*2480.00	63.7 AV			1.99 H	147	65.2	-1.5
3	2483.50	41.0 PK	74.0	-33.0	1.99 H	147	42.5	-1.5
4	2483.50	10.9 AV	54.0	-43.1	1.99 H	147	12.4	-1.5
5	4960.00	39.4 PK	74.0	-34.6	2.90 H	212	36.1	3.3
6	4960.00	9.3 AV	54.0	-44.7	2.90 H	212	6.0	3.3
7	7440.00	42.5 PK	74.0	-31.5	1.73 H	216	33.4	9.1
8	7440.00	12.4 AV	54.0	-41.6	1.73 H	216	3.3	9.1

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	95.6 PK			1.52 V	180	97.1	-1.5
2	*2480.00	65.5 AV			1.52 V	180	67.0	-1.5
3	2483.50	42.0 PK	74.0	-32.0	1.52 V	180	43.5	-1.5
4	2483.50	11.9 AV	54.0	-42.1	1.52 V	180	13.4	-1.5
5	4960.00	40.7 PK	74.0	-33.3	1.62 V	247	37.4	3.3
6	4960.00	10.6 AV	54.0	-43.4	1.62 V	247	7.3	3.3
7	7440.00	41.6 PK	74.0	-32.4	1.34 V	157	32.5	9.1
8	7440.00	11.5 AV	54.0	-42.5	1.34 V	157	2.4	9.1

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: $20\log(3.125 / 100) = -30.1$ dB
7. The average value of fundamental and harmonic frequency is: Average = Peak value + 20 log(Duty cycle)

Below 1GHz Worst-Case Data

BT_GFSK

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	42.59	23.5 QP	40.0	-16.5	2.00 H	360	31.6	-8.1
2	152.24	23.6 QP	43.5	-19.9	1.50 H	235	31.5	-7.9
3	282.56	22.7 QP	46.0	-23.3	1.00 H	360	30.7	-8.0
4	392.95	24.7 QP	46.0	-21.3	1.00 H	360	29.9	-5.2
5	491.60	27.4 QP	46.0	-18.6	1.00 H	143	30.4	-3.0
6	815.29	32.6 QP	46.0	-13.4	1.00 H	152	30.0	2.6
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	38.12	25.3 QP	40.0	-14.7	2.00 V	158	33.8	-8.5
2	161.53	23.9 QP	43.5	-19.6	2.00 V	8	32.1	-8.2
3	289.55	23.7 QP	46.0	-22.3	1.00 V	125	31.4	-7.7
4	427.46	27.4 QP	46.0	-18.6	2.00 V	179	31.4	-4.0
5	615.71	30.6 QP	46.0	-15.4	1.00 V	118	30.9	-0.3
6	758.49	33.3 QP	46.0	-12.7	1.50 V	128	31.2	2.1

REMARKS:


1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

4.2 Number of Hopping Frequency Used

4.2.1 Limits of Hopping Frequency Used Measurement

At least 15 channels frequencies, and should be equally spaced.

4.2.2 Test Setup

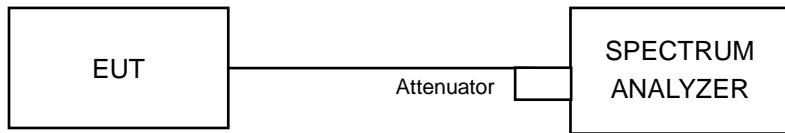

4.2.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.2.4 Test Procedure

- a. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- c. Set the SA on MaxHold Mode, and then keep the EUT in hopping mode. Record all the signals from each channel until each one has been recorded.
- d. Set the SA on View mode and then plot the result on SA screen.
- e. Repeat above procedures until all frequencies measured were complete.


4.2.5 Deviation from Test Standard

No deviation.


4.2.6 Test Results

There are 79 hopping frequencies in the hopping mode. Please refer to next page for the test result. On the plots, it shows that the hopping frequencies are equally spaced.

GFSK

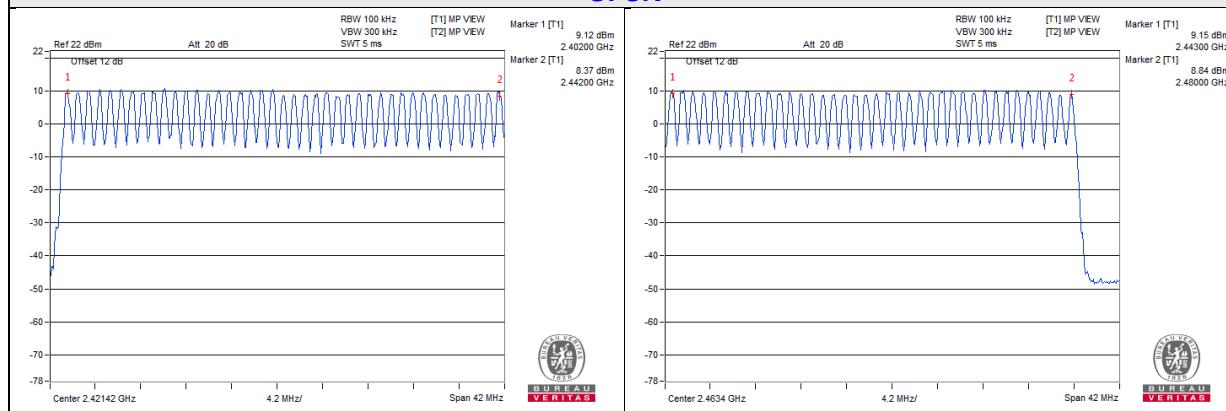

8DPSK

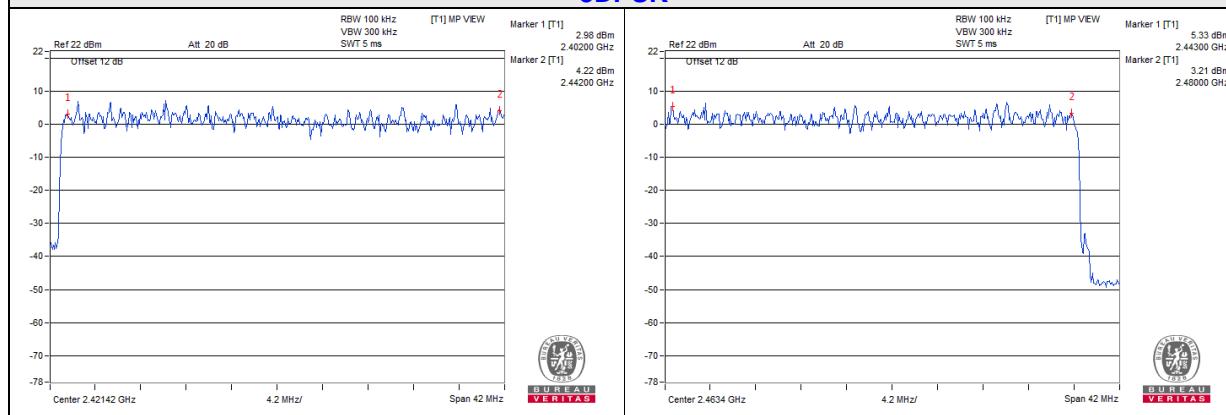


4.3 Dwell Time on Each Channel

4.3.1 Limits of Dwell Time on Each Channel Measurement

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

4.3.2 Test Setup

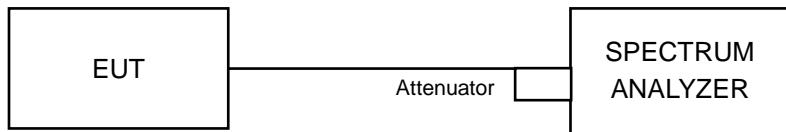

4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.3.4 Test Procedures

- a. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- c. Adjust the center frequency of SA on any frequency to be measured and set SA to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
- d. Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
- e. Repeat above procedures until all different time-slot modes have been completed.

4.3.5 Deviation from Test Standard

No deviation.

4.3.6 Test Results

GFSK

Mode	Number of transmission in a 31.6 (79Hopping*0.4)	Length of transmission time (msec)	Result (msec)	Limit (msec)
DH1	51 (times / 5 sec) * 6.32 = 322.32 times	0.426	137.31	400
DH3	27 (times / 5 sec) * 6.32 = 170.64 times	1.74	296.91	400
DH5	18 (times / 5 sec) * 6.32 = 113.76 times	2.96	336.73	400

Note: Test plots of the transmitting time slot are shown on next page.





8DPSK



Mode	Number of transmission in a 31.6 (79Hopping*0.4)	Length of transmission time (msec)	Result (msec)	Limit (msec)
3DH1	51 (times / 5 sec) * 6.32 = 322.32 times	0.462	148.91	400
3DH3	27 (times / 5 sec) * 6.32 = 170.64 times	1.73	295.21	400
3DH5	17 (times / 5 sec) * 6.32 = 107.44 times	3.056	328.31	400

Note: Test plots of the transmitting time slot are shown on next page.



3DH1

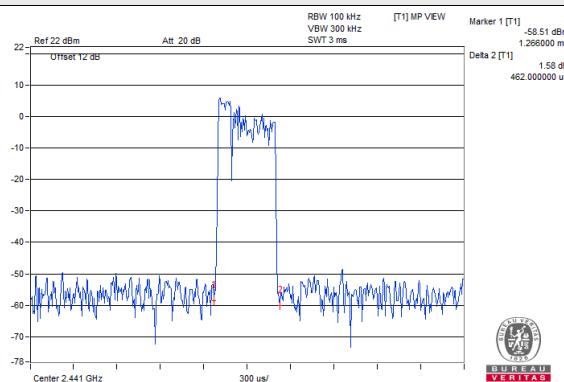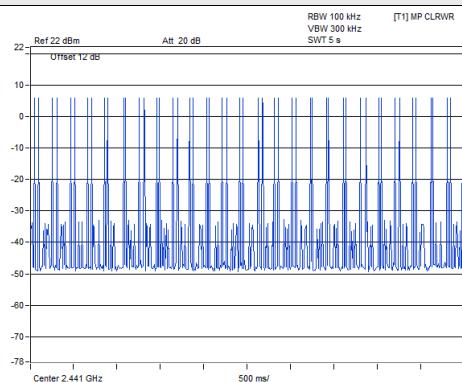

3DH3

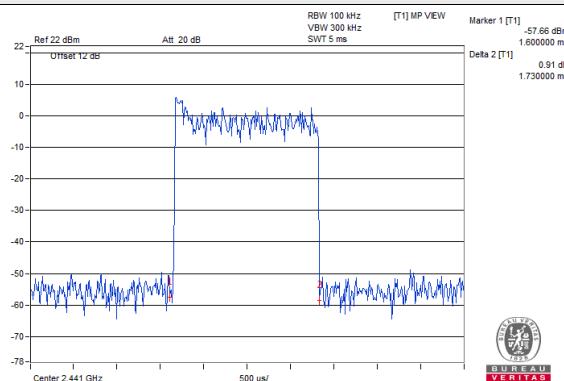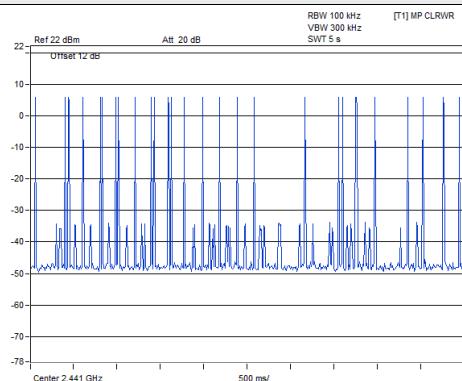

3DH5

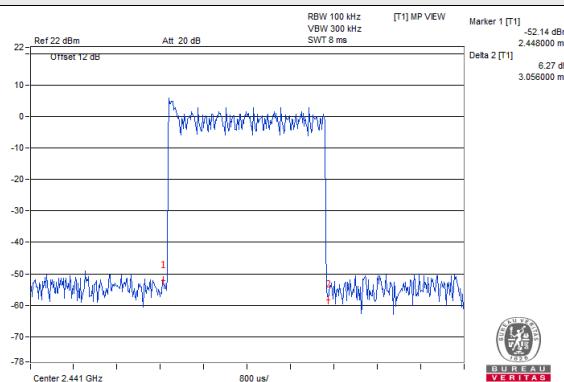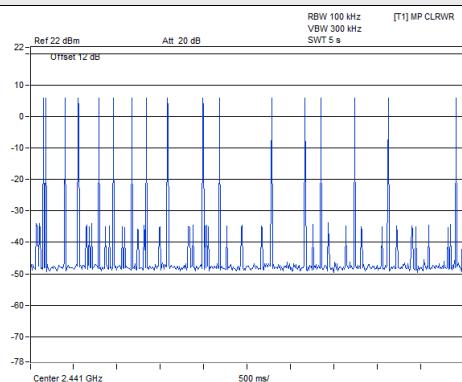

4.4 Channel Bandwidth

4.4.1 Limits of Channel Bandwidth Measurement

For frequency hopping system operating in the 2400-2483.5MHz, If the 20dB bandwidth of hopping channel is greater than 25kHz, two-thirds 20dB bandwidth of hopping channel shall be a minimum limit for the hopping channel separation.

4.4.2 Test Setup



4.4.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.4.4 Test Procedure

- a. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- c. Measure the frequency difference of two frequencies that were attenuated 20dB from the reference level. Record the frequency difference as the emission bandwidth.
- d. Detector = peak.
- e. Repeat above procedures until all frequencies measured were complete.

4.4.5 Deviation from Test Standard


No deviation.

4.4.6 EUT Operating Condition

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.

4.4.7 Test Results

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	
		GFSK	8DPSK
0	2402	0.94	1.30
39	2441	0.94	1.30
78	2480	0.95	1.30

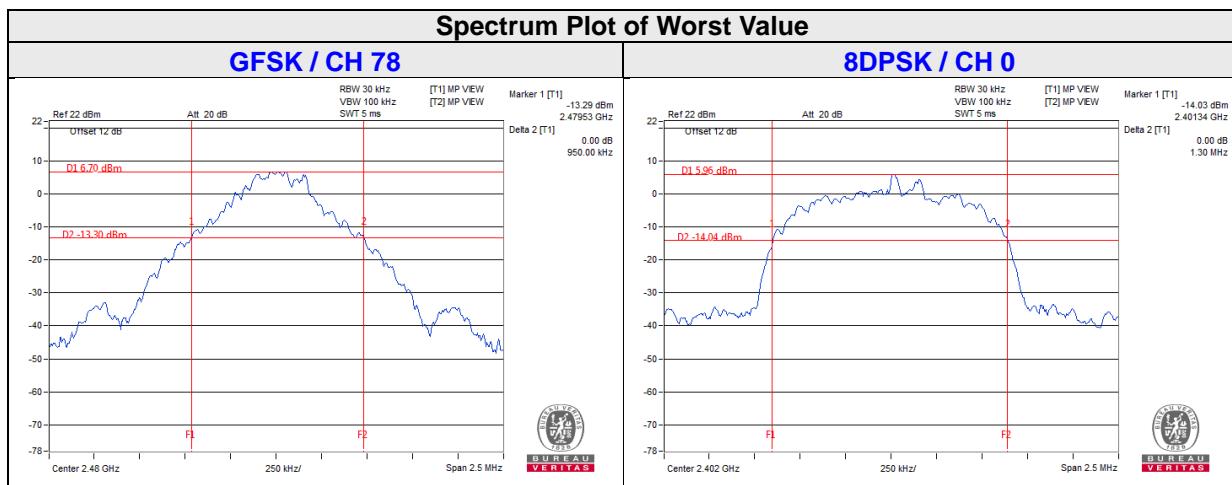


4.5 Hopping Channel Separation

4.5.1 Limits of Hopping Channel Separation Measurement

At least 25kHz or two-third of 20dB hopping channel bandwidth (whichever is greater).

4.5.2 Test Setup



4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.5.4 Test Procedure

Measurement Procedure REF

- a. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range.
- c. By using the MaxHold function record the separation of two adjacent channels.
- d. Measure the frequency difference of these two adjacent channels by SA MARK function. And then plot the result on SA screen.
- e. Repeat above procedures until all frequencies measured were complete.


4.5.5 Deviation from Test Standard

No deviation.

4.5.6 Test Results

Channel	Frequency (MHz)	Adjacent Channel Separation (MHz)		20dB Bandwidth (MHz)		Minimum Limit (MHz)		Pass / Fail
		GFSK	8DPSK	GFSK	8DPSK	GFSK	8DPSK	
0	2402	1.00	1.00	0.94	1.30	0.63	0.87	Pass
39	2441	1.00	1.00	0.94	1.30	0.63	0.87	Pass
78	2480	1.00	1.00	0.95	1.30	0.64	0.87	Pass

Note: The minimum limit is two-third 20dB bandwidth.

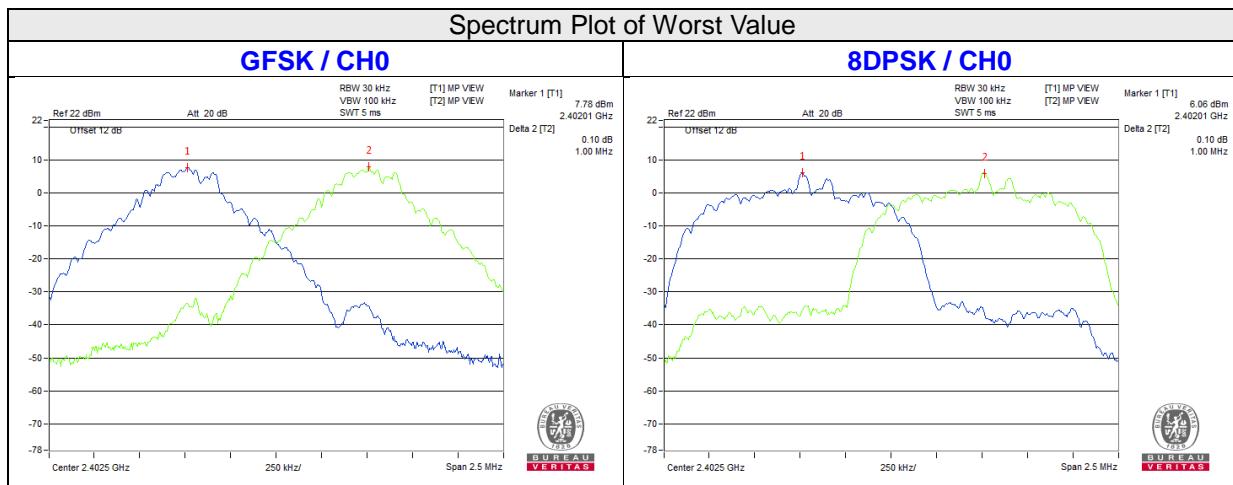


4.6 Maximum Output Power

4.6.1 Limits of Maximum Output Power Measurement

The Maximum Output Power Measurement is 125mW.

4.6.2 Test Setup

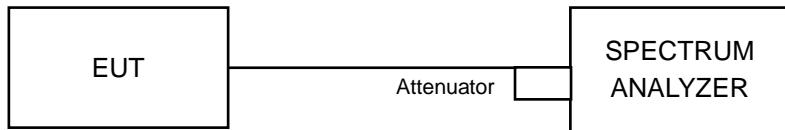

4.6.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.6.4 Test Procedure

- a. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- c. The center frequency of the spectrum analyzer is set to the fundamental frequency and using 3MHz RBW and 10 MHz VBW.
- d. Detector = peak.
- e. Measure the captured power within the band and recording the plot.
- f. Repeat above procedures until all frequencies required were complete.

4.6.5 Deviation from Test Standard

No deviation.

4.6.6 EUT Operating Condition

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.

4.6.7 Test Results

FOR PEAK POWER


Channel	Frequency (MHz)	Output Power (mW)		Output Power (dBm)		Power Limit (mW)	Pass / Fail
		GFSK	8DPSK	GFSK	8DPSK		
0	2402	11.066	8.166	10.44	9.12	125	Pass
39	2441	8.75	6.095	9.42	7.85	125	Pass
78	2480	8.414	6.295	9.25	7.99	125	Pass

FOR AVERAGE POWER - reference only


Channel	Frequency (MHz)	Output Power (mW)		Output Power (dBm)	
		GFSK	8DPSK	GFSK	8DPSK
0	2402	9.572	4.276	9.81	6.31
39	2441	7.568	3.357	8.79	5.26
78	2480	7.482	3.42	8.74	5.34

Spectrum Plot of Worst Value

GFSK / CH0

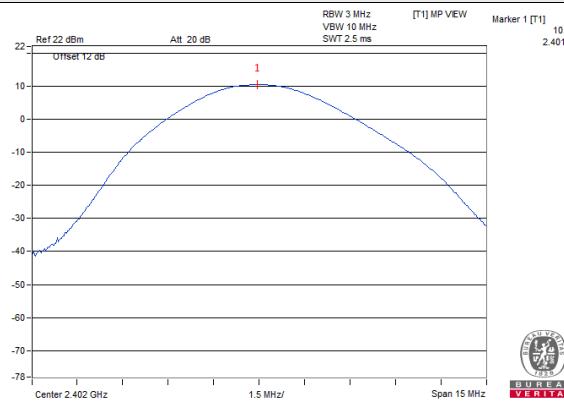

8DPSK / CH0

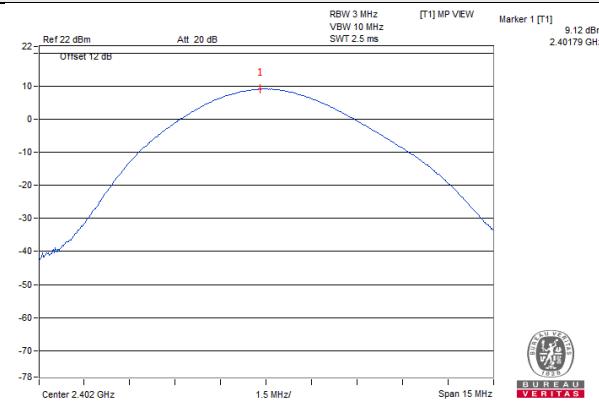

4.7 Conducted Out of Band Emission Measurement

4.7.1 Limits of Conducted Out of Band Emission Measurement

Below 20dB of the highest emission level of operating band (in 100kHz RBW).

4.7.2 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.7.3 Test Procedure

The transmitter output was connected to the spectrum analyzer via a low loss cable. Set both RBW and VBW of spectrum analyzer to 100 kHz and 300 kHz with suitable frequency span including 100 MHz bandwidth from band edge. The band edges was measured and recorded.

4.7.4 Deviation from Test Standard

No deviation.

4.7.5 EUT Operating Condition


The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.

4.7.6 Test Results


The spectrum plots are attached on the following images. D1 line indicates the highest level, D2 line indicates the 20dB offset below D1. It shows compliance with the requirement.

GFSK


Hopping disabled_Low Channel

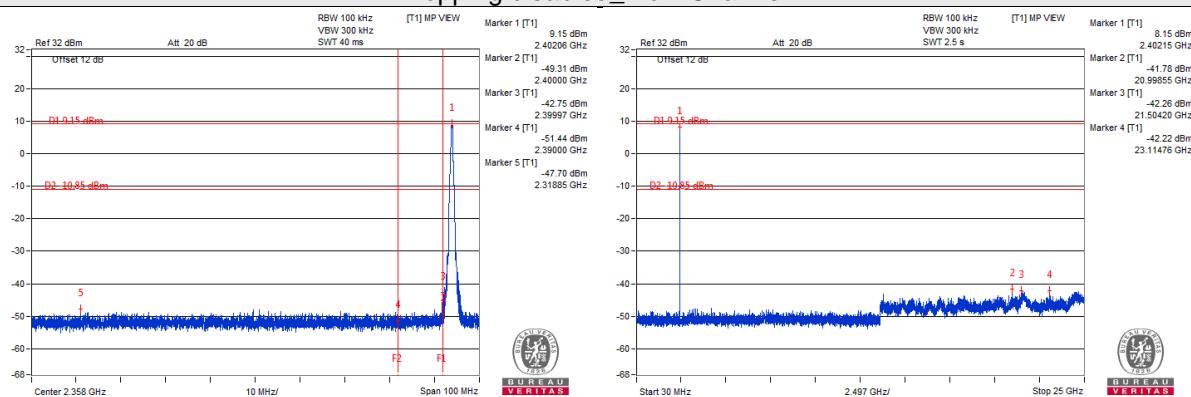


Hopping disabled_High Channel

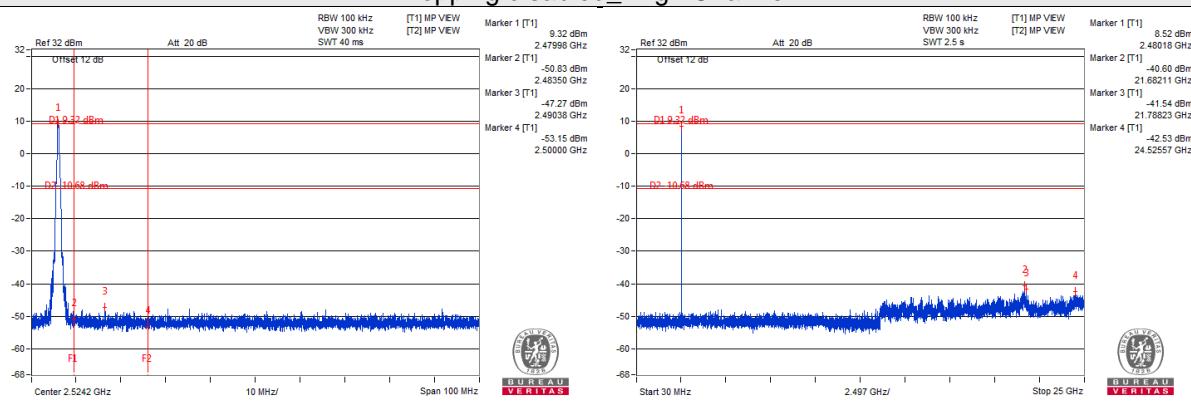

Hopping enabled_Low Channel

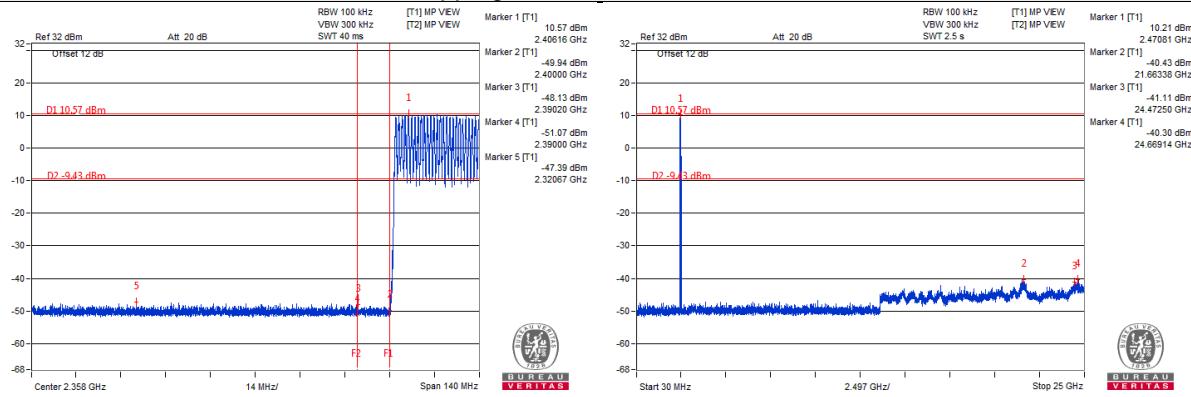


Hopping enabled_High Channel

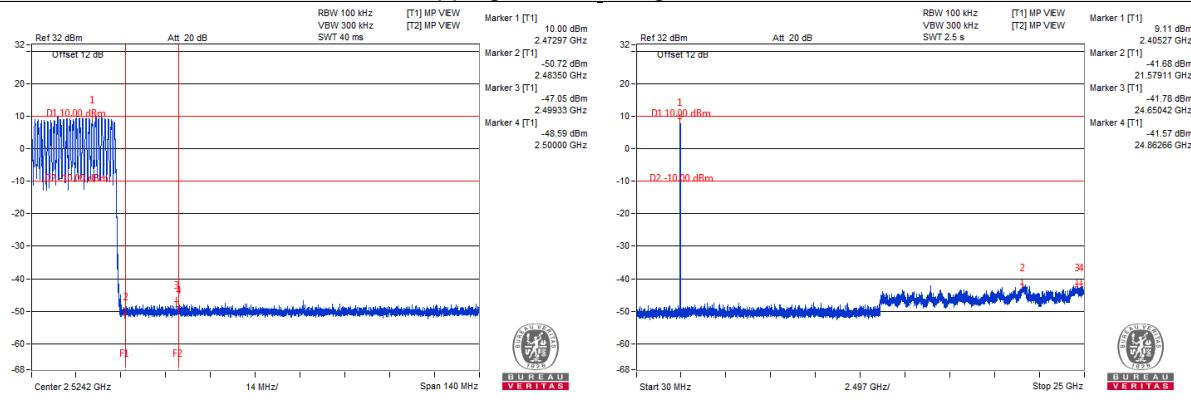


8DPSK


Hopping disabled Low Channel

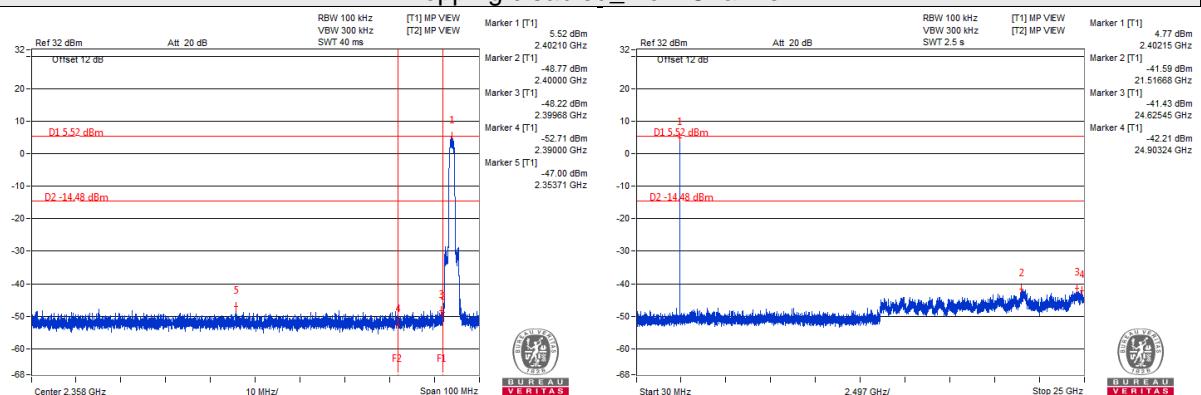


Hopping disabled_ High Channel

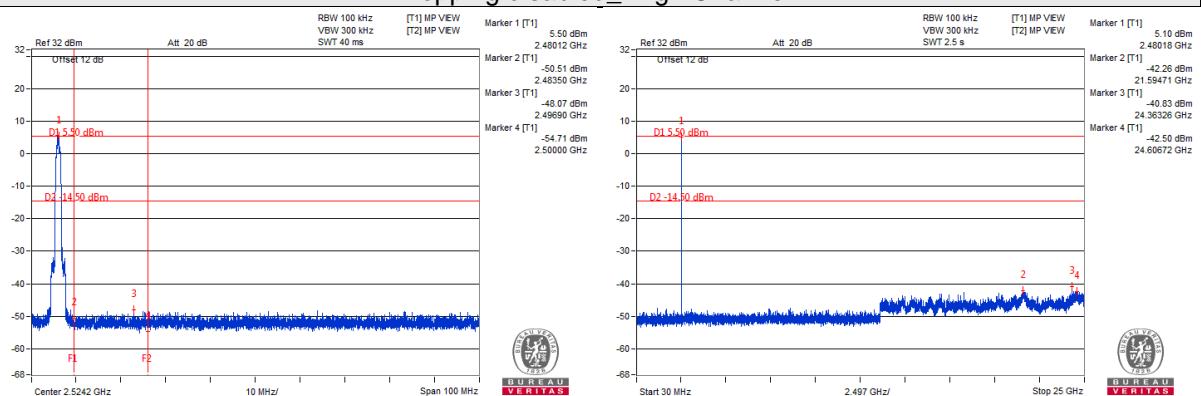

Hopping enabled Low Channel

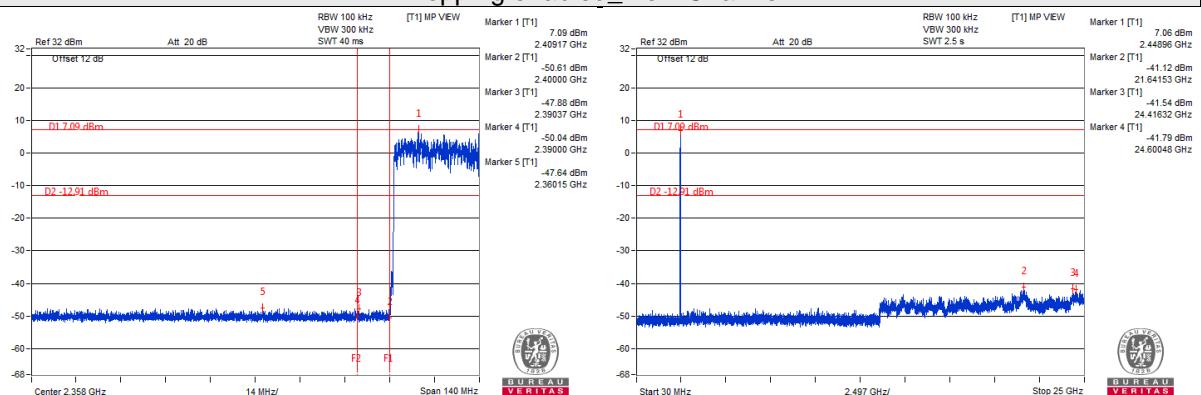

Hopping enabled_ High Channel

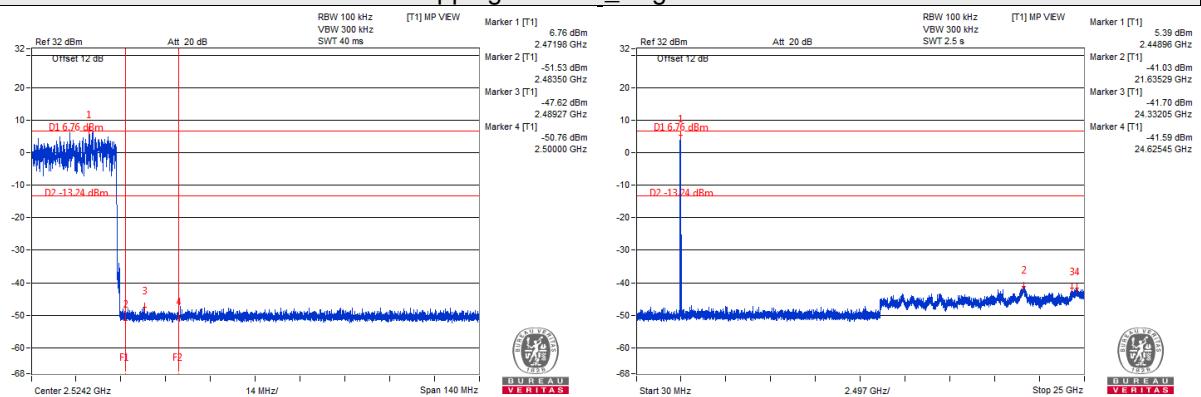

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab

Tel: 886-2-26052180
Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565
Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232
Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---