



FCC RF Test Report

APPLICANT : Honeywell International Inc.
Honeywell Safety and Productivity Solutions

EQUIPMENT : DOLPHIN CT40

BRAND NAME : Honeywell

MODEL NAME : CT40-L1N

FCC ID : HD5-CT40L1N

STANDARD : FCC Part 15 Subpart E §15.407

CLASSIFICATION : (NII) Unlicensed National Information Infrastructure

The product was received on May 04, 2018 and testing was completed on Jul. 04, 2018. We, Sporton International (Kunshan) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.



Approved by: James Huang / Manager

Sporton International (Kunshan) Inc.
No. 1098, Pengxi North Road, Kunshan Economic Development Zone,
Jiangsu Province 215335, China



TABLE OF CONTENTS

1	GENERAL DESCRIPTION	5
1.1	Applicant	5
1.2	Manufacturer	5
1.3	Product Feature of Equipment Under Test	5
1.4	Product Specification of Equipment Under Test	6
1.5	Modification of EUT	7
1.6	Testing Location	7
1.7	Applicable Standards	7
2	TEST CONFIGURATION OF EQUIPMENT UNDER TEST	8
2.1	Carrier Frequency and Channel	8
2.2	Test Mode	10
2.3	Connection Diagram of Test System	12
2.4	Support Unit used in test configuration and system	12
2.5	EUT Operation Test Setup	13
2.6	Measurement Results Explanation Example	13
3	TEST RESULT	14
3.1	26dB & 99% Occupied Bandwidth Measurement	14
3.2	Maximum Conducted Output Power Measurement	16
3.3	Power Spectral Density Measurement	18
3.4	Unwanted Emissions Measurement	21
3.5	AC Conducted Emission Measurement	26
3.6	Automatically Discontinue Transmission	28
3.7	Antenna Requirements	29
4	LIST OF MEASURING EQUIPMENT	30
5	UNCERTAINTY OF EVALUATION	31
APPENDIX A. CONDUCTED TEST RESULTS		
APPENDIX B. AC CONDUCTED EMISSION TEST RESULT		
APPENDIX C. RADIATED SPURIOUS EMISSION		
APPENDIX D. DUTY CYCLE PLOTS		
APPENDIX E. SETUP PHOTOGRAPHS		



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR850409E	Rev. 01	Initial issue of report	Nov. 13, 2018

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	2.1049 & 15.403(i)	26dB & 99% Bandwidth	-	Pass	-
3.2	15.407(a)	Maximum Conducted Output Power	≤ 24 dBm	Pass	-
3.3	15.407(a)	Power Spectral Density	≤ 11 dBm	Pass	-
3.4	15.407(b)	Unwanted Emissions	15.407(b) & 15.209(a)	Pass	Under limit 3.74 dB at 5351.700 MHz
3.5	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 17.89 dB at 0.476 MHz
3.6	15.407(c)	Automatically Discontinue Transmission	Discontinue Transmission	Pass	-
3.7	15.203 & 15.407(a)	Antenna Requirement	N/A	Pass	-



1 General Description

1.1 Applicant

Honeywell International Inc.
Honeywell Safety and Productivity Solutions
9680 Old Bailes Rd. Fort Mill, SC 29707 United States

1.2 Manufacturer

Honeywell International Inc.
Honeywell Safety and Productivity Solutions
9680 Old Bailes Rd. Fort Mill, SC 29707 United States

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	DOLPHIN CT40
Brand Name	Honeywell
Model Name	CT40-L1N
FCC ID	HD5-CT40L1N
EUT supports Radios application	CDMA/EV-DO/GSM/GPRS/EGPRS/WCDMA/HSPA/ DC-HSDPA/HSPA+(16QAM uplink is not supported)/LTE/NFC WLAN 2.4GHz 802.11b/g/n HT20 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE
IMEI Code	Conducted:990011960007085 Conduction: 990011960006541 Radiation: 990011960006061
HW Version	V1.0
SW Version	OS.01.010-HON.01.102
EUT Stage	Identical Prototype

Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. There are two samples under test, the difference is scanner that from different suppliers, According to the difference, sample 1 is assessed to perform full test.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	5180 MHz ~ 5240 MHz 5260 MHz ~ 5320 MHz 5500 MHz ~ 5700 MHz
Maximum Output Power to Antenna	<5180 MHz ~ 5240 MHz> 802.11a : 11.78 dBm / 0.0151 W 802.11n HT20 : 10.83 dBm / 0.0121 W 802.11n HT40 : 10.72 dBm / 0.0118 W 802.11ac VHT20 : 10.73 dBm / 0.0118 W 802.11ac VHT40 : 10.71 dBm / 0.0118 W 802.11ac VHT80 : 10.49 dBm / 0.0112 W <5260 MHz ~ 5320 MHz> 802.11a : 11.98 dBm / 0.0158 W 802.11n HT20 : 11.06 dBm / 0.0128 W 802.11n HT40 : 10.84 dBm / 0.0121 W 802.11ac VHT20 : 10.90 dBm / 0.0123 W 802.11ac VHT40 : 10.82 dBm / 0.0121 W 802.11ac VHT80 : 9.14 dBm / 0.0082 W <5500 MHz ~ 5700 MHz > 802.11a : 12.02 dBm / 0.0159 W 802.11n HT20 : 11.04 dBm / 0.0127 W 802.11n HT40 : 10.80 dBm / 0.0120 W 802.11ac VHT20 : 10.89 dBm / 0.0123 W 802.11ac VHT40 : 10.78 dBm / 0.0120 W 802.11ac VHT80 : 10.39 dBm / 0.0109 W
99% Occupied Bandwidth	<5180 MHz ~ 5240 MHz> 802.11a : 18.28 MHz 802.11n HT20 : 19.18 MHz 802.11n HT40 : 37.26 MHz 802.11ac VHT80 : 76.12 MHz <5260 MHz ~ 5300 MHz> 802.11a : 18.33 MHz 802.11n HT20 : 19.23 MHz 802.11n HT40 : 37.26 MHz 802.11ac VHT80 : 76.12 MHz <5500 MHz ~ 5700 MHz > 802.11a : 18.43 MHz 802.11n HT20 : 19.23 MHz 802.11n HT40 : 37.26 MHz 802.11ac VHT80 : 76.24 MHz
Antenna Type / Gain	<5180 MHz ~ 5240 MHz> IFA Antenna with gain 3.00 dBi <5260 MHz ~ 5320 MHz> IFA Antenna with gain 2.50 dBi <5500 MHz ~ 5700 MHz > IFA Antenna with gain 1.70 dBi



Type of Modulation	802.11a/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ac : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)
---------------------------	--

Note: For 802.11n HT20 / ac VHT20 and 802.11n HT40 / ac VHT40 mode, the whole testing have assessed only 802.11n HT20/ HT40 by referring to their maximum conducted power.

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Sporton International (Kunshan) Inc. is accredited to ISO 17025 by National Voluntary Laboratory Accreditation Program (NVLAP code: 600155-0).

Test Site	Sporton International (Kunshan) Inc.		
Test Site Location	No.3-2 Ping-Xiang Rd, Kunshan Development Zone Kunshan City Jiangsu Province 215335 China TEL : +86-512-57900158 FAX : +86-512-57900958		
Test Site No.	Sporton Site No.	FCC designation No.	FCC Test Firm Registration No.
	TH01-KS CO01-KS 03CH04-KS	CN5013	630927

1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5180-5240 MHz Band 1 (U-NII-1)	36	5180	44	5220
	38*	5190	46*	5230
	40	5200	48	5240
	42 [#]	5210	-	-
Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5260-5320 MHz Band 2 (U-NII-2A)	52	5260	60	5300
	54*	5270	62*	5310
	56	5280	64	5320
	58 [#]	5290	-	-
Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5500-5700 MHz Band 3 (U-NII-2C)	100	5500	112	5560
	102*	5510	116	5580
	104	5520	132	5660
	106 [#]	5530	134*	5670
	108	5540	136	5680
	110*	5550	140	5700



Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
TDWR Channel	118*	5590	124	5620
	120	5600	126*	5630
	122 [#]	5610	128	5640

Note:

1. The above Frequency and Channel in "*" were 802.11n HT40 and 802.11ac VHT40.
2. The above Frequency and Channel in "[#]" were 802.11ac VHT80.

2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.

Modulation	Data Rate
802.11a	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0
802.11ac VHT80	MCS0

Test Cases	
AC Conducted Emission	Mode 1 : GSM850 Idle + Bluetooth Link + WLAN Link(5GHz) + USB Cradle (Charging from Adapter)




Ch. #		Band I : 5180-5240 MHz	Band II : 5260-5320 MHz	Band III : 5500-5700MHz
		802.11a	802.11a	802.11a
L	Low	36	52	100
M	Middle	44	60	116
H	High	48	64	140

Ch. #		Band I : 5180-5240 MHz	Band II : 5260-5320 MHz	Band III : 5500-5700MHz
		802.11n HT20	802.11n HT20	802.11n HT20
L	Low	36	52	100
M	Middle	44	60	116
H	High	48	64	140

Ch. #		Band I : 5180-5240 MHz	Band II : 5260-5320 MHz	Band III : 5500-5700MHz
		802.11n HT40	802.11n HT40	802.11n HT40
L	Low	38	54	102
M	Middle	-	-	110
H	High	46	62	134

Ch. #		Band I : 5180-5240 MHz	Band II : 5260-5320 MHz	Band III : 5500-5700MHz
		802.11ac VHT80	802.11ac VHT80	802.11ac VHT80
L	Low	-	-	106
M	Middle	42	58	-
H	High	-	-	122

2.3 Connection Diagram of Test System

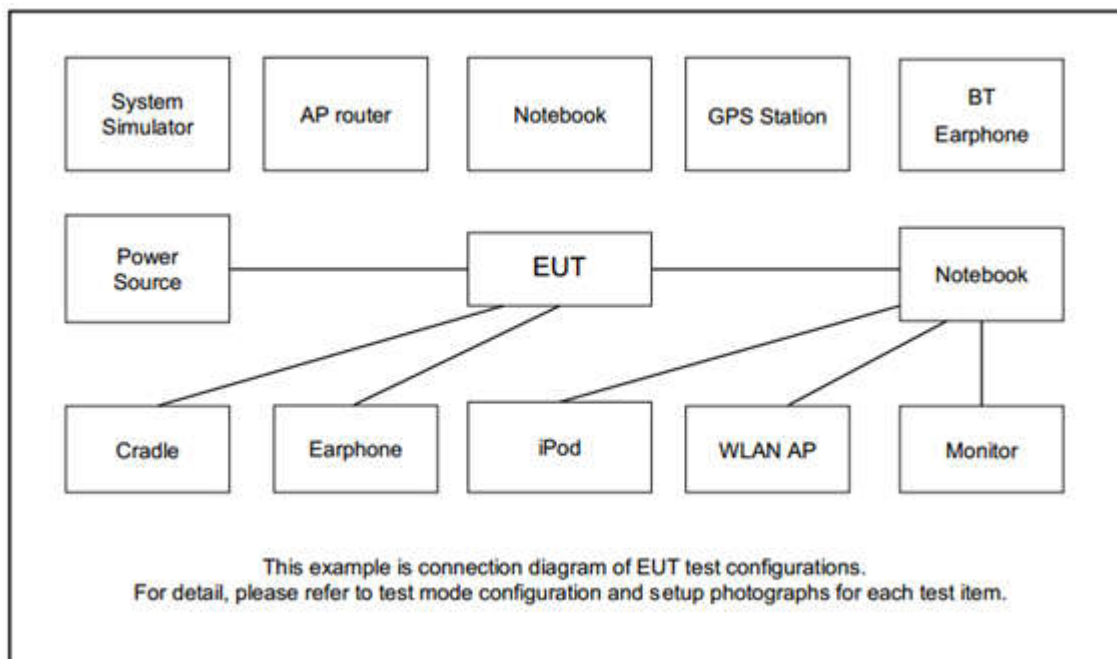

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded,1.8m
2.	Bluetooth Earphone	Lenovo	LBH308	N/A	N/A	N/A
3.	WLAN AP	D-Link	DIR-855	KA2DIR855A2	N/A	Unshielded,1.8m
4.	Notebook	Lenovo	G480	N/A	N/A	shielded cable DC O/P 1.8m , Unshielded AC I/P cable 1.8m



2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuous transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss.

Offset = RF cable loss.

Following shows an offset computation example with cable loss 6.5dB.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)}. \\ &= 6.5 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 26dB & 99% Occupied Bandwidth Measurement

3.1.1 Description of 26dB & 99% Occupied Bandwidth

This section is for reporting purpose only.

There is no restriction limits for bandwidth.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures



1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section C) Emission bandwidth
2. Set RBW = approximately 1% of the emission bandwidth.
3. Set the VBW > RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.
7. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1MHz and set the Video bandwidth (VBW) $\geq 3 * \text{RBW}$.
8. Measure and record the results in the test report.

3.1.4 Test Setup

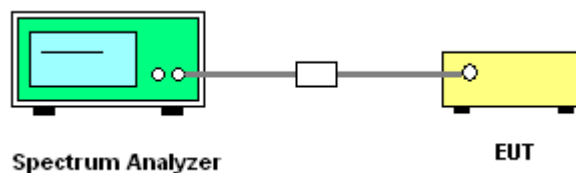

3.1.5 Test Result of 26dB & 99% Occupied Bandwidth

Please refer to Appendix A.

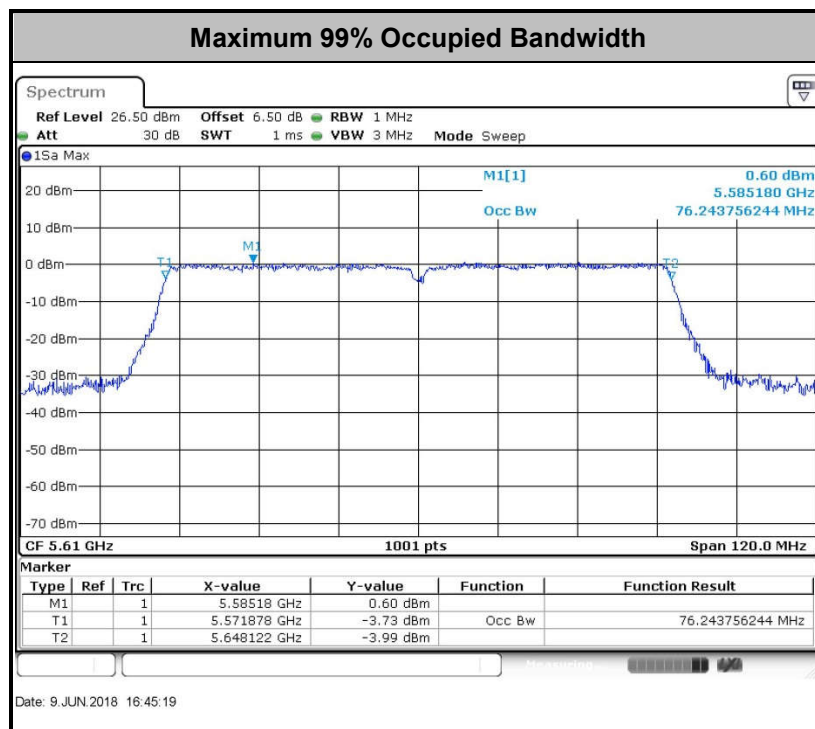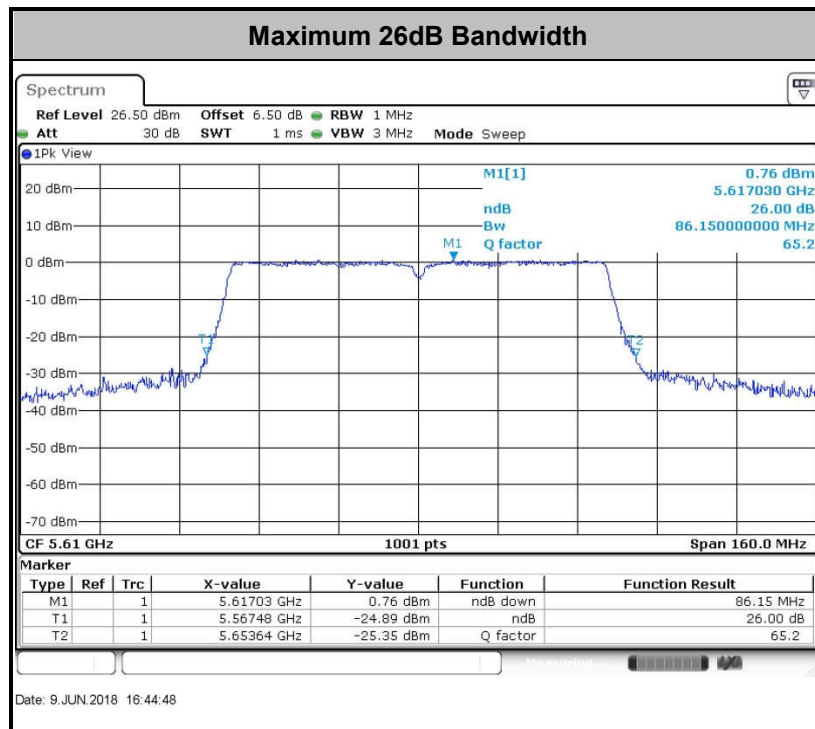

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.



3.2 Maximum Conducted Output Power Measurement

3.2.1 Limit of Maximum Conducted Output Power

<FCC 14-30 CFR 15.407>

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW.

For the 5.25–5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm $10 \log B$, where B is the 26 dB emission bandwidth in megahertz.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Note that U-NII-2 band, devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


3.2.3 Test Procedures

The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor, $10 \log(1/x)$, where x is the duty cycle.

3.2.4 Test Setup

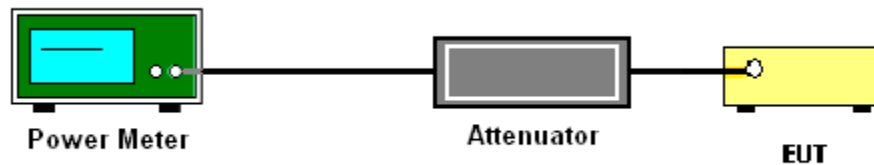

3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.



3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

<FCC 14-30 CFR 15.407>

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band.

For the 5.25–5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.


Section F) Maximum power spectral density.

Method SA-2

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).


- Measure the duty cycle.
 - Set span to encompass the entire emission bandwidth (EBW) of the signal.
 - Set RBW = 1 MHz.
 - Set VBW $\geq$ 3 MHz.
 - Number of points in sweep $\geq$ 2 Span / RBW.
 - Sweep time = auto.
 - Detector = RMS
 - Trace average at least 100 traces in power averaging mode.
 - Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.
-
1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
 2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.

3.3.4 Test Setup

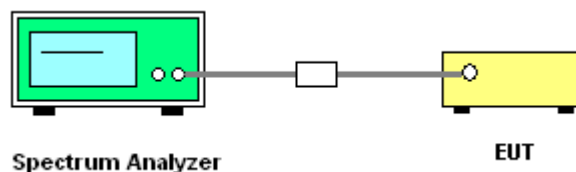

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

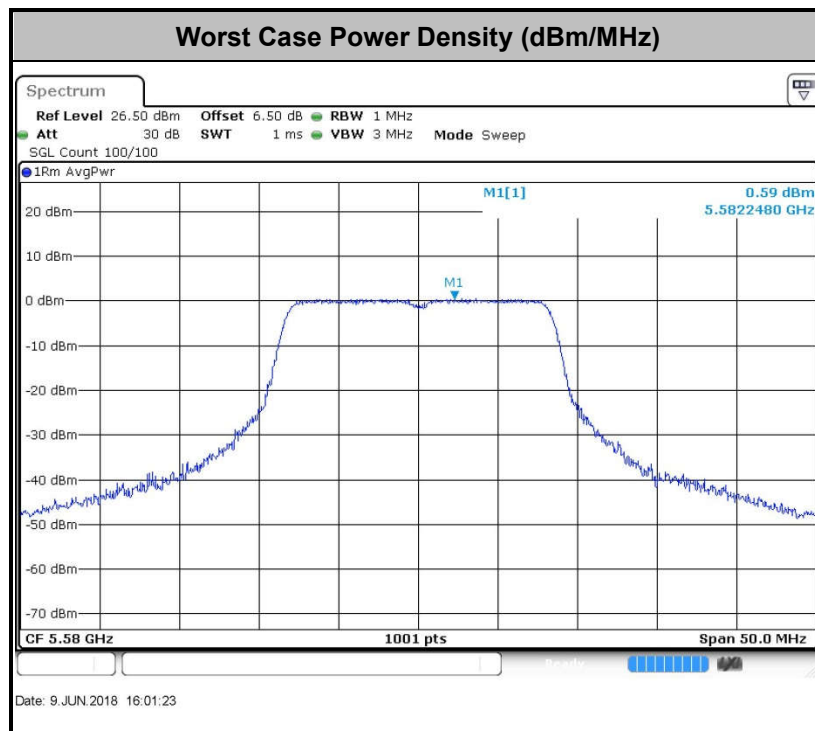

Note: Average Power Density (dB) = Measured value+ Duty Factor

3.4 Unwanted Emissions Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

3.4.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5150-5250 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27dBm/MHz.

For transmitters operating in the 5250-5350 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27 dBm/MHz. Devices operating in the 5250-5350 MHz band that generate emissions in the 5150-5250 MHz band must meet all applicable technical requirements for operation in the 5150-5250 MHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5150-5250 MHz band.

For transmitters operating in the 5470-5600 MHz and 5650-5725MHz band: all emissions outside of the 5470-5600 MHz and 5650-5725MHz band shall not exceed an EIRP of -27 dBm/MHz.

- (2) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

EIRP (dBm)	Field Strength at 3m (dBμV/m)
- 27	68.3

Note: The following formula is used to convert the EIRP to field strength.

$$\text{EIRP} = E_{\text{Meas}} + 20\log(d_{\text{Meas}}) - 104.7$$

where

EIRP is the equivalent isotropically radiated power, in dBm

E_{Meas} is the field strength of the emission at the measurement distance, in dBμV/m

d_{Meas} is the measurement distance, in m

3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




3.4.3 Test Procedures


1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section G) Unwanted emissions measurement.
 - (1) Procedure for Unwanted Emissions Measurements Below 1000MHz
 - RBW = 120 kHz
 - VBW = 300 kHz
 - Detector = Peak
 - Trace mode = max hold
 - (2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
 - RBW = 1 MHz
 - VBW $\geq$ 3 MHz
 - Detector = Peak
 - Sweep time = auto
 - Trace mode = max hold
 - (3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz
 - RBW = 1 MHz
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq$ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.4.4 Test Setup


For radiated emissions below 30MHz

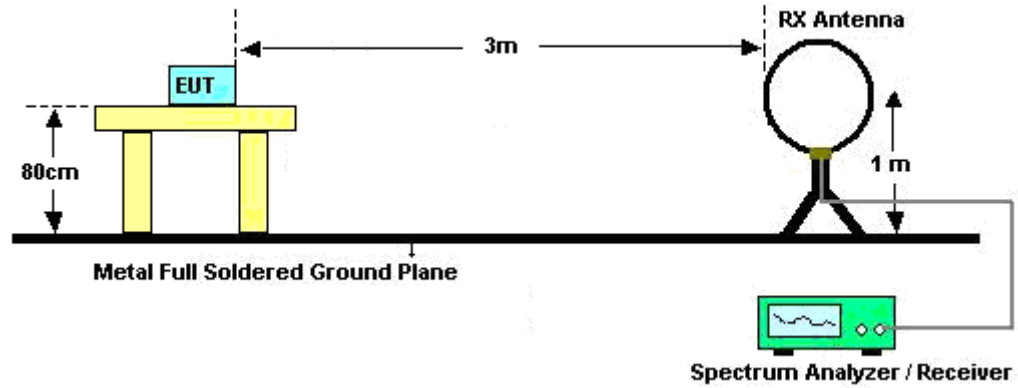

For radiated emissions from 30MHz to 1GHz

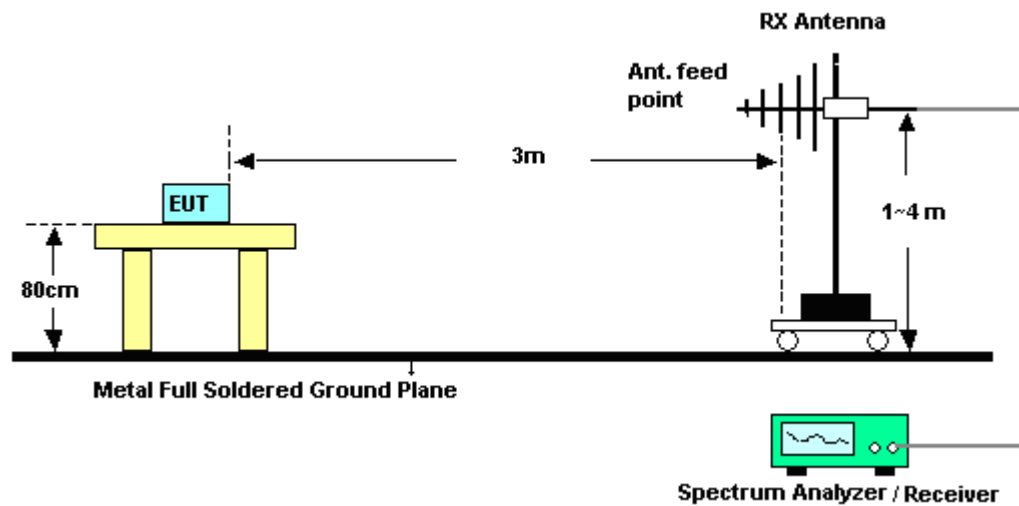

For radiated emissions above 1GHz

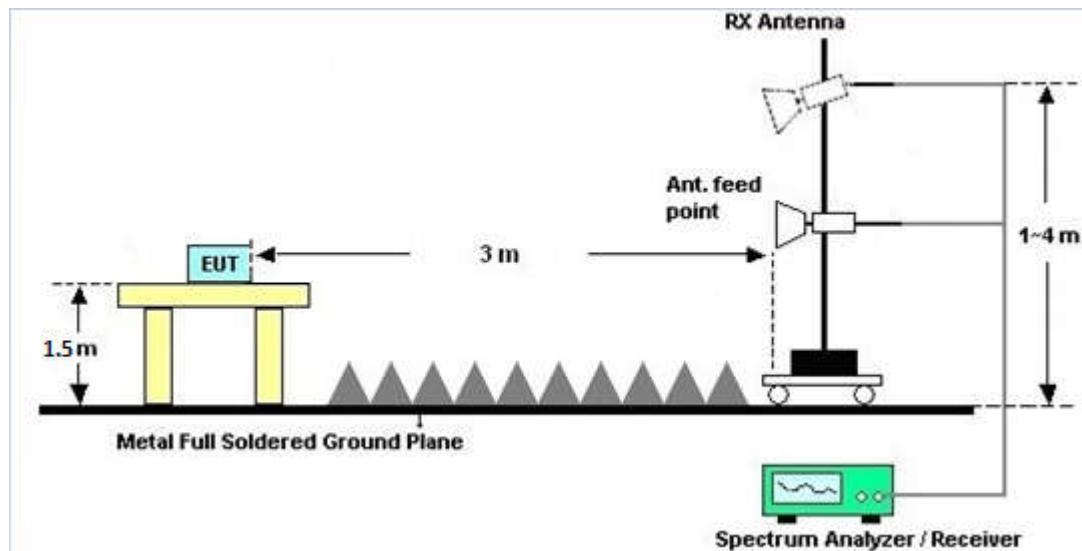

3.4.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.4.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.4.7 Duty Cycle

Please refer to Appendix D.

3.4.8 Test Result of Radiated Spurious Emissions (30MHz ~ 10th Harmonic)

Please refer to Appendix C.

3.5 AC Conducted Emission Measurement

3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.5.4 Test Setup

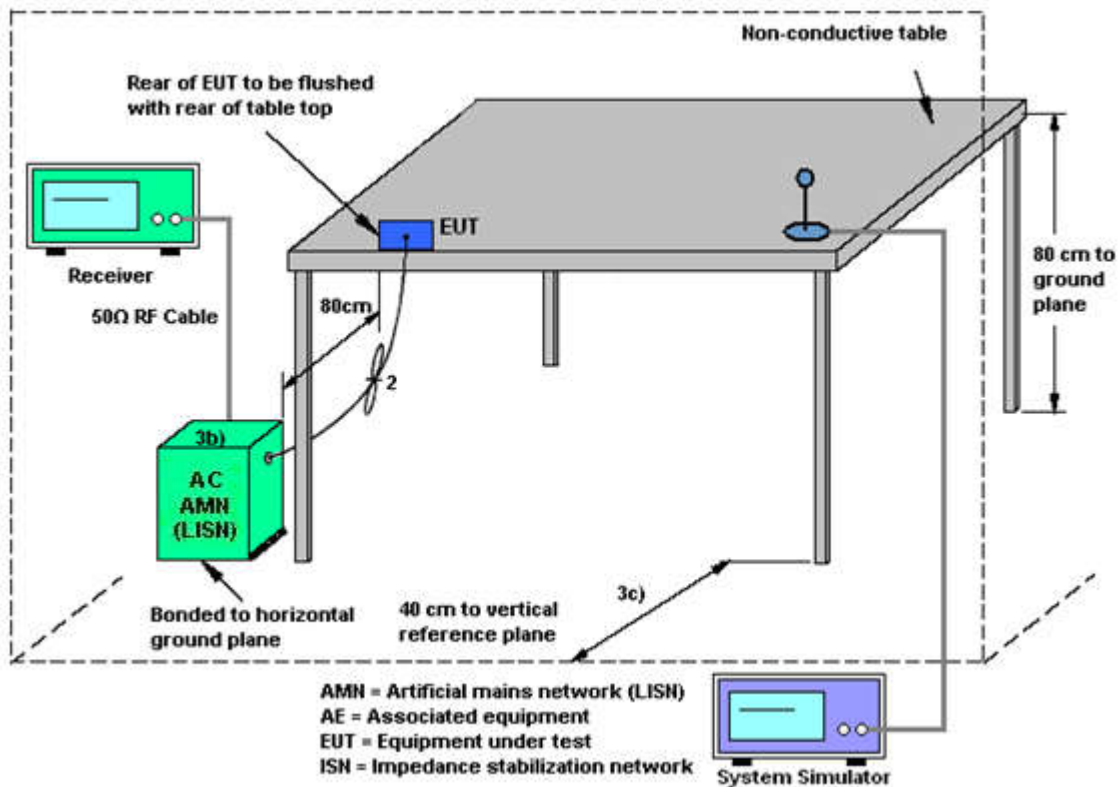

3.5.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.6 Automatically Discontinue Transmission

3.6.1 Limit of Automatically Discontinue Transmission

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Result of Automatically Discontinue Transmission

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.



3.7 Antenna Requirements

3.7.1 Standard Applicable

If transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Aug. 08, 2017	Jun. 09, 2018	Aug. 07, 2018	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 18, 2018	Jun. 09, 2018	Jan. 17, 2019	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 18, 2018	Jun. 09, 2018	Jan. 17, 2019	Conducted (TH01-KS)
Thermal Chamber	Ten Billion	TTC-B3S	TBN-960502	-40~+150°C	Oct. 12, 2017	Jun. 09, 2018	Oct. 11, 2018	Conducted (TH01-KS)
EMI Test Receiver	Keysight	N9038A	MY56400023	3Hz~8.5GHz; Max 30dBm	Oct. 19, 2017	Jul. 04, 2018	Oct. 18, 2018	Radiation (03CH04-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55370528	10Hz~44GHz	Oct. 10, 2017	Jul. 04, 2018	Oct. 09, 2018	Radiation (03CH04-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 22, 2017	Jul. 04, 2018	Oct. 21, 2018	Radiation (03CH04-KS)
Bilog Antenna	TeseQ	CBL6111D	44483	30MHz~1GHz	Jan. 29, 2018	Jul. 04, 2018	Jan. 28, 2019	Radiation (03CH04-KS)
Horn Antenna	Schwarzbeck	BBHA9120D	1648	1GHz~18GHz	Dec. 16, 2017	Jul. 04, 2018	Dec. 15, 2018	Radiation (03CH04-KS)
SHF-EHF Horn	Schwarzbeck	BBHA 9170	BBHA170249	15GHz~40GHz	Feb. 07, 2018	Jul. 04, 2018	Feb. 06, 2019	Radiation (03CH04-KS)
Amplifier	Burgeon	BPA-530	102219	0.01MHz~3000MHz	Dec. 16, 2017	Jul. 04, 2018	Dec. 15, 2018	Radiation (03CH04-KS)
Amplifier	MITEQ	TTA1840-35-HG	2014749	18~40GHz	Feb. 08, 2018	Jul. 04, 2018	Feb. 07, 2019	Radiation (03CH04-KS)
high gain Amplifier	MITEQ	AMF-7D-00101800-30-10P	2025788	1Ghz-18Ghz	Apr. 17, 2018	Jul. 04, 2018	Apr. 16, 2019	Radiation (03CH04-KS)
Amplifier	Keysight	83017A	MY53270203	500MHz~26.5GHz	Dec. 16, 2017	Jul. 04, 2018	Dec. 15, 2018	Radiation (03CH04-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Jul. 04, 2018	NCR	Radiation (03CH04-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Jul. 04, 2018	NCR	Radiation (03CH04-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Jul. 04, 2018	NCR	Radiation (03CH04-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	Apr. 19, 2018	Jun. 07, 2018	Apr. 18, 2019	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060103	9kHz~30MHz	Oct. 12, 2017	Jun. 07, 2018	Oct. 11, 2018	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060105	9kHz~30MHz	Nov. 23, 2017	Jun. 07, 2018	Nov. 22, 2018	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP00000811	AC 0V~300V, 45Hz~1000Hz	Oct. 12, 2017	Jun. 07, 2018	Oct. 11, 2018	Conduction (CO01-KS)

NCR: No Calibration Required



5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	2.9dB
---	-------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	4.9dB
---	-------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	5.0dB
---	-------



Appendix A. Conducted Test Results

Report Number : FR850409E

Test Engineer:	Len Dong	Temperature:	21~25	°C
Test Date:	2018/6/9	Relative Humidity:	51~54	%

TEST RESULTS DATA
26dB and 99% OBW

Band I										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)	IC 99% Bandwidth Power Limit (dBm)	IC 99% Bandwidth EIRP Limit (dBm)		
11a	6Mbps	1	36	5180	18.18	24.43	-	22.60		
11a	6Mbps	1	44	5220	18.28	25.62	-	22.62		
11a	6Mbps	1	48	5240	18.23	25.62	-	22.61		
HT20	MCS0	1	36	5180	19.18	25.23	-	22.83		
HT20	MCS0	1	44	5220	19.18	25.62	-	22.83		
HT20	MCS0	1	48	5240	19.13	25.28	-	22.82		
HT40	MCS0	1	38	5190	37.26	43.34	-	23.01		
HT40	MCS0	1	46	5230	37.26	43.52	-	23.01		
VHT80	MCS0	1	42	5210	76.12	85.67	-	23.01		

TEST RESULTS DATA
Average Power Table

FCC Band I										
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)		Pass/Fail
11a	6Mbps	1	36	5180	0.27	11.78	24.00	3.00		Pass
11a	6Mbps	1	44	5220	0.27	11.54	24.00	3.00		Pass
11a	6Mbps	1	48	5240	0.27	11.29	24.00	3.00		Pass
HT20	MCS0	1	36	5180	0.35	10.83	24.00	3.00		Pass
HT20	MCS0	1	44	5220	0.35	10.58	24.00	3.00		Pass
HT20	MCS0	1	48	5240	0.35	10.37	24.00	3.00		Pass
HT40	MCS0	1	38	5190	0.41	10.72	24.00	3.00		Pass
HT40	MCS0	1	46	5230	0.41	10.36	24.00	3.00		Pass
VHT20	MCS0	1	36	5180	0.24	10.73	24.00	3.00		Pass
VHT20	MCS0	1	44	5220	0.24	10.53	24.00	3.00		Pass
VHT20	MCS0	1	48	5240	0.24	10.33	24.00	3.00		Pass
VHT40	MCS0	1	38	5190	0.47	10.71	24.00	3.00		Pass
VHT40	MCS0	1	46	5230	0.47	10.29	24.00	3.00		Pass
VHT80	MCS0	1	42	5210	0.83	10.49	24.00	3.00		Pass

TEST RESULTS DATA
Power Spectral Density

FCC Band I										
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)	Average Power Density (dBm/MHz)	Average PSD Limit (dBm/MHz)	DG (dBi)	-	Pass/Fail
11a	6Mbps	1	36	5180	0.27	0.61	11.00	3.00		Pass
11a	6Mbps	1	44	5220	0.27	0.39	11.00	3.00		Pass
11a	6Mbps	1	48	5240	0.27	0.42	11.00	3.00		Pass
HT20	MCS0	1	36	5180	0.35	-0.72	11.00	3.00		Pass
HT20	MCS0	1	44	5220	0.35	-0.92	11.00	3.00		Pass
HT20	MCS0	1	48	5240	0.35	-0.94	11.00	3.00		Pass
HT40	MCS0	1	38	5190	0.41	-3.67	11.00	3.00		Pass
HT40	MCS0	1	46	5230	0.41	-3.66	11.00	3.00		Pass
VHT80	MCS0	1	42	5210	0.83	-6.50	11.00	3.00		Pass

TEST RESULTS DATA
26dB and 99% OBW

Band II										
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)	IC 99% Bandwidth Power Limit (dBm)	IC 99% Bandwidth EIRP Limit (dBm)	FCC 26dB Bandwidth Power Limit (dBm)	Note
11a	6M bps	1	52	5260	18.33	25.82	23.63	29.63	23.98	
11a	6M bps	1	60	5300	18.33	24.98	23.63	29.63	23.98	
11a	6M bps	1	64	5320	18.33	25.77	23.63	29.63	23.98	
HT20	MCS 0	1	52	5260	19.13	25.43	23.82	29.82	23.98	
HT20	MCS 0	1	60	5300	19.13	25.52	23.82	29.82	23.98	
HT20	MCS 0	1	64	5320	19.23	25.72	23.84	29.84	23.98	
HT40	MCS 0	1	54	5270	37.26	43.52	23.98	30.00	23.98	
HT40	MCS 0	1	62	5310	37.16	43.61	23.98	30.00	23.98	
VHT80	MCS 0	1	58	5290	76.12	85.67	23.98	30.00	23.98	

TEST RESULTS DATA
Average Power Table

FCC Band II										
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)	EIRP Power Limit (dBm)	Pass/Fail
11a	6M bps	1	52	5260	0.27	11.98	23.98	2.50	30.00	Pass
11a	6M bps	1	60	5300	0.27	11.66	23.98	2.50	30.00	Pass
11a	6M bps	1	64	5320	0.27	11.59	23.98	2.50	30.00	Pass
HT20	MCS 0	1	52	5260	0.35	11.06	23.98	2.50	30.00	Pass
HT20	MCS 0	1	60	5300	0.35	10.77	23.98	2.50	30.00	Pass
HT20	MCS 0	1	64	5320	0.35	10.50	23.98	2.50	30.00	Pass
HT40	MCS 0	1	54	5270	0.41	10.84	23.98	2.50	30.00	Pass
HT40	MCS 0	1	62	5310	0.41	10.67	23.98	2.50	30.00	Pass
VHT20	MCS 0	1	52	5260	0.24	10.90	23.98	2.50	30.00	Pass
VHT20	MCS 0	1	60	5300	0.24	10.66	23.98	2.50	30.00	Pass
VHT20	MCS 0	1	64	5320	0.24	10.48	23.98	2.50	30.00	Pass
VHT40	MCS 0	1	54	5270	0.47	10.82	23.98	2.50	30.00	Pass
VHT40	MCS 0	1	62	5310	0.47	10.68	23.98	2.50	30.00	Pass
VHT80	MCS 0	1	58	5290	0.83	9.14	23.98	2.50	30.00	Pass

TEST RESULTS DATA
Power Spectral Density

Band II										
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)	Average Power Density (dBm/MHz)	Average PSD Limit (dBm/MHz)	DG (dBi)		Pass/Fail
11a	6M bps	1	52	5260	0.27	0.78	11.00	2.50		Pass
11a	6M bps	1	60	5300	0.27	0.51	11.00	2.50		Pass
11a	6M bps	1	64	5320	0.27	0.59	11.00	2.50		Pass
HT20	MCS 0	1	52	5260	0.35	-0.30	11.00	2.50		Pass
HT20	MCS 0	1	60	5300	0.35	-0.71	11.00	2.50		Pass
HT20	MCS 0	1	64	5320	0.35	-0.61	11.00	2.50		Pass
HT40	MCS 0	1	54	5270	0.41	-3.43	11.00	2.50		Pass
HT40	MCS 0	1	62	5310	0.41	-3.68	11.00	2.50		Pass
VHT80	MCS 0	1	58	5290	0.83	-6.76	11.00	2.50		Pass

TEST RESULTS DATA
26dB and 99% OBW

Band III										
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)	IC 99% Bandwidth Power Limit (dBm)	IC 99% Bandwidth EIRP Limit (dBm)	FCC 26dB Bandwidth Power Limit (dBm)	Note
11a	6M bps	1	100	5500	18.43	24.88	23.66	29.66	23.98	
11a	6M bps	1	116	5580	18.23	25.18	23.61	29.61	23.98	
11a	6M bps	1	140	5700	18.38	25.72	23.64	29.64	23.98	
HT20	MCS 0	1	100	5500	19.13	25.28	23.82	29.82	23.98	
HT20	MCS 0	1	116	5580	19.23	25.38	23.84	29.84	23.98	
HT20	MCS 0	1	140	5700	19.23	25.82	23.84	29.84	23.98	
HT40	MCS 0	1	102	5510	37.26	43.52	23.98	30.00	23.98	
HT40	MCS 0	1	110	5550	37.26	43.52	23.98	30.00	23.98	
HT40	MCS 0	1	134	5670	37.26	43.70	23.98	30.00	23.98	
VHT80	MCS 0	1	106	5530	76.12	85.51	23.98	30.00	23.98	
VHT80	MCS 0	1	122	5610	76.24	86.15	23.98	30.00	23.98	

TEST RESULTS DATA
Average Power Table


FCC Band III										
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)	EIRP Power Limit (dBm)	Pass/Fail
11a	6M bps	1	100	5500	0.27	12.02	23.98	1.70	30.00	Pass
11a	6M bps	1	116	5580	0.27	11.64	23.98	1.70	30.00	Pass
11a	6M bps	1	140	5700	0.27	11.41	23.98	1.70	30.00	Pass
HT20	MCS 0	1	100	5500	0.35	11.04	23.98	1.70	30.00	Pass
HT20	MCS 0	1	116	5580	0.35	10.69	23.98	1.70	30.00	Pass
HT20	MCS 0	1	140	5700	0.35	10.53	23.98	1.70	30.00	Pass
HT40	MCS 0	1	102	5510	0.41	10.60	23.98	1.70	30.00	Pass
HT40	MCS 0	1	110	5550	0.41	10.80	23.98	1.70	30.00	Pass
HT40	MCS 0	1	134	5670	0.41	10.53	23.98	1.70	30.00	Pass
VHT20	MCS 0	1	100	5500	0.24	10.89	23.98	1.70	30.00	Pass
VHT20	MCS 0	1	116	5580	0.24	10.77	23.98	1.70	30.00	Pass
VHT20	MCS 0	1	140	5700	0.24	10.30	23.98	1.70	30.00	Pass
VHT40	MCS 0	1	102	5510	0.47	10.78	23.98	1.70	30.00	Pass
VHT40	MCS 0	1	110	5550	0.47	10.68	23.98	1.70	30.00	Pass
VHT40	MCS 0	1	134	5670	0.47	10.64	23.98	1.70	30.00	Pass
VHT80	MCS 0	1	106	5530	0.83	10.21	23.98	1.70	30.00	Pass
VHT80	MCS 0	1	122	5610	0.83	10.39	23.98	1.70	30.00	Pass


TEST RESULTS DATA
Power Spectral Density

Band III										
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)	Average Power Density (dBm/MHz)	Average PSD Limit (dBm/MHz)	DG (dBi)		Pass/Fail
11a	6M bps	1	100	5500	0.27	0.81	11.00	1.70		Pass
11a	6M bps	1	116	5580	0.27	0.86	11.00	1.70		Pass
11a	6M bps	1	140	5700	0.27	0.66	11.00	1.70		Pass
HT20	MCS 0	1	100	5500	0.35	-0.67	11.00	1.70		Pass
HT20	MCS 0	1	116	5580	0.35	-0.47	11.00	1.70		Pass
HT20	MCS 0	1	140	5700	0.35	-0.88	11.00	1.70		Pass
HT40	MCS 0	1	102	5510	0.41	-3.72	11.00	1.70		Pass
HT40	MCS 0	1	110	5550	0.41	-3.55	11.00	1.70		Pass
HT40	MCS 0	1	134	5670	0.41	-3.53	11.00	1.70		Pass
VHT80	MCS 0	1	106	5530	0.83	-6.97	11.00	1.70		Pass
VHT80	MCS 0	1	122	5610	0.83	-7.36	11.00	1.70		Pass



Appendix B. AC Conducted Emission Test Results

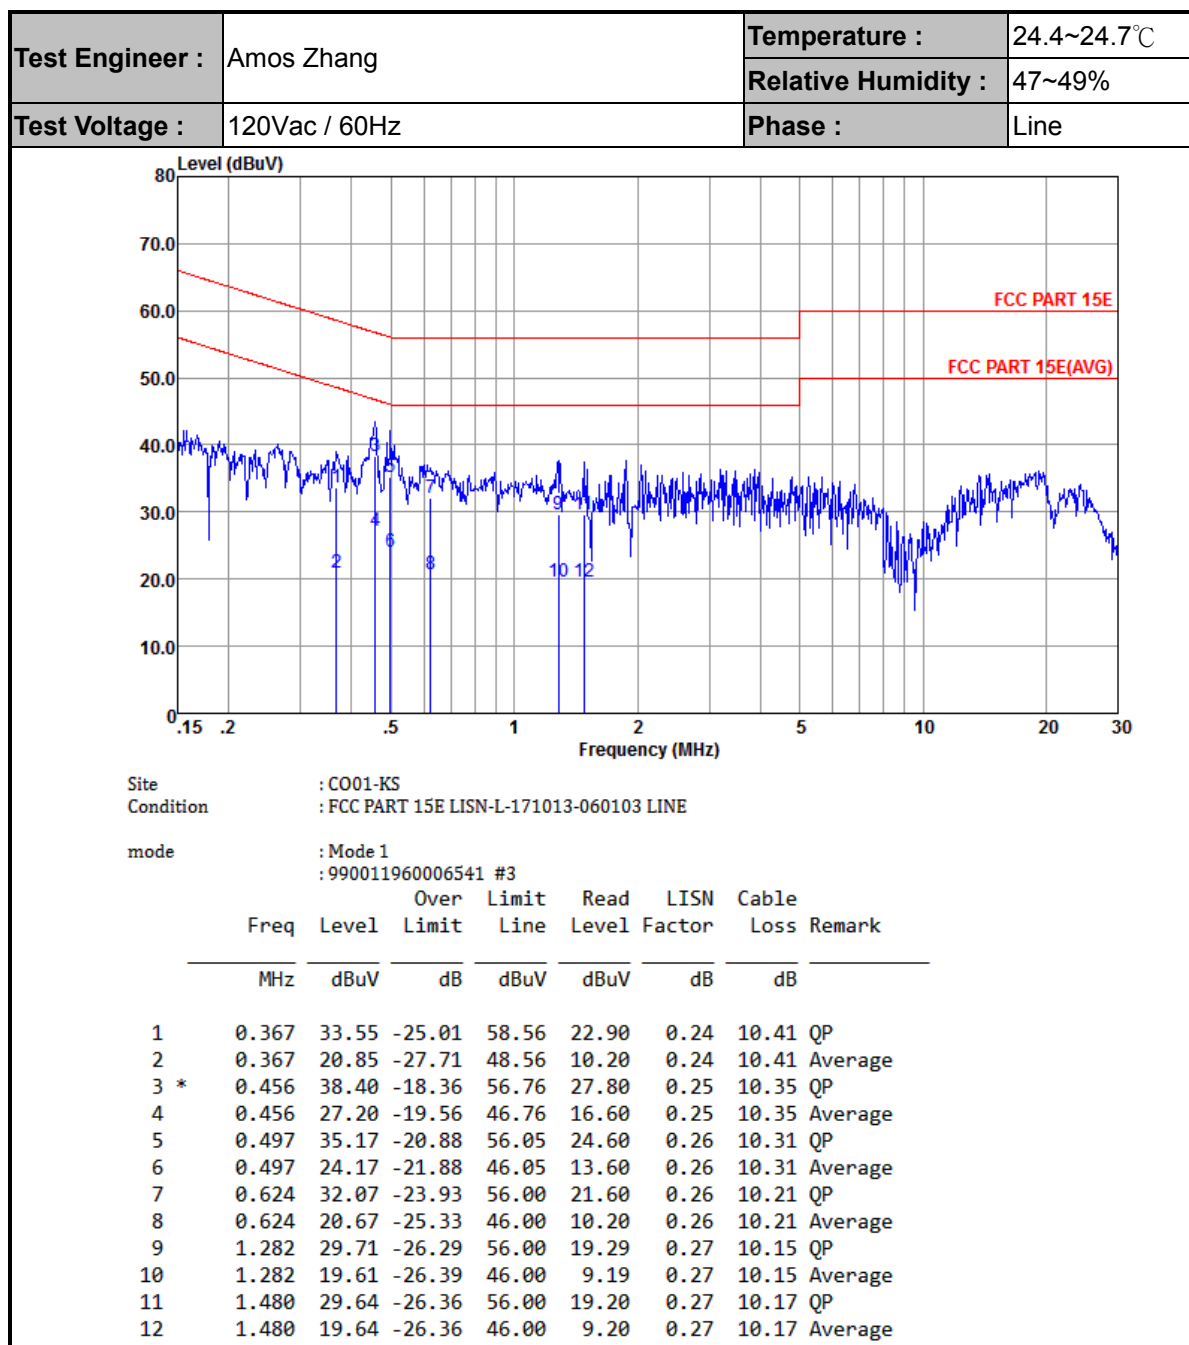

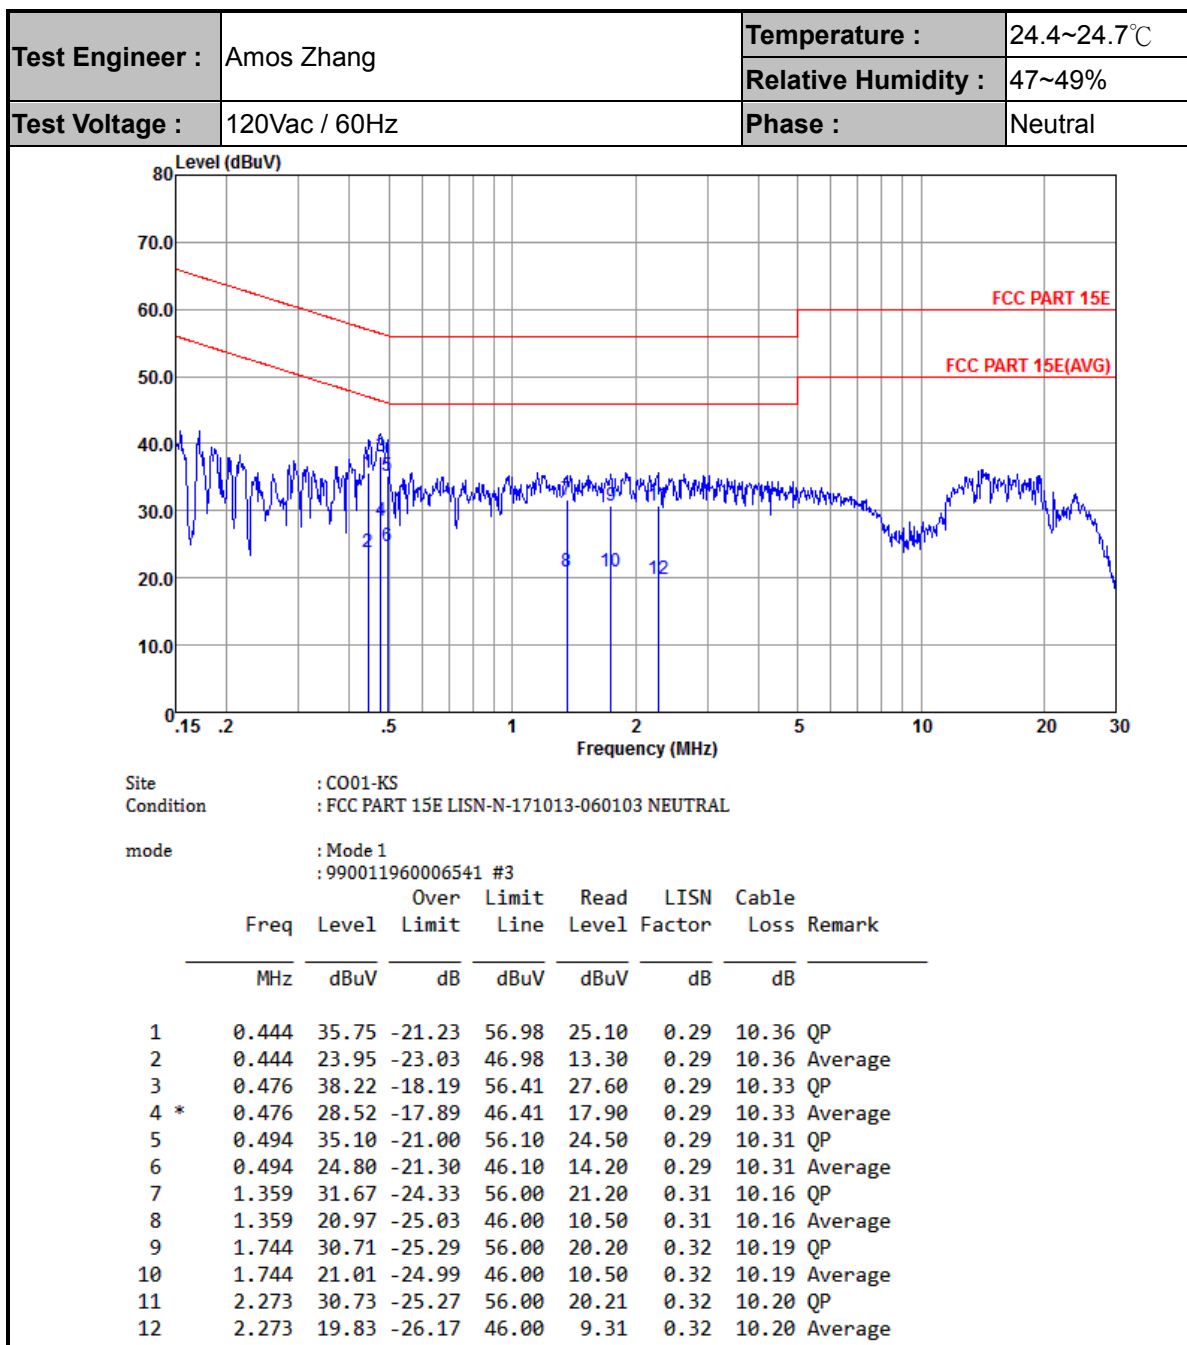



Appendix C. Radiated Spurious Emission

Band 1 - 5150~5250MHz

WIFI 802.11a (Band Edge @ 3m)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a CH 36 5180MHz		5148.64	53.65	-20.35	74	43.52	35.39	7.99	33.25	367	191	P	H
		5150	43.92	-10.08	54	33.79	35.39	7.99	33.25	367	191	A	H
	*	5186	100.41	-	-	90.31	35.36	7.99	33.25	367	191	P	H
		5186	93.03	-	-	82.93	35.36	7.99	33.25	367	191	A	H
		5149.6	55.92	-18.08	74	45.79	35.39	7.99	33.25	115	206	P	V
		5149.99	44.61	-9.39	54	34.48	35.39	7.99	33.25	115	206	A	V
	*	5184	102.19	-	-	92.09	35.36	7.99	33.25	115	206	P	V
		5184	94.8	-	-	84.7	35.36	7.99	33.25	115	206	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz

WIFI 802.11a (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a		10360	43.31	-24.99	68.3	59.05	38.47	11.94	66.15	100	360	P	H
CH 36 5180MHz		10360	44.3	-24	68.3	60.04	38.47	11.94	66.15	100	360	P	V
802.11a		10440	44.46	-23.84	68.3	59.95	38.52	12.09	66.1	100	360	P	H
CH 44 5220MHz		10440	44.37	-23.93	68.3	59.86	38.52	12.09	66.1	100	360	P	V
802.11a		10480	44.22	-24.08	68.3	59.52	38.56	12.21	66.07	100	360	P	H
CH 48 5240MHz		10480	45.64	-22.66	68.3	60.94	38.56	12.21	66.07	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz

WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 36 5180MHz		5147.2	54.4	-19.6	74	44.27	35.39	7.99	33.25	195	5	P	H
		5132.96	43.8	-10.2	54	33.66	35.41	7.99	33.26	195	5	A	H
	*	5178	99.02	-	-	88.92	35.36	7.99	33.25	195	5	P	H
		5178	91.76	-	-	81.66	35.36	7.99	33.25	195	5	A	H
		5149.28	54.74	-19.26	74	44.61	35.39	7.99	33.25	110	18	P	V
		5149.28	44.27	-9.73	54	34.14	35.39	7.99	33.25	110	18	A	V
	*	5188	100.71	-	-	90.61	35.36	7.99	33.25	110	18	P	V
		5188	93.53	-	-	83.43	35.36	7.99	33.25	110	18	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz
WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 36 5180MHz		10360	44.43	-23.87	68.3	60.17	38.47	11.94	66.15	100	360	P	H
		10360	43.16	-25.14	68.3	58.9	38.47	11.94	66.15	100	360	P	V
802.11n HT20 CH 44 5220MHz		10440	45.2	-23.1	68.3	60.69	38.52	12.09	66.1	100	360	P	H
		10440	45.29	-23.01	68.3	60.78	38.52	12.09	66.1	100	360	P	V
802.11n HT20 CH 48 5240MHz		10480	43.97	-24.33	68.3	59.27	38.56	12.21	66.07	100	360	P	H
		10480	45.18	-23.12	68.3	60.48	38.56	12.21	66.07	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz
WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 38 5190MHz		5146.72	58.98	-15.02	74	48.85	35.39	7.99	33.25	246	188	P	H
		5149.44	46.37	-7.63	54	36.24	35.39	7.99	33.25	246	188	A	H
	*	5200	95.72	-	-	85.63	35.35	7.99	33.25	246	188	P	H
		5200	88.62	-	-	78.53	35.35	7.99	33.25	246	188	A	H
		5390.46	51.07	-22.93	74	40.8	35.2	8.28	33.21	246	188	P	H
		5356.08	42.36	-11.64	54	32.13	35.23	8.22	33.22	246	188	A	H
		5148.96	60.22	-13.78	74	50.09	35.39	7.99	33.25	148	201	P	V
		5149.28	47.69	-6.31	54	37.56	35.39	7.99	33.25	148	201	A	V
	*	5208	97.95	-	-	87.84	35.34	8.01	33.24	148	201	P	V
		5208	89.95	-	-	79.84	35.34	8.01	33.24	148	201	A	V
		5379.66	52.32	-21.68	74	42.05	35.2	8.28	33.21	148	201	P	V
		5366.88	42.44	-11.56	54	32.19	35.22	8.25	33.22	148	201	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz
WIFI 802.11n HT40 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 38 5190MHz		10380	44.07	-24.23	68.3	59.75	38.48	11.98	66.14	100	360	P	H
		10380	43.44	-24.86	68.3	59.12	38.48	11.98	66.14	100	360	P	V
802.11n HT40 CH 46 5230MHz		10460	44.87	-23.43	68.3	60.3	38.53	12.13	66.09	100	360	P	H
		10460	44	-24.3	68.3	59.43	38.53	12.13	66.09	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz
WIFI 802.11ac VHT80 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80 CH 42 5210MHz		5148.48	58.58	-15.42	74	48.45	35.39	7.99	33.25	255	191	P	H
		5149.76	48.63	-5.37	54	38.5	35.39	7.99	33.25	255	191	A	H
	*	5244	94.56	-	-	84.42	35.31	8.07	33.24	255	191	P	H
		5244	86.76	-	-	76.62	35.31	8.07	33.24	255	191	A	H
		5352.66	51.59	-22.41	74	41.36	35.23	8.22	33.22	255	191	P	H
		5351.04	42.86	-11.14	54	32.63	35.23	8.22	33.22	255	191	A	H
		5146.4	58.81	-15.19	74	48.68	35.39	7.99	33.25	317	204	P	V
		5148.96	48.72	-5.28	54	38.59	35.39	7.99	33.25	317	204	A	V
	*	5246	95.57	-	-	85.43	35.31	8.07	33.24	317	204	P	V
		5246	88.61	-	-	78.47	35.31	8.07	33.24	317	204	A	V
		5362.38	51.55	-22.45	74	41.3	35.22	8.25	33.22	317	204	P	V
		5353.02	43.36	-10.64	54	33.13	35.23	8.22	33.22	317	204	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz

WIFI 802.11ac VHT80 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac		10420	44.66	-23.64	68.3	60.21	38.51	12.06	66.12	100	360	P	H
VHT80													
CH 42		10420	44.01	-24.29	68.3	59.56	38.51	12.06	66.12	100	360	P	V
5210MHz													
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 2 - 5250~5350MHz

WIFI 802.11a (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a CH 64 5320MHz	*	5322	101.35	-	-	91.15	35.26	8.17	33.23	357	191	P	H
		5322	93.56	-	-	83.36	35.26	8.17	33.23	357	191	A	H
		5353.5	56.97	-17.03	74	46.74	35.23	8.22	33.22	357	191	P	H
		5350.2	44.14	-9.86	54	33.91	35.23	8.22	33.22	357	191	A	H
	*	5322	103.69	-	-	93.49	35.26	8.17	33.23	314	204	P	V
		5322	96.12	-	-	85.92	35.26	8.17	33.23	314	204	A	V
		5353.2	60.96	-13.04	74	50.73	35.23	8.22	33.22	314	204	P	V
		5350.2	45.52	-8.48	54	35.29	35.23	8.22	33.22	314	204	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 2 5250~5350MHz

WIFI 802.11a (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a		10520	45.23	-23.07	68.3	60.41	38.58	12.28	66.04	100	360	P	H
CH 52 5260MHz		10520	44.91	-23.39	68.3	60.09	38.58	12.28	66.04	100	360	P	V
802.11a		10600	44.39	-29.61	74	59.26	38.64	12.47	65.98	100	360	P	H
CH 60 5300MHz		10600	43.2	-30.8	74	58.07	38.64	12.47	65.98	100	360	P	V
802.11a		10640	45.03	-28.97	74	59.77	38.67	12.55	65.96	100	360	P	H
CH 64 5320MHz		10640	43.57	-30.43	74	58.31	38.67	12.55	65.96	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 2 5250~5350MHz

WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 64 5320MHz	*	5324	100.37	-	-	90.17	35.26	8.17	33.23	305	184	P	H
		5324	92.94	-	-	82.74	35.26	8.17	33.23	305	184	A	H
		5353	54.96	-19.04	74	44.73	35.23	8.22	33.22	305	184	P	H
		5351.6	43.31	-10.69	54	33.08	35.23	8.22	33.22	305	184	A	H
	*	5324	101.85	-	-	91.65	35.26	8.17	33.23	239	199	P	V
		5324	94.07	-	-	83.87	35.26	8.17	33.23	239	199	A	V
		5353	56.39	-17.61	74	46.16	35.23	8.22	33.22	239	199	P	V
		5351	43.65	-10.35	54	33.42	35.23	8.22	33.22	239	199	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 2 5250~5350MHz
WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 52 5260MHz		10520	44.43	-23.87	68.3	59.61	38.58	12.28	66.04	100	360	P	H
		10520	45.47	-22.83	68.3	60.65	38.58	12.28	66.04	100	360	P	V
802.11n HT20 CH 60 5300MHz		10600	43.3	-30.7	74	58.17	38.64	12.47	65.98	100	360	P	H
		10600	43.56	-30.44	74	58.43	38.64	12.47	65.98	100	360	P	V
802.11n HT20 CH 64 5320MHz		10640	45.52	-28.48	74	60.26	38.67	12.55	65.96	100	360	P	H
		10640	44.87	-29.13	74	59.61	38.67	12.55	65.96	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 2 5250~5350MHz

WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 62 5310MHz		5132.48	52.91	-21.09	74	42.77	35.41	7.99	33.26	208	173	P	H
		5139.52	43.89	-10.11	54	33.76	35.39	7.99	33.25	208	173	A	H
	*	5326	96.38	-	-	86.18	35.26	8.17	33.23	208	173	P	H
		5326	89.41	-	-	79.21	35.26	8.17	33.23	208	173	A	H
		5350.6	60.97	-13.03	74	50.74	35.23	8.22	33.22	208	173	P	H
		5350.7	48.75	-5.25	54	38.52	35.23	8.22	33.22	208	173	A	H
		5113.44	52.81	-21.19	74	42.66	35.42	7.99	33.26	129	201	P	V
		5101.44	43.95	-10.05	54	33.79	35.43	7.99	33.26	129	201	A	V
	*	5328	98.96	-	-	88.74	35.24	8.2	33.22	129	201	P	V
		5328	91.35	-	-	81.13	35.24	8.2	33.22	129	201	A	V
		5350.8	62.78	-11.22	74	52.55	35.23	8.22	33.22	129	201	P	V
		5350.4	50.14	-3.86	54	39.91	35.23	8.22	33.22	129	201	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 2 5250~5350MHz
WIFI 802.11n HT40 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 54 5270MHz		10540	45.07	-23.23	68.3	60.18	38.6	12.32	66.03	100	360	P	H
		10540	44.74	-23.56	68.3	59.85	38.6	12.32	66.03	100	360	P	V
802.11n HT40 CH 62 5310MHz		10620	45.31	-28.69	74	60.11	38.66	12.51	65.97	100	360	P	H
		10620	44.01	-29.99	74	58.81	38.66	12.51	65.97	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 2 5250~5350MHz
WIFI 802.11ac VHT80 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80 CH 58 5290MHz		5111.36	52.5	-21.5	74	42.35	35.42	7.99	33.26	242	199	P	H
		5114.56	44.24	-9.76	54	34.09	35.42	7.99	33.26	242	199	A	H
	*	5324	91.11	-	-	80.91	35.26	8.17	33.23	242	199	P	H
		5324	84.42	-	-	74.22	35.26	8.17	33.23	242	199	A	H
		5354.6	58.8	-15.2	74	48.57	35.23	8.22	33.22	242	199	P	H
		5350.3	47.25	-6.75	54	37.02	35.23	8.22	33.22	242	199	A	H
		5135.04	52.65	-21.35	74	42.51	35.41	7.99	33.26	293	200	P	V
		5130.4	44.13	-9.87	54	33.99	35.41	7.99	33.26	293	200	A	V
	*	5308	93.8	-	-	83.61	35.27	8.15	33.23	293	200	P	V
		5308	86.83	-	-	76.64	35.27	8.15	33.23	293	200	A	V
		5350	60.4	-13.6	74	50.17	35.23	8.22	33.22	293	200	P	V
		5351.7	50.26	-3.74	54	40.03	35.23	8.22	33.22	293	200	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												


Band 2 5250~5350MHz
WIFI 802.11ac VHT80 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac		10580	43.11	-25.19	68.3	58.05	38.63	12.43	66	100	360	P	H
VHT80													
CH 58		10580	42.8	-25.5	68.3	57.74	38.63	12.43	66	100	360	P	V
5290MHz													
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - 5470~5725MHz

WIFI 802.11a (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a CH 100 5500MHz		5455.6	53	-21	74	42.68	35.15	8.37	33.2	314	194	P	H
		5466.64	54.43	-13.87	68.3	44.1	35.14	8.39	33.2	314	194	P	H
		5452.08	43.28	-10.72	54	32.96	35.15	8.37	33.2	314	194	A	H
	*	5502	101.12	-	-	90.78	35.11	8.43	33.2	314	194	P	H
		5502	93.81	-	-	83.47	35.11	8.43	33.2	314	194	A	H
		5459.92	54.26	-19.74	74	43.94	35.15	8.37	33.2	100	190	P	V
		5465.04	57.61	-10.69	68.3	47.28	35.14	8.39	33.2	100	190	P	V
		5458.32	43.97	-10.03	54	33.65	35.15	8.37	33.2	100	190	A	V
	*	5496	102.89	-	-	92.56	35.12	8.41	33.2	100	190	P	V
		5496	95.62	-	-	85.29	35.12	8.41	33.2	100	190	A	V
802.11a CH 140 5700MHz	*	5708	100.67	-	-	90.32	34.94	8.58	33.17	305	199	P	H
		5708	92.91	-	-	82.56	34.94	8.58	33.17	305	199	A	H
		5732.6	59.91	-8.39	68.3	49.58	34.92	8.58	33.17	305	199	P	H
	*	5694	102.12	-	-	91.77	34.95	8.57	33.17	100	195	P	V
		5694	94.67	-	-	84.32	34.95	8.57	33.17	100	195	A	V
		5733.24	59.08	-9.22	68.3	48.75	34.92	8.58	33.17	100	195	P	V
Remark		1. No other spurious found.											
		2. All results are PASS against Peak and Average limit line.											



Band 3 - 5470~5725MHz

WIFI 802.11a (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a		11000	45.4	-28.6	74	58.83	38.93	13.34	65.7	100	360	P	H
CH 100		11000	45.56	-28.44	74	58.99	38.93	13.34	65.7	100	360	P	V
5500MHz													
802.11a		11160	47.69	-26.31	74	61.03	39.05	13.19	65.58	100	360	P	H
CH 116		11160	46.51	-27.49	74	59.85	39.05	13.19	65.58	100	360	P	V
5580MHz													
802.11a		11400	44.91	-29.09	74	58.1	39.23	12.99	65.41	100	360	P	H
CH 140		11400	44.94	-29.06	74	58.13	39.23	12.99	65.41	100	360	P	V
5700MHz													
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - 5470~5725MHz
WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 100 5500MHz		5438.96	51.54	-22.46	74	41.25	35.16	8.34	33.21	321	178	P	H
		5469.04	53.02	-15.28	68.3	42.69	35.14	8.39	33.2	321	178	P	H
		5458.16	42.55	-11.45	54	32.23	35.15	8.37	33.2	321	178	A	H
	*	5496	98.45	-	-	88.12	35.12	8.41	33.2	321	178	P	H
		5496	91.14	-	-	80.81	35.12	8.41	33.2	321	178	A	H
		5405.52	53.46	-20.54	74	43.18	35.19	8.3	33.21	224	197	P	V
		5465.84	55.05	-13.25	68.3	44.72	35.14	8.39	33.2	224	197	P	V
		5459.92	42.98	-11.02	54	32.66	35.15	8.37	33.2	224	197	A	V
	*	5504	101.39	-	-	91.05	35.11	8.43	33.2	224	197	P	V
		5504	93.91	-	-	83.57	35.11	8.43	33.2	224	197	A	V
802.11n HT20 CH 140 5700MHz	*	5692	98.57	-	-	88.22	34.95	8.57	33.17	299	184	P	H
		5692	90.83	-	-	80.48	34.95	8.57	33.17	299	184	A	H
		5725.16	58.25	-10.05	68.3	47.92	34.92	8.58	33.17	299	184	P	H
	*	5708	100.94	-	-	90.59	34.94	8.58	33.17	222	209	P	V
		5708	92.79	-	-	82.44	34.94	8.58	33.17	222	209	A	V
		5725.48	56.87	-11.43	68.3	46.54	34.92	8.58	33.17	222	209	P	V
Remark		1. No other spurious found. 2. All results are PASS against Peak and Average limit line.											



Band 3 - 5470~5725MHz
WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 100 5500MHz		11000	47.37	-26.63	74	60.8	38.93	13.34	65.7	100	360	P	H
		11000	45.86	-28.14	74	59.29	38.93	13.34	65.7	100	360	P	V
802.11n HT20 CH 116 5580MHz		11160	47.14	-26.86	74	60.48	39.05	13.19	65.58	100	360	P	H
		11160	47.15	-26.85	74	60.49	39.05	13.19	65.58	100	360	P	V
802.11n HT20 CH 140 5700MHz		11140	46.04	-27.96	74	59.4	39.03	13.22	65.61	100	360	P	H
		11140	46.79	-27.21	74	60.15	39.03	13.22	65.61	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - 5470~5725MHz
WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 102 5510MHz		5459.12	53.34	-20.66	74	43.02	35.15	8.37	33.2	309	180	P	H
		5464.56	57.13	-11.17	68.3	46.8	35.14	8.39	33.2	309	180	P	H
		5459.28	44.09	-9.91	54	33.77	35.15	8.37	33.2	309	180	A	H
	*	5516	95.77	-	-	85.42	35.09	8.45	33.19	309	180	P	H
		5516	88.81	-	-	78.46	35.09	8.45	33.19	309	180	A	H
		5749	52.16	-16.14	68.3	41.83	34.91	8.59	33.17	309	180	P	H
		5455.76	56.97	-17.03	74	46.65	35.15	8.37	33.2	127	191	P	V
		5470	60.15	-8.15	68.3	49.82	35.14	8.39	33.2	127	191	P	V
		5457.84	44.77	-9.23	54	34.45	35.15	8.37	33.2	127	191	A	V
	*	5516	97.38	-	-	87.03	35.09	8.45	33.19	127	191	P	V
		5516	90.55	-	-	80.2	35.09	8.45	33.19	127	191	A	V
		5737.4	51.8	-16.5	68.3	41.47	34.91	8.59	33.17	127	191	P	V
802.11n HT40 CH 134 5670MHz		5460	51.45	-22.55	74	41.13	35.15	8.37	33.2	315	183	P	H
		5460.24	51.49	-16.81	68.3	41.17	35.15	8.37	33.2	315	183	P	H
		5442.32	42.86	-11.14	54	32.57	35.16	8.34	33.21	315	183	A	H
	*	5686	96.05	-	-	85.7	34.95	8.57	33.17	315	183	P	H
		5686	89.21	-	-	78.86	34.95	8.57	33.17	315	183	A	H
		5726.12	52.66	-15.64	68.3	42.33	34.92	8.58	33.17	315	183	P	H
		5459.6	51.03	-22.97	74	40.71	35.15	8.37	33.2	236	193	P	V
		5460.24	52.1	-16.2	68.3	41.78	35.15	8.37	33.2	236	193	P	V
		5414.48	42.63	-11.37	54	32.34	35.18	8.32	33.21	236	193	A	V
	*	5674	96.75	-	-	86.38	34.97	8.57	33.17	236	193	P	V
		5674	90.12	-	-	79.75	34.97	8.57	33.17	236	193	A	V
		5726.36	53.61	-14.69	68.3	43.28	34.92	8.58	33.17	236	193	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - 5470~5725MHz
WIFI 802.11n HT40 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 102 5510MHz		11020	46.25	-27.75	74	59.68	38.94	13.32	65.69	100	360	P	H
		11020	45.69	-28.31	74	59.12	38.94	13.32	65.69	100	360	P	V
802.11n HT40 CH 110 5550MHz		11100	45.8	-28.2	74	59.18	39	13.25	65.63	100	360	P	H
		11100	46.19	-27.81	74	59.57	39	13.25	65.63	100	360	P	V
802.11n HT40 CH 134 5670MHz		11340	44.06	-29.94	74	57.3	39.18	13.04	65.46	100	360	P	H
		11340	45.44	-28.56	74	58.68	39.18	13.04	65.46	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - 5470~5725MHz
WIFI 802.11ac VHT80 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80 CH 106 5530MHz		5454	53.97	-20.03	74	43.65	35.15	8.37	33.2	243	188	P	H
		5467.12	55.83	-12.47	68.3	45.5	35.14	8.39	33.2	243	188	P	H
		5458.96	43.62	-10.38	54	33.3	35.15	8.37	33.2	243	188	A	H
	*	5510	90.31	-	-	79.97	35.11	8.43	33.2	243	188	P	H
		5510	83.58	-	-	73.24	35.11	8.43	33.2	243	188	A	H
		5757.88	51.88	-16.42	68.3	41.57	34.89	8.59	33.17	243	188	P	H
		5448.72	55.95	-18.05	74	45.63	35.15	8.37	33.2	120	199	P	V
		5466.96	57.44	-10.86	68.3	47.11	35.14	8.39	33.2	120	199	P	V
		5454.64	45.38	-8.62	54	35.06	35.15	8.37	33.2	120	199	A	V
	*	5496	93.72	-	-	83.39	35.12	8.41	33.2	120	199	P	V
		5496	86.91	-	-	76.58	35.12	8.41	33.2	120	199	A	V
		5757.96	51.12	-17.18	68.3	40.81	34.89	8.59	33.17	120	199	P	V
802.11ac VHT80 CH 122 5610MHz		5426.16	51.23	-22.77	74	40.94	35.18	8.32	33.21	307	189	P	H
		5460.56	51.06	-17.24	68.3	40.74	35.15	8.37	33.2	307	189	P	H
		5452.88	42.65	-11.35	54	32.33	35.15	8.37	33.2	307	189	A	H
	*	5594	91.35	-	-	80.96	35.04	8.53	33.18	307	189	P	H
		5594	84.92	-	-	74.53	35.04	8.53	33.18	307	189	A	H
		5749.56	52.79	-15.51	68.3	42.46	34.91	8.59	33.17	307	189	P	H
		5438.16	52.03	-21.97	74	41.74	35.16	8.34	33.21	120	196	P	V
		5462.96	51.23	-17.07	68.3	40.9	35.14	8.39	33.2	120	196	P	V
		5452.88	43.07	-10.93	54	32.75	35.15	8.37	33.2	120	196	A	V
	*	5602	93.02	-	-	82.62	35.03	8.55	33.18	120	196	P	V
		5602	86.37	-	-	75.97	35.03	8.55	33.18	120	196	A	V
		5740.6	51.37	-16.93	68.3	41.04	34.91	8.59	33.17	120	196	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 5470~5725MHz

WIFI 802.11ac VHT80 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80 CH 106 5530MHz		11060	45.71	-28.29	74	59.11	38.98	13.28	65.66	100	360	P	H
		11060	45.56	-28.44	74	58.96	38.98	13.28	65.66	100	360	P	V
802.11ac VHT80 CH 122 5610MHz		11220	45.7	-28.3	74	59.01	39.09	13.15	65.55	100	360	P	H
		11220	44.79	-29.21	74	58.1	39.09	13.15	65.55	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

WIFI 802.11acVHT80 (LF @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11ac VHT80 LF		31.94	22.2	-17.8	40	28.56	24.1	0.6	31.06	100	214	P	H
		131.85	15.4	-28.1	43.5	27.64	17.34	1.25	30.83	-	-	P	H
		412.18	24.08	-21.92	46	31.49	21.88	2.23	31.52	-	-	P	H
		500.45	26.76	-19.24	46	32.07	23.8	2.49	31.6	-	-	P	H
		641.1	25.08	-20.92	46	27.06	25.93	2.85	30.76	-	-	P	H
		937.92	27.56	-18.44	46	25.93	29.42	3.46	31.25	-	-	P	H
		39.7	25.02	-14.98	40	35.82	19.7	0.7	31.2	100	21	P	V
		130.88	16.02	-27.48	43.5	28.28	17.32	1.24	30.82	-	-	P	V
		418.97	25.26	-20.74	46	32.53	22.02	2.25	31.54	-	-	P	V
		632.37	24.3	-21.7	46	26.54	25.86	2.82	30.92	-	-	P	V
		761.38	26.52	-19.48	46	26.66	27.56	3.08	30.78	-	-	P	V
		955.38	28.65	-17.35	46	26.89	29.61	3.47	31.32	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												

**Note symbol**

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	P eak or A verage
H/V	H orizontal or V ertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Level(dBμV/m) =

Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)

= 55.45 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 55.45(dBμV/m) – 74(dBμV/m)

= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)

= 43.54 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 43.54(dBμV/m) – 54(dBμV/m)

= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.




Appendix D. Duty Cycle Plots


Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11a	94.04	2.058	0.486	1KHz
802.11n HT20	92.36	1.928	0.519	1KHz
802.11n HT40	90.97	0.949	1.053	3KHz
802.11ac VHT80	82.60	0.461	2.170	3KHz



802.11a

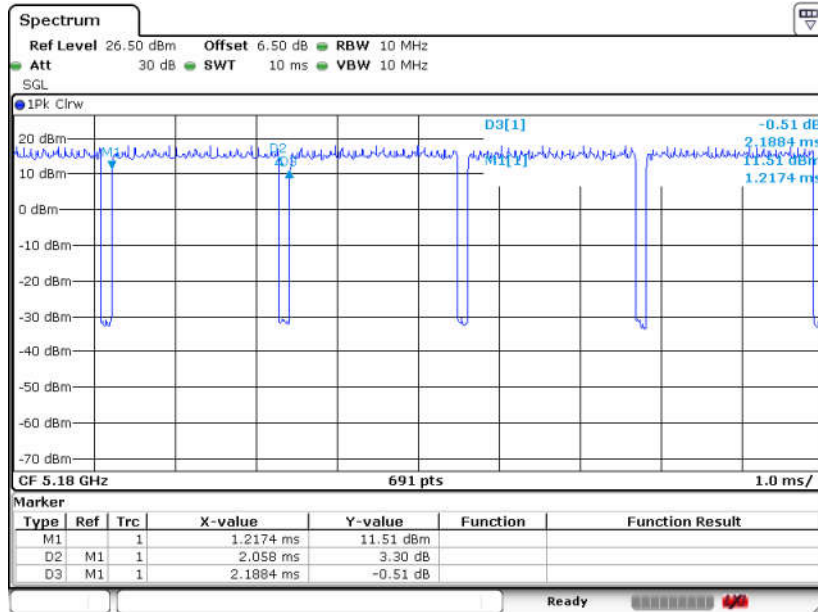


802.11n HT20

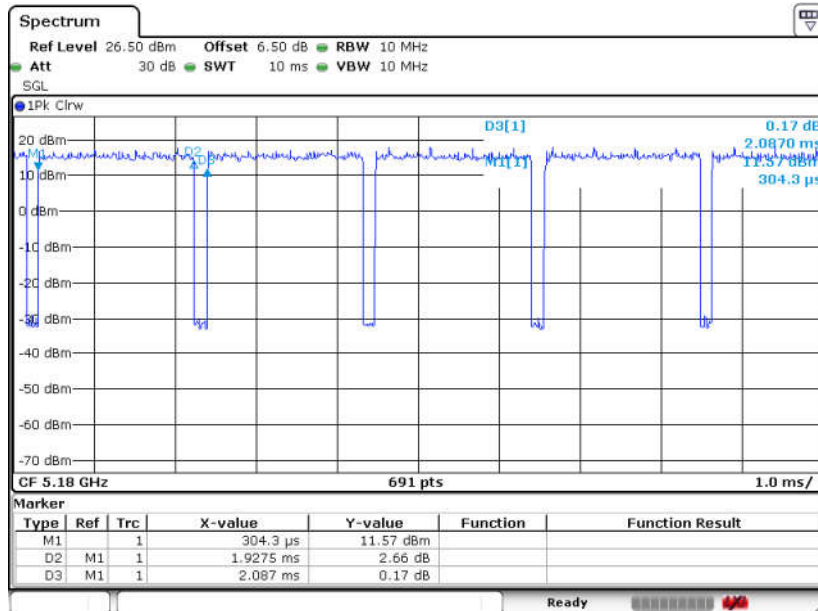



802.11n HT40

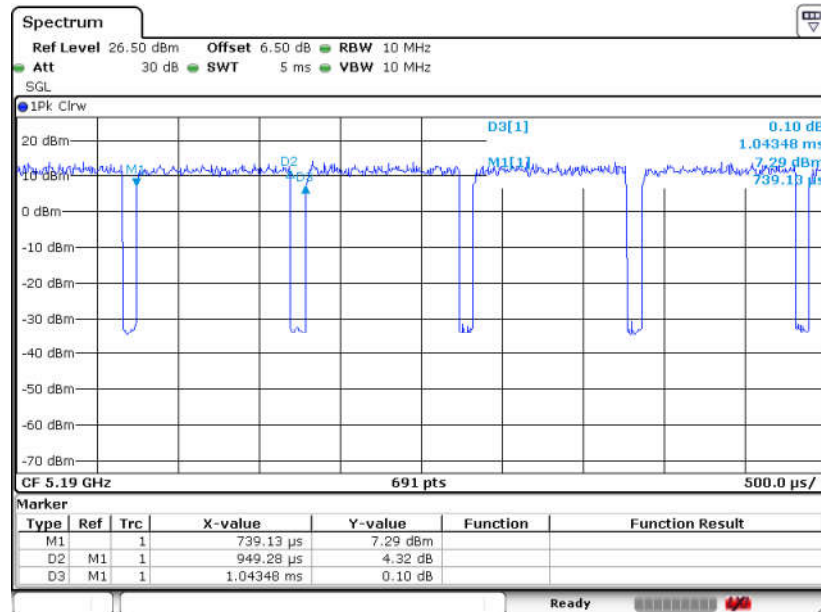

802.11ac VHT80

