

FCC RF Test Report

APPLICANT : Honeywell International Inc
EQUIPMENT : Dolphin 7800
BRAND NAME : Honeywell
MODEL NAME : Dolphin® 7800
FCC ID : HD57800LC
STANDARD : FCC 47 CFR Part 2, 22(H), 24(E)
CLASSIFICATION : PCS Licensed Transmitter Held to Ear (PCE)
Tx/Rx FREQUENCY RANGE : CDMA2000 BC0 : 824.70 ~ 848.31 MHz /
869.70 ~ 893.31 MHz
CDMA2000 BC1 : 1851.25 ~ 1908.75 MHz /
1931.25 ~ 1988.75 MHz
MAX. ERP/EIRP POWER : <EUT with Keypad 1>
CDMA2000 BC0 : 0.1318 W
CDMA2000 BC1 : 0.2133 W
<EUT with Keypad 2>
CDMA2000 BC0 : 0.1285 W
CDMA2000 BC1 : 0.1057 W

The product was received on Feb. 07, 2012 and completely tested on Feb. 23, 2012. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI / TIA / EIA-603-C-2004 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:



Jones Tsai / Manager



SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant.....	5
1.2 Manufacturer	5
1.3 Feature of Equipment Under Test.....	5
1.4 Emission Designator	6
1.5 Testing Site.....	6
1.6 Applied Standards	7
1.7 Ancillary Equipment List.....	7
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	8
2.1 Test Mode.....	8
2.2 Connection Diagram of Test System	9
3 TEST RESULT.....	10
3.1 Conducted Output Power Measurement.....	10
3.2 Effective Radiated Power and Effective Isotropic Radiated Power Measurement	12
3.3 Occupied Bandwidth Measurement	16
3.4 Band Edge Measurement.....	19
3.5 Conducted Emission Measurement	22
3.6 Field Strength of Spurious Radiation Measurement	28
3.7 Frequency Stability Measurement.....	38
4 LIST OF MEASURING EQUIPMENT	42
5 UNCERTAINTY OF EVALUATION	43
APPENDIX A. PHOTOGRAPHS OF EUT	
APPENDIX B. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG162005-05	Rev. 01	Initial issue of report	Mar. 08, 2012

SUMMARY OF TEST RESULT

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.1	§2.1046	N/A	Conducted Output Power	N/A	PASS	-
3.2	§22.913(a)(2)	RSS-132(4.4) SRSP-503(5.1.3)	Effective Radiated Power	< 7 Watts	PASS	-
3.2	§24.232(c)	RSS-133 (6.4) SRSP-510(5.1.2)	Equivalent Isotropic Radiated Power	< 2 Watts	PASS	-
3.3	§2.1049 §22.917(a) §24.238(a)	N/A	Occupied Bandwidth	N/A	PASS	-
3.4	§2.1051 §22.917(a) §24.238(a)	RSS-132 (4.5.1) RSS-133 (6.5.1)	Band Edge Measurement	< 43+10log ₁₀ (P[Watts])	PASS	-
3.5	§2.1051 §22.917(a) §24.238(a)	RSS-132 (4.5.1) RSS-133 (6.5.1)	Conducted Emission	< 43+10log ₁₀ (P[Watts])	PASS	-
3.6	§2.1053 §22.917(a) §24.238(a)	RSS-132 (4.5.1) RSS-133 (6.5.1)	Field Strength of Spurious Radiation	< 43+10log ₁₀ (P[Watts])	PASS	Under limit 23.61 dB at 5636.000 MHz
3.7	§2.1055 §22.355 §24.235	RSS-132(4.3) RSS-133(6.3)	Frequency Stability for Temperature & Voltage	< 2.5 ppm	PASS	-

1 General Description

1.1 Applicant

Honeywell International Inc
9680 Old Bailes Road, Fort Mill, SC 29707 USA

1.2 Manufacturer

Honeywell International Inc
9680 Old Bailes Road, Fort Mill, SC 29707 USA

1.3 Feature of Equipment Under Test

Product Feature & Specification	
Equipment	Dolphin 7800
Brand Name	Honeywell
Model Name	Dolphin® 7800
FCC ID	HD57800LC
Integrated Module	Brand Name : Sierra wireless Model Name : MC5728V
Tx Frequency	CDMA2000 BC0 : 824 MHz ~ 849 MHz CDMA2000 BC1 : 1850 MHz ~1910 MHz
Rx Frequency	CDMA2000 BC0 : 869 MHz ~ 894 MHz CDMA2000 BC1 : 1930 MHz ~ 1990 MHz
Maximum Output Power to Antenna	CDMA2000 BC0 : 24.44 dBm CDMA2000 BC1 : 24.28 dBm
Antenna Type	Fixed Internal Antenna
HW Version	010
SW Version	01
Type of Modulation	QPSK
EUT Stage	Production Unit

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Emission Designator

<EUT with Keypad 1>

FCC Rule	System	Type of Modulation	Emission Designator	Maximum ERP/EIRP
Part 22	CDMA2000 BC0 1xEV-DO Rev. 0	QPSK	1M28F9W	0.1318 W
Part 24	CDMA2000 BC1 1xEV-DO Rev. 0	QPSK	1M28F9W	0.2133 W

<EUT with Keypad 2>

FCC Rule	System	Type of Modulation	Maximum ERP/EIRP
Part 22	CDMA2000 BC0 1xEV-DO Rev. 0	QPSK	0.1285 W
Part 24	CDMA2000 BC1 1xEV-DO Rev. 0	QPSK	0.1057 W

1.5 Testing Site

Test Site	SPORTON INTERNATIONAL INC.		
Test Site Location	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978		
Test Site No.	Sporton Site No.		FCC/IC Registration No.
	TH02-HY	03CH06-HY	722060/4086B-1

1.6 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ Preliminary Guidance for Receiving Applications for Certification of 3G Device. May 9, 2006.
- ♦ FCC 47 CFR Part 2, 22(H), 24(E)
- ♦ ANSI / TIA / EIA-603-C-2004
- ♦ IC RSS-132 Issue 2
- ♦ IC RSS-133 Issue 5

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

1.7 Ancillary Equipment List

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	Agilent	8960	N/A	N/A	Unshielded, 1.8 m
2.	Notebook	DELL	Vostro 1510	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m

2 Test Configuration of Equipment Under Test

2.1 Test Mode

During all testing, EUT is in link mode with base station emulator at maximum power level. The spurious emission measurements were carried out in semi-anechoic chamber with 3-meter test range, and EUT is rotated on three test planes to find out the worst emission.

Frequency range investigated for radiated emission is as follows:

1. 30 MHz to 9000 MHz for CDMA2000 BC0.
2. 30 MHz to 19000 MHz for CDMA2000 BC1.

Test Modes		
Band	Radiated TCs	Conducted TCs
CDMA2000 BC0	■ 1xEV-DO Rev. 0 Link Mode for Keypad 1 ■ 1xEV-DO Rev. 0 Link Mode for Keypad 2	■ 1xEV-DO Rev. 0 Link Mode
CDMA2000 BC1	■ 1xEV-DO Rev. 0 Link Mode for Keypad 1 ■ 1xEV-DO Rev. 0 Link Mode for Keypad 2	■ 1xEV-DO Rev. 0 Link Mode


Note:

1. The maximum RF output power levels are 1xEV-DO Rev. 0 RTAP 153.6K mode for CDMA2000 BC0 and 1xEV-DO Rev. 0 RTAP 153.6K mode for CDMA2000 BC1 on QPSK Link; only these modes were used for all tests.
2. Because there are individual antennas for each WWAN, WLAN, and Bluetooth, the co-location test modes are not required.

The conducted power table is as follows:

Conducted Power (*Unit: dBm)						
Band	CDMA2000 BC0			CDMA2000 BC1		
Channel	1013	384	777	25	600	1175
Frequency	824.7	836.52	848.31	1851.25	1880	1908.75
1xRTT RC1+SO55	24.37	24.27	24.20	24.19	24.05	24.00
1xRTT RC3+SO55	24.36	24.20	24.11	24.14	24.00	23.96
1xRTT RC3+SO32 (+F-SCH)	24.40	24.24	24.18	24.20	24.02	23.98
1xRTT RC3+SO32 (+SCH)	24.39	24.23	24.14	24.19	24.01	23.96
1xEVDO RTAP 153.6K	24.44	24.25	24.18	24.28	24.22	24.16
1xEVDO RETAP 4096K	24.39	24.33	24.21	24.20	24.16	24.00

2.2 Connection Diagram of Test System

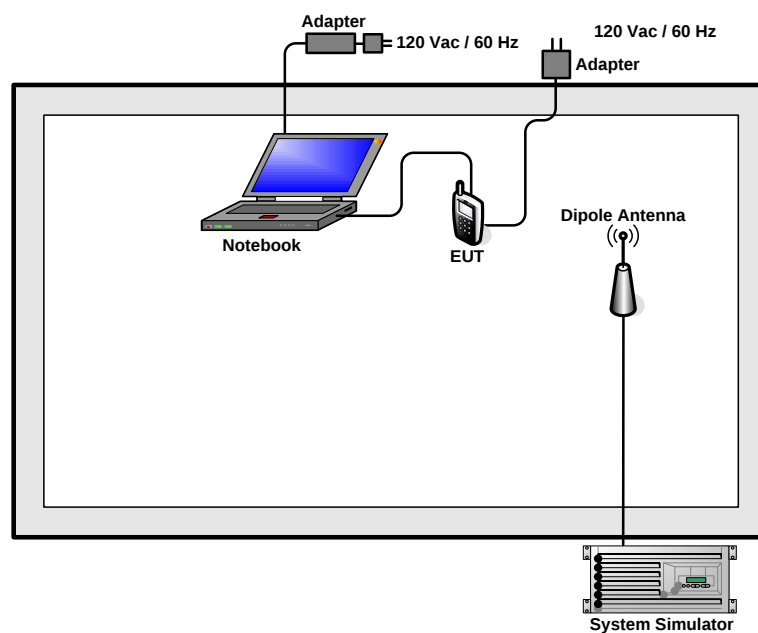

3 Test Result

3.1 Conducted Output Power Measurement

3.1.1 Description of the Conducted Output Power Measurement

A base station simulator was used to establish communication with the EUT. Its parameters were set to transmit the maximum power on the EUT. The measured power in the radio frequency on the transmitter output terminals shall be reported.


3.1.2 Measuring Instruments

See list of measuring instruments of this test report.

3.1.3 Test Procedures

1. The transmitter output port was connected to base station.
2. Set EUT at maximum power through base station.
3. Select lowest, middle, and highest channels for each band and different modulation.

3.1.4 Test Setup

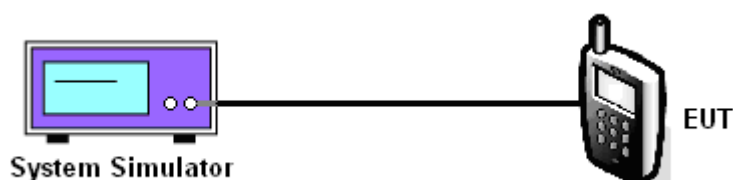

3.1.5 Test Result of Conducted Output Power

CDMA2000 BC0			
Test Mode	CDMA 2000 1xEV-DO Rev. 0		
Test Status	RTAP 153.6K		
Channel	1013 (Low)	384 (Mid)	777 (High)
Frequency (MHz)	824.7	836.52	848.31
Conducted Power (dBm)	24.44	24.25	24.18
Conducted Power (Watts)	0.28	0.27	0.26

CDMA2000 BC1			
Test Mode	CDMA 2000 1xEV-DO Rev. 0		
Test Status	RTAP 153.6K		
Channel	25 (Low)	600 (Mid)	1175 (High)
Frequency (MHz)	1851.25	1880	1908.75
Conducted Power (dBm)	24.28	24.22	24.16
Conducted Power (Watts)	0.27	0.26	0.26

3.2 Effective Radiated Power and Effective Isotropic Radiated Power Measurement

3.2.1 Description of the ERP/EIRP Measurement

ERP/EIRP is measured by substitution method according to ANSI / TIA / EIA-603-C-2004. The ERP of mobile transmitters must not exceed 7 Watts and the EIRP of mobile transmitters are limited to 2 Watts.


3.2.2 Measuring Instruments

See list of measuring instruments of this test report.

3.2.3 Test Procedures

1. The EUT was placed on an non-conductive rotating platform with 0.8 meter height in a semi-anechoic chamber. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and a spectrum analyzer with RBW= 3MHz,VBW= 3MHz, and peak detector settings.
2. During the measurement, the EUT was enforced in maximum power and linked with a base station. The highest emission was recorded from analyzer power level (LVL) from the 360 degrees rotation of the turntable and the test antenna raised and lowered over a range from 1 to 4 meters in both horizontally and vertically polarized orientations.
3. Effective Isotropic Radiated Power(EIRP) was measured by substitution method according to TIA/EIA-603-C. The EUT was replaced by dipole antenna (substitution antenna) at same location, and then a known power from S.G. was applied into the dipole antenna through a Tx cable, and then recorded the maximum Analyzer reading through raised and lowered the test antenna. The correction factor (in dB) = S.G. - Tx Cable loss + Substitution antenna gain - Analyzer reading. Then the EUT's EIRP was calculated with the correction factor, $EIRP = LVL + \text{Correction factor}$ and $ERP = EIRP - 2.15$.

3.2.4 Test Setup

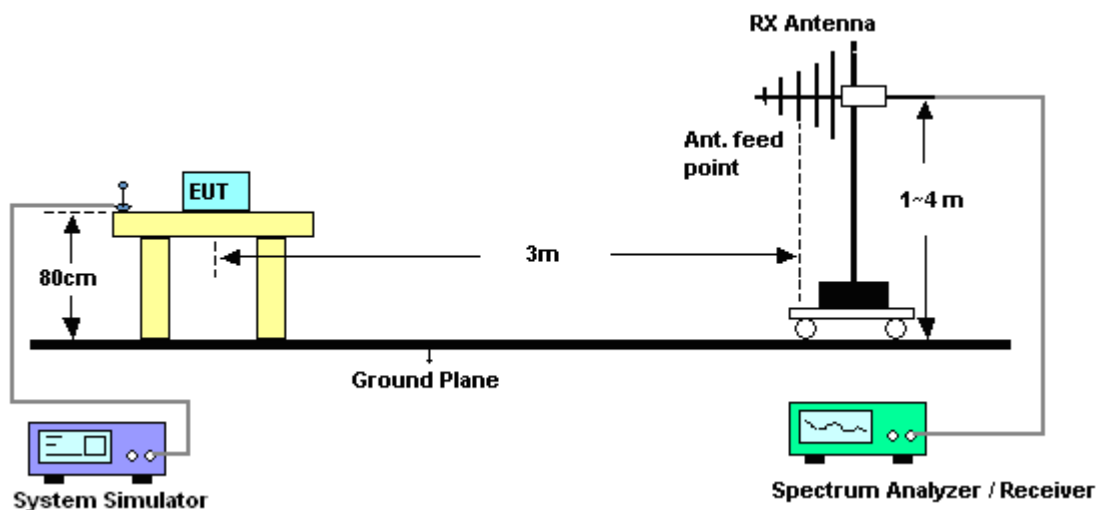

3.2.5 Test Result of ERP

<EUT with Keypad 1>

CDMA2000 BC0 1xEV-DO Rev. 0_RTAP 153.6K Radiated Power ERP				
Horizontal Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)
824.70	-6.03	29.38	21.20	0.1318
836.52	-6.16	29.44	21.13	0.1297
848.31	-7.37	29.42	19.90	0.0977
Vertical Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)
824.70	-11.14	31.45	18.16	0.0655
836.52	-10.68	31.14	18.31	0.0678
848.31	-11.74	31.16	17.27	0.0533

* ERP = LVL (dBm) + Correction Factor (dB) – 2.15

<EUT with Keypad 2>

CDMA2000 BC0 1xEV-DO Rev. 0_RTAP 153.6K Radiated Power ERP				
Horizontal Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)
824.70	-6.74	29.38	20.49	0.1119
836.52	-6.20	29.44	21.09	0.1285
848.31	-8.03	29.42	19.24	0.0839
Vertical Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)
824.70	-11.92	31.45	17.38	0.0547
836.52	-10.45	31.14	18.54	0.0714
848.31	-12.07	31.16	16.94	0.0494

* ERP = LVL (dBm) + Correction Factor (dB) – 2.15

3.2.6 Test Result of EIRP

<EUT with Keypad 1>

CDMA2000 BC1 1xEV-DO Rev. 0_RTAP 153.6K Radiated Power EIRP				
Horizontal Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (W)
1851.25	-19.14	41.93	22.79	0.1901
1880.00	-19.48	42.33	22.85	0.1928
1908.75	-18.75	42.04	23.29	0.2133
Vertical Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (W)
1851.25	-22.45	41.18	18.73	0.0746
1880.00	-23.89	42.59	18.70	0.0741
1908.75	-22.36	41.92	19.56	0.0904

* EIRP = LVL (dBm) + Correction Factor (dB)

<EUT with Keypad 2>

CDMA2000 BC1 1xEV-DO Rev. 0_RTAP 153.6K Radiated Power EIRP				
Horizontal Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (W)
1851.25	-22.02	41.93	19.91	0.0979
1880.00	-22.24	42.33	20.09	0.1021
1908.75	-21.80	42.04	20.24	0.1057
Vertical Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (W)
1851.25	-23.06	41.18	18.12	0.0649
1880.00	-22.94	42.59	19.65	0.0923
1908.75	-22.69	41.92	19.23	0.0838

* EIRP = LVL (dBm) + Correction Factor (dB)

3.3 Occupied Bandwidth Measurement

3.3.1 Description of Occupied Bandwidth Measurement

The emission bandwidth is defined as the width of the signal between two points, located at the 2 sides of the carrier frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.


3.3.2 Measuring Instruments

See list of measuring instruments of this test report.

3.3.3 Test Procedures

1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. The 99% and 26 dB occupied bandwidth (BW) of the middle channel for the highest RF powers were measured.


3.3.4 Test Setup

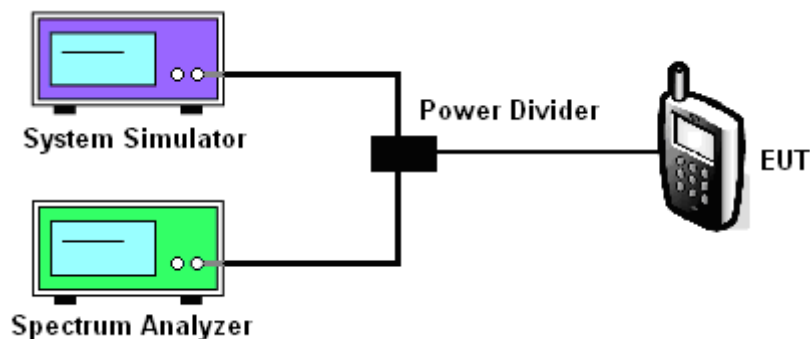

3.3.5 Test Result (Plots) of Occupied Bandwidth


Band :	CDMA2000 BC0	Power Stage :	High
Test Mode :	1xEV-DO Rev. 0_RTAP 153.6K		

99% Occupied Bandwidth Plot on Channel 384

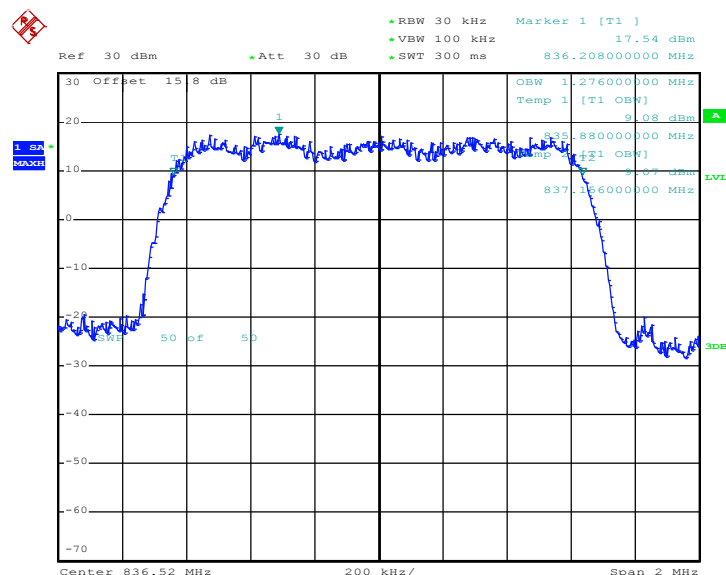


Date: 15.FEB.2012 16:51:09

26dB Bandwidth Plot on Channel 384

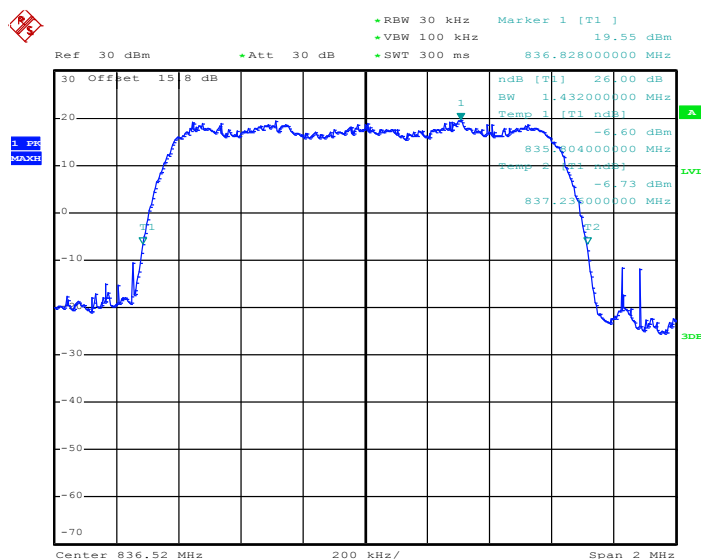


Date: 15.FEB.2012 16:34:32

Band :	CDMA2000 BC1	Power Stage :	High
Test Mode :	1xEV-DO Rev. 0_RTAP 153.6K		

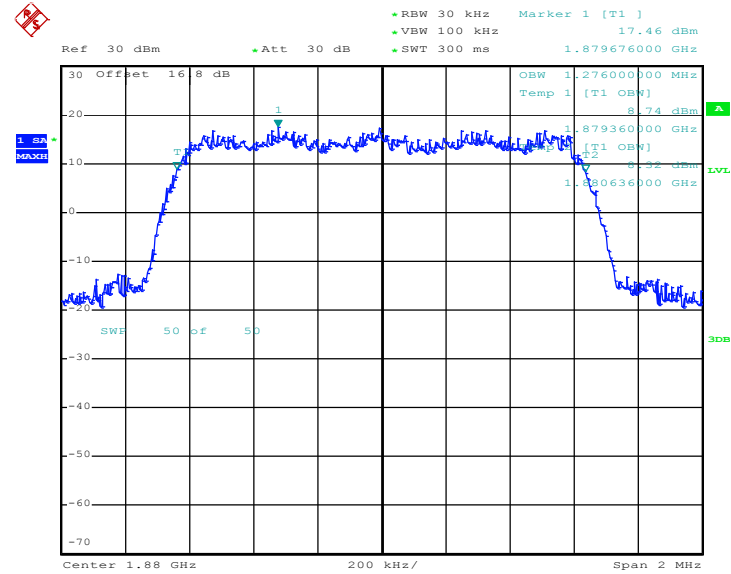99% Occupied Bandwidth Plot on Channel 600


Date: 15.FEB.2012 18:26:40

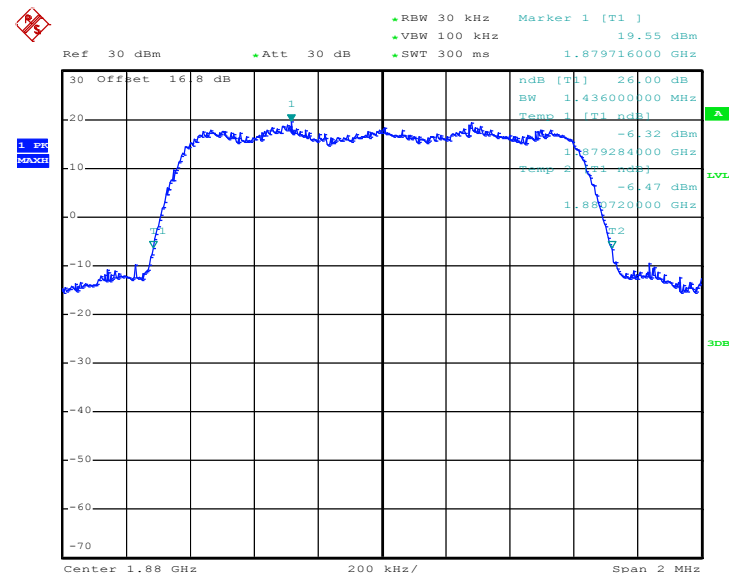26dB Bandwidth Plot on Channel 600


Date: 15.FEB.2012 18:10:05

3.4 Band Edge Measurement

3.4.1 Description of Band Edge Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

3.4.2 Measuring Instruments


See list of measuring instruments of this test report.

3.4.3 Test Procedures

1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. The band edges of low and high channels for the highest RF powers were measured. Setting RBW as roughly BW/100.
3. The RBW was replaced by 10 kHz, due to the spectrum analyzer IF-Filter including an excess of the limit. A worst case correction factor of $10 \log (1\% \text{ BW/measurement RBW})$ was implemented.

3.4.4 Test Setup


<Conducted Band Edge >

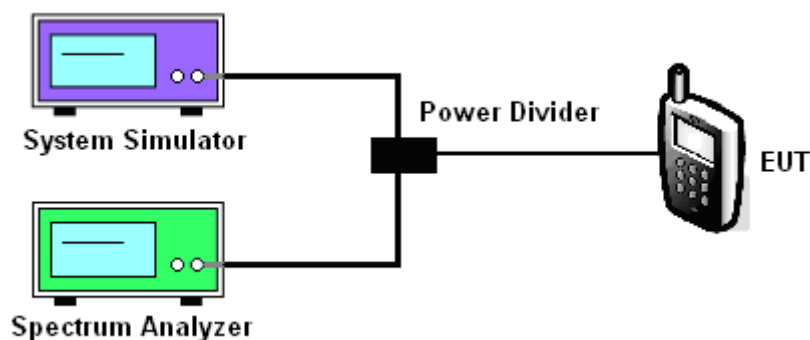

3.4.5 Test Result (Plots) of Conducted Band Edge


Band :	CDMA2000 BC0	Power Stage :	High
Test Mode :	1xEV-DO Rev. 0_RTAP 153.6K		

Lower Band Edge Plot on Channel 1013

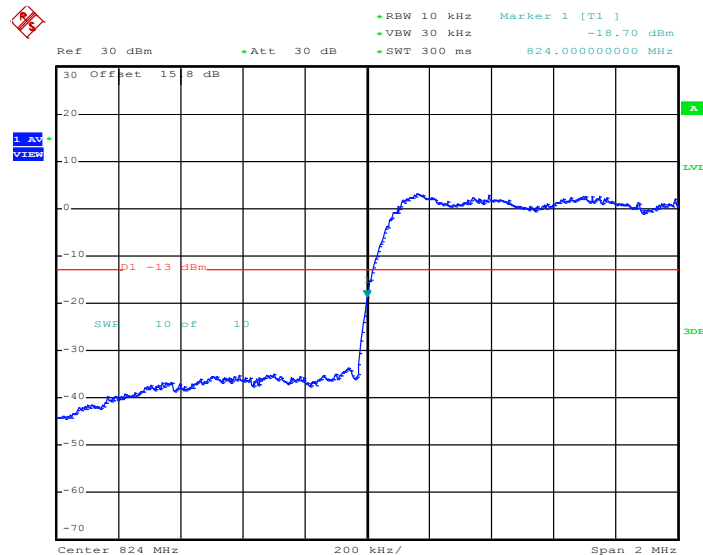


Date: 15.FEB.2012 17:21:15

Higher Band Edge Plot on Channel 777

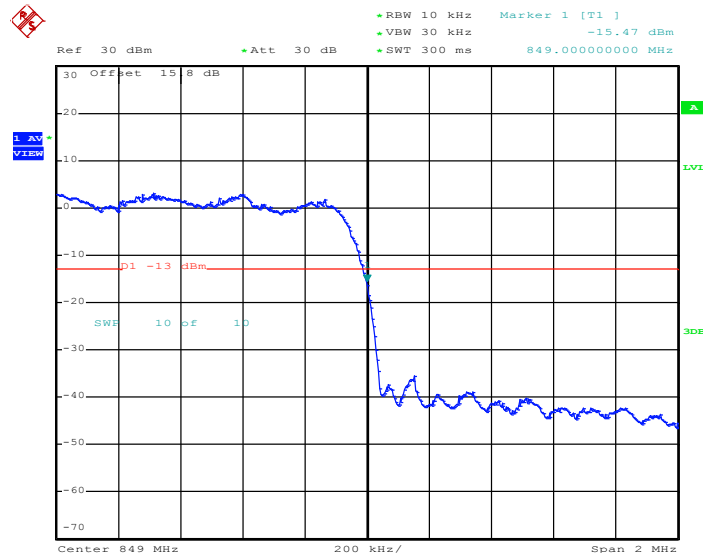


Date: 15.FEB.2012 17:22:26

Band :	CDMA2000 BC1	Power Stage :	High
Test Mode :	1xEV-DO Rev. 0_RTAP 153.6K		

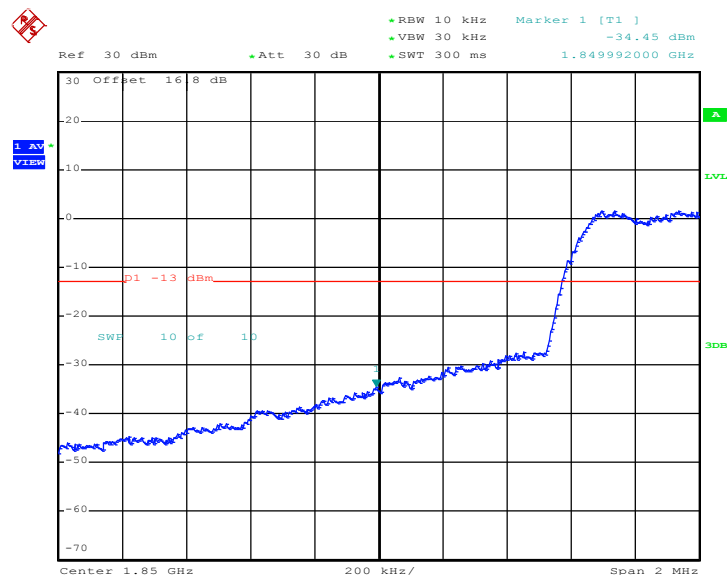Lower Band Edge Plot on Channel 25


Date: 15.FEB.2012 18:51:29

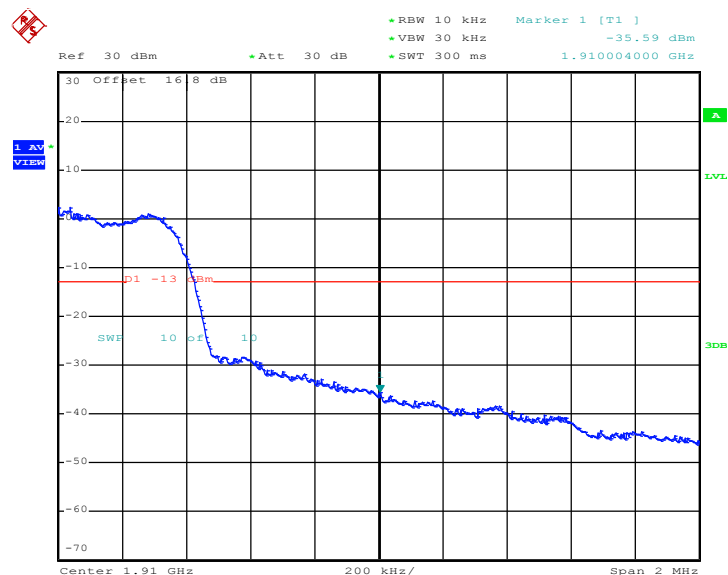Higher Band Edge Plot on Channel 1175


Date: 15.FEB.2012 18:53:14

3.5 Conducted Emission Measurement

3.5.1 Description of Conducted Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.


3.5.2 Measuring Instruments

See list of measuring instruments of this test report.

3.5.3 Test Procedures


1. The EUT was connected to spectrum analyzer and base station via power divider.
2. The middle channel for the highest RF power within the transmitting frequency was measured.
3. The conducted spurious emission for the whole frequency range was taken.

3.5.4 Test Setup

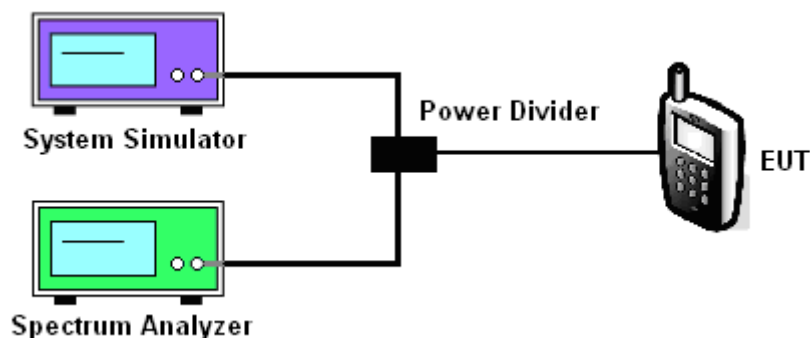


3.5.5 Test Result (Plots) of Conducted Emission


Band :	CDMA2000 BC0	Power Stage :	High
Test Mode :	1xEV-DO Rev. 0_RTAP 153.6K		

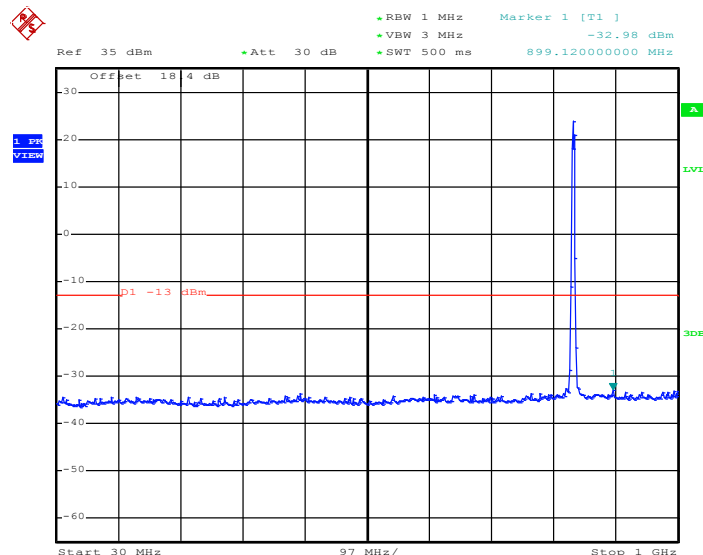Conducted Emission Plot between 30MHz ~ 1GHz


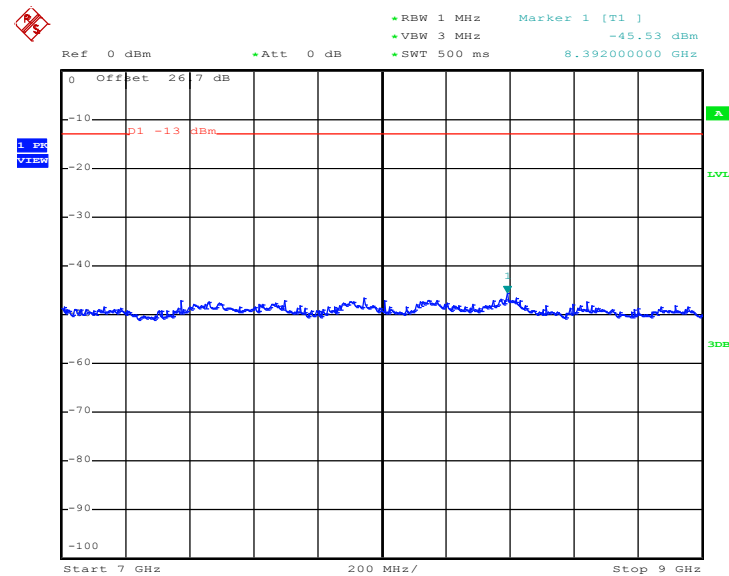
Date: 15.FEB.2012 17:30:29

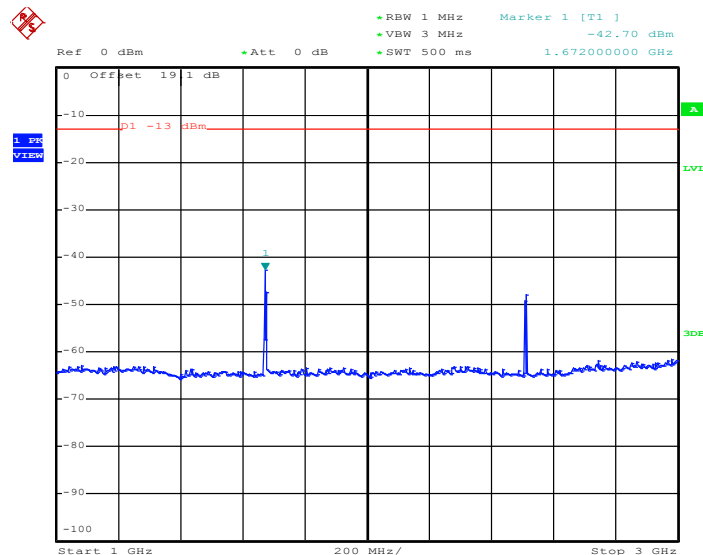Conducted Emission Plot between 1GHz ~ 3GHz


Date: 15.FEB.2012 16:53:52

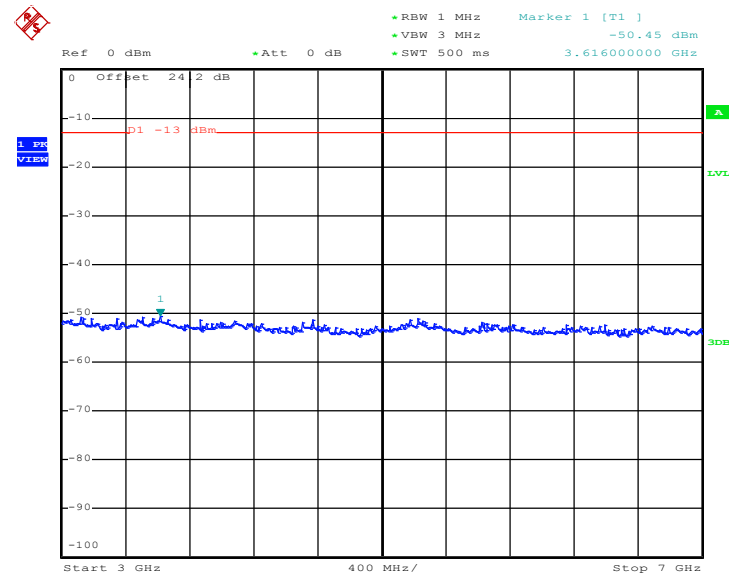Conducted Emission Plot between 3GHz ~ 7GHz


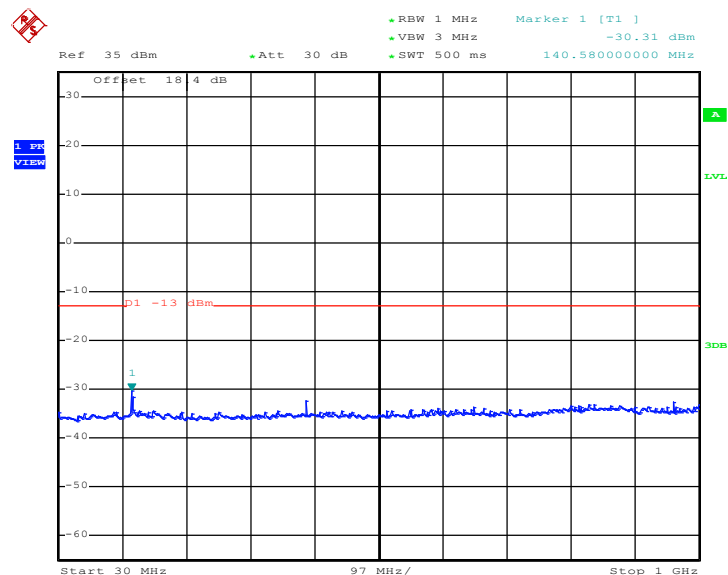
Date: 15.FEB.2012 17:32:11

Conducted Emission Plot between 7GHz ~ 9GHz


Date: 15.FEB.2012 17:33:28


Band :	CDMA2000 BC1	Power Stage :	High
Test Mode :	1xEV-DO Rev. 0_RTAP 153.6K		

Conducted Emission Plot between 30MHz ~ 1GHz




Date: 15.FEB.2012 18:31:01


Conducted Emission Plot between 1GHz ~ 3GHz

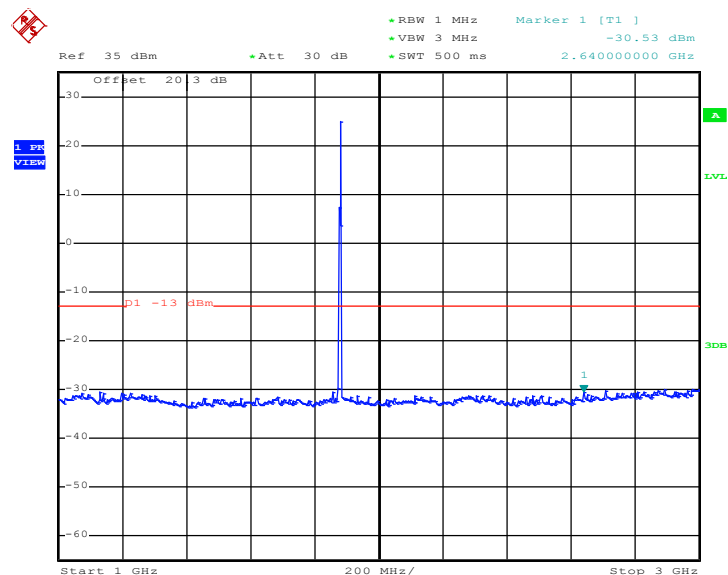

Date: 15.FEB.2012 18:36:31

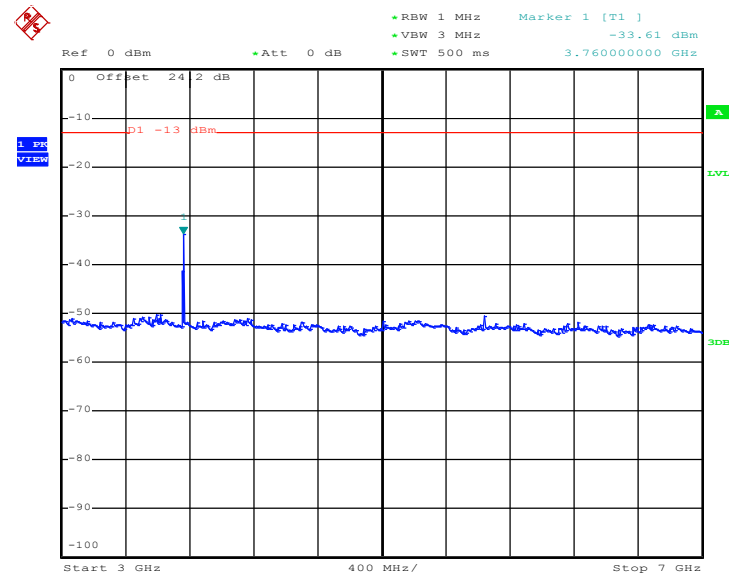Conducted Emission Plot between 3GHz ~ 7GHz


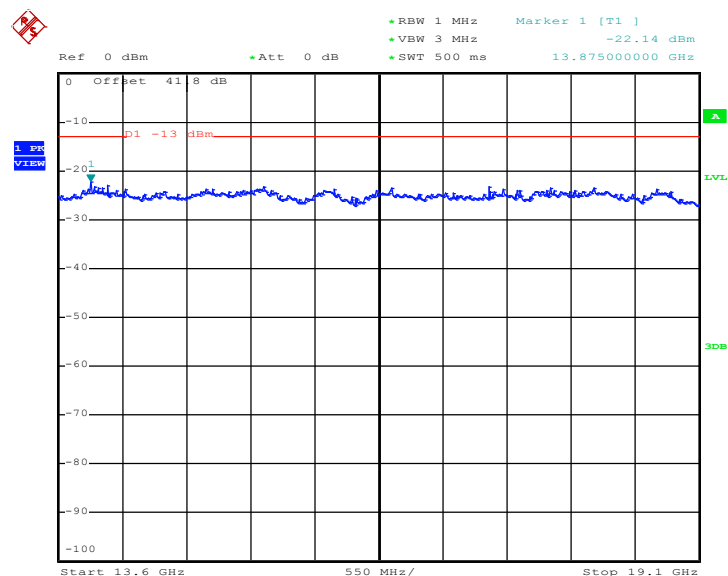
Date: 15.FEB.2012 18:38:25

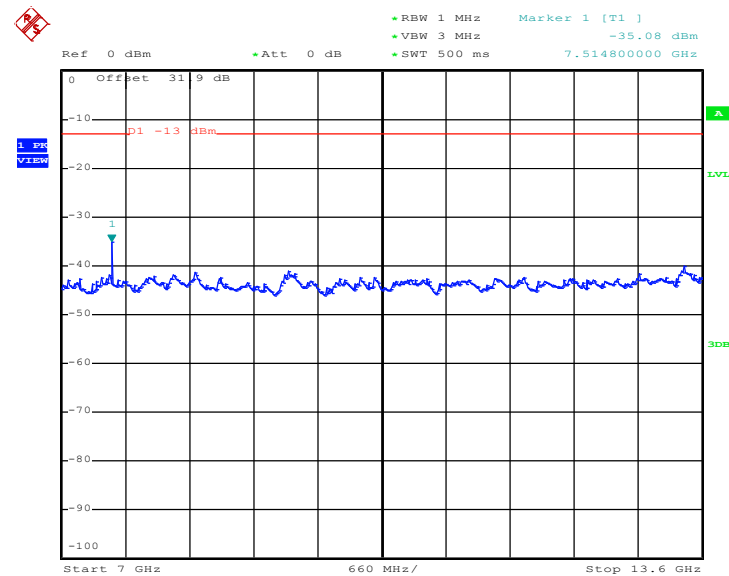Conducted Emission Plot between 7GHz ~ 13.6GHz


Date: 15.FEB.2012 18:45:35



Conducted Emission Plot between 13.6GHz ~ 19.1GHz



Date: 15.FEB.2012 18:42:24

3.6 Field Strength of Spurious Radiation Measurement

3.6.1 Description of Field Strength of Spurious Radiated Measurement

The radiated spurious emission was measured by substitution method according to ANSI / TIA / EIA-603-C-2004. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43+10\log_{10}(P[\text{Watts}])$ dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.


3.6.2 Measuring Instruments

See list of measuring instruments of this test report.

3.6.3 Test Procedures


1. The EUT was placed on a rotatable wooden table with 0.8 meter about ground.
2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, Sweep = 500ms, Taking the record of maximum spurious emission.
6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
8. Taking the record of output power at antenna port.
9. Repeat step 7 to step 8 for another polarization.
10. $\text{EIRP (dBm)} = \text{S.G. Power} - \text{Tx Cable Loss} + \text{Tx Antenna Gain}$
11. $\text{ERP (dBm)} = \text{EIRP} - 2.15$

3.6.4 Test Setup

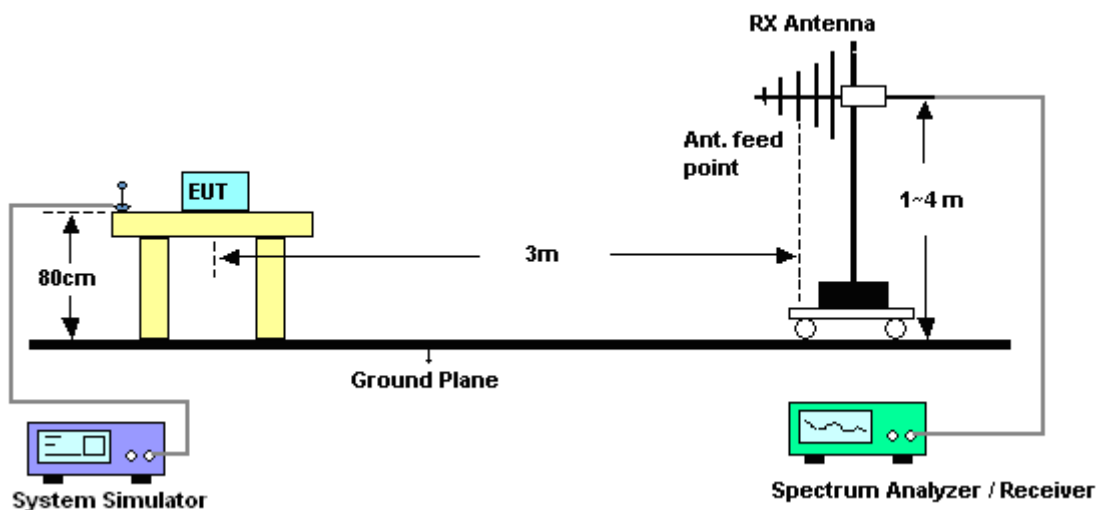


3.6.5 Test Result of Field Strength of Spurious Radiated

Band :	CDMA2000 BC0	Temperature :	21~24°C
Test Mode :	1xEV-DO Rev. 0_RTAP 153.6K for Keypad 1	Relative Humidity :	53~56%
Test Engineer :	Wii Chang	Polarization :	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

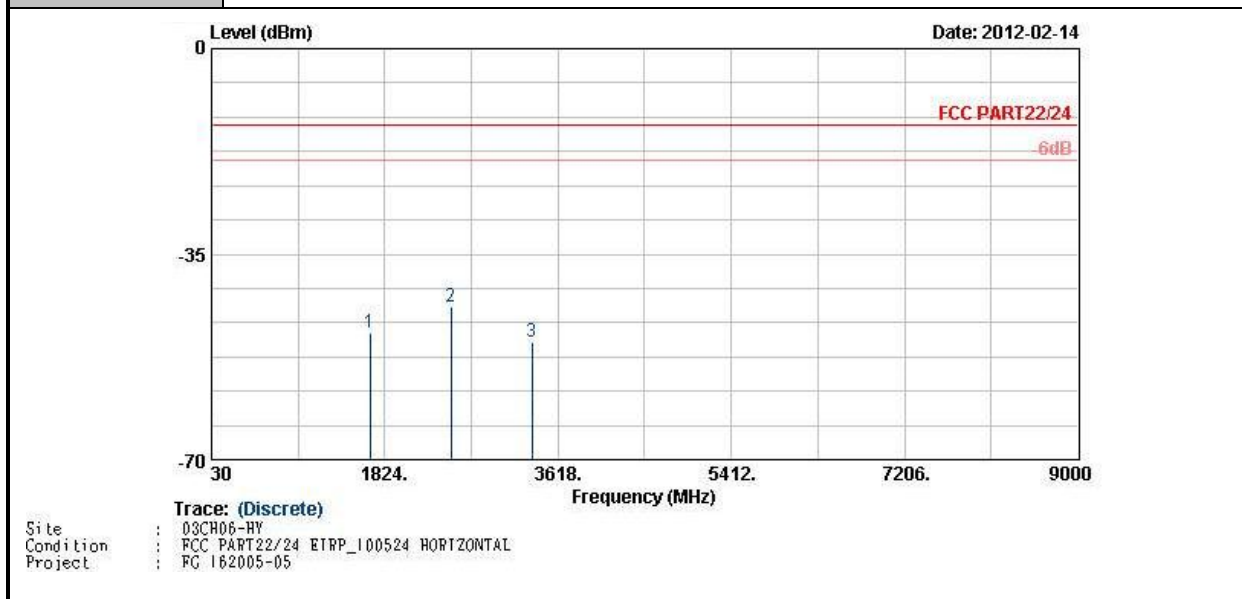


Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1672	-48.28	-13	-35.28	-57.86	-49.74	1.88	5.49	H	Pass
2509	-43.86	-13	-30.86	-55.50	-45.49	2.44	6.22	H	Pass
3345	-49.93	-13	-36.93	-65.12	-53.38	2.47	8.07	H	Pass

Band :	CDMA2000 BC0	Temperature :	21~24°C
Test Mode :	1xEV-DO Rev. 0_RTAP 153.6K for Keypad 1	Relative Humidity :	53~56%
Test Engineer :	Wii Chang	Polarization :	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

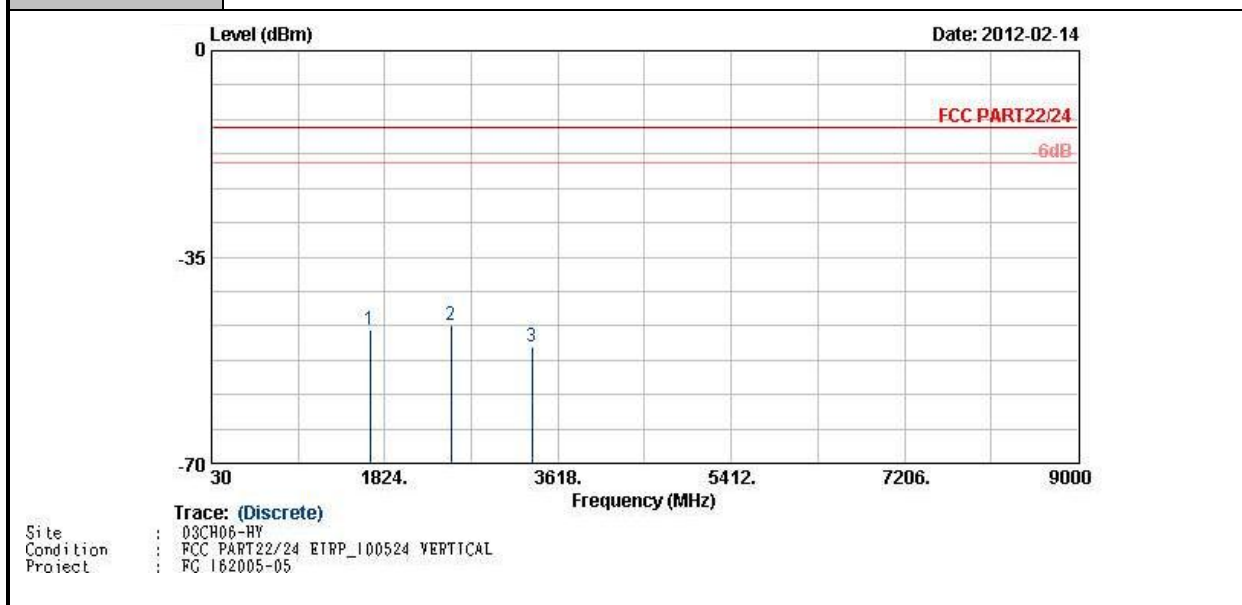


Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1672	-47.33	-13	-34.33	-56.91	-48.79	1.88	5.49	V	Pass
2509	-46.67	-13	-33.67	-58.30	-48.30	2.44	6.22	V	Pass
3345	-50.10	-13	-37.10	-65.29	-53.55	2.47	8.07	V	Pass

Band :	CDMA2000 BC0	Temperature :	21~24°C
Test Mode :	1xEV-DO Rev. 0_RTAP 153.6K for Keypad 2	Relative Humidity :	53~56%
Test Engineer :	Wii Chang	Polarization :	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

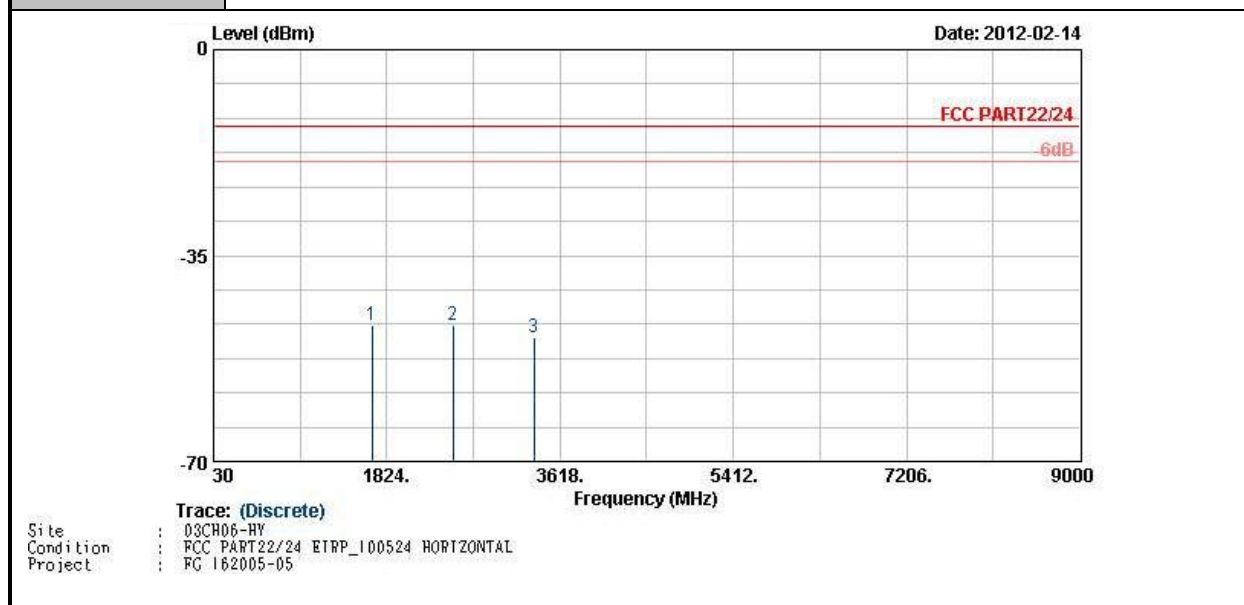


Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1672	-46.85	-13	-33.85	-57.65	-48.31	1.88	5.49	H	Pass
2509	-46.80	-13	-33.80	-59.65	-48.43	2.44	6.22	H	Pass
3345	-49.02	-13	-36.02	-65.49	-52.47	2.47	8.07	H	Pass

Band :	CDMA2000 BC0	Temperature :	21~24°C
Test Mode :	1xEV-DO Rev. 0_RTAP 153.6K for Keypad 2	Relative Humidity :	53~56%
Test Engineer :	Wii Chang	Polarization :	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

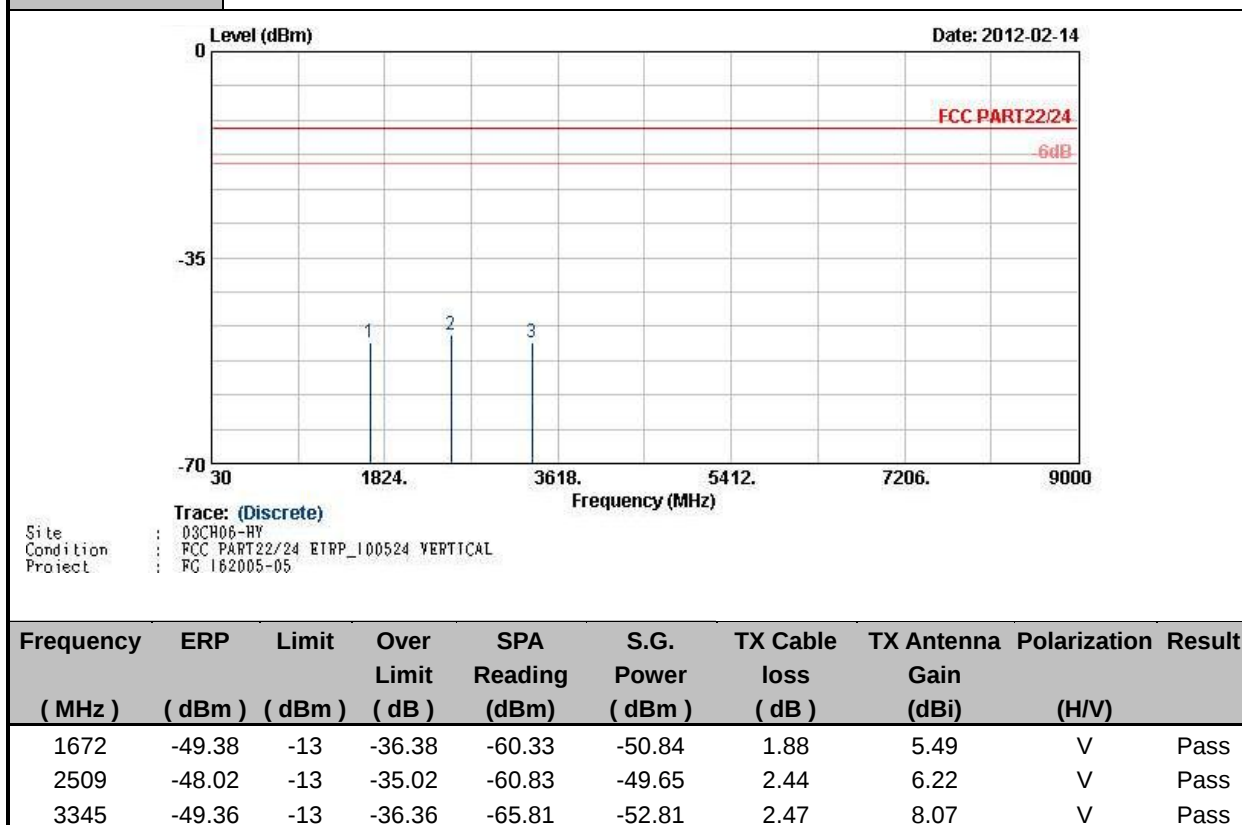


Band :	CDMA2000 BC1	Temperature :	21~24°C
Test Mode :	1xEV-DO Rev. 0_RTAP 153.6K for Keypad 1	Relative Humidity :	53~56%
Test Engineer :	Wii Chang	Polarization :	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

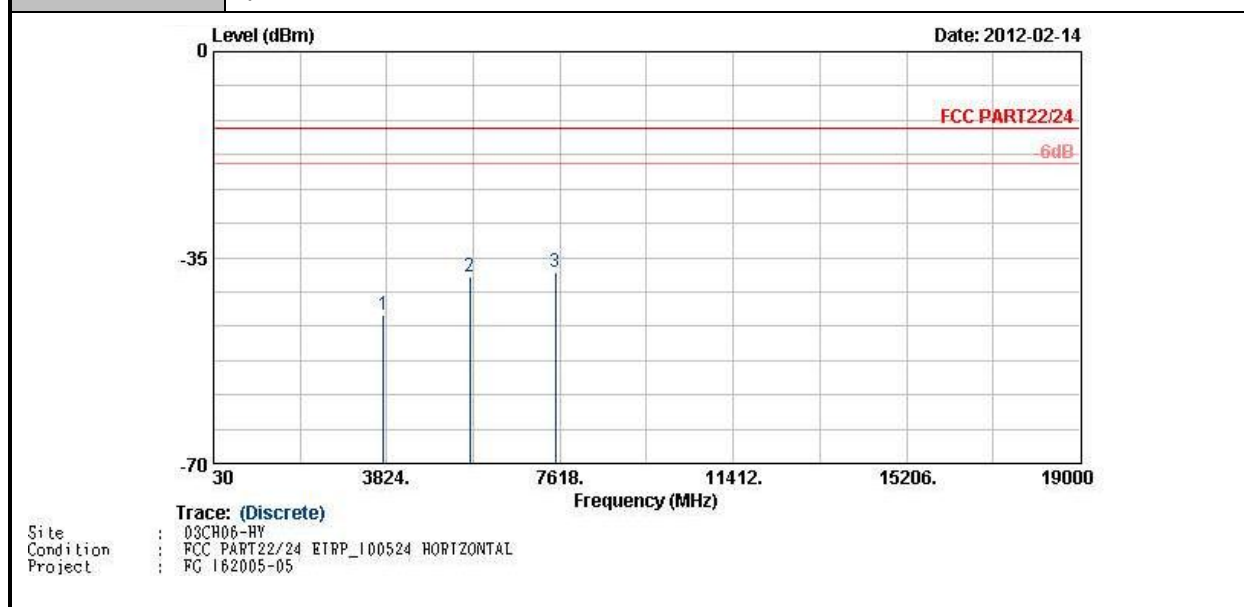


Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-44.86	-13	-31.86	-63.76	-51.11	2.56	8.81	H	Pass
5636	-38.17	-13	-25.17	-62.36	-45.91	2.96	10.70	H	Pass
7520	-37.46	-13	-24.46	-65.79	-46.36	3.22	12.12	H	Pass

Band :	CDMA2000 BC1	Temperature :	21~24°C
Test Mode :	1xEV-DO Rev. 0_RTAP 153.6K for Keypad 1	Relative Humidity :	53~56%
Test Engineer :	Wii Chang	Polarization :	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

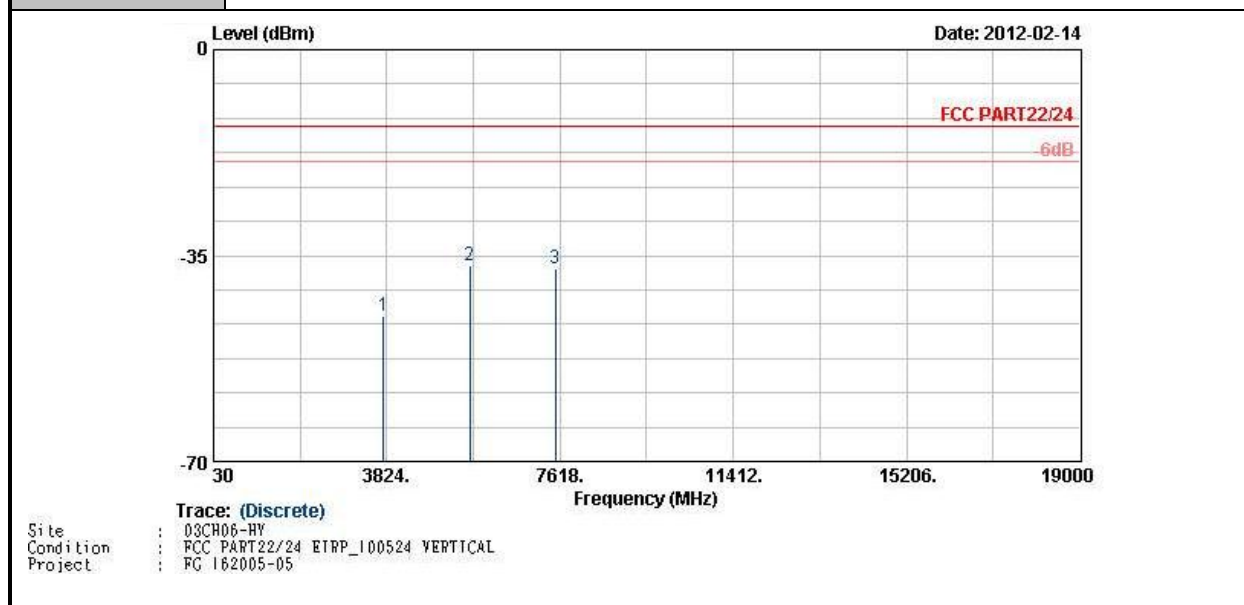


Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-45.18	-13	-32.18	-64.09	-51.43	2.56	8.81	V	Pass
5636	-36.61	-13	-23.61	-60.80	-44.35	2.96	10.70	V	Pass
7520	-37.11	-13	-24.11	-65.44	-46.01	3.22	12.12	V	Pass

Band :	CDMA2000 BC1	Temperature :	21~24°C
Test Mode :	1xEV-DO Rev. 0_RTAP 153.6K for Keypad 2	Relative Humidity :	53~56%
Test Engineer :	Wii Chang	Polarization :	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

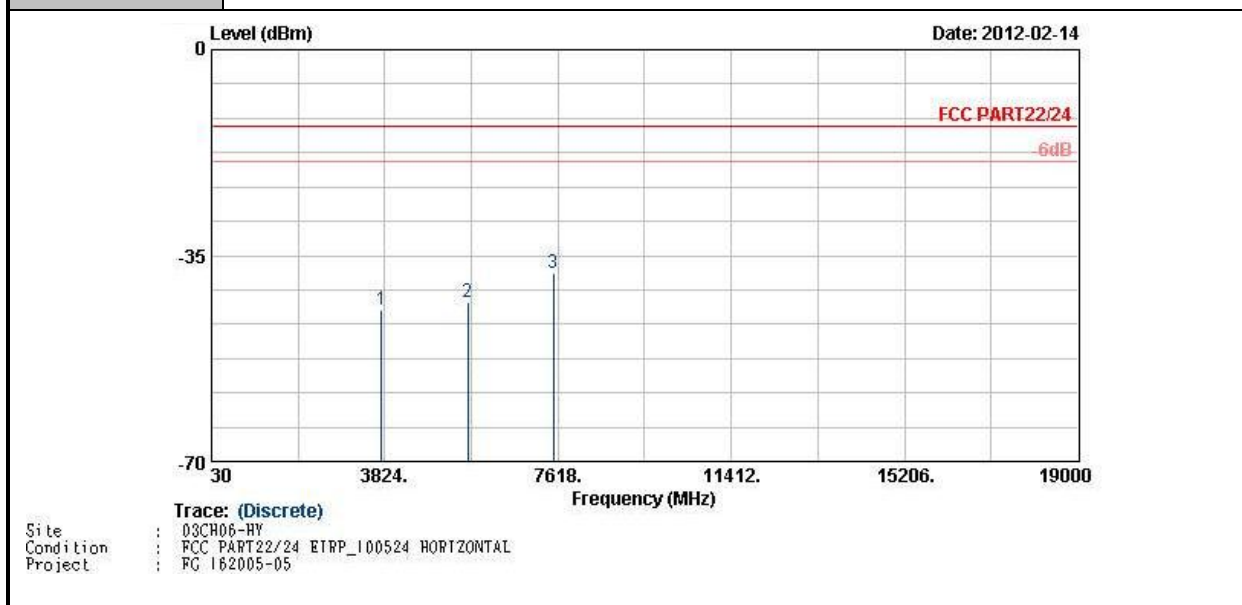

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-44.21	-13	-31.21	-63.12	-50.46	2.56	8.81	H	Pass
5636	-42.84	-13	-29.84	-67.03	-50.58	2.96	10.70	H	Pass
7520	-38.11	-13	-25.11	-66.44	-47.01	3.22	12.12	H	Pass

Band :	CDMA2000 BC1	Temperature :	21~24°C
Test Mode :	1xEV-DO Rev. 0_RTAP 153.6K for Keypad 2	Relative Humidity :	53~56%
Test Engineer :	Wii Chang	Polarization :	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

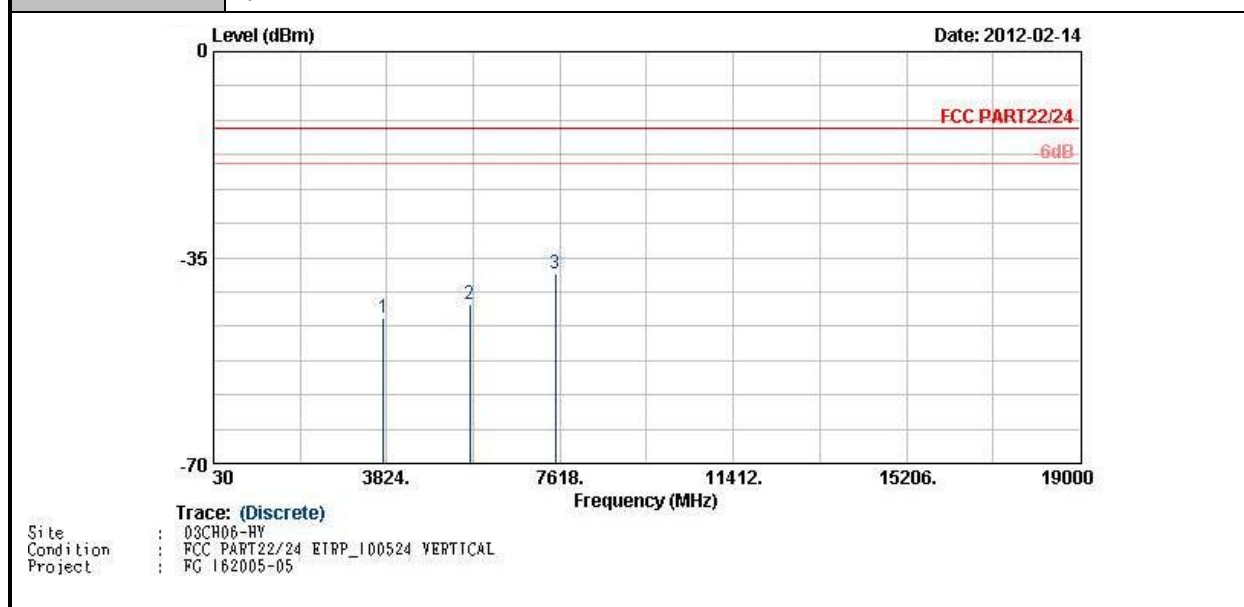

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-45.38	-13	-32.38	-64.29	-51.63	2.56	8.81	V	Pass
5636	-42.88	-13	-29.88	-67.07	-50.62	2.96	10.70	V	Pass
7520	-37.84	-13	-24.84	-66.17	-46.74	3.22	12.12	V	Pass

3.7 Frequency Stability Measurement

3.7.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

3.7.2 Measuring Instruments

See list of measuring instruments of this test report.


3.7.3 Test Procedures for Temperature Variation

1. The EUT was set up in the thermal chamber and connected with the base station.
2. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized for three hours. Power was applied and the maximum change in frequency was recorded within one minute.
3. With power OFF, the temperature was raised in 10°C step up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.
4. If the EUT cannot be turned on at -30°C , the testing lowest temperature will be raised in 10°C step until the EUT can be turned on.

3.7.4 Test Procedures for Voltage Variation

1. The EUT was placed in a temperature chamber at $25\pm 5^{\circ}\text{C}$ and connected with the base station.
2. The power supply voltage to the EUT was varied from BEP to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.

3.7.5 Test Setup

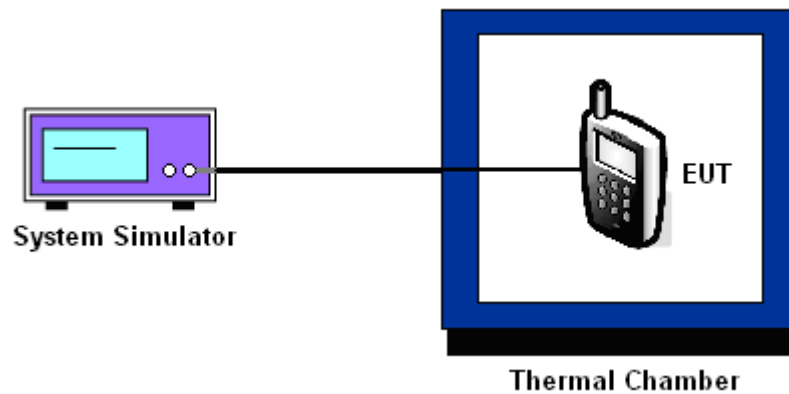

3.7.6 Test Result of Temperature Variation

Band :	CDMA2000 BC0	Channel :	384
Test Mode :	1xEV-DO Rev. 0_RTAP 153.6K	Limit (ppm) :	2.5

Temperature (°C)	Freq. Dev. (Hz)	Deviation (ppm)	Result
-30	N/A	N/A	PASS
-20	N/A	N/A	
-10	1.51	0.00	
0	1.61	0.00	
10	1.43	0.00	
20	1.53	0.00	
30	1.65	0.00	
40	1.47	0.00	
50	1.63	0.00	

Note: The manufacturer declared that the EUT could work properly between temperatures -10°C~50°C.

Band :	CDMA2000 BC1	Channel :	600
Test Mode :	1xEV-DO Rev. 0_RTAP 153.6K	Limit (ppm) :	2.5

Temperature (°C)	Freq. Dev. (Hz)	Deviation (ppm)	Result
-30	N/A	N/A	PASS
-20	N/A	N/A	
-10	5.96	0.00	
0	5.31	0.00	
10	4.59	0.00	
20	4.31	0.00	
30	4.85	0.00	
40	3.16	0.00	
50	3.25	0.00	

Note: The manufacturer declared that the EUT could work properly between temperatures -10°C~50°C.

3.7.7 Test Result of Voltage Variation

Band & Channel	Mode	Voltage (Volt)	Freq. Dev. (Hz)	Deviation (ppm)	Limit (ppm)	Result
CDMA2000 BC0 CH384	1xEV-DO Rev. 0 RTAP 153.6K	3.7	1.75	0.00	2.5	PASS
		BEP	1.87	0.00		
		4.2	1.47	0.00		
CDMA2000 BC1 CH600	1xEV-DO Rev. 0 RTAP 153.6K	3.7	3.14	0.00	2.5	PASS
		BEP	5.30	0.00		
		4.2	4.40	0.00		

Note:

1. Normal Voltage = 3.7V.
2. Battery End Point (BEP) = 3.4 V.

4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
System Simulator	R&S	CMU200	117995	N/A	Jul. 28, 2011	Feb. 15, 2012 ~ Feb. 23, 2012	Jul. 27, 2012	Conducted (TH02-HY)
Spectrum Analyzer	R&S	FSP40	100055	9kHz~40GHz	Jun. 13, 2011	Feb. 15, 2012 ~ Feb. 23, 2012	Jun. 12, 2012	Conducted (TH02-HY)
Thermal Chamber	Ten Billion	TTH-D35P	TBN-930701	N/A	Jul. 27, 2011	Feb. 15, 2012 ~ Feb. 23, 2012	Jul. 26, 2012	Conducted (TH02-HY)
Spectrum Analyzer	R&S	FSP40	100057	9KHz~40GHz	Oct. 27, 2011	Feb. 14, 2012 ~ Feb. 15, 2012	Oct. 26, 2012	Radiation (03CH06-HY)
EMI Test Receiver	R&S	ESVS10	834468/003	20MHz~1000MHz	May 10, 2011	Feb. 14, 2012 ~ Feb. 15, 2012	May 09, 2012	Radiation (03CH06-HY)
Bilog Antenna	SCHAFFNER	CBL6112B	2885	30MHz~2GHz	Oct. 22, 2011	Feb. 14, 2012 ~ Feb. 15, 2012	Oct. 21, 2012	Radiation (03CH06-HY)
Double Ridge Horn Antenna	EMCO	3117	00066583	1GHz~18GHz	Aug. 01, 2011	Feb. 14, 2012 ~ Feb. 15, 2012	Jul. 31, 2012	Radiation (03CH06-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA917025 1	15GHz~40GHz	Oct. 21, 2011	Feb. 14, 2012 ~ Feb. 15, 2012	Oct. 20, 2012	Radiation (03CH06-HY)
Pre Amplifier	Agilent	8449B	3008A01917	1GHz~26.5GHz	Apr. 14, 2011	Feb. 14, 2012 ~ Feb. 15, 2012	Apr. 13, 2012	Radiation (03CH06-HY)
Amplifier	Agilent	310N	186713	9KHz~1GHz	Apr. 14, 2011	Feb. 14, 2012 ~ Feb. 15, 2012	Apr. 13, 2012	Radiation (03CH06-HY)
System Simulator	Agilent	E5515C (8960)	MY48360820	N/A	Jan. 05, 2012	Feb. 14, 2012 ~ Feb. 15, 2012	Jan. 04, 2014	Radiation (03CH06-HY)

5 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Contribution	Uncertainty of X_i		$u(X_i)$
	dB	Probability Distribution	
Receiver Reading	0.41	Normal (k=2)	0.21
Antenna Factor Calibration	0.83	Normal (k=2)	0.42
Cable Loss Calibration	0.25	Normal (k=2)	0.13
Pre-Amplifier Gain Calibration	0.27	Normal (k=2)	0.14
RCV/SPA Specification	2.50	Rectangular	0.72
Antenna Factor Interpolation for Frequency	1.00	Rectangular	0.29
Site Imperfection	1.43	Rectangular	0.83
Mismatch	+0.39 / -0.41	U-Shape	0.28
Combined Standard Uncertainty $U_c(y)$	1.27		
Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	2.54		

Uncertainty of Radiated Emission Measurement (1 GHz ~ 40 GHz)

Contribution	Uncertainty of X_i		$u(X_i)$	C_i	$C_i * u(X_i)$
	dB	Probability Distribution			
Receiver Reading	± 0.10	Normal (k=2)	0.10	1	0.10
Antenna Factor Calibration	± 1.70	Normal (k=2)	0.85	1	0.85
Cable Loss Calibration	± 0.50	Normal (k=2)	0.25	1	0.25
Receiver Correction	± 2.00	Rectangular	1.15	1	1.15
Antenna Factor Directional	± 1.50	Rectangular	0.87	1	0.87
Site Imperfection	± 2.80	Triangular	1.14	1	1.14
Mismatch Receiver VSWR $\Gamma_1 = 0.197$ Antenna VSWR $\Gamma_2 = 0.194$ Uncertainty = $20\text{Log}(1-\Gamma_1\Gamma_2)$	+0.34 / -0.35	U-Shape	0.244	1	0.244
Combined Standard Uncertainty $U_c(y)$	2.36				
Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	4.72				



Appendix A. Photographs of EUT

Please refer to Sporton report number EP162005-05 as below.