

System Check_2450MHz_091104

DUT: Dipole 2450 MHz

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: HSL_2450_091104 Medium parameters used: $f = 2450 \text{ MHz}$; $\sigma = 1.84 \text{ mho/m}$; $\epsilon_r = 39.5$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : 22.7 ; Liquid Temperature : 21.7

DASY5 Configuration:

- Probe: ET3DV6 - SN1788; ConvF(4.48, 4.48, 4.48); Calibrated: 2009/9/23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2009/8/24
- Phantom: SAM - Front; Type: SAM; Serial: TP-1446
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Pin=100mW/Area Scan (91x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 5.67 mW/g


Pin=100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 58.3 V/m; Power Drift = 0.012 dB

Peak SAR (extrapolated) = 9.9 W/kg

SAR(1 g) = 4.91 mW/g; SAR(10 g) = 2.33 mW/g

Maximum value of SAR (measured) = 5.58 mW/g

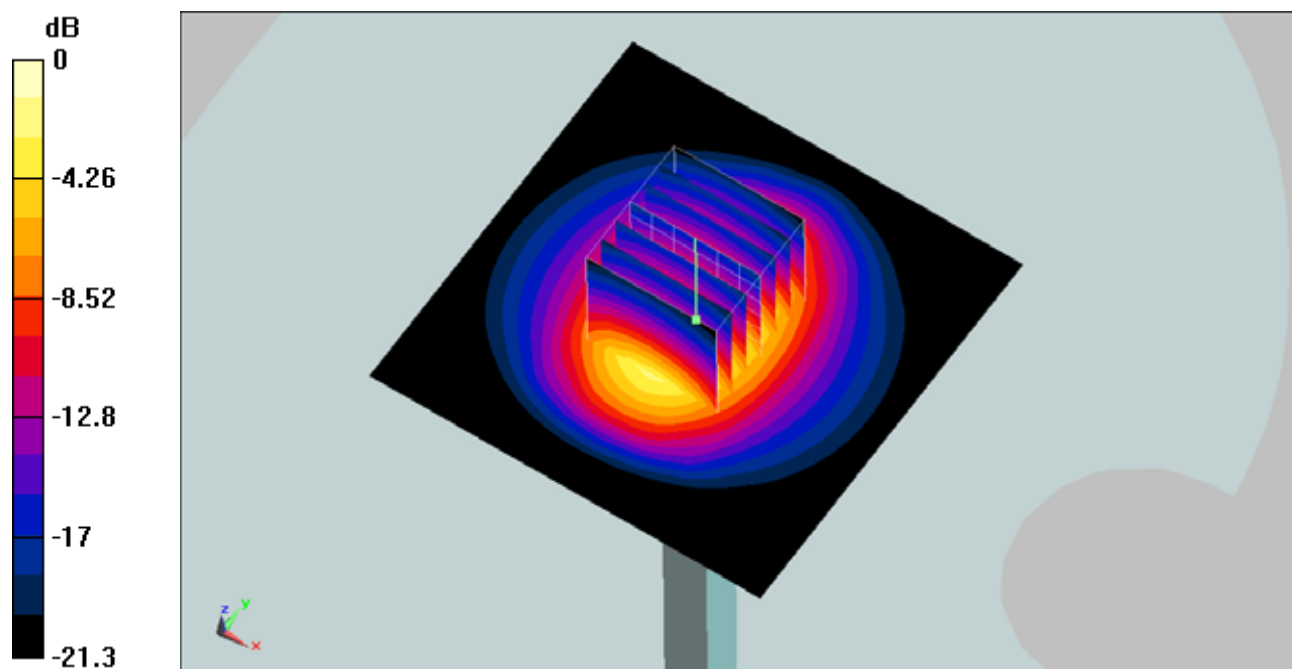

0 dB = 5.58mW/g

System Check_5200MHz_091107

DUT: Dipole 5GHz

Communication System: CW; Frequency: 5200 MHz; Duty Cycle: 1:1

Medium: HSL_5G_091107 Medium parameters used: $f = 5200 \text{ MHz}$; $\sigma = 4.56 \text{ mho/m}$; $\epsilon_r = 35.9$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : 22.9 ; Liquid Temperature : 21.6

DASY5 Configuration:

- Probe: EX3DV3 - SN3514; ConvF(4.78, 4.78, 4.78); Calibrated: 2009/1/21
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2009/9/18
- Phantom: SAM - Front; Type: SAM; Serial: TP-1446
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Pin=100mW/Area Scan (91x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 15.4 mW/g


Pin=100mW/Zoom Scan (8x8x8)/Cube 0: Measurement grid: dx=4.3mm, dy=4.3mm, dz=3mm

Reference Value = 54.5 V/m; Power Drift = 0.087 dB

Peak SAR (extrapolated) = 31.1 W/kg

SAR(1 g) = 8.27 mW/g; SAR(10 g) = 2.37 mW/g

Maximum value of SAR (measured) = 13.8 mW/g

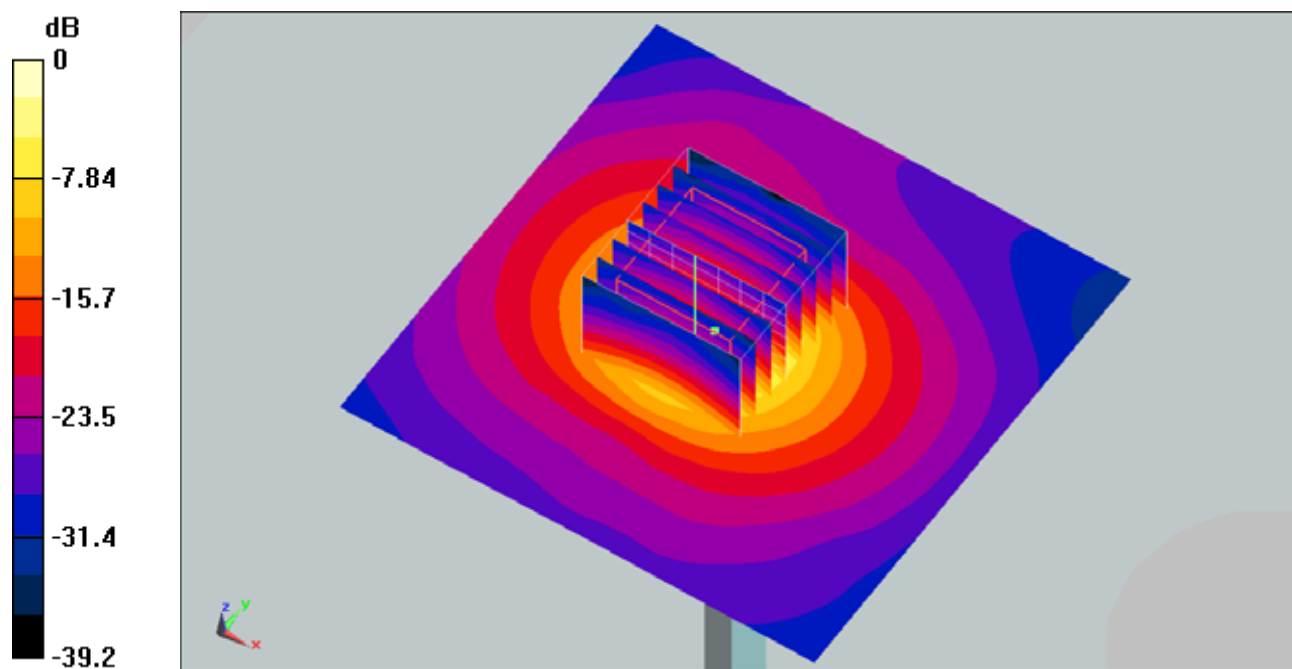

0 dB = 13.8mW/g