



## RF MEASUREMENT REPORT

---

**FCC ID:** HDC17600031F1

**Applicant:** Adtran Inc.

**Application Type:** Certification

**Product:** WiFi 5 Mesh AP

**Model No.:** 831-t5

**FCC Classification:** Digital Transmission System (DTS)

**FCC Rule Part(s):** Part 15 Subpart C (Section 15.247)

**Test Date:** August 19 ~ 27, 2021

**Reviewed By:**

\_\_\_\_\_  
Vincent Yu

**Approved By:**

\_\_\_\_\_  
Robin Wu



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

### Revision History

| Report No.    | Version | Description    | Issue Date | Note  |
|---------------|---------|----------------|------------|-------|
| 2108RSU047-U1 | Rev. 01 | Initial Report | 11-20-2021 | Valid |
|               |         |                |            |       |

---

## CONTENTS

| Description                              | Page      |
|------------------------------------------|-----------|
| <b>1. General Information .....</b>      | <b>6</b>  |
| 1.1. Applicant .....                     | 6         |
| 1.2. Manufacturer .....                  | 6         |
| 1.3. Testing Facility .....              | 6         |
| 1.4. Product Information.....            | 7         |
| 1.5. Radio Specification .....           | 7         |
| 1.6. Working Frequencies .....           | 8         |
| 1.7. Antenna Details.....                | 8         |
| <b>2. Test Configuration.....</b>        | <b>9</b>  |
| 2.1. Test Mode.....                      | 9         |
| 2.2. Test System Connection Diagram..... | 9         |
| 2.3. Test System Details .....           | 9         |
| 2.4. Test Software .....                 | 9         |
| 2.5. Applied Standards.....              | 10        |
| 2.6. Duty Cycle .....                    | 10        |
| 2.7. Test Environment Condition .....    | 11        |
| <b>2. Antenna Requirements .....</b>     | <b>12</b> |
| <b>3. Measuring Instrument .....</b>     | <b>13</b> |
| <b>4. Measurement Uncertainty.....</b>   | <b>14</b> |
| <b>5. Test Result.....</b>               | <b>15</b> |
| 5.1. Summary .....                       | 15        |
| 5.2. 6dB Bandwidth.....                  | 16        |
| 5.2.1. Test Limit .....                  | 16        |
| 5.2.2. Test Procedure used .....         | 16        |
| 5.2.3. Test Setting .....                | 16        |
| 5.2.4. Test Setup .....                  | 16        |
| 5.2.5. Test Result .....                 | 16        |
| 5.3. Output Power .....                  | 17        |
| 5.3.1. Test Limit .....                  | 17        |
| 5.3.2. Test Procedure Used .....         | 17        |
| 5.3.3. Test Setting .....                | 17        |
| 5.3.4. Test Setup .....                  | 17        |
| 5.3.5. Test Result .....                 | 17        |
| 5.4. Power Spectral Density.....         | 18        |

|                                                 |                                                                 |            |
|-------------------------------------------------|-----------------------------------------------------------------|------------|
| 5.4.1.                                          | Test Limit .....                                                | 18         |
| 5.4.2.                                          | Test Procedure Used .....                                       | 18         |
| 5.4.3.                                          | Test Setting .....                                              | 18         |
| 5.4.4.                                          | Test Setup .....                                                | 19         |
| 5.4.5.                                          | Test Result .....                                               | 19         |
| 5.5.                                            | Conducted Band Edge and Out-of-Band Emissions .....             | 20         |
| 5.5.1.                                          | Test Limit .....                                                | 20         |
| 5.5.2.                                          | Test Procedure Used .....                                       | 20         |
| 5.5.3.                                          | Test Setting .....                                              | 20         |
| 5.5.4.                                          | Test Setup .....                                                | 21         |
| 5.5.5.                                          | Test Result .....                                               | 21         |
| 5.6.                                            | Radiated Spurious Emission .....                                | 22         |
| 5.6.1.                                          | Test Limit .....                                                | 22         |
| 5.6.2.                                          | Test Procedure Used .....                                       | 22         |
| 5.6.3.                                          | Test Setting .....                                              | 22         |
| 5.6.4.                                          | Test Setup .....                                                | 24         |
| 5.6.5.                                          | Test Result .....                                               | 24         |
| 5.7.                                            | Radiated Restricted Band Edge .....                             | 25         |
| 5.7.1.                                          | Test Limit .....                                                | 25         |
| 5.7.2.                                          | Test Procedure Used .....                                       | 26         |
| 5.7.3.                                          | Test Setting .....                                              | 26         |
| 5.7.4.                                          | Test Setup .....                                                | 27         |
| 5.7.5.                                          | Test Result .....                                               | 27         |
| 5.8.                                            | AC Conducted Emissions .....                                    | 28         |
| 5.8.1.                                          | Test Limit .....                                                | 28         |
| 5.8.2.                                          | Test Setup .....                                                | 28         |
| 5.8.3.                                          | Test Result .....                                               | 28         |
| <b>6.</b>                                       | <b>Conclusion .....</b>                                         | <b>29</b>  |
| <b>Appendix A - Test Result.....</b>            |                                                                 | <b>30</b>  |
| A.1                                             | 6dB Bandwidth Test Result .....                                 | 30         |
| A.2                                             | Output Power Test Result .....                                  | 37         |
| A.3                                             | Power Spectral Density Test Result .....                        | 39         |
| A.4                                             | Conducted Band Edge and Out-of-Band Emissions Test Result ..... | 52         |
| A.5                                             | Radiated Spurious Emission Test Result .....                    | 65         |
| A.6                                             | Radiated Restricted Band Edge Test Result .....                 | 73         |
| A.7                                             | AC Conducted Emissions Test Result .....                        | 161        |
| <b>Appendix B - Test Setup Photograph .....</b> |                                                                 | <b>163</b> |

|                                          |            |
|------------------------------------------|------------|
| <b>Appendix C - EUT Photograph .....</b> | <b>164</b> |
|------------------------------------------|------------|

## 1. General Information

### 1.1. Applicant

Adtran Inc.

901 Explorer Blvd NW Huntsville, AL 35806, USA

### 1.2. Manufacturer

Adtran Inc.

901 Explorer Blvd NW Huntsville, AL 35806, USA

### 1.3. Testing Facility

|                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|-------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <input checked="" type="checkbox"/> | <b>Test Site – MRT Suzhou Laboratory</b><br><b>Laboratory Location (Suzhou - Wuzhong)</b><br>D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China<br><b>Laboratory Location (Suzhou - SIP)</b><br>4b Building, Liando U Valley, No.200 Xingpu Rd., Shengpu Town, Suzhou Industrial Park, China<br><b>Laboratory Accreditations</b><br>A2LA: 3628.01 CNAS: L10551<br>FCC: CN1166 ISED: CN0001<br>VCCI: <input type="checkbox"/> R-20025 <input type="checkbox"/> G-20034 <input type="checkbox"/> C-20020 <input type="checkbox"/> T-20020<br><input type="checkbox"/> R-20141 <input type="checkbox"/> G-20134 <input type="checkbox"/> C-20103 <input type="checkbox"/> T-20104 |
| <input checked="" type="checkbox"/> | <b>Test Site – MRT Shenzhen Laboratory</b><br><b>Laboratory Location (Shenzhen)</b><br>1G, Building A, Junxiangda Building, Zhongshanyuan Road West, Nanshan District, Shenzhen, China<br><b>Laboratory Accreditations</b><br>A2LA: 3628.02 CNAS: L10551<br>FCC: CN1284 ISED: CN0105                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <input type="checkbox"/>            | <b>Test Site – MRT Taiwan Laboratory</b><br><b>Laboratory Location (Taiwan)</b><br>No. 38, Fuxing 2nd Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)<br><b>Laboratory Accreditations</b><br>TAF: L3261-190725<br>FCC: 291082, TW3261 ISED: TW3261                                                                                                                                                                                                                                                                                                                                                                                                                                                       |

#### 1.4. Product Information

|                                                                                                                                                          |                                                                                           |
|----------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------|
| Product Name                                                                                                                                             | WiFi 5 Mesh AP                                                                            |
| Model No.                                                                                                                                                | 831-t5                                                                                    |
| Serial No.                                                                                                                                               | 831t5A0719000001                                                                          |
| Wi-Fi Specification                                                                                                                                      | 802.11a/b/g/n/ac, VHT                                                                     |
| Antenna Information                                                                                                                                      | Refer to section 1.7                                                                      |
| Power Supply                                                                                                                                             | AC/DC Adapter                                                                             |
| Accessories                                                                                                                                              |                                                                                           |
| Adapter                                                                                                                                                  | MODEL: S36B52-120A300-C4-6<br>INPUT: 100-240V~50/60Hz 1.0A<br>OUTPUT: 12.0V DC, 3A, 36.0W |
| Remark:<br>The information of EUT was provided by the manufacturer, and the accuracy of the information shall be the responsibility of the manufacturer. |                                                                                           |

#### 1.5. Radio Specification

|                 |                                                                                                               |
|-----------------|---------------------------------------------------------------------------------------------------------------|
| Frequency Range | 802.11b/g/n-HT20, VHT20: 2412 ~ 2462MHz<br>802.11n-HT40, VHT40: 2422 ~ 2452MHz                                |
| Channel Number  | 802.11b/g/n-HT20, VHT20: 11<br>802.11n-HT40, VHT40: 7                                                         |
| Modulation      | 802.11b: DSSS<br>802.11g/n, VHT: OFDM                                                                         |
| Data Rate       | 802.11b: 1/2/5.5/11Mbps<br>802.11g: 6/9/12/18/24/36/48/54Mbps<br>802.11n: up to 300Mbps<br>VHT: up to 400Mbps |

Note: For other features of this EUT, test report will be issued separately.

## 1.6. Working Frequencies

802.11b/g/n-HT20, VHT20

| Channel | Frequency | Channel | Frequency | Channel | Frequency |
|---------|-----------|---------|-----------|---------|-----------|
| 01      | 2412 MHz  | 02      | 2417 MHz  | 03      | 2422 MHz  |
| 04      | 2427 MHz  | 05      | 2432 MHz  | 06      | 2437 MHz  |
| 07      | 2442 MHz  | 08      | 2447 MHz  | 09      | 2452 MHz  |
| 10      | 2457 MHz  | 11      | 2462 MHz  | --      | --        |

802.11n-HT40, VHT40

| Channel | Frequency | Channel | Frequency | Channel | Frequency |
|---------|-----------|---------|-----------|---------|-----------|
| 03      | 2422 MHz  | 04      | 2427 MHz  | 05      | 2432 MHz  |
| 06      | 2437 MHz  | 07      | 2442 MHz  | 08      | 2447 MHz  |
| 09      | 2452 MHz  | --      | --        | --      | --        |

## 1.7. Antenna Details

| Antenna Type | Frequency Band | Tx Paths | Max. Antenna Gain (dBi) | Beamforming Directional Gain (dBi) | CDD Directional Gain (dBi) |         |
|--------------|----------------|----------|-------------------------|------------------------------------|----------------------------|---------|
|              |                |          |                         |                                    | For Power                  | For PSD |
| PCB Antenna  | 2.4GHz Band    | 2        | 3.5                     | 6.51                               | 3.5                        | 6.51    |
|              | 5GHz Low Band  | 2        | 4.9                     | 7.91                               | 4.9                        | 7.91    |
|              | 5GHz High Band | 4        | 5.5                     | 11.52                              | 5.5                        | 11.52   |

Remark:

- The EUT supports Cyclic Delay Diversity (CDD) mode, and CDD signals are correlated.  
If all antennas have the same gain,  $G_{ANT}$ , Directional gain =  $G_{ANT} + \text{Array Gain}$ , where Array Gain is as follows.
  - For power spectral density (PSD) measurements on all devices,  
Array Gain =  $10 \log (N_{ANT} / N_{SS})$  dB;
  - For power measurements on IEEE 802.11 devices,  
Array Gain = 0 dB for  $N_{ANT} \leq 4$ ;
- The EUT also supports Beam Forming mode, and the Beam Forming support 802.11n/ac and VHT, not include 802.11a/b/g. The conducted output power in the beamforming mode will be reduced below the conducted output power in the CDD mode by the amount in dB that the beamforming gain exceeds the maximum antenna gain.

## 2. Test Configuration


### 2.1. Test Mode

|                                                    |
|----------------------------------------------------|
| Mode 1: Transmit by 802.11b (1Mbps) (CDD mode)     |
| Mode 2: Transmit by 802.11g (6Mbps) (CDD mode)     |
| Mode 3: Transmit by 802.11n-HT20 (MCS0) (CDD mode) |
| Mode 4: Transmit by 802.11n-HT40 (MCS0) (CDD mode) |
| Mode 5: Transmit by VHT20 (MCS0) (CDD mode)        |
| Mode 6: Transmit by VHT40 (MCS0) (CDD mode)        |

### 2.2. Test System Connection Diagram

The device was tested per the guidance ANSI C63.10: 2013 was used to reference the appropriate EUT setup for radiated emissions testing and AC line conducted testing.

Connection Diagram – Radiated Emission testing & AC Conducted Emissions

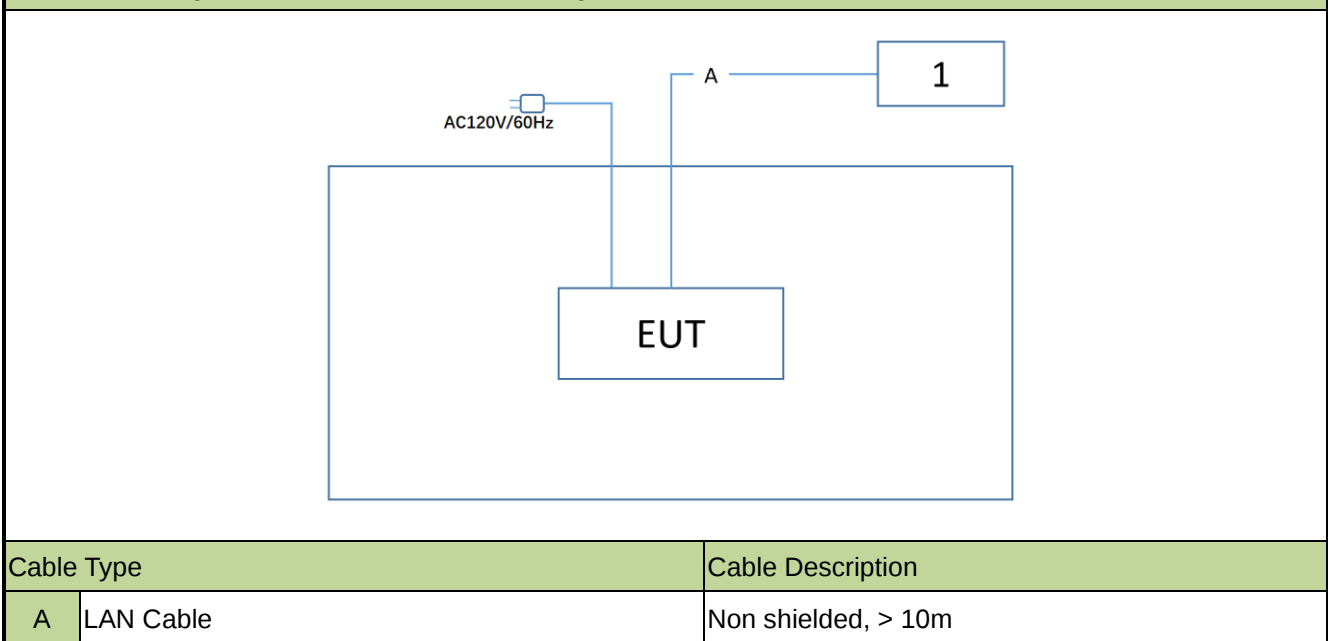

### 2.3. Test System Details

| Product    | Manufacturer | Model No. |
|------------|--------------|-----------|
| 1 Notebook | HP           | 735G5     |

### 2.4. Test Software

The test utility software used during testing was “MT7615 QA”, and the version was 1.90. Power parameter value refers to Operation Description.

## 2.5. Applied Standards



According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:


- FCC Part 15.247
- KDB 558074 D01v05r02
- KDB 662911 D01v02r01
- ANSI C63.10-2013

## 2.6. Duty Cycle

The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

| Test Mode                              | Duty Cycle            |
|----------------------------------------|-----------------------|
| 802.11b                                | 98.91%                |
| 802.11g                                | 95.57%                |
| 802.11n-HT20                           | 91.63%                |
| 802.11n-HT40                           | 85.86%                |
| VHT20                                  | 92.44%                |
| VHT40                                  | 85.71%                |
| Duty Cycle (T = Transmission Duration) |                       |
| 802.11b (T = 8.387ms)                  | 802.11g (T = 1.382ms) |

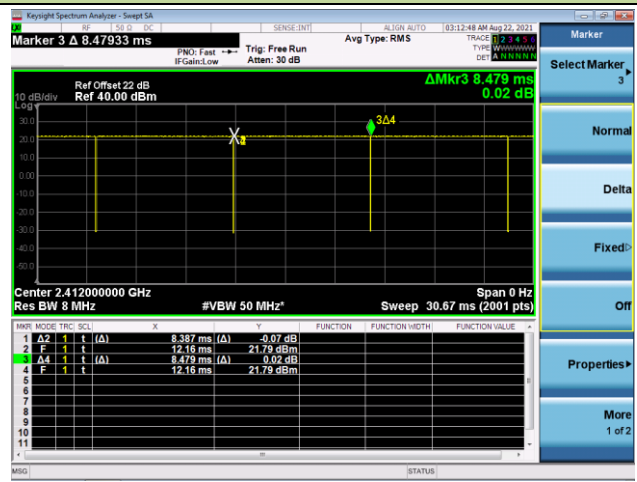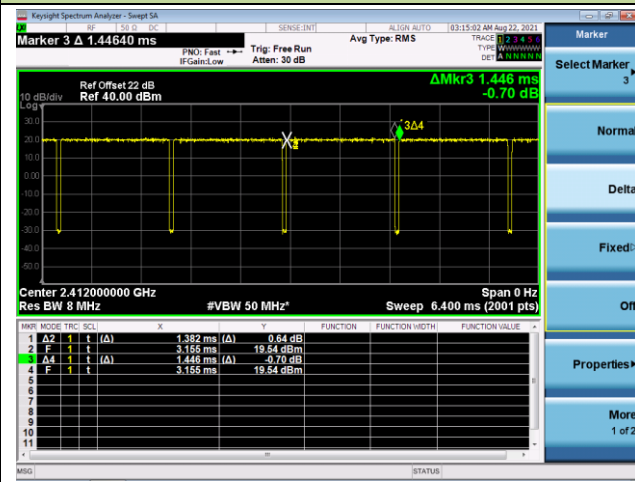
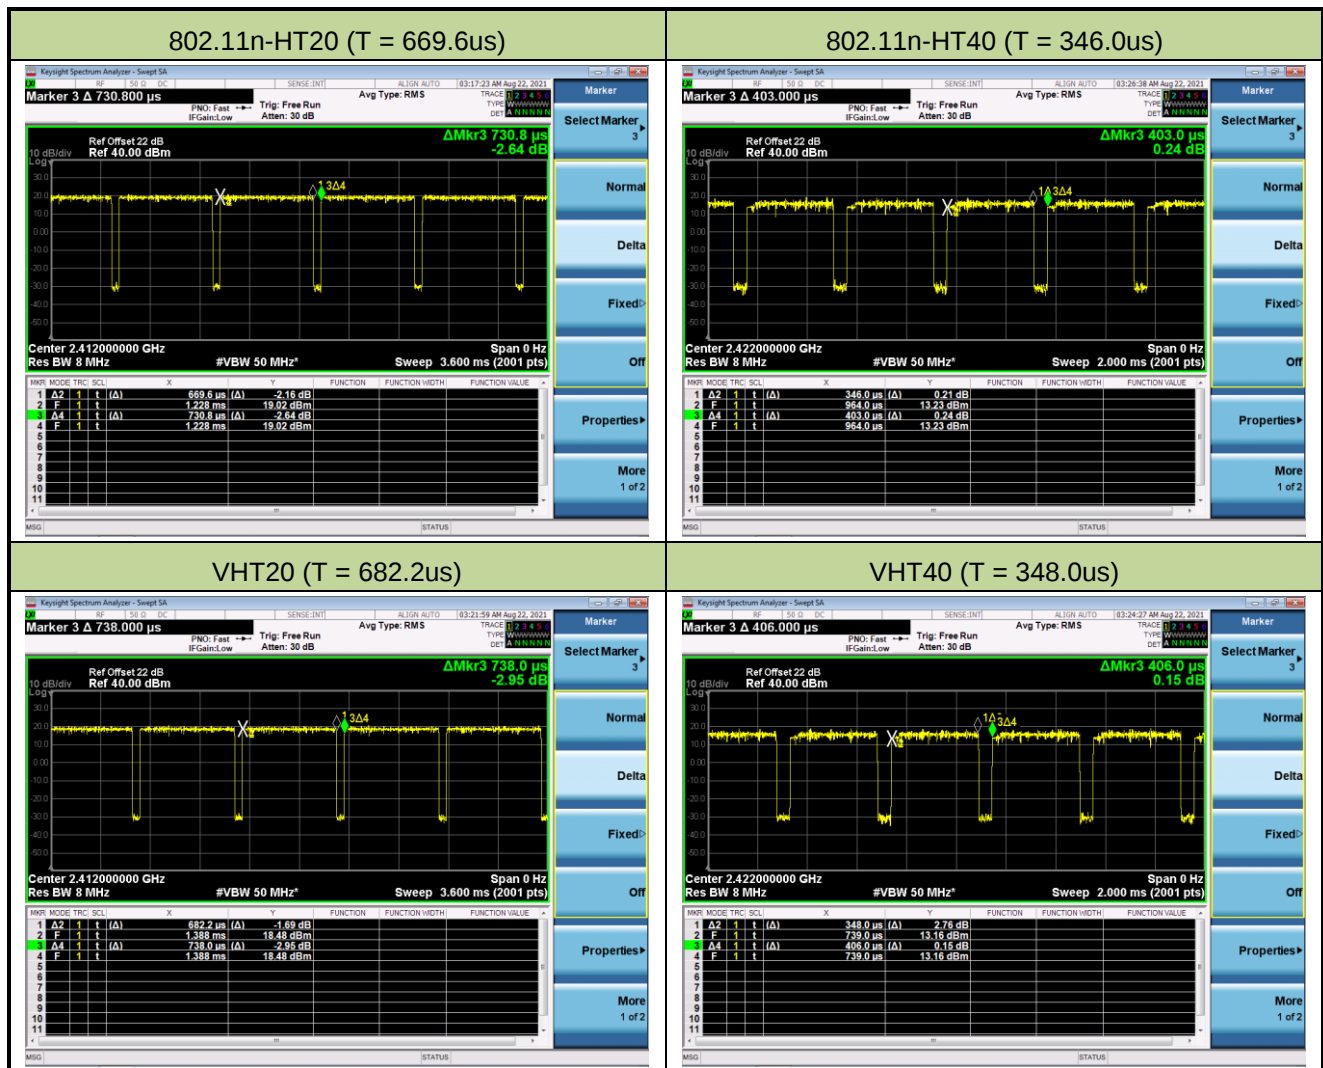
## 2.7. Test Environment Condition

|                     |               |
|---------------------|---------------|
| Ambient Temperature | 15°C ~ 35°C   |
| Relative Humidity   | 20%RH ~ 75%RH |

### 3. Antenna Requirements

#### **Excerpt from §15.203 of the FCC Rules/Regulations:**

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antenna of the device is **permanently attached**.
- There are no provisions for connection to an external antenna.

#### **Conclusion:**

The unit complies with the requirement of §15.203.

#### 4. Measuring Instrument

| No. | Instrument          | Manufacturer | Model No.   | Asset No.   | Cali. Interval | Cali. Due Date | Test Site     |
|-----|---------------------|--------------|-------------|-------------|----------------|----------------|---------------|
| 1   | Horn Antenna        | Schwarzbeck  | BBHA 9170   | MRTSUE06292 | 1 year         | 2021/10/24     | NS-AC1        |
| 2   | Anechoic Chamber    | BOOMWAVE     | NS-AC1      | MRTSUE06496 | 1 year         | 2022/7/24      | NS-AC1        |
| 3   | Horn Antenna        | Schwarzbeck  | BBHA 9120D  | MRTSUE06572 | 1 year         | 2022/3/14      | NS-AC1        |
| 4   | TRILOG Antenna      | Schwarzbeck  | VULB 9162   | MRTSUE06573 | 1 year         | 2022/6/29      | NS-AC1        |
| 5   | Preamplifier        | Schwarzbeck  | BBV 9718    | MRTSUE06574 | 1 year         | 2022/7/12      | NS-AC1        |
| 6   | EMI Test Receiver   | R&S          | ESR3        | MRTSUE06575 | 1 year         | 2022/6/27      | NS-AC1        |
| 7   | USB Power Sensor    | Keysight     | U2021XA     | MRTSUE06581 | 1 year         | 2022/8/15      | NS-TR2        |
| 8   | Thermohygrometer    | DELI         | NO.8813     | MRTSUE06588 | 1 year         | 2022/6/30      | NS-AC1        |
| 9   | Preamplifier        | EMCI         | EMC184045SE | MRTSUE06641 | 1 year         | 2022/1/14      | NS-AC1        |
| 10  | Thermohygrometer    | DELI         | NO.8813     | MRTSUE06783 | 1 year         | 2022/5/9       | NS-TR2        |
| 11  | Temperature Chamber | OUKE         | OK-TH-100C  | MRTSUE06899 | 1 year         | 2021/11/27     | NS-TR2        |
| 12  | Signal Analyzer     | Keysight     | N9020A      | MRTSUE10065 | 1 year         | 2022/6/17      | NS-AC1/NS-TR2 |
| 13  | Signal Analyzer     | Agilent      | N9010A      | MRTSUE06195 | 1 year         | 2022/3/17      | NS-AC1/NS-TR2 |
| 14  | EMI Test Receiver   | R&S          | ESR7        | MRTSUE06001 | 1 year         | 2022/1/4       | WZ-AC1        |
| 15  | Horn Antenna        | Schwarzbeck  | BBHA 9120D  | MRTSUE06023 | 1 year         | 2021/09/27     | WZ-AC1        |
|     |                     |              |             |             | 1 year         | 2022/9/16      |               |
| 16  | Loop Antenna        | Schwarzbeck  | FMZB 1519   | MRTSUE06025 | 1 year         | 2021/11/8      | WZ-AC1        |
| 17  | Preamplifier        | Agilent      | 83017A      | MRTSUE06076 | 1 year         | 2021/11/14     | WZ-AC1        |
| 18  | TRILOG Antenna      | Schwarzbeck  | VULB 9168   | MRTSUE06172 | 1 year         | 2022/8/5       | WZ-AC1        |
| 19  | Thermohygrometer    | Yuhuaze      | HTC-2       | MRTSUE06184 | 1 year         | 2022/8/10      | WZ-AC1        |
| 20  | Anechoic Chamber    | TDK          | WZ-AC1      | MRTSUE06212 | 1 year         | 2022/4/29      | WZ-AC1        |
| 21  | Horn Antenna        | ETS          | 3117        | MRTSUE06257 | 1 year         | 2021/9/27      | WZ-AC1        |
|     |                     |              |             |             | 1 year         | 2022/9/25      |               |
| 22  | Thermohygrometer    | testo        | 608-H1      | MRTSUE06403 | 1 year         | 2022/6/28      | WZ-AC1        |
| 23  | Horn Antenna        | Schwarzbeck  | BBHA 9170   | MRTSUE06597 | 1 year         | 2021/12/14     | WZ-AC1        |
| 24  | Signal Analyzer     | Keysight     | N9010B      | MRTSUE06607 | 1 year         | 2022/1/6       | WZ-AC1        |
| 25  | Preamplifier        | EMCI         | EMC184045SE | MRTSUE06640 | 1 year         | 2022/1/14      | WZ-AC1        |
| 26  | Preamplifier        | EMCI         | EMC051845SE | MRTSUE06987 | 1 year         | 2021/9/10      | WZ-AC1        |
|     |                     |              |             |             | 1 year         | 2022/9/9       |               |
| 27  | Attenuator          | SHX          | TS2-4dB-6G  | MRTSUE06812 | 2022/6/30      | 2022/6/29      | NS-TR2        |
| 28  | Directional Coupler | narda        | 4226-10     | MRTSUE06253 | 2021/3/16      | 2022/3/15      | NS-TR2        |

Note: The test site with "WZ" code is in the MRT Suzhou laboratory, the test site with "NS" code is in the MRT Shenzhen Laboratory.

| Software     | Version | Function          |
|--------------|---------|-------------------|
| EMI Software | V3      | EMI Test Software |

## 5. Measurement Uncertainty

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k = 2$ .

|                                                                                                                                                                                                                                                |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>AC Conducted Emission Measurement</b>                                                                                                                                                                                                       |
| Measurement Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ):<br>9kHz~150kHz: 3.74dB<br>150kHz~30MHz: 3.44dB                                                                                                                        |
| <b>Radiated Emission Measurement</b>                                                                                                                                                                                                           |
| Measurement Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ):<br>Horizontal:<br>30MHz~300MHz: 5.04dB<br>300MHz~1GHz: 4.95dB<br>1GHz~40GHz: 6.40dB<br>Vertical:<br>30MHz~300MHz: 5.24dB<br>300MHz~1GHz: 6.03dB<br>1GHz~40GHz: 6.40dB |
| <b>Spurious Emissions, Conducted</b>                                                                                                                                                                                                           |
| Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ):<br>0.78dB                                                                                                                                                               |
| <b>Output Power</b>                                                                                                                                                                                                                            |
| Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ):<br>1.13dB                                                                                                                                                               |
| <b>Power Spectrum Density</b>                                                                                                                                                                                                                  |
| Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ):<br>1.15dB                                                                                                                                                               |
| <b>Occupied Bandwidth</b>                                                                                                                                                                                                                      |
| Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ):<br>0.28%                                                                                                                                                                |

## 6. Test Result

### 6.1. Summary

| FCC Section(s)   | Test Description                                                | Test Condition | Verdict |
|------------------|-----------------------------------------------------------------|----------------|---------|
| 15.247(a)(2)     | 6dB Bandwidth                                                   | Conducted      | Pass    |
| 15.247(b)(3)     | Output Power                                                    |                | Pass    |
| 15.247(e)        | Power Spectral Density                                          |                | Pass    |
| 15.247(d)        | Band Edge / Out-of-Band Emissions                               |                | Pass    |
| 15.205<br>15.209 | General Field Strength (Restricted Bands and Radiated Emission) | Radiated       | Pass    |
| 15.207           | AC Conducted Emissions 150kHz - 30MHz                           | Line Conducted | Pass    |

**Remark:**

1. The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
2. Output power test was verified over all data rates of each mode (data refers to operational description), and then choose the maximum power output (low data rate) for final test of each channel.
3. For radiated emission tests, every axis (X, Y, Z) was also verified. The test results shown in the following sections represent the worst-case emissions.

## 6.2. 6dB Bandwidth

### 6.2.1. Test Limit

The minimum 6dB bandwidth shall be at least 500 kHz.


### 6.2.2. Test Procedure used

ANSI C63.10 - 2013 - Section 11.8

### 6.2.3. Test Setting

1. The Spectrum's automatic bandwidth measurement capability was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to  $X = 6$ . The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. Set RBW = 100 kHz
3.  $VBW \geq 3 \times RBW$
4. Detector = Peak
5. Trace mode = Max hold
6. Sweep = Auto couple
7. Allow the trace to stabilize

### 6.2.4. Test Setup

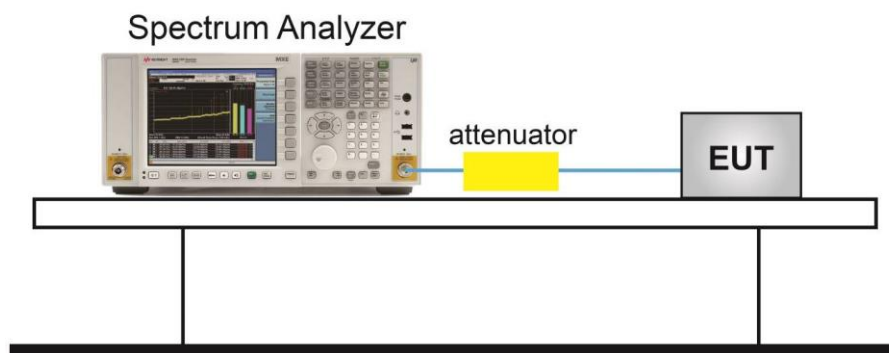

### 6.2.5. Test Result

Refer to Appendix A.1.

### 6.3. Output Power

#### 6.3.1. Test Limit

The maximum output power shall be less 1 Watt (30dBm).

The conducted output power limit specified in paragraph FCC Part 15.247(b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs FCC Part 15.247(b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### 6.3.2. Test Procedure Used


ANSI C63.10 - 2013 - Section 11.9.2.3.2

#### 6.3.3. Test Setting

##### Average Power Measurement

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter.

#### 6.3.4. Test Setup

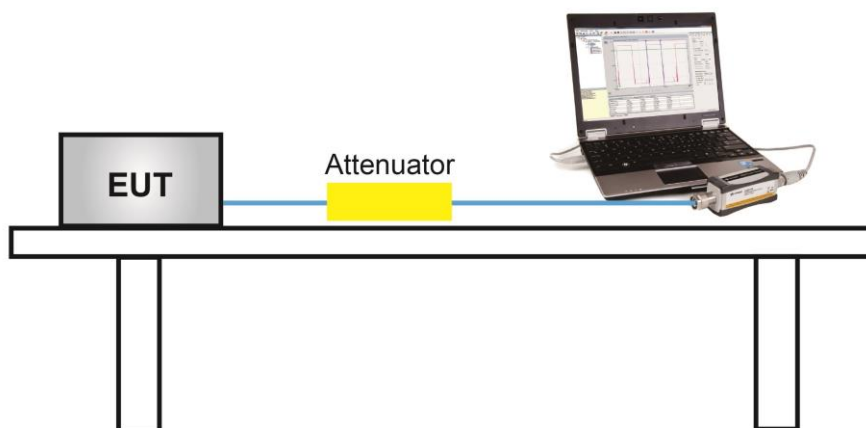

#### 6.3.5. Test Result

Refer to Appendix A.2.

## **6.4. Power Spectral Density**

### **6.4.1. Test Limit**

The maximum permissible power spectral density is 8dBm in any 3 kHz band.

The same method of determining the conducted output power shall be used to determine the power spectral density.


### **6.4.2. Test Procedure Used**

ANSI C63.10 - 2013 - Section 11.10.5

### **6.4.3. Test Setting**

1. Measure the duty cycle (x) of the transmitter output signal.
2. Set instrument center frequency to DTS channel center frequency.
3. Set span to at least 1.5 times the OBW.
4. RBW = 10 kHz.
5. VBW = 30 kHz.
6. Detector = RMS.
7. Ensure that the number of measurement points in the sweep  $\geq 2 \times \text{span}/\text{RBW}$ .
8. Sweep time = auto couple.
9. Don't use sweep triggering. Allow sweep to "free run".
10. Employ trace averaging (RMS) mode over a minimum of 100 traces.
11. Use the peak marker function to determine the maximum amplitude level.
12. Add  $10 \log (1/x)$ , where x is the duty cycle measured in step (a), to the measured PSD to compute the average PSD during the actual transmission time. If measured value exceeds requirement specified by regulatory agency, then reduce RBW (but no less than 3 kHz) and repeat (note that this may require zooming in on the emission of interest and reducing the span to meet the minimum measurement point requirement as the RBW is reduced).

#### 6.4.4. Test Setup

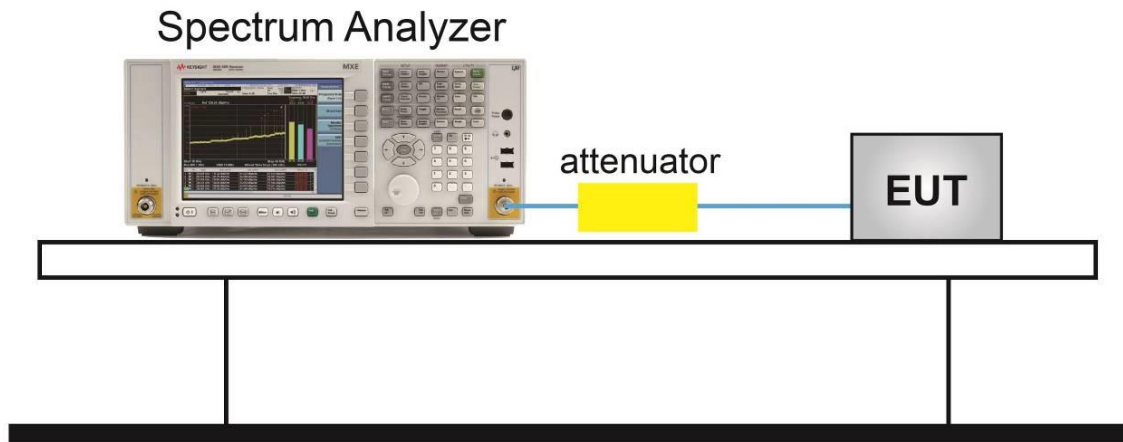

#### 6.4.5. Test Result

Refer to Appendix A.3.

## **6.5. Conducted Band Edge and Out-of-Band Emissions**

### **6.5.1. Test Limit**

The limit for out-of-band spurious emissions at the band edge is 30dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100 kHz bandwidth per the PSD procedure.

### **6.5.2. Test Procedure Used**

ANSI C63.10-2013 - Section 11.11

### **6.5.3. Test Setting**


#### **Reference level measurement**

1. Set instrument center frequency to DTS channel center frequency
2. Set the span to  $\geq 1.5$  times the DTS bandwidth
3. Set the RBW = 100 kHz
4. Set the VBW  $\geq 3 \times$  RBW
5. Detector = peak
6. Sweep time = auto couple
7. Trace mode = max hold
8. Allow trace to fully stabilize

#### **Emission level measurement**

1. Set the center frequency and span to encompass frequency range to be measured
2. RBW = 100kHz
3. VBW = 300kHz
4. Detector = Peak
5. Trace mode = max hold
6. Sweep time = auto couple
7. The trace was allowed to stabilize

#### 6.5.4. Test Setup

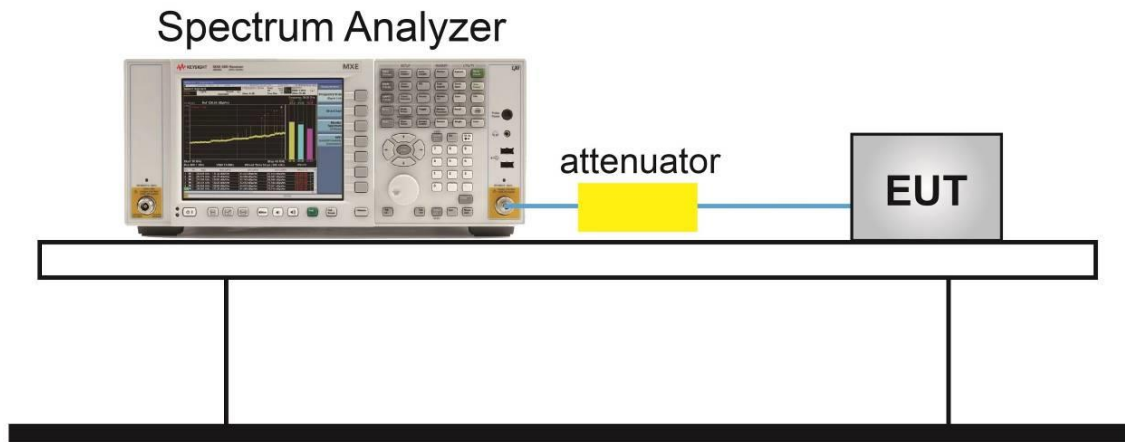

#### 6.5.5. Test Result

Refer to Appendix A.4.

## 6.6. Radiated Spurious Emission

### 6.6.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

| FCC Part 15 Subpart C Paragraph 15.209 |                          |                               |
|----------------------------------------|--------------------------|-------------------------------|
| Frequency<br>[MHz]                     | Field Strength<br>[uV/m] | Measured Distance<br>[Meters] |
| 0.009 - 0.490                          | 2400/F (kHz)             | 300                           |
| 0.490 - 1.705                          | 24000/F (kHz)            | 30                            |
| 1.705 - 30                             | 30                       | 30                            |
| 30 - 88                                | 100                      | 3                             |
| 88 - 216                               | 150                      | 3                             |
| 216 - 960                              | 200                      | 3                             |
| Above 960                              | 500                      | 3                             |

### 6.6.2. Test Procedure Used

ANSI C63.10 - 2013 - Section 11.11 & 11.12

ANSI C63.10 - 2013 - Section 6.3 (General Requirements)

ANSI C63.10 - 2013 - Section 6.4 (Standard test method below 30MHz)

ANSI C63.10 - 2013 - Section 6.5 (Standard test method above 30MHz to 1GHz)

ANSI C63.10 - 2013 - Section 6.6 (Standard test method above 1GHz)

### 6.6.3. Test Setting

**Table 1 - RBW as a function of frequency**

| Frequency     | RBW           |
|---------------|---------------|
| 9 ~ 150 kHz   | 200 ~ 300 Hz  |
| 0.15 ~ 30 MHz | 9 ~ 10 kHz    |
| 30 ~ 1000 MHz | 100 ~ 120 kHz |
| > 1000MHz     | 1MHz          |

**Quasi-Peak Measurements below 1GHz**

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = as specified in Table 1
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

**Peak Measurements above 1GHz**


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

**Average Measurements above 1GHz (Method VB)**


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle  $\geq 98\%$ , set VBW = 10 Hz.  
If the EUT duty cycle is  $< 98\%$ , set VBW  $\geq 1/T$ . T is the minimum transmission duration.
4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

#### 6.6.4. Test Setup

Below 1GHz Test Setup:

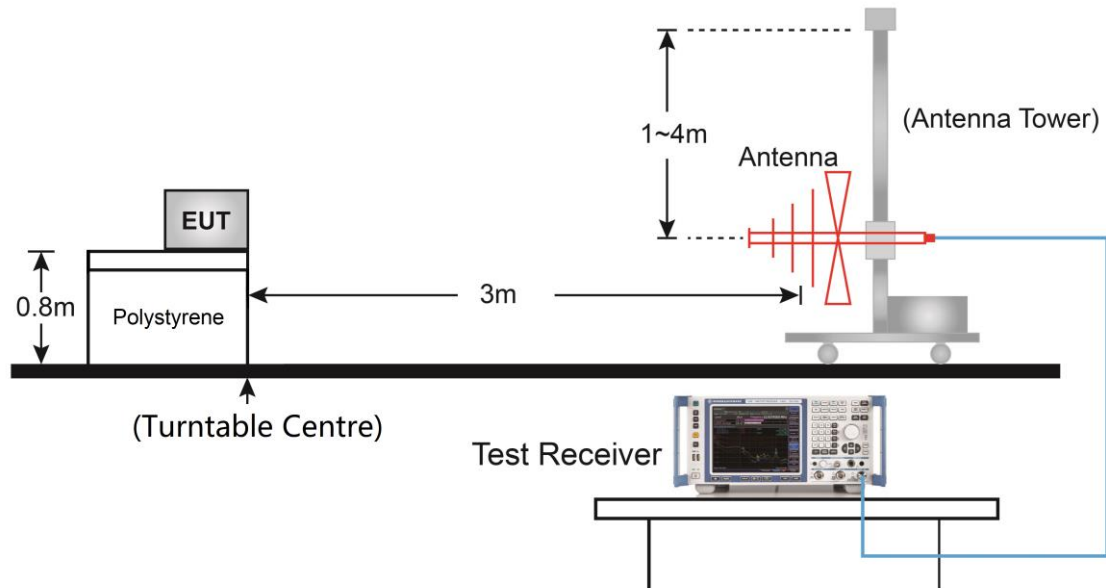

Above 1GHz Test Setup:

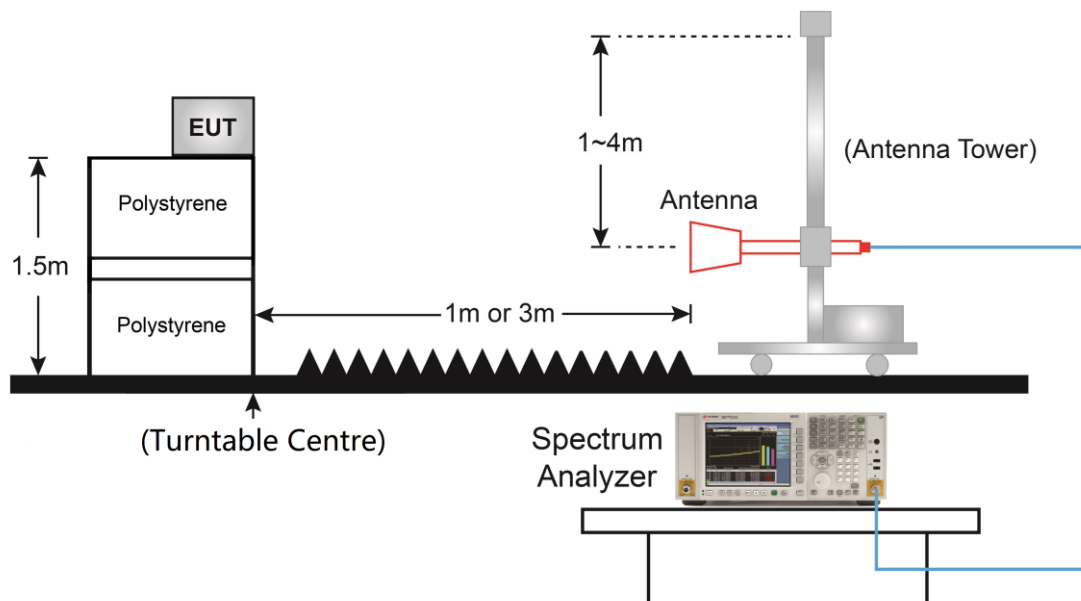

#### 6.6.5. Test Result

Refer to Appendix A.5.

## 6.7. Radiated Restricted Band Edge

### 6.7.1. Test Limit

#### For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

| Frequency<br>(MHz)         | Frequency<br>(MHz)    | Frequency<br>(MHz) | Frequency<br>(GHz) |
|----------------------------|-----------------------|--------------------|--------------------|
| 0.090 - 0.110              | 16.42 - 16.423        | 399.9 - 410        | 4.5 - 5.15         |
| <sup>1</sup> 0.495 - 0.505 | 16.69475 - 16.69525   | 608 - 614          | 5.35 - 5.46        |
| 2.1735 - 2.1905            | 16.80425 - 16.80475   | 960 - 1240         | 7.25 - 7.75        |
| 4.125 - 4.128              | 25.5 - 25.67          | 1300 - 1427        | 8.025 - 8.5        |
| 4.17725 - 4.17775          | 37.5 - 38.25          | 1435 - 1626.5      | 9.0 - 9.2          |
| 4.20725 - 4.20775          | 73 - 74.6             | 1645.5 - 1646.5    | 9.3 - 9.5          |
| 6.215 - 6.218              | 74.8 - 75.2           | 1660 - 1710        | 10.6 - 12.7        |
| 6.26775 - 6.26825          | 108 - 121.94          | 1718.8 - 1722.2    | 13.25 - 13.4       |
| 6.31175 - 6.31225          | 123 - 138             | 2200 - 2300        | 14.47 - 14.5       |
| 8.291 - 8.294              | 149.9 - 150.05        | 2310 - 2390        | 15.35 - 16.2       |
| 8.362 - 8.366              | 156.52475 - 156.52525 | 2483.5 - 2500      | 17.7 - 21.4        |
| 8.37625 - 8.38675          | 156.7 - 156.9         | 2690 - 2900        | 22.01 - 23.12      |
| 8.41425 - 8.41475          | 162.0125 - 167.17     | 3260 - 3267        | 23.6 - 24.0        |
| 12.29 - 12.293             | 167.72 - 173.2        | 3332 - 3339        | 31.2 - 31.8        |
| 12.51975 - 12.52025        | 240 - 285             | 3345.8 - 3358      | 36.43 - 36.5       |
| 12.57675 - 12.57725        | 322 - 335.4           | 3600 - 4400        | ( <sup>2</sup> )   |
| 13.36 - 13.41              | --                    | --                 | --                 |

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

| FCC Part 15 Subpart C Paragraph 15.209 |                          |                               |
|----------------------------------------|--------------------------|-------------------------------|
| Frequency<br>[MHz]                     | Field Strength<br>[uV/m] | Measured Distance<br>[Meters] |
| 0.009 - 0.490                          | 2400/F (kHz)             | 300                           |
| 0.490 - 1.705                          | 24000/F (kHz)            | 30                            |
| 1.705 - 30                             | 30                       | 30                            |
| 30 - 88                                | 100                      | 3                             |
| 88 - 216                               | 150                      | 3                             |
| 216 - 960                              | 200                      | 3                             |
| Above 960                              | 500                      | 3                             |

#### 6.7.2. Test Procedure Used

ANSI C63.10-2013 Section 6.3

ANSI C63.10-2013 Section 6.6

ANSI C63.10-2013 Section 11.13

#### 6.7.3. Test Setting


##### Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

### Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW  $\geq 1/T$
4. As an alternative, the instrument may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some instruments require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to "Voltage" regardless of the display mode
5. Detector = Peak
6. Sweep time = auto
7. Trace mode = max hold
8. Allow max hold to run for at least 50 times (1/duty cycle) traces

#### 6.7.4. Test Setup

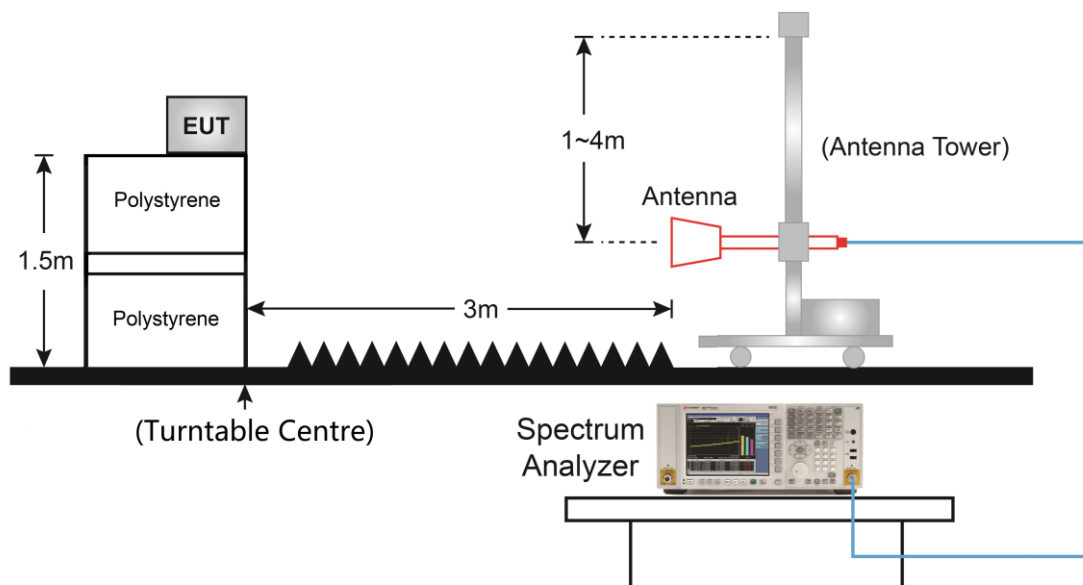

#### 6.7.5. Test Result

Refer to Appendix A.6.

## 6.8. AC Conducted Emissions


### 6.8.1. Test Limit

| FCC Part 15 Subpart C Paragraph 15.207 Limits |           |           |
|-----------------------------------------------|-----------|-----------|
| Frequency (MHz)                               | QP (dBuV) | AV (dBuV) |
| 0.15 - 0.50                                   | 66 - 56   | 56 - 46   |
| 0.50 - 5.0                                    | 56        | 46        |
| 5.0 - 30                                      | 60        | 50        |

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

### 6.8.2. Test Setup

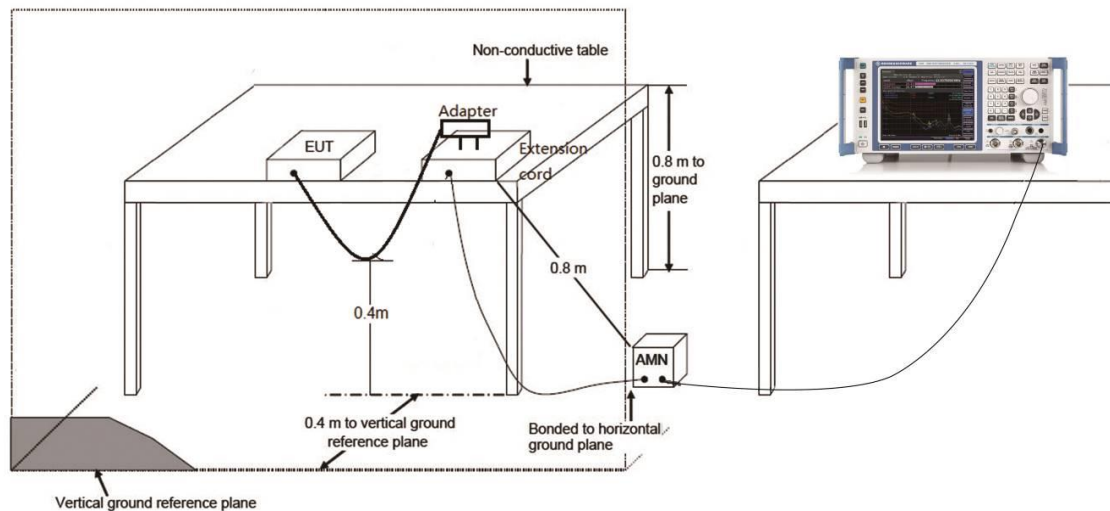

### 6.8.3. Test Result

Refer to Appendix A.7.

## 7. Conclusion

The data collected relate only the item(s) tested and show that the device is in compliance with Part 15C of the FCC rules.

---

The End

## Appendix A - Test Result


### A.1 6dB Bandwidth Test Result

|           |            |               |           |
|-----------|------------|---------------|-----------|
| Test Site | NS-TR2     | Test Engineer | Flay Yang |
| Test Date | 2021/08/22 |               |           |


| Test Mode | Data Rate / MCS | Channel No. | Frequency (MHz) | 6dB Bandwidth (MHz) | Limit (MHz) |
|-----------|-----------------|-------------|-----------------|---------------------|-------------|
| 11b       | 1Mbps           | 01          | 2412            | 8.09                | ≥ 0.5       |
| 11b       | 1Mbps           | 06          | 2437            | 8.11                | ≥ 0.5       |
| 11b       | 1Mbps           | 11          | 2462            | 7.61                | ≥ 0.5       |
| 11g       | 6Mbps           | 01          | 2412            | 15.14               | ≥ 0.5       |
| 11g       | 6Mbps           | 06          | 2437            | 15.15               | ≥ 0.5       |
| 11g       | 6Mbps           | 11          | 2462            | 15.13               | ≥ 0.5       |
| 11n-HT20  | MCS0            | 01          | 2412            | 15.14               | ≥ 0.5       |
| 11n-HT20  | MCS0            | 06          | 2437            | 15.13               | ≥ 0.5       |
| 11n-HT20  | MCS0            | 11          | 2462            | 15.14               | ≥ 0.5       |
| 11n-HT40  | MCS0            | 03          | 2422            | 35.15               | ≥ 0.5       |
| 11n-HT40  | MCS0            | 06          | 2437            | 35.14               | ≥ 0.5       |
| 11n-HT40  | MCS0            | 09          | 2452            | 35.15               | ≥ 0.5       |
| VHT20     | MCS0            | 01          | 2412            | 15.14               | ≥ 0.5       |
| VHT20     | MCS0            | 06          | 2437            | 15.14               | ≥ 0.5       |
| VHT20     | MCS0            | 11          | 2462            | 15.14               | ≥ 0.5       |
| VHT40     | MCS0            | 03          | 2422            | 35.15               | ≥ 0.5       |
| VHT40     | MCS0            | 06          | 2437            | 35.14               | ≥ 0.5       |
| VHT40     | MCS0            | 09          | 2452            | 35.15               | ≥ 0.5       |

## 11b 6dB Bandwidth


## Channel 01 (2412MHz)

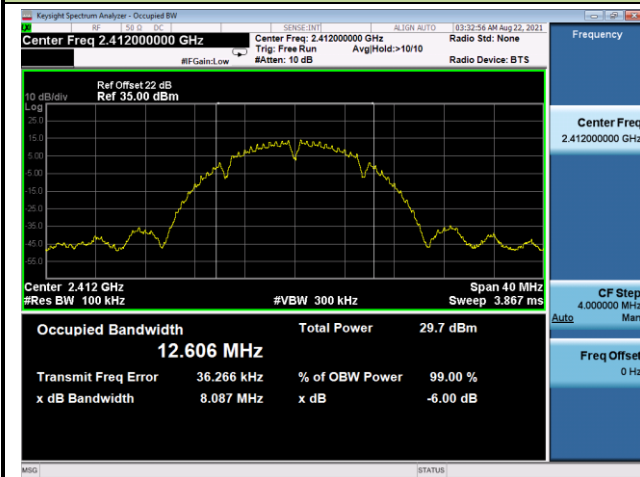

## Channel 06 (2437MHz)

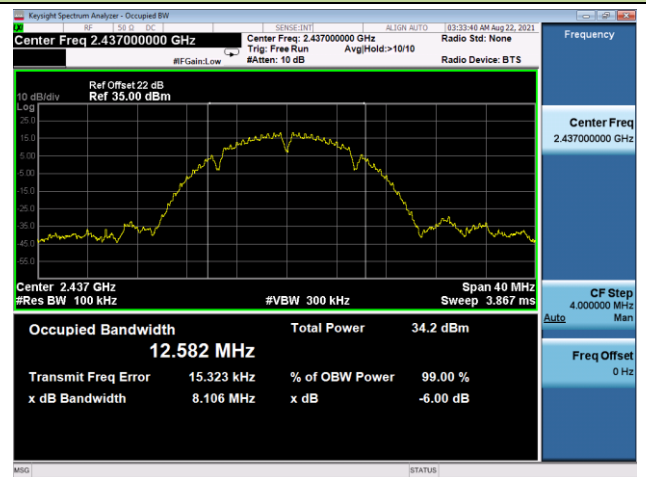


## Channel 11 (2462MHz)

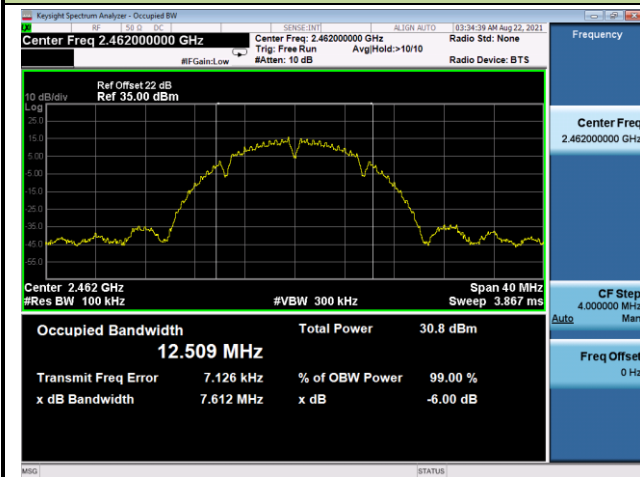


## 11g 6dB Bandwidth


## Channel 01 (2412MHz)

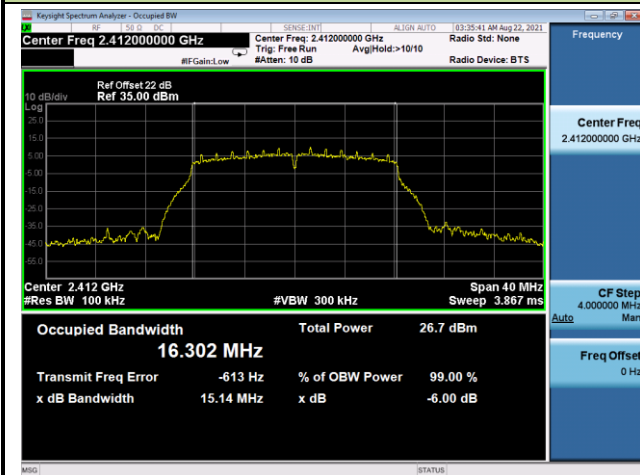

## Channel 06 (2437MHz)

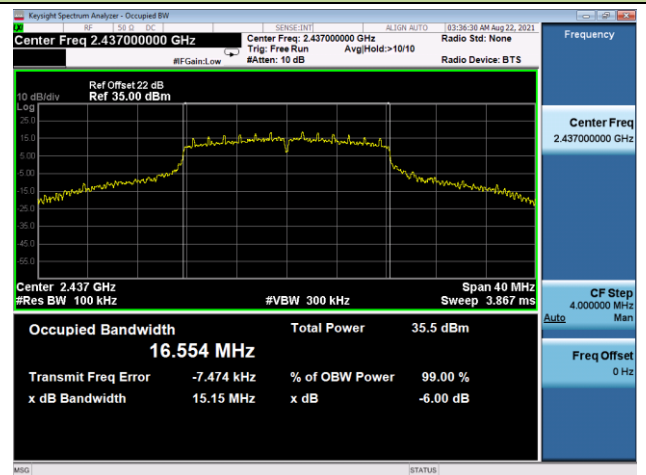


## Channel 11 (2462MHz)

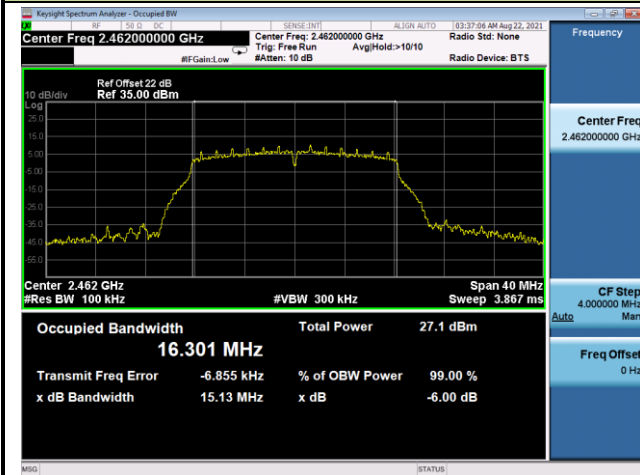

## 11n-HT20 6dB Bandwidth


## Channel 01 (2412MHz)

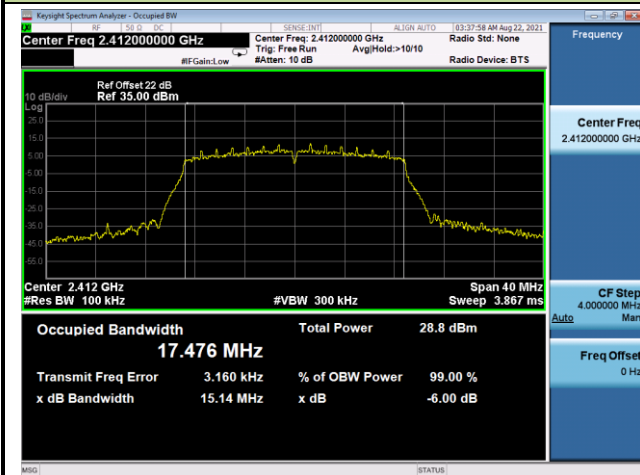

## Channel 06 (2437MHz)




## Channel 11 (2462MHz)

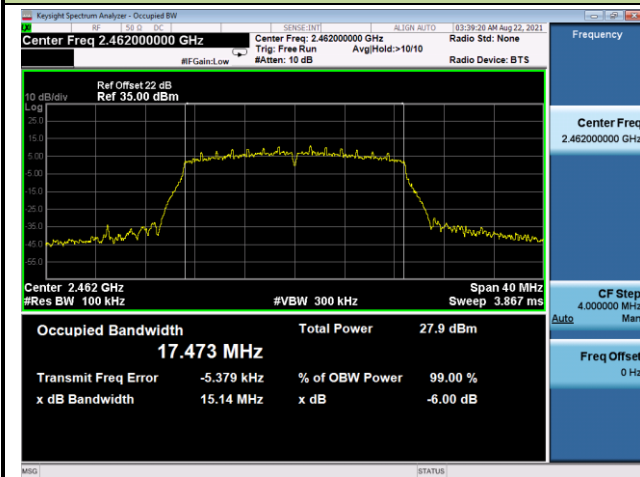


## 11n-HT40 6dB Bandwidth


## Channel 03 (2422MHz)

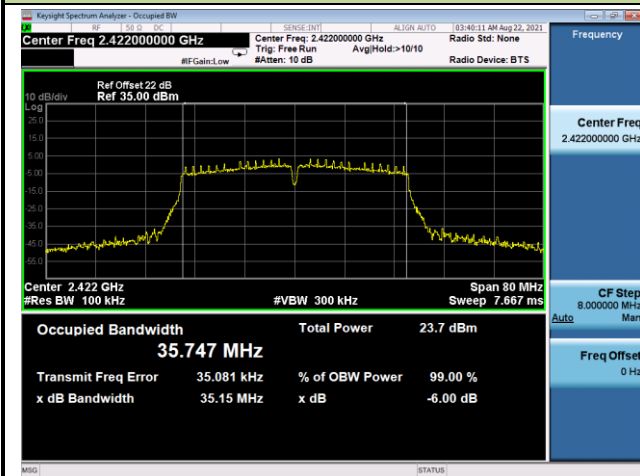

## Channel 06 (2437MHz)

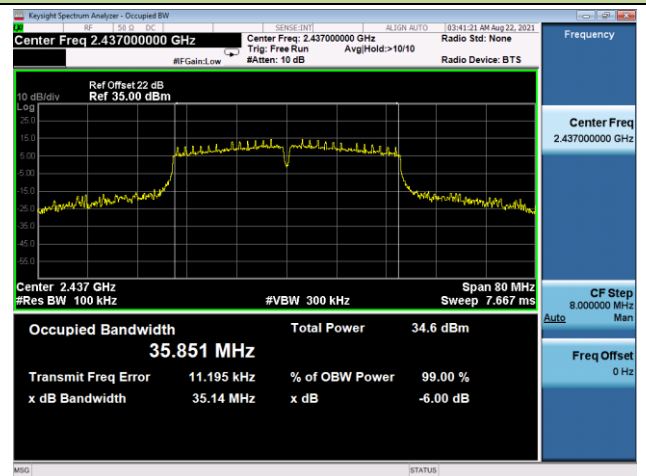


## Channel 09 (2452MHz)

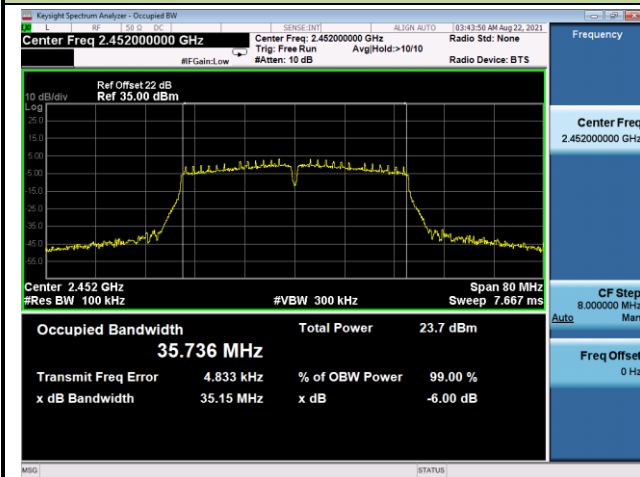


# VHT20 6dB Bandwidth


## Channel 01 (2412MHz)

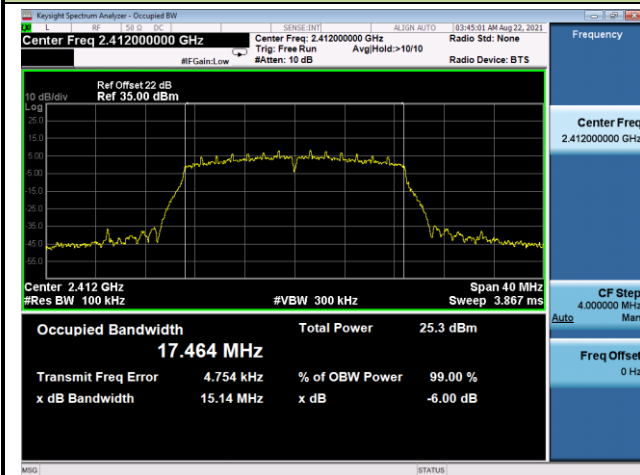

## Channel 06 (2437MHz)

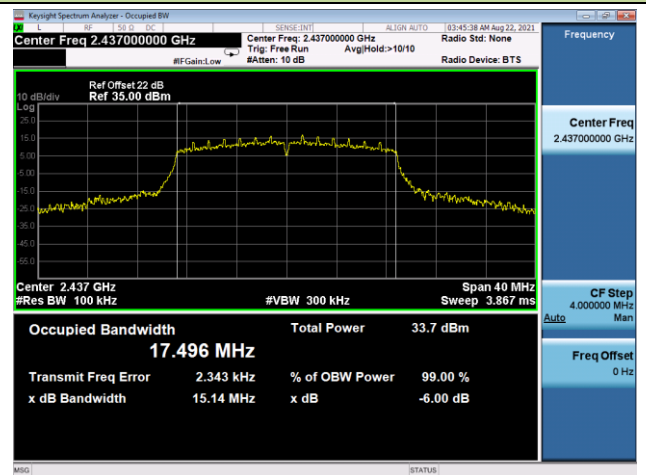


## Channel 11 (2462MHz)

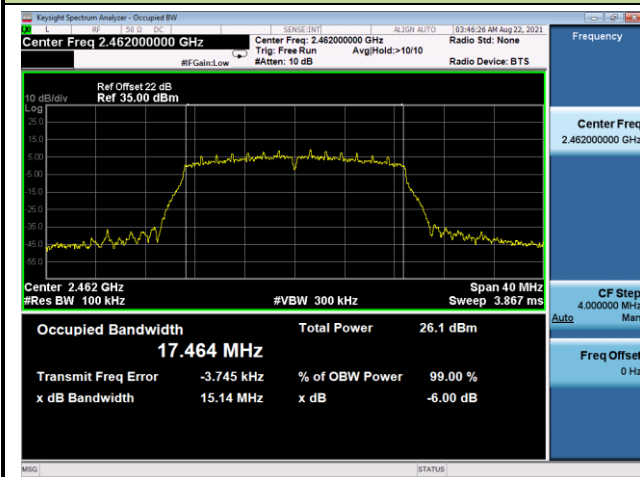


## VHT40 6dB Bandwidth


## Channel 03 (2422MHz)

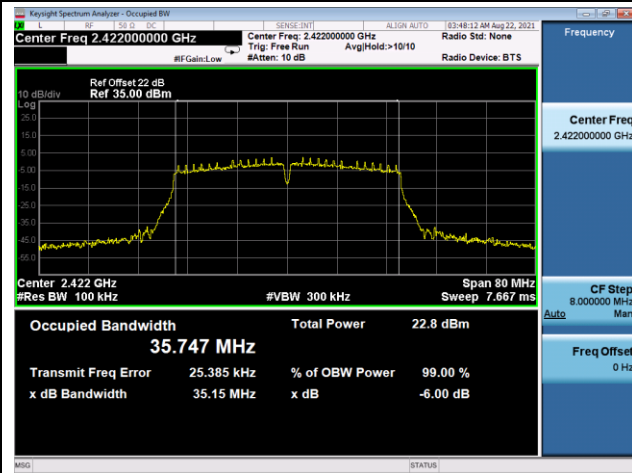

## Channel 06 (2437MHz)

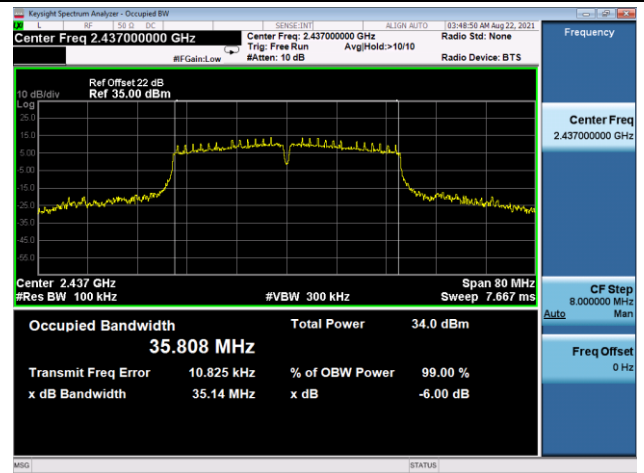

## Channel 09 (2452MHz)

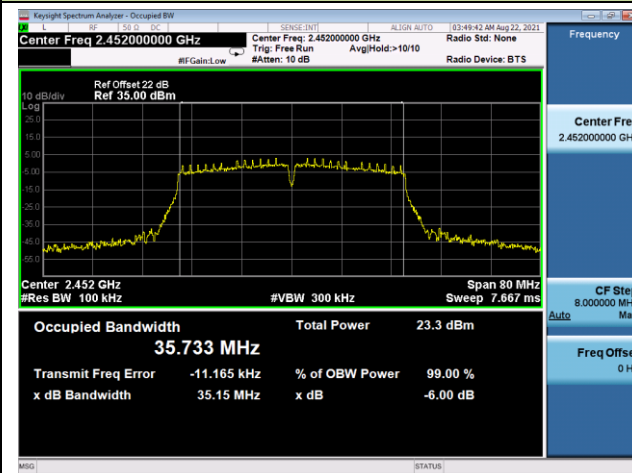

## A.2 Output Power Test Result

|           |            |               |           |
|-----------|------------|---------------|-----------|
| Test Site | NS-TR2     | Test Engineer | Flay Yang |
| Test Date | 2021/08/22 |               |           |

Pre-Test RF Output Power at various data rates for Ant 0. All modes of operation and data rates were investigated, so all RF test requirements shall be executed at low data rates.

| Test Mode | Bandwidth<br>(MHz) | Channel No. | Frequency<br>(MHz) | Data Rate<br>/ MCS | Average Power<br>(dBm) |
|-----------|--------------------|-------------|--------------------|--------------------|------------------------|
| 11b       | 20                 | 6           | 2437               | 1Mbps              | 22.12                  |
|           |                    |             |                    | 5.5Mbps            | 22.09                  |
|           |                    |             |                    | 11Mbps             | 21.78                  |
| 11g       | 20                 | 6           | 2437               | 6Mbps              | 21.06                  |
|           |                    |             |                    | 24Mbps             | 20.51                  |
|           |                    |             |                    | 54Mbps             | 19.63                  |
| 11n       | 20                 | 6           | 2437               | MCS0               | 20.72                  |
|           |                    |             |                    | MCS3               | 20.13                  |
|           |                    |             |                    | MCS7               | 17.88                  |
| 11n       | 40                 | 6           | 2437               | MCS0               | 18.77                  |
|           |                    |             |                    | MCS3               | 18.44                  |
|           |                    |             |                    | MCS7               | 16.97                  |
| VHT       | 20                 | 6           | 2437               | MCS0               | 20.26                  |
|           |                    |             |                    | MCS3               | 19.85                  |
|           |                    |             |                    | MCS7               | 18.57                  |
| VHT       | 40                 | 6           | 2437               | MCS0               | 17.90                  |
|           |                    |             |                    | MCS3               | 17.42                  |
|           |                    |             |                    | MCS7               | 16.68                  |

|           |            |               |           |
|-----------|------------|---------------|-----------|
| Test Site | NS-TR2     | Test Engineer | Flay Yang |
| Test Date | 2021/08/22 |               |           |

| Test Mode | Data Rate / MCS | Channel No. | Freq. (MHz) | Average Power (dBm) |       | Total Average Power (dBm) | Limit (dBm) | Result |
|-----------|-----------------|-------------|-------------|---------------------|-------|---------------------------|-------------|--------|
|           |                 |             |             | Ant 0               | Ant 1 |                           |             |        |
| 11b       | 1Mbps           | 01          | 2412        | 22.56               | 22.08 | 25.34                     | ≤ 30.00     | Pass   |
| 11b       | 1Mbps           | 06          | 2437        | 22.12               | 22.10 | 25.12                     | ≤ 30.00     | Pass   |
| 11b       | 1Mbps           | 11          | 2462        | 23.45               | 23.54 | 26.51                     | ≤ 30.00     | Pass   |
| 11g       | 6Mbps           | 01          | 2412        | 19.25               | 18.50 | 21.90                     | ≤ 30.00     | Pass   |
| 11g       | 6Mbps           | 06          | 2437        | 21.06               | 21.03 | 24.06                     | ≤ 30.00     | Pass   |
| 11g       | 6Mbps           | 11          | 2462        | 20.58               | 19.54 | 23.10                     | ≤ 30.00     | Pass   |
| 11n-HT20  | MCS0            | 01          | 2412        | 17.52               | 17.85 | 20.70                     | ≤ 30.00     | Pass   |
| 11n-HT20  | MCS0            | 06          | 2437        | 20.72               | 20.85 | 23.80                     | ≤ 30.00     | Pass   |
| 11n-HT20  | MCS0            | 11          | 2462        | 20.71               | 19.61 | 23.21                     | ≤ 30.00     | Pass   |
| 11n-HT40  | MCS0            | 03          | 2422        | 15.47               | 15.07 | 18.28                     | ≤ 30.00     | Pass   |
| 11n-HT40  | MCS0            | 06          | 2437        | 18.77               | 18.62 | 21.71                     | ≤ 30.00     | Pass   |
| 11n-HT40  | MCS0            | 09          | 2452        | 17.62               | 17.12 | 20.39                     | ≤ 30.00     | Pass   |
| VHT20     | MCS0            | 01          | 2412        | 18.86               | 18.22 | 21.56                     | ≤ 30.00     | Pass   |
| VHT20     | MCS0            | 06          | 2437        | 20.26               | 19.64 | 22.97                     | ≤ 30.00     | Pass   |
| VHT20     | MCS0            | 11          | 2462        | 19.64               | 18.51 | 22.12                     | ≤ 30.00     | Pass   |
| VHT40     | MCS0            | 03          | 2422        | 15.66               | 15.31 | 18.50                     | ≤ 30.00     | Pass   |
| VHT40     | MCS0            | 06          | 2437        | 17.90               | 18.43 | 21.18                     | ≤ 30.00     | Pass   |
| VHT40     | MCS0            | 09          | 2452        | 15.83               | 14.57 | 18.26                     | ≤ 30.00     | Pass   |

Note: Total Average Power (dBm) =  $10 \cdot \log \{10^{(\text{Ant 0 Average Power} / 10)} + 10^{(\text{Ant 1 Average Power} / 10)}\}$  (dBm).

### A.3 Power Spectral Density Test Result

|           |                         |               |           |
|-----------|-------------------------|---------------|-----------|
| Test Site | NS-TR2                  | Test Engineer | Flay Yang |
| Test Date | 2021/08/22 ~ 2021/08/24 |               |           |

| Test Mode | Data Rate/<br>MCS | Channel No. | Freq. (MHz) | AVG PSD (dBm/10kHz) |        | Duty Cycle (%) | Total AVG PSD (dBm/10kHz) | Limit (dBm/3kHz) | Result |
|-----------|-------------------|-------------|-------------|---------------------|--------|----------------|---------------------------|------------------|--------|
|           |                   |             |             | Ant 0               | Ant 1  |                |                           |                  |        |
| 11b       | 1Mbps             | 01          | 2412        | -4.19               | -4.40  | 98.91          | -1.28                     | ≤ 7.49           | Pass   |
| 11b       | 1Mbps             | 06          | 2437        | -3.22               | -3.63  | 98.91          | -0.41                     | ≤ 7.49           | Pass   |
| 11b       | 1Mbps             | 11          | 2462        | -2.96               | -2.64  | 98.91          | 0.21                      | ≤ 7.49           | Pass   |
| 11g       | 6Mbps             | 01          | 2412        | -8.60               | -9.40  | 95.57          | -5.77                     | ≤ 7.49           | Pass   |
| 11g       | 6Mbps             | 06          | 2437        | -7.00               | -6.89  | 95.57          | -3.74                     | ≤ 7.49           | Pass   |
| 11g       | 6Mbps             | 11          | 2462        | -7.41               | -8.23  | 95.57          | -4.59                     | ≤ 7.49           | Pass   |
| 11n-HT20  | MCS0              | 01          | 2412        | -10.05              | -10.07 | 91.63          | -6.67                     | ≤ 7.49           | Pass   |
| 11n-HT20  | MCS0              | 06          | 2437        | -7.06               | -7.19  | 91.63          | -3.73                     | ≤ 7.49           | Pass   |
| 11n-HT20  | MCS0              | 11          | 2462        | -7.38               | -8.16  | 91.63          | -4.36                     | ≤ 7.49           | Pass   |
| 11n-HT40  | MCS0              | 03          | 2422        | -14.99              | -14.89 | 85.86          | -11.27                    | ≤ 7.49           | Pass   |
| 11n-HT40  | MCS0              | 06          | 2437        | -11.60              | -11.70 | 85.86          | -7.97                     | ≤ 7.49           | Pass   |
| 11n-HT40  | MCS0              | 09          | 2452        | -12.54              | -13.15 | 85.86          | -9.16                     | ≤ 7.49           | Pass   |
| VHT20     | MCS0              | 01          | 2412        | -9.71               | -9.58  | 92.44          | -6.29                     | ≤ 7.49           | Pass   |
| VHT20     | MCS0              | 06          | 2437        | -7.76               | -8.71  | 92.44          | -4.86                     | ≤ 7.49           | Pass   |
| VHT20     | MCS0              | 11          | 2462        | -7.75               | -8.91  | 92.44          | -4.94                     | ≤ 7.49           | Pass   |
| VHT40     | MCS0              | 03          | 2422        | -15.11              | -15.22 | 85.71          | -11.48                    | ≤ 7.49           | Pass   |
| VHT40     | MCS0              | 06          | 2437        | -11.58              | -10.96 | 85.71          | -7.58                     | ≤ 7.49           | Pass   |
| VHT40     | MCS0              | 09          | 2452        | -13.42              | -13.43 | 85.71          | -9.75                     | ≤ 7.49           | Pass   |

Note:


When EUT duty cycle > 98%, Total AVG PSD =  $10 \cdot \log \{10^{(\text{Ant 0 AVG PSD}/10)} + 10^{(\text{Ant 1 AVG PSD}/10)}\}$

When EUT duty cycle ≤ 98%, Total AVG PSD =  $10 \cdot \log \{10^{(\text{Ant 0 AVG PSD}/10)} + 10^{(\text{Ant 1 AVG PSD}/10)}\} + 10 \cdot \log (1/\text{Duty Cycle})$ .


PSD Limit (dBm/3kHz) = 8 - (6.51 - 6) = 7.49 (dBm/3kHz)

## 11b AVGPSPD - Ant 0


## Channel 01 (2412MHz)

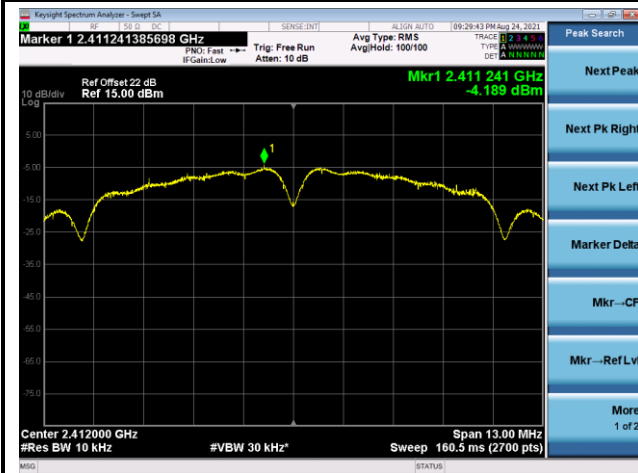

## Channel 06 (2437MHz)

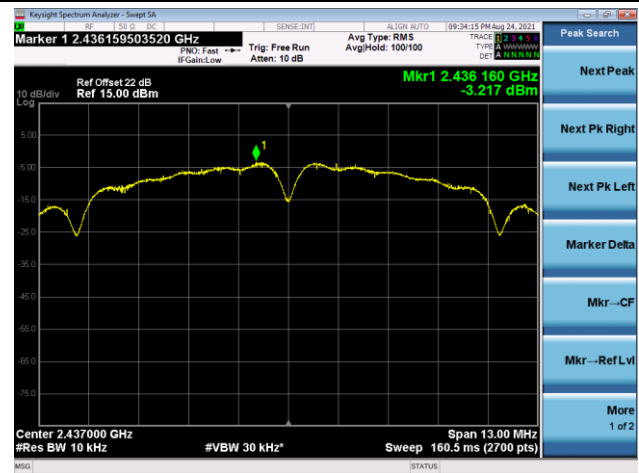


## Channel 11 (2462MHz)

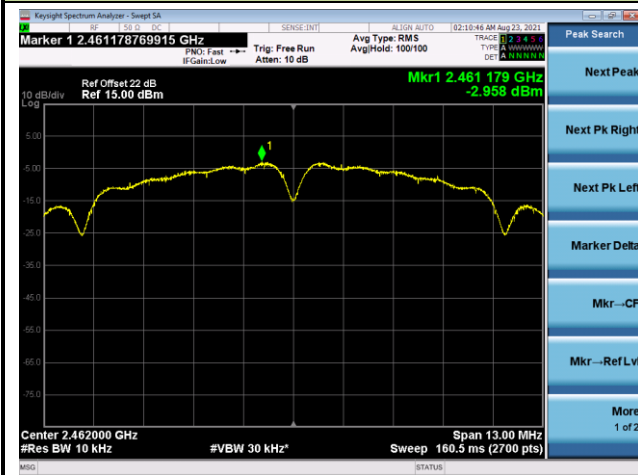


## 11g AVGPSPD - Ant 0


## Channel 01 (2412MHz)

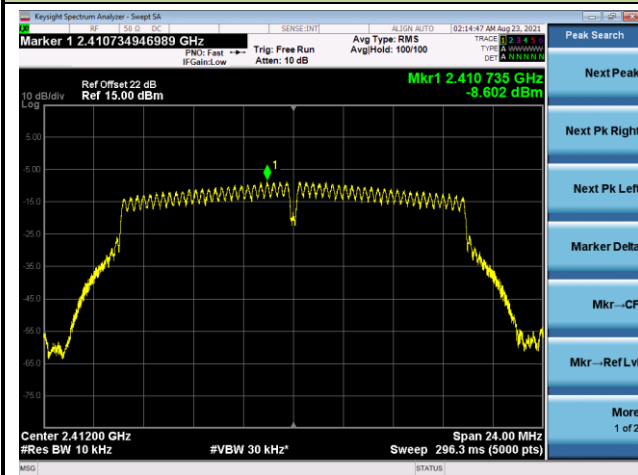

## Channel 06 (2437MHz)

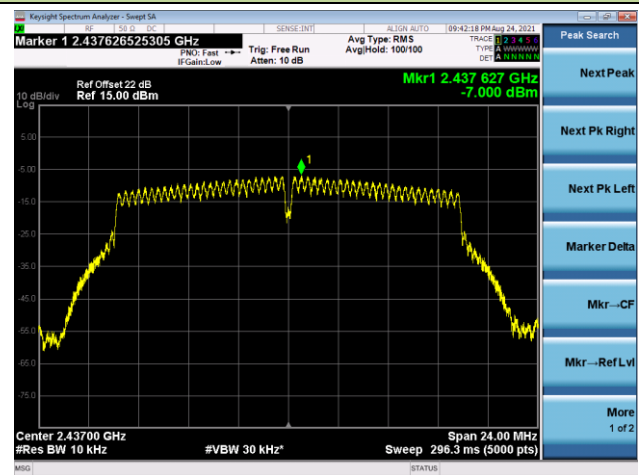


## Channel 11 (2462MHz)

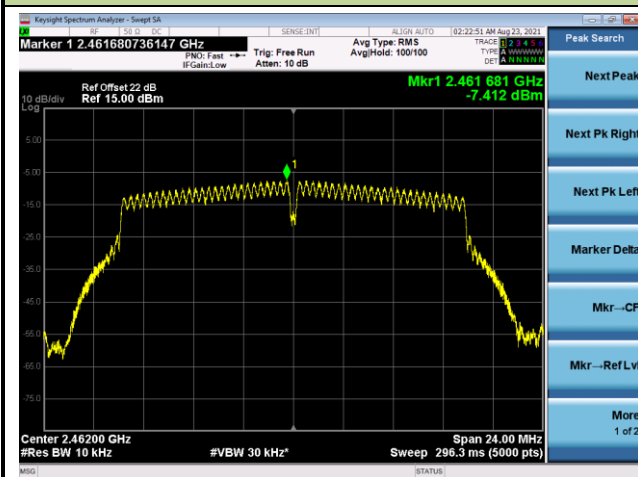


## 11n-HT20 AVGPDS - Ant 0


## Channel 01 (2412MHz)

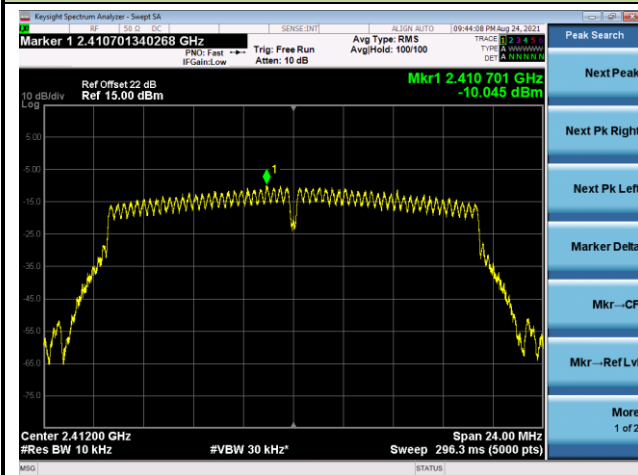

## Channel 06 (2437MHz)

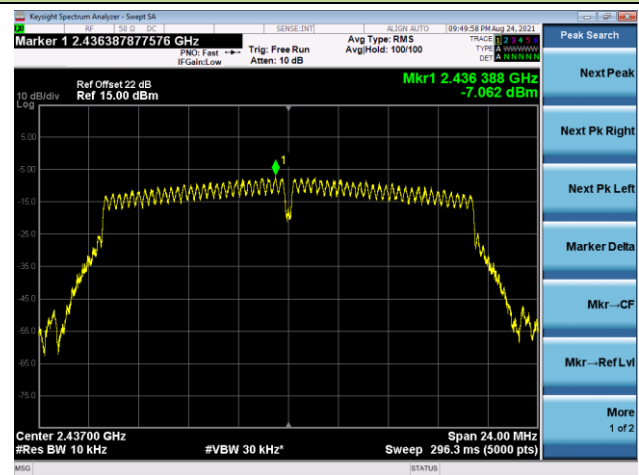


## Channel 11 (2462MHz)

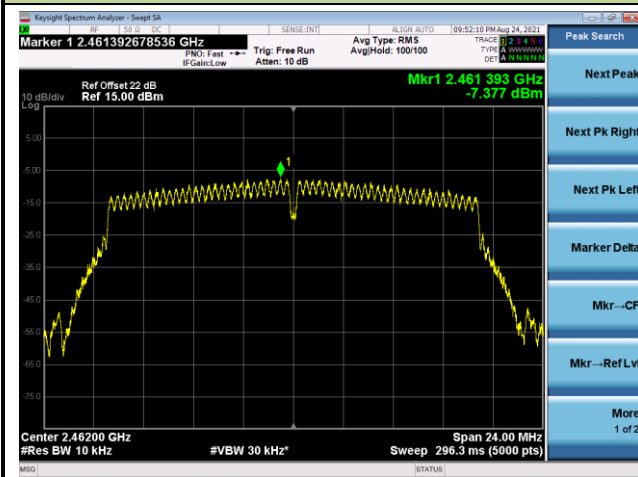


## 11n-HT40 AVGPDS - Ant 0


## Channel 03 (2422MHz)

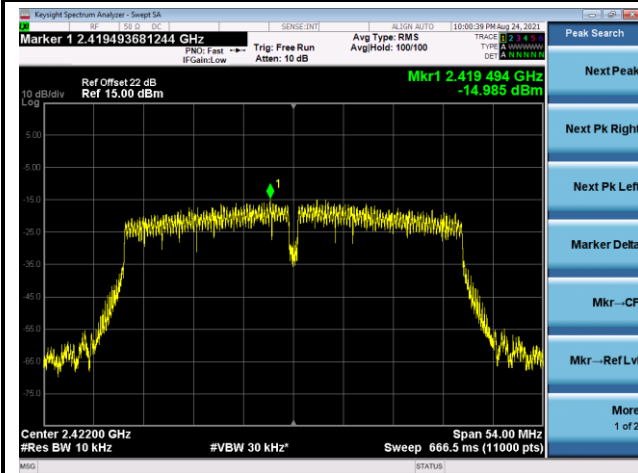

## Channel 06 (2437MHz)

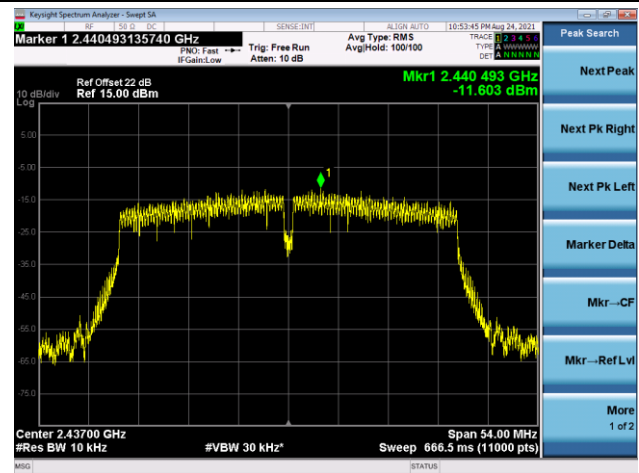


## Channel 09 (2452MHz)

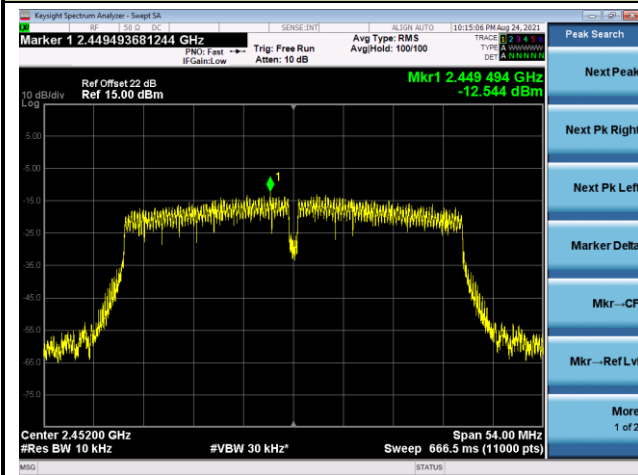


## VHT20 AVGPDS - Ant 0


Channel 01 (2412MHz)

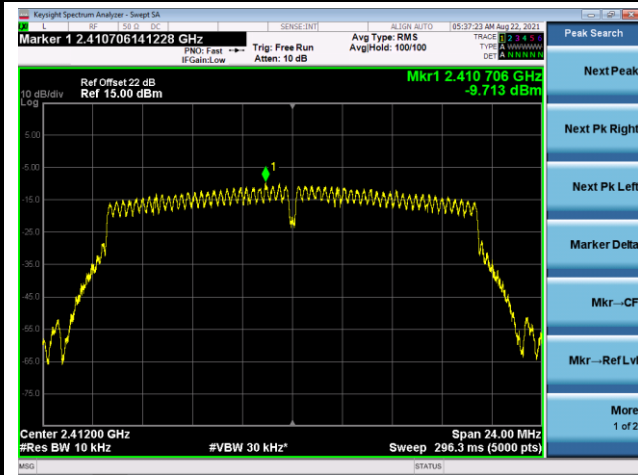

Channel 06 (2437MHz)

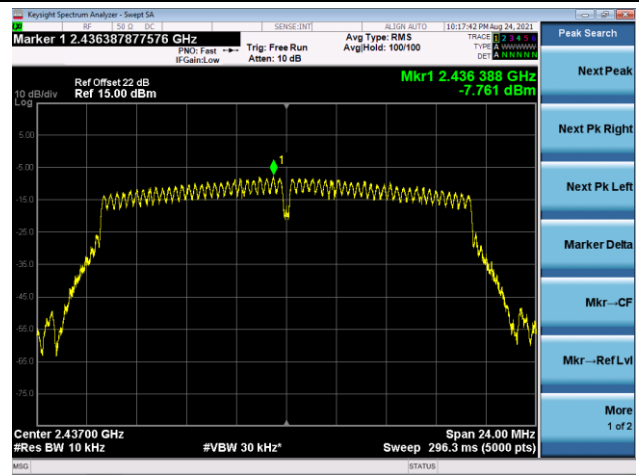


Channel 11 (2462MHz)

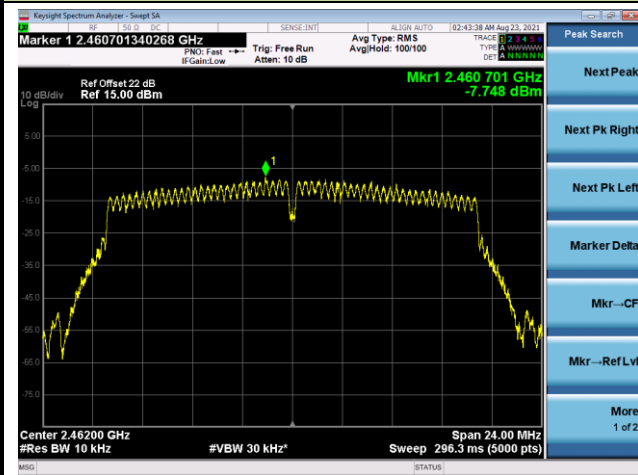


## VHT40 AVGPDS - Ant 0


## Channel 03 (2422MHz)

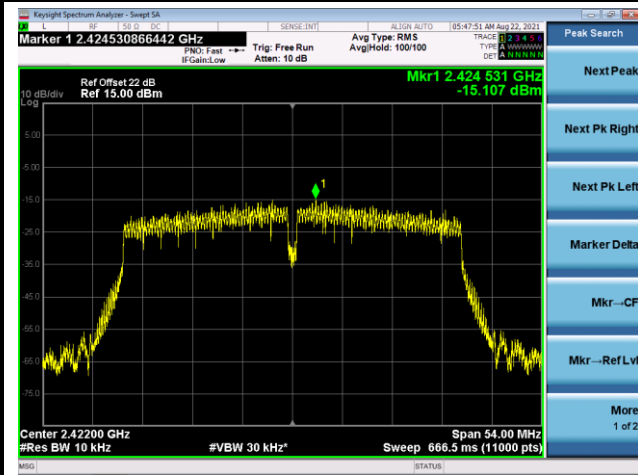

## Channel 06 (2437MHz)

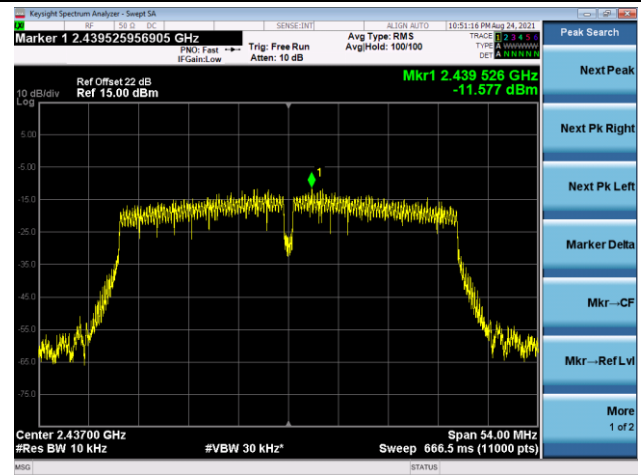


## Channel 09 (2452MHz)

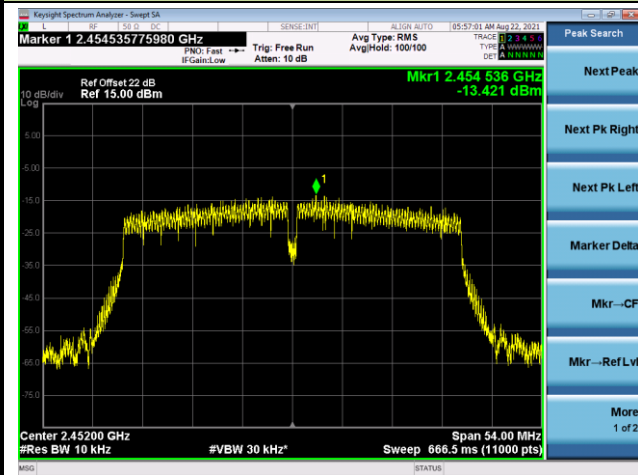


## 11b AVGPSP - Ant 1


## Channel 01 (2412MHz)

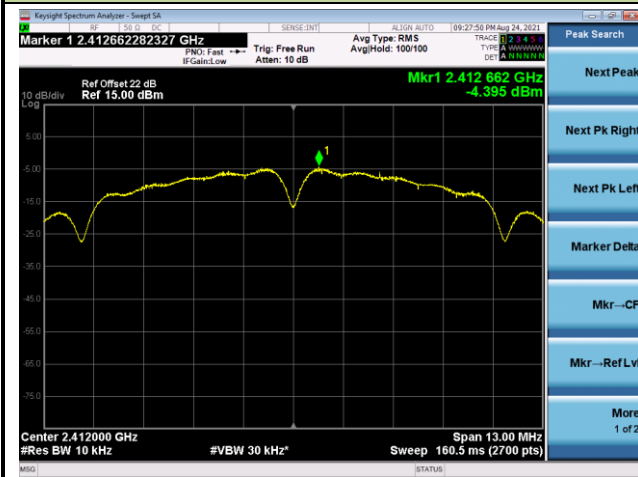

## Channel 06 (2437MHz)

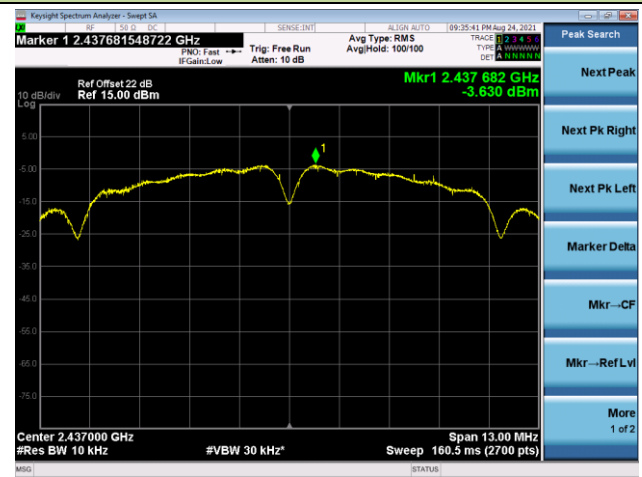


## Channel 11 (2462MHz)

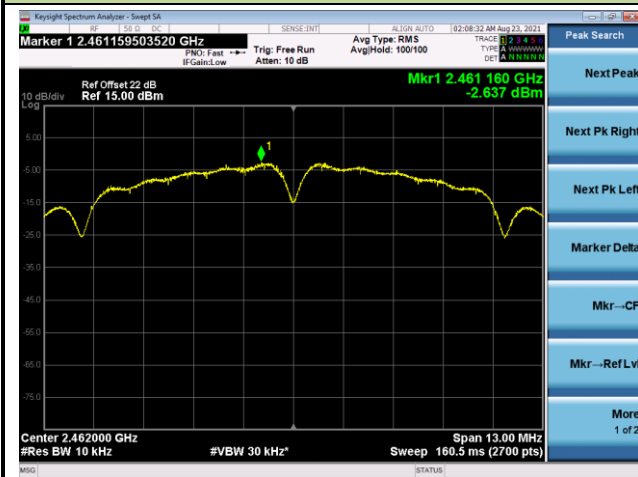


## 11g AVGPSPD - Ant 1


## Channel 01 (2412MHz)

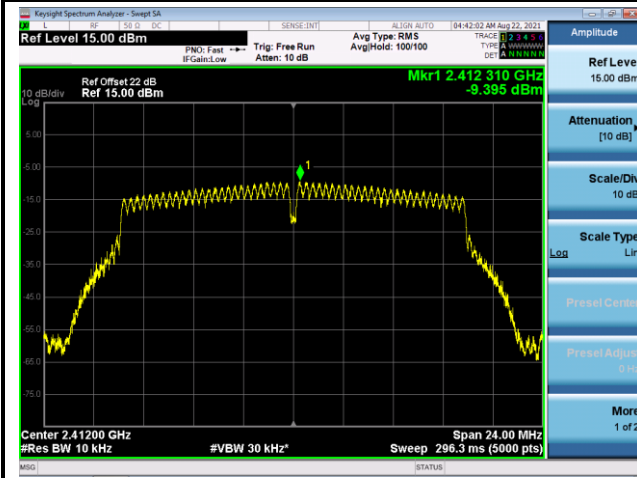

## Channel 06 (2437MHz)

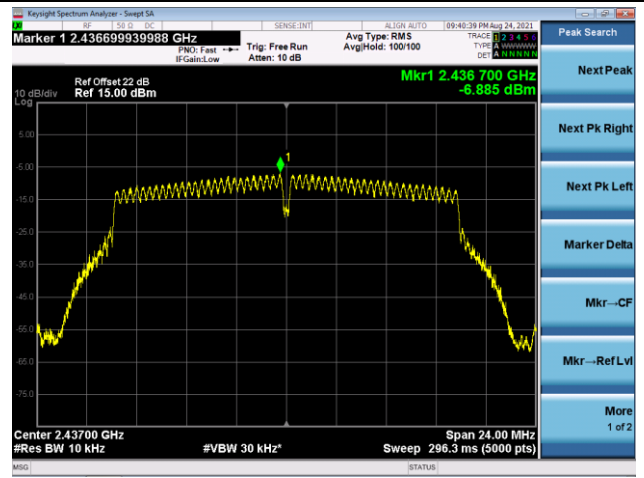


## Channel 11 (2462MHz)

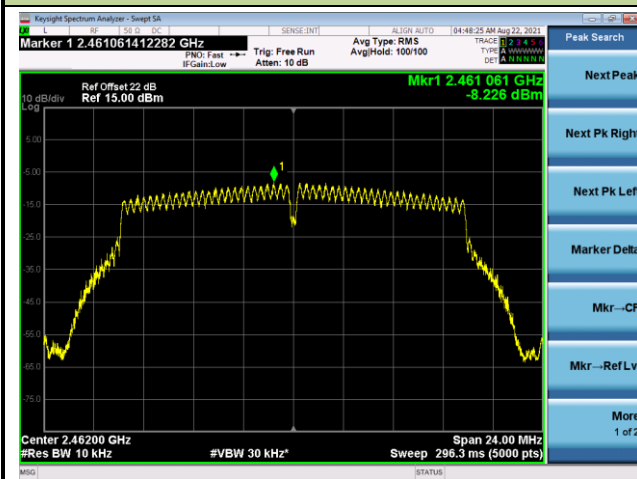


## 11n-HT20 AVGPDS - Ant 1


## Channel 01 (2412MHz)

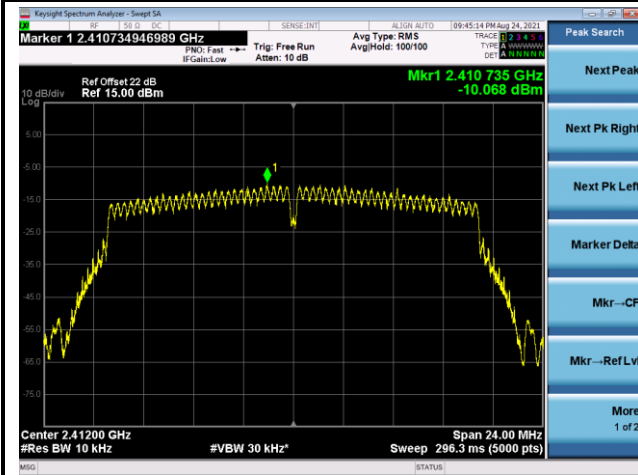

## Channel 06 (2437MHz)

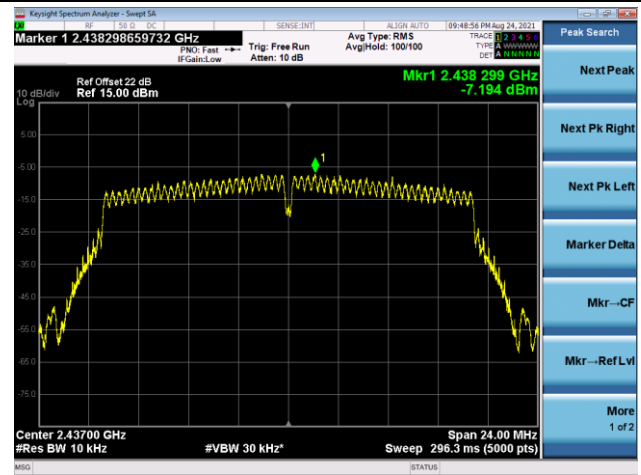


## Channel 11 (2462MHz)

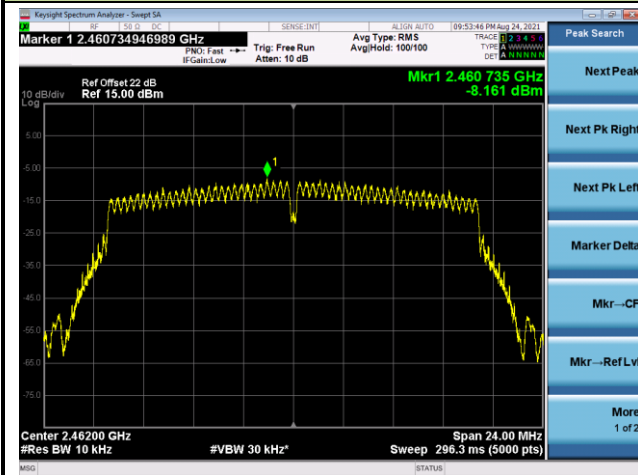


## 11n-HT40 AVGPDS - Ant 1

## Channel 03 (2422MHz)

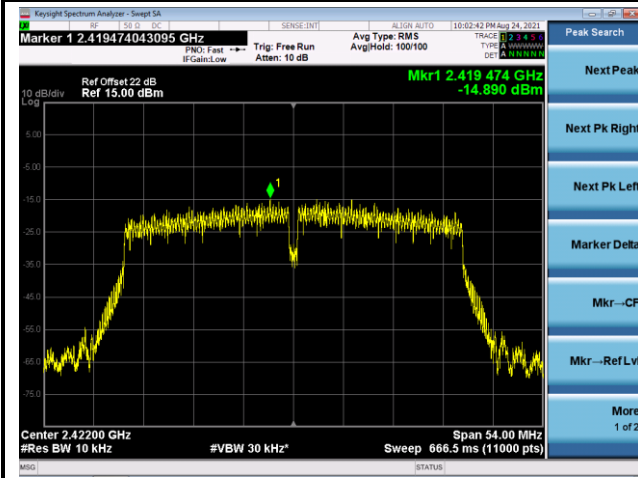

## Channel 06 (2437MHz)

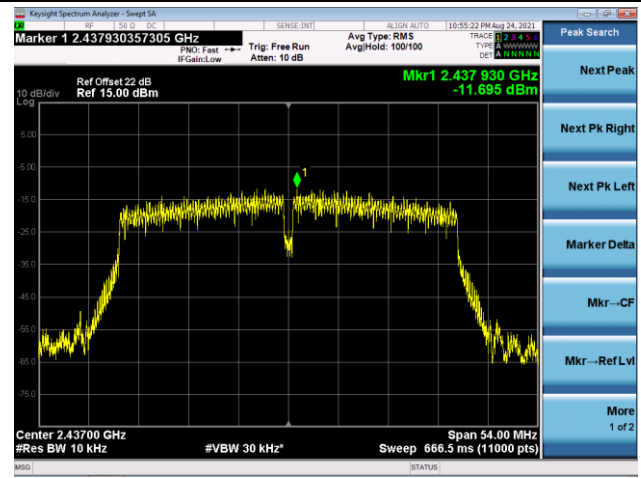

## Channel 09 (2452MHz)

