

FCC TEST REPORT

REPORT NO.: RF911009R10

MODEL NO.: 3CRWE52196

RECEIVED: Oct. 3, 2002

TESTED: Oct. 4 ~ Nov. 1, 2002

APPLICANT: ACCTON TECHNOLOGY CORPORATION

ADDRESS: No. 1, Creation Rd., III, Science-Based
Industrial Park, Hsinchu, Taiwan, R.O.C.

ISSUED BY: Advance Data Technology Corporation

LAB LOCATION: 47 14th Lin, Chiapau Tsun, Linko, Taipei,
Taiwan, R.O.C.

This test report consists of 58 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, NVLAP or any government agencies. The test results in the report only apply to the tested sample.



0528
ILAC MRA



Lab Code: 200102-0



Table of Contents

1	CERTIFICATION.....	4
2	SUMMARY OF TEST RESULTS	5
3	GENERAL INFORMATION.....	6
3.1	GENERAL DESCRIPTION OF EUT	6
3.2	DESCRIPTION OF TEST MODES	7
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS	7
3.4	DESCRIPTION OF SUPPORT UNITS	8
4	TEST TYPES AND RESULTS	9
4.1	CONDUCTED EMISSION MEASUREMENT	9
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	9
4.1.2	TEST INSTRUMENTS	9
4.1.3	TEST PROCEDURES	10
4.1.4	TEST SETUP	11
4.1.5	EUT OPERATING CONDITIONS	12
4.1.6	TEST RESULTS (A)	13
4.1.7	TEST RESULTS (B)	19
4.2	RADIATED EMISSION MEASUREMENT	25
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT	25
4.2.2	TEST INSTRUMENTS	26
4.2.3	TEST PROCEDURES	27
4.2.4	TEST SETUP	28
4.2.5	EUT OPERATING CONDITIONS	28
4.2.6	TEST RESULTS (A)	29
4.2.7	TEST RESULTS (B)	31
4.2.8	TEST RESULT	33
4.3	6dB BANDWIDTH MEASUREMENT	36
4.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT	36
4.3.2	TEST INSTRUMENTS	36
4.3.3	TEST PROCEDURE	37
4.3.4	TEST SETUP	37
4.3.5	EUT OPERATING CONDITIONS	37
4.3.6	TEST RESULTS.....	38
4.4	MAXIMUM PEAK OUTPUT POWER.....	42
4.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	42
4.4.2	INSTRUMENTS.....	42
4.4.3	TEST PROCEDURES	43
4.4.4	TEST SETUP	43
4.4.5	EUT OPERATING CONDITIONS	43
4.4.6	TEST RESULTS.....	44
4.5	POWER SPECTRAL DENSITY MEASUREMENT	45
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	45
4.5.2	TEST INSTRUMENTS	45
4.5.3	TEST PROCEDURE	46
4.5.4	TEST SETUP	46



4.5.5	EUT OPERATING CONDITION.....	46
4.5.6	TEST RESULTS.....	47
4.6	BAND EDGES MEASUREMENT	51
4.6.1	LIMITS OF BAND EDGES MEASUREMENT	51
4.6.2	TEST INSTRUMENTS	51
4.6.3	TEST PROCEDURE	51
4.6.4	EUT OPERATING CONDITION.....	52
4.6.5	TEST RESULTS.....	52
4.7	ANTENNA REQUIREMENT	55
4.7.1	STANDARD APPLICABLE	55
4.7.2	ANTENNA CONNECTED CONSTRUCTION	55
5	PHOTOGRAPHS OF THE TEST CONFIGURATION	56
6	INFORMATION ON THE TESTING LABORATORIES	58



1 CERTIFICATION

PRODUCT : OfficeConnect® Wireless Cable/DSL Gateway
BRAND NAME : 3Com
MODEL NO. : 3CRWE52196
APPLICANT : ACCTON TECHNOLOGY CORPORATION
STANDARDS : 47 CFR Part 15, Subpart C (Section 15.247),
ANSI C63.4-1992

We, **Advance Data Technology Corporation**, hereby certify that one sample of the designation has been tested in our facility from Oct. 4, 2002 to Nov. 1, 2002. The test record, data evaluation and Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions herein specified.

CHECKED BY : Emily Lu , DATE : Nov. 4, 2002
Emily Lu

APPROVED BY : Alan Lane , DATE : Nov. 4, 2002
Dr. Alan Lane, Manager

2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: 47 CFR Part 15, Subpart C			
Standard Section	Test Type and Limit	Result	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit Minimum passing margin is -8.17dBuV at 0.259MHz
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit: min. 500kHz	PASS	Meet the requirement of limit
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit
15.247(c)	Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit Minimum passing margin is -3.00dBuV at 825.00MHz
15.247(d)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit
15.247(c)	Band Edge Measurement Limit: 20 dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	OfficeConnect® Wireless Cable/DSL Gateway
MODEL NO.	3CRWE52196
POWER SUPPLY	12~13VDC from AC adapter
MODULATION TYPE	BPSK, QPSK, CCK
RADIO TECHNOLOGY	DSSS
TRANSFER RATE	1/2/5.5/11Mbps
FREQUENCY RANGE	2412MHz ~ 2462MHz
NUMBER OF CHANNEL	11
OUTPUT POWER	15.14dBm
ANTENNA TYPE	Dipole antenna
I/O PORTS	RJ45 port
ASSOCIATED DEVICES	NA

NOTE:

1. Two power adapters were provided to this EUT. Please refer to the following information.

BRAND	3Com
MODEL NO. :	61-0090-000 Rev.A
INPUT POWER :	120VAC 60Hz 0.17A 21W
OUTPUT POWER :	12VDC 1000mA 12W

BRAND	SILICORE
MODEL NO. :	SLD81308
INPUT POWER :	120VAC 60Hz 0.2A
OUTPUT POWER :	13VDC 0.8A

2. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

3.2 DESCRIPTION OF TEST MODES

Eleven channels are provided in this EUT.

Channel	Frequency	Channel	Frequency
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

NOTE:

1. Below 1 GHz, the channel 1, 6, and 11 were pre-tested in chamber. The channel 11, worst case one, was chosen for final test.
2. Above 1 GHz, the channel 1, 6, and 11 were tested individually.
3. Test result (A) is for EUT tested with adapter model 61-0090-000 Rev.A and test result (B) is for EUT tested with adapter model SLD81308.

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is an OfficeConnect® Wireless Cable/DSL Gateway. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC CFR 47 Part 15, Subpart C. (15.247)

ANSI C63.4 : 1992

All tests have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.



3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK	DELL	PP01L	TW-09C748-12800-19O-B220	FCC DoC APPROVED
2	NOTEBOOK	DELL	PPX	99125	FCC DoC APPROVED
3	PRINTER	EPSON	LQ-300+	DCGY017096	FCC DoC APPROVED
4	MODEM	ACEEX	1414	980020504	IFAXDM1414
5	FAST ETHERNET PC CARD	D-Link	DFE-680TXD	RE1A044413	MQ4FE2K5MX
6	USB 10/100 Fast Ethernet	D-Link	DU-E100	UR15001597	FCC DoC APPROVED

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA
2	NA
3	1.2m braid shielded wire, terminated with DB25 and Centronics connector via metallic frame, w/o core
4	1.2 m braid shielded wire, terminated with DB25 and DB9 connector via metallic frame, w/o core.
5	NA
6	NA

NOTE: All power cords of the above support units are non shielded (1.8m).

4 TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
ROHDE & SCHWARZ Test Receiver	ESCS30	847793/022	Mar. 12, 2003
ROHDE & SCHWARZ Artificial Mains Network (for EUT)	ESH2-Z5	828075/003	Jul. 23, 2003
ROHDE & SCHWARZ 200-A Four-line V-Network	ENV4200	830326/018	Oct. 25, 2002
* ROHDE & SCHWARZ 4-wire ISN	ENY41	838119/028	Dec. 02, 2002
* ROHDE & SCHWARZ 2-wire ISN	ENY22	837497/018	Dec. 02, 2002
EMCO-L.I.S.N. (for peripheral)	3825/2	90031627	Jul. 23, 2003
Software	Cond-V2L	NA	NA
RF cable (JYEBAO)	5D-FB	Cable-C05.01	Jul. 23, 2003
LYNICS Terminator (For EMCO LISN)	0900510	E1-01-305	Feb. 20, 2003
LYNICS Terminator (For EMCO LISN)	0900510	E1-01-306	Feb. 20, 2003
Shielded Room	Site 5	ADT-C05	NA
VCCI Site Registration No.	Site 5	C-1093	NA

- NOTE:**
1. The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
 2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 3. “*”: These equipment are used for conducted telecom port test only (if tested).
 4. The test was performed in ADT Open Site No. 5.




4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150 kHz to 30 MHz was searched. Emission levels over 10dB under the prescribed limits could not be reported

4.1.4 DEVIATION FROM TEST STANDARD

No Deviation

4.1.5 TEST SETUP

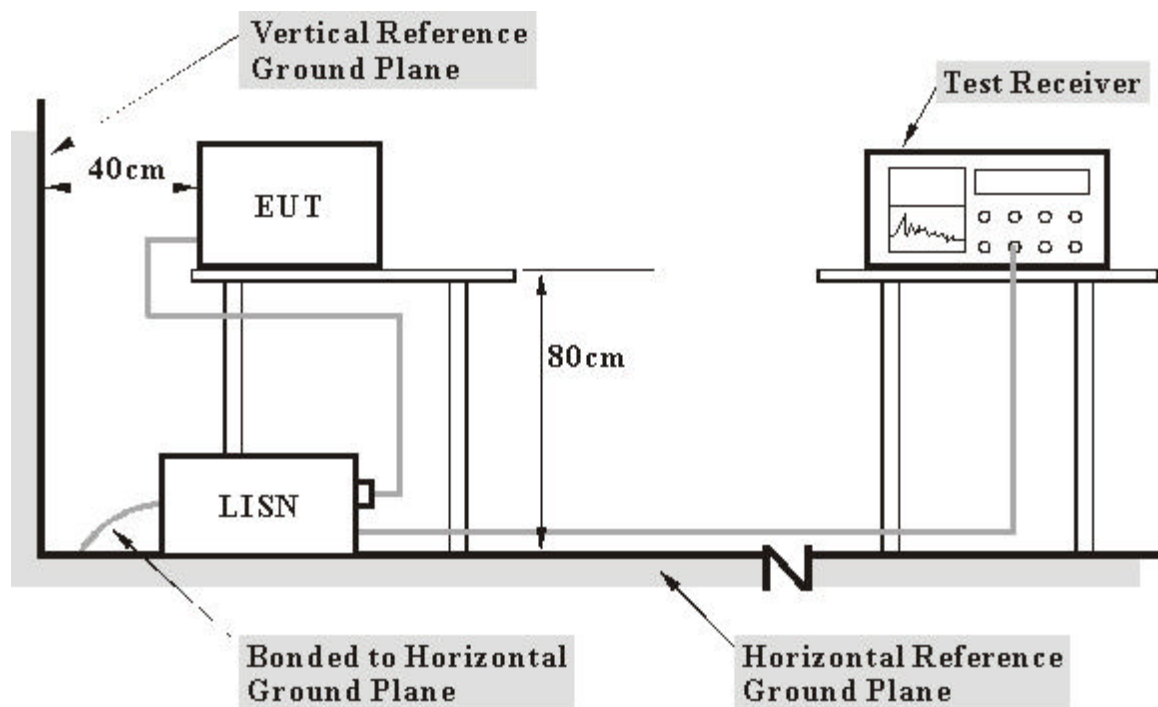

- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.



4.1.6 EUT OPERATING CONDITIONS


- a. Placed the EUT (with a computer system) on the testing table.
- b. The computer system sent data to EUT by command "PIN" via an RJ 45 cable.
- c. The computer system sent "H" messages to Color Monitor and Monitor displayed "H" patterns on its screen.
- d. The computer system sent "H" messages to modem.
- e. The computer system sent "H" messages to printer, and the printer prints them on paper.
- f. Prepared another computer system to act as a communication partner and placed it outside of testing area.
- g. The communication partner run a test program to enable EUT under transmission/receiving condition continuously at specific channel frequency via an RJ 45 cable.
- h. The communication partner sent data to EUT by command "PIN".

4.1.7 TEST RESULTS (A)

EUT	OfficeConnect Wireless Cable/DSL Gateway	MODEL	3CRWE52196
MODE	Channel 1	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	25deg. C, 60%RH, 1005 hPa	TESTED BY: Gary Chang	

No	Freq. (MHz)	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			QP.	AV.	QP.	AV.	QP.	AV.	QP.	AV.
1	0.197	0.10	52.53	-	52.63	-	63.74	53.74	-11.11	-
2	0.259	0.10	53.19	40.98	53.29	41.08	61.46	51.46	-8.17	-10.38
3	0.518	0.12	41.07	-	41.19	-	56.00	46.00	-14.81	-
4	1.344	0.20	29.13	-	29.33	-	56.00	46.00	-26.67	-
5	16.996	0.92	25.69	-	26.61	-	60.00	50.00	-33.39	-
6	21.664	1.13	34.88	-	36.01	-	60.00	50.00	-23.99	-


- Remarks:
1. "*": Undetectable
 2. QP. and AV. are abbreviations of quasi-peak and average individually.
 3. "-": NA
 4. The emission levels of other frequencies were very low against the limit.
 5. Margin value = Emission level - Limit value
 6. Emission Level = Correction Factor + Reading Value.

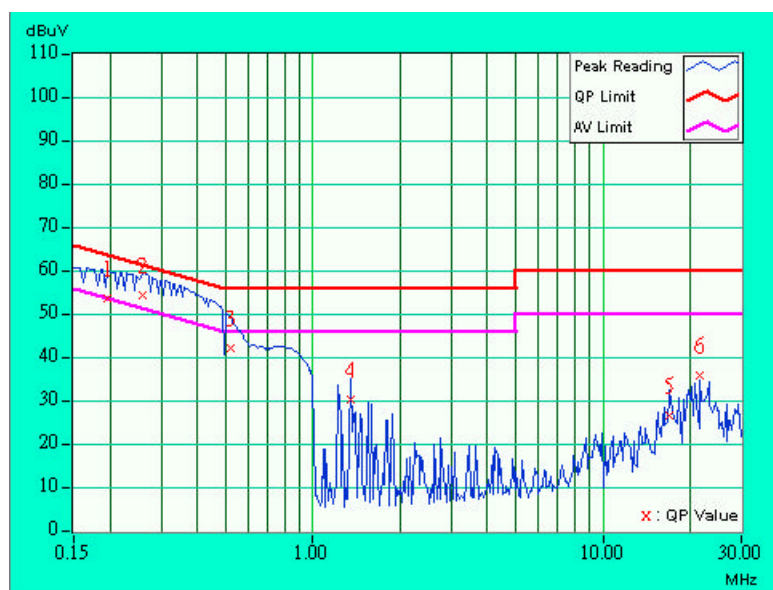

EUT	OfficeConnect® Wireless Cable/DSL Gateway	MODEL	3CRWE52196
MODE	Channel 1	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	25deg. C, 60%RH, 1005 hPa	TESTED BY: Gary Chang	

No	Freq. (MHz)	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			QP.	AV.	QP.	AV.	QP.	AV.	QP.	AV.
1	0.150	0.10	52.82	-	52.92	-	66.00	56.00	-13.08	-
2	0.259	0.10	52.81	40.37	52.91	40.47	61.45	51.45	-8.54	-10.98
3	0.516	0.12	33.59	-	33.71	-	56.00	46.00	-22.29	-
4	0.857	0.18	28.22	-	28.40	-	56.00	46.00	-27.60	-
5	16.898	0.61	31.61	-	32.22	-	60.00	50.00	-27.78	-
6	23.129	0.74	35.37	-	36.11	-	60.00	50.00	-23.89	-


- Remarks:
1. "x": Undetectable
 2. QP. and AV. are abbreviations of quasi-peak and average individually.
 3. "-": NA
 4. The emission levels of other frequencies were very low against the limit.
 5. Margin value = Emission level - Limit value
 6. Emission Level = Correction Factor + Reading Value.

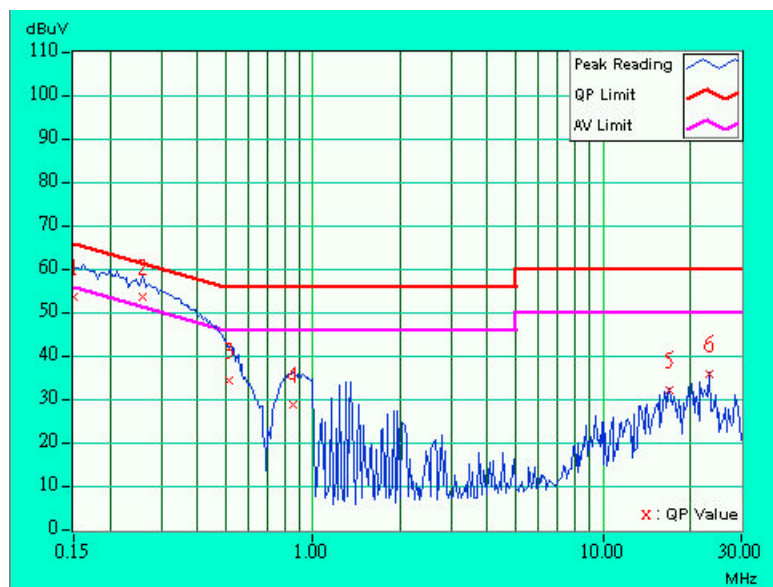

EUT	OfficeConnect® Wireless Cable/DSL Gateway	MODEL	3CRWE52196
MODE	Channel 6	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	25deg. C, 60%RH, 1005 hPa	TESTED BY: Gary Chang	

No	Freq. (MHz)	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			QP.	AV.	QP.	AV.	QP.	AV.	QP.	AV.
1	0.150	0.10	53.99	-	54.09	-	66.00	56.00	-11.91	-
2	0.259	0.10	52.47	40.15	52.57	40.25	61.46	51.46	-8.89	-11.21
3	0.463	0.11	44.43	-	44.54	-	56.65	46.65	-12.11	-
4	0.741	0.16	34.21	-	34.37	-	56.00	46.00	-21.63	-
5	20.258	1.11	34.18	-	35.29	-	60.00	50.00	-24.71	-
6	23.129	1.16	35.49	-	36.65	-	60.00	50.00	-23.35	-


- Remarks:
1. "x": Undetectable
 2. QP. and AV. are abbreviations of quasi-peak and average individually.
 3. "-": NA
 4. The emission levels of other frequencies were very low against the limit.
 5. Margin value = Emission level - Limit value
 6. Emission Level = Correction Factor + Reading Value.

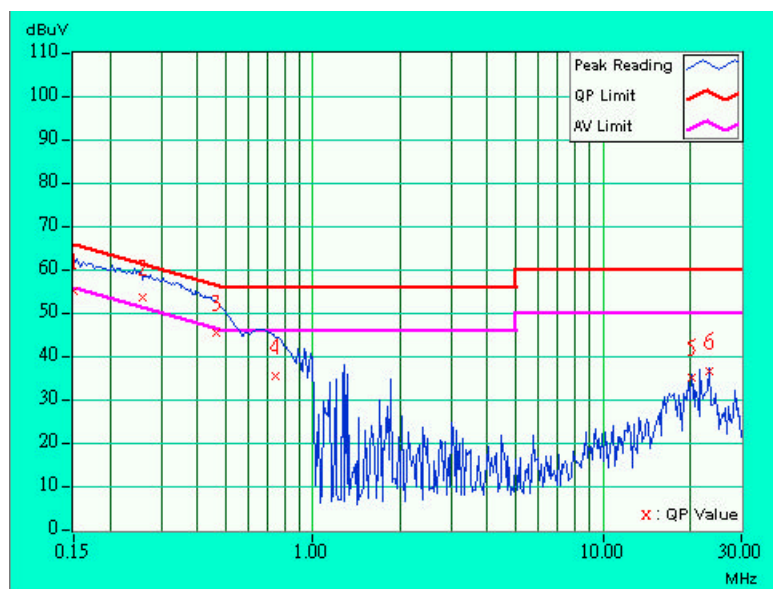

EUT	OfficeConnect® Wireless Cable/DSL Gateway	MODEL	3CRWE52196
MODE	Channel 6	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	25deg. C, 60%RH, 1005 hPa	TESTED BY: Gary Chang	

No	Freq. (MHz)	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			QP.	AV.	QP.	AV.	QP.	AV.	QP.	AV.
1	0.150	0.10	52.46	-	52.56	-	66.00	56.00	-13.44	-
2	0.259	0.10	52.83	40.24	52.93	40.34	61.45	51.45	-8.52	-11.11
3	0.830	0.17	22.69	-	22.86	-	56.00	46.00	-33.14	-
4	1.813	0.20	20.90	-	21.10	-	56.00	46.00	-34.90	-
5	16.227	0.57	32.35	-	32.92	-	60.00	50.00	-27.08	-
6	23.129	0.74	35.23	-	35.97	-	60.00	50.00	-24.03	-


- Remarks:
1. "*" : Undetectable
 2. QP. and AV. are abbreviations of quasi-peak and average individually.
 3. "-": NA
 4. The emission levels of other frequencies were very low against the limit.
 5. Margin value = Emission level - Limit value
 6. Emission Level = Correction Factor + Reading Value.

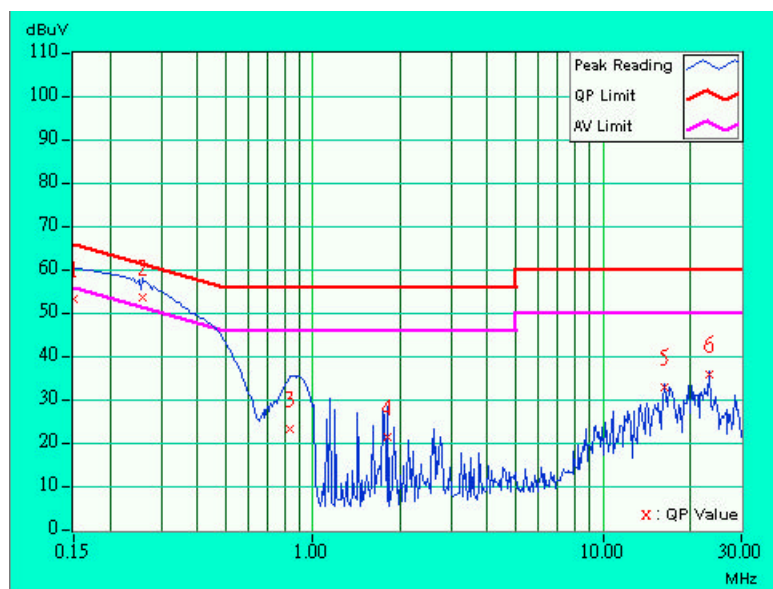

EUT	OfficeConnect® Wireless Cable/DSL Gateway	MODEL	3CRWE52196
MODE	Channel 11	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	25deg. C, 60%RH, 1005 hPa	TESTED BY: Gary Chang	

No	Freq. (MHz)	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			QP.	AV.	QP.	AV.	QP.	AV.	QP.	AV.
1	0.150	0.10	54.31	-	54.41	-	66.00	56.00	-11.59	-
2	0.275	0.10	51.26	20.38	51.36	20.48	60.97	50.97	-9.61	-30.49
3	0.388	0.10	48.85	17.94	48.95	18.04	58.10	48.10	-9.15	-30.06
4	0.978	0.20	32.59	-	32.79	-	56.00	46.00	-23.21	-
5	16.840	0.91	29.09	-	30.00	-	60.00	50.00	-30.00	-
6	20.258	1.11	34.18	-	35.29	-	60.00	50.00	-24.71	-


- Remarks:
1. "*": Undetectable
 2. QP. and AV. are abbreviations of quasi-peak and average individually.
 3. "-": NA
 4. The emission levels of other frequencies were very low against the limit.
 5. Margin value = Emission level - Limit value
 6. Emission Level = Correction Factor + Reading Value.

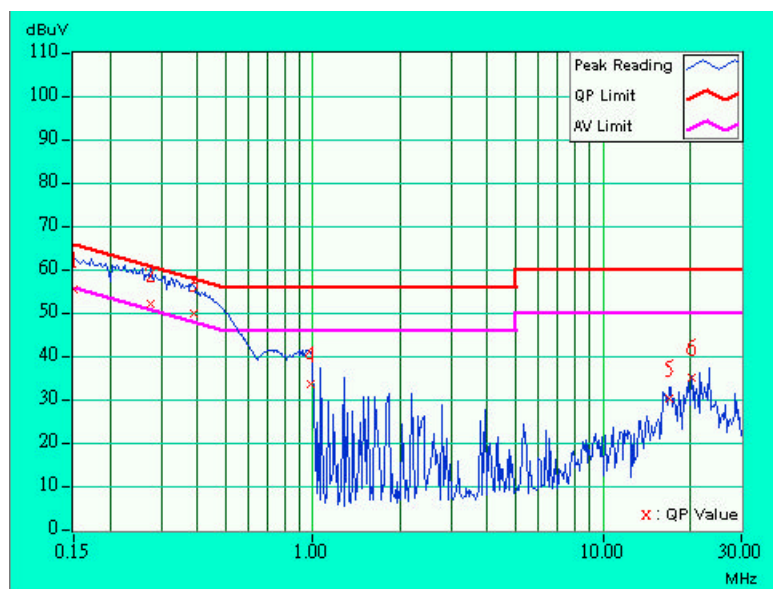

EUT	OfficeConnect® Wireless Cable/DSL Gateway	MODEL	3CRWE52196
MODE	Channel 11	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	25deg. C, 60%RH, 1005 hPa	TESTED BY: Gary Chang	

No	Freq.	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]	(dB)	QP.	AV.	QP.	AV.	QP.	AV.	QP.	AV.
1	0.150	0.10	53.60	-	53.70	-	66.00	56.00	-12.30	-
2	0.255	0.10	50.63	-	50.73	-	61.58	51.58	-10.85	-
3	0.494	0.12	43.03	-	43.15	-	56.10	46.10	-12.96	-
4	0.810	0.17	33.77	-	33.94	-	56.00	46.00	-22.06	-
5	1.699	0.20	32.01	-	32.21	-	56.00	46.00	-23.79	-
6	23.129	0.74	35.21	-	35.95	-	60.00	50.00	-24.05	-

- Remarks:
1. "*" : Undetectable
 2. QP. and AV. are abbreviations of quasi-peak and average individually.
 3. "-": NA
 4. The emission levels of other frequencies were very low against the limit.
 5. Margin value = Emission level - Limit value
 6. Emission Level = Correction Factor + Reading Value.

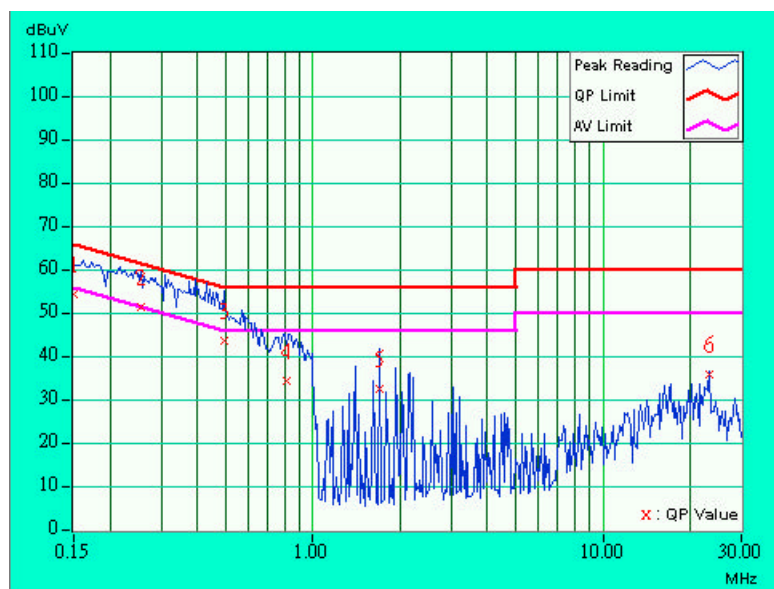


4.1.8 TEST RESULTS (B)

EUT	OfficeConnect® Wireless Cable/DSL Gateway	MODEL	3CRWE52196
MODE	Channel 1	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	25deg. C, 60%RH, 1005 hPa	TESTED BY: Gary Chang	

No	Freq. (MHz)	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			QP.	AV.	QP.	AV.	QP.	AV.	QP.	AV.
1	0.150	0.10	51.84	-	51.94	-	66.00	56.00	-14.06	-
2	0.396	0.10	45.00	-	45.10	-	57.93	47.93	-12.83	-
3	0.947	0.19	28.03	-	28.22	-	56.00	46.00	-27.78	-
4	1.902	0.20	13.18	-	13.38	-	56.00	46.00	-42.62	-
5	16.898	0.91	30.13	-	31.04	-	60.00	50.00	-28.96	-
6	19.711	1.08	33.19	-	34.27	-	60.00	50.00	-25.73	-


- Remarks:
1. "**": Undetectable
 2. QP. and AV. are abbreviations of quasi-peak and average individually.
 3. "-": NA
 4. The emission levels of other frequencies were very low against the limit.
 5. Margin value = Emission level - Limit value
 6. Emission Level = Correction Factor + Reading Value.

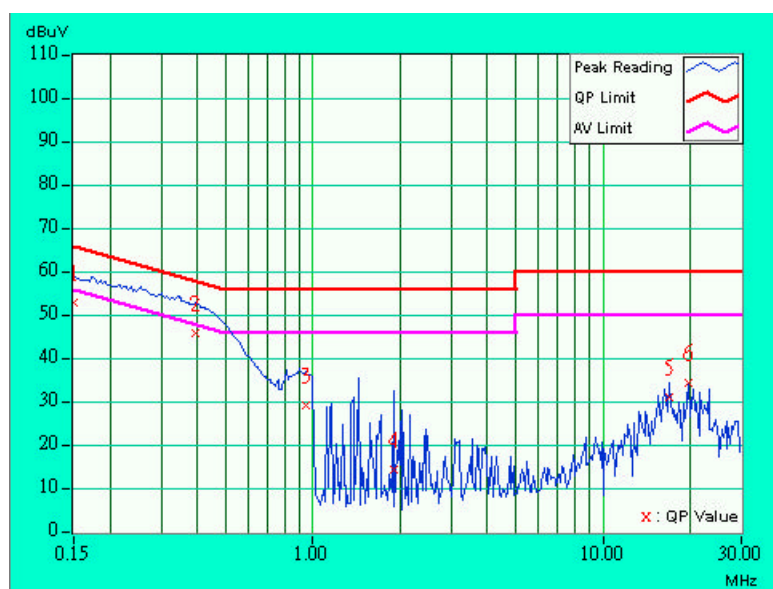

EUT	OfficeConnect® Wireless Cable/DSL Gateway	MODEL	3CRWE52196
MODE	Channel 1	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	25deg. C, 60%RH, 1005 hPa	TESTED BY: Gary Chang	

No	Freq. (MHz)	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			QP.	AV.	QP.	AV.	QP.	AV.	QP.	AV.
1	0.150	0.10	52.28	-	52.38	-	66.00	56.00	-13.62	-
2	0.361	0.10	48.68	17.04	48.78	17.14	58.71	48.71	-9.93	-31.57
3	0.752	0.16	36.48	-	36.64	-	56.00	46.00	-19.36	-
4	3.234	0.26	19.62	-	19.88	-	56.00	46.00	-36.12	-
5	15.523	0.53	29.66	-	30.19	-	60.00	50.00	-29.81	-
6	20.258	0.79	31.87	-	32.66	-	60.00	50.00	-27.34	-


- Remarks:
1. "x": Undetectable
 2. QP. and AV. are abbreviations of quasi-peak and average individually.
 3. "-": NA
 4. The emission levels of other frequencies were very low against the limit.
 5. Margin value = Emission level - Limit value
 6. Emission Level = Correction Factor + Reading Value.

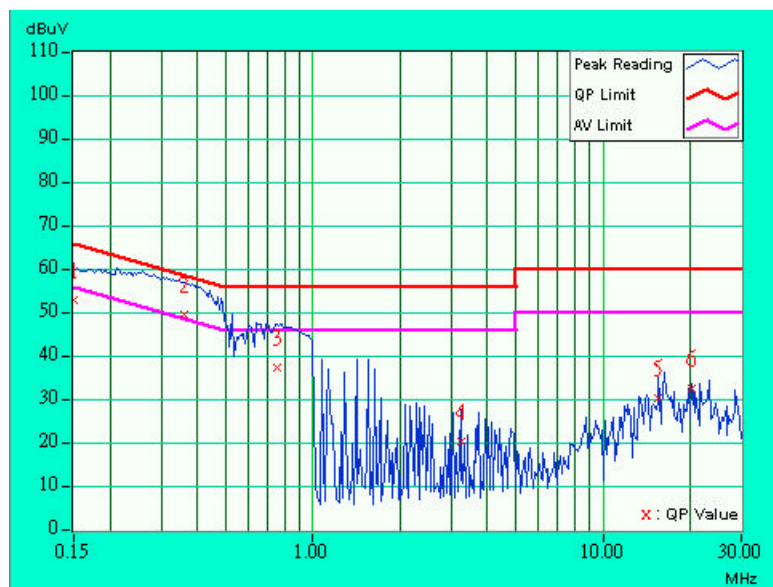

EUT	OfficeConnect® Wireless Cable/DSL Gateway	MODEL	3CRWE52196
MODE	Channel 6	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	25deg. C, 60%RH, 1005 hPa	TESTED BY: Gary Chang	

No	Freq. (MHz)	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			QP.	AV.	QP.	AV.	QP.	AV.	QP.	AV.
1	0.150	0.10	51.74	-	51.84	-	66.00	56.00	-14.16	-
2	0.377	0.10	45.62	-	45.72	-	58.35	48.35	-12.63	-
3	0.966	0.19	28.07	-	28.26	-	56.00	46.00	-27.74	-
4	2.492	0.25	17.52	-	17.77	-	56.00	46.00	-38.23	-
5	16.473	0.89	30.96	-	31.85	-	60.00	50.00	-28.15	-
6	20.262	1.11	31.89	-	33.00	-	60.00	50.00	-27.00	-


- Remarks:
1. "x": Undetectable
 2. QP. and AV. are abbreviations of quasi-peak and average individually.
 3. "-": NA
 4. The emission levels of other frequencies were very low against the limit.
 5. Margin value = Emission level - Limit value
 6. Emission Level = Correction Factor + Reading Value.

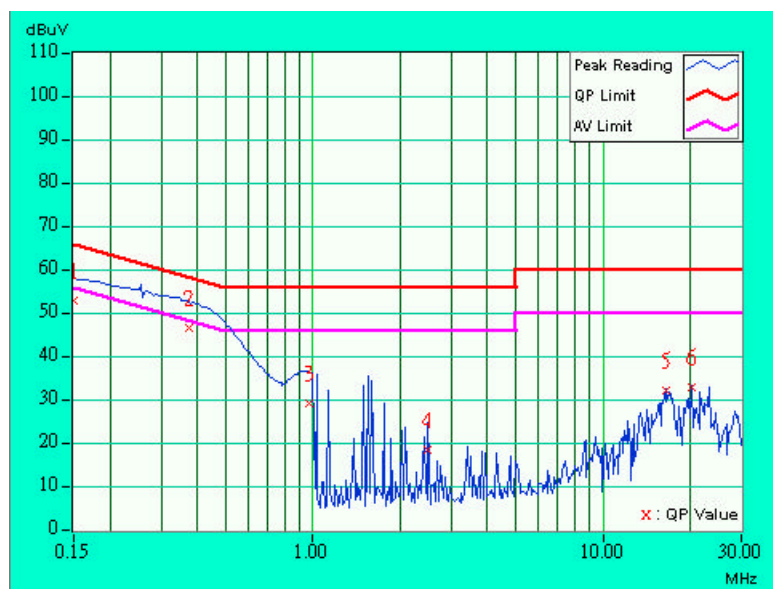

EUT	OfficeConnect® Wireless Cable/DSL Gateway	MODEL	3CRWE52196
MODE	Channel 6	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	25deg. C, 60%RH, 1005 hPa	TESTED BY: Gary Chang	

No	Freq. (MHz)	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			QP.	AV.	QP.	AV.	QP.	AV.	QP.	AV.
1	0.150	0.10	52.02	-	52.12	-	66.00	56.00	-13.88	-
2	0.380	0.10	48.26	16.51	48.36	16.61	58.27	48.27	-9.91	-31.66
3	0.814	0.17	37.41	-	37.58	-	56.00	46.00	-18.42	-
4	2.098	0.20	20.94	-	21.14	-	56.00	46.00	-34.86	-
5	15.523	0.53	32.84	-	33.37	-	60.00	50.00	-26.63	-
6	23.129	0.74	33.80	-	34.54	-	60.00	50.00	-25.46	-


- Remarks:
1. "*" : Undetectable
 2. QP. and AV. are abbreviations of quasi-peak and average individually.
 3. "-": NA
 4. The emission levels of other frequencies were very low against the limit.
 5. Margin value = Emission level - Limit value
 6. Emission Level = Correction Factor + Reading Value.

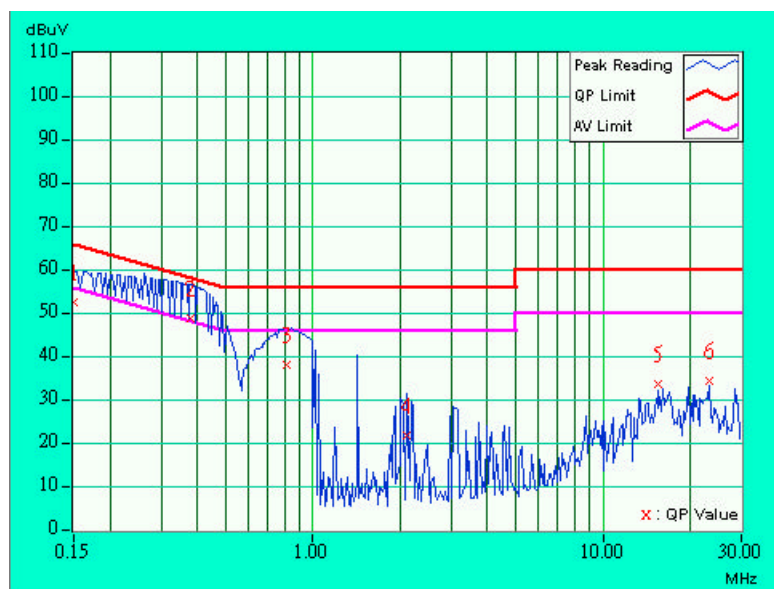

EUT	OfficeConnect® Wireless Cable/DSL Gateway	MODEL	3CRWE52196
MODE	Channel 11	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	25deg. C, 60%RH, 1005 hPa	TESTED BY: Gary Chang	

No	Freq. (MHz)	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			QP.	AV.	QP.	AV.	QP.	AV.	QP.	AV.
1	0.150	0.10	51.50	-	51.60	-	66.00	56.00	-14.40	-
2	0.412	0.10	44.30	-	44.40	-	57.61	47.61	-13.21	-
3	0.986	0.20	27.93	-	28.13	-	56.00	46.00	-27.87	-
4	2.156	0.22	15.68	-	15.90	-	56.00	46.00	-40.10	-
5	15.527	0.83	35.74	-	36.57	-	60.00	50.00	-23.43	-
6	19.711	1.08	33.31	-	34.39	-	60.00	50.00	-25.61	-


- Remarks:
1. "*" : Undetectable
 2. QP. and AV. are abbreviations of quasi-peak and average individually.
 3. "-": NA
 4. The emission levels of other frequencies were very low against the limit.
 5. Margin value = Emission level - Limit value
 6. Emission Level = Correction Factor + Reading Value.

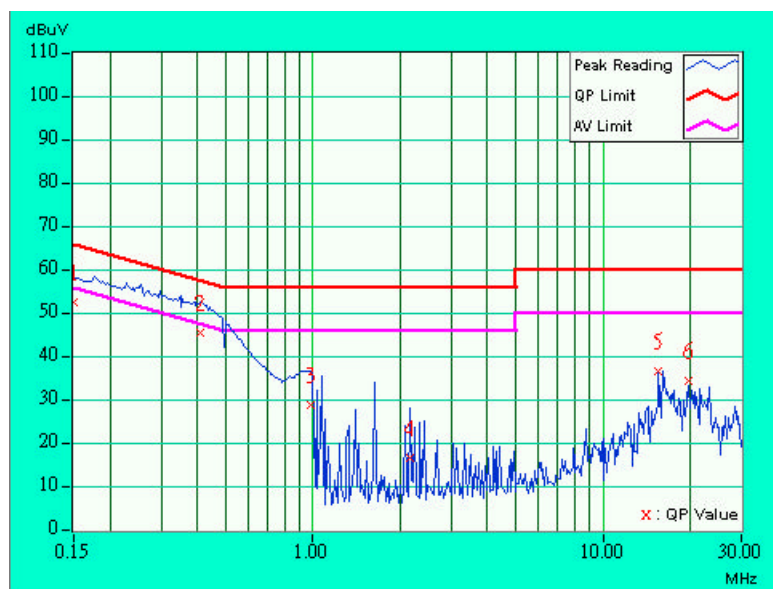

EUT	OfficeConnect® Wireless Cable/DSL Gateway	MODEL	3CRWE52196
MODE	Channel 11	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	25deg. C, 60%RH, 1005 hPa	TESTED BY: Gary Chang	

No	Freq.	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]	(dB)	QP.	AV.	QP.	AV.	QP.	AV.	QP.	AV.
1	0.150	0.10	51.66	-	51.76	-	66.00	56.00	-14.24	-
2	0.392	0.10	47.88	-	47.98	-	58.02	48.02	-10.04	-
3	0.841	0.17	36.44	-	36.61	-	56.00	46.00	-19.39	-
4	1.523	0.20	29.26	-	29.46	-	56.00	46.00	-26.54	-
5	16.168	0.57	34.48	-	35.05	-	60.00	50.00	-24.95	-
6	20.262	0.79	31.20	-	31.99	-	60.00	50.00	-28.01	-

- Remarks:
1. "*": Undetectable
 2. QP. and AV. are abbreviations of quasi-peak and average individually.
 3. "-": NA
 4. The emission levels of other frequencies were very low against the limit.
 5. Margin value = Emission level - Limit value
 6. Emission Level = Correction Factor + Reading Value.

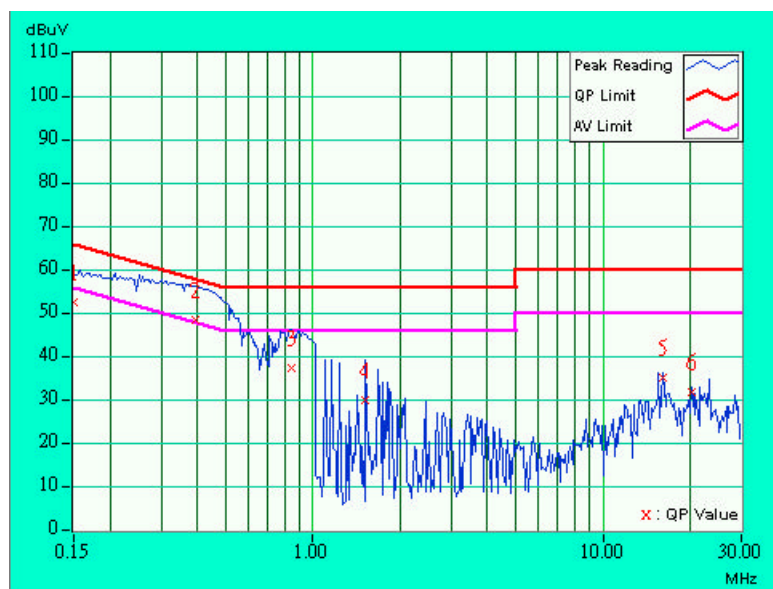

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
* HP Spectrum Analyzer	8590L	3544A01176	May 13, 2003
* HP Preamplifier	8447D	2944A08485	Apr. 29, 2003
* HP Preamplifier	8449B	3008A01201	Dec. 06, 2002
* HP Preamplifier	8449B	3008A01292	Aug. 07, 2003
* ROHDE & SCHWARZ TEST RECEIVER	ESMI	839013/007 839379/002	Jan. 27, 2003
SCHWARZBECK Tunable Dipole Antenna	VHA 9103 UHA 9105	E101051 E101055	Nov. 23, 2002
ANTENNA (Large Biconical)	VHBA9123	449	Dec. 10, 2002
* CHASE BILOG Antenna	CBL6112A	2221	Aug. 02, 2003
* SCHWARZBECK Horn Antenna	BBHA9120-D1	D130	Jul. 03, 2003
* EMCO Horn Antenna	3115	9312-4192	Apr. 09, 2003
* EMCO Turn Table	1060	1115	NA
* SHOSHIN Tower	AP-4701	A6Y005	NA
* Software	AS61D4	NA	NA
* ANRITSU RF Switches	MP59B	M35046	Jan. 25, 2003
* TIMES RF cable	LMR-600	CABLE-ST5-01	Jul. 12, 2003
Open Field Test Site	Site 5	ADT-R05	Jul. 19, 2003
VCCI Site Registration No.	Site 5	R-1039	NA

- NOTE:** 1. The measurement uncertainty is less than +/- 3.0dB, which is calculated as per the NAMAS document NIS81.
2. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.
3. "*" = These equipment are used for the final measurement.
4. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
5. The test was performed in ADT Open Site No. 5.



4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using the quasi-peak method or average method as specified and then reported in Data sheet peak mode and QP mode.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 300 Hz for Average detection (AV) at frequency above 1GHz.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation

4.2.5 TEST SETUP

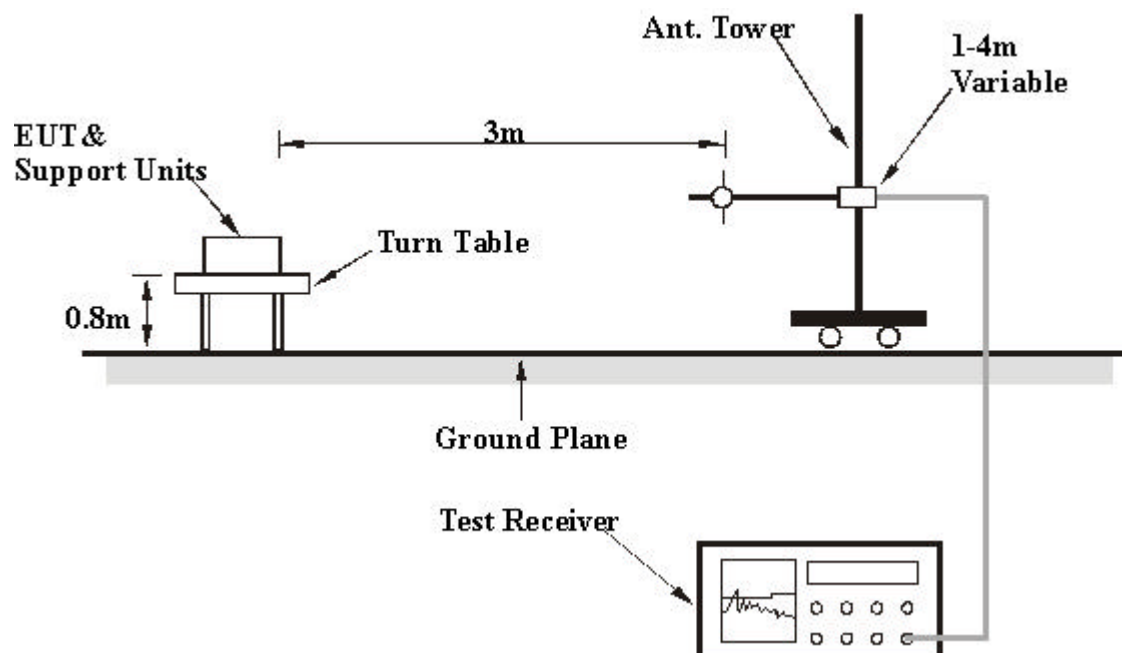

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6.

4.2.7 TEST RESULTS (A)

EUT	OfficeConnect® Wireless Cable/DSL Gateway	MODEL	3CRWE52196
MODE	Channel 11	FREQUENCY RANGE	30-1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	25deg. C, 60%RH, 1005 hPa	TESTED BY: Gary Chang	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB/m)
1	125.00	28.0 QP	43.50	-15.50	1.34H	139	15.56	11.47	0.97	0.00	-12.44
2	151.00	30.4 QP	43.50	-13.10	1.38H	164	19.10	10.16	1.14	0.00	-11.30
3	239.80	30.7 QP	46.00	-15.30	1.34H	216	17.98	11.41	1.31	0.00	-12.72
4	250.00	33.3 QP	46.00	-12.70	1.26H	268	19.99	12.02	1.29	0.00	-13.31
5	360.60	33.1 QP	46.00	-12.90	1.26H	340	17.05	14.58	1.47	0.00	-16.05
6	458.80	35.7 QP	46.00	-10.30	1.31H	324	17.54	16.53	1.63	0.00	-18.16
7	535.80	30.9 QP	46.00	-15.10	1.26H	266	11.33	17.76	1.81	0.00	-19.57
8	645.85	33.8 QP	46.00	-12.20	1.26H	207	12.62	19.18	2.00	0.00	-21.18
9	748.00	37.8 QP	46.00	-8.20	1.19H	153	15.48	20.14	2.17	0.00	-22.33
10	818.40	39.2 QP	46.00	-6.80	1.13H	153	16.27	20.61	2.32	0.00	-22.94
11	825.00	41.2 QP	46.00	-4.80	1.10H	166	18.29	20.58	2.33	0.00	-22.92
12	831.00	37.0 QP	46.00	-9.00	1.14H	212	14.10	20.56	2.33	0.00	-22.91
13	875.00	40.8 QP	46.00	-5.20	1.11H	257	17.77	20.63	2.40	0.00	-23.04
14	900.00	39.0 QP	46.00	-7.00	1.14H	315	15.76	20.80	2.44	0.00	-23.25

- NOTE:** 1 Emission level = Raw Value - Correction Factor
2 Correction Factor = External Preamp. Gain - Ant. Factor - Cable loss
(External Preamp. Gain = 0, when the test receiver is used for the test.)
3 The other emission levels were very low against the limit.
4 Margin value = Emission level - Limit value



EUT	OfficeConnect® Wireless Cable/DSL Gateway	MODEL	3CRWE52196
MODE	Channel 11	FREQUENCY RANGE	30-1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	25deg. C, 60%RH, 1005 hPa	TESTED BY: Gary Chang	

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M											
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB/m)
1	112.00	31.4 QP	43.50	-12.10	1.26V	231	19.21	11.18	1.01	0.00	-12.19
2	124.80	39.2 QP	43.50	-4.30	1.26V	185	26.76	11.47	0.97	0.00	-12.45
3	150.00	30.4 QP	43.50	-13.10	1.20V	138	18.94	10.30	1.15	0.00	-11.46
4	240.00	28.7 QP	46.00	-17.30	1.24V	116	16.02	11.41	1.31	0.00	-12.72
5	250.00	31.3 QP	46.00	-14.70	1.29V	153	17.99	12.02	1.29	0.00	-13.31
6	420.00	27.0 QP	46.00	-19.00	1.33V	197	9.22	16.21	1.57	0.00	-17.78
7	458.00	36.0 QP	46.00	-10.00	1.36V	249	17.89	16.49	1.62	0.00	-18.11
8	601.00	31.0 QP	46.00	-15.00	1.39V	293	10.46	18.61	1.93	0.00	-20.54
9	750.00	35.0 QP	46.00	-11.00	1.42V	334	12.64	20.18	2.18	0.00	-22.36
10	825.00	38.0 QP	46.00	-8.00	1.49V	284	15.09	20.58	2.33	0.00	-22.92
11	831.00	36.4 QP	46.00	-9.60	1.45V	245	13.50	20.56	2.33	0.00	-22.91
12	914.00	39.0 QP	46.00	-7.00	1.41V	193	15.63	20.92	2.45	0.00	-23.38

- NOTE:**
- 1 Emission level = Raw Value - Correction Factor
 - 2 Correction Factor = External Preamp. Gain - Ant. Factor - Cable loss
(External Preamp. Gain = 0, when the test receiver is used for the test.)
 - 3 The other emission levels were very low against the limit.
 - 4 Margin value = Emission level - Limit value

4.2.8 TEST RESULTS (B)

EUT	OfficeConnect® Wireless Cable/DSL Gateway	MODEL	3CRWE52196
MODE	Channel 11	FREQUENCY RANGE	30-1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	25deg. C, 60%RH, 1005 hPa	TESTED BY: Gary Chang	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB/m)
1	145.00	29.4 QP	43.50	-14.10	1.10H	229	17.63	10.58	1.19	0.00	-11.77
2	151.00	29.7 QP	43.50	-13.80	1.06H	300	18.40	10.16	1.14	0.00	-11.30
3	159.00	30.3 QP	43.50	-13.20	1.09H	355	19.47	9.74	1.08	0.00	-10.83
4	250.00	35.2 QP	46.00	-10.80	1.15H	325	21.89	12.02	1.29	0.00	-13.31
5	458.00	36.4 QP	46.00	-9.60	1.13H	284	18.29	16.49	1.62	0.00	-18.11
6	500.00	36.6 QP	46.00	-9.40	1.16H	245	17.59	17.26	1.75	0.00	-19.01
7	636.00	37.8 QP	46.00	-8.20	1.14H	192	16.75	19.06	1.99	0.00	-21.05
8	750.00	36.0 QP	46.00	-10.00	1.14H	159	13.64	20.18	2.18	0.00	-22.36
9	815.00	38.5 QP	46.00	-7.50	1.18H	112	15.56	20.62	2.31	0.00	-22.95
10	817.00	40.6 QP	46.00	-5.40	1.24H	144	17.67	20.61	2.32	0.00	-22.94
11	825.00	43.0 QP	46.00	-3.00	1.20H	201	20.09	20.58	2.33	0.00	-22.92
12	831.00	41.0 QP	46.00	-5.00	1.20H	246	18.10	20.56	2.33	0.00	-22.91

- NOTE:** 1 Emission level = Raw Value - Correction Factor
2 Correction Factor = External Preamp. Gain - Ant. Factor - Cable loss
(External Preamp. Gain = 0, when the test receiver is used for the test.)
3 The other emission levels were very low against the limit.
4 Margin value = Emission level - Limit value

EUT	OfficeConnect® Wireless Cable/DSL Gateway	MODEL	3CRWE52196
MODE	Channel 11	FREQUENCY RANGE	30-1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	25deg. C, 60%RH, 1005 hPa	TESTED BY: Gary Chang	

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M											
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB/m)
1	120.00	28.0 QP	43.50	-15.50	1.17V	253	15.45	11.65	0.89	0.00	-12.55
2	145.00	39.0 QP	43.50	-4.50	1.21V	253	27.23	10.58	1.19	0.00	-11.78
3	150.00	33.6 QP	43.50	-9.90	1.27V	217	22.14	10.30	1.15	0.00	-11.47
4	250.00	32.9 QP	46.00	-13.10	1.24V	178	19.59	12.02	1.29	0.00	-13.31
5	461.00	29.0 QP	46.00	-17.00	1.28V	130	10.79	16.58	1.63	0.00	-18.21
6	500.00	39.0 QP	46.00	-7.00	1.37V	132	19.99	17.26	1.75	0.00	-19.01
7	525.00	30.6 QP	46.00	-15.40	1.42V	174	11.22	17.59	1.79	0.00	-19.38
8	636.00	32.0 QP	46.00	-14.00	1.13V	231	10.95	19.06	1.99	0.00	-21.05
9	750.00	35.6 QP	46.00	-10.40	1.17V	280	13.24	20.18	2.18	0.00	-22.36
10	818.00	39.0 QP	46.00	-7.00	1.15V	347	16.07	20.61	2.32	0.00	-22.94
11	825.00	41.2 QP	46.00	-4.80	1.19V	334	18.29	20.58	2.33	0.00	-22.92
12	831.00	38.0 QP	46.00	-8.00	1.23V	296	15.10	20.56	2.33	0.00	-22.91

- NOTE:**
- 1 Emission level = Raw Value - Correction Factor
 - 2 Correction Factor = External Preamp. Gain - Ant. Factor - Cable loss
(External Preamp. Gain = 0, when the test receiver is used for the test.)
 - 3 The other emission levels were very low against the limit.
 - 4 Margin value = Emission level - Limit value

4.2.9 TEST RESULT

EUT	OfficeConnect® Wireless Cable/DSL Gateway	MODEL	3CRWE52196
MODE	Channel 1	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 60%RH, 1005 hPa	TESTED BY: Gary Chang	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB/m)
1	2038.00	46.0 PK	74.00	-28.00	1.01H	9	55.00	26.37	1.38	36.80	9.05
2	*2412.00	96.5 AV			1.43H	330	103.00	27.67	2.53	36.72	6.52
3	*2412.00	99.5 PK			1.43H	330	106.00	27.67	2.53	36.72	6.52
4	4076.00	41.5 PK	74.00	-32.50	1.27H	262	44.00	30.38	3.63	36.52	2.51
5	4824.00	45.8 PK	74.00	-28.20	1.35H	77	47.00	31.52	4.01	36.70	1.19
6	7235.00	47.8 PK	74.00	-26.20	1.15H	3	43.00	36.20	5.58	37.00	-4.78

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB/m)
1	2038.00	48.0 PK	74.00	-26.00	1.13V	11	57.00	26.37	1.38	36.80	9.05
2	*2412.00	107.5 PK			1.13V	39	114.00	27.67	2.53	36.72	6.53
3	*2412.00	104.5 AV			1.13V	39	111.00	27.67	2.53	36.72	6.53
4	4076.00	42.5 PK	74.00	-31.50	1.20V	88	45.00	30.38	3.63	36.52	2.51
5	4824.00	50.8 PK	74.00	-23.20	1.17V	161	52.00	31.52	4.01	36.70	1.18
6	4824.00	45.8 AV	54.00	-8.20	1.17V	161	47.00	31.52	4.01	36.70	1.18
7	7235.00	44.8 AV	54.00	-9.20	1.21V	173	40.00	36.20	5.58	37.00	-4.78
8	7235.00	52.8 PK	74.00	-21.20	1.21V	173	48.00	36.20	5.58	37.00	-4.78
9	9647.00	51.6 PK	74.00	-22.40	1.17V	207	45.00	38.45	5.76	37.63	-6.58

- NOTE:**
1. Emission level = Raw Value - Correction Factor
 2. Correction Factor = External Preamp. Gain - Ant. Factor - Cable loss
(External Preamp. Gain = 0, when the test receiver is used for the test.)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. The limit value is defined as per 15.247
 6. " * " : Fundamental frequency



EUT	OfficeConnect® Wireless Cable/DSL Gateway	MODEL	3CRWE52196
MODE	Channel 6	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 60%RH, 1005 hPa	TESTED BY: Gary Chang	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB/m)
1	2063.00	41.2 PK	74.00	-32.80	1.22H	71	49.97	26.51	1.51	36.79	8.77
2	*2437.00	98.8 PK			1.25H	83	105.04	27.81	2.66	36.71	6.25
3	*2437.00	95.8 AV			1.25H	83	102.04	27.81	2.66	36.71	6.25
4	4126.00	42.6 PK	74.00	-31.40	1.31H	142	44.99	30.50	3.66	36.56	2.39
5	4874.00	41.9 PK	74.00	-32.10	1.33H	185	42.98	31.59	4.03	36.70	1.08
6	7312.00	47.0 PK	74.00	-27.00	1.32H	227	41.98	36.33	5.72	37.03	-5.02

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB/m)
1	2063.00	45.2 PK	74.00	-28.80	1.21V	184	54.00	26.51	1.51	36.79	8.77
2	*2437.00	106.8 PK			1.19V	170	113.04	27.81	2.66	36.71	6.25
3	*2437.00	104.3 AV			1.19V	170	110.54	27.81	2.66	36.71	6.25
4	4126.00	43.6 PK	74.00	-30.40	1.15V	217	45.99	30.50	3.66	36.56	2.39
5	4874.00	47.9 PK	74.00	-26.10	1.11V	257	48.98	31.59	4.03	36.70	1.09
6	7308.00	43.9 AV	54.00	-10.10	1.16V	278	39.00	36.26	5.65	37.02	-4.90
7	7308.00	52.9 PK	74.00	-21.10	1.16V	278	48.00	36.26	5.65	37.02	-4.90
8	9745.00	48.5 PK	74.00	-25.50	1.22V	229	41.99	38.50	5.66	37.65	-6.51

- NOTE:**
1. Emission level = Raw Value - Correction Factor
 2. Correction Factor = External Preamp. Gain - Ant. Factor - Cable loss
(External Preamp. Gain = 0, when the test receiver is used for the test.)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. The limit value is defined as per 15.247
 6. " * " : Fundamental frequency



EUT	OfficeConnect® Wireless Cable/DSL Gateway	MODEL	3CRWE52196
MODE	Channel 11	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 60%RH, 1005 hPa	TESTED BY: Gary Chang	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB/m)
1	2088.00	44.5 PK	74.00	-29.50	1.12H	284	52.99	26.66	1.64	36.78	8.49
2	*2463.00	98.8 PK			1.16H	260	105.04	27.81	2.66	36.71	6.25
3	*2463.00	95.3 AV			1.16H	260	101.54	27.81	2.66	36.71	6.25
4	2492.00	45.0 PK	74.00	-29.00	1.11H	231	50.96	27.96	2.78	36.70	5.96
5	4924.00	45.0 PK	74.00	-29.00	1.08H	188	45.99	31.66	4.06	36.70	0.99
6	7387.00	48.1 PK	74.00	-25.90	1.05H	150	42.96	36.40	5.79	37.05	-5.14

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB/m)
1	2088.00	48.5 PK	74.00	-25.50	1.32V	228	56.99	26.66	1.64	36.78	8.49
2	*2463.00	107.8 PK			1.27V	210	114.04	27.81	2.66	36.71	6.25
3	*2463.00	104.8 AV			1.27V	210	111.04	27.81	2.66	36.71	6.25
4	2498.00	44.0 AV	54.00	-10.00	1.17V	196	49.96	27.96	2.78	36.70	5.96
5	2498.00	53.0 PK	74.00	-21.00	1.17V	196	58.96	27.96	2.78	36.70	5.97
6	4176.00	41.7 PK	74.00	-32.30	1.08V	187	44.03	30.56	3.68	36.58	2.33
7	4924.00	46.0 PK	74.00	-28.00	1.03V	264	46.99	31.66	4.06	36.70	0.99
8	7386.00	46.1 PK	54.00	-7.90	1.09V	320	40.96	36.40	5.79	37.05	-5.14

- NOTE:**
1. Emission level= Raw Value - Correction Factor
 2. Correction Factor = External Preamp. Gain - Ant. Factor - Cable loss
(External Preamp. Gain = 0, when the test receiver is used for the test.)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. The limit value is defined as per 15.247
 6. " * " : Fundamental frequency

4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	July 24, 2003

NOTE:

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100kHz RBW and 100kHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation

4.3.5 TEST SETUP



4.3.6 EUT OPERATING CONDITIONS


The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 TEST RESULTS

EUT	OfficeConnect® Wireless Cable/DSL Gateway	MODEL	3CRWE52196
INPUT POWER (SYSTEM)	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	25deg. C, 60%RH, 1005 hPa
TESTED BY: Steven Lu			


CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	9.40	0.5	PASS
6	2437	9.76	0.5	PASS
11	2462	9.48	0.5	PASS

CH1

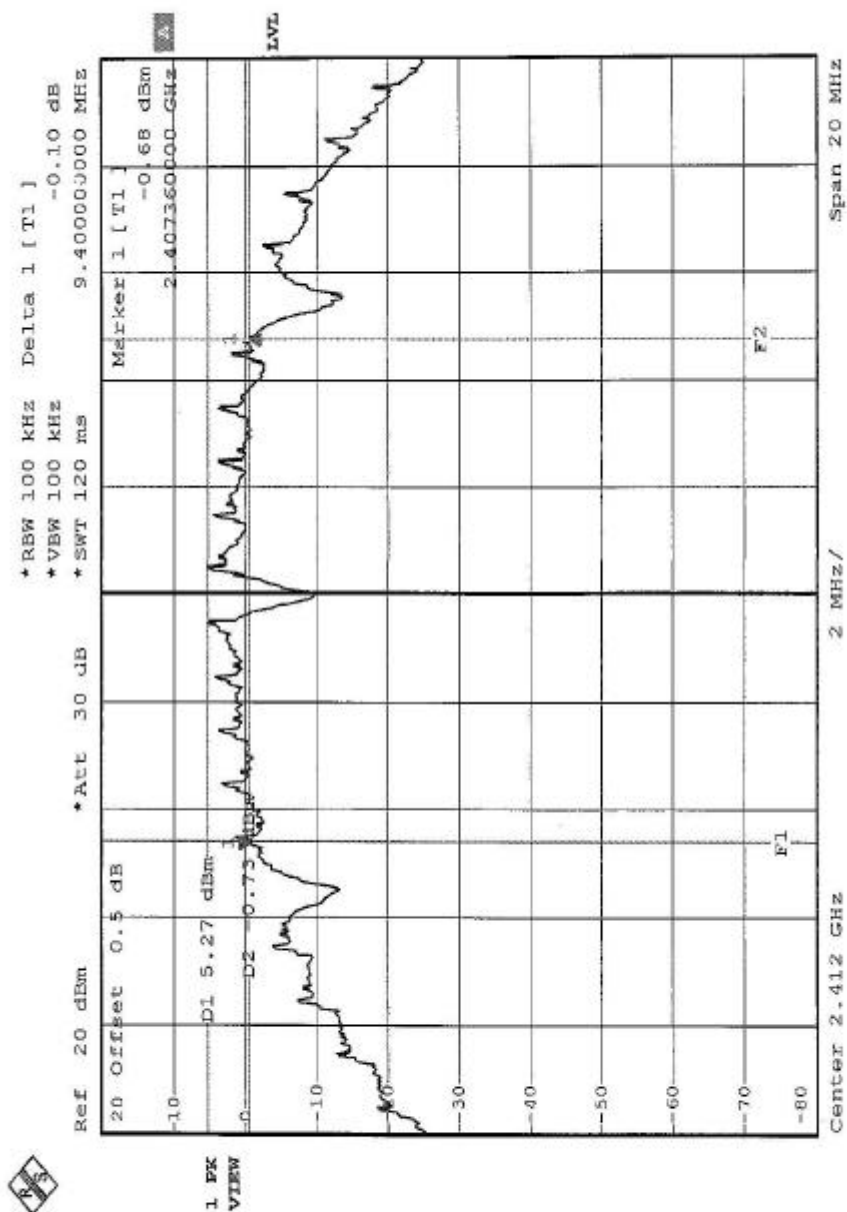


Date: 29.OCT.2002 15:59:43

CH6

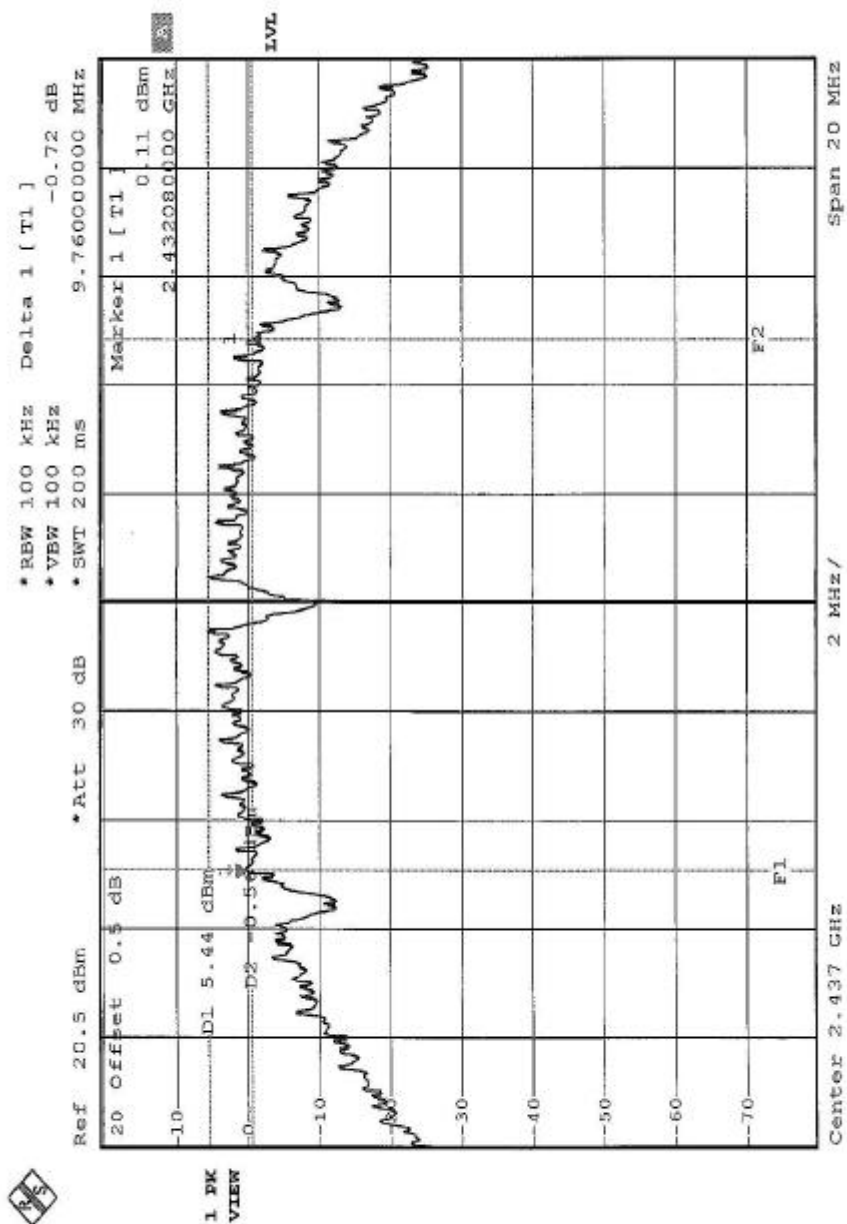

Date: 29.OCT.2002 16:13:22

CH11

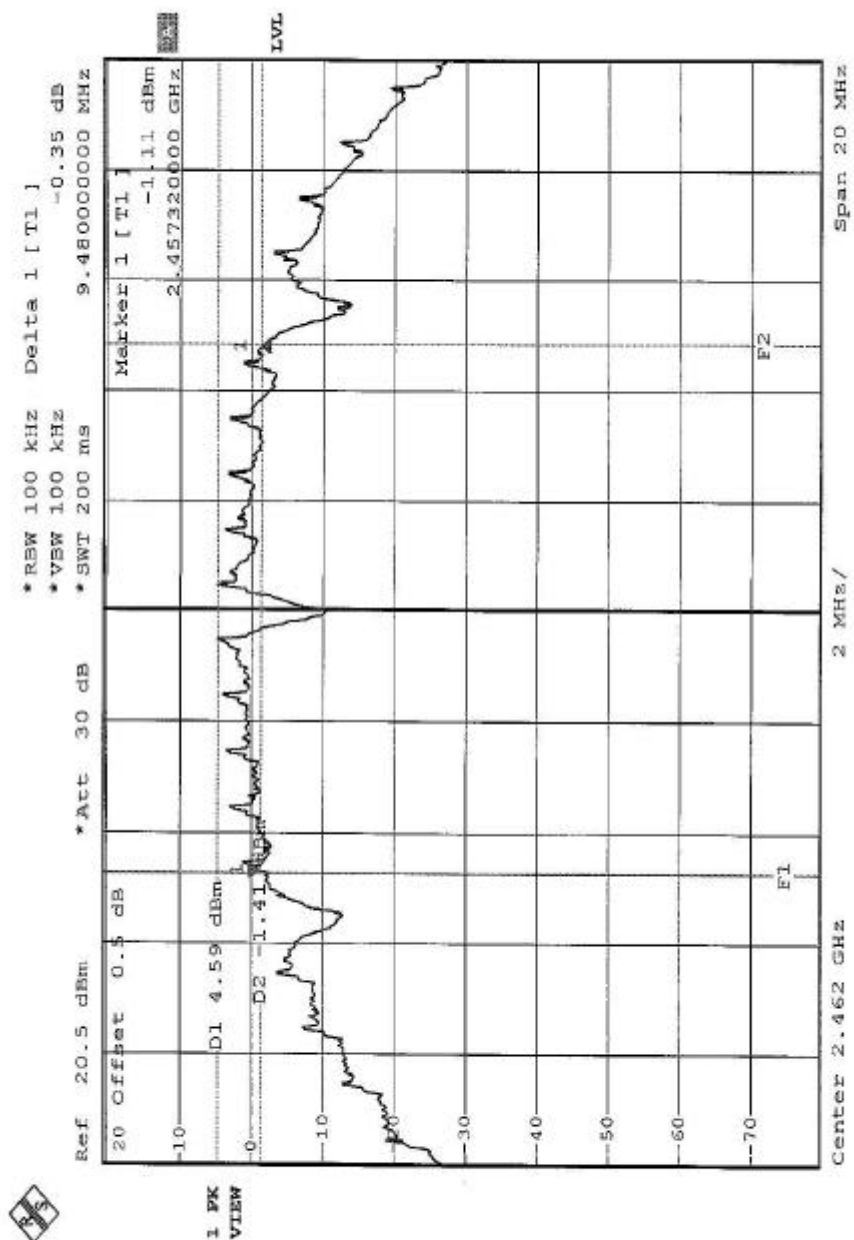

Date: 29.OCT.2002 16:49:29

4.4 MAXIMUM PEAK OUTPUT POWER

4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

4.4.2 INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
POWER METER	NRVS	100026	Feb. 23, 2003
PEAK POWER SENSOR	NRV-Z32	100013	Feb. 23, 2003

NOTE:

1. The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.4.3 TEST PROCEDURES

The transmitter output was connected to the peak power meter.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation

4.4.5 TEST SETUP



4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6.

4.4.7 TEST RESULTS

EUT	OfficeConnect® Wireless Cable/DSL Gateway	MODEL	3CRWE52196
INPUT POWER (SYSTEM)	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	25deg. C, 60%RH, 1005 hPa
TESTED BY: Steven Lu			

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	15.00	30	PASS
6	2437	15.14	30	PASS
11	2462	14.94	30	PASS

4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	July 24, 2003

NOTE:

1. The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.5.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3 kHz RBW and 30 kHz VBW, set sweep time = span/3 kHz. The power spectral density was measured and recorded.

The sweep time is allowed to be longer than span/3 kHz for a full response of the mixer in the spectrum analyzer.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation

4.5.5 TEST SETUP



4.5.6 EUT OPERATING CONDITION


Same as Item 4.3.6.

4.5.7 TEST RESULTS

EUT	OfficeConnect® Wireless Cable/DSL Gateway	MODEL	3CRWE52196
INPUT POWER (SYSTEM)	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	25deg. C, 60%RH, 1005 hPa
TESTED BY: Steven Lu			


CHANNEL NUMBER	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-9.88	8	PASS
6	2437	-9.38	8	PASS
11	2462	-10.48	8	PASS

CH1

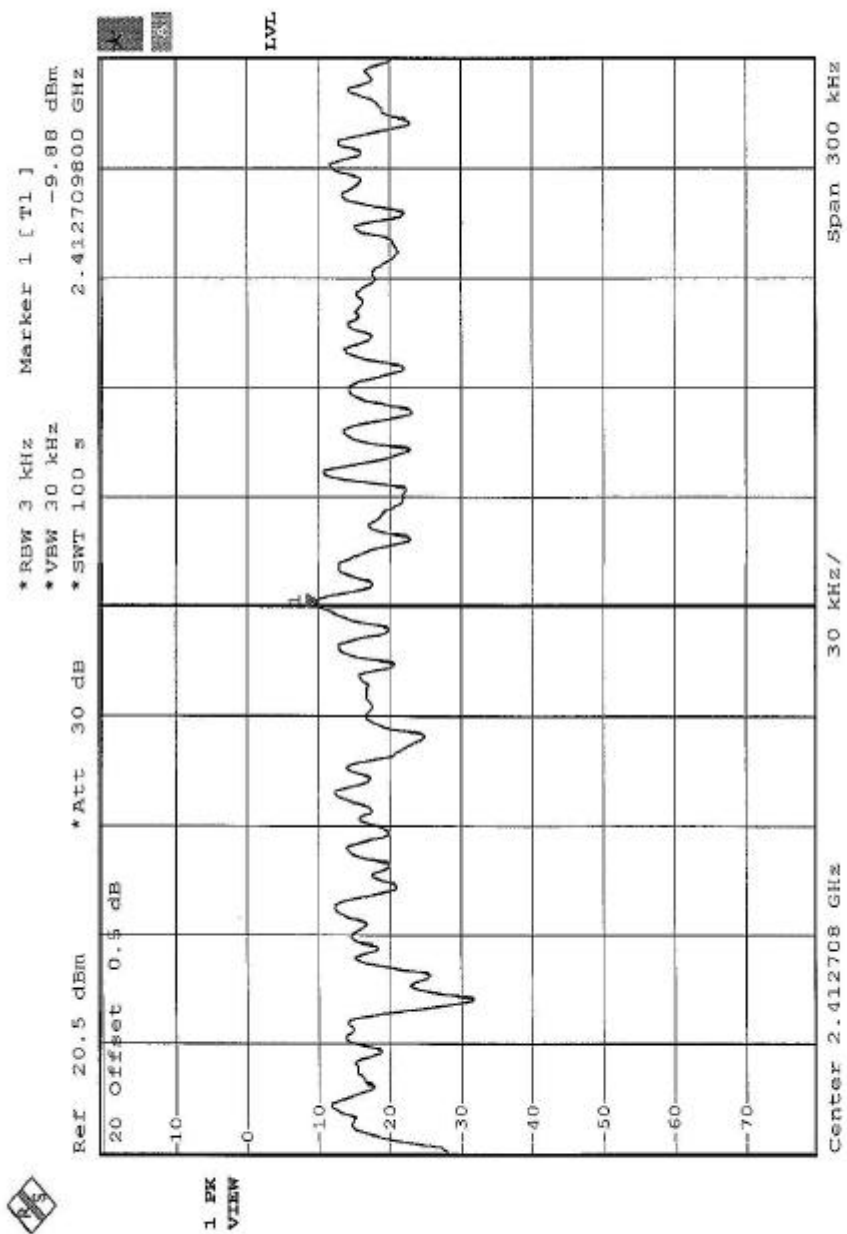


Date: 29.OCT.2002 16:04:56

CH6

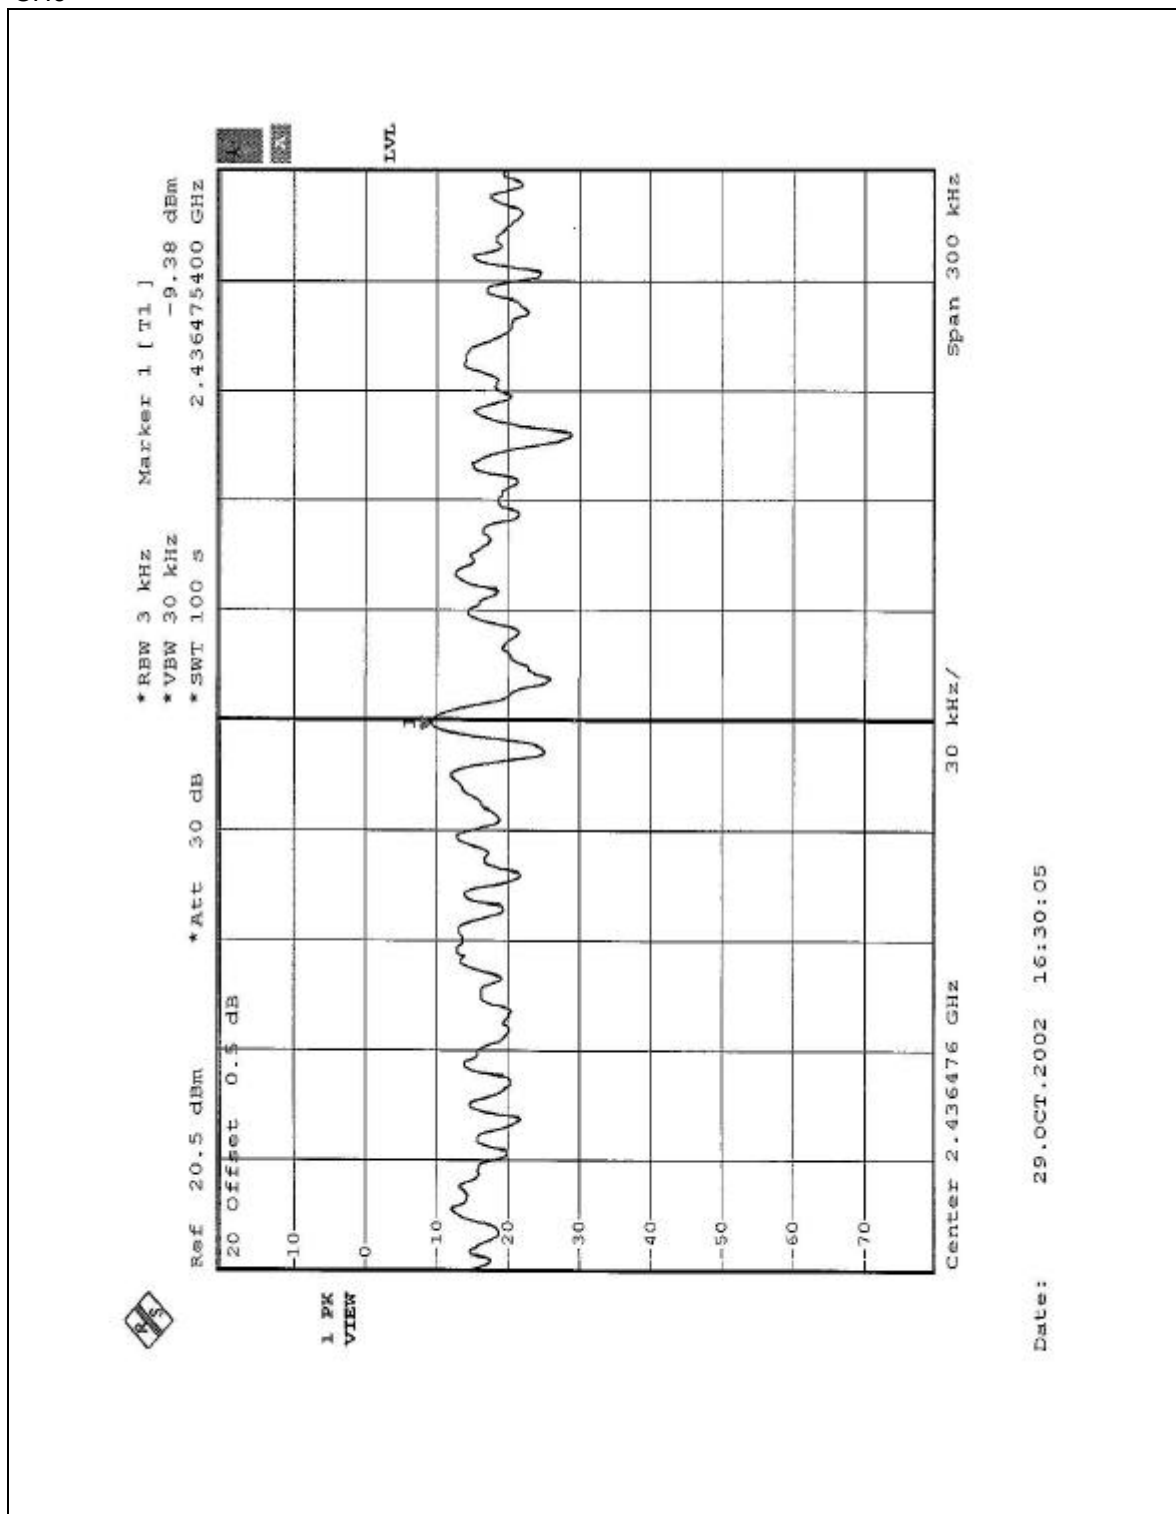

CH11

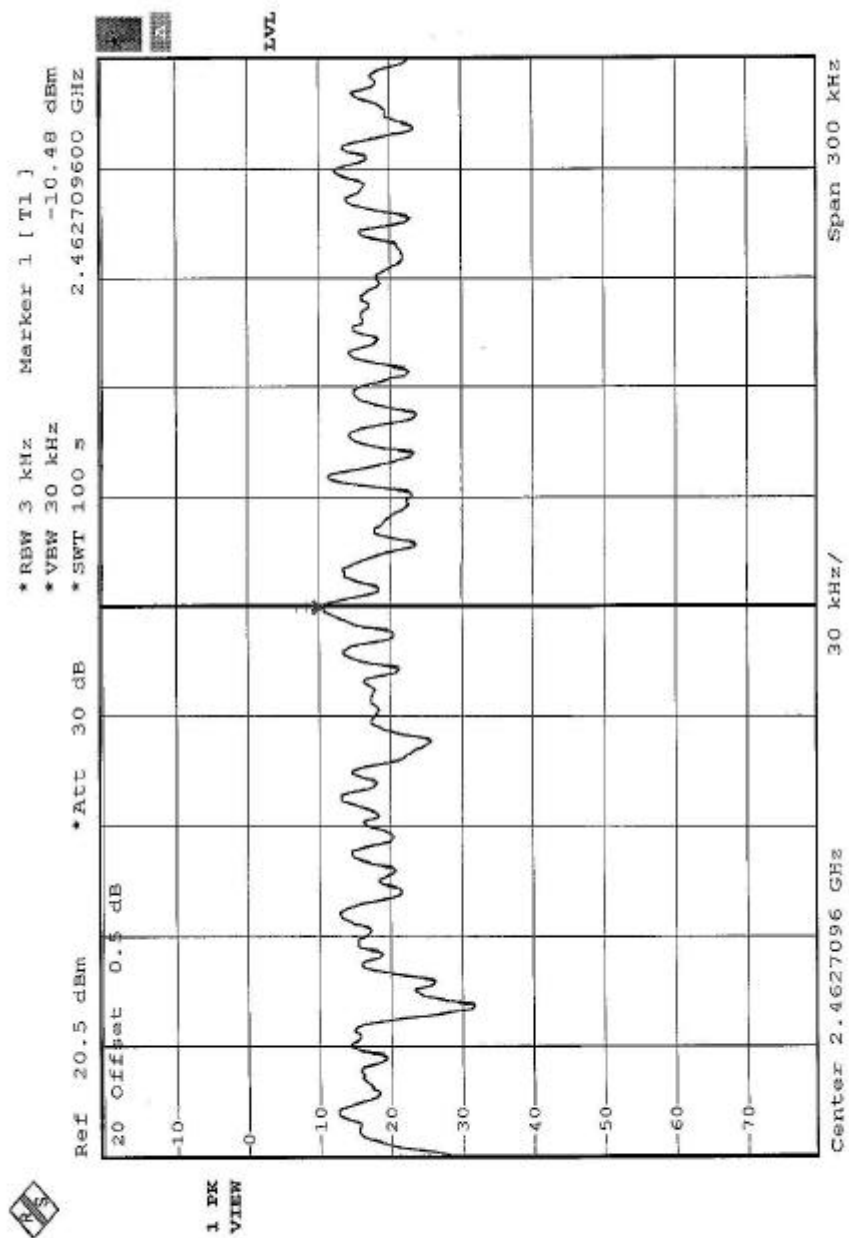

Date: 29.OCT.2002 16:46:51

4.6 BAND EDGES MEASUREMENT

4.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100KHz Resolution Bandwidth).

4.6.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	July 24, 2003

NOTE:

1. The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 100 kHz with suitable frequency span including 100 kHz bandwidth from band edge. The band edges was measured and recorded.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation




4.6.5 EUT OPERATING CONDITION

Same as Item 4.3.6


4.6.6 TEST RESULTS

The spectrum plots are attached on the following 2 pages. D2 line indicates the highest level, D1 line indicates the 20dB offset below D2. It shows compliance with the requirement in part 15.247(C).

NOTE: The band edge emission plot on the following 2 pages shows 51.62dB / 51.24dB delta between carrier maximum power and local maximum emission in restrict band (2.4950GHz / 2.3864GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.9 (Page 33) is 104.5dBuV/m, so the maximum field strength in restrict band is $104.5 - 51.24 = 53.26$ dBuV/m which is under 54dBuV/m limit.

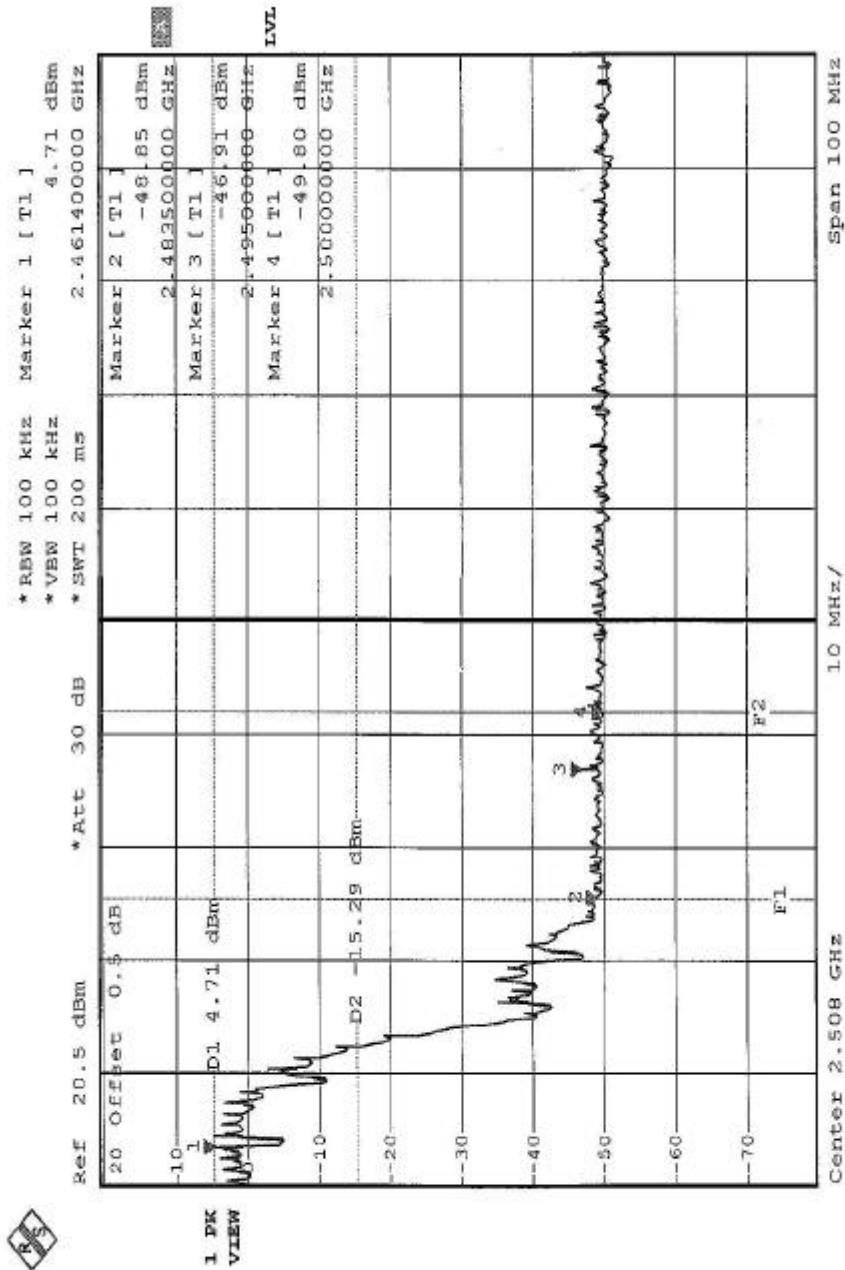

Date: 29.OCT.2002 16:42:20

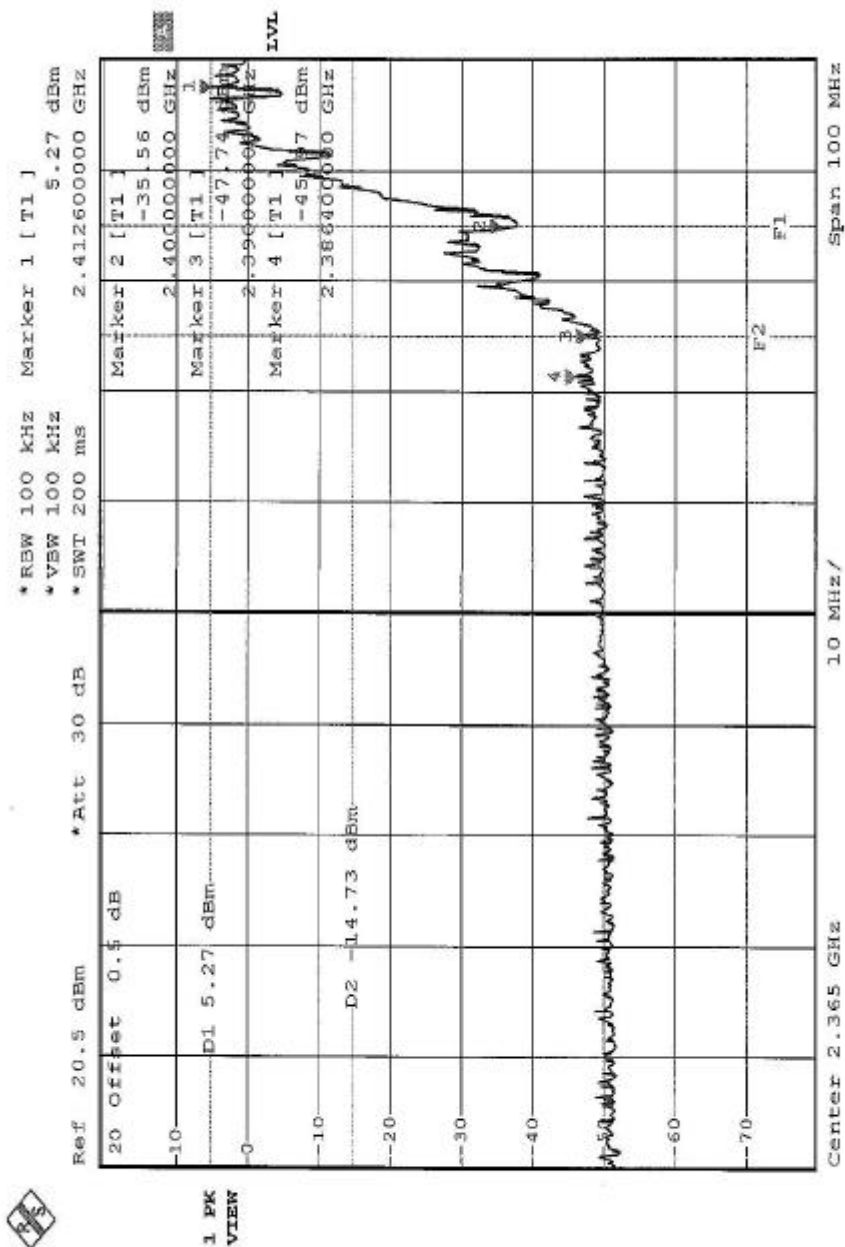

Date: 29.OCT.2002 16:02:10



4.7 ANTENNA REQUIREMENT

4.7.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.7.2 ANTENNA CONNECTED CONSTRUCTION



The antenna used in this product is Dipole Antenna. The antenna connector is MMCX connector. The maximum Gain of the antenna is 1dBi only.

5 PHOTOGRAPHS OF THE TEST CONFIGURATION

CONDUCTED EMISSION TEST



RADIATED EMISSION TEST

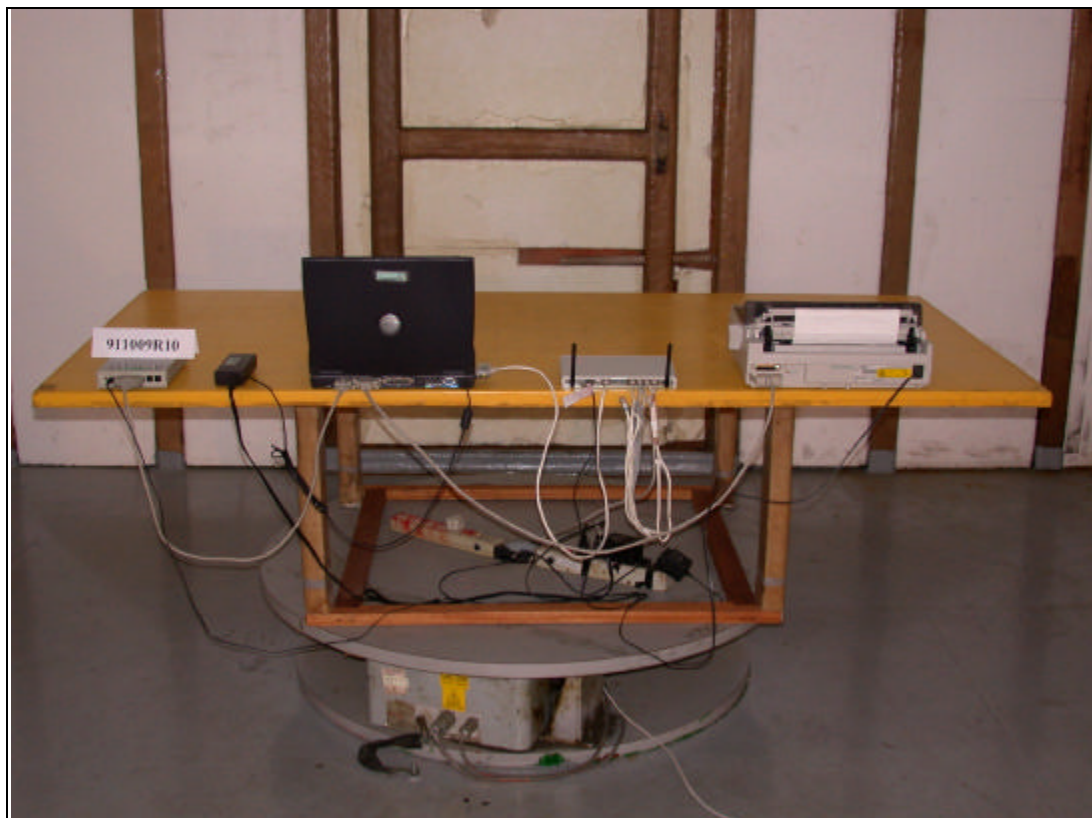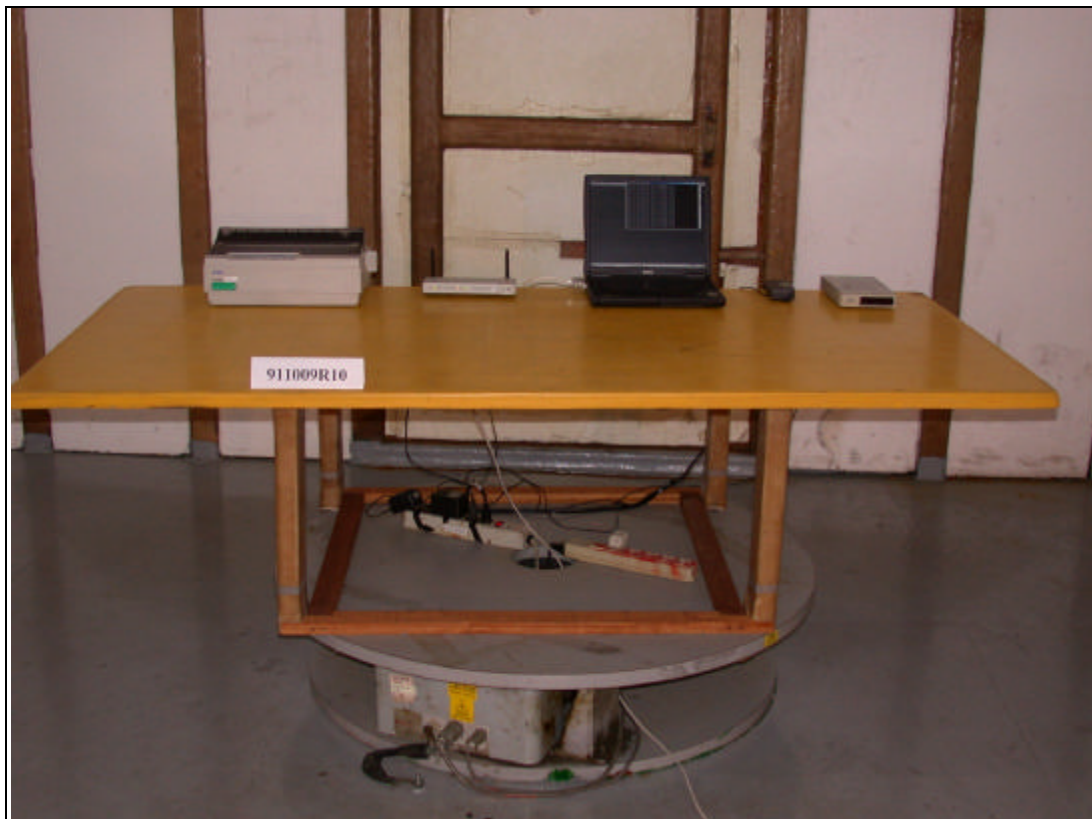



6 INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025, Guide 25 or EN 45001:

USA	FCC, NVLAP, UL
Germany	TUV Rheinland
Japan	VCCI
New Zealand	MoC
Norway	NEMKO
R.O.C.	BSMI, DGT, CNLA

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site:

www.adt.com.tw/index.5/phtml.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC Lab:

Tel: 886-2-26052180

Fax: 886-2-26052943

Hsin Chu EMC Lab:

Tel: 886-35-935343

Fax: 886-35-935342

Lin Kou Safety Lab:

Tel: 886-2-26093195

Fax: 886-2-26093184

Lin Kou RF&Telecom Lab

Tel: 886-3-3270910

Fax: 886-3-3270892

Email: service@mail.adt.com.tw

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.