



# TEST REPORT

**Applicant:** unitech electronics co., ltd.  
**Address:** 5F., No. 136, Ln. 235, Baoqiao Rd., Xindian Dist.,  
New Taipei City 231, Taiwan  
**Equipment Type:** Rugged Handheld Computer  
**Model Name:** PA768e (refer to section 2.3)  
**Brand Name:** unitech  
**FCC ID:** HLEPA768EBWNWU  
**Test Standard:** 47 CFR Part 15 Subpart C  
(refer to section 3.1)  
**Sample Arrival Date:** May 23, 2025  
**Test Date:** Jun. 26, 2025 - Jul. 07, 2025  
**Date of Issue:** Jul. 23, 2025

**ISSUED BY:**

Shenzhen BALUN Technology Co., Ltd.

**Tested by:** Yang Wenxuan

**Checked by:** Ye Hongji

**Approved by:** Sunny Zou

(Technical Director)

<b>Revision History</b>		
Version	Issue Date	Revisions
<u>Rev. 01</u>	<u>Jul. 23, 2025</u>	<u>Initial Issue</u>

## TABLE OF CONTENTS

1	GENERAL INFORMATION .....	4
1.1	Test Laboratory .....	4
1.2	Test Location .....	4
2	PRODUCT INFORMATION .....	5
2.1	Applicant Information .....	5
2.2	Manufacturer Information .....	5
2.3	General Description for Equipment under Test (EUT) .....	5
2.4	Technical Information .....	6
3	SUMMARY OF TEST RESULTS .....	8
3.1	Test Standards .....	8
3.2	Test Verdict .....	8
4	GENERAL TEST CONFIGURATIONS .....	9
4.1	Test Environments .....	9
4.2	Test Equipment List .....	9
4.3	Test Software List .....	9
4.4	Measurement Uncertainty .....	10
4.5	Description of Test Setup .....	10
4.6	Measurement Results Explanation Example .....	13
5	TEST ITEMS .....	14
5.1	Antenna Requirements .....	14
5.2	Frequency Hopping Systems .....	15
5.3	Number of Hopping Frequencies .....	17
5.4	Peak Output Power .....	18
5.5	Occupied Bandwidth .....	19

5.6	Carrier Frequency Separation .....	20
5.7	Time of Occupancy (Dwell time) .....	21
5.8	Conducted Spurious Emission & Authorized-band band-edge .....	23
5.9	Conducted Emission .....	24
5.10	Radiated Spurious Emission .....	25
5.11	Band Edge (Restricted-band band-edge).....	27
ANNEX A	TEST RESULT .....	28
A.1	Number of Hopping Frequency .....	28
A.2	Peak Output Power .....	29
A.3	20 dB and 99% bandwidth .....	32
A.4	Hopping Frequency Separation.....	37
A.5	Average Time of Occupancy .....	38
A.6	Conducted Spurious Emissions & Authorized-band band-edge .....	41
A.7	Conducted Emissions.....	48
A.8	Radiated Spurious Emission .....	50
A.9	Band Edge (Restricted-band band-edge).....	58
ANNEX B	TEST SETUP PHOTOS .....	59
ANNEX C	EUT EXTERNAL PHOTOS .....	59
ANNEX D	EUT INTERNAL PHOTOS .....	59

# 1 GENERAL INFORMATION

## 1.1 Test Laboratory

Name	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1/F, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Phone Number	+86 755 6685 0100

## 1.2 Test Location

Name	Shenzhen BALUN Technology Co., Ltd.
Location	<input checked="" type="checkbox"/> Block B, 1/F, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
	<input type="checkbox"/> 1/F, Building B, Ganghongji High-tech Intelligent Industrial Park, No. 1008, Songbai Road, Yangguang Community, Xili Sub-district, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Accreditation Certificate	The laboratory is a testing organization accredited by FCC as a accredited testing laboratory. The designation number is CN1196.

## 2 PRODUCT INFORMATION

### 2.1 Applicant Information

Applicant	unitech electronics co., ltd.
Address	5F., No. 136, Ln. 235, Baoqiao Rd., Xindian Dist., New Taipei City 231, Taiwan

### 2.2 Manufacturer Information

Manufacturer	unitech electronics co., ltd.
Address	5F., No. 136, Ln. 235, Baoqiao Rd., Xindian Dist., New Taipei City 231, Taiwan

### 2.3 General Description for Equipment under Test (EUT)

EUT Name	Rugged Handheld Computer
Model Name Under Test	PA768e
Series Model Name	PA768
Description of Model name differentiation	Only differences are model names for trading purpose. (this information provided by the applicant).
Hardware Version	FH22_MB_PCB_V1.2
Software Version	RAYAe_V14.00.00.09_20250517
Dimensions (Approx.)	N/A
Weight (Approx.)	N/A

## 2.4 Technical Information

Network and Wireless connectivity	2G Network GPRS/EDGE 850/900/1800/1900 MHz 3G Network WCDMA/HSDPA/HSUPA/DC-HSDPA/HSPA+ Band 1/2/5/8 4G Network LTE FDD Band 1/2/3/4/5/7/8/12/14/17/20/28 LTE TDD Band 38/39/41 Bluetooth (BR+EDR+BLE) WIFI 802.11a, 802.11b, 802.11g, 802.11n, 802.11ac and 802.11ax NFC, GPS, GLONASS, Galileo, BDS, UHF
-----------------------------------	--

The requirement for the following technical information of the EUT was tested in this report:

Modulation Technology	FHSS
Modulation Type	GFSK, $\pi/4$ -DQPSK, 8-DPSK
Product Type	<input type="checkbox"/> Mobile <input checked="" type="checkbox"/> Portable <input type="checkbox"/> Fix Location
Transfer Rate	DH5: 1 Mbps 2DH5: 2 Mbps 3DH5: 3 Mbps
Frequency Range	The frequency range used is 2400 MHz to 2483.5 MHz.
Number of Channel	79 (at intervals of 1 MHz)
Tested Channel	0 (2402 MHz), 39 (2441 MHz), 78 (2480 MHz)
Antenna Type	PIFA Antenna
Antenna Gain	1.72 dBi
Antenna Impedance	50 $\Omega$
Antenna System (MIMO Smart Antenna)	N/A

All channel was listed on the following table:

Channel number	Freq. (MHz)	Channel number	Freq. (MHz)	Channel number	Freq. (MHz)	Channel number	Freq. (MHz)
<b>0</b>	<b>2402</b>	21	2423	42	2444	63	2465
1	2403	22	2424	43	2445	64	2466
2	2404	23	2425	44	2446	65	2467
3	2405	24	2426	45	2447	66	2468
4	2406	25	2427	46	2448	67	2469
5	2407	26	2428	47	2449	68	2470
6	2408	27	2429	48	2450	69	2471
7	2409	28	2430	49	2451	70	2472
8	2410	29	2431	50	2452	71	2473
9	2411	30	2432	51	2453	72	2474
10	2412	31	2433	52	2454	73	2475
11	2413	32	2434	53	2455	74	2476
12	2414	33	2435	54	2456	75	2477
13	2415	34	2436	55	2457	76	2478
14	2416	35	2437	56	2458	77	2479
15	2417	36	2438	57	2459	<b>78</b>	<b>2480</b>
16	2418	37	2439	58	2460	-	-
17	2419	38	2440	59	2461	-	-
18	2420	<b>39</b>	<b>2441</b>	60	2462	-	-
19	2421	40	2442	61	2463	-	-
20	2422	41	2443	62	2464	-	-

### 3 SUMMARY OF TEST RESULTS

#### 3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 15, Subpart C	Intentional radiators of radio frequency equipment
2	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices
3 ☆	KDB 558074 D01 15.247 Meas Guidance v05r02	Guidance for compliance measurements on digital transmission system, frequency hopping spread spectrum system, and hybrid system devices operating under section 15.247 of the FCC rules

#### 3.2 Test Verdict

No.	Description	FCC Part No.	Channel	Test Result	Verdict	Remark
1	Antenna Requirement	15.203	N/A	--	Pass	Note <sup>1</sup>
2	Number of Hopping Frequencies	15.247(a)	Hopping Mode	ANNEX A.1	Pass	Note <sup>2</sup>
3	Peak Output Power	15.247(b)	Low/Middle/High	ANNEX A.2	Pass	--
4	Occupied Bandwidth	15.247(a)	Low/Middle/High	ANNEX A.3	Pass	--
5	Carrier Frequency Separation	15.247(a)	Hopping Mode	ANNEX A.4	Pass	Note <sup>2</sup>
6	Time of Occupancy (Dwell time)	15.247(a)	Hopping Mode	ANNEX A.5	Pass	Note <sup>2</sup>
7	Conducted Spurious Emission & Authorized-band band-edge	15.247(d)	Hopping Mode; Low/Middle/High	ANNEX A.6	Pass	Note <sup>2</sup>
8	Conducted Emission	15.207	Low/Middle/High	ANNEX A.7	Pass	Note <sup>2</sup>
9	Radiated Spurious Emission	15.209 15.247(d)	Low/Middle/High	ANNEX A.8	Pass	Note <sup>2</sup>
10	Band Edge(Restricted-band band-edge)	15.209 15.247(d)	Low/High	ANNEX A.9	Pass	Note <sup>2</sup>

Note <sup>1</sup>: The EUT has a permanently and irreplaceable attached antenna, which complies with the requirement FCC 15.203.

Note <sup>2</sup>:  $\pi/4$ -DQPSK is the EDR 2M rate mode, 8-DPSK is the EDR 3M rate mode. The consistency of test results in  $\pi/4$ -DQPSK and 8-DPSK is very high. So we chose 8-DPSK as a typical representative to appear on the report. Another we will show all the modes on the RF output power test item.



## 4 GENERAL TEST CONFIGURATIONS

### 4.1 Test Environments

During the measurement, the normal environmental conditions were within the listed ranges:

Relative Humidity	46% to 67%	
Atmospheric Pressure	100 kPa to 102 kPa	
Temperature	NT (Normal Temperature)	+20.8°C to +25.1°C
Working Voltage of the EUT	NV (Normal Voltage)	3.85 V

### 4.2 Test Equipment List

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Spectrum Analyzer	KEYSIGHT	N9020A	MY46471071	2025.06.16	2026.06.15
Power Sensor	KEYSIGHT	U2063XA	MY58000247	2024.07.04	2025.07.03
				2025.06.16	2026.06.15
Spectrum Analyzer	KEYSIGHT	N9020A	MY52510065	2024.08.01	2025.07.31
Signaling Unit	ROHDE&SCHWARZ	CMW500	171150	2025.04.28	2026.04.27
Test Antenna-Horn	SCHWARZBECK	BBHA 9120D	01631	2025.02.22	2028.02.21
Test Antenna-Horn	A-INFO	LB-180400KF	J211060273	2024.06.15	2027.06.14
Anechoic Chamber	RAINFORD	9m*6m*6m	144	2022.02.19	2025.09.03
Amplifier	COM-MV	LSCX_LNA1-12G-01	180602	2024.08.01	2025.07.31
Amplifier	COM-MV	XKu_LNA7-18G-01	180601	2024.08.01	2025.07.31
Amplifier	COM-MV	KA LNA18 40G-01	18050001	2024.12.05	2025.12.04
EMI Receiver	ROHDE&SCHWARZ	ESRP	101036	2024.08.01	2025.07.31
Test Antenna-Bi-Log	SCHWARZBECK	VULB 9168	9168-01162	2023.08.04	2026.08.03
Test Antenna-Loop	SCHWARZBECK	FMZB 1519	1519-037	2024.01.23	2027.01.22
Amplifier	COM-MV	ZT30-1000M	B2018054558	2024.11.28	2025.11.27
Anechoic Chamber	EMC Electronic Co., Ltd	20.10*11.60*7.35m	130	2024.07.13	2027.07.12
EMI Receiver	KEYSIGHT	N9010B	MY57110309	2024.08.01	2025.07.31
LISN	SCHWARZBECK	NSLK 8127	8127-687	2025.04.29	2026.04.28
Shielded Enclosure	YiHeng Electronic Co., Ltd	3.5m*3.1m*2.8m	112	2025.02.14	2028.02.13

### 4.3 Test Software List

Description	Manufacturer	Software Version	Serial No.	Applicable test Setup
BL410R	BALUN	V2.1.1.488	N/A	The section 4.5.1
BL410E	BALUN	V22.930	N/A	The section 4.5.2&4.5.3&4.5.4&4.5.5

### 4.4 Measurement Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2.

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Parameters	Uncertainty
Occupied Channel Bandwidth	2.8%
RF output power, conducted	1.28 dB
Power Spectral Density, conducted	1.30 dB
Unwanted Emissions, conducted	1.84 dB
All emissions, radiated	5.36 dB
Temperature	0.8°C
Humidity	4%


### 4.5 Description of Test Setup

#### 4.5.1 For Antenna Port Test

$$\text{Conducted value (dBm)} = \text{Measurement value (dBm)} + \text{cable loss (dB)}$$

For example: the measurement value is 10 dBm and the cable 0.5dBm used, then the final result of EUT:

$$\text{Conducted value (dBm)} = 10 \text{ dBm} + 0.5 \text{ dB} = 10.5 \text{ dBm}$$

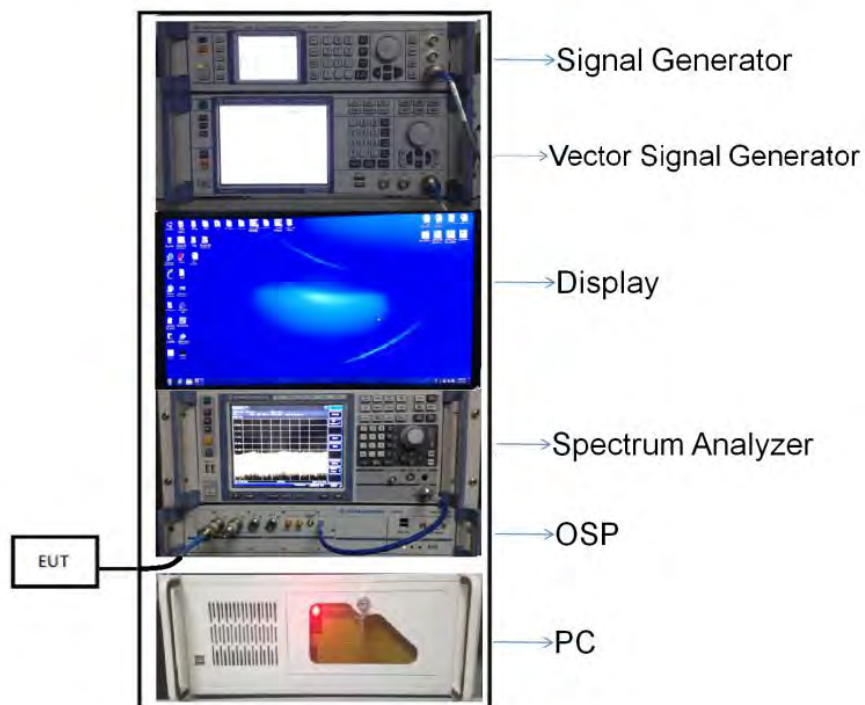


(Diagram 1)

4.5.2 For AC Power Supply Port Test




(Diagram 2)

4.5.3 For Radiated Test (Below 30 MHz)

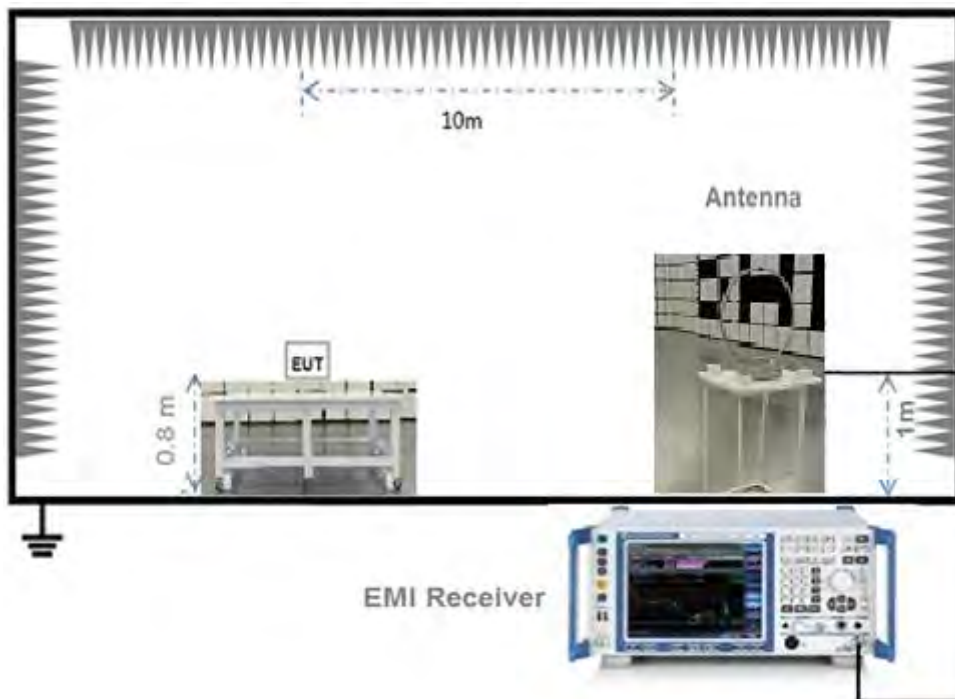


(Diagram 3)

#### 4.5.4 For Radiated Test (30 MHz-1 GHz)

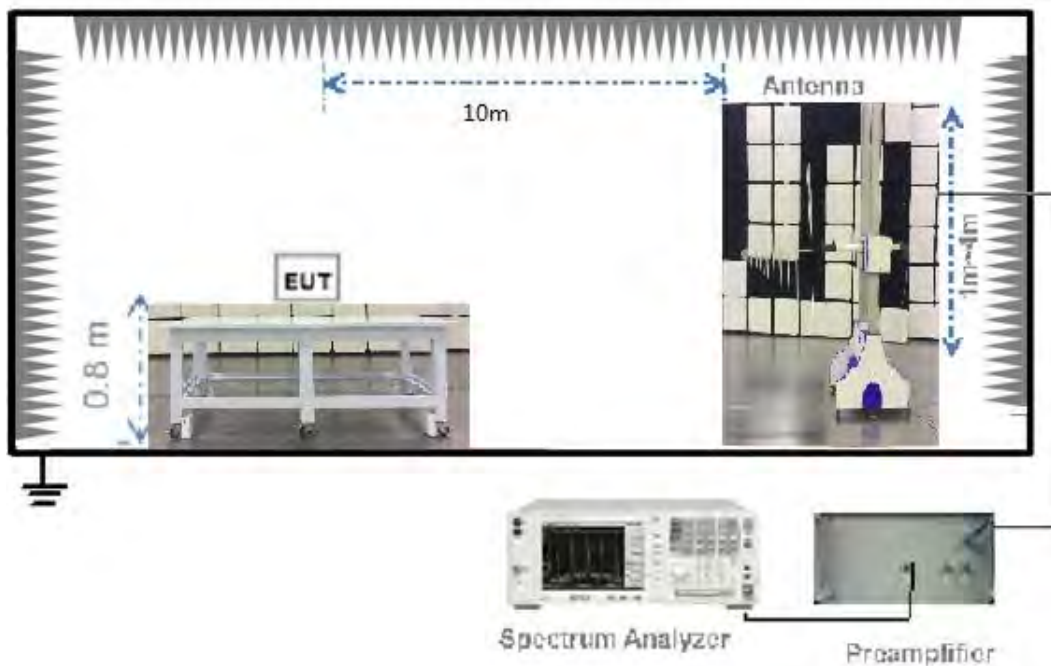

(Diagram 4)

#### 4.5.5 For Radiated Test (Above 1 GHz)

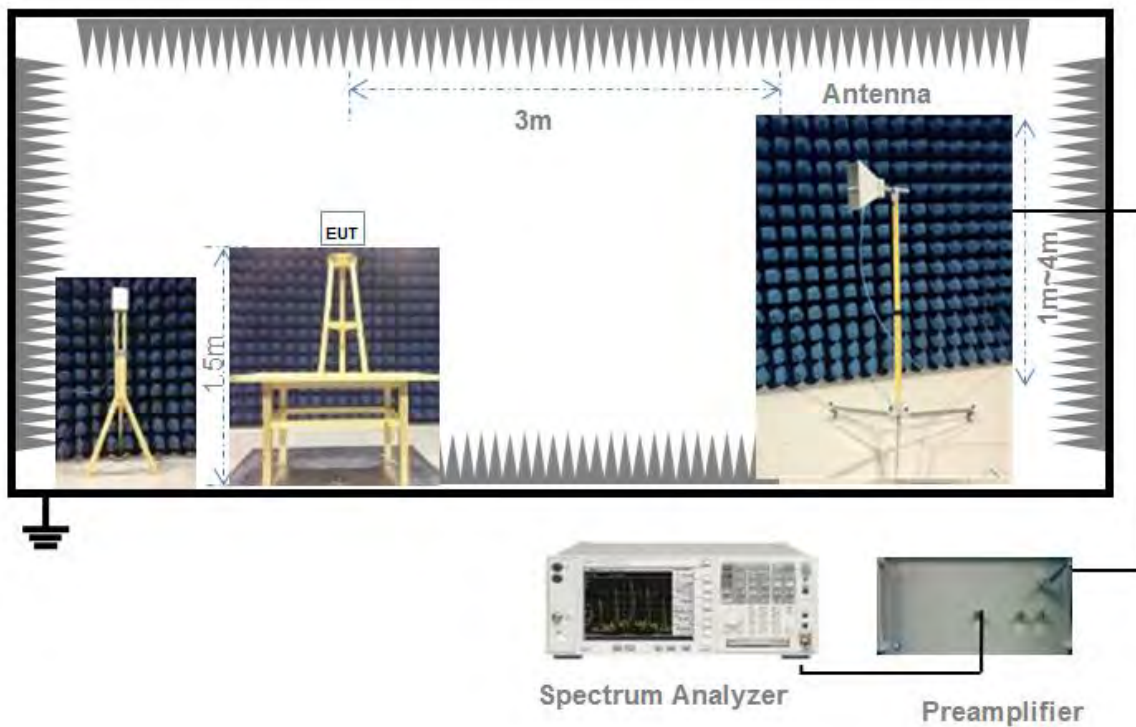

(Diagram 5)

## 4.6 Measurement Results Explanation Example

### 4.6.1 For conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

## 5 TEST ITEMS

### 5.1 Antenna Requirements

#### 5.1.1 Relevant Standards

FCC §15.203 & 15.247(b)

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, § 15.213, § 15.217, § 15.219, or § 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

If directional gain of transmitting antennas is greater than 6 dBi, the power shall be reduced by the same level in dB comparing to gain minus 6 dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

#### 5.1.2 Antenna Anti-Replacement Construction

The Antenna Anti-Replacement as following method:

Protected Method	Description
The antenna is embedded in the product.	An embedded-in antenna design is used.

Reference Documents	Item
Photo	Please refer to the EUT Photo documents.

#### 5.1.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

## 5.2 Frequency Hopping Systems

### 5.2.1 Relevant Standards

FCC §15.247(a) (1) (i) (ii) (iii) (iv); FCC §15.247(g); FCC §15.247(h)

Describe how the hopping sequence is generated. Provide an example of the hopping sequence channels, to demonstrate that the sequence meets the requirement specified in the definition of an FHSS system. Per the definition in Section 2.1(c), the hop set shall appear as random in the near term, shall appear as evenly distributed in the long term, and sequential hops shall be randomly distributed in both direction and magnitude of change.

Describe how each individual EUT meets the requirement that each of its hopping channels is used equally on average (e.g., that each new transmission event begins on the next channel in the hopping sequence after the final channel used in the previous transmission event).

Describe how the associated receiver(s) complies with the requirement that the input bandwidth (either RF or IF) matches the bandwidth of the transmitted signal.


Describe how the associated receiver(s) has the ability to shift frequencies in synchronization with the transmitted signals.

For short burst systems, describe how the EUT complies with the requirement that it be designed to be capable of operating as a true frequency hopping system. Specifically, the device shall comply with the equal frequency use and pseudorandom hopping sequence requirement when transmitting in short bursts, and shall be designed to comply when presented with continuous data (or information) stream.

Describe how the EUT complies with the requirement that it not have the ability to be coordinated with other FHSS systems in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitters.

### 5.2.2 Description of the systems

1. According to the preset procedure of the whole network, all the stations in the automatic control network synchronously change the frequency multiple times within one second, and temporarily stay on each frequency hopping channel. Periodic synchronization signaling is sent from the primary station, instructing all slaves to simultaneously change the operating frequency, then the hopping sequence is generated.
2. The hop set shall appear as random in the near term, shall appear as evenly distributed in the long term, and sequential hops shall be randomly distributed in both direction and magnitude of change.

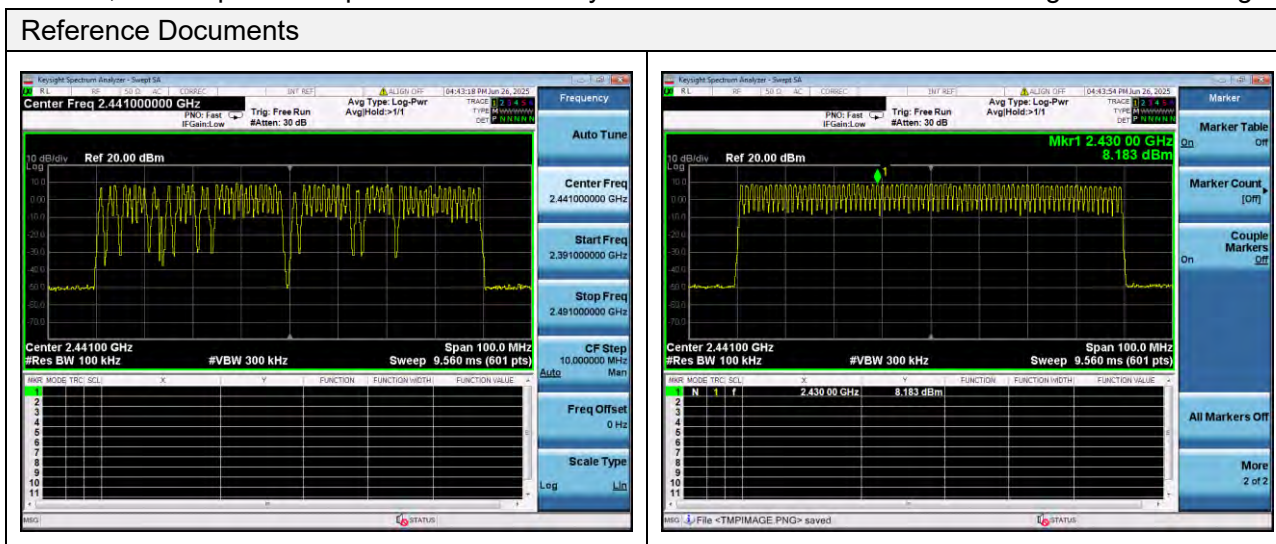

3. Channels are classified into two categories, used and unused, where used channels are part of the hopping sequence and unused channels are replaced in the hopping sequence by used channels in a pseudo-random way. Make each individual EUT meets the requirement that each of its hopping channels is used equally on average.
4. The input bandwidth and transmitted bandwidth are both 1MHz, the associated receiver(s) complies with the requirement that the input bandwidth matches the bandwidth of the transmitted signal.
5. Connected devices communicate on the same physical channel by synchronizing with a common clock and hopping sequence.
6. EUT isn't short burst systems.
7. EUT can't have the ability to be coordinated with other FHSS systems in an effort.



## 5.3 Number of Hopping Frequencies

### 5.3.1 Limit

FCC §15.247(a) (1) (iii)

Frequency hopping systems operating in the 2400 MHz to 2483.5 MHz bands shall use at least 15 hopping frequencies.

### 5.3.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

### 5.3.3 Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = The frequency band of operation

RBW = To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.

VBW  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize

### 5.3.4 Test Result

Please refer to ANNEX A.1.

## 5.4 Peak Output Power

### 5.4.1 Test Limit

FCC § 15.247(b)

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

### 5.4.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

### 5.4.3 Test Procedure

The Module operates at hopping-off test mode. The lowest, middle and highest channels are selected to perform testing to verify the conducted RF output peak power of the Module.

Use the following spectrum analyzer settings:

Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel

RBW > the 20 dB bandwidth of the emission being measured

VBW  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize.

### 5.4.4 Test Result

Please refer to ANNEX A.2.

## 5.5 Occupied Bandwidth

### 5.5.1 Limit

FCC §15.247(a)

Measurement of the 20dB bandwidth of the modulated signal.

### 5.5.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

### 5.5.3 Test Procedure

Use the following spectrum analyzer settings:

Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hopping channel

RBW = in the range of 1% to 5% of the OBW

VBW  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

The EUT should be transmitting at its maximum data rate, Allow the trace to stabilize.

### 5.5.4 Test Result

Please refer to ANNEX A.3.

## 5.6 Carrier Frequency Separation

### 5.6.1 Limit

FCC §15.247(a)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 2/3 of the 20 dB bandwidth of the hopping channel, whichever is greater.

### 5.6.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

### 5.6.3 Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = wide enough to capture the peaks of two adjacent channels

Resolution (or IF) Bandwidth (RBW)  $\geq$  1% of the span

Video (or Average) Bandwidth (VBW)  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

### 5.6.4 Test Result

Please refer to ANNEX A.4.

## 5.7 Time of Occupancy (Dwell time)

### 5.7.1 Limit

#### FCC §15.247(a)

Frequency hopping systems in the 2400 MHz - 2483.5 MHz band shall use at least 15 non-overlapping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

### 5.7.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

### 5.7.3 Test Procedure

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

Span: Zero span, centered on a hopping channel

RBW shall be  $\leq$  channel spacing and where possible RBW should be set  $\gg 1/T$ , where T is the expected dwell time per channel

Sweep: As necessary to capture the entire dwell time per hopping channel; where possible use a video trigger and trigger delay so that the transmitted signal starts a little to the right of the start of the plot. The trigger level might need slight adjustment to prevent triggering when the system hops on an adjacent channel; a second plot might be needed with a longer sweep time to show two successive hops on a channel

Detector function: Peak

Trace: Max hold

Use the marker-delta function to determine the transmit time per hop. If this value varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test for each variation in transmit time.

The average time of occupancy on any channel within the Period can be calculated with formulas:

For GFSK and 8-DPSK:

For DH1 package type

$$\{\text{Total of Dwell}\} = \{\text{Pulse Time}\} * (1600 / 2) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\}$$

$$\{\text{Period}\} = 0.4 \text{ s} * \{\text{Number of Hopping Frequency}\}$$

For DH3 package type

$$\{\text{Total of Dwell}\} = \{\text{Pulse Time}\} * (1600 / 4) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\}$$

$$\{\text{Period}\} = 0.4 \text{ s} * \{\text{Number of Hopping Frequency}\}$$

For DH5 package type

$$\{\text{Total of Dwell}\} = \{\text{Pulse Time}\} * (1600 / 6) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\}$$

$$\{\text{Period}\} = 0.4 \text{ s} * \{\text{Number of Hopping Frequency}\}$$

For AFH Mode:

For DH1 package type

$$\{\text{Total of Dwell}\} = \{\text{Pulse Time}\} * (800 / 2) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\}$$

{Period} = 0.4 s \* {Number of Hopping Frequency}

For DH3 package type

{Total of Dwell} = {Pulse Time} \* (800 / 4) / {Number of Hopping Frequency} \* {Period}

{Period} = 0.4 s \* {Number of Hopping Frequency}

For DH5 package type

{Total of Dwell} = {Pulse Time} \* (800 / 6) / {Number of Hopping Frequency} \* {Period}

{Period} = 0.4 s \* {Number of Hopping Frequency}

The lowest, middle and highest channels are selected to perform testing to record the dwell time of each occupation measured in this channel, which is called Pulse Time here.

#### 5.7.4 Test Result

Please refer to ANNEX A.5.

## 5.8 Conducted Spurious Emission & Authorized-band band-edge

### 5.8.1 Limit

#### FCC §15.247(d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

### 5.8.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

### 5.8.3 Test Procedure

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

RBW = 100 kHz

VBW = 300 kHz

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize

### 5.8.4 Test Result

Please refer to ANNEX A.6.

## 5.9 Conducted Emission

### 5.9.1 Limit

#### FCC §15.207

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 $\mu$ H/50 $\Omega$  line impedance stabilization network (LISN).

Frequency range (MHz)	Conducted Limit (dB $\mu$ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
0.50 - 30	60	50

### 5.9.2 Test Setup

See section 4.5.2 for test setup description for the AC power supply port. The photo of test setup please refer to ANNEX B.

### 5.9.3 Test Procedure

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz) for which the device is capable of operation. A device rated for 50/60 Hz operation need not be tested at both frequencies provided the radiated and line conducted emissions are the same at both frequencies.

### 5.9.4 Test Result

Please refer to ANNEX A.7.



## 5.10 Radiated Spurious Emission

### 5.10.1 Limit

FCC §15.209&15.247(d)

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ( $\mu\text{V}/\text{m}$ )	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note:

1. Field Strength (dB $\mu\text{V}/\text{m}$ ) = 20\*log[Field Strength ( $\mu\text{V}/\text{m}$ )].
2. In the emission tables above, the tighter limit applies at the band edges.
3. For Above 1000 MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
4. For above 1000 MHz, limit field strength of harmonics: 54dB $\mu\text{V}/\text{m}$ @3m (AV) and 74dB $\mu\text{V}/\text{m}$ @3m (PK).

### 5.10.2 Test Setup

See section 4.5.3 to 4.5.5 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

### 5.10.3 Test Procedure

The measurement frequency range is from 9 kHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for  $f \geq 1$  GHz, 100 kHz for  $f < 1$  GHz

VBW  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported, Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

#### 5.10.4 Test Result

Please refer to ANNEX A.8.

## 5.11 Band Edge (Restricted-band band-edge)

### 5.11.1 Limit

FCC §15.209&15.247(d)

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

### 5.11.2 Test Setup

See section 4.5.3 to 4.5.5 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

### 5.11.3 Test Procedure

The measurement frequency range is from 9 kHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for  $f \geq 1$  GHz, 100 kHz for  $f < 1$  GHz

VBW  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported, Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

### 5.11.4 Test Result

Please refer to ANNEX A.9.

# ANNEX A TEST RESULT


## A.1 Number of Hopping Frequency

### Test Data

Test Mode	Frequency Block (MHz)	Measured Channel Numbers	Min. Limit	Verdict
GFSK	2400 - 2483.5	79	15	Pass
8-DPSK	2400 - 2483.5	79	15	Pass

### Test Plots


GFSK 2.4 GHz ~ 2.4415 GHz

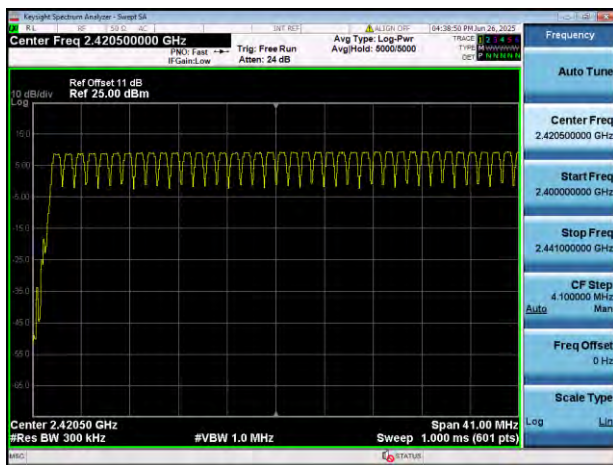

GFSK 2.4415 GHz ~ 2.4835 GHz



8-DPSK 2.4 GHz ~ 2.4415 GHz

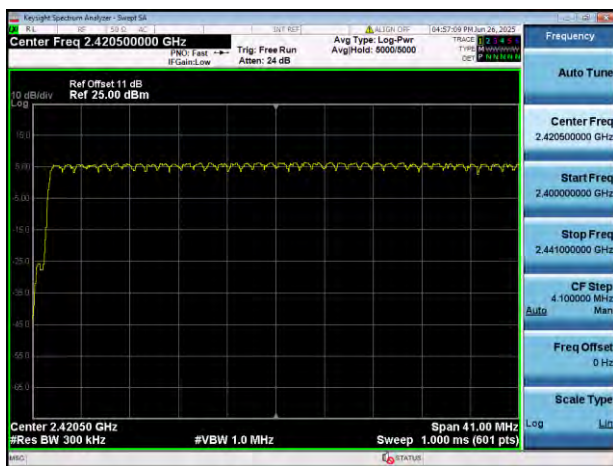

8-DPSK 2.4415 GHz ~ 2.4835 GHz



## A.2 Peak Output Power

### Peak Power Test Data

Channel	Measured Output Peak Power						Limit		Verdict
	GFSK		$\pi/4$ -DQPSK		8-DPSK		dBm	mW	
	dBm	mW	dBm	mW	dBm	mW			
Low	8.70	7.41	6.81	4.79	7.88	6.13	21	125	Pass
Middle	9.18	8.28	7.05	5.06	8.28	6.73			Pass
High	7.75	5.96	6.89	4.89	7.02	5.04			Pass

Test Plots

GFSK LOW CHANNEL



GFSK MIDDLE CHANNEL



GFSK HIGH CHANNEL



$\pi/4$ -DQPSK LOW CHANNEL



$\pi/4$ -DQPSK MIDDLE CHANNEL



$\pi/4$ -DQPSK HIGH CHANNEL



8-DPSK LOW CHANNEL



8-DPSK MIDDLE CHANNEL



8-DPSK HIGH CHANNEL



### A.3 20 dB and 99% bandwidth

#### Test Data

GFSK		
Channel	20 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	0.950000	0.885700
Middle	0.945000	0.884980
High	0.950000	0.885230
$\pi/4$ -DQPSK		
Channel	20 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	1.355000	1.197400
Middle	1.360000	1.198000
High	1.365000	1.228200
8-DPSK		
Channel	20 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	1.320000	1.210800
Middle	1.320000	1.204600
High	1.342500	1.233900



Test Plots

20 dB Bandwidth


GFSK LOW CHANNEL



GFSK MIDDLE CHANNEL



GFSK HIGH CHANNEL

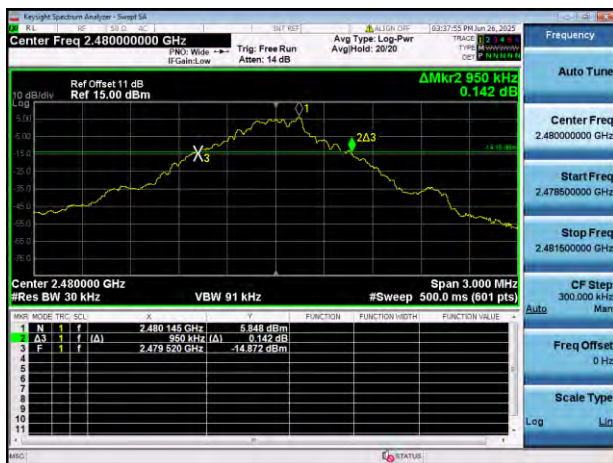

π/4-DQPSK LOW CHANNEL



π/4-DQPSK MIDDLE CHANNEL



$\pi/4$ -DQPSK HIGH CHANNEL



8-DPSK LOW CHANNEL



8-DPSK MIDDLE CHANNEL



8-DPSK HIGH CHANNEL



99% Bandwidth

GFSK LOW CHANNEL




GFSK MIDDLE CHANNEL




GFSK HIGH CHANNEL




$\pi/4$ -DQPSK LOW CHANNEL

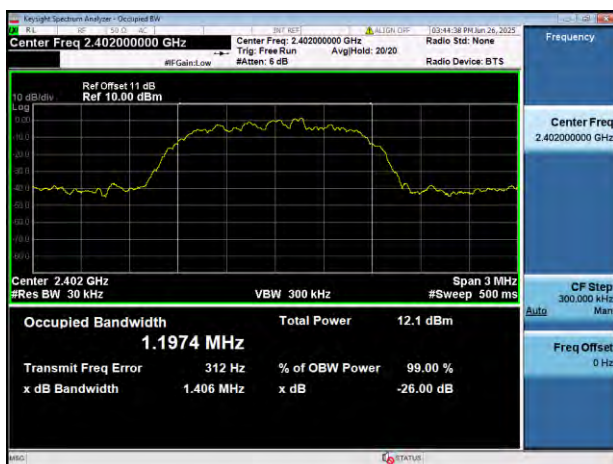


$\pi/4$ -DQPSK MIDDLE CHANNEL

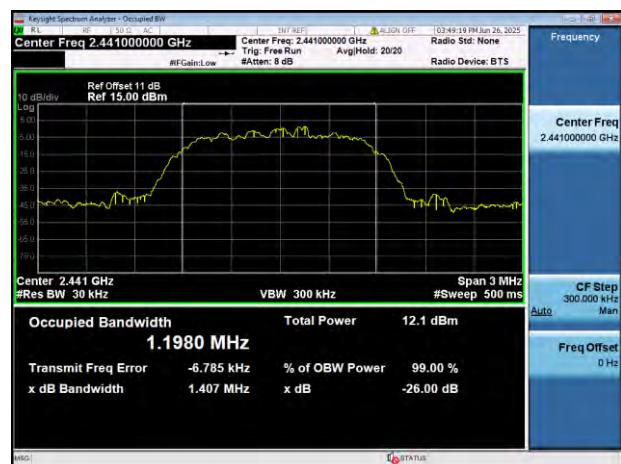


$\pi/4$ -DQPSK HIGH CHANNEL

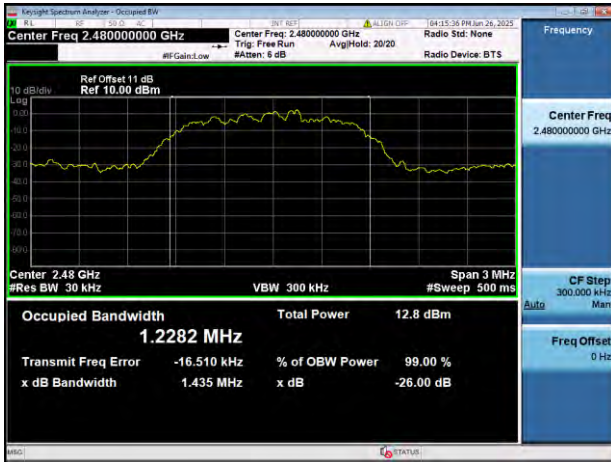


8-DPSK LOW CHANNEL

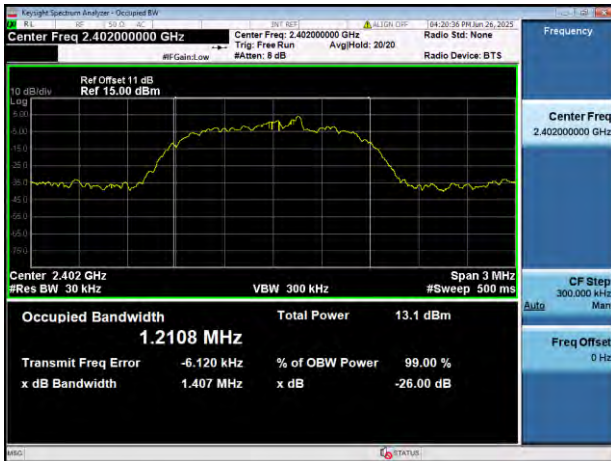

8-DPSK MIDDLE CHANNEL

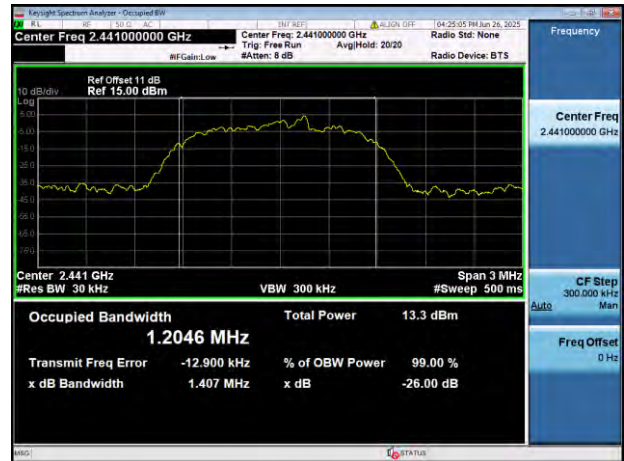

8-DPSK HIGH CHANNEL

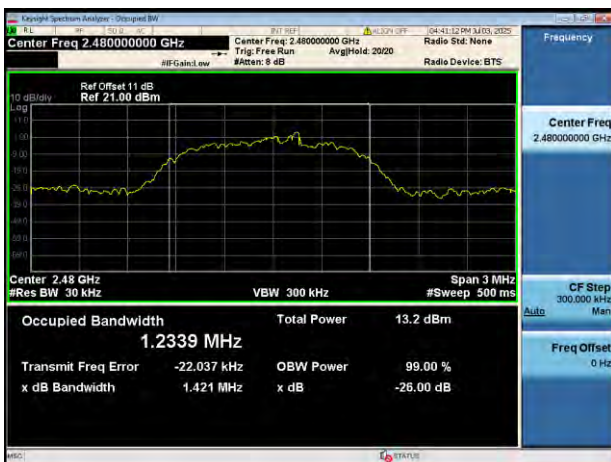

## A.4 Hopping Frequency Separation

### Test Data


Mode	Frequency separation (MHz)	2/3 of the 20 dB Bandwidth (MHz)	Verdict
GFSK	1.000	0.633	Pass
8-DPSK	1.000	0.895	Pass

### Test Plots

GFSK



8-DPSK

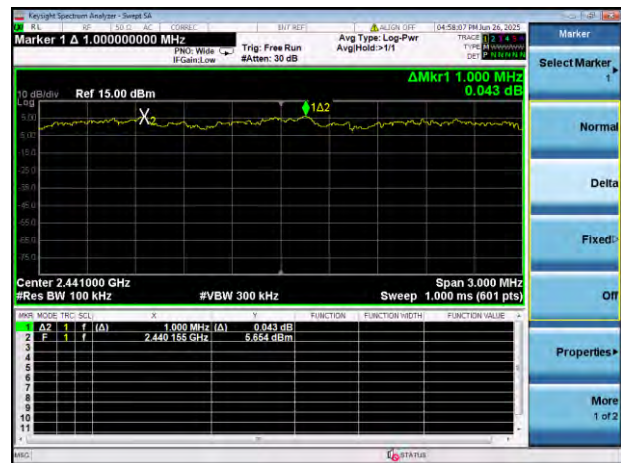


## A.5 Average Time of Occupancy

### Test Data


GFSK				
DH Packet	Pulse Width (ms)	Total of Dwell (ms)	Limit (sec)	Verdict
DH 1	0.37440	119.808	0.4	Pass
DH 3	1.63400	261.440	0.4	Pass
DH 5	2.88800	308.053	0.4	Pass
8-DPSK				
DH Packet	Pulse Width (ms)	Total of Dwell (ms)	Limit (sec)	Verdict
3DH 1	0.38240	122.368	0.4	Pass
3DH 3	1.63400	261.440	0.4	Pass
3DH 5	2.88800	308.053	0.4	Pass
AFH Mode				
DH Packet	Pulse Width (ms)	Total of Dwell (ms)	Limit (sec)	Verdict
DH 1	0.37600	60.160	0.4	Pass
DH 3	1.63400	130.720	0.4	Pass
DH 5	2.88800	154.027	0.4	Pass

Test Plots


GFSK DH1

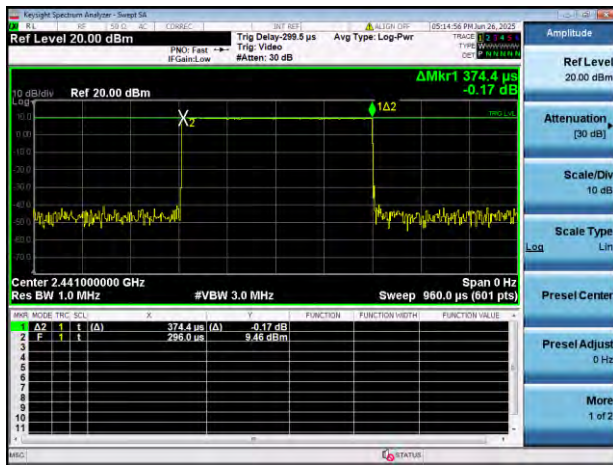


GFSK DH3

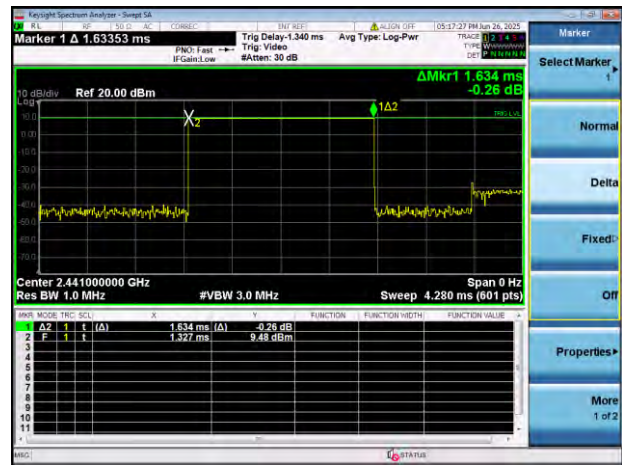


GFSK DH5

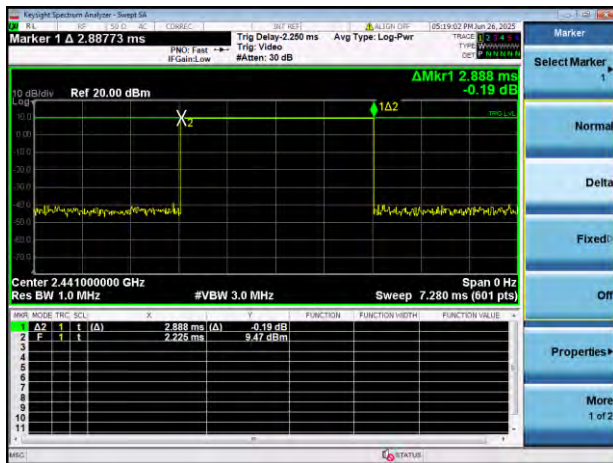


8-DPSK 3DH1

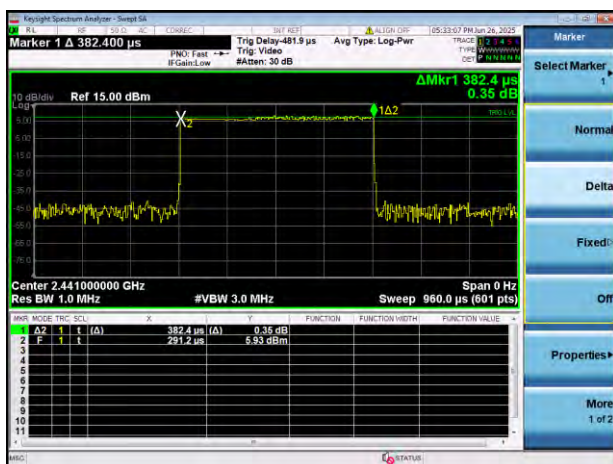


8-DPSK 3DH3

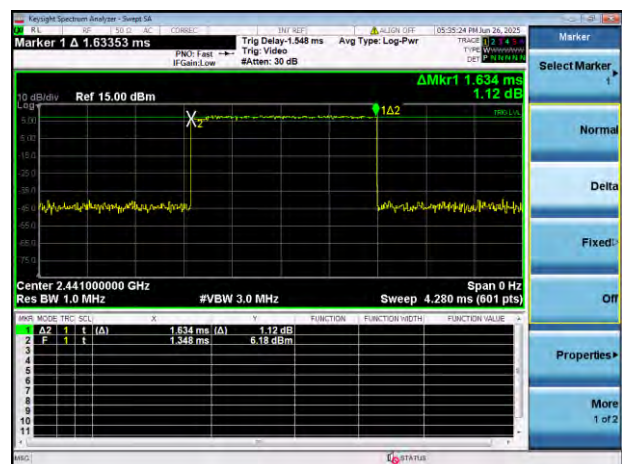


### 8-DPSK 3DH5

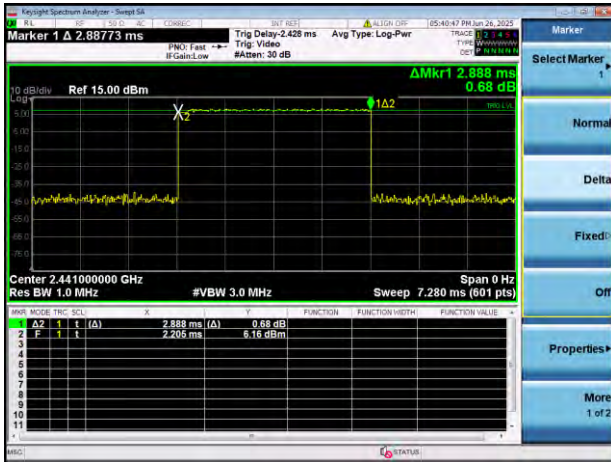


### AFH Mode DH1

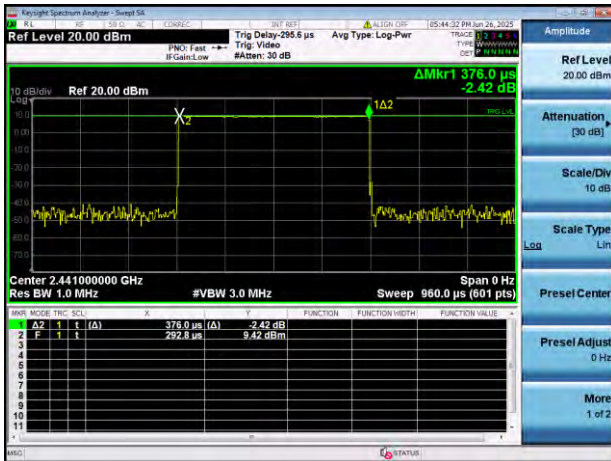

### AFH Mode DH3

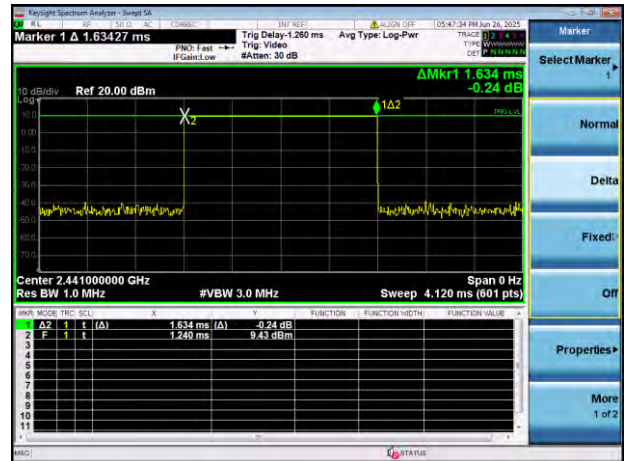

### AFH Mode DH5

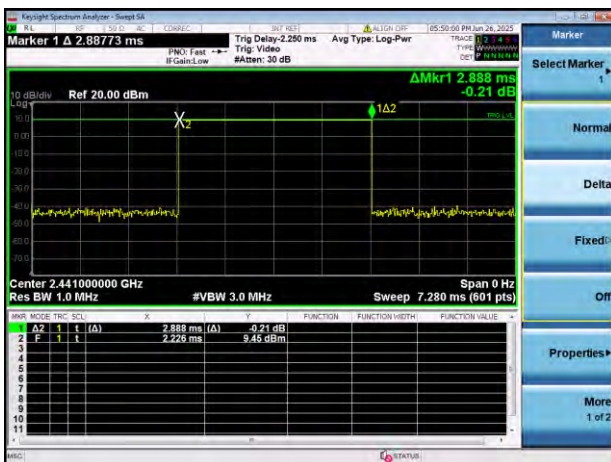



## A.6 Conducted Spurious Emissions & Authorized-band band-edge

### Test Data

GFSK				
Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-35.75	8.22	-11.79	Pass
Middle	-36.08	8.67	-11.33	Pass
High	-36.12	7.47	-12.54	Pass
8-DPSK				
Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-35.79	5.56	-14.44	Pass
Middle	-35.90	5.71	-14.29	Pass
High	-34.78	5.24	-14.76	Pass

Hopping Mode				
Mode	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
GFSK	-36.40	8.18	-11.82	Pass
8-DPSK	-35.74	2.70	-17.30	Pass

Test Plots

GFSK LOW CHANNEL, CARRIER LEVEL



GFSK LOW CHANNEL, BAND EDGE




GFSK LOW CHANNEL, SPURIOUS

30 MHz ~ 3 GHz




GFSK LOW CHANNEL, SPURIOUS


3 GHz ~ 25 GHz

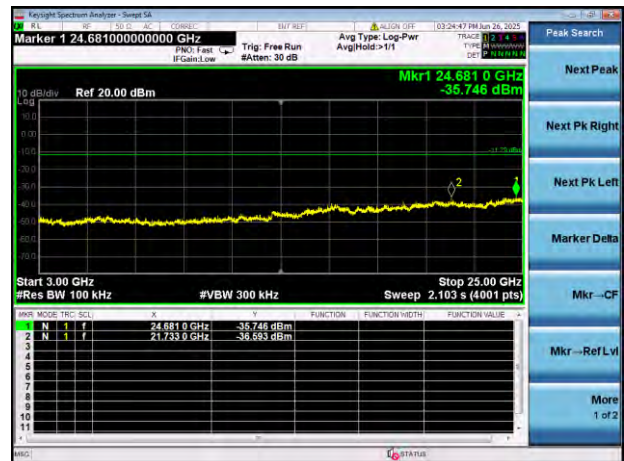


GFSK MIDDLE CHANNEL, CARRIER LEVEL

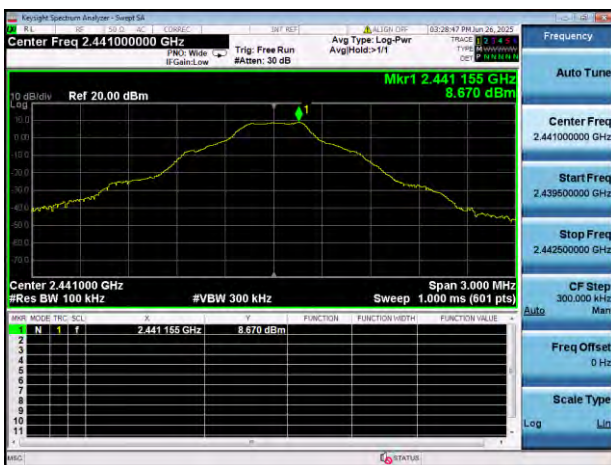

GFSK MIDDLE CHANNEL, SPURIOUS  
30 MHz ~ 3 GHz

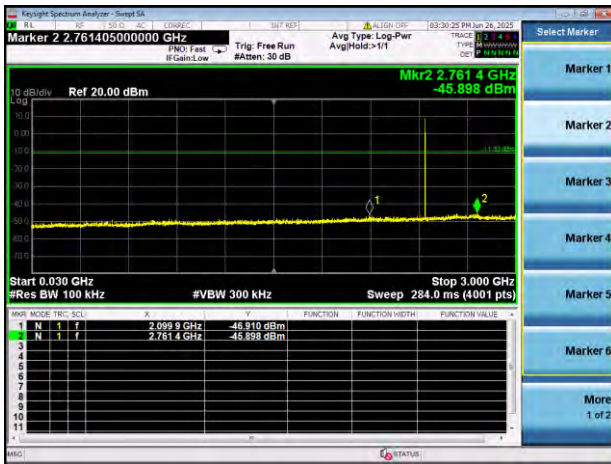


GFSK MIDDLE CHANNEL, SPURIOUS  
3 GHz ~ 25 GHz

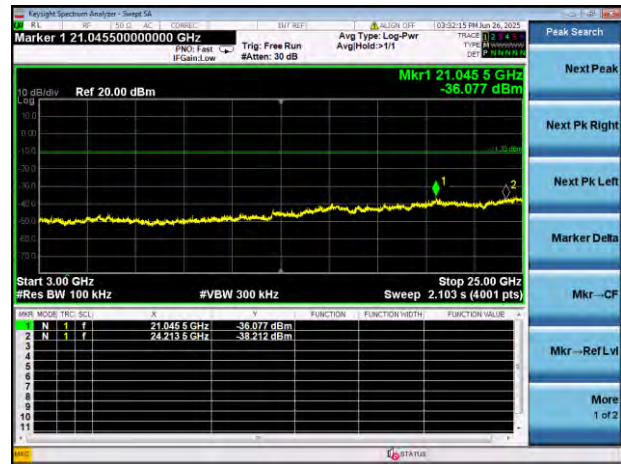


GFSK HIGH CHANNEL, CARRIER LEVEL




GFSK HIGH CHANNEL, BAND EDGE

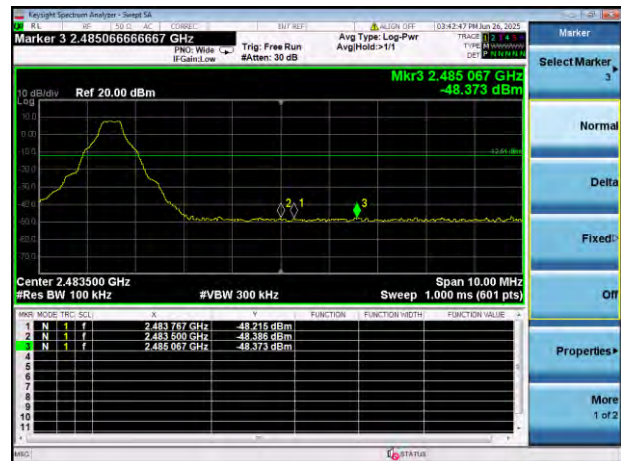


GFSK HIGH CHANNEL, SPURIOUS  
30 MHz ~ 3 GHz

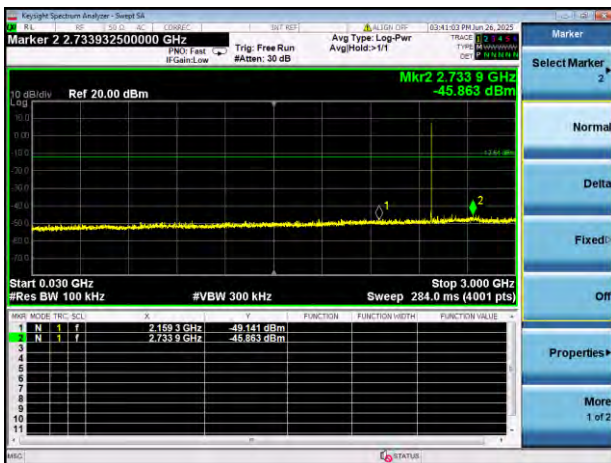


GFSK HIGH CHANNEL, SPURIOUS  
3 GHz ~ 25 GHz

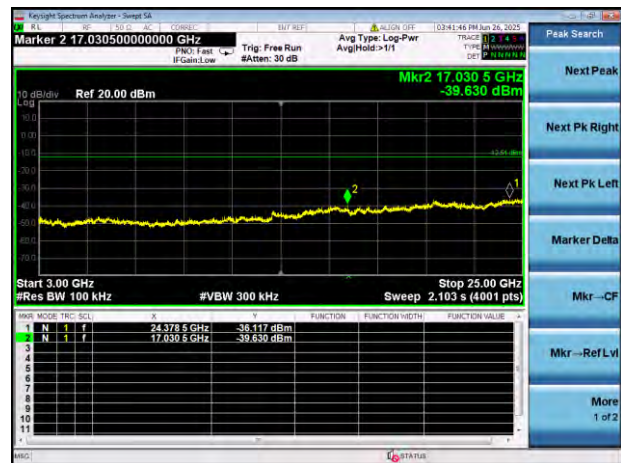

8-DPSK LOW CHANNEL, CARRIER LEVEL

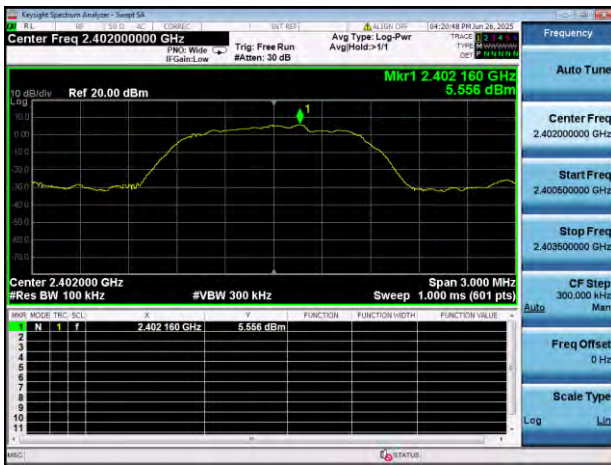


8-DPSK LOW CHANNEL, BAND EDGE

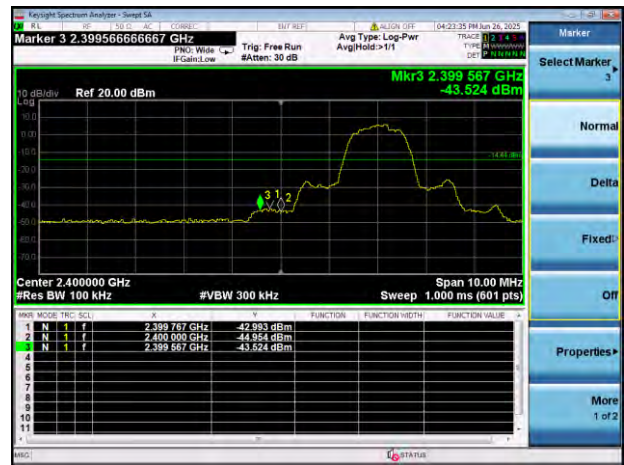


8-DPSK LOW CHANNEL, SPURIOUS

30 MHz ~ 3 GHz

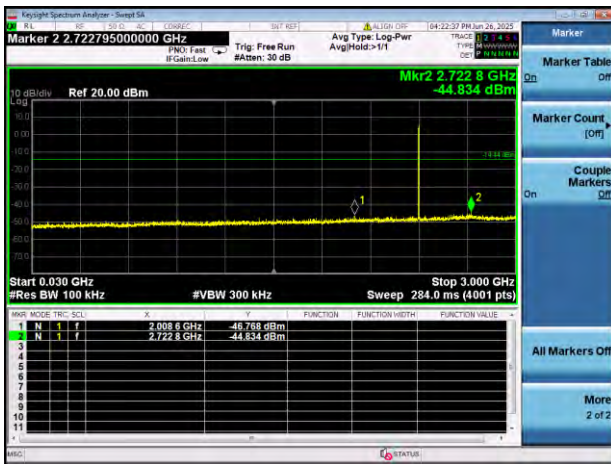


8-DPSK LOW CHANNEL, SPURIOUS


3 GHz ~ 25 GHz

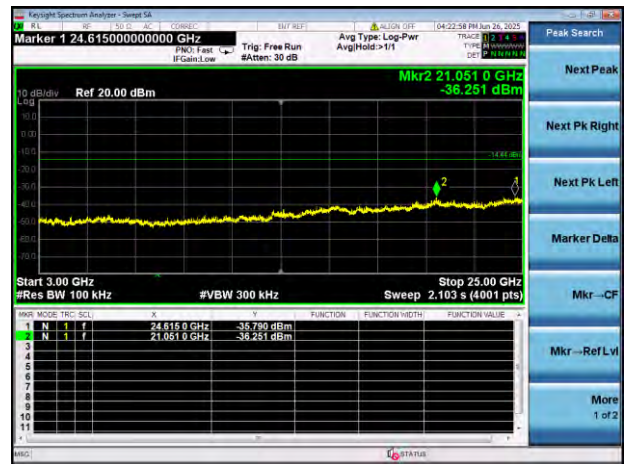


8-DPSK MIDDLE CHANNEL, CARRIER LEVEL

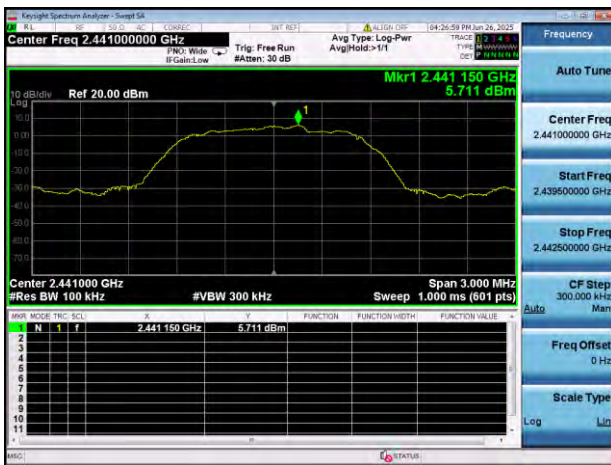


8-DPSK MIDDLE CHANNEL, SPURIOUS  
30 MHz ~ 3 GHz

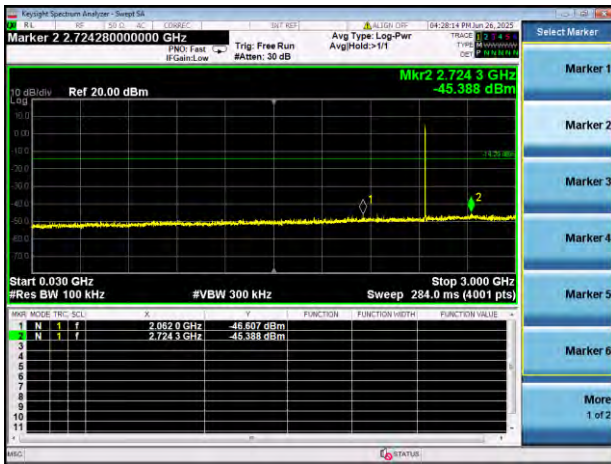


8-DPSK MIDDLE CHANNEL, SPURIOUS  
3 GHz ~ 25 GHz

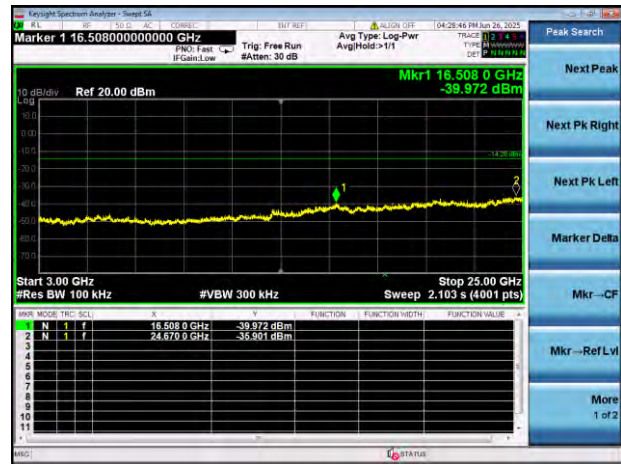


8-DPSK HIGH CHANNEL, CARRIER LEVEL

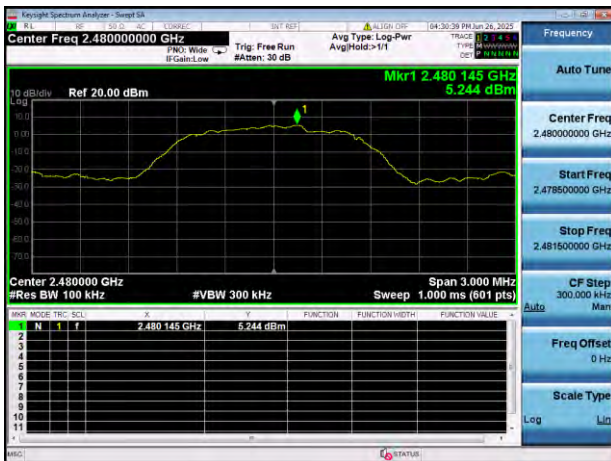


8-DPSK HIGH CHANNEL, BAND EDGE

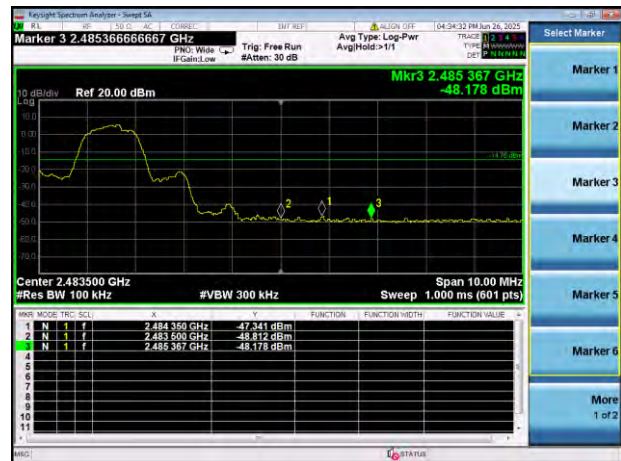


8-DPSK HIGH CHANNEL, SPURIOUS  
30 MHz ~ 3 GHz

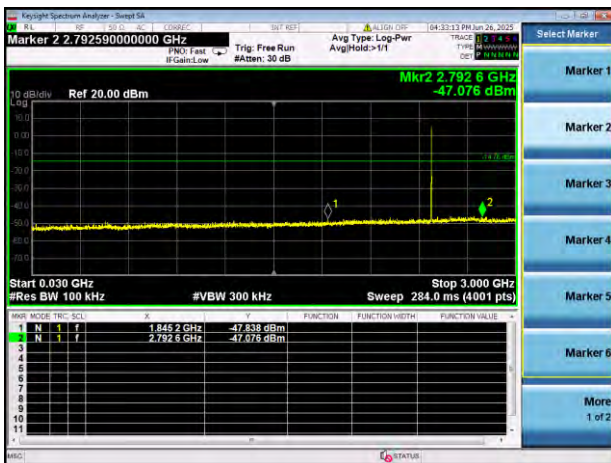

8-DPSK HIGH CHANNEL, SPURIOUS  
3 GHz ~ 25 GHz

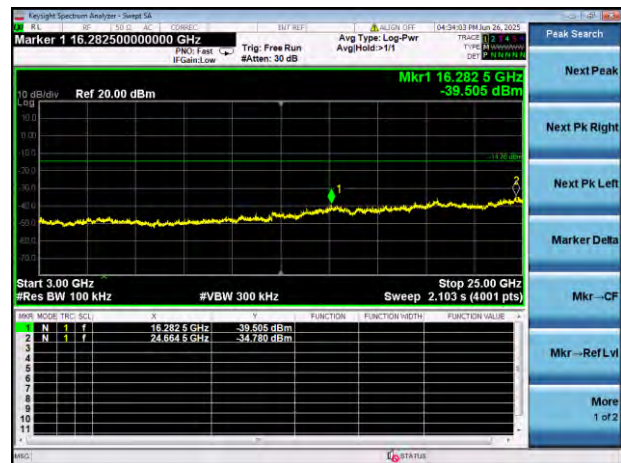

GFSK HOPPING, CARRIER LEVEL

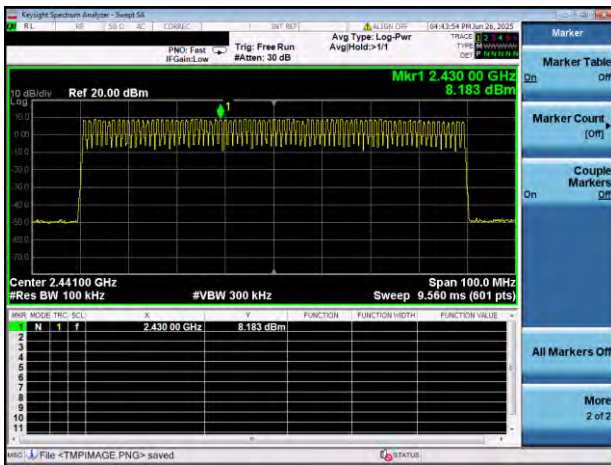

GFSK HOPPING BAND EDGE (LOW)




GFSK HOPPING BAND EDGE (HIGH)




GFSK Hopping Mode, SPURIOUS  
30 MHz ~ 3 GHz



GFSK Hopping Mode, SPURIOUS  
3GHz ~ 25 GHz

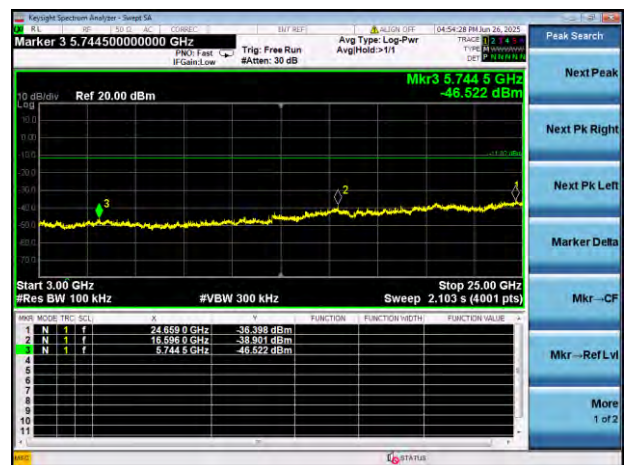

8-DPSK HOPPING, CARRIER LEVEL

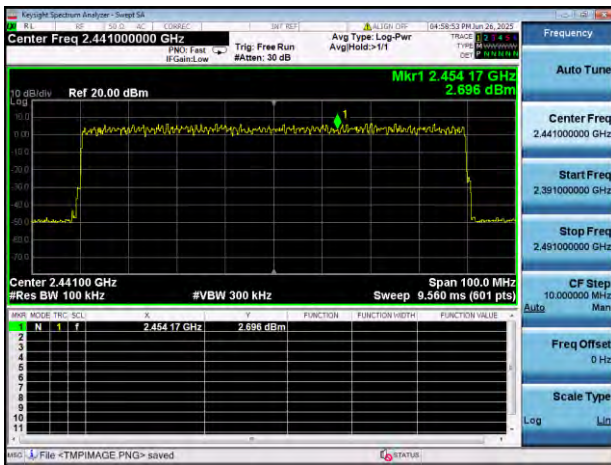


8-DPSK Hopping BAND EDGE (LOW)




8-DPSK Hopping BAND EDGE (HIGH)



8-DPSK Hopping Mode, SPURIOUS  
30 MHz ~ 3 GHz

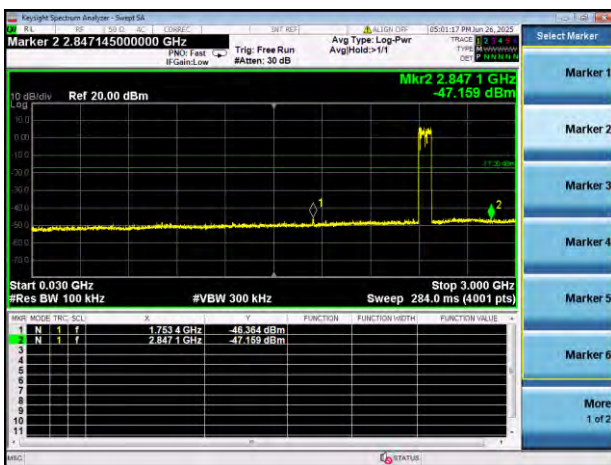

8-DPSK Hopping Mode, SPURIOUS  
3GHz ~ 25 GHz

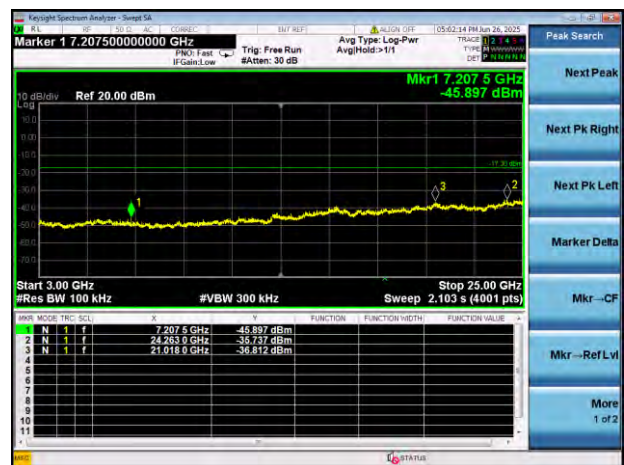

## A.7 Conducted Emissions

Note <sup>1</sup>: The EUT is working in the Normal link mode. All modes have been tested and normal link mode is worst.


Note <sup>2</sup>: Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 60 Hz and 240 VAC, 50 Hz) for which the device is capable of operation. So, The configuration 120 VAC, 60 Hz and 240 VAC, 50 Hz were tested respectively, but only the worst configuration (120 VAC, 60 Hz) shown here.

Note <sup>3</sup>: Results (dBuV) = Original reading level of Spectrum Analyzer (dBuV) + Factor (dB)

### Test Data and Plots

#### PHASE L

CE Test case\_FCC\_CE\_FCC PART 15C

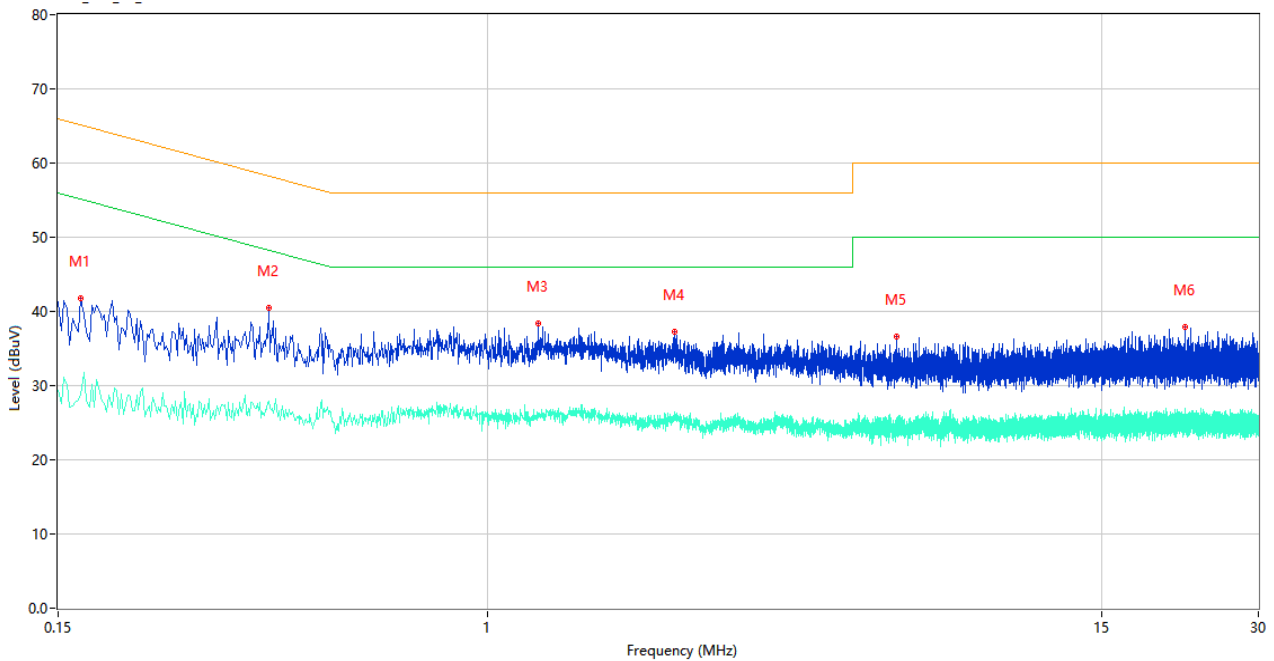


No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.166	41.72	9.85	65.16	23.44	Peak	L	Pass
1**	0.166	28.72	9.85	55.16	26.44	AV	L	Pass
2	0.380	40.53	10.70	58.28	17.75	Peak	L	Pass
2**	0.380	27.96	10.70	48.28	20.32	AV	L	Pass
3	1.248	38.41	10.49	56.00	17.59	Peak	L	Pass
3**	1.248	25.60	10.49	46.00	20.40	AV	L	Pass
4	2.278	37.21	10.30	56.00	18.79	Peak	L	Pass
4**	2.278	25.71	10.30	46.00	20.29	AV	L	Pass
5	6.078	36.60	10.30	60.00	23.40	Peak	L	Pass
5**	6.078	25.31	10.30	50.00	24.69	AV	L	Pass
6	21.658	37.84	11.09	60.00	22.16	Peak	L	Pass
6**	21.658	26.88	11.09	50.00	23.12	AV	L	Pass
6**	12.480	34.65	10.46	50.00	15.35	AV	L	Pass



PHASE N

CE Test case\_FCC\_CE\_FCC PART 15C

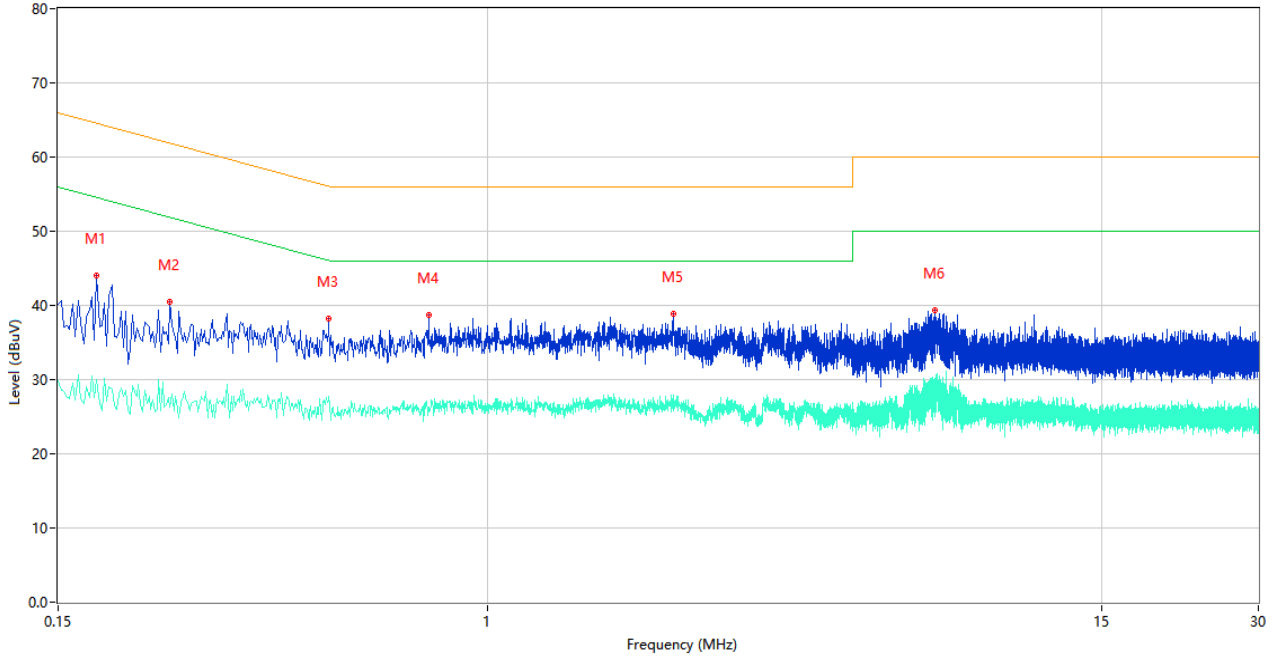

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.178	44.10	9.85	64.58	20.48	Peak	N	Pass
1**	0.178	30.03	9.85	54.58	24.55	AV	N	Pass
2	0.246	40.50	9.83	61.89	21.39	Peak	N	Pass
2**	0.246	26.28	9.83	51.89	25.61	AV	N	Pass
3	0.496	38.18	10.04	56.07	17.89	Peak	N	Pass
3**	0.496	27.74	10.04	46.07	18.33	AV	N	Pass
4	0.770	38.67	10.38	56.00	17.33	Peak	N	Pass
4**	0.770	26.29	10.38	46.00	19.71	AV	N	Pass
5	2.264	38.83	10.22	56.00	17.17	Peak	N	Pass
5**	2.264	26.08	10.22	46.00	19.92	AV	N	Pass
6	7.194	39.37	10.47	60.00	20.63	Peak	N	Pass
6**	7.194	28.01	10.47	50.00	21.99	AV	N	Pass

## A.8 Radiated Spurious Emission

Note<sup>1</sup>: The symbol of "--" in the table which means not application.

Note<sup>2</sup>: For the test data above 1 GHz, according the ANSI C63.10-2013, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Note<sup>3</sup>: The EUT is working in the Normal link mode below 1 GHz. All modes have been tested and DH5-Hopping mode is the worst.


Note<sup>4</sup>: Results (dBuV/m) = Original reading level of Spectrum Analyzer (dBuV/m) + Factor (dB)

The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.

### Test Data and Plots

#### 30 MHz to 1 GHz, ANT H


10m RE Test Case\_FCC Certification\_FCC 15C 30MHz-1GHz

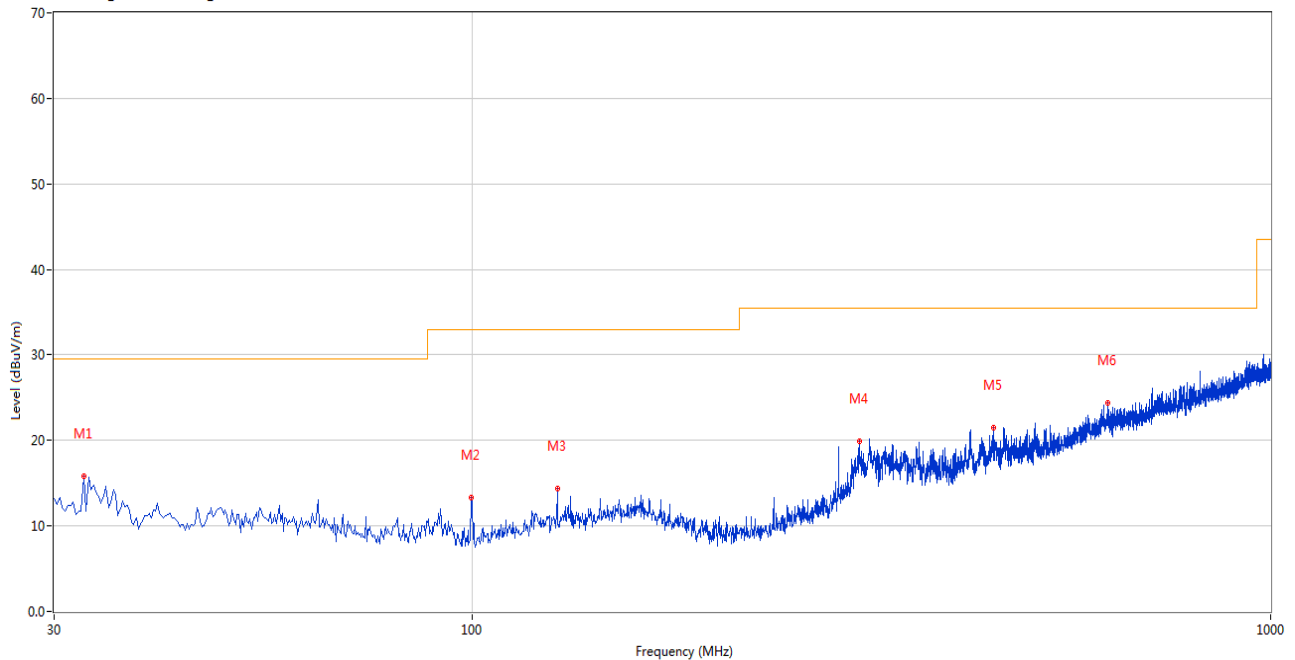

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	32.667	15.85	-26.98	29.5	13.65	Peak	0.00	200	Horizontal	Pass
2	99.823	13.26	-29.96	33.0	19.74	Peak	0.00	200	Horizontal	Pass
3	127.946	14.38	-27.47	33.0	18.62	Peak	247.00	100	Horizontal	Pass
4	305.411	19.93	-25.30	35.5	15.57	Peak	129.00	200	Horizontal	Pass
5	450.147	21.53	-21.18	35.5	13.97	Peak	58.00	200	Horizontal	Pass
6	625.674	24.39	-16.06	35.5	11.11	Peak	172.00	200	Horizontal	Pass

30 MHz to 1 GHz, ANT V

10m RE Test Case\_FCC Certification\_FCC 15C 30MHz-1GHz

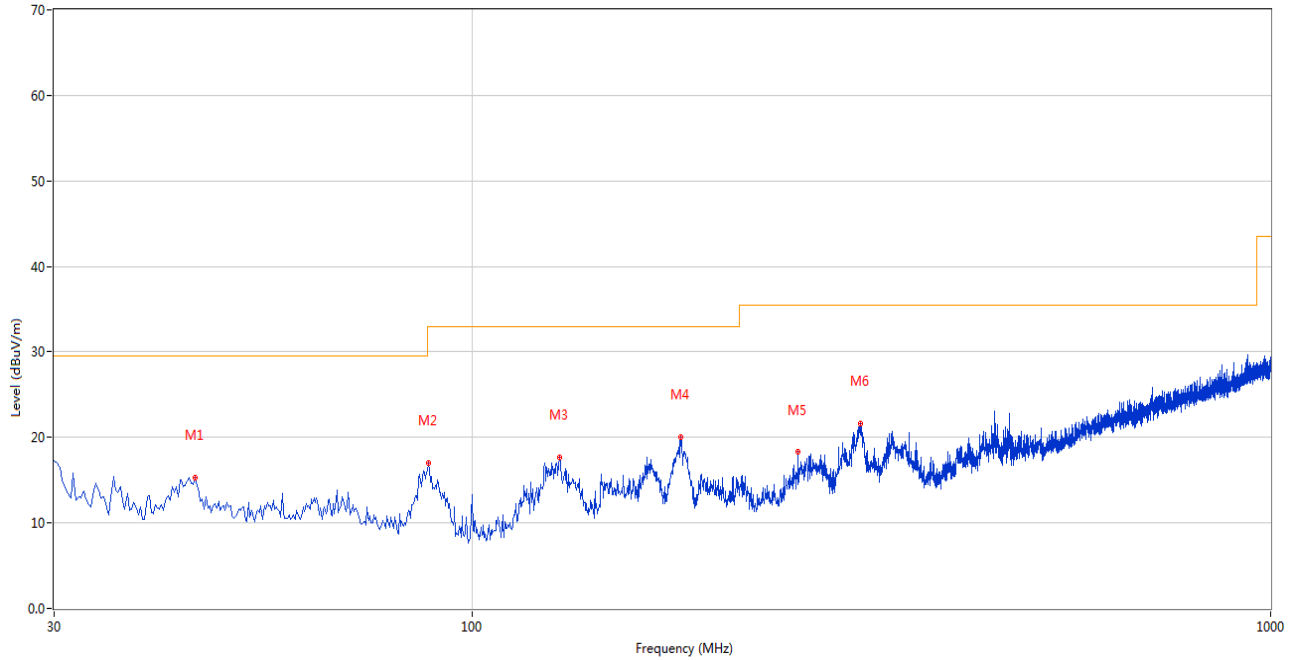

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	45.031	15.34	-26.77	29.5	14.16	Peak	215.00	100	Vertical	Pass
2	88.185	16.97	-30.53	33.0	16.03	Peak	285.00	100	Vertical	Pass
3	128.673	17.66	-27.49	33.0	15.34	Peak	231.00	100	Vertical	Pass
4	182.494	19.98	-27.81	33.0	13.02	Peak	237.00	100	Vertical	Pass
5	255.954	18.26	-27.12	35.5	17.24	Peak	177.00	100	Vertical	Pass
6	306.623	21.67	-25.22	35.5	13.83	Peak	237.00	100	Vertical	Pass

Note <sup>1</sup>: The marked spikes near 2400 MHz with circle should be ignored because they are Fundamental signal.

Note <sup>2</sup>: The spurious from 18GHz-25GHz is noise only, do not show on the report.

#### GFSK LOW CHANNEL 1 GHz to 18 GHz, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1335.840	40.15	74.0	33.85	Peak	220.00	300	Horizontal	Pass
1**	1335.840	30.09	54.0	23.91	AV	220.00	300	Horizontal	Pass
2	2978.249	49.18	74.0	24.82	Peak	156.00	100	Horizontal	Pass
2**	2978.249	38.54	54.0	15.46	AV	156.00	100	Horizontal	Pass
3	4917.368	48.05	74.0	25.95	Peak	341.00	200	Horizontal	Pass
3**	4917.368	42.23	54.0	11.77	AV	341.00	200	Horizontal	Pass
4	7630.823	54.29	74.0	19.71	Peak	138.00	100	Horizontal	Pass
4**	7630.823	41.20	54.0	12.80	AV	138.00	100	Horizontal	Pass
5	12475.657	54.21	74.0	19.79	Peak	278.00	100	Horizontal	Pass
5**	12475.657	42.02	54.0	11.98	AV	278.00	100	Horizontal	Pass
6	16861.310	56.96	74.0	17.04	Peak	339.00	200	Horizontal	Pass
6**	16861.310	46.97	54.0	7.03	AV	339.00	200	Horizontal	Pass

#### GFSK LOW CHANNEL 1 GHz to 18 GHz, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1465.626	44.94	74.0	29.06	Peak	90.00	400	Vertical	Pass
1**	1465.626	33.81	54.0	20.19	AV	90.00	400	Vertical	Pass
2	2994.044	52.25	74.0	21.75	Peak	278.00	400	Vertical	Pass
2**	2994.044	38.03	54.0	15.97	AV	278.00	400	Vertical	Pass
3	4818.838	48.60	74.0	25.40	Peak	202.00	200	Vertical	Pass
3**	4818.838	40.59	54.0	13.41	AV	202.00	200	Vertical	Pass
4	7971.122	51.10	74.0	22.90	Peak	280.00	200	Vertical	Pass
4**	7971.122	44.87	54.0	9.13	AV	280.00	200	Vertical	Pass
5	12443.102	50.89	74.0	23.11	Peak	71.00	100	Vertical	Pass
5**	12443.102	47.07	54.0	6.93	AV	71.00	100	Vertical	Pass
6	17452.559	56.64	74.0	17.36	Peak	318.00	400	Vertical	Pass
6**	17452.559	45.65	54.0	8.35	AV	318.00	400	Vertical	Pass

## GFSK MIDDLE CHANNEL 1 GHz to 18 GHz, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1333.683	43.13	74.0	30.87	Peak	137.00	300	Horizontal	Pass
1**	1333.683	34.92	54.0	19.08	AV	137.00	300	Horizontal	Pass
2	2976.143	52.15	74.0	21.85	Peak	186.00	100	Horizontal	Pass
2**	2976.143	40.81	54.0	13.19	AV	186.00	100	Horizontal	Pass
3	4913.626	49.15	74.0	24.85	Peak	348.00	200	Horizontal	Pass
3**	4913.626	43.29	54.0	10.71	AV	348.00	200	Horizontal	Pass
4	7624.660	53.00	74.0	21.00	Peak	178.00	200	Horizontal	Pass
4**	7624.660	42.41	54.0	11.59	AV	178.00	200	Horizontal	Pass
5	12477.538	53.86	74.0	20.14	Peak	161.00	200	Horizontal	Pass
5**	12477.538	44.93	54.0	9.07	AV	161.00	200	Horizontal	Pass
6	16861.503	58.21	74.0	15.79	Peak	74.00	200	Horizontal	Pass
6**	16861.503	45.58	54.0	8.42	AV	74.00	200	Horizontal	Pass

## GFSK MIDDLE CHANNEL 1 GHz to 18 GHz, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1464.393	40.92	74.0	33.08	Peak	356.00	200	Vertical	Pass
1**	1464.393	31.71	54.0	22.29	AV	356.00	200	Vertical	Pass
2	2988.765	47.70	74.0	26.30	Peak	350.00	400	Vertical	Pass
2**	2988.765	41.52	54.0	12.48	AV	350.00	400	Vertical	Pass
3	4822.215	46.70	74.0	27.30	Peak	216.00	200	Vertical	Pass
3**	4822.215	42.16	54.0	11.84	AV	216.00	200	Vertical	Pass
4	7963.417	56.09	74.0	17.91	Peak	27.00	400	Vertical	Pass
4**	7963.417	43.77	54.0	10.23	AV	27.00	400	Vertical	Pass
5	12447.637	51.51	74.0	22.49	Peak	355.00	400	Vertical	Pass
5**	12447.637	47.21	54.0	6.79	AV	355.00	400	Vertical	Pass
6	17451.971	57.82	74.0	16.18	Peak	142.00	400	Vertical	Pass
6**	17451.971	43.34	54.0	10.66	AV	142.00	400	Vertical	Pass

## GFSK HIGH CHANNEL 1 GHz to 18 GHz, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1335.295	42.90	74.0	31.10	Peak	352.00	200	Horizontal	Pass
1**	1335.295	30.42	54.0	23.58	AV	352.00	200	Horizontal	Pass
2	2976.105	49.27	74.0	24.73	Peak	97.00	100	Horizontal	Pass
2**	2976.105	40.14	54.0	13.86	AV	97.00	100	Horizontal	Pass
3	4916.988	51.24	74.0	22.76	Peak	283.00	200	Horizontal	Pass
3**	4916.988	41.41	54.0	12.59	AV	283.00	200	Horizontal	Pass
4	7630.901	50.65	74.0	23.35	Peak	287.00	100	Horizontal	Pass
4**	7630.901	44.99	54.0	9.01	AV	287.00	100	Horizontal	Pass
5	12473.450	51.68	74.0	22.32	Peak	244.00	100	Horizontal	Pass
5**	12473.450	42.52	54.0	11.48	AV	244.00	100	Horizontal	Pass
6	16862.818	54.69	74.0	19.31	Peak	280.00	400	Horizontal	Pass
6**	16862.818	46.85	54.0	7.15	AV	280.00	400	Horizontal	Pass

## GFSK HIGH CHANNEL 1 GHz to 18 GHz, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1461.230	43.16	74.0	30.84	Peak	260.00	300	Vertical	Pass
1**	1461.230	30.29	54.0	23.71	AV	260.00	300	Vertical	Pass
2	2994.047	49.54	74.0	24.46	Peak	332.00	400	Vertical	Pass
2**	2994.047	42.07	54.0	11.93	AV	332.00	400	Vertical	Pass
3	4824.206	50.06	74.0	23.94	Peak	53.00	200	Vertical	Pass
3**	4824.206	37.49	54.0	16.51	AV	53.00	200	Vertical	Pass
4	7969.740	53.17	74.0	20.83	Peak	245.00	400	Vertical	Pass
4**	7969.740	43.33	54.0	10.67	AV	245.00	400	Vertical	Pass
5	12446.496	55.46	74.0	18.54	Peak	304.00	200	Vertical	Pass
5**	12446.496	44.29	54.0	9.71	AV	304.00	200	Vertical	Pass
6	17454.731	52.65	74.0	21.35	Peak	50.00	300	Vertical	Pass
6**	17454.731	47.76	54.0	6.24	AV	50.00	300	Vertical	Pass

## 8-DPSK LOW CHANNEL 1 GHz to 18 GHz, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1286.274	40.23	74.0	33.77	Peak	259.00	300	Horizontal	Pass
1**	1286.274	34.45	54.0	19.55	AV	259.00	300	Horizontal	Pass
2	2768.376	50.10	74.0	23.90	Peak	70.00	200	Horizontal	Pass
2**	2768.376	43.82	54.0	10.18	AV	70.00	200	Horizontal	Pass
3	5166.309	50.85	74.0	23.15	Peak	315.00	200	Horizontal	Pass
3**	5166.309	42.27	54.0	11.73	AV	315.00	200	Horizontal	Pass
4	6806.459	57.23	74.0	16.77	Peak	301.00	300	Horizontal	Pass
4**	6806.459	48.43	54.0	5.57	AV	301.00	300	Horizontal	Pass
5	13468.531	56.73	74.0	17.27	Peak	196.00	200	Horizontal	Pass
5**	13468.531	46.03	54.0	7.97	AV	196.00	200	Horizontal	Pass
6	17463.102	58.59	74.0	15.41	Peak	190.00	300	Horizontal	Pass
6**	17463.102	44.54	54.0	9.46	AV	190.00	300	Horizontal	Pass

## 8-DPSK LOW CHANNEL 1 GHz to 18 GHz, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1284.447	46.07	74.0	27.93	Peak	14.00	300	Vertical	Pass
1**	1284.447	31.28	54.0	22.72	AV	14.00	300	Vertical	Pass
2	2773.845	56.15	74.0	17.85	Peak	246.00	100	Vertical	Pass
2**	2773.845	43.30	54.0	10.70	AV	246.00	100	Vertical	Pass
3	5166.869	53.86	74.0	20.14	Peak	209.00	200	Vertical	Pass
3**	5166.869	42.36	54.0	11.64	AV	209.00	200	Vertical	Pass
4	6802.912	53.27	74.0	20.73	Peak	9.00	400	Vertical	Pass
4**	6802.912	45.21	54.0	8.79	AV	9.00	400	Vertical	Pass
5	13471.532	52.61	74.0	21.39	Peak	269.00	100	Vertical	Pass
5**	13471.532	42.51	54.0	11.49	AV	269.00	100	Vertical	Pass
6	17460.670	59.79	74.0	14.21	Peak	274.00	200	Vertical	Pass
6**	17460.670	44.68	54.0	9.32	AV	274.00	200	Vertical	Pass

## 8-DPSK MIDDLE CHANNEL 1 GHz to 18 GHz, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1284.955	44.82	74.0	29.18	Peak	197.00	100	Horizontal	Pass
1**	1284.955	33.31	54.0	20.69	AV	197.00	100	Horizontal	Pass
2	2774.559	51.62	74.0	22.38	Peak	218.00	400	Horizontal	Pass
2**	2774.559	43.61	54.0	10.39	AV	218.00	400	Horizontal	Pass
3	5165.249	51.24	74.0	22.76	Peak	298.00	200	Horizontal	Pass
3**	5165.249	41.68	54.0	12.32	AV	298.00	200	Horizontal	Pass
4	6806.511	57.40	74.0	16.60	Peak	19.00	300	Horizontal	Pass
4**	6806.511	47.01	54.0	6.99	AV	19.00	300	Horizontal	Pass
5	13466.731	54.93	74.0	19.07	Peak	239.00	400	Horizontal	Pass
5**	13466.731	47.45	54.0	6.55	AV	239.00	400	Horizontal	Pass
6	17463.911	54.99	74.0	19.01	Peak	145.00	300	Horizontal	Pass
6**	17463.911	44.55	54.0	9.45	AV	145.00	300	Horizontal	Pass

## 8-DPSK MIDDLE CHANNEL 1 GHz to 18 GHz, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1280.742	45.86	74.0	28.14	Peak	117.00	300	Vertical	Pass
1**	1280.742	34.16	54.0	19.84	AV	117.00	300	Vertical	Pass
2	2774.532	51.08	74.0	22.92	Peak	264.00	100	Vertical	Pass
2**	2774.532	43.13	54.0	10.87	AV	264.00	100	Vertical	Pass
3	5161.072	56.26	74.0	17.74	Peak	158.00	200	Vertical	Pass
3**	5161.072	42.98	54.0	11.02	AV	158.00	200	Vertical	Pass
4	6803.062	55.33	74.0	18.67	Peak	101.00	300	Vertical	Pass
4**	6803.062	48.06	54.0	5.94	AV	101.00	300	Vertical	Pass
5	13468.548	54.40	74.0	19.60	Peak	1.00	400	Vertical	Pass
5**	13468.548	45.18	54.0	8.82	AV	1.00	400	Vertical	Pass
6	17467.311	61.35	74.0	12.65	Peak	288.00	300	Vertical	Pass
6**	17467.311	47.26	54.0	6.74	AV	288.00	300	Vertical	Pass



## 8-DPSK HIGH CHANNEL 1 GHz to 18 GHz, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1287.259	39.62	74.0	34.38	Peak	322.00	400	Horizontal	Pass
1**	1287.259	35.29	54.0	18.71	AV	322.00	400	Horizontal	Pass
2	2767.820	51.77	74.0	22.23	Peak	151.00	200	Horizontal	Pass
2**	2767.820	42.10	54.0	11.90	AV	151.00	200	Horizontal	Pass
3	5163.671	54.75	74.0	19.25	Peak	115.00	200	Horizontal	Pass
3**	5163.671	42.57	54.0	11.43	AV	115.00	200	Horizontal	Pass
4	6803.529	57.59	74.0	16.41	Peak	251.00	300	Horizontal	Pass
4**	6803.529	48.92	54.0	5.08	AV	251.00	300	Horizontal	Pass
5	13467.565	56.57	74.0	17.43	Peak	342.00	400	Horizontal	Pass
5**	13467.565	46.65	54.0	7.35	AV	342.00	400	Horizontal	Pass
6	17465.063	54.50	74.0	19.50	Peak	358.00	200	Horizontal	Pass
6**	17465.063	44.92	54.0	9.08	AV	358.00	200	Horizontal	Pass

## 8-DPSK HIGH CHANNEL 1 GHz to 18 GHz, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1279.812	46.01	74.0	27.99	Peak	262.00	300	Vertical	Pass
1**	1279.812	35.96	54.0	18.04	AV	262.00	300	Vertical	Pass
2	2767.323	54.74	74.0	19.26	Peak	129.00	300	Vertical	Pass
2**	2767.323	47.32	54.0	6.68	AV	129.00	300	Vertical	Pass
3	5163.865	52.94	74.0	21.06	Peak	14.00	200	Vertical	Pass
3**	5163.865	43.51	54.0	10.49	AV	14.00	200	Vertical	Pass
4	6806.321	53.05	74.0	20.95	Peak	158.00	100	Vertical	Pass
4**	6806.321	46.52	54.0	7.48	AV	158.00	100	Vertical	Pass
5	13465.394	50.46	74.0	23.54	Peak	204.00	400	Vertical	Pass
5**	13465.394	42.72	54.0	11.28	AV	204.00	400	Vertical	Pass
6	17466.033	58.04	74.0	15.96	Peak	14.00	200	Vertical	Pass
6**	17466.033	46.72	54.0	7.28	AV	14.00	200	Vertical	Pass

## A.9 Band Edge (Restricted-band band-edge)

Note <sup>1</sup>: The lowest and highest channels are tested to verify the band edge emissions. Please refer to the following the plots for emissions values.

Note <sup>2</sup>: The test data all are tested in the vertical and horizontal antenna which the trace is max hold. So these plots have shown the worst case.

Note <sup>3</sup>: According the ANSI C63.10-2013, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Note <sup>4</sup>: The Level (dBuV/m) has been corrected by factor.

### Test Data

#### GFSK LOW CHANNEL

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2362.467	55.62	74.0	18.38	Peak	246.00	200	Horizontal	Pass
1**	2362.467	44.54	54.0	9.46	AV	246.00	200	Horizontal	Pass
2	2390.000	55.53	74.0	18.47	Peak	170.00	100	Horizontal	Pass
2**	2390.000	47.72	54.0	6.28	AV	170.00	100	Horizontal	Pass

#### GFSK HIGH CHANNEL

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	58.16	74.0	15.84	Peak	5.00	100	Horizontal	Pass
1**	2483.500	47.56	54.0	6.44	AV	5.00	100	Horizontal	Pass
2	2485.014	57.99	74.0	16.01	Peak	125.00	100	Horizontal	Pass
2**	2485.014	46.4	54.0	7.60	AV	125.00	100	Horizontal	Pass

#### 8-DPSK LOW CHANNEL

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2362.284	57.84	74.0	16.16	Peak	296.00	100	Horizontal	Pass
1**	2362.284	44.35	54.0	9.65	AV	296.00	100	Horizontal	Pass
2	2390.000	56.45	74.0	17.55	Peak	2.00	300	Horizontal	Pass
2**	2390.000	48.92	54.0	5.08	AV	2.00	300	Horizontal	Pass

#### 8-DPSK HIGH CHANNEL

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	57.32	74.0	16.68	Peak	10.00	100	Horizontal	Pass
1**	2483.500	47.76	54.0	6.24	AV	10.00	100	Horizontal	Pass
2	2485.612	56.37	74.0	17.63	Peak	218.00	200	Horizontal	Pass
2**	2485.612	46.57	54.0	7.43	AV	218.00	200	Horizontal	Pass

## **ANNEX B TEST SETUP PHOTOS**

Please refer the document “BL-SZ2551267-AR-1.PDF”.

## **ANNEX C EUT EXTERNAL PHOTOS**

Please refer the document “BL-SZ2551267-AW.PDF”.

## **ANNEX D EUT INTERNAL PHOTOS**

Please refer the document “BL-SZ2551267-AI.PDF”.

## Statement

1. The laboratory guarantees the scientificity, accuracy and impartiality of the test, and is responsible for all the information in the report, except the information provided by the customer. The customer is responsible for the impact of the information provided on the validity of the results.
2. The report without China inspection body and laboratory Mandatory Approval (CMA) mark has no effect of proving to the society.
3. For the report with CNAS mark or A2LA mark, the items marked with "☆" are not within the accredited scope.
4. This report is invalid if it is altered, without the signature of the testing and approval personnel, or without the "inspection and testing dedicated stamp" or test report stamp.
5. The test data and results are only valid for the tested samples provided by the customer.
6. This report shall not be partially reproduced without the written permission of the laboratory.
7. Any objection shall be raised to the laboratory within 30 days after receiving the report.

--END OF REPORT--