

Page: 1 of 61

SAR TEST REPORT





The following samples were submitted and identified on behalf of the client as:

Product Name Notebook Computer

acer **Brand Name** Model No. N22C1

Acer Incorporated **Prepared for**

8F., No. 88, Sec. 1, Xintai 5th Rd., Xizhi, New Taipei City

22181, Taiwan (R.O.C)

Standards IEEE/ANSI C95.1-1992, IEEE 1528-2013

FCC ID HLZAX201NG **Date of Receipt** Nov. 04, 2021

Nov. 08, 2021 ~ Nov. 09, 2021 Date of Test(s)

Date of Issue Dec. 20, 2021

In the configuration tested, the EUT complied with the standards specified above.

Remarks:

This report details the results of the testing carried out on one sample, the results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS Taiwan Ltd. Central RF Lab or testing done by SGS Taiwan Ltd. Central RF Lab in connection with distribution or use of the product described in this report must be approved by SGS Taiwan Ltd. Central RF Lab in writing.

Signed on behalf of SGS

Clerk / Kimmy Chiou	PM / Afu Chen	Approved By / John Yeh
Kimmy Chiou	afor Chen	John Teh
		Date: Dec. 20, 2021

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Page: 2 of 61

Revision History

Revision	Description	Issue Date	Revised By	Remark
Rev.00	Initial creation of document	Dec. 20, 2021	Kimmy Chiou	
		Rev 00 Initial creation of	Rev 00 Initial creation of Dec. 20, 2021	Rev 00 Initial creation of Dec. 20, 2021 Kimmy

NI	~ +~	
ıvı	()	

1	The mark " *	" is the revi	ised version	of the re	enort due to	comments	submitted by	the certification.
1.	HILDHIAIK	13 1110 101	1364 76131011	01 1110 10	sport due to	COMMENTS	Submitted by	une ceruncauon.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號 f (886-2) 2298-0488



Page: 3 of 61

0. Guidance applied

The SAR testing method and procedure for this device is in accordance with the following standards:

IEEE/ANSI C95.1-1992

IEEE 1528-2013

KDB248227D01v02r02

KDB865664D01v01r04

KDB865664D02v01r02

KDB447498D01v06

KDB616217D04v01r02

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非只有铅明,此数华红用摄影测验之样只有含,同既此样只属风风风干。大规华工概太八司隶而连可,不可如以推测。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

S Taiwan Ltd. _I No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279 f (886-2) 2298-0488



Page: 4 of 61

Contents

0. Guidance applied	3
1. General Information	
1.1 Testing Laboratory	
1.2 Details of Applicant	
1.3 Description of EUT	
1.4 Test Environment	
1.5 Operation Description	
1.6 The SAR Measurement System	
1.7 System Components	
1.8 SAR System Verification	28
1.9 Tissue Simulant Fluid for the Frequency Band	
1.10 Evaluation Procedures	
1.11 Probe Calibration Procedures	
1.12 Test Standards and Limits	36
2. Summary of Results	
2.1 Decision rules	
2.2 Summary of Results	38
2.3 Reporting statements of conformity	
3. Simultaneous Transmission Analysis	
3.1 Estimated SAR calculation	
3.2 SPLSR evaluation and analysis	
4. Instruments List	
5. Measurements	
6. SAR System Performance Verification	
7. Uncertainty Budget	
Appendixes	
EN2021B0002 SAR_Appendix A Photographs EN2021B0002 SAR_Appendix B DAE & Probe Cal. Certificate	
FN2021B0002 SAR_Appendix C Phantom Description & Dipole Cal. Certificate	
FINZUZ I DUUUZ SAK ADDENOIX C POADIOM DESCRIDIION & DIDOIE CAL CERTITCATE	b1

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless ounerwise stated une results snown in this test report reter only to the sample(s) tested and such as ample(s) are retained for 90 days only. We #shaft #sh prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 www.sgs.com.tw



Page: 5 of 61

1. General Information

1.1 Testing Laboratory

SGS Taiwan Ltd. Central RF Lab						
1F,A No. 8, Alley 15, Lane 120, Sec. 1, NeiHu Road, Neihu District, Taipei City,						
11493, Taiwan.						
FCC Designation	TW0029					
Number	1770029					
Tel	+886-2-2299-3279					
Fax	+886-2-2298-0488					
Internet	http://www.tw.sgs.com/					

1.2 Details of Applicant

Company Name	Acer Incorporated
Company Address	8F., No. 88, Sec. 1, Xintai 5th Rd., Xizhi, New Taipei City 22181, Taiwan (R.O.C)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非见有论明,此都华结里倚影测述之缘是台香,同時件操是倚保留句子。木都华丰德木公司事而纯可,不可驾份推测。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

www.sqs.com.tw



Page: 6 of 61

1.3 Description of EUT

General Information of Host:

Equipment Under Test	General Information of Host:							
	Notebook Computer							
Brand Name		acer						
Model No.	N22C1							
Integrated Module	Brand Name: Intel							
	Model Name: AX201NGW							
FCC ID	HLZAX201NG							
Mode of Operation	⊠WLAN802.11 a/b/g/n/ac/ax(20M/40l ⊠Bluetooth	M/80M/	′160M)				
Duty Cycle	WLAN802.11 a/b/g/n/ac/ax(20M/40M/80/160M)	Refe	r to pa	ige 21				
,	Bluetooth	75.5%						
	WLAN802.11 b/g/n/ax(20M)	2412	_	2462				
	WLAN802.11 n/ax(40M)	2422	_	2452				
	WLAN802.11 a/n/ac/ax(20M) 5.2G	5180	_	5240				
	WLAN802.11 n/ac/ax(40M) 5.2G	5190	_	5230				
	WLAN802.11 ac/ax(80M) 5.2G 5210							
	WLAN802.11 ac/ax(160M) 5.2G		5250)				
TX Frequency Range (MHz)	WLAN802.11 a/n/ac/ax(20M) 5.3G	5260	_	5320				
,	WLAN802.11 n/ac/ax(40M) 5.3G	5270	_	5310				
	WLAN802.11 ac/ax(80M) 5.3G		5290)				
	WLAN802.11 a/n/ac/ax(20M) 5.6G	5500	_	5720				
	WLAN802.11 n/ac/ax(40M) 5.6G	5510	_	5710				
	WLAN802.11 ac/ax(80M) 5.6G	5530	_	5690				
	WLAN802.11 ac/ax(160M) 5.6G		5570					

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非只有铅明,此想生红用魔影测验之缘具色素,同时此缘只属是2000千。木梨生主领木八司事面纯可,不可如以海刺。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

an Ltd. _| No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

www.sqs.com.tw



Page: 7 of 61

	WLAN802.11 a/n/ac/ax(20M) 5.8G	5745	_	5825
TX Frequency Range (MHz)	WLAN802.11 n/ac/ax(40M) 5.8G	5755	_	5795
	WLAN802.11 ac/ax(80M) 5.8G		5775	
	Bluetooth	2402	_	2480
	WLAN802.11 b/g/n/ax(20M)	1	_	11
	WLAN802.11 n/ax(40M)	3	_	9
	WLAN802.11 a/n/ac/ax(20M) 5.2G	36	_	48
	WLAN802.11 n/ac/ax(40M) 5.2G	38	_	46
	WLAN802.11 ac/ax(80M) 5.2G		42	
	WLAN802.11 ac/ax(160M) 5.2G		50	
	WLAN802.11 a/n/ac/ax(20M) 5.3G	52	_	64
	WLAN802.11 n/ac/ax(40M) 5.3G	54	_	62
Channel Number (ARFCN)	WLAN802.11 ac/ax(80M) 5.3G		58	
(/ (((((((((((((((((((WLAN802.11 a/n/ac/ax(20M) 5.6G	100	_	144
	WLAN802.11 n/ac/ax(40M) 5.6G	102	_	142
	WLAN802.11 ac/ax(80M) 5.6G	106	_	138
	WLAN802.11 ac/ax(160M) 5.6G		114	
	WLAN802.11 a/n/ac/ax(20M) 5.8G	149	_	165
	WLAN802.11 n/ac/ax(40M) 5.8G	151		159
	WLAN802.11 ac/ax(80M) 5.8G		155	
	Bluetooth	0	_	78

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非只有铅明,此報生红用攝影測建立幾只有書,同時此幾旦萬風宛の干。大報生土極大公司書面對可,不可可以複劃。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

www.sgs.com.tw



Page: 8 of 61

Notebook mode

Max. SAR (1g) (Unit: W/Kg)								
Antenna	Band	Measured	Reported	Channel	Position			
	WLAN 802.11b	0.65	0.69	6	Bottom Surface			
	Bluetooth(GFSK)	0.05	0.07	0	Bottom Surface			
A . n. c	WLAN 802.11n(40M) 5.2G	0.67	0.72	46	Bottom Surface			
Aux WL	WLAN 802.11a 5.3G	0.83	0.91	60	Bottom Surface			
	WLAN 802.11ac(80M) 5.6G	0.86	0.92	138	Bottom Surface			
	WLAN 802.11n(40M) 5.8G	0.97	1.03	159	Bottom Surface			
	WLAN 802.11b	0.74	0.76	6	Bottom Surface			
	WLAN 802.11a 5.2G	1.02	1.12	44	Bottom Surface			
Main	WLAN 802.11n(40M) 5.3G	1.05	1.11	54	Bottom Surface			
	WLAN 802.11ac(80M) 5.6G	1.07	1.15	138	Bottom Surface			
	WLAN 802.11n(40M) 5.8G	1.10	1.18	151	Bottom Surface			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非早有论时,此報生结里僅對測試之樣是負責,同時世樣是僅是図の主。大報生主經太公司書面許可,不可與公詢制。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

台灣檢驗科技股份有限公司

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號



Page: 9 of 61

WLAN802.11 a/b/g/n/ax(20M/40M)/ac/ax(20M/40M/80M/160M) conducted power table:

Antenna	SI	SO	MIMO
Band	Main	Aux	Main + Aux
WLAN802.11b	V	V	-
WLAN802.11g	V	V	-
WLAN802.11n(20M)	V	V	V
WLAN802.11n(40M)	V	V	V
WLAN802.11ax(20M)	V	V	V
WLAN802.11ax(40M)	V	V	V
WLAN802.11a	V	V	-
WLAN802.11n(20M) 5G	V	V	V
WLAN802.11n(40M) 5G	V	V	V
WLAN802.11ac(20M) 5G	V	V	V
WLAN802.11ac(40M) 5G	V	V	V
WLAN802.11ac(80M) 5G	V	V	V
WLAN802.11ac(160M) 5G	V	V	V
WLAN802.11ax(20M) 5G	V	V	V
WLAN802.11ax(40M) 5G	V	V	V
WLAN802.11ax(80M) 5G	V	V	V
WLAN802.11ax(160M) 5G	V	V	V

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號 f (886-2) 2298-0488



Page: 10 of 61

Aux

	WLAN Aux							
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)		
		1	2412		19.50	19.43		
	802.11b	6	2437	1Mbps	21.00	20.85		
		11	2462		20.00	19.94		
		1	2412		17.00			
	802.11g	6	2437	6Mbps	21.00			
		11	2462		17.50			
		1	2412	MCS0	17.00			
	802.11n20-HT0	6	2437		20.50			
2450 MHz		11	2462		16.00			
Z43U IVIMZ		1	2412		17.50			
	802.11ax20-HE0	6	2437	MCS0	20.50	Not required		
		11	2462		16.00			
		3	2422		17.00			
	802.11n40-HT0	6	2437	MCS0	20.50			
		9	2452		16.00			
		3	2422		16.50			
	802.11ax40-HE0	6	2437	MCS0	16.50			
		9	2452		16.00	1		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非只有铅明,此報生红用攝影測建立幾只有書,同時此幾旦萬風宛の干。大報生土極大公司書面對可,不可可以複劃。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

S Taiwan Ltd.
No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號
於分有限公司
t (886-2) 2299-3279
f (886-2) 2298-0488
www.sgs.com.tw



Page: 11 of 61

		WLA	AN Aux			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		36	5180		18.50	
	802.11a	40	5200	6Mbps	21.00	
	002.11a	44	5220	Olvibps	21.00	
		48	5240		21.00	
		36	5180		18.50	
	802.11n20-HT0	40	5200	MCS0	21.00	
	002.111120-1110	44	5220	IVICSU	21.00	
		48	5240		21.00	Not required
		36	5180		18.00	Not required
	802.11ac20-VHT0	40	5200	MCS0	21.00	
	002.11ac20-VH10	44	5220	IVICSU	21.00	
		48	5240		21.00	
5.15-5.25 GHz		36	5180		18.00	-
3.13-3.23 GHZ	802.11ax20-HE0	40	5200	MCS0	21.00	
	002.11dX20-11E0	44	5220	IVICSU	21.00	
		48	5240		21.00	
	802.11n40-HT0	38	5190	MCS0	18.50	18.48
	002.111 14 0-H10	46	5230	IVICSU	21.00	20.91
	802.11ac40-VHT0	38	5190	MCS0	18.00	
	002.11ac40-V1110	46	5230	IVICSU	21.00]
	802.11ax40-HE0	38	5190	MCS0	18.00	
	002.11ax40-⊓⊑0	46	5230	IVICSU	21.00	Not required
	802.11ac80-VHT0	42	5210	MCS0	18.50	
	802.11ax80-HE0	42	5210	MCS0	18.50	
	802.11ac160-VHT0	50	5250	MCS0	15.00	
	802.11ax160-HE0	50	5250	MCS0	15.00	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非早有论时,此報生结里僅對測試之樣是負責,同時世樣是僅是図の主。大報生主經太公司書面許可,不可與公詢制。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

GS Taiwan Ltd. | No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號



Page: 12 of 61

		WLA	AN Aux			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		52	5260		21.00	20.91
	802.11a	56	5280	6Mbps	21.00	20.90
	002.11a	60	5300	GIVIDPS	21.00	20.92
		64	5320		17.50	17.46
		52	5260		21.00	
	802.11n20-HT0	D-HT0 56 5280 MCS0	MCSO	21.00		
	002.111120-1110	60	5300	IVICSU	21.00	1
		64	5320		17.50	
		52	5260		21.00	
	802.11ac20-VHT0	56	5280	MCS0	21.00	
	002.11ac20-V1110	60	5300	IVICSU	21.00	
5.25-5.35 GHz		64	5320		17.50	
5.25-5.55 GHZ		52	5260		21.00	1
	802.11ax20-HE0	56	5280	MCS0	21.00	Not required
	002.11ax20-HEU	60	5300	IVICSU	21.00	Not required
		64	5320		17.50	
	802.11n40-HT0	54	5270	MCS0	20.50	
	002.111140-1110	62	5310	IVICSU	16.50	
	802.11ac40-VHT0	54	5270	MCS0	20.50	
	002.11ac40-vn10	62	5310	IVICSU	16.50	
	900 11av40 HF0	54	5270	14000	20.50	
	802.11ax40-HE0	62	5310	MCS0	16.50	
	802.11ac80-VHT0	58	5290	MCS0	17.50	
	802.11ax80-HE0	58	5290	MCS0	17.50	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279



Page: 13 of 61

		WLA	AN Aux			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		100	5500		17.50	
		116	5580		21.00	
	802.11a	120	5600	6Mbps	21.00	
		140	5700		18.00	
		144	5720		20.50	
		100	5500		17.50	
		116	5580		21.00	1
	802.11n20-HT0	120	5600	MCS0	21.00	1
		140	5700	-	18.00	1
		144	5720		20.50	_
		100	5500		17.50	_
		116	5580		21.00	1
	802.11ac20-VHT0	120	5600	MCS0	21.00	1
		140	5700	_	17.50	
		144	5720		20.50	
		100	5500		17.50	1
		116	5580		21.00	Not required
	802.11ax20-HE0	120	5600	MCS0	21.00	
		140	5700		17.50	
		144	5720		20.50	
		102	5510		17.50	
5600 MHz		110	5550		20.50	_
	802.11n40-HT0	118	5590	MCS0	20.50	↓
		134	5670		19.00	
		142	5710		20.50	
		102	5510		17.50	
		110	5550		20.50	
	802.11ac40-VHT0	118	5590	MCS0	20.50	_
		134	5670		19.00	_
		142	5710		21.00	_
		102	5510		17.50	_
		110	5550		20.50	1
	802.11ax40-HE0	118	5590	MCS0	20.50	1
		134	5670		19.00	
		142	5710		21.00	
		106	5530		18.00	17.91
	802.11ac80-VHT0	122	5610	MCS0	20.50	20.47
		138	5690		21.00	20.93
		106	5530		18.00	Not required
	802.11ax80-HE0	122	5610	MCS0	19.50	
		138	5690		21.00	
	802.11ac160-VHT0	114	5570	MCS0	14.50	1
	802.11ax160-HE0	114	5570	MCS0	14.50	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號



Page: 14 of 61

		WLA	AN Aux			
Mode	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		149	5745		21.00	
	802.11a	157	5785	6Mbps	21.00	
		165	5825		21.00	
		149	5745		21.00	
	802.11n20-HT0	157	5785	MCS0	21.00	
		165	5825]	21.00	Not required
		149	5745		21.00	Not required
	802.11ac20-VHT0	157	5785	MCS0	21.00	
		165	5825]	21.00	
5800 MHz		149	5745		21.00] -
SOUU IVITZ	802.11ax20-HE0	157	5785	MCS0	21.00	
		165	5825]	21.00	
	802.11n40-HT0	151	5755	MCS0	21.00	20.88
	002.111140-1110	159	5795	IVICSU	21.00	20.93
	000 44 as 40 \ // ITO	151	5755	MCCO	21.00	
	802.11ac40-VHT0	159	5795	MCS0	21.00	Not required
	900 11av40 HE0	151	5755	MCS0	21.00	
	802.11ax40-HE0	159	5795	IVICSU	21.00	
	802.11ac80-VHT0	155	5775	MCS0	19.00	
	802.11ax80-HE0	155	5775	MCS0	19.00	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非早有论时,此報生结里僅對測試之樣是負責,同時世樣是僅是図の主。大報生主經太公司書面許可,不可與公詢制。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.



Page: 15 of 61

Main

		WL	AN Main			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		1	2412		19.50	19.45
	802.11b	6	2437	1Mbps	21.00	20.95
		11	2462		20.00	19.95
		1	2412		17.00	
	802.11g	6	2437	6Mbps	21.00	
		11	2462		17.50	
		1	2412		17.00	
	802.11n20-HT0	6	2437	MCS0	20.50	
2450 MHz		11	2462		16.00	
2430 IVIDZ		1	2412		17.00	
	802.11ax20-HE0	6	2437	MCS0	20.50	Not required
		11	2462		16.00	
		3	2422		17.50	
	802.11n40-HT0	6	2437	MCS0	20.50	1
		9	2452		16.00	
		3	2422		16.50	
	802.11ax40-HE0	6	2437	MCS0	16.50	
		9	2452	1	16.00	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號 f (886-2) 2298-0488



Page: 16 of 61

		WL	AN Main				
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)	
		36	5180		18.00	17.97	
	802.11a	40	5200	GMbps	20.00	19.91	
	002.11a	44	5220	- 6Mbps	20.00	19.95	
		48	5240		20.00	19.93	
		36	5180		18.50		
	802.11n20-HT0	40	5200	MCS0	20.00		
	002.11112U-H1U	44	5220	IVICSU	20.00		
		48	5240		19.50		
		36	5180		18.00		
	802.11ac20-VHT0	40	5200	MCS0	20.00		
	002.11ac20-VH10	44	5220	IVICSU	20.00		
		48	5240		20.00		
5.15-5.25 GHz		36	5180		18.00		
5.15-5.25 GHZ	802.11ax20-HE0	40	5200	MCS0	20.00		
	002.11ax20-⊓E0	44	5220	IVICSU	20.00		
		48	5240		20.00	Not required	
	802.11n40-HT0	38	5190	MCS0	18.00		
	802.11n40-H10	46	5230	IVICSU	19.50		
	802.11ac40-VHT0	38	5190	MCS0	18.00		
	602.11ac40-vn10	46	5230	IVICSU	19.50		
	802.11ax40-HE0	38	5190	MCS0	18.00	-	
	002.11ax40-⊓E0	46	5230	IVICSU	19.50		
	802.11ac80-VHT0	42	5210	MCS0	18.00		
	802.11ax80-HE0	42	5210	MCS0	18.00		
	802.11ac160-VHT0	50	5250	MCS0	15.00		
	802.11ax160-HE0	50	5250	MCS0	15.00		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非只有铅明,此報生红用攝影測建立幾只有書,同時此幾旦萬風宛の干。大報生土極大公司書面對可,不可可以複劃。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

S Taiwan Ltd. | No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號



Page: 17 of 61

		WL	AN Main			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		52	5260		19.50	
	802.11a	56	5280	6Mbps	19.50	
	002.11a	60	5300	olviops	19.50	
		64	5320		17.50	
		52	5260		19.50	
	802.11n20-HT0	56	5280	MCS0	19.50	
	002.11112U-H1U	60	5300	IVICSU	19.50	Not required
		64	5320		17.50	
		52	5260		19.50	
	802.11ac20-VHT0	56	5280	MCS0	19.50	
	002.11ac20-VH10	60	5300	IVICSU	19.50	
5.25-5.35 GHz		64	5320		17.50	1
5.25-5.35 GHZ		52	5260		19.50	
	802.11ax20-HE0	56	5280	MCS0	19.50	
	002.11ax20-ne0	60	5300	IVICSU	19.50	1
		64	5320		17.50	1
	802.11n40-HT0	54	5270	MCS0	19.50	19.44
	602.11N40-H10	62	5310	IVICSU	16.50	16.47
	802.11ac40-VHT0	54	5270	MCS0	19.50	
	002.11ac40-vr110	62	5310	IVICSU	16.50	Not required
	802.11ax40-HE0	54	5270	MCS0	19.50	
	002.118X40-DEU	62	5310	IVICSU	16.50	
	802.11ac80-VHT0	58	5290	MCS0	17.50	
	802.11ax80-HE0	58	5290	MCS0	17.50	1

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非早有论时,此報生结里僅對測試之樣是負責,同時世樣是僅是図の主。大報生主經太公司書面許可,不可與公詢制。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

iGS Taiwan Ltd. | No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

f (886-2) 2298-0488



Page: 18 of 61

		WL	AN Main			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		100	5500		17.50	
		116	5580		19.00	_
	802.11a	120	5600	6Mbps	19.00	
		140	5700		18.00	
		144	5720		19.00	
		100	5500		17.50	
		116	5580		19.00	
	802.11n20-HT0	120	5600	MCS0	19.00	
		140	5700	1	18.00	
		144	5720		19.00	
		100	5500	1	17.50	
		116	5580		19.00	
	802.11ac20-VHT0	120	5600	MCS0	19.00	
		140	5700	-	18.00	
		144	5720		19.00	
		100	5500		17.50	
	000 44 00 1150	116	5580	14000	19.00	.
	802.11ax20-HE0	120	5600	MCS0	19.00	Not required
		140	5700	- 1	18.00	
		144	5720		19.00	
5000 MI I-		102	5510	-	18.00	
5600 MHz	802.11n40-HT0	110 118	5550	MCS0	19.00 19.00	
	ου2.111140-Π10	134	5590	IVICSU		_
		142	5670 5710	-	19.00 19.00	_
		102				
		110	5510 5550	-	18.00 19.00	
	802.11ac40-VHT0	118	5590	MCS0	19.00	
	002.11ac40-V1110	134	5670	IVICSU	19.00	
		142	5710	1	19.00	
		102	5510		18.00	
		110	5550	1	19.00	
	802.11ax40-HE0	118	5590	MCS0	19.00	
	002.11dX+011E0	134	5670	1,1000	19.00	
		142	5710	1	19.00	
		106	5530	1	18.00	17.85
	802.11ac80-VHT0	122	5610	MCS0	19.00	18.97
		138	5690	1	19.00	18.87
		106 5530	17.50	10.07		
	802.11ax80-HE0	122	5610	MCS0	19.00	1
	3323/00 1120	138	5690	1	19.00	Not required
	802.11ac160-VHT0	114	5570	MCS0	15.00	1
	802.11ax160-HE0	114	5570	MCS0	14.50	1

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非只有的时,他都是结果都到这个样只有害,同时他接见薛星宛的手,就都是主领大人司事而统可,不可如以推制。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號



Page: 19 of 61

		WL	AN Main			
Mode	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		149	5745		20.00	
	802.11a	157	5785	6Mbps	20.00	
		165	5825		20.00	
		149	5745		20.00	
	802.11n20-HT0	157	5785	MCS0	20.00	
		165	5825		20.00	Not required
		149	5745		20.00	Not required
	802.11ac20-VHT0	157	5785	MCS0	20.00]
		165	5825		20.00	
5800 MHz		149	5745		20.00	-
3000 IVII IZ	802.11ax20-HE0	157	5785	MCS0	20.00	
		165	5825		20.00	
	802.11n40-HT0	151	5755	MCS0	20.00	19.88
	002.111140-1110	159	5795	IVICSU	20.00	19.99
	802.11ac40-VHT0	151	5755	MCS0	20.00	
	002.11ac40-VH10	159	5795	IVICSU	20.00	Not required
	802.11ax40-HE0	151	5755	MCS0	20.00	
	002.11aX40-NEU	159	5795	IVICSU	20.00	
	802.11ac80-VHT0	155	5775	MCS0	19.00	
	802.11ax80-HE0	155	5775	MCS0	19.00	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非早有论时,此報生结里僅對測試之樣是負責,同時世樣是僅是図の主。大報生主經太公司書面許可,不可與公詢制。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

台灣檢驗科技股份有限公司

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號



Page: 20 of 61

Bluetooth conducted power table:

	Biactoctii o	sidotootii oonaaotoa poiroi tabio:								
				1Mi	ops	2M	bps	3Mbps		
	Mode	Channel	Frequency (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power	
ſ		CH 00	2402		9.58		Not		Not	
۱	BR/EDR	CH 39	2441	10.00	9.51	9.00	required	9.00	required	
		CH 78	2480		9.29		required		required	

Mode	Channel	Frequency	GFSK			
Wode	Charmer	(MHz)	Max. Rated Avg.Power + Max. Tolerance (dBm)	Average Output Power (dBm)		
	CH 00	2402				
Bluetooth 5.0_1M	CH 19	2440	7	Not required		
	CH 39	2480				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非只有铅明,此報生红用攝影測建立幾只有書,同時此幾旦萬風宛の干。大報生土極大公司書面對可,不可可以複劃。


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


iGS Taiwan Ltd. | No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號


f (886-2) 2298-0488



Page: 21 of 61

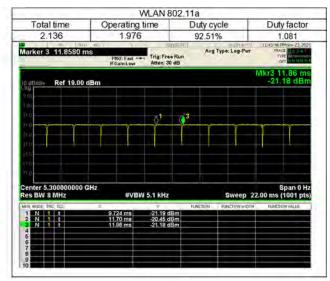

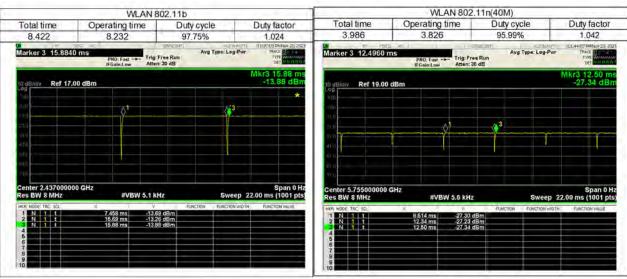

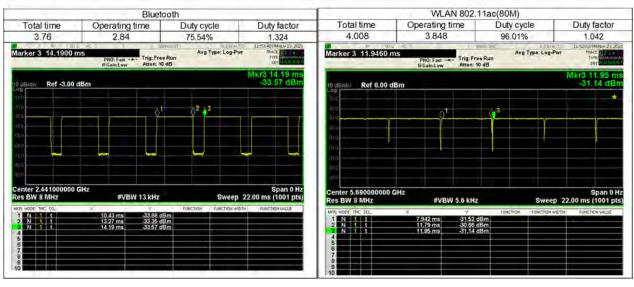

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號 f (886-2) 2298-0488



Page: 22 of 61

1.4 Test Environment

Ambient Temperature: 22±2° C Tissue Simulating Liquid: 22±2° C

1.5 Operation Description

Use chipset specific software to control the EUT, and makes it transmit in maximum power. Measurements are performed respectively on the lowest, middle and highest channels of the operating band(s). The EUT is set to maximum power level during all tests, and at the beginning of each test the battery is fully charged.

Laptop mode

Keyboard bottom position touch against the flat phantom.

Note:

802.11b DSSS SAR Test Requirements:

- SAR is measured for 2.4 GHz 802.11b DSSS mode using the highest measured maximum output power channel, when the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 2. When the reported SAR is > 0.8 W/kg, SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.

802.11g/n OFDM SAR Test Exclusion Requirements:

3. SAR is not required for 802.11g/n since the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

Initial Test Configuration:

4. An initial test configuration is determined for OFDM transmission modes according to the channel bandwidth, modulation and data rate combination(s) with the highest maximum output power specified for production units in each standalone and aggregated frequency band.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非见有论明,此都华结里倚影测述之缘是台香,同時件操是倚保留句子。木都华丰德木公司事而纯可,不可驾份推测。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

www.sgs.com.tw



Page: 23 of 61

- SAR is measured using the highest measured maximum output power channel. When the reported SAR of the initial test configuration is > 0.8 W/kg, SAR measurement is required for the subsequent next highest measured output power channel(s) in the initial test configuration until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.
- 6. Since the highest reported SAR for the initial test configuration is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for subsequent test configuration.
- 7. According to KDB447498 D01, testing of other required channels is not required when the reported 1-g SAR for the highest output channel is ≤ 0.8 W/kg, when the transmission band is ≤ 100 MHz.
- 8. According to KDB865664 D01, SAR measurement variability must be assessed for each frequency band. When the original highest measured SAR is ≥ 0.8 W/kg, repeated that measurement once. Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg (~10% from the 1-g SAR limit)



Page: 24 of 61

1.6 The SAR Measurement System

A block diagram of the SAR measurement System is given in Fig. a. This SAR Measurement System uses a Computer-controlled 3-D stepper motor system (SPEAG DASY 5 professional system). The model EX3DV4 field probe is used to determine the internal electric fields. The SAR can be obtained from the equation SAR= σ ($|Ei|^2$)/ ρ where σ and ρ are the conductivity and mass density of the tissue-simulant.

The DASY 5 system for performing compliance tests consists of the following items:

- 1. A standard high precision 6-axis robot (Staubli RX family) with controller, teach pendant and software. An arm extension is for accommodating the data acquisition electronics (DAE).
- 2. A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage intissue simulating liquid. The probe is equipped with an optical surface detector system.
- 3. A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.

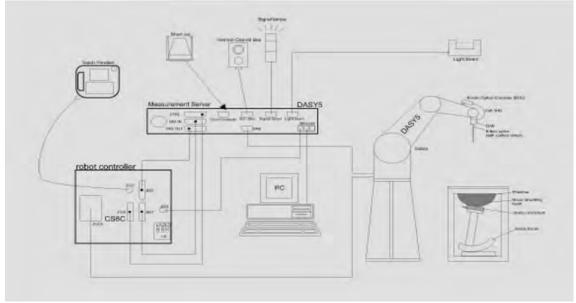


Fig. a The block diagram of SAR system

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

> t (886-2) 2299-3279 f (886-2) 2298-0488 www.sqs.com.tw



Page: 25 of 61

- 4. The Electro-optical converter (EOC) performs the conversion between optical and electrical of the signals for the digital communication to the DAE and for the analog signal from the optical surface detection. The EOC is connected to the measurement server.
- 5. The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- 6. A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
- 7. A computer operating Windows 7.
- 8. DASY 5 software.
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- 10. Tissue simulating liquid mixed according to the given recipes.
- 11. Validation dipole kits allowing to validate the proper functioning of the system.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非早有說明,此觀些廷里僅對理試之樣是負責,同時此樣是僅保留的子。太觀些去經太公司事而許可,不可類於複劃。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 $134 \,$ 號



Page: 26 of 61

1.7 System Components

EX3DV4 E-Field Probe

Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	1
Calibration	Basic Broad Band Calibration in air Conversion Factors (CF) for HSL 2450/5200/5300/5600/5800 MHz Additional CF for other liquids and frequencies upon request	
Frequency	10 MHz to > 6 GHz	
Directivity	± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to pro	bbe axis)
Dynamic	10 μW/g to > 100 mW/g	,
Range	Linearity: ± 0.2 dB (noise: typically < 1 μW/g)	
Dimensions	Tip diameter: 2.5 mm	
Application	High precision dosimetric measurements in any (e.g., very strong gradient fields). Only probe compliance testing for frequencies up to 6 GHz better 30%.	e which enables

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號 f (886-2) 2298-0488



Page: 27 of 61

PHANTOM

PHANTOW							
Model	ELI						
Construction	The ELI phantom is used for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI is fully compatible with the IEC 62209-2 standard and all known tissue simulating liquids. ELI has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is compatible with all SPEAG dosimetric probes and dipoles.						
Shell	2 ± 0.2 mm	/ 100					
Thickness							
Filling Volume	Approx. 30 liters						
Dimensions	Major axis: 600 mm						
	Minor axis: 400 mm						

DEVICE HOLDED

DEVICE HOLL	/LN	
Construction	The device holder (Supporter) for Notebook is made by POM (polyoxymethylene resin), which is non-metal and non-conductive. The height can be adjusted to fit varies kind of notebooks.	
		Device Holder

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號 f (886-2) 2298-0488



Page: 28 of 61

1.8 SAR System Verification

The microwave circuit arrangement for system verification is sketched in Fig. b. The daily system accuracy verification occurs within the flat section of the SAM phantom. A SAR measurement was performed to see if the measured SAR was within +/- 10% from the target SAR values. These tests were done at 2450/5200/5300/5600/5800 MHz. The tests were conducted on the same days as the measurement of the DUT. The obtained results from the system accuracy verification are displayed in the table 1 (SAR values are normalized to 1W forward power delivered to the dipole). During the tests, the liquid depth above the ear reference points was \geq 15 cm \pm 5 mm (frequency \leq 3 GHz) or \geq 10 cm \pm 5 mm (frequency > 3 G Hz) in all the cases. It is seen that the system is operating within its specification, as the results are within acceptable tolerance of the reference values.

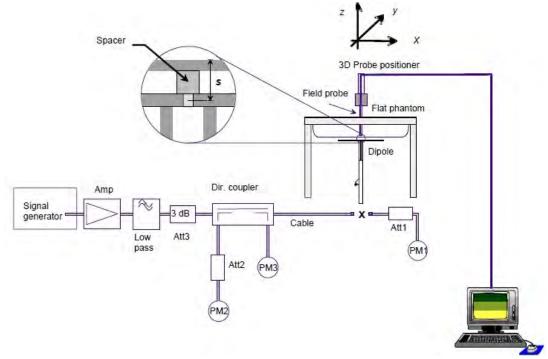


Fig. b The block diagram of system verification

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號



Page: 29 of 61

Validation Kit	S/N	Frequency (MHz)		1W Target SAR-1g (mW/g)	pin=250mW Measured SAR-1g (mW/g)	Measured SAR-1g normalized to 1W (mW/g)	Deviation (%)	Measured Date
D2450V2	727	2450 Head		53.9	13.40	53.6	-0.56%	Nov. 08, 2021
Validation Kit	S/N	Frequency (MHz)		1W Target SAR-1g (mW/g)	Pin=100mW Measured SAR-1g (mW/g)	Measured SAR-1g normalized to 1W (mW/g)	Deviation (%)	Measured Date
		5200	Head	77.9	7.71	77.1	-1.03%	Nov. 08, 2021
D5GHzV2	1023	5300	Head	80.4	8.02	80.2	-0.25%	Nov. 09, 2021
DOGHZVZ		5600	Head	83.9	8.41	84.1	0.24%	Nov. 09, 2021
		5800	Head	80.9	8.04	80.4	-0.62%	Nov. 09, 2021

Table 1. Results of system validation

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279



Page: 30 of 61

1.9 Tissue Simulant Fluid for the Frequency Band

The dielectric properties for this Head-simulant fluid were measured by using the SPEAG Dielectric Assessment Kit (DAKS-3.5)

All dielectric parameters of tissue simulates were measured within 24 hours of SAR measurements. The measured conductivity and permittivity are all within \pm 5% of the target values.

The depth of the tissue simulant in the flat section of the phantom was ≥ 15 cm ± 5 mm (Frequency $\leq 3G$) or ≥ 10 cm ± 5 mm (Frequency $\geq 3G$) during all tests. (Fig. 2)

Tissue Type	Measurement Date	Measured Frequency (MHz)	Target Dielectric Constant, εr	Target Conductivity, σ (S/m)	Measured Dielectric Constant, εr	Measured Conductivity, σ (S/m)	% dev εr	% dev σ
		2402	39.285	1.757	37.944	1.723	-3.41%	-1.95%
		2412	39.268	1.766	37.906	1.732	-3.47%	-1.94%
		2437	39.223	1.788	37.842	1.754	-3.52%	-1.93%
		2441	39.216	1.792	37.838	1.758	-3.51%	-1.90%
		2450	39.200	1.800	37.821	1.766	-3.52%	-1.89%
		2462	39.185	1.813	37.802	1.778	-3.53%	-1.94%
	Nov. 08, 2021	2480	39.162	1.833	37.768	1.796	-3.56%	-2.00%
		5180	36.009	4.635	36.142	4.597	0.37%	-0.81%
		5190	35.997	4.645	36.121	4.607	0.34%	-0.81%
		5200	35.986	4.655	36.117	4.617	0.36%	-0.82%
		5220	35.963	4.676	36.109	4.641	0.41%	-0.74%
Head		5230	35.951	4.686	36.095	4.651	0.40%	-0.74%
rieau		5240	35.940	4.696	36.071	4.666	0.36%	-0.64%
	Nov. 09, 2021	5260	35.917	4.717	36.024	4.687	0.30%	-0.63%
		5270	35.906	4.727	35.997	4.702	0.25%	-0.52%
		5300	35.871	4.758	35.954	4.737	0.23%	-0.43%
		5310	35.860	4.768	35.927	4.751	0.19%	-0.35%
		5530	35.609	4.993	35.688	5.013	0.22%	0.40%
		5600	35.529	5.065	35.546	5.084	0.05%	0.38%
		5610	35.517	5.075	35.528	5.099	0.03%	0.47%
		5690	35.426	5.157	35.341	5.199	-0.24%	0.81%
		5755	35.351	5.224	35.165	5.272	-0.53%	0.92%
		5795	35.306	5.265	35.081	5.315	-0.64%	0.95%
		5800	35.300	5.270	35.062	5.322	-0.67%	0.99%

Table 2. Dielectric Parameters of Tissue Simulant Fluid

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非只有铅明,此数华红用摄影测过之样只有含,同时叶梯只展展现的元子。大数华土模太从司隶而连订,不可如以推制。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

台灣檢驗科技股份有限公司

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號



Page: 31 of 61

The composition of the tissue simulating liquid:

				Ingi	edient	<u> </u>		
Frequency (MHz)	Mode	DGMBE	Water	Salt	Preventol	Cellulose	Sugar	Total amount
2450M	Head	550ml	450ml	_	_	_	_	1.0L(Kg)

Body Simulating Liquids for 5 GHz, Manufactured by SPEAG:

Ingredients	Water	Esters, Emulsifiers, Inhibitors	Sodium and Salt
(% by weight)	60-80	20-40	0-1.5

Table 3. Recipes for Tissue Simulating Liquid

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號 f (886-2) 2298-0488



Page: 32 of 61

1.10 Evaluation Procedures

The entire evaluation of the spatial peak values is performed within the Post-processing engine (SEMCAD). The system always gives the maximum values for the 1 g and 10 g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- 1. The extraction of the measured data (grid and values) from the Zoom Scan.
- 2. The calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- 3. The generation of a high-resolution mesh within the measured volume
- 4. The interpolation of all measured values from the measurement grid to the high-resolution grid
- 5. The extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- 6. The calculation of the averaged SAR within masses of 1g and 10g.

The probe is calibrated at the center of the dipole sensors that is located 1 to 2.7mm away from the probe tip. During measurements, the probe stops shortly above the phantom surface, depending on the probe and the surface detecting system. Both distances are included as parameters in the probe configuration file. The software always knows exactly how far away the measured point is from the surface. As the probe cannot directly measure at the surface, the values between the deepest measured point and the surface must be extrapolated. The angle between the probe axis and the surface normal line is less than 30 degree.

In the Area Scan, the gradient of the interpolation function is evaluated to find all the extreme of the SAR distribution. The uncertainty on the locations of the extreme is less than 1/20 of the grid size. Only local maximum within –2 dB of the global maximum are searched and passed for the Cube Scan measurement. In the Cube Scan, the interpolation function is used to extrapolate the Peak SAR from the lowest measurement points to the inner phantom surface (the extrapolation distance). The uncertainty increases with the extrapolation distance. To keep the uncertainty within 1% for the 1 g and 10 g cubes, the extrapolation distance should not be larger than 5mm.

The maximum search is automatically performed after each area scan measurement. It is based on splines in two or three dimensions. The procedure can find the maximum for most SAR distributions even with relatively large grid spacing. After the area scanning measurement, the probe is automatically moved to a position at the interpolated maximum. The following scan can directly use this position for reference, e.g., for a finer resolution grid or the cube evaluations. The 1g and 10g peak evaluations are only available for the predefined cube 7x7x7 scans. The routines are verified and optimized for the grid dimensions used in these cube measurements.

The measured volume of 30x30x30mm contains about 30g of tissue.

The first procedure is an extrapolation (incl. Boundary correction) to get the points between the lowest measured plane and the surface. The next step uses 3D

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非见有论明,此都华结里倚影测述之缘是台香,同時件操是倚保留句子。木都华丰德木公司事而纯可,不可驾份推测。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司 t

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 $134 \,$ 號



Page: 33 of 61

interpolation to get all points within the measured volume. In the last step, a 1g cube is placed numerically into the volume and its averaged SAR is calculated. This cube is the moved around until the highest averaged SAR is found. If the highest SAR is found at the edge of the measured volume, the system will issue a warning: higher SAR values might be found outside of the measured volume. In that case the cube measurement can be repeated, using the new interpolated maximum as the center.

1.11 Probe Calibration Procedures

For the calibration of E-field probes in lossy liquids, an electric field with an accurately known field strength must be produced within the measured liquid. For standardization purposes it would be desirable if all measurements which are necessary to assess the correct field strength would be traceable to standardized measurement procedures. In the following two different calibration techniques are summarized:

1.11.1 Transfer Calibration with Temperature Probes

In lossy liquids the specific absorption rate (SAR) is related both to the electric field (E) and the temperature gradient ($\delta T/\delta t$) in the liquid.

$$SAR = C \frac{\delta T}{\delta t}$$
,

whereby σ is the conductivity, ρ the density and c the heat capacity of the liquid.

Hence, the electric field in lossy liquid can be measured indirectly by measuring the temperature gradient in the liquid. Non-disturbing temperature probes (optical probes or thermistor probes with resistive lines) with high spatial resolution (<1-2 mm) and fast reaction time (<1 s) are available and can be easily calibrated with high precision [1]. The setup and the exciting source have no influence on the calibration; only the relative positioning uncertainties of the standard temperature probe and the E-field probe to be calibrated must be considered. However, several problems limit the available accuracy of probe calibrations with temperature probes:

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非早有铅明,件報生结里做新聞过入樣具負責,同時件樣具做保留的干。大報生主概未公司書面許可,不可部份複劃。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

JOJ Idiwan Eta.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 $134 \,$ 號



Page: 34 of 61

• The temperature gradient is not directly measurable but must be evaluated from temperature measurements at different time steps. Special precaution is necessary to avoid measurement errors caused by temperature gradients due to energy equalizing effects or convection currents in the liquid. Such effects cannot be completely avoided, as the measured field itself destroys the thermal equilibrium in the liquid. With a careful setup these errors can be kept small.

- The measured volume around the temperature probe is not well defined. It is difficult to calculate the energy transfer from a surrounding gradient temperature field into the probe. These effects must be considered, since temperature probes are calibrated in liquid with homogeneous temperatures. There is no traceable standard for temperature rise measurements.
- The calibration depends on the assessment of the specific density, the heat capacity and the conductivity of the medium. While the specific density and heat capacity can be measured accurately with standardized procedures (~ 2% for c; much better for ρ), there is no standard for the measurement of the conductivity. Depending on the method and liquid, the error can well exceed ±5%.
- Temperature rise measurements are not very sensitive and therefore are often performed at a higher power level than the E-field measurements. The nonlinearities in the system (e.g., power measurements, different components, etc.) must be considered.

Considering these problems, the possible accuracy of the calibration of E-field probes with temperature gradient measurements in a carefully designed setup is about $\pm 10\%$ (RSS) [2]. Recently, a setup which is a combination of the waveguide techniques and the thermal measurements was presented in [3]. The estimated uncertainty of the setup is $\pm 5\%$ (RSS) when the same liquid is used for the calibration and for actual measurements and ± 7 -9% (RSS) when not, which is in good agreement with the estimates given in [2].

1.11.2 Calibration with Analytical Fields

In this method a technical setup is used in which the field can be calculated analytically from measurements of other physical magnitudes (e.g., input power). This corresponds to the standard field method for probe calibration in air; however, there is no standard defined for fields in lossy liquids. When using calculated fields in lossy liquids for probe calibration, several points must be considered in the assessment of the uncertainty:

- The setup must enable accurate determination of the incident power.
- The accuracy of the calculated field strength will depend on the assessment of the dielectric parameters of the liquid.
- Due to the small wavelength in liquids with high permittivity, even small

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非早有铅明,件報生结里做新聞过入樣具負責,同時件樣具做保留的干。大報生主概未公司書面許可,不可部份複劃。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司 t (886

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號



Page: 35 of 61

setups might be above the resonant cutoff frequencies. The field distribution in the setup must be carefully checked for conformity with the theoretical field distribution.

References

- 1. N. Kuster, Q. Balzano, and J.C. Lin, Eds., Mobile Communications Safety, Chapman & Hall, London, 1997.
- K. Meier, M. Burkhardt, T. Schmid, and N. Kuster, \Broadband 2. calibration of E-field probes in lossy media", IEEE Transactions on Microwave Theory and Techniques, vol. 44, no. 10, pp. 1954{1962,
- K. Jokela, P. Hyysalo, and L. Puranen, \Calibration of specific 3. absorption rate (SAR) probes in waveguide at 900 MHz", IEEE Transactions on Instrumentation and Measurements, vol. 47, no. 2, pp. 432{438, Apr. 1998.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

t (886-2) 2299-3279



Page: 36 of 61

1.12 Test Standards and Limits

According to FCC 47CFR §2.1093(d) The limits to be used for evaluation are based generally on criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate ("SAR") in Section 4.2 of "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz," ANSI/IEEE C95.1, By the Institute of Electrical and Electronics Engineers, Inc., New York, New York 10017. These criteria for SAR evaluation are similar to those recommended by the National Council on Radiation Protection and Measurements (NCRP) in "Biological Effects and Exposure Criteria for Radio frequency Electromagnetic Fields," NCRP Report No. 86, Section 17.4.5. Copyright NCRP, 1986, Bethesda, Maryland 20814. SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards. The criteria to be used are specified in paragraphs (d)(1) and (d)(2) of this section and shall apply for portable devices transmitting in the frequency range from 100 kHz to 6 GHz. Portable devices that transmit at frequencies above 6 GHz are to be evaluated in terms of the MPE limits specified in § 1.1310 of this chapter. Measurements and calculations to demonstrate compliance with MPE field strength or power density limits for devices operating above 6 GHz should be made at a minimum distance of 5 cm from the radiating source.

- Limits for Occupational/Controlled exposure: 0.4 W/kg as averaged over the whole-body and spatial peak SAR not exceeding 8 W/kg as averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube). Exceptions are the hands, wrists, feet and ankles where the spatial peak SAR shall not exceed 20 W/kg, as averaged over an 10 grams of tissue (defined as a tissue volume in the shape of a cube).
- Occupational/Controlled limits apply when persons are exposed as a (2)consequence of their employment provided these persons are fully aware of and exercise control over their exposure. Awareness of exposure can be accomplished by use of warning labels or by specific training or education through appropriate means, such as an RF safety program in a work environment.
- Limits for General Population/Uncontrolled exposure: 0.08 W/kg as averaged over the whole-body and spatial peak SAR not exceeding 1.6 W/kg as averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube). Exceptions are the hands, wrists, feet and ankles where the spatial peak SAR shall not exceed 4 W/kg, as averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube). General Population/Uncontrolled limits apply when the general public may be exposed, or when persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or do not

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 37 of 61

exercise control over their exposure. Warning labels placed on consumer devices such as cellular telephones will not be sufficient reason to allow these devices to be evaluated subject to limits for occupational/controlled exposure in paragraph (d)(1) of this section. (Table 4.)

Human Exposure	Uncontrolled Environment General Population	Controlled Environment Occupational
Spatial Peak SAR (Brain)	1.60 W/kg	8.00 W/kg
Spatial Average SAR (Whole Body)	0.08 W/kg	0.40 W/kg
Spatial Peak SAR (Hands/Feet/Ankle/Wrist)	4.00 W/kg	20.00 W/kg

Table 4. RF exposure limits

Notes:

- 1. Uncontrolled environments are defined as locations where there is potential exposure of individuals who have no knowledge or control of their potential exposure.
- 2. Controlled environments are defined as locations where there is potential exposure of individuals who have knowledge of their potential exposure and can exercise control over their exposure.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 38 of 61

2. Summary of Results

2.1 Decision rules

Reported measurement data comply with IEEE 1528-2013:

Determining compliance shall be based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.2 Summary of Results

Notebook mode

Antenna	Mode	Position	Distance	СН	Freq.	Max. Rated Avg.	Measured Avg. Power (dBm)	Duty cycle scaling	Power scaling	Averaged SAR over 1g (W/kg)		Plot page
7111011110		7 00.001	(mm)	· · ·	(MHz)	Tolerance (dBm)				Measured	Reported	i lot page
		Bottom Surface	0	1	2412	19.50	19.43	1.024	101.62%	0.444	0.462	-
	WLAN 802.11b	Bottom Surface	0	6	2437	21.00	20.85	1.024	103.51%	0.650	0.689	43
		Bottom Surface	0	11	2462	20.00	19.94	1.024	101.39%	0.467	0.485	-
	Bluetooth(GFSK)	Bottom Surface	0	0	2402	10.00	9.58	1.324	110.15%	0.050	0.073	44
	WLAN 802.11n (40M) 5.2G	Bottom Surface	0	46	5230	21.00	20.91	1.042	102.09%	0.673	0.716	45
	WLAN 802.11a 5.3G	Bottom Surface	0	52	5260	21.00	20.91	1.081	102.09%	0.717	0.791	-
	WLAN 802.11a 5.3G	Bottom Surface	0	60	5300	21.00	20.92	1.081	101.86%	0.828	0.912	46
Aux	Repeated	Bottom Surface*	0	60	5300	21.00	20.92	1.081	101.86%	0.817	0.900	-
		Bottom Surface	0	106	5530	18.00	17.91	1.024	102.09%	0.445	0.465	-
	WLAN 802.11ac (80M) 5.6G	Bottom Surface	0	122	5610	20.50	20.47	1.042	100.69%	0.777	0.815	-
		Bottom Surface	0	138	5690	21.00	20.93	1.042	101.62%	0.864	0.915	47
	Repeated	Bottom Surface*	0	138	5690	21.00	20.93	1.042	101.62%	0.859	0.910	-
	WLAN 802.11n (40M) 5.8G	Bottom Surface	0	151	5755	21.00	20.88	1.042	102.80%	0.917	0.982	-
		Bottom Surface	0	159	5795	21.00	20.93	1.042	101.62%	0.974	1.031	48
	Repeated	Bottom Surface*	0	159	5795	21.00	20.93	1.042	101.62%	0.962	1.019	-
	WLAN 802.11b	Bottom Surface	0	1	2412	19.50	19.45	1.024	101.16%	0.473	0.490	-
		Bottom Surface	0	6	2437	21.00	20.95	1.024	101.16%	0.736	0.762	49
		Bottom Surface	0	11	2462	20.00	19.95	1.024	101.16%	0.562	0.582	-
		Bottom Surface	0	36	5180	18.00	17.97	1.081	100.69%	0.877	0.955	-
	WLAN 802.11a 5.2G	Bottom Surface	0	40	5200	20.00	19.91	1.081	102.09%	0.947	1.045	-
	WLAN 602.11a 5.2G	Bottom Surface	0	44	5220	20.00	19.95	1.081	101.16%	1.020	1.115	50
		Bottom Surface	0	48	5240	20.00	19.93	1.081	101.62%	0.983	1.080	-
	Repeated	Bottom Surface*	0	44	5220	20.00	19.95	1.081	101.16%	0.998	1.091	-
Main	WLAN 802.11n(40M) 5.3G	Bottom Surface	0	54	5270	19.50	19.44	1.042	101.39%	1.050	1.109	51
IVIAIII	WEAT 002.1111(40W) 5.50	Bottom Surface	0	62	5310	16.50	16.47	1.042	100.69%	0.639	0.670	-
	Repeated	Bottom Surface*	0	54	5270	19.50	19.44	1.042	101.39%	1.010	1.067	-
		Bottom Surface	0	106	5530	18.00	17.85	1.042	103.51%	0.702	0.757	-
	WLAN 802.11ac(80M) 5.6G	Bottom Surface	0	122	5610	19.00	18.97	1.042	100.69%	1.020	1.070	-
		Bottom Surface	0	138	5690	19.00	18.87	1.042	103.04%	1.070	1.149	52
	Repeated	Bottom Surface*	0	138	5690	19.00	18.87	1.042	103.04%	1.040	1.117	-
	WLAN 802.11n(40M) 5.8G	Bottom Surface	0	151	5755	20.00	19.88	1.042	102.80%	1.100	1.178	53
	WEAT 002.1 TH(40M) 5.00	Bottom Surface	0	159	5795	20.00	19.99	1.042	100.23%	1.010	1.055	-
	Repeated	Bottom Surface*	0	151	5755	20.00	19.88	1.042	102.80%	1.060	1.135	-

^{* -} repeated at the highest SAR measurement according to the KDB 865664 D01

Note:

Scaling = $\frac{\text{reported SAR}}{\text{measured SAR}} = \frac{P2(mW)}{P1(mW)} = 10^{\left(\frac{P2-P1}{10}\right)(dBm)}$

Reported SAR = measured SAR * (scaling)

Where P2 is maximum specified power, P1 is measured conducted power

2.3 Reporting statements of conformity

The conformity statement in this report is based solely on the test results, measurement uncertainty is excluded.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations up and the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 39 of 61

3. Simultaneous Transmission Analysis

Simultaneous Transmission Scenarios:

Simultaneous Transmit Configurations	Body
2.4GHz WLAN MIMO	Yes
5GHz WLAN MIMO	Yes
BT + 2.4GHz WLAN Main	Yes
BT + 5GHz WLAN MIMO	Yes

Note:

- 1. Bluetooth and WLAN Aux share the same antenna path, and BT can transmit with WLAN Main simultaneously.
- 2. For 2.4/5GHz WLAN Main and Aux antennas, the maximum output power of each antenna during simultaneous transmission is the same with (or less than) that used in standalone transmission, and we used the sum of 1-g SAR provision in KDB447498D01 to exclude the simultaneous transmitted SAR measurement.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非只有铅明,此報生结用攝影測建立幾只有著,同時世操具攝風內內干。大報生主概太八司書面對可,不可可以複劃。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 40 of 61

3.1 Estimated SAR calculation

According to KDB447498 D01v06 – When standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

Estimated SAR =
$$\frac{\text{Max. tune up power (mW)}}{\text{Min. test separation distance(mm)}} \times \frac{\sqrt{\text{f(GHz)}}}{7.5}$$

If the minimum test separation distance is < 5mm, a distance of 5mm is used for estimated SAR calculation. When the test separation distance is >50mm, the 0.4W/kg is used for SAR-1g.

3.2 SPLSR evaluation and analysis

Per KDB447498D01, when the sum of SAR is larger than the limit, SAR test exclusion is determined by the SAR sum to peak location separation ratio(SPLSR).

The simultaneous transmitting antennas in each operating mode and exposure condition combination must be considered one pair at a time to determine the SAR to peak location separation ratio to qualify for test exclusion.

The ratio is determined by (SAR1 + SAR2)^1.5/Ri, rounded to two decimal digits, and must be ≤ 0.04 for all antenna pairs in the configuration to qualify for 1-g SAR test exclusion.

SAR1 and SAR2 are the highest reported or estimated SAR for each antenna in the pair, and Ri is the separation distance between the peak SAR locations for the antenna pair in mm.

When standalone test exclusion applies, SAR is estimated; the peak location is assumed to be at the feed-point or geometric center of the antenna.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非早有說明,此觀些廷里僅對理試之樣是負責,同時此樣是僅保留的子。太觀些去經太公司事而許可,不可類於複劃。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司



Page: 41 of 61

The simultaneous Transmission conditions (Notebook mode)

		ne simulaneo	20 11411011110010	ii) oilioiliaitio (i i	Otobook mode	,				
_	1	2	3	4	5	Scenario 1	Scenario 2	Scenario 3	Scenario 4	
Exposure position 1g(W/kg)	WLAN 2.4GHz Main	WLAN 2.4GHz Aux	WLAN 5GHz Main	WLAN 5GHz Aux	BT (Aux)	1+5 Sum	1+2 Sum	3+4 Sum	3+4+5 Sum	SPLSR
Bottom Surface	0.762	0.689	1.178	1.031	0.073	0.835	1.451	2.209	2.282	Analyzed as below

	Scenario 1: WLAN 5G Main to WLAN 5G Aux and BT_Aux											
Position	Conditions	SAR Value	Coordinates (cm)			ΣSAR	Peak Location	SPLSR	Simultaneous Transmission			
		(W/kg)	х	У	Z	(W/kg)	Separation Distance (mm)	SFLSK	SAR Test			
Pook oido	WLAN 5G Main	1.178	-12.82	9.90	-0.37	-	-	-	-			
Back side	WLAN 5G Aux(+Bluetooth)	1.104	-12.92	-12.22	-0.37	2.282	221.20	0.016	SPLSR ≤ 0.04, Not required			

1 335.	nario 1 photo : WLAN 5G Main to WLAN 5G Aux and BT_Aux
WLAN 5G Main + WLAN 5G Aux(+BT)	Top View WLAN Aug. WLAN Moin

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司



Page: 42 of 61

4. Instruments List

Manufacturer	Device	Туре	Serial number	Date of last calibration	Date of next calibration
SPEAG	Dosimetric E-Field Probe	EX3DV4	3770	Apr.28,2021	Apr.27,2022
SPEAG	System Validation	D2450V2	727	Apr.14,2021	Apr.13,2022
OI EAG	Dipole	D5GHzV2	1023	Jan.26,2021	Jan.25,2022
SPEAG	Data acquisition Electronics	DAE4	856	Apr.23,2021	Apr.22,2022
SPEAG	Software	DASY52 4.7.80	N/A	Calibration not required	Calibration not required
SPEAG	Phantom	ELI	N/A	Calibration not required	Calibration not required
SPEAG	Dielectric Assessment Kit	DAKS-3.5	1053	Feb.17,2021	Feb.16,2022
Agilent	Dual-directional	772D	MY46151242	Aug.16,2021	Aug.15,2022
/ tgilont	coupler	778D	MY48220468	Aug.16,2021	Aug.15,2022
Agilent	Signal Generator	N5181A	MY50145142	Dec.27,2020	Dec.26,2021
Agilent	Power Meter	E4417A	MY51410006	Mar.23,2021	Mar.22,2022
Agilont	Dower Concer	E0204U	MY51470001	Mar.23,2021	Mar.22,2022
Agilent	Power Sensor	E9301H	MY51470002	Mar.23,2021	Mar.22,2022
TECPEL	Digital thermometer	DTM-303A	TP130074	Apr.26,2021	Apr.25,2022

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 43 of 61

5. Measurements

Date: 2021/11/8

Report No. :EN/2021/B0002

WLAN 802.11b, Body, Bottom Surface, CH 6, 0mm, Aux

Communication System: WLAN 2.45G; Frequency: 2437 MHz; Duty cycle= 1:1.024 Medium parameters used: f = 2437 MHz; $\sigma = 1.754$ S/m; $\varepsilon_r = 37.842$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 21.5°C; Liquid temperature: 21.7°C

DASY5 Configuration:

Probe: EX3DV4 - SN3770; ConvF(7.67, 7.67, 7.67) @ 2437 MHz; Calibrated: 2021/4/28

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn856; Calibrated: 2021/4/23

Phantom: ELI

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (51x101x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 0.953 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.492 V/m; Power Drift = 0.13 dB


Peak SAR (extrapolated) = 1.25 W/kg

SAR(1 g) = 0.650 W/kg; SAR(10 g) = 0.341 W/kg

Smallest distance from peaks to all points 3 dB below = 14.9 mm

Ratio of SAR at M2 to SAR at M1 = 51.3%

Maximum value of SAR (measured) = 0.940 W/kg

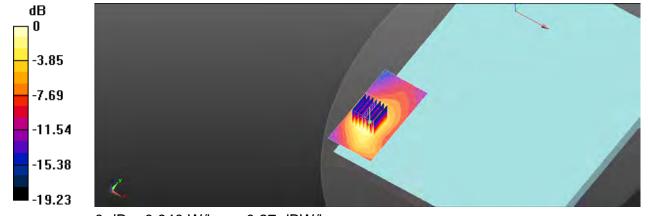

0 dB = 0.940 W/kg = -0.27 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Page: 44 of 61

Date: 2021/11/8

Report No. :EN/2021/B0002

Bluetooth(GFSK), Body, Bottom Surface, CH 0, 0mm

Communication System: Bluetooth; Frequency: 2402 MHz; Duty cycle= 1:1.324 Medium parameters used: f = 2402 MHz; $\sigma = 1.723$ S/m; $\epsilon_r = 37.944$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 21.5°C; Liquid temperature: 21.7°C

DASY5 Configuration:

Probe: EX3DV4 - SN3770; ConvF(7.67, 7.67, 7.67) @ 2402 MHz; Calibrated: 2021/4/28

- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn856; Calibrated: 2021/4/23
- Phantom: ELI
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (51x101x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 0.0788 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.699 V/m; Power Drift = 0.15 dB


Peak SAR (extrapolated) = 0.0950 W/kg

SAR(1 g) = 0.050 W/kg; SAR(10 g) = 0.030 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 54.7%

Maximum value of SAR (measured) = 0.0695 W/kg

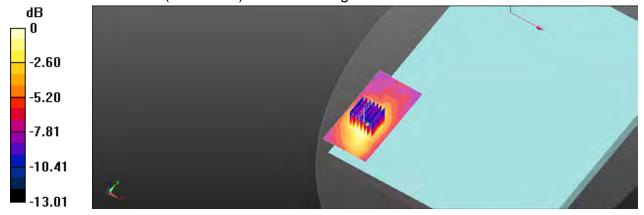

0 dB = 0.0695 W/kg = -11.58 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format

documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 45 of 61

Date: 2021/11/8

Report No. :EN/2021/B0002

WLAN 802.11n(40M) 5.2G, Body, Bottom Surface, CH 46, 0mm, Aux

Communication System: WLAN 5G; Frequency: 5230 MHz; Duty cycle= 1:1.042 Medium parameters used: f = 5230 MHz; $\sigma = 4.651$ S/m; $\epsilon_r = 36.095$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 21.8°C; Liquid temperature: 21.9°C

DASY5 Configuration:

- Probe: EX3DV4 SN3770; ConvF(5.61, 5.61, 5.61) @ 5230 MHz; Calibrated: 2021/4/28
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn856; Calibrated: 2021/4/23
- Phantom: ELI
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (61x121x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 1.22 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.184 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 2.17 W/kg

SAR(1 g) = 0.673 W/kg; SAR(10 g) = 0.257 W/kg

Smallest distance from peaks to all points 3 dB below = 10.8 mm

Ratio of SAR at M2 to SAR at M1 = 59.3%

Maximum value of SAR (measured) = 1.21 W/kg

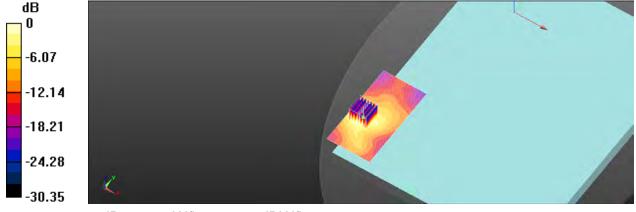

0 dB = 1.21 W/kg = 0.83 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非见有论明,此都华结里倚影测述之缘是台香,同時件操是倚保留句子。木都华丰德木公司事而纯可,不可驾份推测。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司 t (886-2) 2



Page: 46 of 61

Date: 2021/11/9

Report No. :EN/2021/B0002

WLAN 802.11a 5.3G, Body, Bottom Surface, CH 60, 0mm, Aux

Communication System: WLAN 5G; Frequency: 5300 MHz; Duty cycle= 1:1.081 Medium parameters used: f = 5300 MHz; $\sigma = 4.737$ S/m; $\epsilon_r = 35.954$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.1°C; Liquid temperature: 22.2°C

DASY5 Configuration:

Probe: EX3DV4 - SN3770; ConvF(5.61, 5.61, 5.61) @ 5300 MHz; Calibrated: 2021/4/28

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn856; Calibrated: 2021/4/23

Phantom: ELI

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (61x121x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 1.50 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 4.677 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 2.80 W/kg

SAR(1 g) = 0.828 W/kg; SAR(10 g) = 0.317 W/kg

Smallest distance from peaks to all points 3 dB below = 11.3 mm

Ratio of SAR at M2 to SAR at M1 = 58%

Maximum value of SAR (measured) = 1.51 W/kg

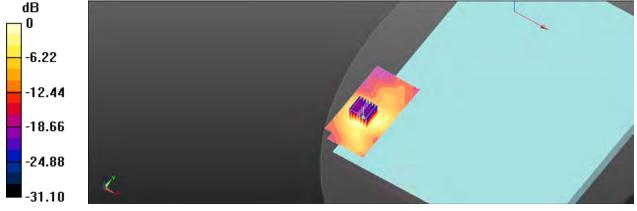

0 dB = 1.51 W/kg = 1.79 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非见有论明,此都华结里倚影测述之缘是台香,同時件操是倚保留句子。木都华丰德木公司事而纯可,不可驾份推测。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

303 Idiwan Etd.



Page: 47 of 61

Date: 2021/11/9

Report No. :EN/2021/B0002

WLAN 802.11ac(80M) 5.6G, Body, Bottom Surface, CH 138, 0mm, Aux

Communication System: WLAN 5G; Frequency: 5690 MHz; Duty cycle= 1:1.042 Medium parameters used: f = 5690 MHz; $\sigma = 5.199$ S/m; $\epsilon_r = 35.341$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 21.8°C; Liquid temperature: 21.9°C

DASY5 Configuration:

Probe: EX3DV4 - SN3770; ConvF(4.95, 4.95, 4.95) @ 5690 MHz; Calibrated: 2021/4/28

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn856; Calibrated: 2021/4/23

Phantom: ELI

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (61x121x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 1.61 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 4.742 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 3.15 W/kg

SAR(1 g) = 0.864 W/kg; SAR(10 g) = 0.329 W/kg

Smallest distance from peaks to all points 3 dB below = 10.4 mm

Ratio of SAR at M2 to SAR at M1 = 54.5%

Maximum value of SAR (measured) = 1.60 W/kg

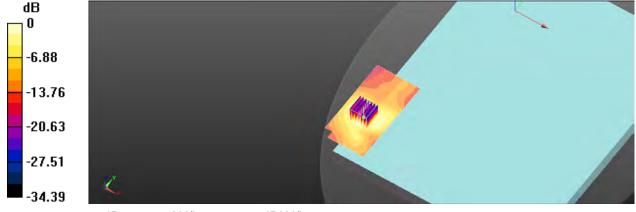

0 dB = 1.60 W/kg = 2.04 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非见有论明,此都华结里倚影测述之缘是台香,同時件操是倚保留句子。木都华丰德木公司事而纯可,不可驾份推测。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

303 Idiwan Eta. 110.1



Page: 48 of 61

Date: 2021/11/9

Report No. :EN/2021/B0002

WLAN 802.11n(40M) 5.8G, Body, Bottom Surface, CH 159, 0mm, Aux

Communication System: WLAN 5G; Frequency: 5795 MHz; Duty cycle= 1:1.042 Medium parameters used: f = 5795 MHz; $\sigma = 5.315$ S/m; $\varepsilon_r = 35.081$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 21.6°C; Liquid temperature: 21.8°C

DASY5 Configuration:

Probe: EX3DV4 - SN3770; ConvF(4.95, 4.95, 4.95) @ 5795 MHz; Calibrated: 2021/4/28

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn856; Calibrated: 2021/4/23

Phantom: ELI

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (61x121x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 1.83 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 5.014 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 3.68 W/kg

SAR(1 g) = 0.974 W/kg; SAR(10 g) = 0.366 W/kg

Smallest distance from peaks to all points 3 dB below = 10.9 mm

Ratio of SAR at M2 to SAR at M1 = 53.7%

Maximum value of SAR (measured) = 1.82 W/kg

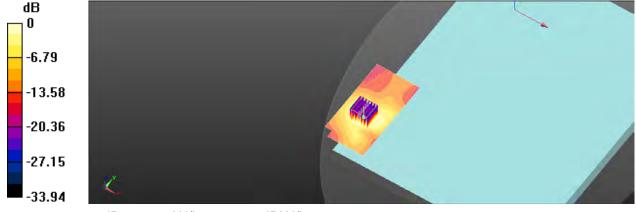

0 dB = 1.82 W/kg = 2.60 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Page: 49 of 61

Date: 2021/11/8

Report No. :EN/2021/B0002

WLAN 802.11b, Body, Bottom Surface, CH 6, 0mm, Main

Communication System: WLAN 2.45G; Frequency: 2437 MHz; Duty cycle= 1:1.024 Medium parameters used: f = 2437 MHz; $\sigma = 1.754$ S/m; $\varepsilon_r = 37.842$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 21.5°C; Liquid temperature: 21.7°C

DASY5 Configuration:

Probe: EX3DV4 - SN3770; ConvF(7.67, 7.67, 7.67) @ 2437 MHz; Calibrated: 2021/4/28

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn856; Calibrated: 2021/4/23

Phantom: ELI

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (51x101x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 1.09 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.564 V/m; Power Drift = 0.12 dB


Peak SAR (extrapolated) = 1.42 W/kg

SAR(1 g) = 0.736 W/kg; SAR(10 g) = 0.385 W/kg

Smallest distance from peaks to all points 3 dB below = 13 mm

Ratio of SAR at M2 to SAR at M1 = 51.5%

Maximum value of SAR (measured) = 1.05 W/kg

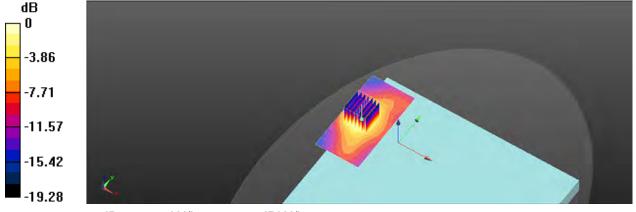

0 dB = 1.05 W/kg = 0.21 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Page: 50 of 61

Date: 2021/11/8

Report No. :EN/2021/B0002

WLAN 802.11a 5.2G, Body, Bottom Surface, CH 44, 0mm, Main

Communication System: WLAN 5G; Frequency: 5220 MHz; Duty cycle= 1:1.081 Medium parameters used: f = 5220 MHz; $\sigma = 4.641$ S/m; $\epsilon_r = 36.109$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 21.8°C; Liquid temperature: 21.9°C

DASY5 Configuration:

- Probe: EX3DV4 SN3770; ConvF(5.61, 5.61, 5.61) @ 5220 MHz; Calibrated: 2021/4/28
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn856; Calibrated: 2021/4/23
- Phantom: ELI
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (61x121x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 1.75 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 5.842 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 3.00 W/kg

SAR(1 g) = 1.02 W/kg; SAR(10 g) = 0.411 W/kg

Smallest distance from peaks to all points 3 dB below = 11.8 mm

Ratio of SAR at M2 to SAR at M1 = 59.6%

Maximum value of SAR (measured) = 1.73 W/kg

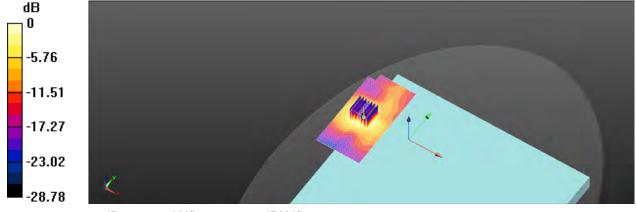

0 dB = 1.73 W/kg = 2.38 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非见有论明,此都华结里倚影测述之缘是台香,同時件操是倚保留句子。木都华丰德木公司事而纯可,不可驾份推测。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

www.sgs.com.tw



Page: 51 of 61

Date: 2021/11/9

Report No. :EN/2021/B0002

WLAN 802.11n(40M) 5.3G, Body, Bottom Surface, CH 54, 0mm, Main

Communication System: WLAN 5G; Frequency: 5270 MHz; Duty cycle= 1:1.042 Medium parameters used: f = 5270 MHz; $\sigma = 4.702$ S/m; $\epsilon_r = 35.997$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.1°C; Liquid temperature: 22.2°C

DASY5 Configuration:

Probe: EX3DV4 - SN3770; ConvF(5.61, 5.61, 5.61) @ 5270 MHz; Calibrated: 2021/4/28

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn856; Calibrated: 2021/4/23

Phantom: ELI

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (61x121x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 1.65 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 5.428 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 2.91 W/kg

SAR(1 g) = 1.05 W/kg; SAR(10 g) = 0.441 W/kg

Smallest distance from peaks to all points 3 dB below = 11.1 mm

Ratio of SAR at M2 to SAR at M1 = 59.3%

Maximum value of SAR (measured) = 1.66 W/kg

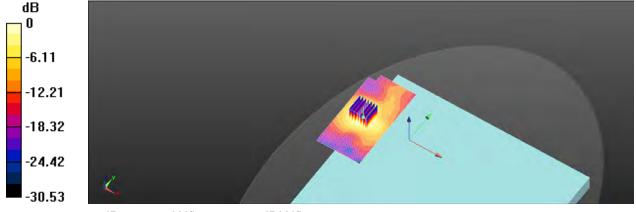

0 dB = 1.66 W/kg = 2.20 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 险非只有铅明,此数华红用摄影测过之样只有景,同时此样只属是例如子。太极生工概太公司电描弦可,因可如公指制。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

t (886-2) 2299-3279 f (886-2) 2298-0488 www.sgs.com.tw



Page: 52 of 61

Date: 2021/11/9

Report No. :EN/2021/B0002

WLAN 802.11ac(80M) 5.6G, Body, Bottom Surface, CH 138, 0mm, Main

Communication System: WLAN 5G; Frequency: 5690 MHz; Duty cycle= 1:1.042 Medium parameters used: f = 5690 MHz; σ = 5.199 S/m; ϵ_r = 35.341; ρ = 1000 kg/m³

Phantom section: Flat Section

Ambient temperature: 21.8°C; Liquid temperature: 21.9°C

DASY5 Configuration:

- Probe: EX3DV4 SN3770; ConvF(4.95, 4.95, 4.95) @ 5690 MHz; Calibrated: 2021/4/28
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn856; Calibrated: 2021/4/23
- Phantom: ELI
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (61x121x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 1.66 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 5.394 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 3.09 W/kg

SAR(1 g) = 1.07 W/kg; SAR(10 g) = 0.456 W/kg

Smallest distance from peaks to all points 3 dB below = 10.8 mm

Ratio of SAR at M2 to SAR at M1 = 55.5%

Maximum value of SAR (measured) = 1.63 W/kg

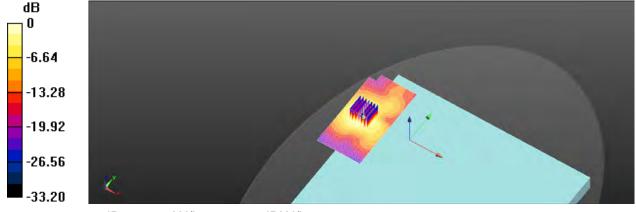

0 dB = 1.63 W/kg = 2.12 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非见有论明,此都华结里倚影测述之缘是台香,同時件操是倚保留句子。木都华丰德木公司事而纯可,不可驾份推测。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 53 of 61

Date: 2021/11/9

Report No. :EN/2021/B0002

WLAN 802.11n(40M) 5.8G, Body, Bottom Surface, CH 151, 0mm, Main

Communication System: WLAN 5G; Frequency: 5755 MHz; Duty cycle= 1:1.042 Medium parameters used: f = 5755 MHz; $\sigma = 5.272$ S/m; $\varepsilon_r = 35.165$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 21.6°C; Liquid temperature: 21.8°C

DASY5 Configuration:

- Probe: EX3DV4 SN3770; ConvF(4.95, 4.95, 4.95) @ 5755 MHz; Calibrated: 2021/4/28
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn856; Calibrated: 2021/4/23
- Phantom: ELI
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (61x121x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 1.88 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 5.772 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 3.61 W/kg

SAR(1 g) = 1.1 W/kg; SAR(10 g) = 0.446 W/kg

Smallest distance from peaks to all points 3 dB below = 10.2 mm

Ratio of SAR at M2 to SAR at M1 = 54.8%

Maximum value of SAR (measured) = 1.86 W/kg

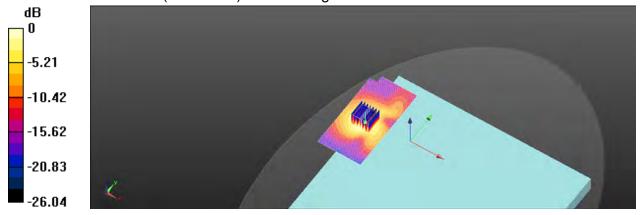

0 dB = 1.86 W/kg = 2.70 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Page: 54 of 61

6. SAR System Performance Verification

Date: 2021/11/8

Report No. :EN/2021/B0002 **Dipole 2450 MHz, SN:727**

Communication System: CW; Frequency: 2450 MHz; Duty cycle= 1:1

Medium parameters used: f = 2450 MHz; $\sigma = 1.766 \text{ S/m}$; $\varepsilon_r = 37.821$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 21.5°C; Liquid temperature: 21.7°C

DASY5 Configuration:

Probe: EX3DV4 - SN3770; ConvF(7.67, 7.67, 7.67) @ 2450 MHz; Calibrated: 2021/4/28

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn856; Calibrated: 2021/4/23

Phantom: ELI

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (51x61x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 19.3 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 95.11 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 27.2 W/kg

SAR(1 g) = 13.4 W/kg; SAR(10 g) = 6.26 W/kg

Smallest distance from peaks to all points 3 dB below = 10 mm

Ratio of SAR at M2 to SAR at M1 = 51.2%

Maximum value of SAR (measured) = 17.8 W/kg

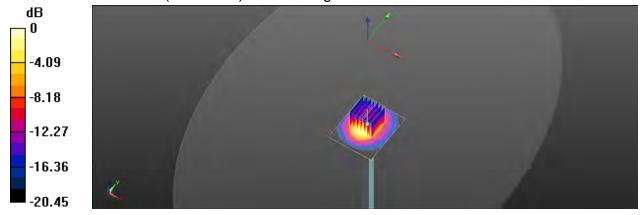

0 dB = 17.8 W/kg = 12.50 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

t (886-2) 2299-3279



Page: 55 of 61

Date: 2021/11/8

Report No. :EN/2021/B0002 Dipole 5200 MHz, SN:1023

Communication System: CW; Frequency: 5200 MHz; Duty cycle= 1:1

Medium parameters used: f = 5200 MHz; $\sigma = 4.617 \text{ S/m}$; $\varepsilon_r = 36.117$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 21.8°C; Liquid temperature: 21.9°C

DASY5 Configuration:

Probe: EX3DV4 - SN3770; ConvF(5.61, 5.61, 5.61) @ 5200 MHz; Calibrated: 2021/4/28

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn856; Calibrated: 2021/4/23

Phantom: ELI

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (51x51x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 15.8 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 48.26 V/m; Power Drift = -0.06 dB


Peak SAR (extrapolated) = 30.6 W/kg

SAR(1 g) = 7.71 W/kg; SAR(10 g) = 2.2 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 56.4%

Maximum value of SAR (measured) = 16.3 W/kg

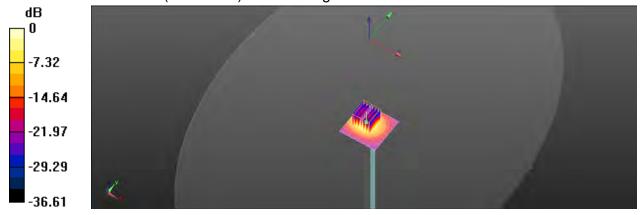

0 dB = 16.3 W/kg = 12.12 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Page: 56 of 61

Date: 2021/11/9

Report No. :EN/2021/B0002 Dipole 5300 MHz, SN:1023

Communication System: CW; Frequency: 5300 MHz; Duty cycle= 1:1

Medium parameters used: f = 5300 MHz; σ = 4.737 S/m; ϵ_r = 35.954; ρ = 1000 kg/m³

Phantom section: Flat Section

Ambient temperature: 22.1°C; Liquid temperature: 22.2°C

DASY5 Configuration:

Probe: EX3DV4 - SN3770; ConvF(5.61, 5.61, 5.61) @ 5300 MHz; Calibrated: 2021/4/28

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn856; Calibrated: 2021/4/23

Phantom: ELI

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (51x51x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 16.2 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 58.76 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 31.0 W/kg

SAR(1 g) = 8.02 W/kg; SAR(10 g) = 2.25 W/kg

Smallest distance from peaks to all points 3 dB below = 7.5 mm

Ratio of SAR at M2 to SAR at M1 = 56%

Maximum value of SAR (measured) = 16.4 W/kg

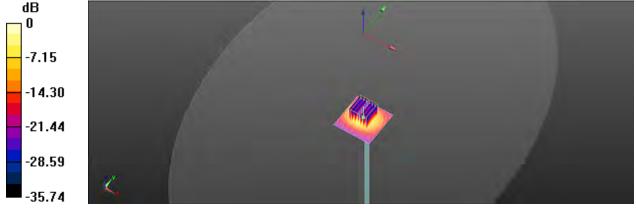

0 dB = 16.4 W/kg = 12.15 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非见有论明,此都华结里倚影测述之缘是台香,同時件操是倚保留句子。木都华丰德木公司事而纯可,不可驾份推测。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 57 of 61

Date: 2021/11/9

Report No. :EN/2021/B0002 Dipole 5600 MHz, SN:1023

Communication System: CW; Frequency: 5600 MHz; Duty cycle= 1:1

Medium parameters used: f = 5600 MHz; $\sigma = 5.084 \text{ S/m}$; $\varepsilon_r = 35.546$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 21.8°C; Liquid temperature: 21.9°C

DASY5 Configuration:

Probe: EX3DV4 - SN3770; ConvF(4.9, 4.9, 4.9) @ 5600 MHz; Calibrated: 2021/4/28

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn856; Calibrated: 2021/4/23

Phantom: ELI

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (51x51x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 17.2 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 48.04 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 35.3 W/kg

SAR(1 g) = 8.41 W/kg; SAR(10 g) = 2.37 W/kg

Smallest distance from peaks to all points 3 dB below = 7.4 mm

Ratio of SAR at M2 to SAR at M1 = 53%

Maximum value of SAR (measured) = 17.4 W/kg

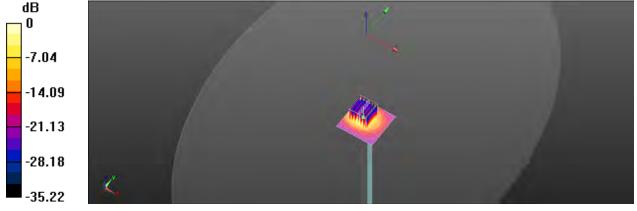

0 dB = 17.4 W/kg = 12.41 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Page: 58 of 61

Date: 2021/11/9

Report No. :EN/2021/B0002 **Dipole 5800 MHz, SN:1023**

Communication System: CW; Frequency: 5800 MHz; Duty cycle= 1:1

Medium parameters used: f = 5800 MHz; $\sigma = 5.322 \text{ S/m}$; $\varepsilon_r = 35.062$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 21.6°C; Liquid temperature: 21.8°C

DASY5 Configuration:

- Probe: EX3DV4 SN3770; ConvF(4.95, 4.95, 4.95) @ 5800 MHz; Calibrated: 2021/4/28
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn856; Calibrated: 2021/4/23
- Phantom: ELI
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (51x51x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 16.4 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 59.46 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 34.3 W/kg

SAR(1 g) = 8.04 W/kg; SAR(10 g) = 2.25 W/kg

Smallest distance from peaks to all points 3 dB below = 7.9 mm

Ratio of SAR at M2 to SAR at M1 = 51.3%

Maximum value of SAR (measured) = 16.2 W/kg

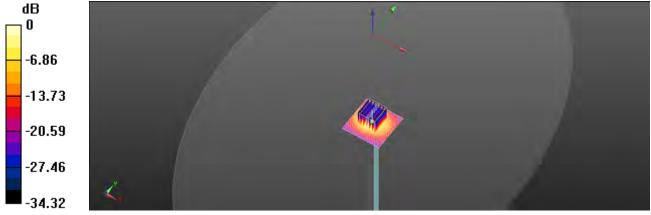

0 dB = 16.2 W/kg = 12.10 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

t (886-2) 2299-3279



Page: 59 of 61

7. Uncertainty Budget

Measurement Uncertainty evaluation template for DUT SAR test (3-6G)

A	С	D	е		f	g	h=c * f / e	i=c * g / e	k
Source of Uncertainty	Tolerance/ Uncertainty	Probability Distributio	Div	Div Value	ci (1g)	ci (10g)	Standard uncertainty	Standard uncertainty	vi, or Veff
Measurement system									
Probe calibration	6.55%	N	1	1	1	1	6.55%	6.55%	œ
Isotropy , Axial	3.50%	R	√3	1.732	1	1	2.02%	2.02%	œ
Isotropy, Hemispherical	9.60%	R	√3	1.732	1	1	5.54%	5.54%	œ
Modulation Response	2.40%	R	√3	1.732	1	1	1.40%	1.40%	∞
Boundary Effect	1.00%	R	√3	1.732	1	1	0.58%	0.58%	œ
Linearity	4.70%	R	√3	1.732	1	1	2.71%	2.71%	œ
Detection Limits	1.00%	R	√3	1.732	1	1	0.58%	0.58%	œ
Readout Electronics	0.30%	N	1	1	1	1	0.30%	0.30%	œ
Response time	0.80%	R	√3	1.732	1	1	0.46%	0.46%	œ
Integration Time	2.60%	R	√3	1.732	1	1	1.50%	1.50%	œ
Measurement drift (class A evaluation)	1.75%	R	√3	1.732	1	1	1.01%	1.01%	œ
RF ambient condition - noise	3.00%	R	√3	1.732	1	1	1.73%	1.73%	œ
RF ambient conditions - reflections	3.00%	R	√3	1.732	1	1	1.73%	1.73%	œ
Probe positioner Mechanical restrictions	0.40%	R	√3	1.732	1	1	0.23%	0.23%	œ
Probe Positioning with respect to phantom shell	2.90%	R	√3	1.732	1	1	1.67%	1.67%	œ
Post-processing	1.00%	R	√3	1.732	1	1	0.58%	0.58%	œ
Max SAR Eval	1.00%	R	√3	1.732	1	1	0.58%	0.58%	œ
Test Sample related									
Test sample positioning	2.90%	N	1	1	1	1	2.90%	2.90%	M-1
Device Holder Uncertainty	3.60%	N	1	1	1	1	3.60%	3.60%	M-1
Drift of output power	5.00%	R	√3	1.732	1	1	2.89%	2.89%	œ
Phantom and Setup									
Phantom Uncertainty	4.00%	R	√3	1.732	1	1	2.31%	2.31%	œ
Liquid permittivity (mea.)	0.67%	N	1	1	0.64	0.43	0.43%	0.29%	М
Liquid Conductivity (mea.)	0.99%	N	1	1	0.6	0.49	0.59%	0.49%	М
Combined standard uncertainty		RSS					11.74%	11.72%	
Expant uncertainty (95% confidence interval), K=2							23.48%	23.44%	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非兄有的证明,所谓生结里痛對测试之緣具有害,同時所撰具備保留的子。木都生主领太公司事而許可,不可驾份複剩。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司 t (886-2) 2299-3279

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 f (886-2) 2298-0488 www.sgs.com.tw



Page: 60 of 61

Measurement Uncertainty evaluation template for DUT SAR test (0.3-3G)

A	С	D	е		f	g	h=c * f / e	i=c * g / e	k
Source of Uncertainty	Tolerance/ Uncertainty	Probability Distributio	Div	Div Value	ci (1g)	ci (10g)	Standard uncertainty	Standard uncertainty	vi, or Veff
Measurement system									
Probe calibration	6.00%	N	1	1	1	1	6.00%	6.00%	∞
Isotropy , Axial	3.50%	R	√3	1.732	1	1	2.02%	2.02%	∞
Isotropy, Hemispherical	9.60%	R	√3	1.732	1	1	5.54%	5.54%	∞
Modulation Response	2.40%	R	√3	1.732	1	1	1.40%	1.40%	8
Boundary Effect	1.00%	R	√3	1.732	1	1	0.58%	0.58%	8
Linearity	4.70%	R	√3	1.732	1	1	2.71%	2.71%	8
Detection Limits	1.00%	R	√3	1.732	1	1	0.58%	0.58%	8
Readout Electronics	0.30%	N	1	1	1	1	0.30%	0.30%	8
Response time	0.80%	R	√3	1.732	1	1	0.46%	0.46%	8
Integration Time	2.60%	R	√3	1.732	1	1	1.50%	1.50%	8
Measurement drift (class A evaluation)	1.75%	R	√3	1.732	1	1	1.01%	1.01%	∞
RF ambient condition - noise	3.00%	R	√3	1.732	1	1	1.73%	1.73%	8
RF ambient conditions - reflections	3.00%	R	√3	1.732	1	1	1.73%	1.73%	8
Probe positioner Mechanical restrictions	0.40%	R	√3	1.732	1	1	0.23%	0.23%	8
Probe Positioning with respect to phantom shell	2.90%	R	√3	1.732	1	1	1.67%	1.67%	8
Post-processing	1.00%	R	√3	1.732	1	1	0.58%	0.58%	8
Max SAR Eval	1.00%	R	√3	1.732	1	1	0.58%	0.58%	8
Test Sample related									
Test sample positioning	2.90%	N	1	1	1	1	2.90%	2.90%	M-1
Device Holder Uncertainty	3.60%	N	1	1	1	1	3.60%	3.60%	M-1
Drift of output power	5.00%	R	√3	1.732	1	1	2.89%	2.89%	8
Phantom and Setup									
Phantom Uncertainty	4.00%	R	√3	1.732	1	1	2.31%	2.31%	8
Liquid permittivity (mea.)	3.56%	N	1	1	0.64	0.43	2.28%	1.53%	М
Liquid Conductivity (mea.)	2.00%	N	1	1	0.6	0.49	1.20%	0.98%	М
Combined standard uncertainty		RSS					11.70%	11.55%	
Expant uncertainty (95% confidence interval), K=2							23.41%	23.10%	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非兄有的证明,所谓生结里痛對测计之緣具有書,同時所撰具備程度的手,不可無的複數。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, N 股份有限公司 t (886-2) 2299-3279 f (886-2) 2298-0488



Page: 61 of 61

Appendixes

Refer to separated files for the following appendixes.

EN2021B0002 SAR_Appendix A Photographs

EN2021B0002 SAR_Appendix B DAE & Probe Cal. Certificate

EN2021B0002 SAR_Appendix C Phantom Description & Dipole Cal. Certificate

- End of report -

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非早有說明,件報先结里僅對剛建之樣是各書,同時件樣是僅是200千。未報先夫經太公司事而許可,不可架份複劃。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.