

**CFR 47 FCC PART 15 SUBPART C
ISED RSS-247 Issue 3**

TEST REPORT

For

Acer Connect 5G Mobile Wi-Fi

MODEL NUMBER: M6E

FCC ID: HLZM6E

IC: 1754F-M6E

REPORT NUMBER: 4791517585.3-1-RF-4

ISSUE DATE: February 28, 2025

Prepared for

**Acer Incorporated
8F, 88, Sec. 1, Xintai 5th Rd. Xizhi New Taipei City 221 Taiwan**

Prepared by

UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch

Building 10, Innovation Technology Park, No. 1, Li Bin Road, Song Shan Lake Hi-Tech Development Zone Dongguan, 523808, People's Republic of China

Tel: +86 769 22038881

Fax: +86 769 33244054

Website: www.ul.com

The results reported herein have been performed in accordance with the laboratory's terms of accreditation. This report shall not be reproduced except in full without the written approval of the Laboratory. The results in this report apply to the test sample(s) mentioned above at the time of the testing period only and are not to be used to indicate applicability to other similar products.

Revision History

Rev.	Issue Date	Revisions	Revised By
V0	February 28, 2025	Initial Issue	

Summary of Test Results

Test Item	Clause	Limit/Requirement	Result
Antenna Requirement	N/A	FCC Part 15.203/15.247 (c) RSS-GEN Clause 6.8	Pass
AC Power Line Conducted Emission	ANSI C63.10-2013, Clause 6.2	FCC Part 15.207 RSS-GEN Clause 8.8	Pass
Conducted Output Power	ANSI C63.10-2013, Clause 11.9.2.3.1	FCC Part 15.247 (b)(3) RSS-247 Clause 5.4 (d)	Pass
6dB Bandwidth and 99% Occupied Bandwidth	ANSI C63.10-2013, Clause 11.8.1	FCC Part 15.247 (a)(2) RSS-247 Clause 5.2 (a) ISED RSS-Gen Clause 6.7	Pass
Power Spectral Density	ANSI C63.10-2013, Clause 11.10.5	FCC Part 15.247 (e) RSS-247 Clause 5.2 (b)	Pass
Conducted Band edge and spurious emission	ANSI C63.10-2013, Clause 11.11	FCC Part 15.247(d) RSS-247 Clause 5.5	Pass
Radiated Band edge and Spurious Emission	ANSI C63.10-2013, Clause 11.12 & Clause 11.13	FCC Part 15.247 (d) FCC Part 15.205/15.209 RSS-247 Clause 5.5 RSS-GEN Clause 8.9	Pass
Duty Cycle	ANSI C63.10-2013, Clause 11.6	None; for reporting purposes only.	Pass

*This test report is only published to and used by the applicant, and it is not for evidence purpose in China.

*The measurement result for the sample received is <Pass> according to <CFR 47 FCC PART 15 SUBPART C, ISED RSS-247 Issue 3> when <Simple Acceptance> decision rule is applied.

CONTENTS

1. ATTESTATION OF TEST RESULTS	6
2. TEST METHODOLOGY	7
3. FACILITIES AND ACCREDITATION	7
4. CALIBRATION AND UNCERTAINTY	8
4.1. MEASURING INSTRUMENT CALIBRATION	8
4.2. MEASUREMENT UNCERTAINTY	8
5. EQUIPMENT UNDER TEST	9
5.1. DESCRIPTION OF EUT	9
5.2. CHANNEL LIST	9
5.3. MAXIMUM POWER	10
5.4. TEST CHANNEL CONFIGURATION	10
5.5. THE WORSE CASE POWER SETTING PARAMETER	11
5.6. WORST-CASE CONFIGURATIONS	13
5.7. DESCRIPTION OF AVAILABLE ANTENNAS	14
5.8. SUPPORT UNITS FOR SYSTEM TEST	15
5.9. SETUP DIAGRAM	15
6. MEASURING EQUIPMENT AND SOFTWARE USED	16
7. ANTENNA PORT TEST RESULTS	19
7.1. CONDUCTED OUTPUT POWER	19
7.2. 6DB BANDWIDTH AND 99% OCCUPIED BANDWIDTH	20
7.3. POWER SPECTRAL DENSITY	22
7.4. CONDUCTED BAND EDGE AND SPURIOUS EMISSION	24
7.5. DUTY CYCLE	26
8. RADIATED TEST RESULTS	27
8.1. RESTRICTED BANDEDGE	35
8.2. SPURIOUS EMISSIONS(1 GHZ~3 GHZ)	61
8.3. SPURIOUS EMISSIONS(3 GHZ~18 GHZ)	67
8.4. SPURIOUS EMISSIONS(9 KHZ~30 MHZ)	103
8.5. SPURIOUS EMISSIONS(18 GHZ~26 GHZ)	106
8.6. SPURIOUS EMISSIONS(30 MHZ~1 GHZ)	108
9. ANTENNA REQUIREMENT	110

10.	AC POWER LINE CONDUCTED EMISSION	111
11.	TEST DATA	115
	Appendix A:Duty Cycle	115
	Appendix B:Maximum Conducted Output Power	119
	Appendix C:-6dB Bandwidth.....	121
	Appendix D:Occupied Channel Bandwidth	134
	Appendix E:Maximum Power Spectral Density Level	147
	Appendix F:Band Edge.....	161
	Appendix G:Conducted RF Spurious Emission.....	178
	Appendix A1:Duty Cycle	202
	Appendix B1:Maximum Conducted Output Power	207
	Appendix C1:-6dB Bandwidth.....	210
	Appendix D1:Occupied Channel Bandwidth	228
	Appendix E1:Maximum Power Spectral Density Level	245
	Appendix F1:Band Edge.....	265
	Appendix G1:Conducted RF Spurious Emission.....	288

1. ATTESTATION OF TEST RESULTS

Applicant Information

Company Name: Acer Incorporated
Address: 8F, 88, Sec. 1, Xintai 5th Rd. Xizhi New Taipei City 221 Taiwan

Manufacturer Information


Company Name: Acer Incorporated
Address: 8F, 88, Sec. 1, Xintai 5th Rd. Xizhi New Taipei City 221 Taiwan

EUT Information

EUT Name: Acer Connect 5G Mobile Wi-Fi
Model: M6E
Brand: ACER
Sample Received Date: October 17, 2024
Sample Status: Normal
Sample ID: 7722525
Date of Tested: October 23, 2024 to February 17, 2025


APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 FCC PART 15 SUBPART C ISED RSS-247 Issue 3	Pass

Prepared By:



James Qin
Project Engineer

Checked By:



Kebo Zhang
Senior Project Engineer

Approved By:



Stephen Guo
Operations Manager

2. TEST METHODOLOGY

All tests were performed in accordance with the standard CFR 47 FCC PART 15 SUBPART C ISSED RSS-247 Issue 3, KDB 558074 D01 15.247 Meas Guidance v05r02, KDB 414788 D01 Radiated Test Site v01r01, KDB 662911 D01 Multiple Transmitter Output v02r01, CFR 47 FCC Part 2, ANSI C63.10-2013 and ISSED RSS-GEN Issue 5

3. FACILITIES AND ACCREDITATION

Accreditation Certificate	A2LA (Certificate No.: 4102.01) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with A2LA. FCC (FCC Designation No.: CN1187) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. Has been recognized to perform compliance testing on equipment subject to the Commission's Declaration of Conformity (DoC) and Certification rules ISED (Company No.: 21320) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been registered and fully described in a report filed with ISSED. The Company Number is 21320 and the test lab Conformity Assessment Body Identifier (CABID) is CN0046. VCCI (Registration No.: G-20192, C-20153, T-20155 and R-20202) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with VCCI, the Membership No. is 3793. Facility Name: Chamber D, the VCCI registration No. is G-20192 and R-20202 Shielding Room B, the VCCI registration No. is C-20153 and T-20155
---------------------------	---

Note 1:

All tests measurement facilities use to collect the measurement data are located at Building 10, Innovation Technology Park, No. 1, Li Bin Road, Song Shan Lake Hi-Tech Development Zone Dongguan, 523808, People's Republic of China.

Note 2:

The test anechoic chamber in UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch had been calibrated and compared to the open field sites and the test anechoic chamber is shown to be equivalent to or worst case from the open field site.

Note 3:

For below 30 MHz, lab had performed measurements at test anechoic chamber and comparing to measurements obtained on an open field site. And these measurements below 30 MHz had been correlated to measurements performed on an OFS.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations and is traceable to recognized national standards.

4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Item	Uncertainty
Conduction emission	3.62 dB
Radiated Emission (Included Fundamental Emission) (9 kHz ~ 30 MHz)	2.2 dB
Radiated Emission (Included Fundamental Emission) (30 MHz ~ 1 GHz)	4.00 dB
Radiated Emission (Included Fundamental Emission) (1 GHz to 26 GHz)	5.78 dB (1 GHz ~ 18 GHz)
	5.23 dB (18 GHz ~ 26 GHz)
Duty Cycle	±0.028%
DTS and 99% Occupied Bandwidth	±0.0196%
Maximum Conducted Output Power	±0.686 dB
Maximum Power Spectral Density Level	±0.743 dB
Conducted Band-edge Compliance	±1.328 dB
Conducted Unwanted Emissions In Non-restricted Frequency Bands	±0.746 dB (9 kHz ~ 1 GHz)
	±1.328dB (1 GHz ~ 26 GHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

EUT Name	Acer Connect 5G Mobile Wi-Fi
Model	M6E
Frequency Band:	2400 MHz to 2483.5 MHz
Frequency Range:	2412 MHz to 2462 MHz
Support Standards:	CFR 47 FCC PART 15 SUBPART C,ISED RSS-247 ISSUE 3
Type of Modulation:	IEEE 802.11b: DSSS(CCK, DQPSK, DBPSK) IEEE 802.11g/n: OFDM(64-QAM, 16-QAM, QPSK, BPSK) IEEE 802.11ax: OFDM(1024-QAM, 64-QAM, 16-QAM, QPSK, BPSK)
Data Rate:	IEEE 802.11b: Up to 11 Mbps IEEE 802.11g: Up to 54 Mbps IEEE 802.11n: Up to MCS7 IEEE 802.11ax: Up to MCS7
Radio Technology:	IEEE 802.11b/g/n HT20/11n HT40/ax HE20/ax HE40
Antenna Type:	LDS Antenna
Antenna Gain:	ANT7: 0.2 dBi, ANT8: 0.31 dBi
Normal Test Voltage:	3.87 Vdc, AC 120V, 60Hz
EUT Test software:	MTK

5.2. CHANNEL LIST

Channel List For Bandwidth=20 MHz							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	4	2427	7	2442	10	2457
2	2417	5	2432	8	2447	11	2462
3	2422	6	2437	9	2452	/	/

Channel List For Bandwidth=40 MHz							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
3	2422	5	2432	7	2442	9	2452
4	2427	6	2437	8	2447	/	/

5.3. MAXIMUM POWER

IEEE Std. 802.11	Frequency (MHz)	Channel Number	Maximum Conducted AVG Output Power (dBm)
b	2412 ~ 2462	1-11[11]	19.68
g	2412 ~ 2462	1-11[11]	18.84
n HT20	2412 ~ 2462	1-11[11]	19.56
n HT40	2422 ~ 2452	3-9[7]	17.78
ax HE20	2412 ~ 2462	1-11[11]	19.68
ax HE40	2422 ~ 2452	3-9[7]	17.77

5.4. TEST CHANNEL CONFIGURATION

IEEE Std. 802.11	Test Channel Number	Frequency
b	CH 1(Low Channel), CH 6(MID Channel), CH 11(High Channel)	2412 MHz, 2437 MHz, 2462 MHz
g	CH 1(Low Channel), CH 6(MID Channel), CH 11(High Channel)	2412 MHz, 2437 MHz, 2462 MHz
n HT20	CH 1(Low Channel), CH 6(MID Channel), CH 11(High Channel)	2412 MHz, 2437 MHz, 2462 MHz
n HT40	CH 3(Low Channel), CH 6(MID Channel), CH 9(High Channel)	2422 MHz, 2437 MHz, 2452 MHz
ax HE20	CH 1(Low Channel), CH 6(MID Channel), CH 11(High Channel)	2412 MHz, 2437 MHz, 2462 MHz
ax HE40	CH 3(Low Channel), CH 6(MID Channel), CH 9(High Channel)	2422 MHz, 2437 MHz, 2452 MHz

5.5. THE WORSE CASE POWER SETTING PARAMETER

The Worst Case Power Setting Parameter under 2400 ~ 2483.5MHz Band	
Test Software	MTK

Mode	Freq(MHz)	Tx power Setting(dBm)
802.11b	2412	22 23
	2437	23 23
	2462	23 23
802.11g-CDD	2412	19
	2437	19
	2462	20
802.11n 20M	2412	18
	2437	18
	2462	19
802.11n 40M	2422	19
	2437	19.5
	2452	19.5

Mode	Freq(MHz)	RU size	RU Index	Tx power level (dBm)
802.11ax 20M	2412	26	0	16.5
			4	16.5
			8	14.5
		52	37	16
			38	16.5
			40	16
		106	53	16.5
			54	16.5
		SU	/	16.5
	2437	26	0	16
			4	16.5
			8	16.5
		52	37	16
			38	16.5
			40	17
		106	53	16.5
			54	17
		SU	/	16.5
	2462	26	0	17
			4	17
			8	17
		52	37	17
			38	17
			40	17
		106	53	17
			54	17
		SU	/	17

			54	17.5
		SU	/	17
802.11ax 40M	2422	SU	/	16.5
	2437	SU	/	16.5
	2452	SU	/	17

5.6. WORST-CASE CONFIGURATIONS

The EUT was tested in the following configuration(s):

Controlled in test mode using a software application on the EUT supplied by customer. The application was used to enable a continuous transmission and to select the mode, test channels, bandwidth, data rates as required.

Test channels referring to section 5.4.

Maximum power setting referring to section 5.5.

Worst-case data rates as provided by the client were:

802.11b mode: 1 Mbps
802.11g mode: 6 Mbps
802.11n HT20 mode: MCS0
802.11n HT40 mode: MCS0
802.11ax HE20 mode: MCS0
802.11ax HE40 mode: MCS0

802.11b/g/n HT20/HT40/ax HE20/HE40 support SISO and MIMO mode. SISO mode and MIMO mode have the same power setting, so only the worst case power mode(MIMO) will be record in the report.

The EUT has 2 separate antennas which correspond to 2 separate antenna ports. Core 1 and Core 2 correspond to antenna 7 and antenna 8 respectively.

The measured additional path loss was included in any path loss calculations for all RF cable used during tested.

Conducted output power, power spectral density tests separately on each port with all supported SISO & MIMO port combinations.

Conducted bandedge and spurious emissions tests were performed with SISO mode, as this port was found to have the worst case in terms of power settings amongst all supported possible SISO & MIMO port combinations.

Radiated emissions tests were performed with the MIMO modes. These were found to be the worst modulation scheme with regards to emissions after preliminary investigations and, as this mode emits the highest conducted output power level, it was deemed to be the worst case.

The EUT support Cyclic Shift Diversity(CDD), Space Time Coding(STBC), Spatial Division Multiplexing(SDM) modes. They use the same conducted power per chain in any given mode, so we only chose the worst case mode CDD for final testing.

5.7. DESCRIPTION OF AVAILABLE ANTENNAS

Antenna	Frequency (MHz)	Antenna Type	MAX Antenna Gain (dBi)
1	2412-2462	LDS antenna	0.2
2	2412-2462	LDS antenna	0.31

The EUT support Cyclic Shift Diversity(CDD) mode.

MIMO output power port and MIMO PSD port summing were performed in accordance with KDB 662911 D01. For the CDD results the Directional Gain was calculated in accordance with the following method.

For output power measurements:

Directional gain= $G_{ANT} + \text{Array Gain} = 0.31 \text{ dBi}$

G_{ANT} : equal to the gain of the antenna having the highest gain

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$

For power spectral density (PSD) measurements:

Directional gain= $G_{ANT} + \text{Array Gain} = 3.34 \text{ dBi}$

Array Gain = $10 \log(N_{ANT}/N_{SS}) \text{ dB}$.

N_{ANT} : number of transmit antennas

N_{SS} : number of spatial streams, The worst case directional gain will occur when $N_{SS} = 1$

Test Mode	Transmit and Receive Mode	Description
IEEE 802.11b	☒2TX, 2RX	ANT 7 and ANT 8 can be used as transmitting/receiving antenna.
IEEE 802.11g	☒2TX, 2RX	ANT 7 and ANT 8 can be used as transmitting/receiving antenna.
IEEE 802.11n HT20	☒2TX, 2RX	ANT 7 and ANT 8 can be used as transmitting/receiving antenna.
IEEE 802.11n HT40	☒2TX, 2RX	ANT 7 and ANT 8 can be used as transmitting/receiving antenna.
IEEE 802.11ax HE20	☒2TX, 2RX	ANT 7 and ANT 8 can be used as transmitting/receiving antenna.
IEEE 802.11ax HE40	☒2TX, 2RX	ANT 7 and ANT 8 can be used as transmitting/receiving antenna.


Note:

1. WLAN 2.4G, WLAN 5G and WLAN 6G can't transmit simultaneously. (declared by client)

5.8. SUPPORT UNITS FOR SYSTEM TEST

The EUT has been tested as an independent unit

5.9. SETUP DIAGRAM

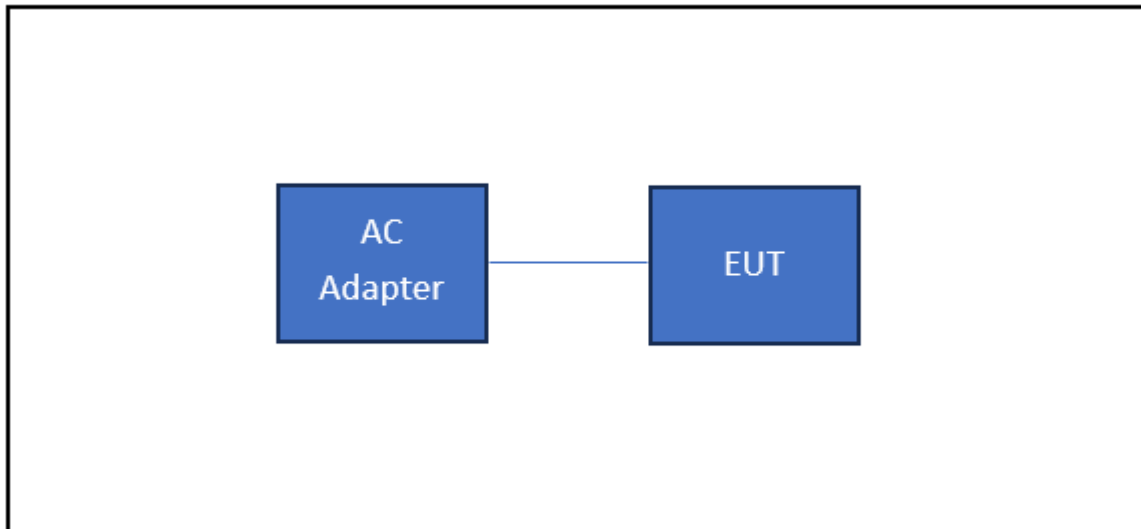

6. MEASURING EQUIPMENT AND SOFTWARE USED

R&S TS 8997 Test System					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
Power sensor, Power Meter	R&S	OSP120	100921	Mar.25,2024	Mar.24,2025
Vector Signal Generator	R&S	SMBV100A	261637	Sep.28, 2024	Sep.27, 2025
Signal Generator	R&S	SMB100A	178553	Sep.28, 2024	Sep.27, 2025
Signal Analyzer	R&S	FSV40	101118	Sep.28, 2024	Sep.27, 2025
Software					
Description	Manufacturer		Name	Version	
For R&S TS 8997 Test System	Rohde & Schwarz		EMC 32	10.60.10	
Tonsend RF Test System					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
Wireless Connectivity Tester	R&S	CMW270	1201.0002N75-102	Sep.13, 2024	Sep.12, 2025
PXA Signal Analyzer	Keysight	N9030A	MY55410512	Sep.28, 2024	Sep.27, 2025
MXG Vector Signal Generator	Keysight	N5182B	MY56200284	Sep.28, 2024	Sep.27, 2025
MXG Vector Signal Generator	Keysight	N5172B	MY56200301	Sep.28, 2024	Sep.27, 2025
DC power supply	Keysight	E3642A	MY55159130	Sep.28, 2024	Sep.27, 2025
Temperature & Humidity Chamber	SANMOOD	SG-80-CC-2	2088	Sep.28, 2024	Sep.27, 2025
Attenuator	Aglient	8495B	2814a12853	Sep.28, 2024	Sep.27, 2025
RF Control Unit	Tonscend	JS0806-2	23B80620666	Mar.25,2024	Mar.24,2025
Software					
Description	Manufacturer	Name		Version	
Tonsend SRD Test System	Tonsend	JS1120-3 RF Test System		V3.2.22	

Conducted Emissions					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
EMI Test Receiver	R&S	ESR3	101961	Sep.28, 2024	Sep.27, 2025
Two-Line V-Network	R&S	ENV216	101983	Sep.28, 2024	Sep.27, 2025
Artificial Mains Networks	Schwarzbeck	NSLK 8126	8126465	Sep.28, 2024	Sep.27, 2025
Software					
Description			Manufacturer	Name	Version
Test Software for Conducted Emissions			Farad	EZ-EMC	Ver. UL-3A1

Radiated Emissions					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
MXE EMI Receiver	KESIGHT	N9038A	MY56400036	Sep.28, 2024	Sep.27, 2025
Hybrid Log Periodic Antenna	TDK	HLP-3003C	130960	June 28, 2024	June.27 2027
Preamplifier	HP	8447D	2944A09099	Sep.28, 2024	Sep.27, 2025
EMI Measurement Receiver	R&S	ESR26	101377	Sep.28, 2024	Sep.27, 2025
Horn Antenna	TDK	HRN-0118	130939	Apr.29, 2022	Apr.28, 2025
Preamplifier	TDK	PA-02-0118	TRS-305-00067	Sep.28, 2024	Sep.27, 2025
Horn Antenna	Schwarzbeck	BBHA9170	697	Jun 30, 2024	Jun 29, 2027
Preamplifier	TDK	PA-02-2	TRS-307-00003	Sep.28, 2024	Sep.27, 2025
Preamplifier	TDK	PA-02-3	TRS-308-00002	Sep.28, 2024	Sep.27, 2025
Loop antenna	Schwarzbeck	1519B	00008	Dec.14, 2021	Dec.13, 2024
High Pass Filter	Wi	WHKX10-2700-3000-18000-40SS	23	Sep.28, 2024	Sep.27, 2025
Band Reject Filter	Wainwright	WRCJV8-2350-2400-2483.5-2533.5-40SS	4	Sep.28, 2024	Sep.27, 2025
Software					
Description			Manufacturer	Name	Version
Test Software for Radiated Emissions			Farad	EZ-EMC	Ver. UL-3A1

Other Instrument					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
Temperature humidity probe	OMEGA	ITHX-SD-5	18470007	Oct.8, 2024	Oct.7, 2025
Barometer	Yiyi	Baro	N/A	Oct.10, 2024	Oct.9, 2025
Attenuator	Agilent	8495B	2814a12853	Sep.28, 2024	Sep.27, 2025

7. ANTENNA PORT TEST RESULTS

7.1. CONDUCTED OUTPUT POWER

LIMITS

CFR 47 FCC Part15 (15.247) Subpart C ISED RSS-247 ISSUE 3			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247(b)(3) ISED RSS-247 5.4 (d)	AVG Output Power	1 watt or 30 dBm	2400-2483.5

TEST PROCEDURE


Refer to ANSI C63.10-2013 clause 11.9.2.3.1.

Connect the EUT to a low loss RF cable from the antenna port to the power sensor (video bandwidth is greater than the occupied bandwidth).

Measure peak emission level, the indicated level is the average output power, after any corrections for external attenuators and cables.

The test result in dBm by adding $[10 \log (1 / D)]$, where D is the duty cycle.

TEST SETUP



TEST ENVIRONMENT

Temperature	24.2°C	Relative Humidity	55.5%
Atmosphere Pressure	101.3kPa	Test Voltage	AC 120V 60Hz

TEST DATE / ENGINEER

Test Date	October 23, 2024	Test By	Walker Yuan
-----------	------------------	---------	-------------

TEST RESULTS

Please refer to section "Test Data" - Appendix B&B1

7.2. 6DB BANDWIDTH AND 99% OCCUPIED BANDWIDTH

LIMITS

CFR 47 FCC Part15 (15.247) Subpart C ISED RSS-247 ISSUE 3			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247(a)(2) ISED RSS-247 5.2 (a)	6 dB Bandwidth	≥ 500 kHz	2400-2483.5
ISED RSS-Gen Clause 6.7	99 % Occupied Bandwidth	For reporting purposes only.	2400-2483.5

TEST PROCEDURE


Refer to ANSI C63.10-2013 clause 11.8 for DTS bandwidth and clause 6.9 for Occupied Bandwidth.

Connect the EUT to the spectrum analyzer and use the following settings:

Center Frequency	The center frequency of the channel under test
Frequency Span	For 6 dB Bandwidth: Enough to capture all products of the modulation carrier emission For 99 % Occupied Bandwidth: Between 1.5 times and 5.0 times the OBW
Detector	Peak
RBW	For 6 dB Bandwidth: 100 kHz For 99 % Occupied Bandwidth: 1 % to 5 % of the occupied bandwidth
VBW	For 6 dB Bandwidth: $\geq 3 \times$ RBW For 99 % Occupied Bandwidth: $\geq 3 \times$ RBW
Trace	Max hold
Sweep	Auto couple

a) Use the 99 % power bandwidth function of the instrument, allow the trace to stabilize and report the measured bandwidth.

b) Allow the trace to stabilize and measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

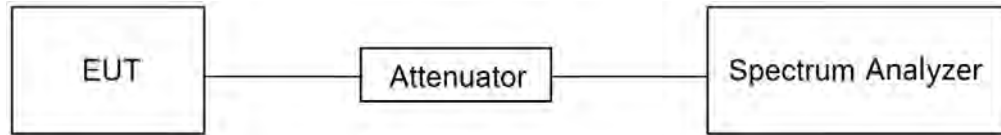TEST SETUP**TEST ENVIRONMENT**

Temperature	24.2℃	Relative Humidity	55.5%
Atmosphere Pressure	101.3kPa	Test Voltage	AC 120V 60Hz

TEST DATE / ENGINEER

Test Date	October 23, 2024	Test By	Walker Yuan
-----------	------------------	---------	-------------

TEST RESULTS

Please refer to section "Test Data" - Appendix C&D, C1&D1

7.3. POWER SPECTRAL DENSITY

LIMITS

CFR 47 FCC Part15 (15.247) Subpart C ISED RSS-247 ISSUE 3			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC §15.247 (e) ISED RSS-247 5.2 (b)	Power Spectral Density	8 dBm in any 3 kHz band	2400-2483.5

TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 11.10.2.


Connect the EUT to the spectrum analyzer and use the following settings:

Center Frequency	The center frequency of the channel under test
Detector	power averaging (rms)
RBW	$3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$
VBW	$\geq 3 \times \text{RBW}$
Span	1.5 x OBW bandwidth
Trace	Employ trace averaging(rms)mode over a minimum of 100 traces
Sweep time	Auto couple

Allow trace to fully stabilize and use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

TEST SETUP

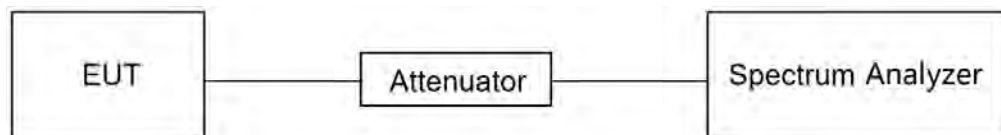

TEST ENVIRONMENT

Temperature	24.2°C	Relative Humidity	55.5%
Atmosphere Pressure	101.3kPa	Test Voltage	AC 120V 60Hz

TEST DATE / ENGINEER

Test Date	October 23, 2024	Test By	Walker Yuan
-----------	------------------	---------	-------------

TEST RESULTS

Please refer to section "Test Data" - Appendix E&E1

7.4. CONDUCTED BAND EDGE AND SPURIOUS EMISSION

TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 11.11 and 11.13.

Connect the EUT to the spectrum analyzer and use the following settings for reference level measurement:

Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	100 kHz
VBW	$\geq 3 \times \text{RBW}$
Span	1.5 x DTS bandwidth
Trace	Max hold
Sweep time	Auto couple.


Allow trace to fully stabilize and use the peak marker function to determine the maximum PSD level.

Change the settings for emission level measurement:

Span	Set the center frequency and span to encompass frequency range to be measured
Detector	Peak
RBW	100 kHz
VBW	$\geq 3 \times \text{RBW}$
measurement points	$\geq \text{span}/\text{RBW}$
Trace	Max hold
Sweep time	Auto couple.

Allow trace to fully stabilize and use the peak marker function to determine the maximum PSD level. Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified in 11.11.

TEST SETUP

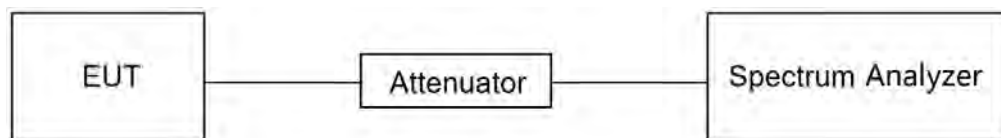

TEST ENVIRONMENT

Temperature	24.2°C	Relative Humidity	55.5%
Atmosphere Pressure	101.3kPa	Test Voltage	AC 120V 60Hz

TEST DATE / ENGINEER

Test Date	October 23, 2024	Test By	Walker Yuan
-----------	------------------	---------	-------------

TEST RESULTS

Please refer to section "Test Data" - Appendix F&G, F1&G1

7.5. DUTY CYCLE


LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 11.6 Zero – Span Spectrum Analyzer method.

TEST SETUP

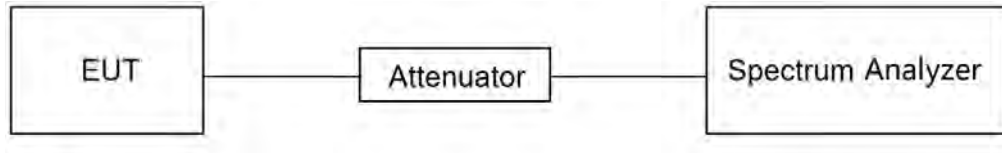

TEST ENVIRONMENT

Temperature	24.2°C	Relative Humidity	55.5%
Atmosphere Pressure	101.3kPa	Test Voltage	AC 120V 60Hz

TEST DATE / ENGINEER

Test Date	October 23, 2024	Test By	Walker Yuan
-----------	------------------	---------	-------------

TEST RESULTS

Please refer to section "Test Data" - Appendix A&A1

8. RADIATED TEST RESULTS

LIMITS

Please refer to CFR 47 FCC §15.205 and §15.209.

Please refer to ISED RSS-GEN Clause 8.9 and Clause 8.10.

Radiation Disturbance Test Limit for FCC (Class B) (9 kHz ~ 1 GHz)

Emissions radiated outside of the specified frequency bands above 30 MHz			
Frequency Range (MHz)	Field Strength Limit ($\mu\text{V/m}$) at 3 m	Field Strength Limit (dB $\mu\text{V/m}$) at 3 m	
		Quasi-Peak	
30 - 88	100	40	
88 - 216	150	43.5	
216 - 960	200	46	
Above 960	500	54	
Above 1000	500	Peak	Average
		74	54

FCC Emissions radiated outside of the specified frequency bands below 30 MHz		
Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30

ISED General field strength limits at frequencies below 30 MHz

Table 6 – General field strength limits at frequencies below 30 MHz		
Frequency	Magnetic field strength (H-Field) ($\mu\text{A/m}$)	Measurement distance (m)
9 - 490 kHz ^{Note 1}	6.37/F (F in kHz)	300
490 - 1705 kHz	63.7/F (F in kHz)	30
1.705 - 30 MHz	0.08	30

Note 1: The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.

ISED Restricted bands please refer to ISED RSS-GEN Clause 8.10

MHz	MHz	GHz
0.090 - 0.110	149.9 - 150.05	9.0 - 9.2
0.495 - 0.505	156.52475 - 156.52525	9.3 - 9.5
2.1735 - 2.1905	156.7 - 156.9	10.6 - 12.7
3.020 - 3.026	162.0125 - 167.17	13.25 - 13.4
4.125 - 4.128	167.72 - 173.2	14.47 - 14.6
4.17725 - 4.17775	240 - 285	15.35 - 16.2
4.20725 - 4.20775	322 - 335.4	17.7 - 21.4
5.677 - 5.683	399.9 - 410	22.01 - 23.12
6.215 - 6.218	608 - 614	23.6 - 24.0
6.26775 - 6.26825	960 - 1427	31.2 - 31.8
6.31175 - 6.31225	1435 - 1626.5	36.43 - 36.5
8.291 - 8.294	1645.5 - 1646.5	Above 38.6
8.362 - 8.366	1660 - 1710	
8.37625 - 8.38675	1718.8 - 1722.2	
8.41425 - 8.41475	2200 - 2300	
12.29 - 12.293	2310 - 2390	
12.51975 - 12.52025	2483.5 - 2500	
12.57675 - 12.57725	2655 - 2900	
13.36 - 13.41	3260 - 3267	
16.42 - 16.423	3332 - 3339	
16.69475 - 16.69525	3345.8 - 3358	
16.80425 - 16.80475	3500 - 4400	
25.5 - 25.67	4500 - 5150	
37.5 - 38.25	5350 - 5460	
73 - 74.6	7250 - 7750	
74.8 - 75.2	8025 - 8500	
108 - 138		

Note 1: Certain frequency bands listed in table 7 and in bands above 38.6 GHz are designated for licence-exempt applications. These frequency bands and the requirements that apply to related devices are set out in the 200 and 300 series of RSSs.

FCC Restricted bands of operation refer to FCC §15.205 (a):

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

Note: ¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

²Above 38.6c

TEST PROCEDURE

Below 30 MHz

The setting of the spectrum analyzer

RBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
VBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
Sweep	Auto

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.4.
2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both Horizontal, Face-on and Face-off polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a 1 m height antenna tower.
5. The radiated emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz Radiated emission limits in these three bands are based on measurements employing an average detector.
6. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak and average detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak and average detector and reported.
7. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30m open field site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field site based on KDB 414788.
8. The limits in CFR 47, Part 15, Subpart C, paragraph 15.209 (a), are identical to those in RSS-GEN Section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of 377Ω . For example, the measurement frequency X kHz resulted in a level of Y dBuV/m, which is equivalent to $Y-51.5 = Z$ dBuA/m, which has the same margin, W dB, to the corresponding RSS-GEN Table 6 limit as it has to be 15.209(a) limit.

Below 1 GHz and above 30 MHz

The setting of the spectrum analyzer

RBW	120 kHz
VBW	300 kHz
Sweep	Auto
Detector	Peak/QP
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.5.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.


Above 1 GHz

The setting of the spectrum analyzer

RBW	1 MHz
VBW	PEAK: 3 MHz AVG: see note 6
Sweep	Auto
Detector	Peak
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.6.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 1.5 m above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement above 1 GHz, the emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the limit specified in Section 15.209.
6. For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause 7.5. ON TIME AND DUTY CYCLE.

X axis, Y axis, Z axis positions:

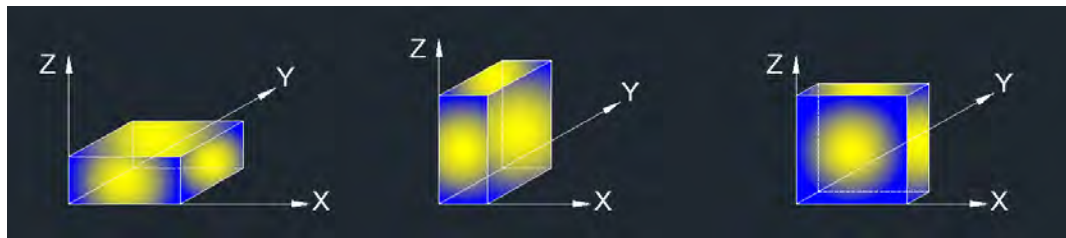

Note 1: For all radiated test, EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.

Note 2: The EUT was fully exercised with external accessories during the test. In the case of multiple accessory external ports, an external accessory shall be connected to one of each type of port.

For Restricted Bandedge:

Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. PK=Peak: Peak detector.
4. AV=Average: VBW=1/Ton, where: Ton is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.5.
6. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
7. Both horizontal and vertical have been tested, only the worst data was recorded in the report.
8. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious emission (9 kHz ~ 30 MHz):

Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the QP limit, the QP result is deemed to comply with QP limit.
3. All 3 polarizations (Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.
4. All modes have been tested, but only the worst data was recorded in the report.
5. $\text{dBuA/m} = \text{dBuV/m} - 20\log_{10}[120\pi] = \text{dBuV/m} - 51.5$

For Radiate Spurious Emission (30 MHz ~ 1 GHz):

Note:

1. Result Level = Read Level + Correct Factor.
2. If the peak values are less than the QP limit, the QP result is deemed to comply with QP limit.
3. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious Emission (1 GHz ~ 3 GHz):

Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. AVG: VBW=1/Ton, where: Ton is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.5.
6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
8. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious Emission (3 GHz ~ 18 GHz):

Note:


1. Peak Result = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. AVG: $VBW=1/T_{on}$, where: T_{on} is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.5.
6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
8. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious emission (18 GHz ~ 26 GHz):


Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. All modes have been tested, but only the worst data was recorded in the report.


TEST SETUP

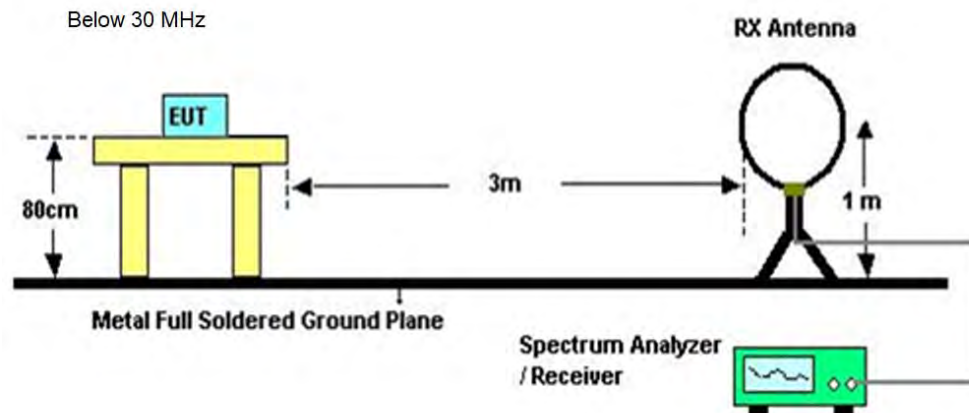

Below 1 GHz and above 30 MHz

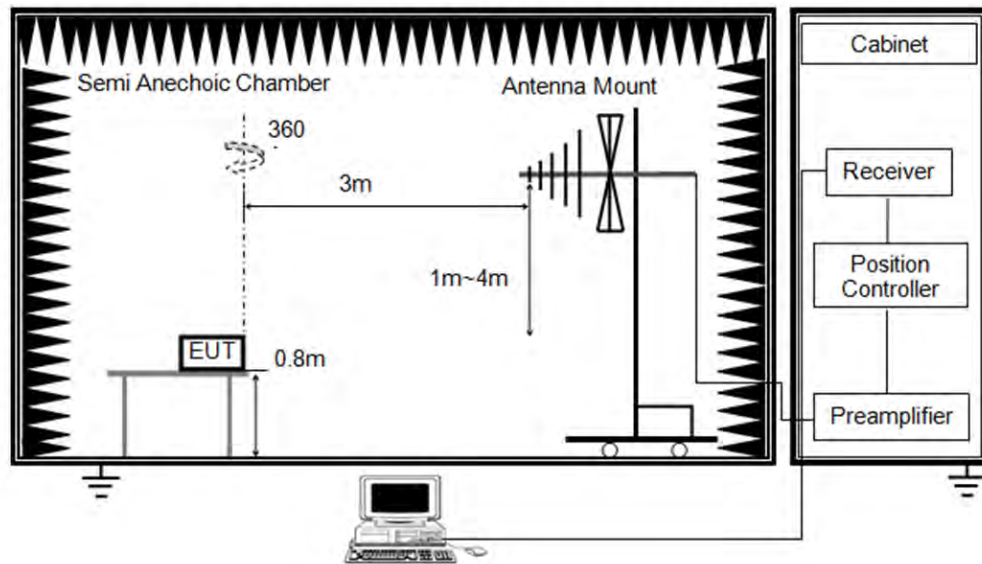

Above 1GHz

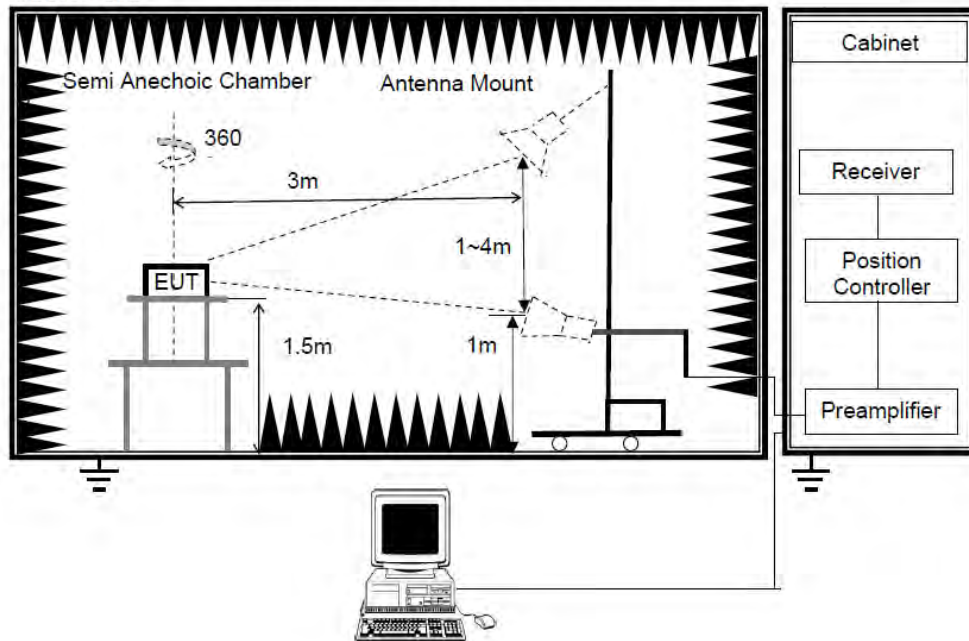

TEST ENVIRONMENT

Temperature	20.6°C	Relative Humidity	56.7%
Atmosphere Pressure	101kPa	Test Voltage	


TEST DATE / ENGINEER

Test Date	February 17, 2025	Test By	Mason Wang
-----------	-------------------	---------	------------

TEST RESULTS


8.1. RESTRICTED BANDEDGE

Test Mode:	802.11b PK	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

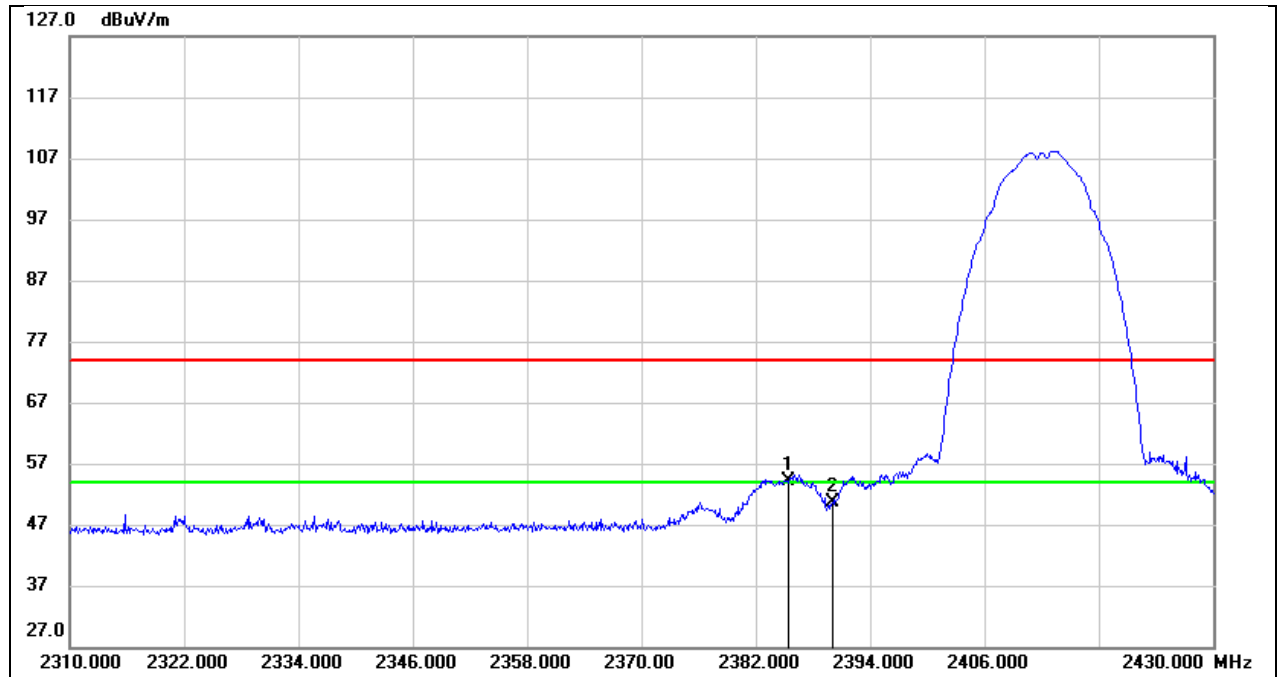


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2385.360	22.51	31.71	54.22	74.00	-19.78	peak
2	2390.000	18.82	31.73	50.55	74.00	-23.45	peak

Test Mode:	802.11b AV	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

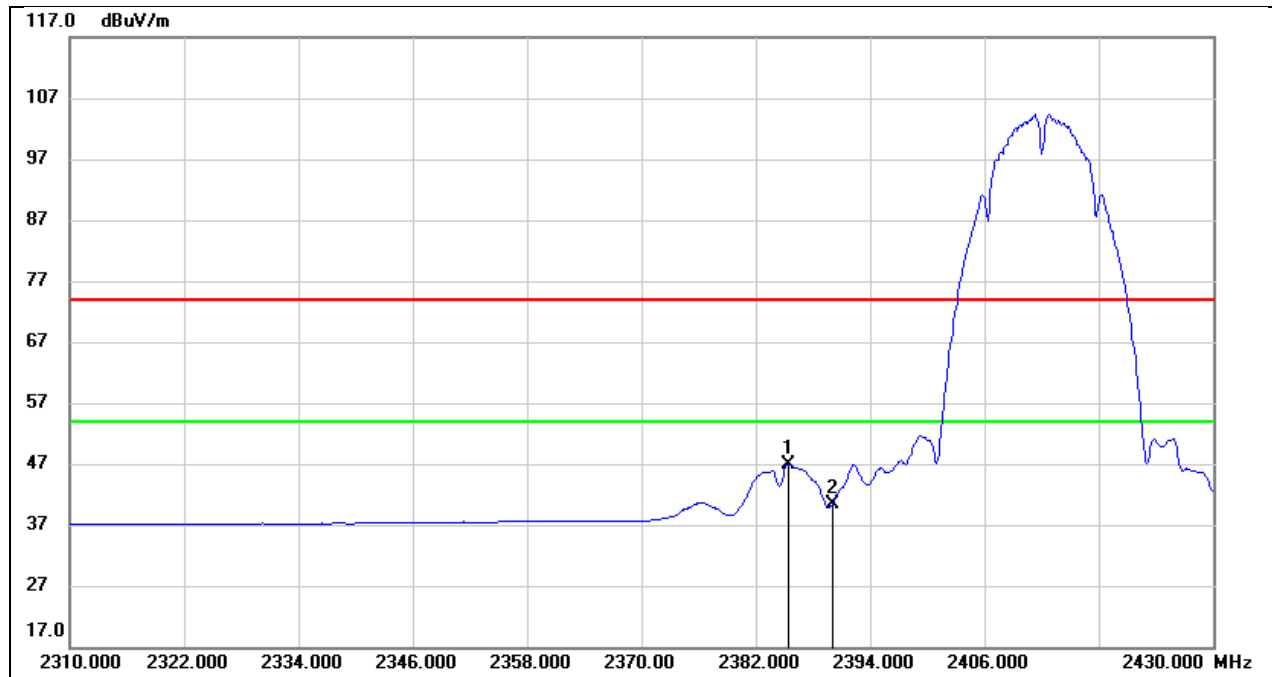


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2385.360	15.10	31.71	46.81	54.00	-7.19	AVG
2	2390.000	8.75	31.73	40.48	54.00	-13.52	AVG

Test Mode:	802.11b PK	Frequency(MHz):	2412
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

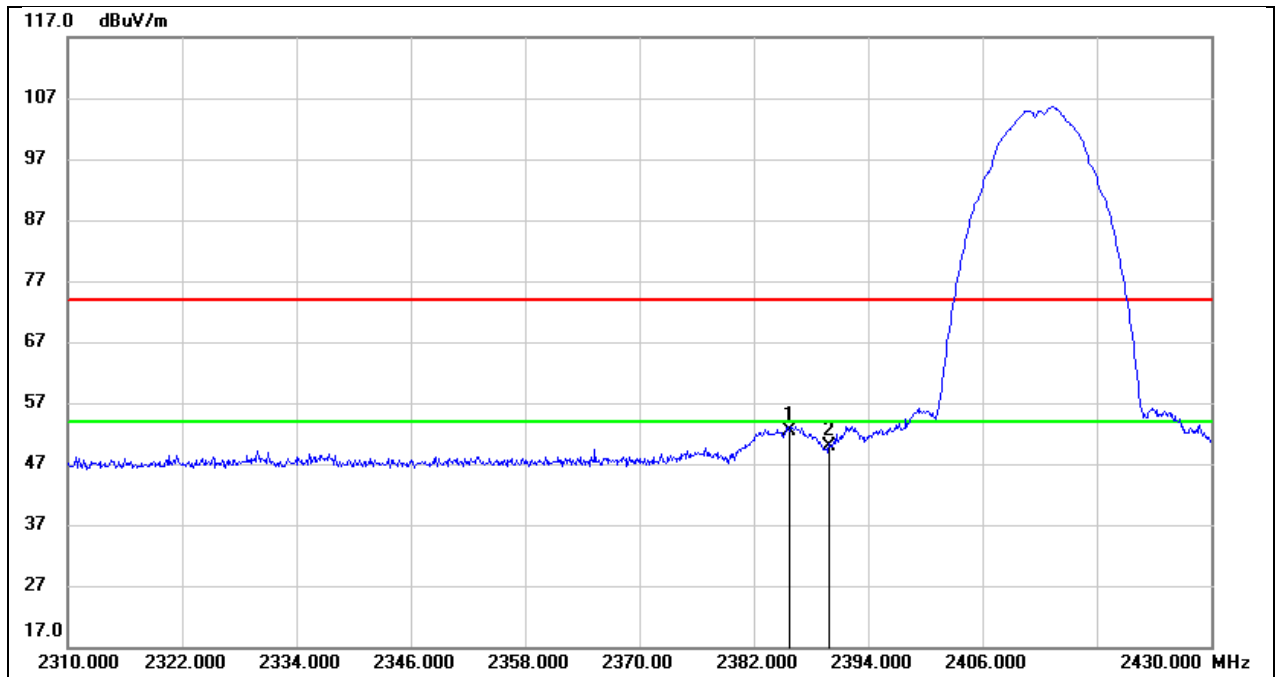


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2385.720	19.94	32.53	52.47	74.00	-21.53	peak
2	2390.000	17.27	32.55	49.82	74.00	-24.18	peak

Test Mode:	802.11b AV	Frequency(MHz):	2412
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

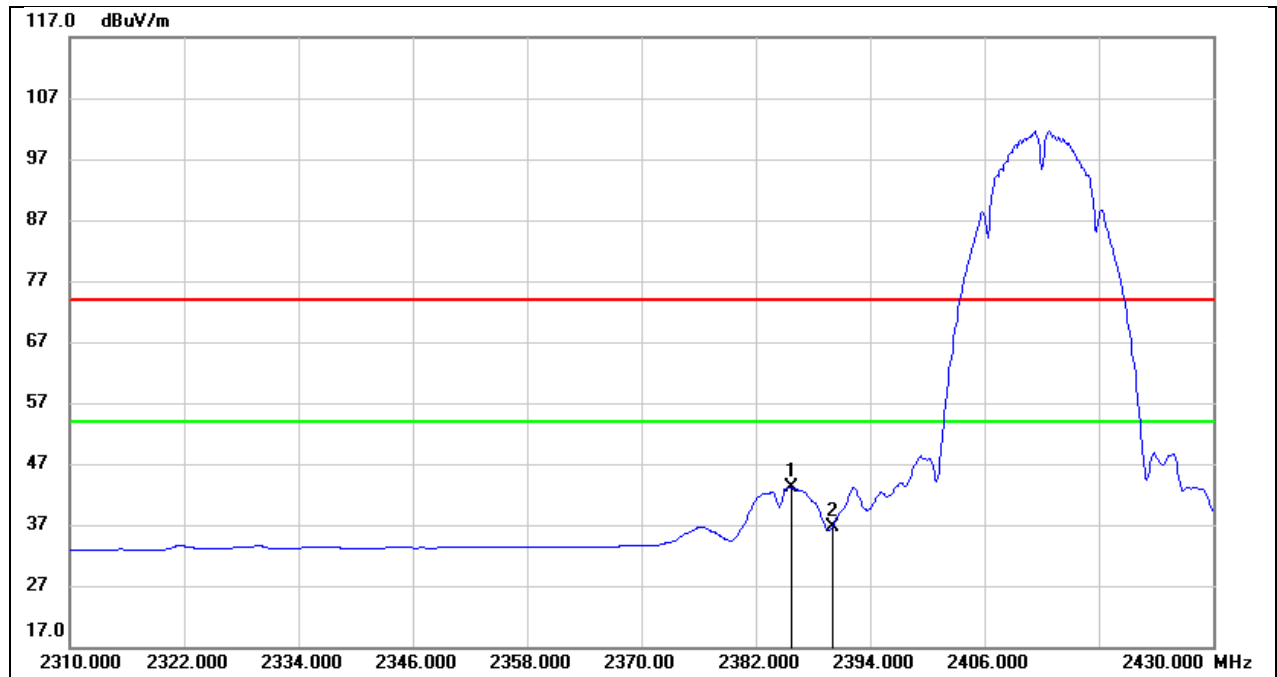


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2385.720	10.67	32.53	43.20	54.00	-10.80	AVG
2	2390.000	4.16	32.55	36.71	54.00	-17.29	AVG

Test Mode:	802.11b PK	Frequency(MHz):	2462
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

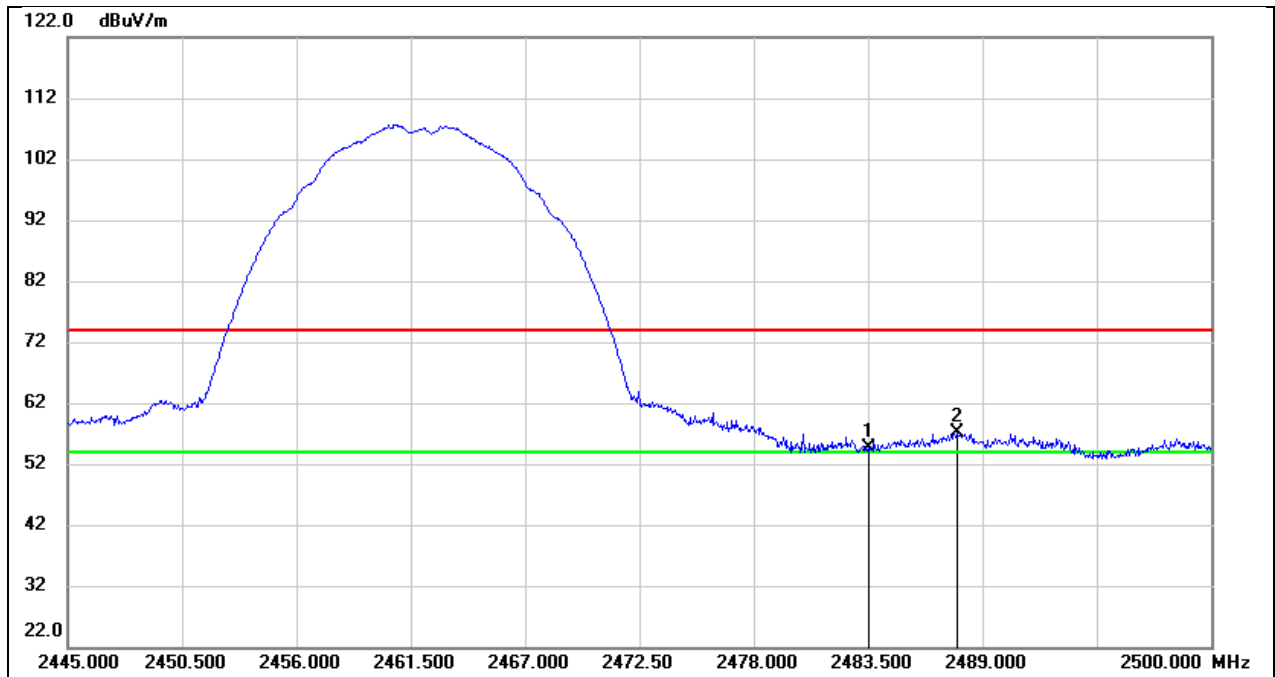


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	22.71	32.00	54.71	74.00	-19.29	peak
2	2487.790	25.05	32.01	57.06	74.00	-16.94	peak

Test Mode:	802.11b AV	Frequency(MHz):	2462
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

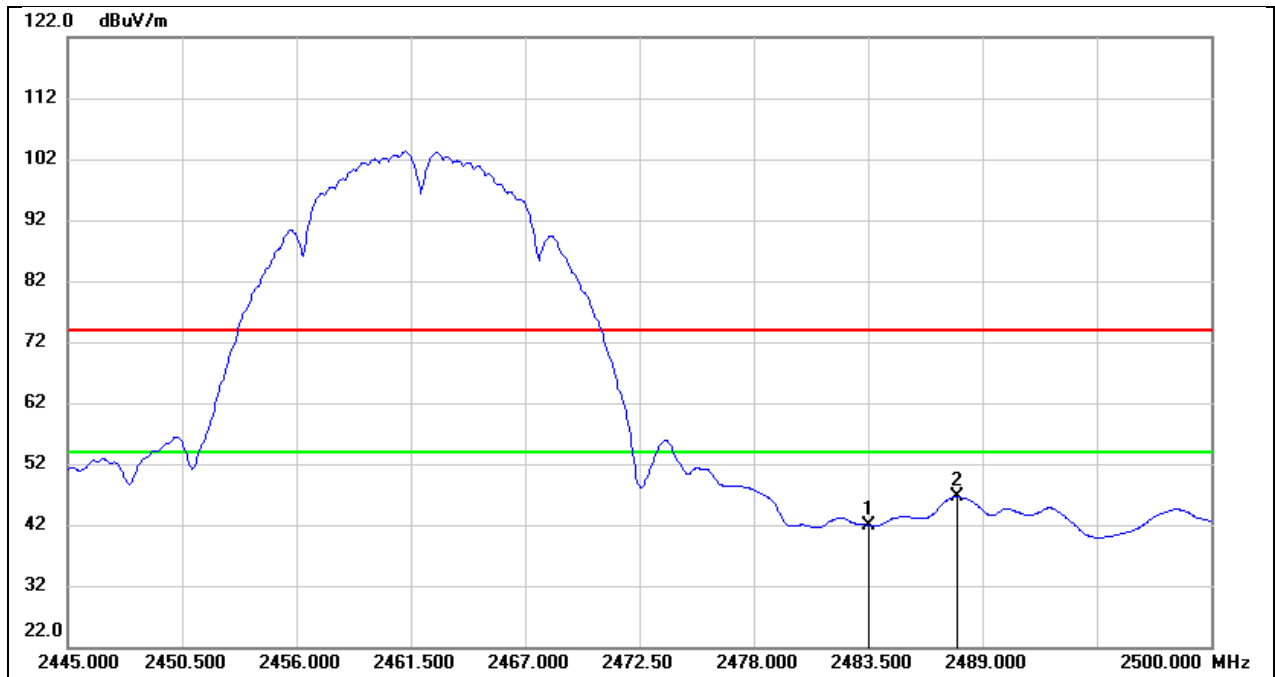


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	9.91	32.00	41.91	54.00	-12.09	AVG
2	2487.790	14.63	32.01	46.64	54.00	-7.36	AVG

Test Mode:	802.11g PK	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

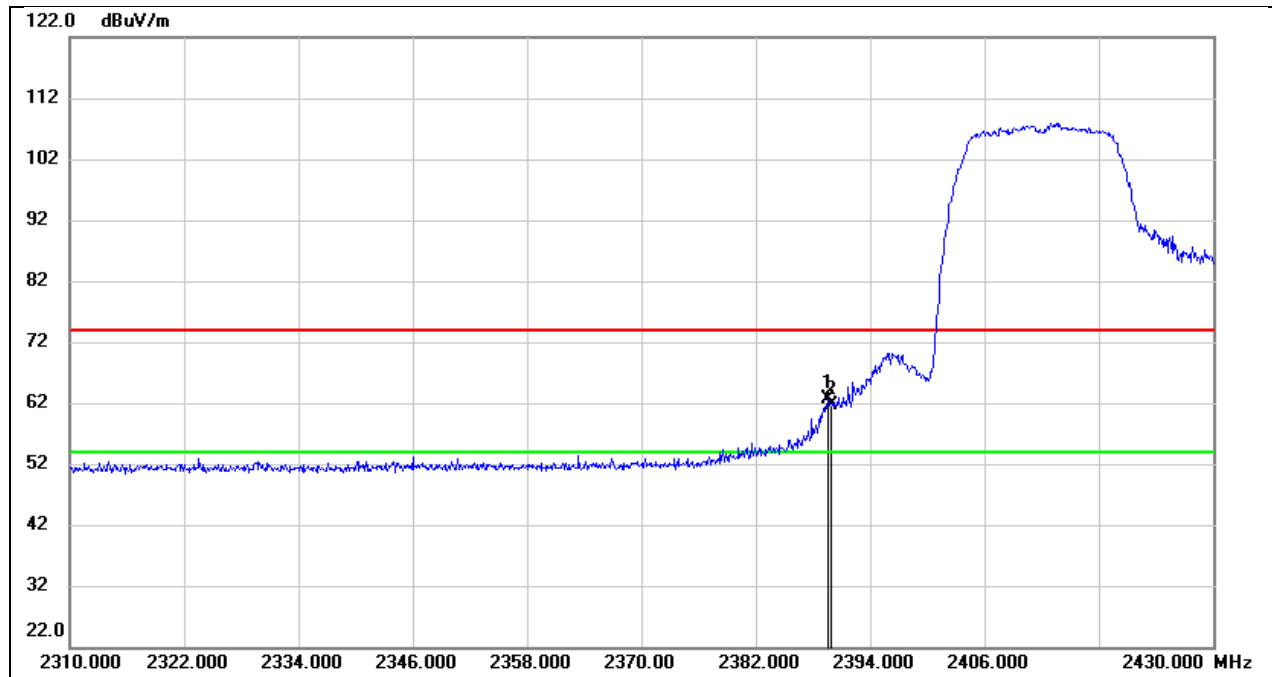


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.560	30.89	31.73	62.62	74.00	-11.38	peak
2	2390.000	29.84	31.73	61.57	74.00	-12.43	peak

Test Mode:	802.11g AV	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

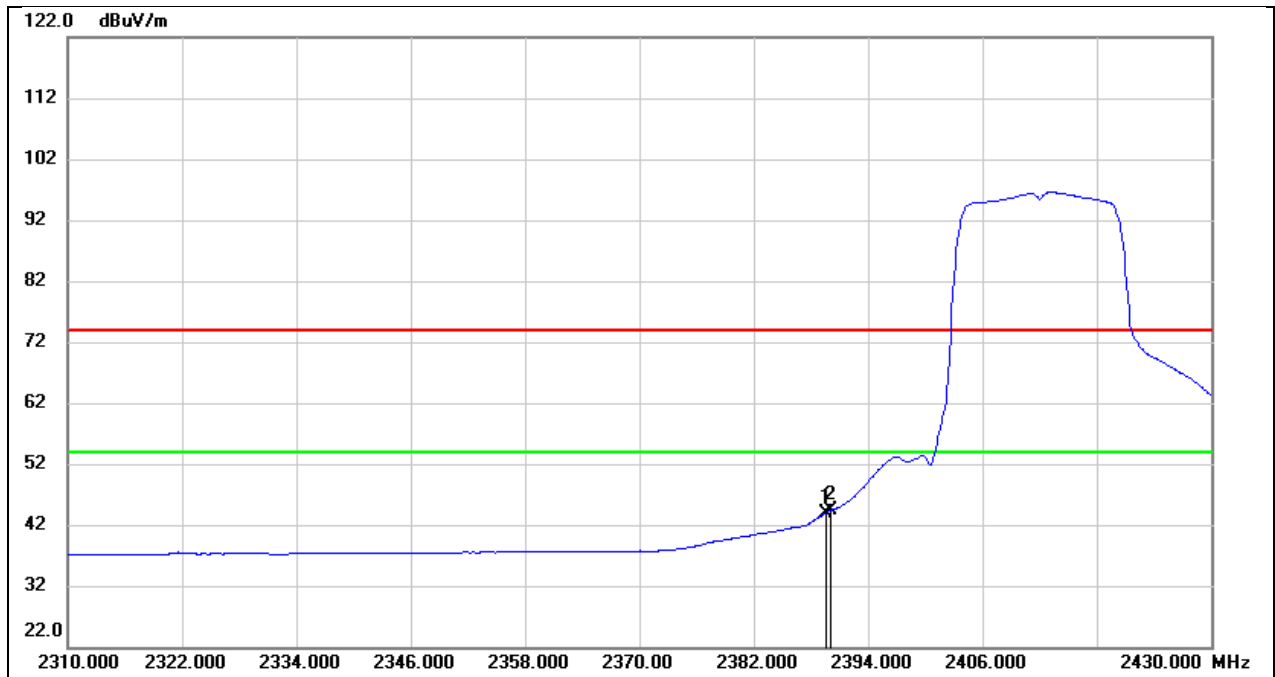


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.560	12.26	31.73	43.99	54.00	-10.01	AVG
2	2390.000	12.68	31.73	44.41	54.00	-9.59	AVG

Test Mode:	802.11g PK	Frequency(MHz):	2462
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

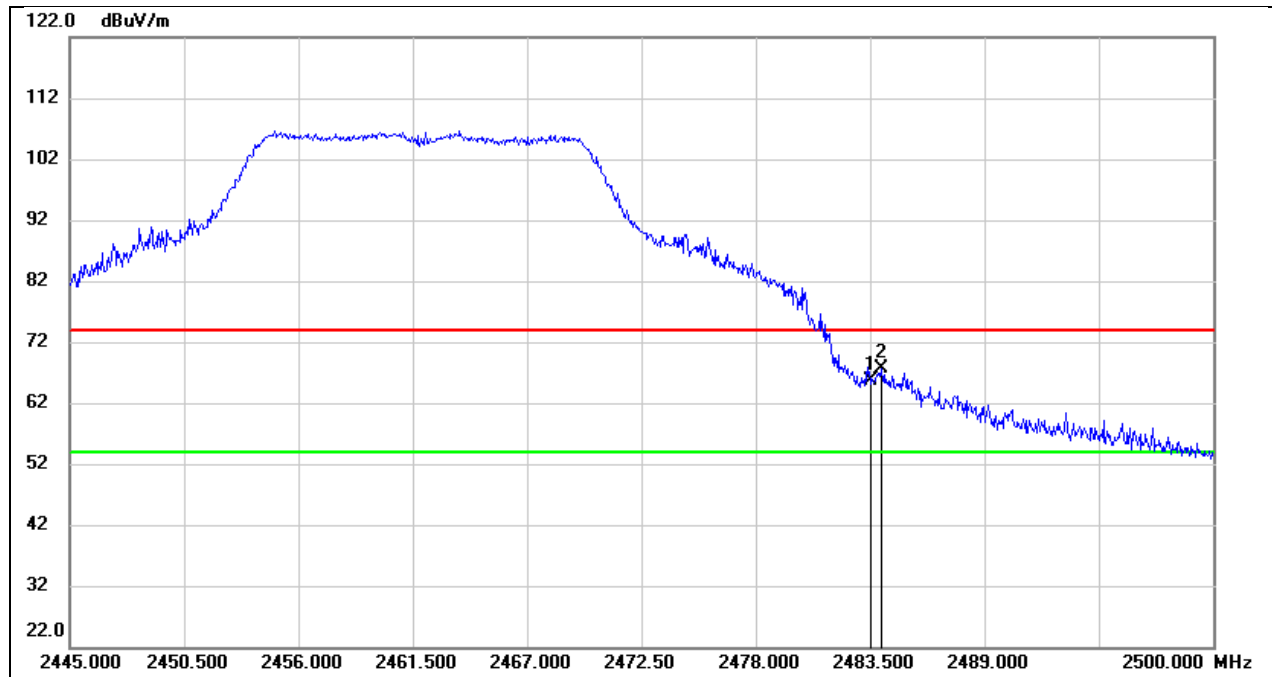


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	33.72	32.00	65.72	74.00	-8.28	peak
2	2484.050	35.51	32.00	67.51	74.00	-6.49	peak

Test Mode:	802.11g AV	Frequency(MHz):	2462
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

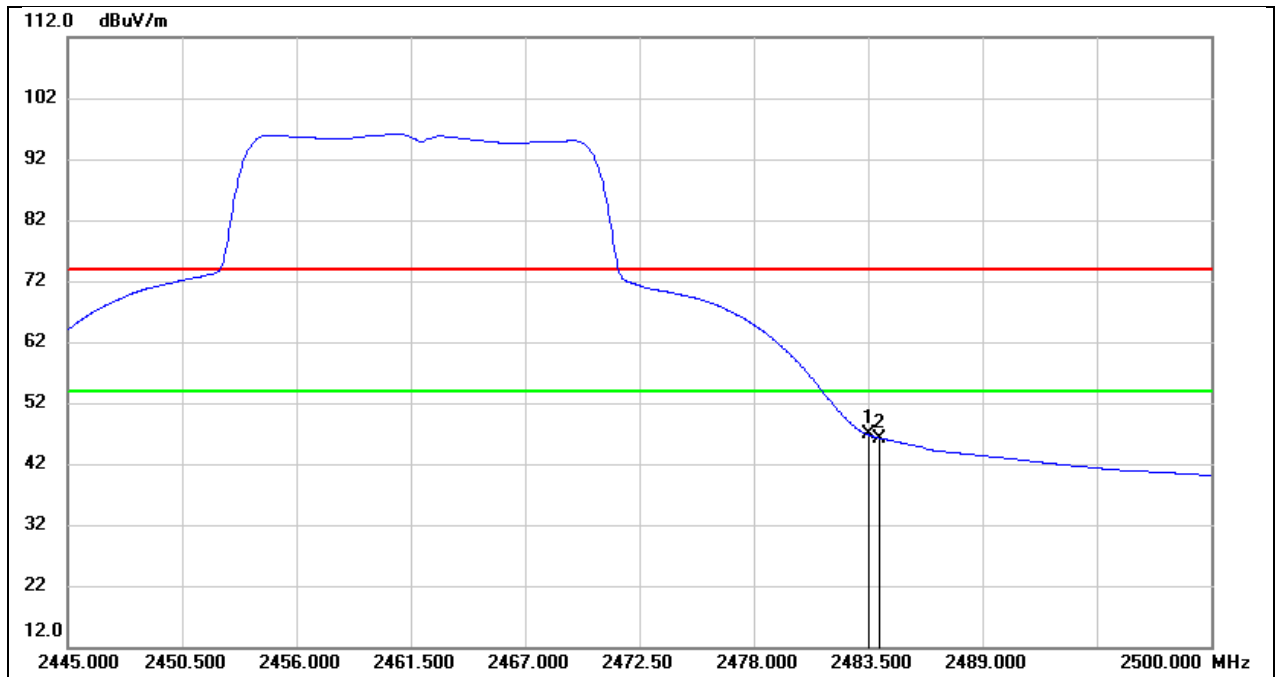


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	14.79	32.00	46.79	54.00	-7.21	AVG
2	2484.050	14.25	32.00	46.25	54.00	-7.75	AVG

Test Mode:	802.11n HT20 PK	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

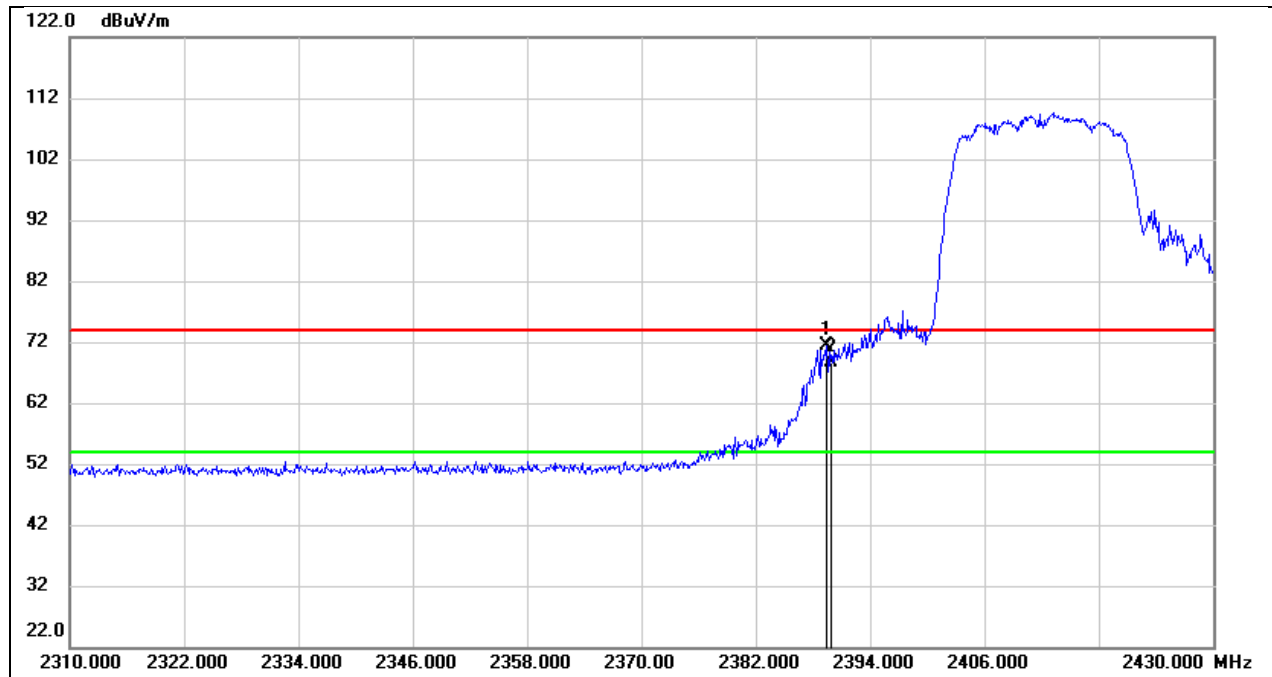


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.440	39.74	31.73	71.47	74.00	-2.53	peak
2	2390.000	36.98	31.73	68.71	74.00	-5.29	peak

Test Mode:	802.11n HT20 AV	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

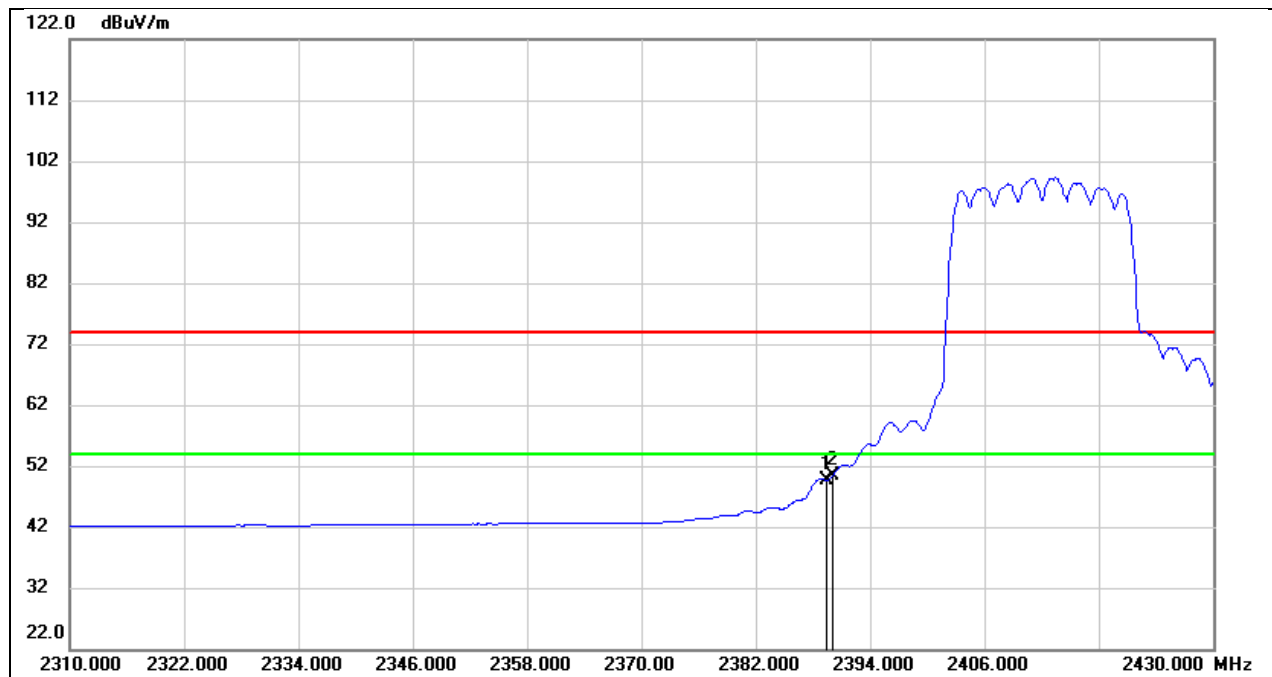


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.440	17.90	31.73	49.63	54.00	-4.37	AVG
2	2390.000	18.64	31.73	50.37	54.00	-3.63	AVG

Test Mode:	802.11n HT20 PK	Frequency(MHz):	2462
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

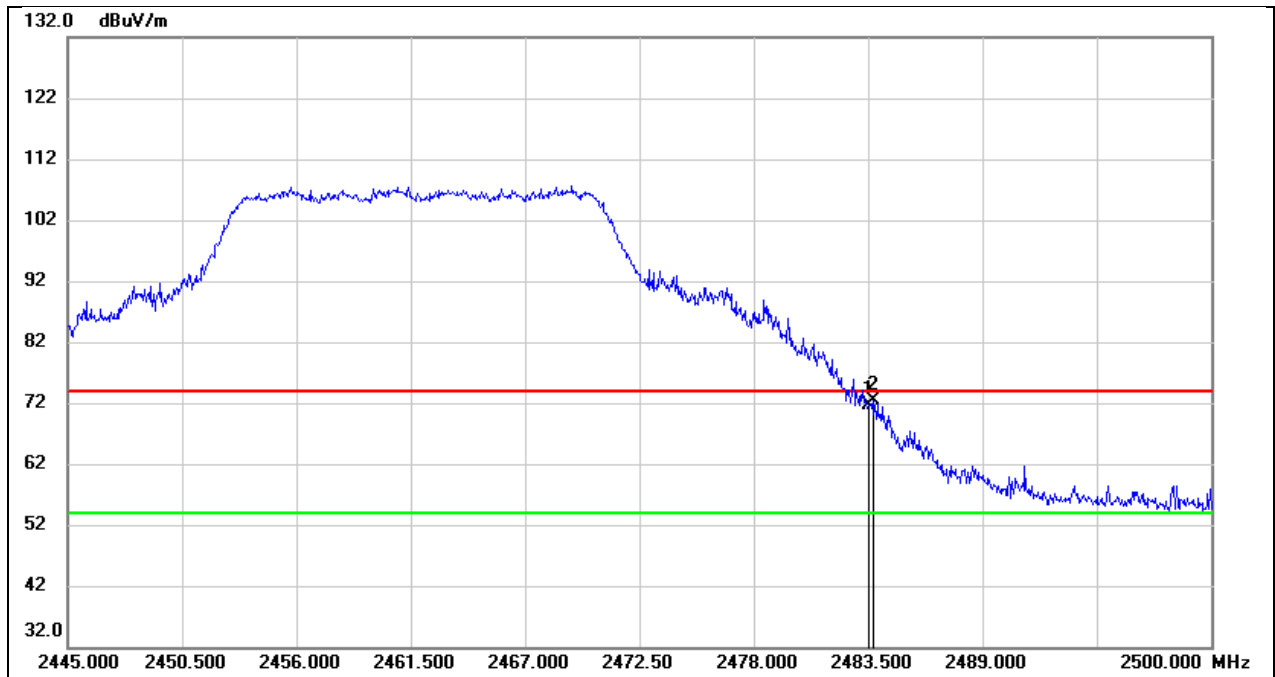


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	39.73	32.00	71.73	74.00	-2.27	peak
2	2483.720	40.37	32.00	72.37	74.00	-1.63	peak

Test Mode:	802.11n HT20 AV	Frequency(MHz):	2462
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

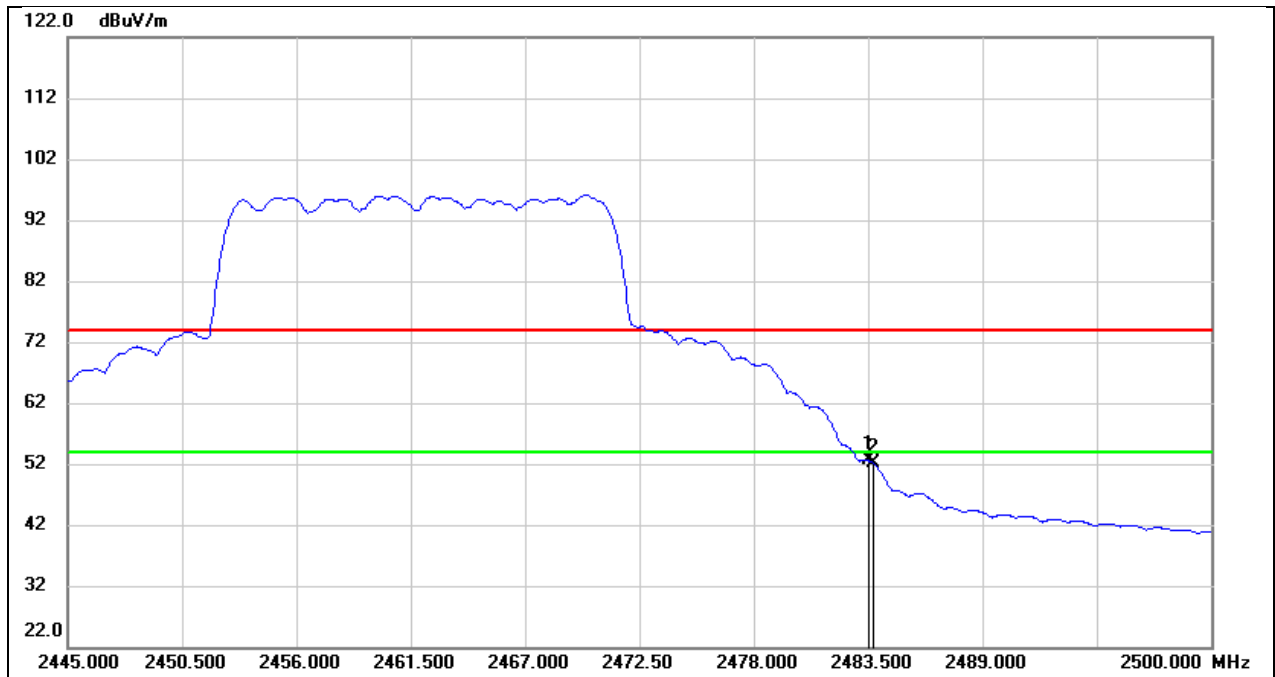


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	20.61	32.00	52.61	54.00	-1.39	AVG
2	2483.720	20.10	32.00	52.10	54.00	-1.90	AVG

Test Mode:	802.11n HT40 PK	Frequency(MHz):	2422
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

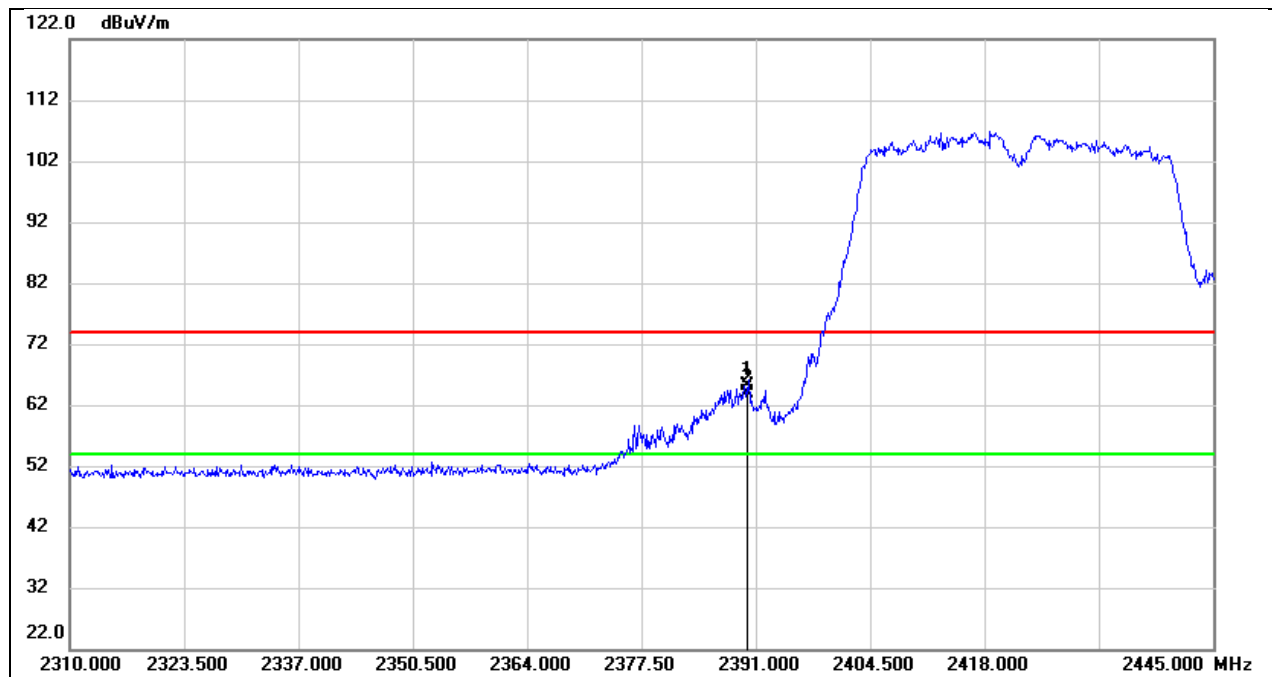


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.785	33.49	31.73	65.22	74.00	-8.78	peak
2	2390.000	32.08	31.73	63.81	74.00	-10.19	peak

Test Mode:	802.11n HT40 AV	Frequency(MHz):	2422
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

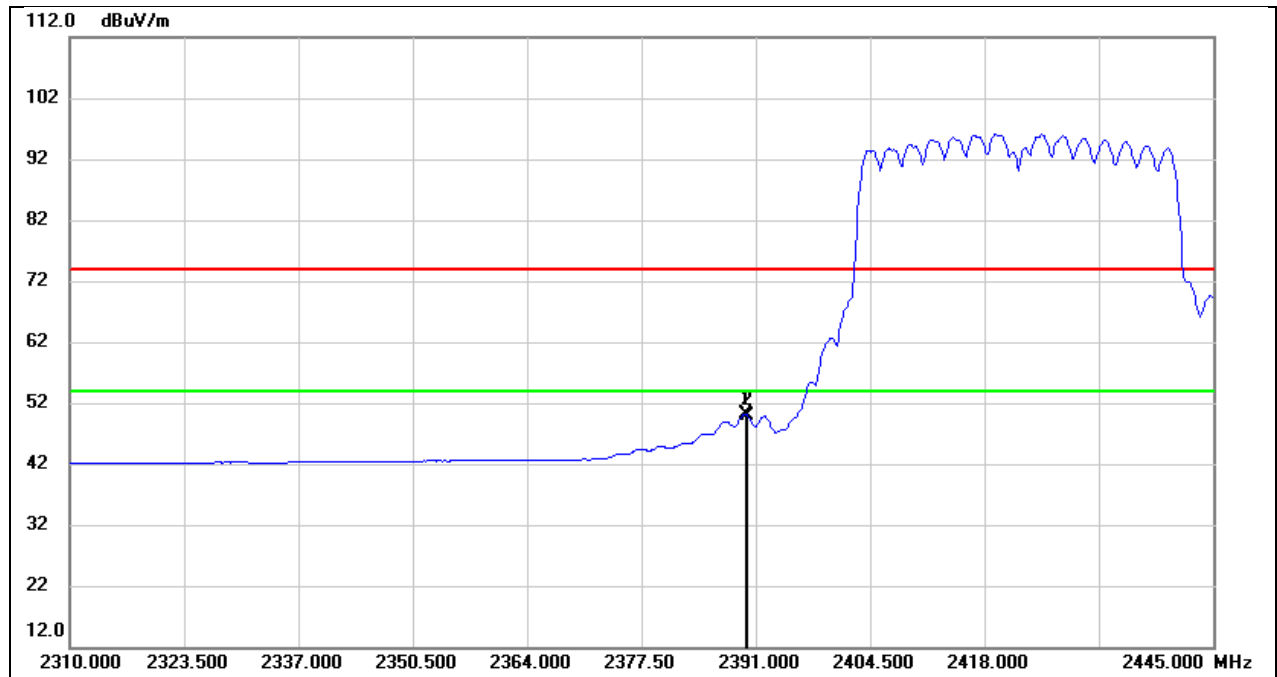


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.785	18.38	31.73	50.11	54.00	-3.89	AVG
2	2390.000	18.14	31.73	49.87	54.00	-4.13	AVG

Test Mode:	802.11n HT40 PK	Frequency(MHz):	2452
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

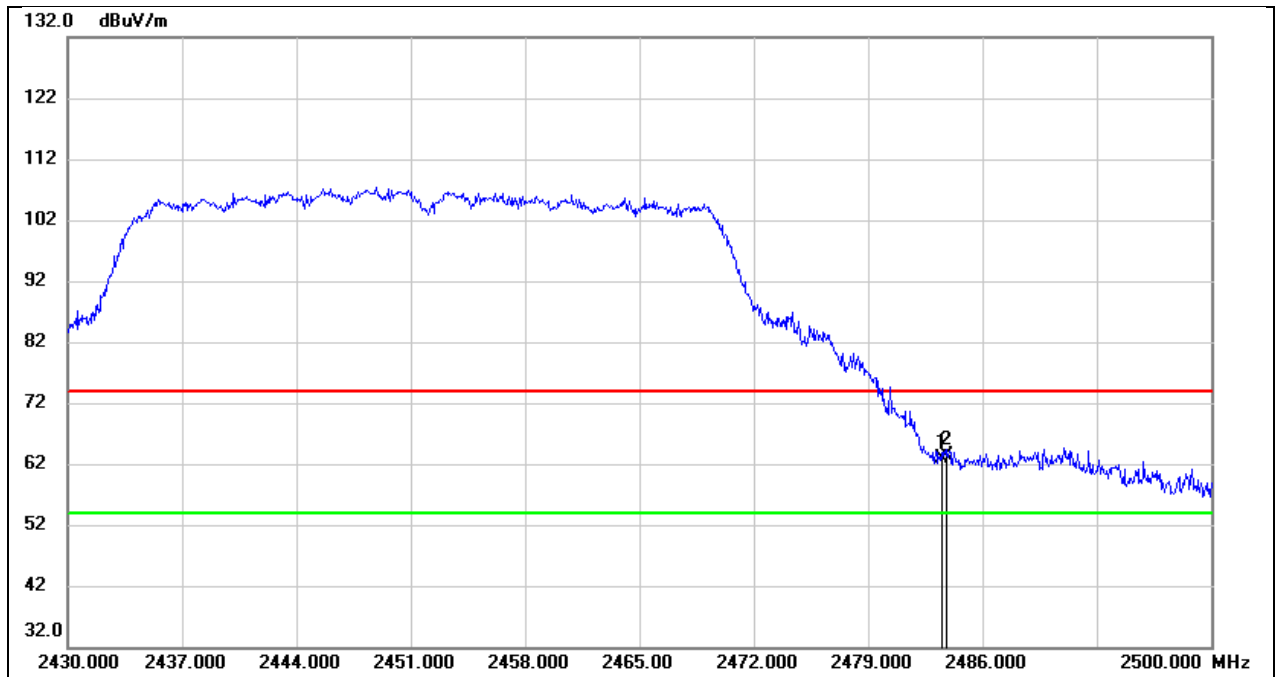


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	30.88	32.00	62.88	74.00	-11.12	peak
2	2483.760	31.36	32.00	63.36	74.00	-10.64	peak

Test Mode:	802.11n HT40 AV	Frequency(MHz):	2452
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

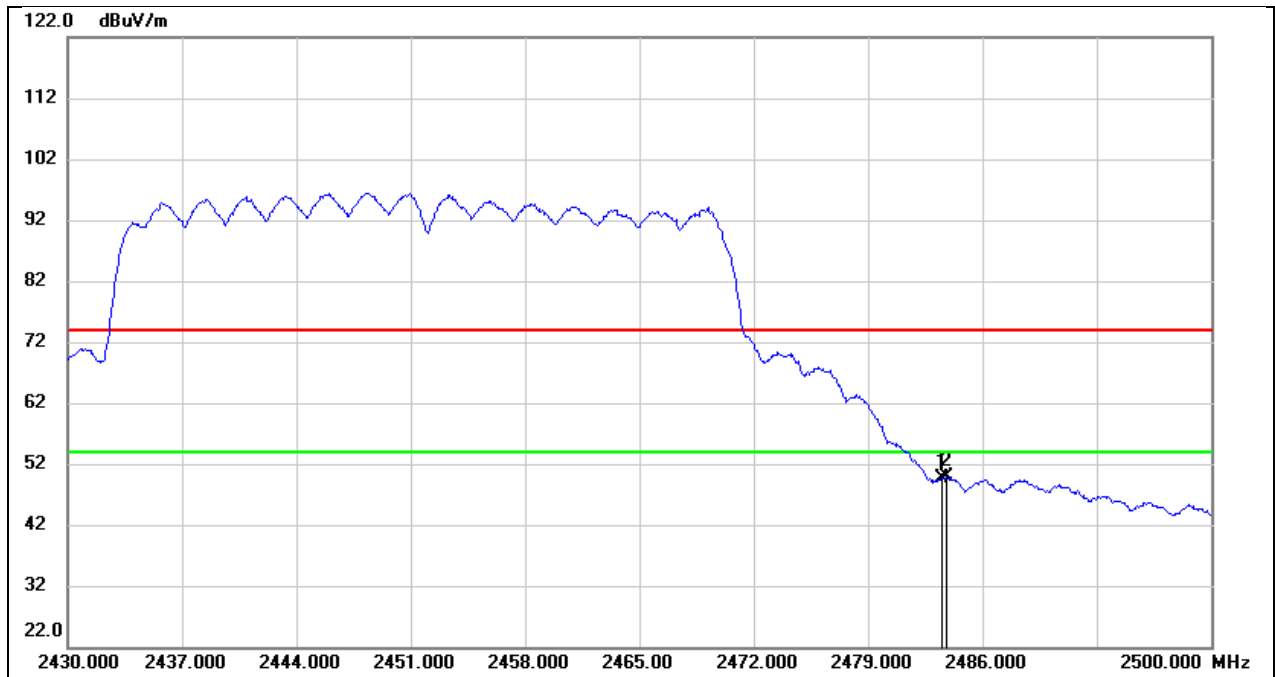


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	17.64	32.00	49.64	54.00	-4.36	AVG
2	2483.760	17.89	32.00	49.89	54.00	-4.11	AVG

Test Mode:	802.11ax HE20 PK	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

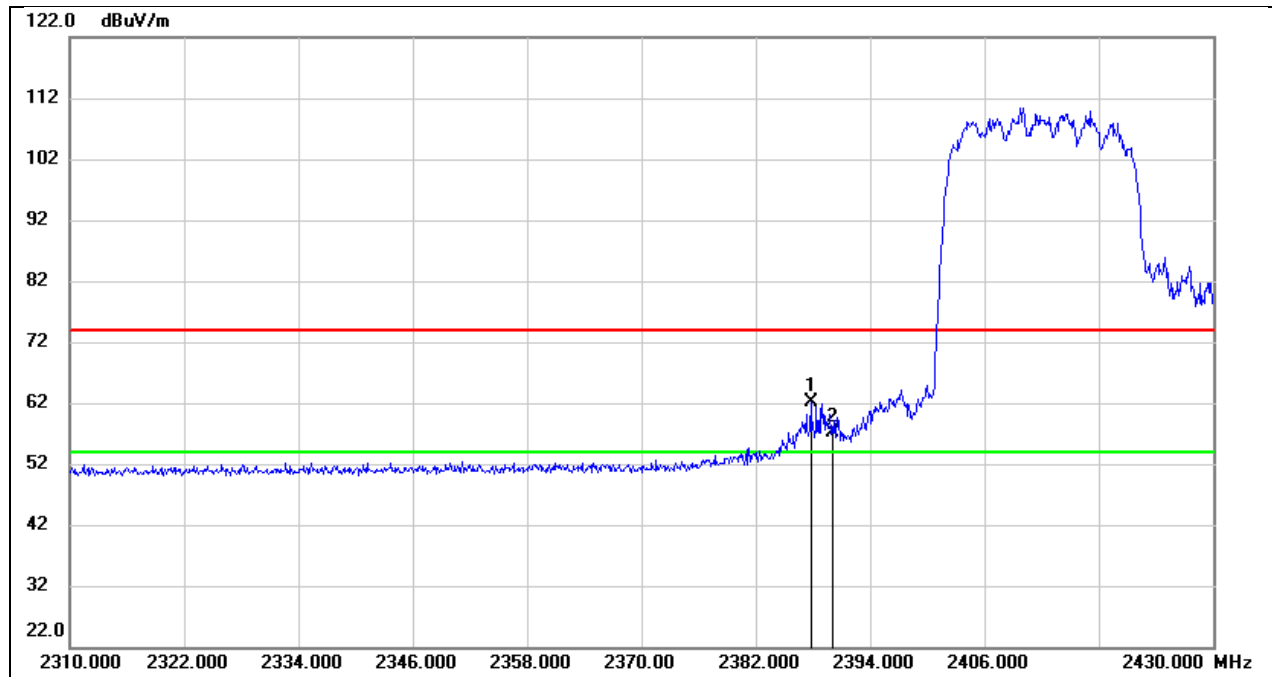


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2387.760	30.30	31.73	62.03	74.00	-11.97	peak
2	2390.000	25.43	31.73	57.16	74.00	-16.84	peak

Test Mode:	802.11ax HE20 AV	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

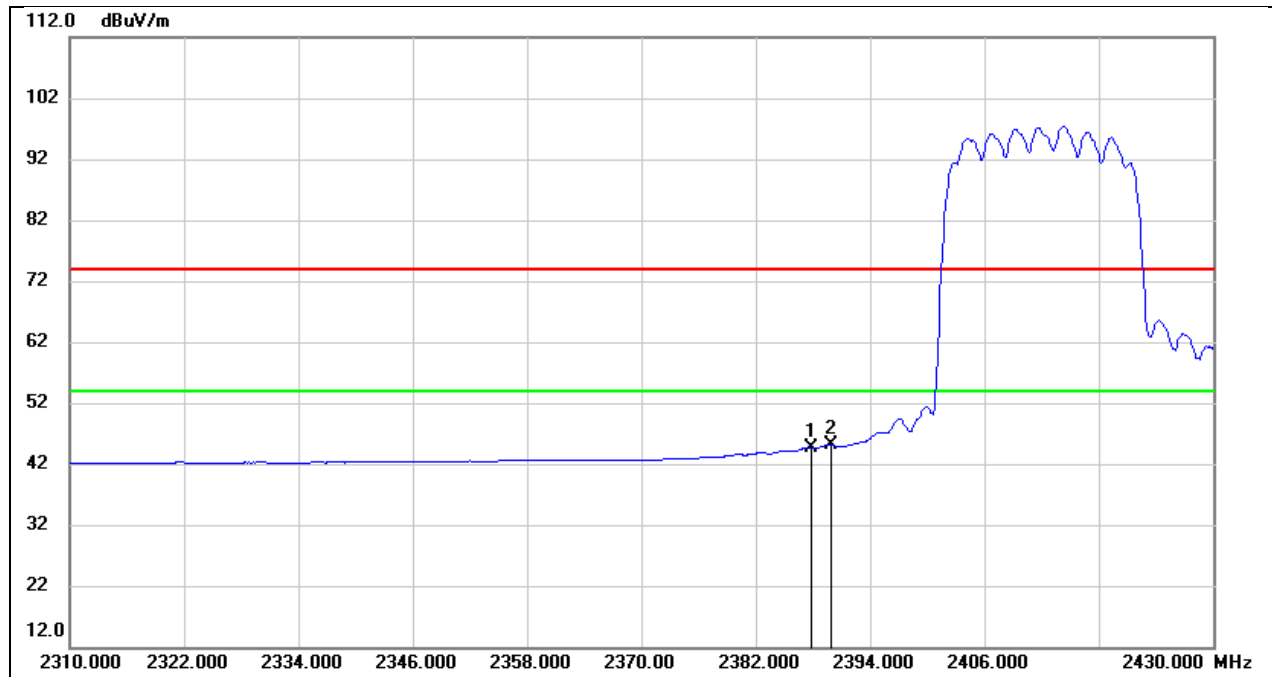


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2387.760	13.01	31.73	44.74	54.00	-9.26	AVG
2	2390.000	13.38	31.73	45.11	54.00	-8.89	AVG

Test Mode:	802.11ax HE20 PK	Frequency(MHz):	2462
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

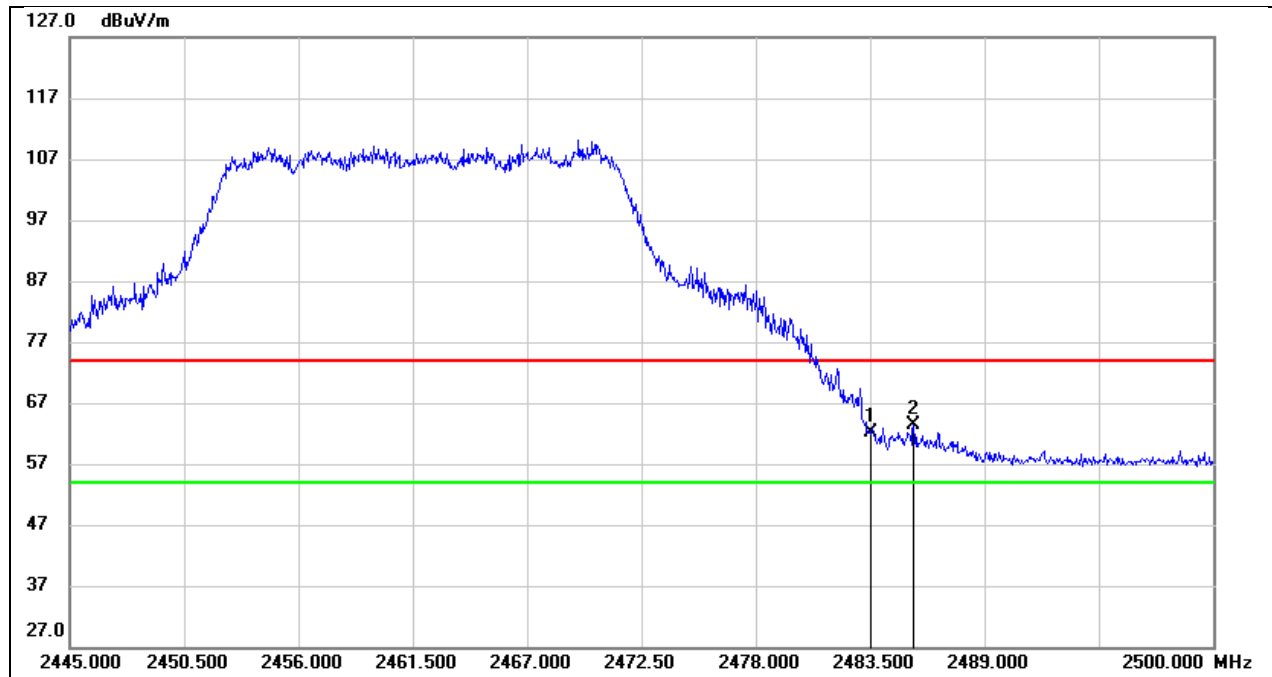


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	30.16	32.00	62.16	74.00	-11.84	peak
2	2485.590	31.30	32.00	63.30	74.00	-10.70	peak

Test Mode:	802.11ax HE20 AV	Frequency(MHz):	2462
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

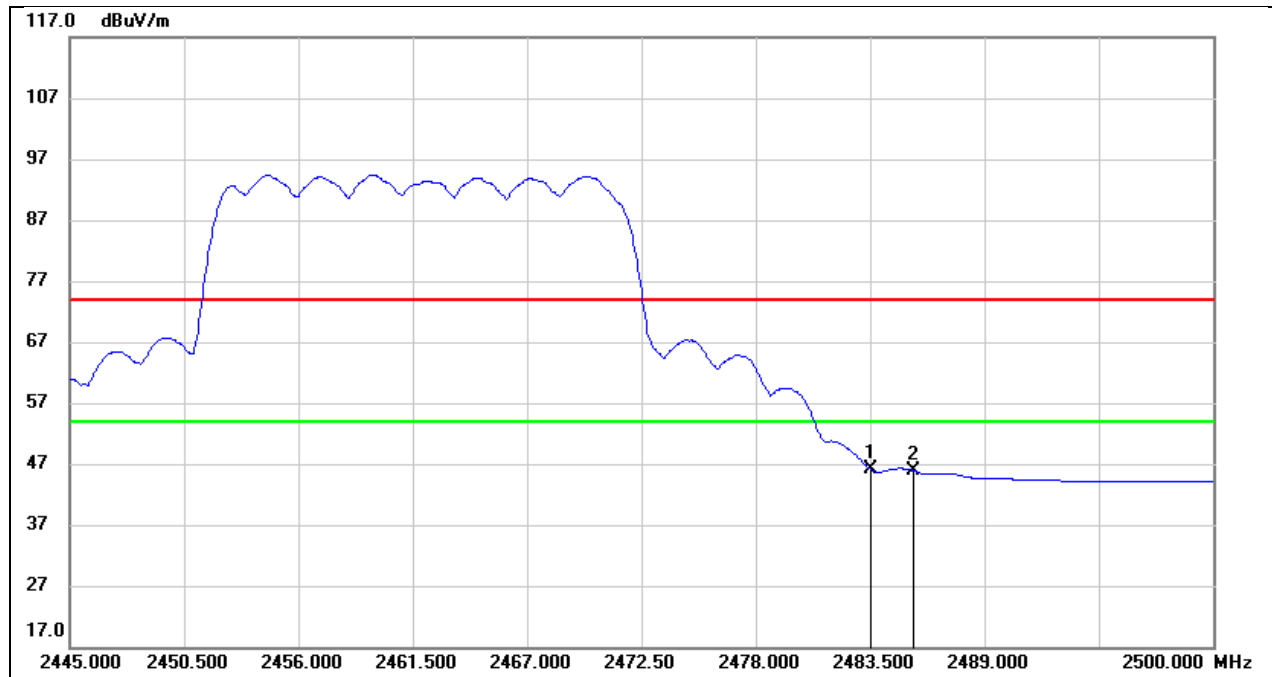


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	14.15	32.00	46.15	54.00	-7.85	AVG
2	2485.590	13.93	32.00	45.93	54.00	-8.07	AVG

Test Mode:	802.11ax HE40 PK	Frequency(MHz):	2422
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

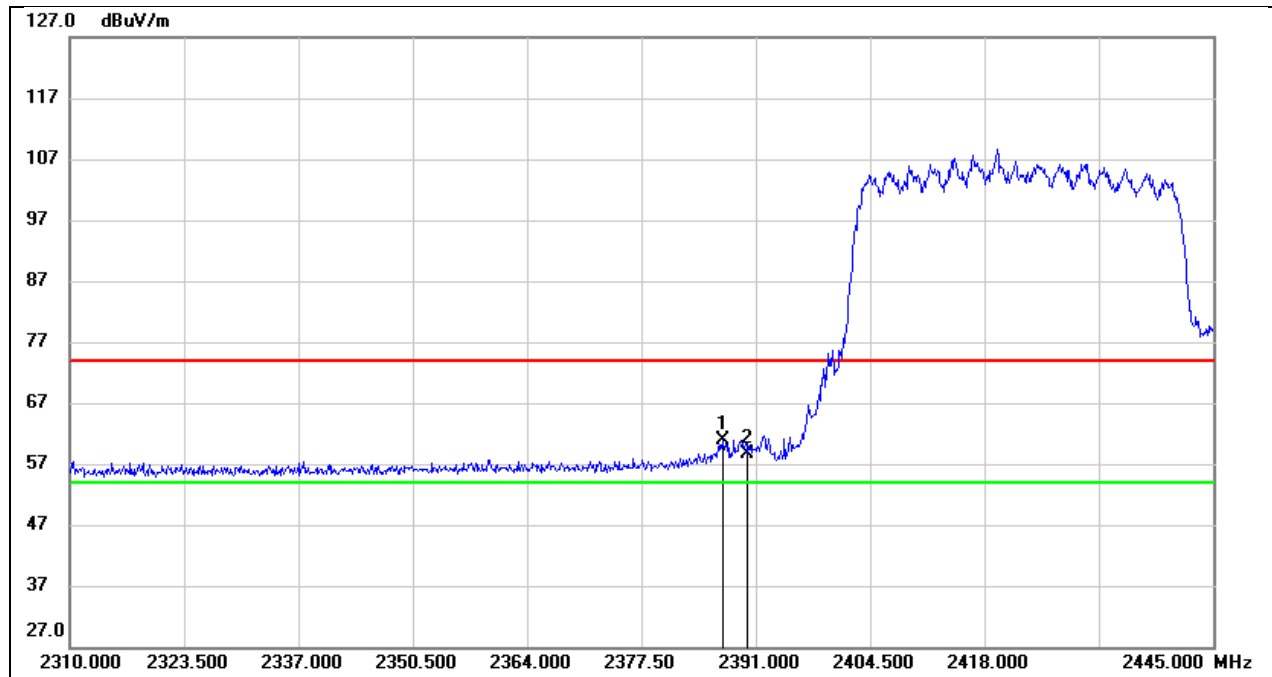


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2387.085	29.27	31.72	60.99	74.00	-13.01	peak
2	2390.000	26.99	31.73	58.72	74.00	-15.28	peak

Test Mode:	802.11ax HE40 AV	Frequency(MHz):	2422
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

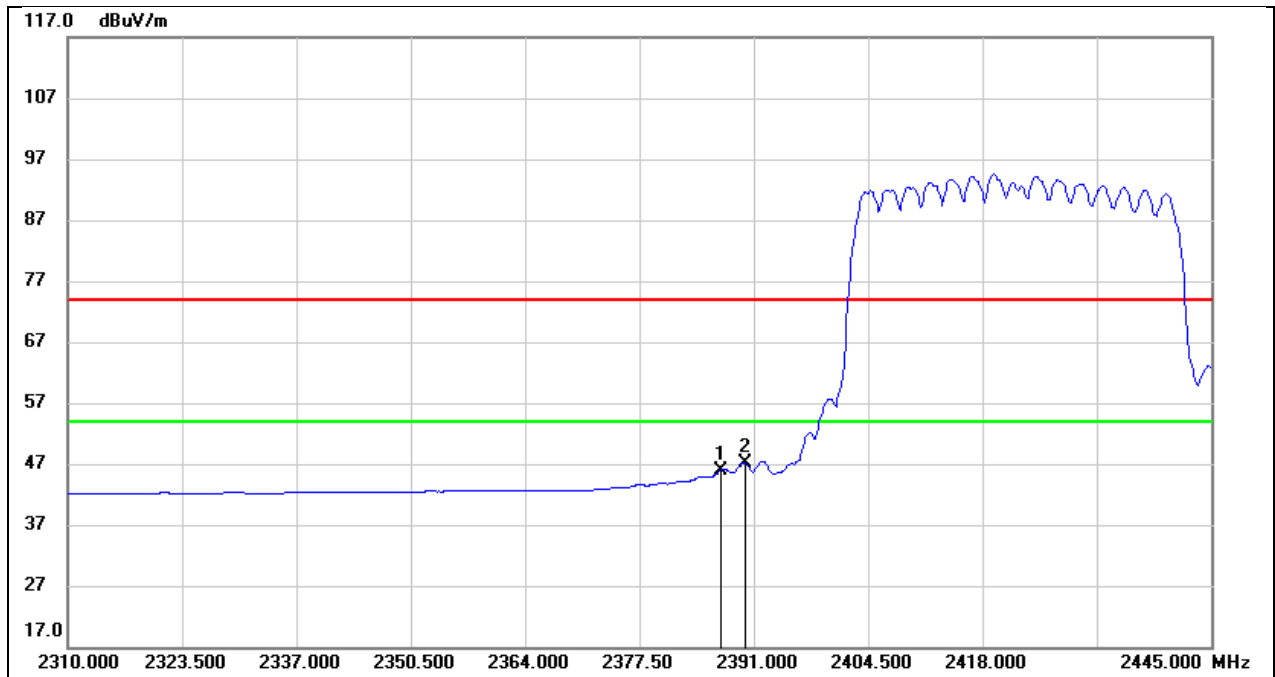


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2387.085	14.26	31.72	45.98	54.00	-8.02	AVG
2	2390.000	15.32	31.73	47.05	54.00	-6.95	AVG

Test Mode:	802.11ax HE40 PK	Frequency(MHz):	2452
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

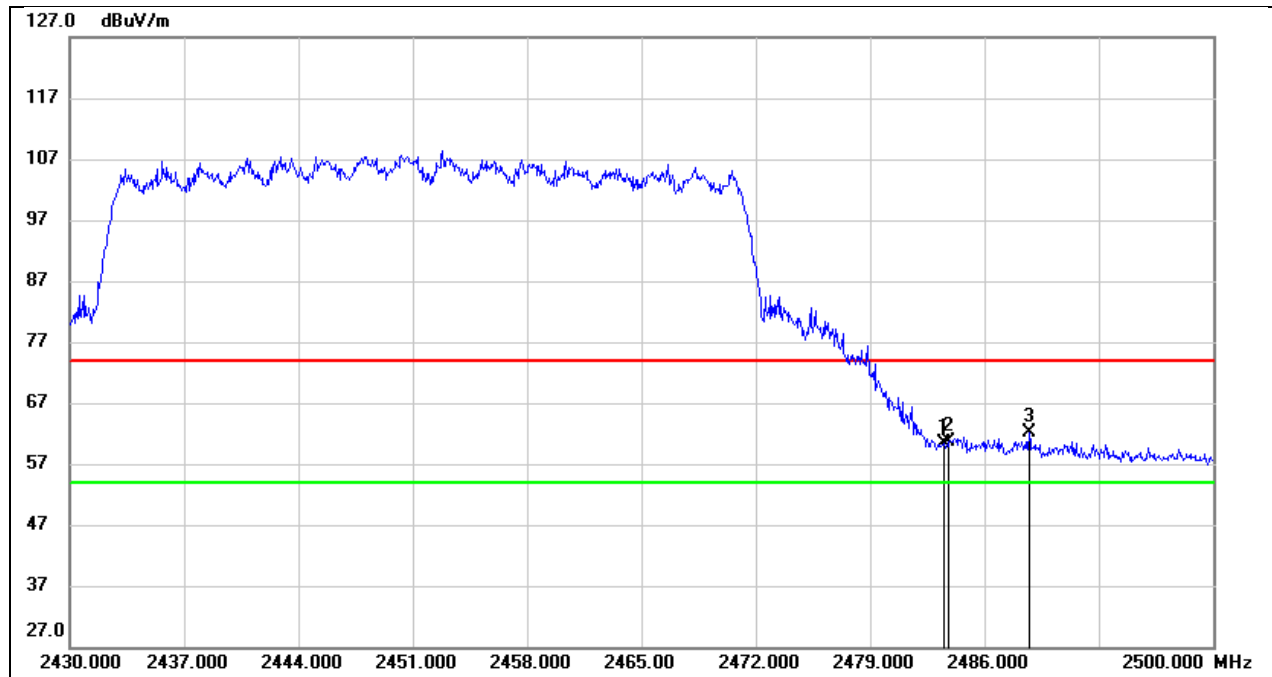

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	28.35	32.00	60.35	74.00	-13.65	peak
2	2483.830	28.69	32.00	60.69	74.00	-13.31	peak
3	2488.730	30.09	32.01	62.10	74.00	-11.90	peak


Test Mode:	802.11ax HE40 AV	Frequency(MHz):	2452
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

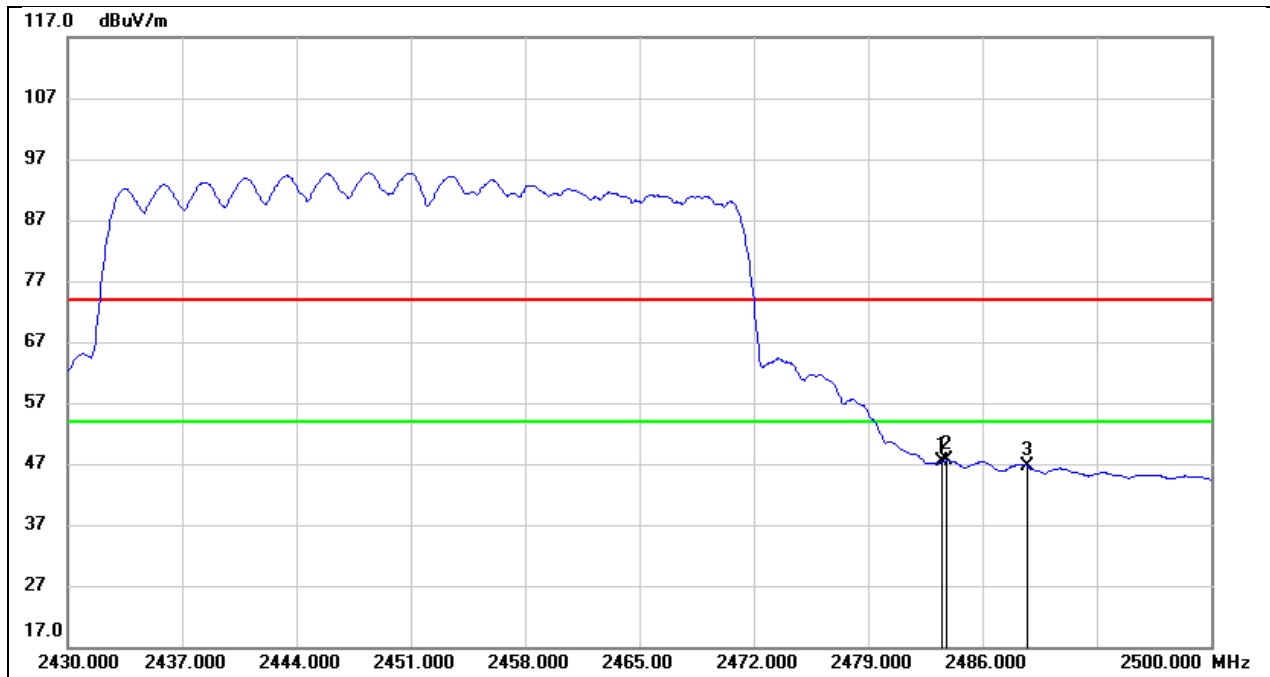

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	15.29	32.00	47.29	54.00	-6.71	AVG
2	2483.830	15.55	32.00	47.55	54.00	-6.45	AVG
3	2488.730	14.61	32.01	46.62	54.00	-7.38	AVG


8.2. SPURIOUS EMISSIONS(1 GHZ~3 GHZ)

Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

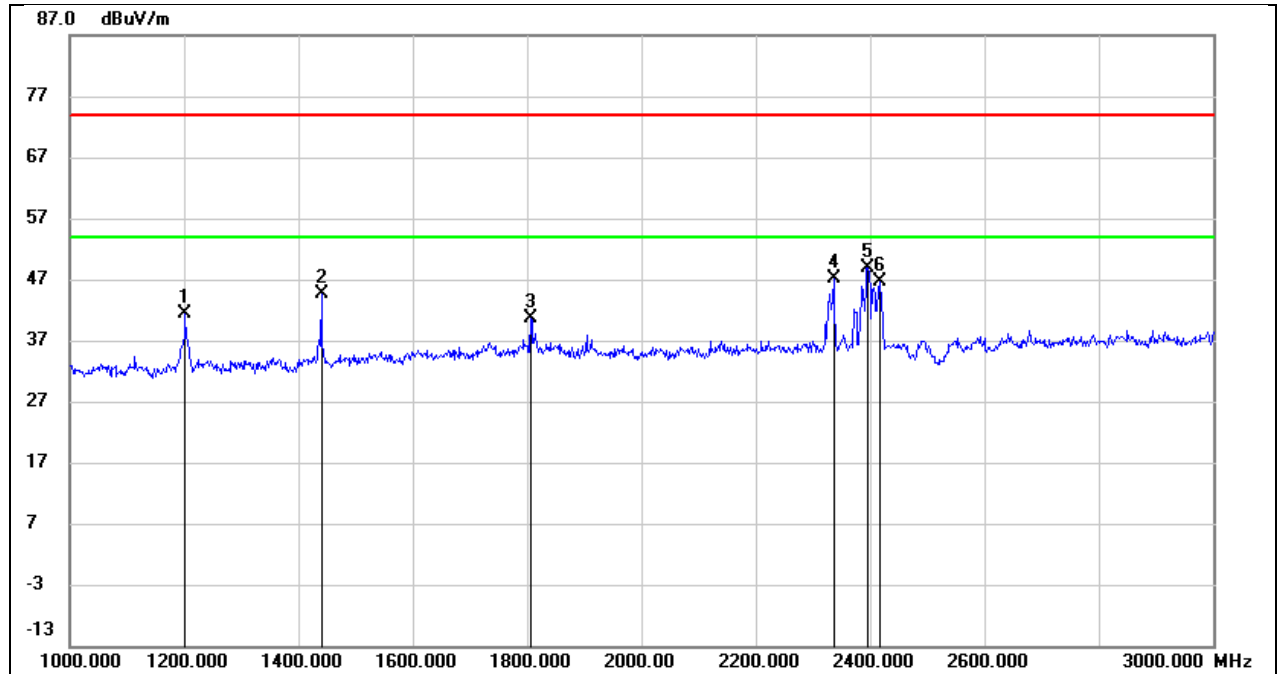


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1202.000	54.93	-13.46	41.47	74.00	-32.53	peak
2	1440.000	56.81	-12.23	44.58	74.00	-29.42	peak
3	1806.000	50.61	-9.97	40.64	74.00	-33.36	peak
4	2336.000	55.98	-8.83	47.15	74.00	-26.85	peak
5	2396.000	57.53	-8.60	48.93	74.00	-25.07	peak
6	2416.000	55.09	-8.53	46.56	74.00	-27.44	peak

Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

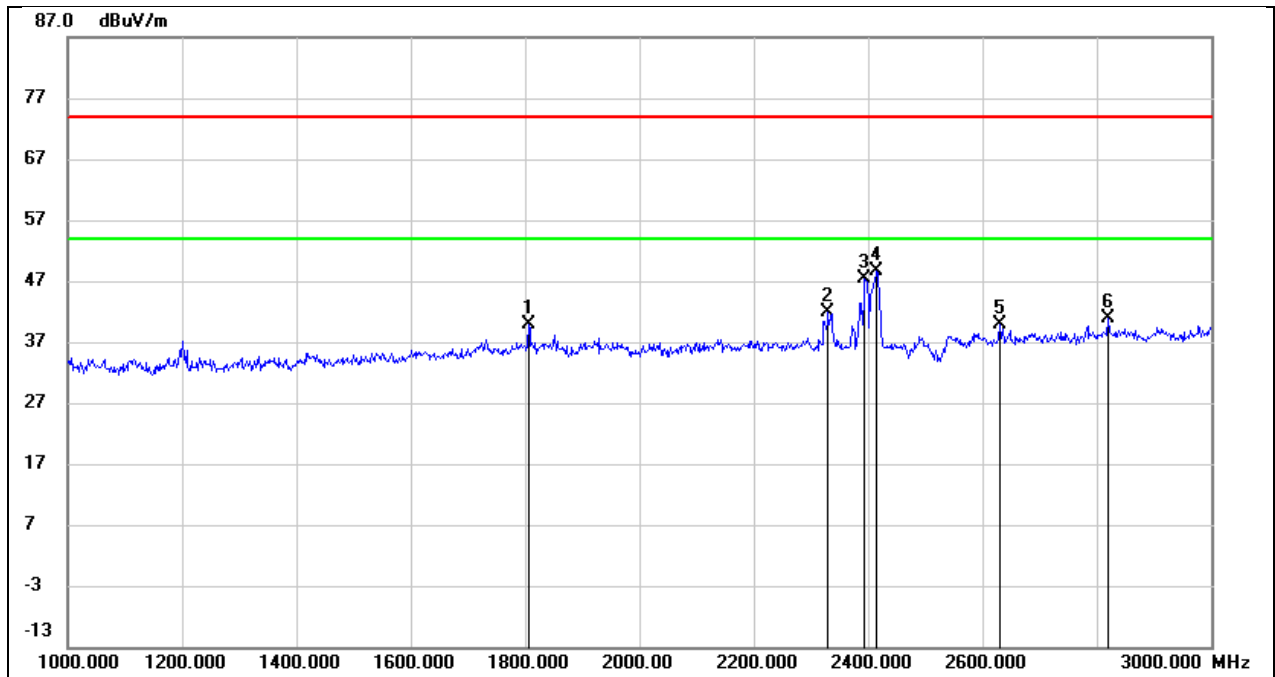


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1806.000	49.20	-9.38	39.82	74.00	-34.18	peak
2	2330.000	50.00	-8.02	41.98	74.00	-32.02	peak
3	2394.000	55.26	-7.79	47.47	74.00	-26.53	peak
4	2414.000	56.25	-7.71	48.54	74.00	-25.46	peak
5	2630.000	46.51	-6.70	39.81	74.00	-34.19	peak
6	2820.000	46.69	-5.71	40.98	74.00	-33.02	peak

Test Mode:	802.11b	Frequency(MHz):	2437
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

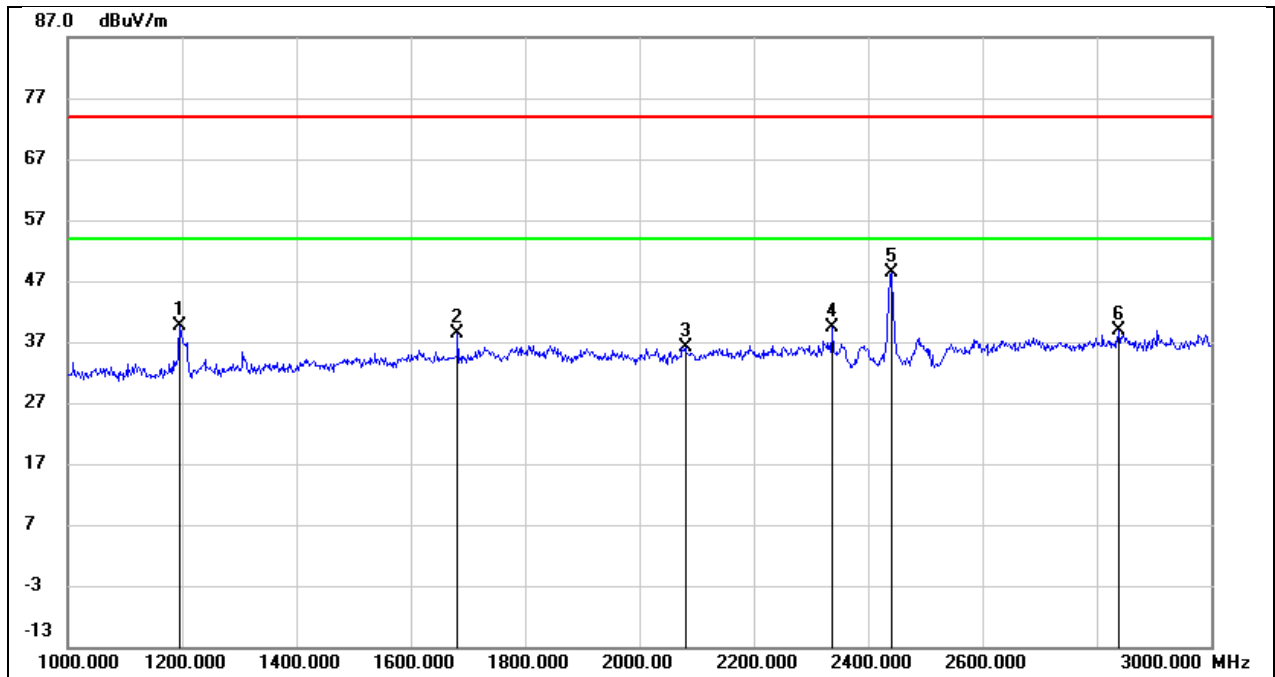


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1196.000	53.11	-13.49	39.62	74.00	-34.38	peak
2	1682.000	49.16	-10.79	38.37	74.00	-35.63	peak
3	2080.000	45.86	-9.79	36.07	74.00	-37.93	peak
4	2338.000	48.23	-8.82	39.41	74.00	-34.59	peak
5	2440.000	56.81	-8.44	48.37	74.00	-25.63	peak
6	2838.000	45.56	-6.75	38.81	74.00	-35.19	peak

Test Mode:	802.11b	Frequency(MHz):	2437
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

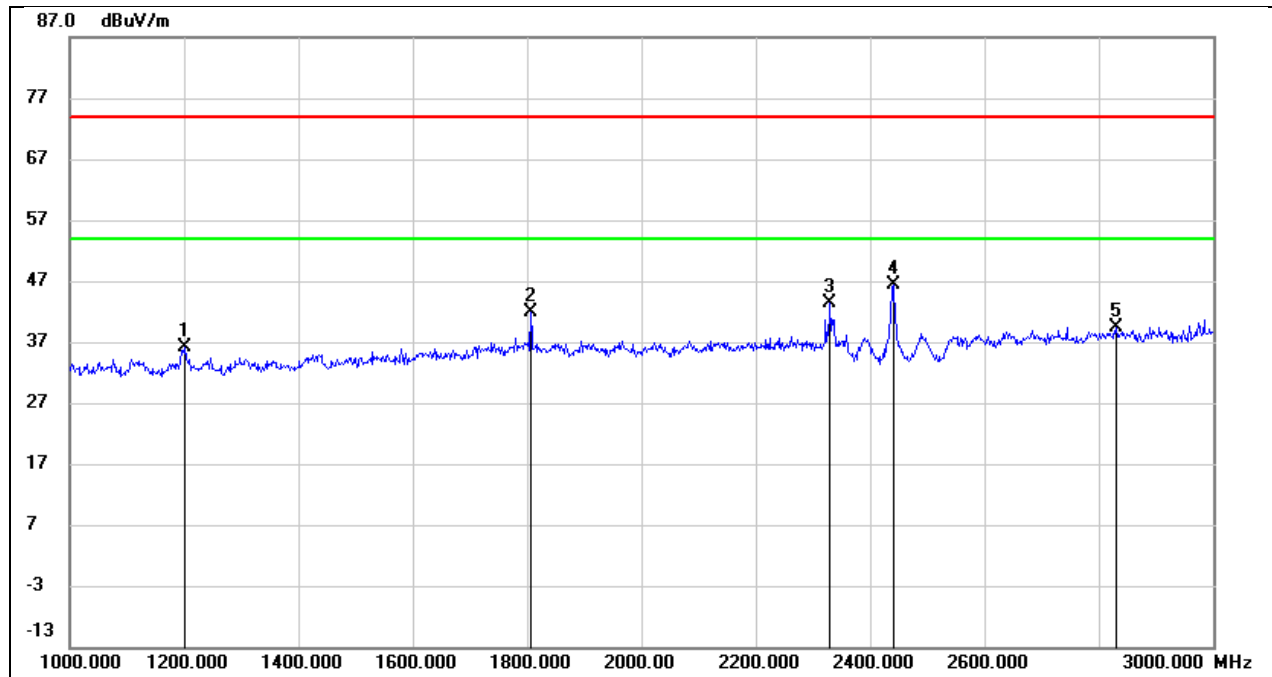


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1202.000	49.10	-13.01	36.09	74.00	-37.91	peak
2	1806.000	51.29	-9.38	41.91	74.00	-32.09	peak
3	2330.000	51.43	-8.02	43.41	74.00	-30.59	peak
4	2440.000	53.89	-7.63	46.26	74.00	-27.74	peak
5	2830.000	44.94	-5.65	39.29	74.00	-34.71	peak

Test Mode:	802.11b	Frequency(MHz):	2462
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

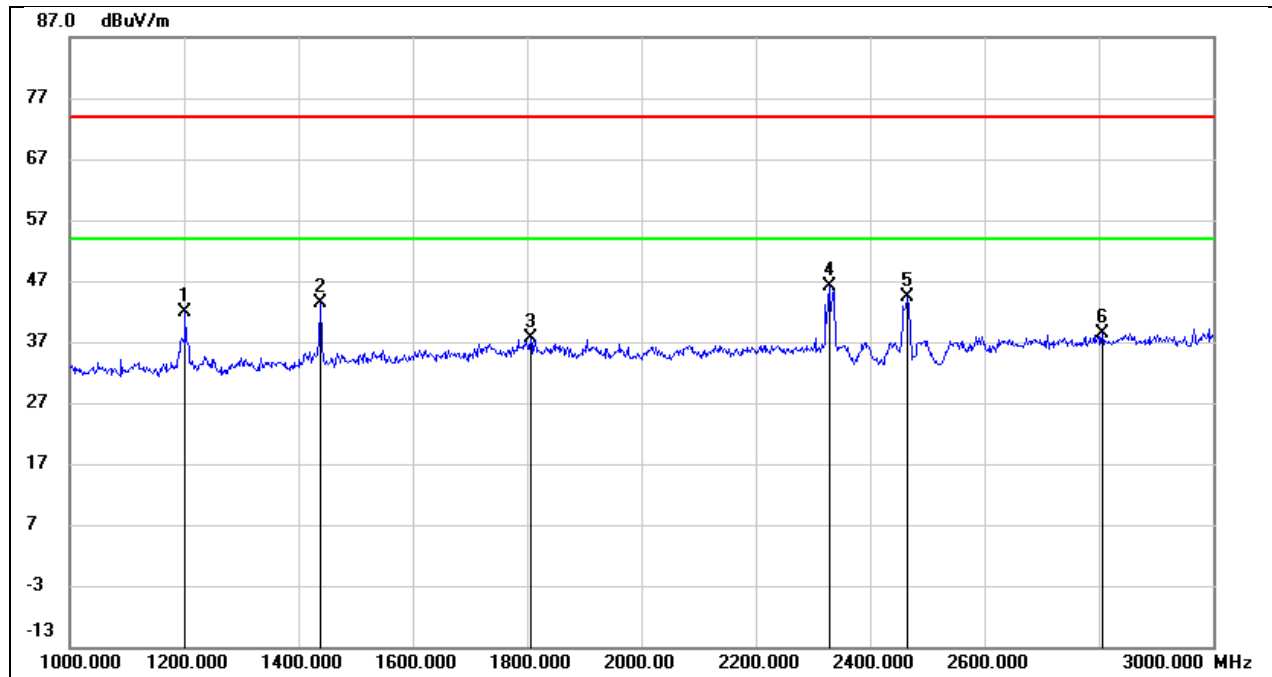

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1202.000	55.25	-13.46	41.79	74.00	-32.21	peak
2	1438.000	55.62	-12.24	43.38	74.00	-30.62	peak
3	1806.000	47.60	-9.97	37.63	74.00	-36.37	peak
4	2328.000	54.98	-8.85	46.13	74.00	-27.87	peak
5	2466.000	52.81	-8.34	44.47	74.00	-29.53	peak
6	2806.000	45.34	-6.89	38.45	74.00	-35.55	peak


Test Mode:	802.11b	Frequency(MHz):	2462
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

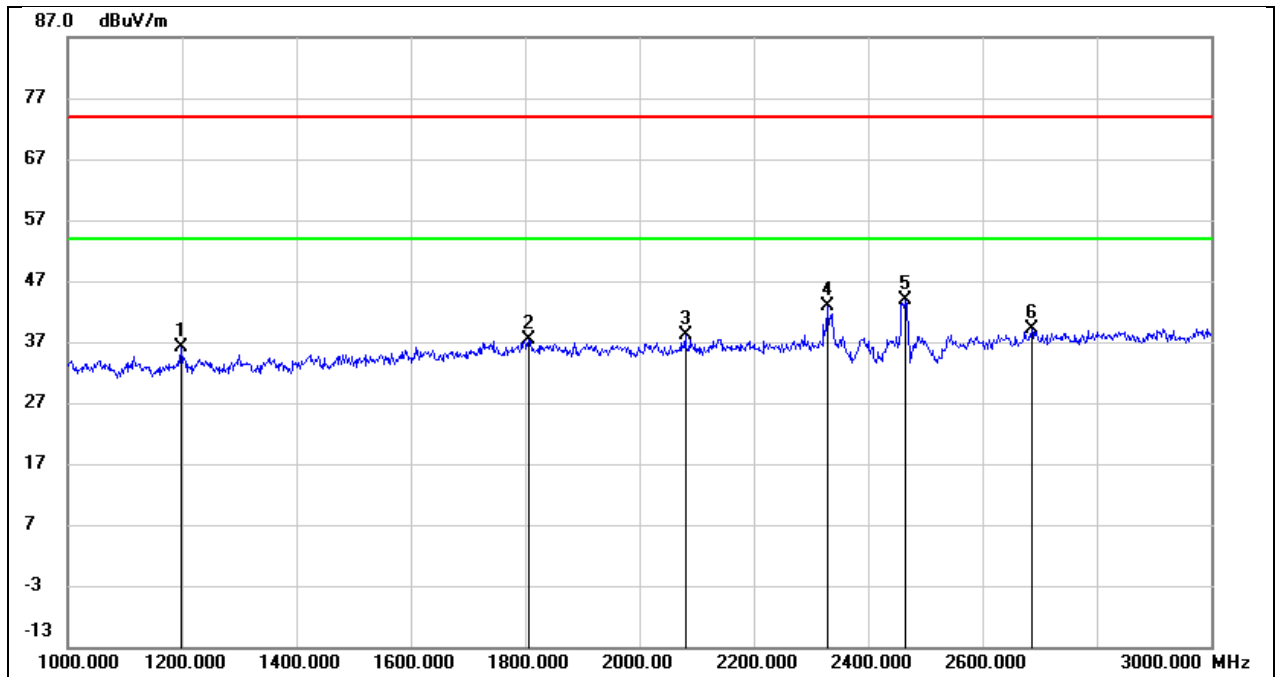

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1198.000	49.16	-13.01	36.15	74.00	-37.85	peak
2	1806.000	46.76	-9.38	37.38	74.00	-36.62	peak
3	2080.000	47.09	-8.91	38.18	74.00	-35.82	peak
4	2328.000	50.80	-8.02	42.78	74.00	-31.22	peak
5	2464.000	51.32	-7.53	43.79	74.00	-30.21	peak
6	2686.000	45.44	-6.41	39.03	74.00	-34.97	peak


8.3. SPURIOUS EMISSIONS(3 GHZ~18 GHZ)

Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

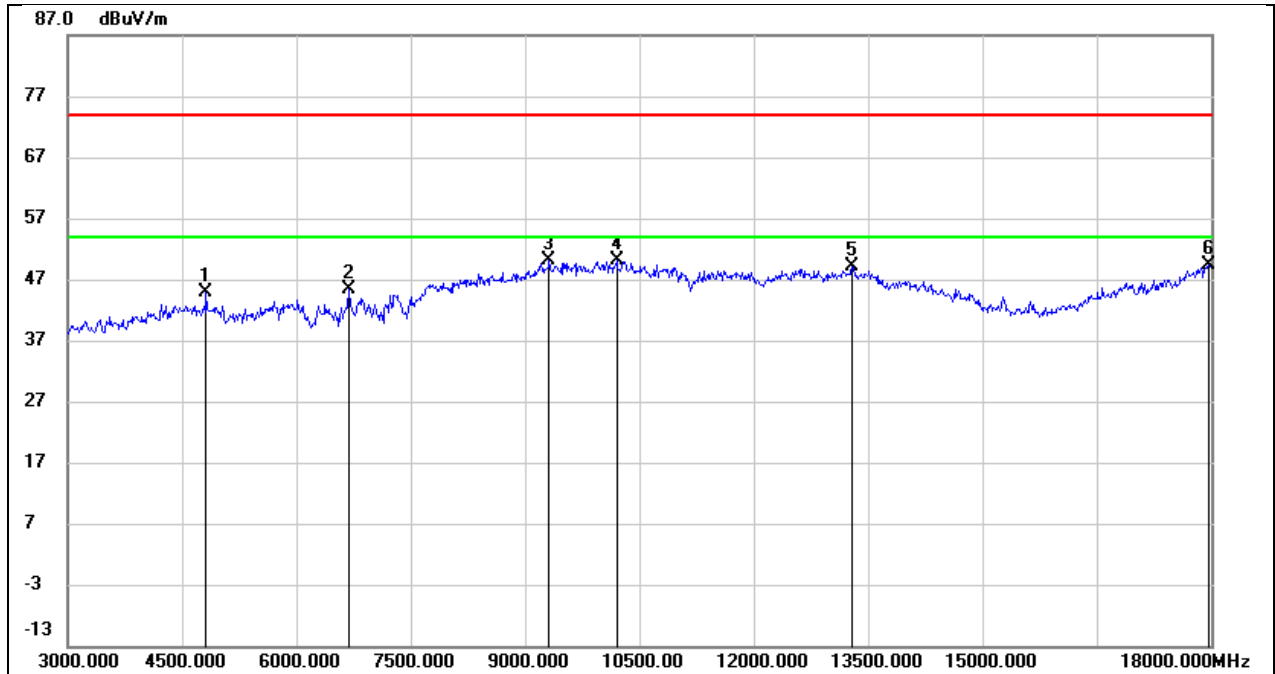


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4815.000	44.45	0.50	44.95	74.00	-29.05	peak
2	6690.000	39.94	5.42	45.36	74.00	-28.64	peak
3	9315.000	38.44	11.58	50.02	74.00	-23.98	peak
4	10200.000	36.86	13.27	50.13	74.00	-23.87	peak
5	13290.000	27.43	21.58	49.01	74.00	-24.99	peak
6	17970.000	19.96	29.33	49.29	74.00	-24.71	peak

Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

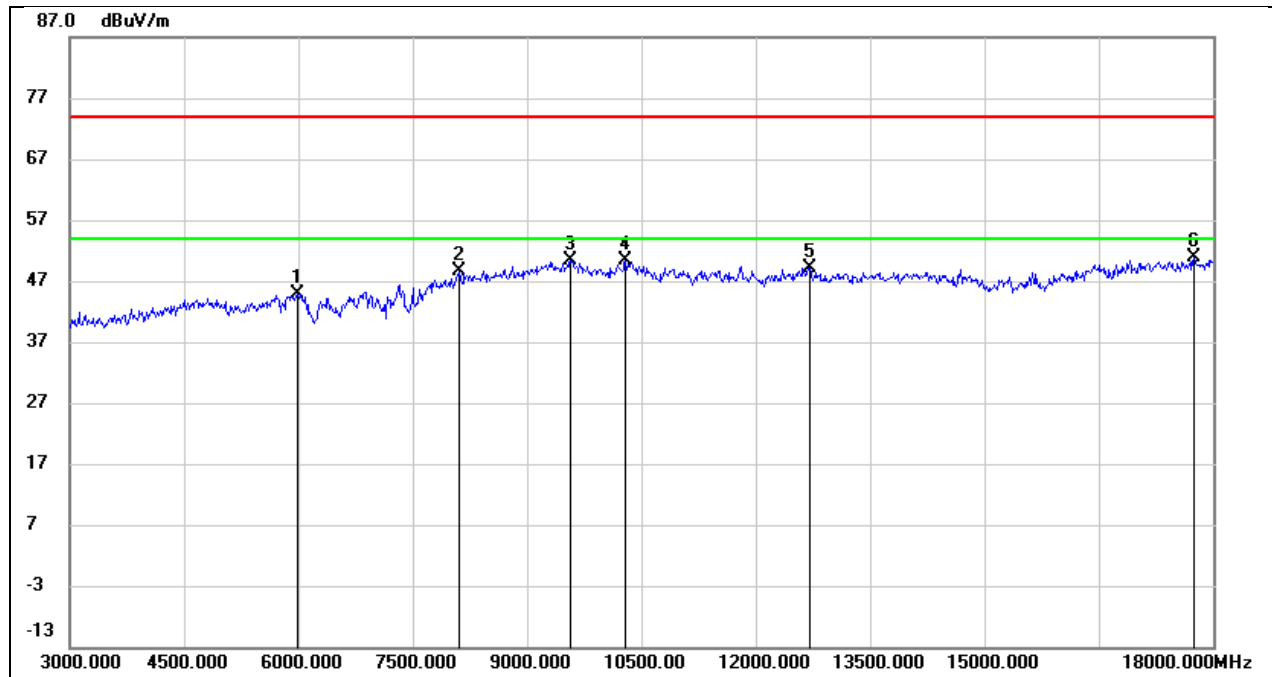


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5985.000	40.87	4.11	44.98	74.00	-29.02	peak
2	8115.000	39.83	8.86	48.69	74.00	-25.31	peak
3	9570.000	37.68	12.60	50.28	74.00	-23.72	peak
4	10290.000	37.31	12.96	50.27	74.00	-23.73	peak
5	12705.000	30.96	18.22	49.18	74.00	-24.82	peak
6	17745.000	24.67	26.12	50.79	74.00	-23.21	peak

Test Mode:	802.11b	Frequency(MHz):	2437
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

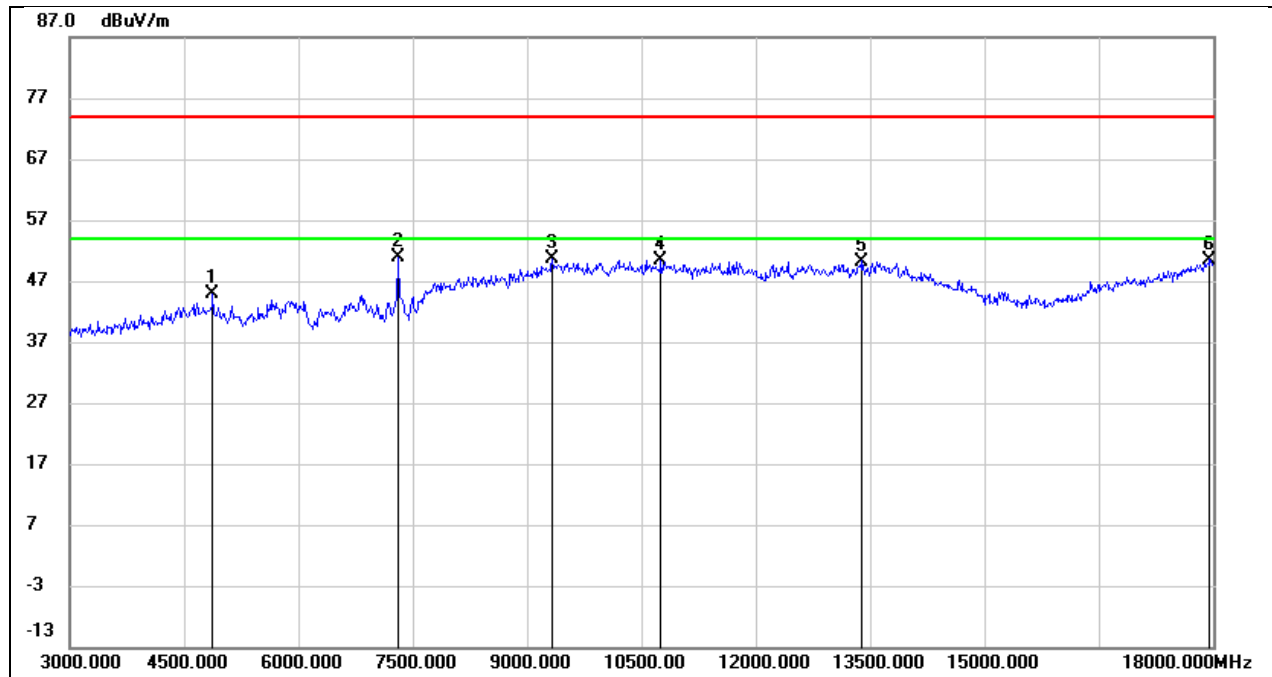


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4875.000	44.20	0.65	44.85	74.00	-29.15	peak
2	7305.000	43.80	7.03	50.83	74.00	-23.17	peak
3	9330.000	38.98	11.65	50.63	74.00	-23.37	peak
4	10755.000	35.79	14.69	50.48	74.00	-23.52	peak
5	13395.000	28.22	22.03	50.25	74.00	-23.75	peak
6	17955.000	21.32	29.18	50.50	74.00	-23.50	peak

Test Mode:	802.11b	Frequency(MHz):	2437
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

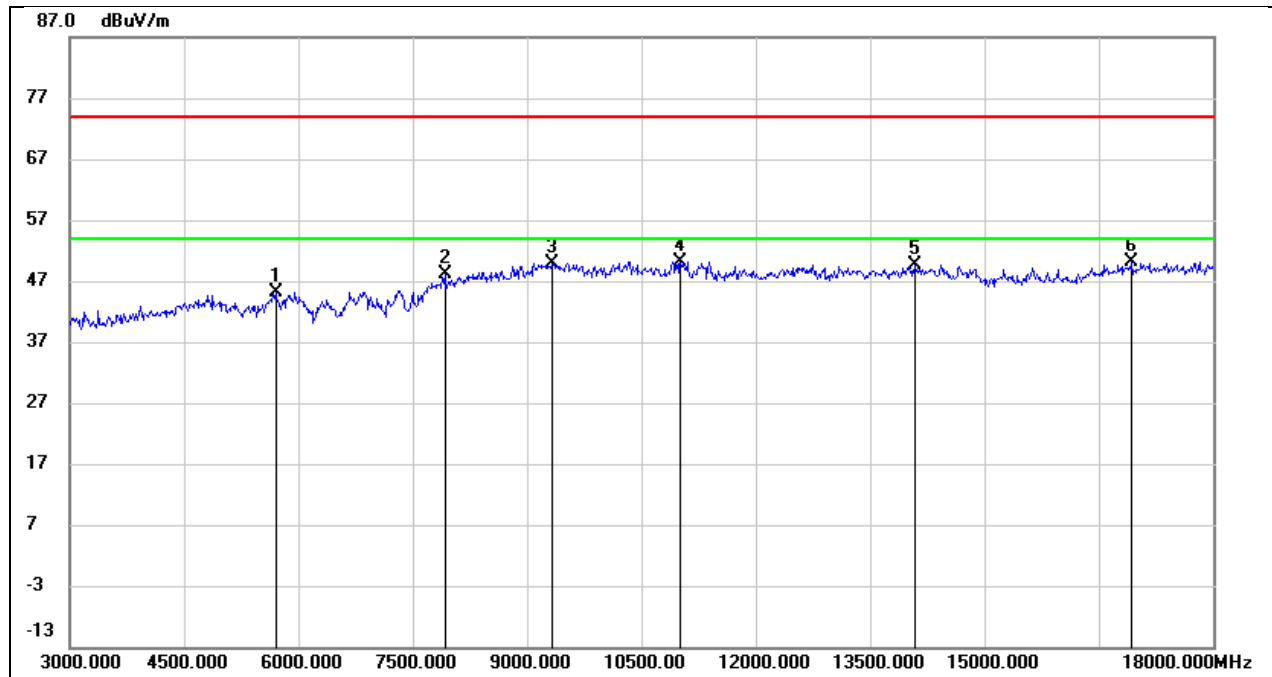


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5700.000	41.52	3.65	45.17	74.00	-28.83	peak
2	7920.000	39.62	8.41	48.03	74.00	-25.97	peak
3	9330.000	38.16	11.78	49.94	74.00	-24.06	peak
4	11010.000	35.00	15.20	50.20	74.00	-23.80	peak
5	14085.000	27.49	22.23	49.72	74.00	-24.28	peak
6	16935.000	24.97	25.10	50.07	74.00	-23.93	peak

Test Mode:	802.11b	Frequency(MHz):	2462
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

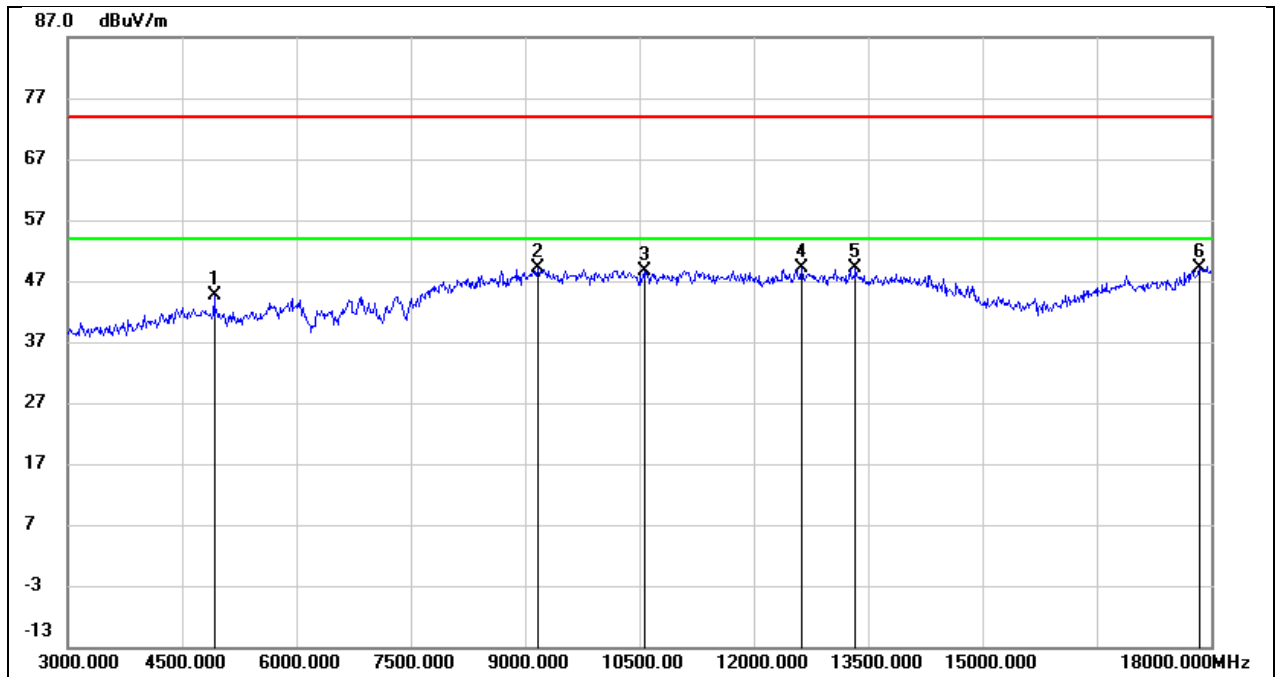


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4920.000	43.89	0.76	44.65	74.00	-29.35	peak
2	9165.000	38.22	10.92	49.14	74.00	-24.86	peak
3	10560.000	34.83	13.92	48.75	74.00	-25.25	peak
4	12630.000	29.98	19.05	49.03	74.00	-24.97	peak
5	13335.000	27.41	21.78	49.19	74.00	-24.81	peak
6	17850.000	20.97	28.11	49.08	74.00	-24.92	peak

Test Mode:	802.11b	Frequency(MHz):	2462
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

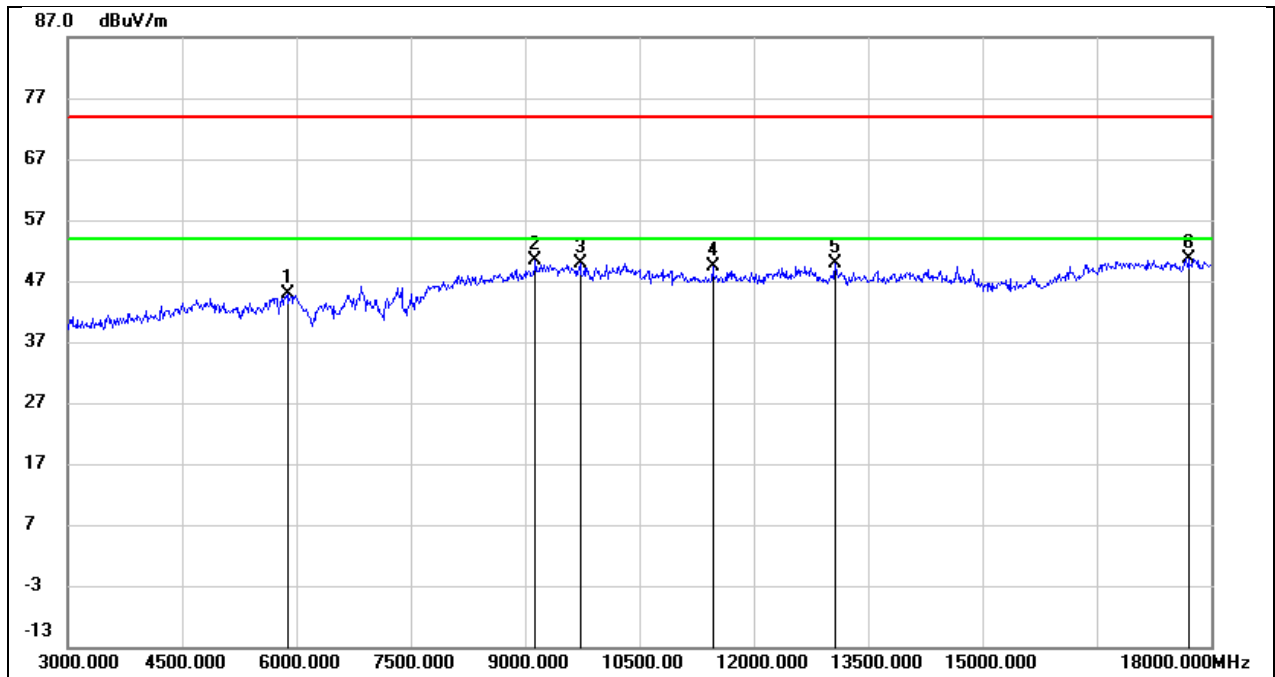


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5880.000	40.82	3.95	44.77	74.00	-29.23	peak
2	9135.000	39.35	11.09	50.44	74.00	-23.56	peak
3	9720.000	37.06	12.80	49.86	74.00	-24.14	peak
4	11460.000	33.06	16.39	49.45	74.00	-24.55	peak
5	13065.000	30.58	19.22	49.80	74.00	-24.20	peak
6	17700.000	24.75	25.99	50.74	74.00	-23.26	peak

Test Mode:	802.11g	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

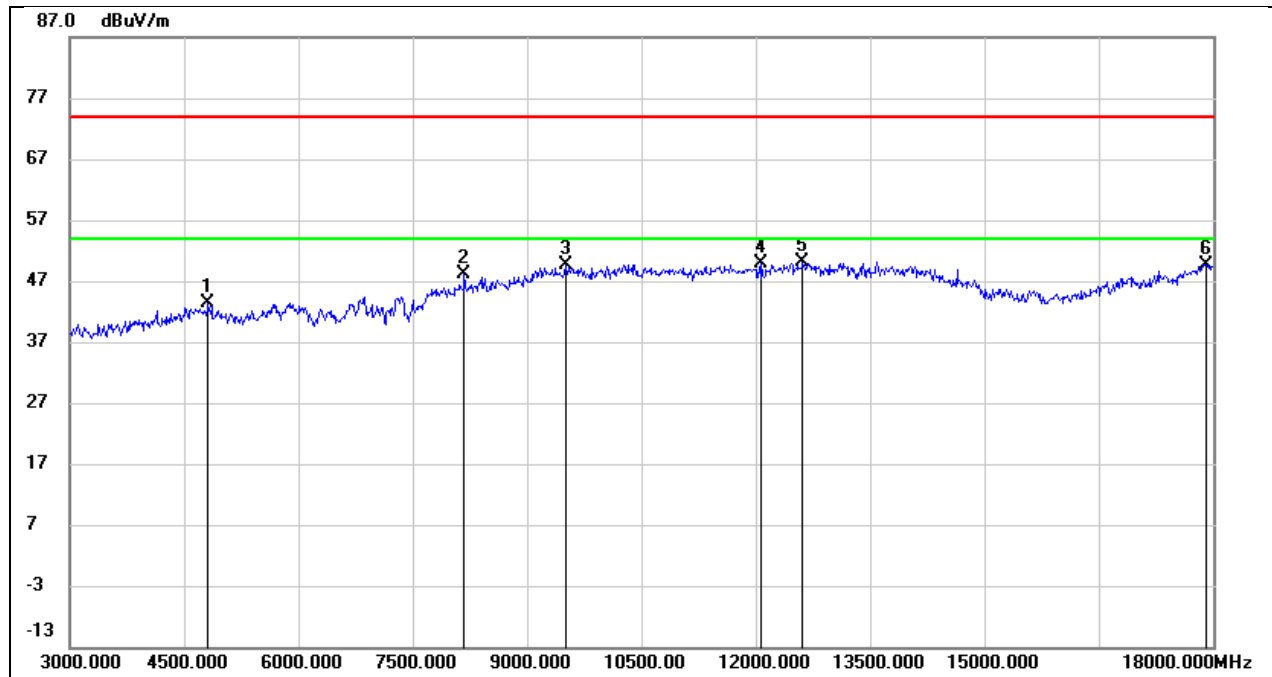


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4815.000	42.88	0.50	43.38	74.00	-30.62	peak
2	8175.000	39.70	8.47	48.17	74.00	-25.83	peak
3	9510.000	37.29	12.45	49.74	74.00	-24.26	peak
4	12075.000	31.11	18.73	49.84	74.00	-24.16	peak
5	12615.000	31.21	19.01	50.22	74.00	-23.78	peak
6	17910.000	20.97	28.73	49.70	74.00	-24.30	peak

Test Mode:	802.11g	Frequency(MHz):	2412
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

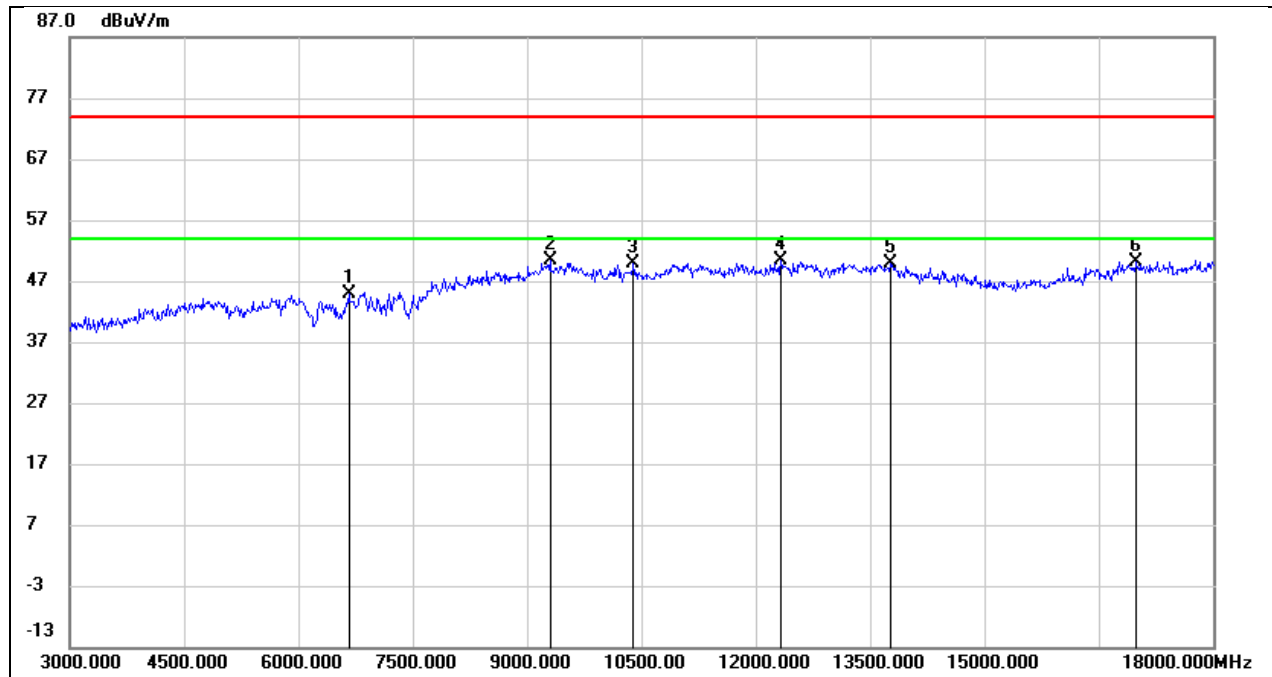


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6660.000	38.63	6.14	44.77	74.00	-29.23	peak
2	9300.000	38.78	11.68	50.46	74.00	-23.54	peak
3	10395.000	36.80	13.17	49.97	74.00	-24.03	peak
4	12330.000	32.50	17.93	50.43	74.00	-23.57	peak
5	13770.000	28.74	21.23	49.97	74.00	-24.03	peak
6	16995.000	25.04	25.18	50.22	74.00	-23.78	peak

Test Mode:	802.11g	Frequency(MHz):	2437
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

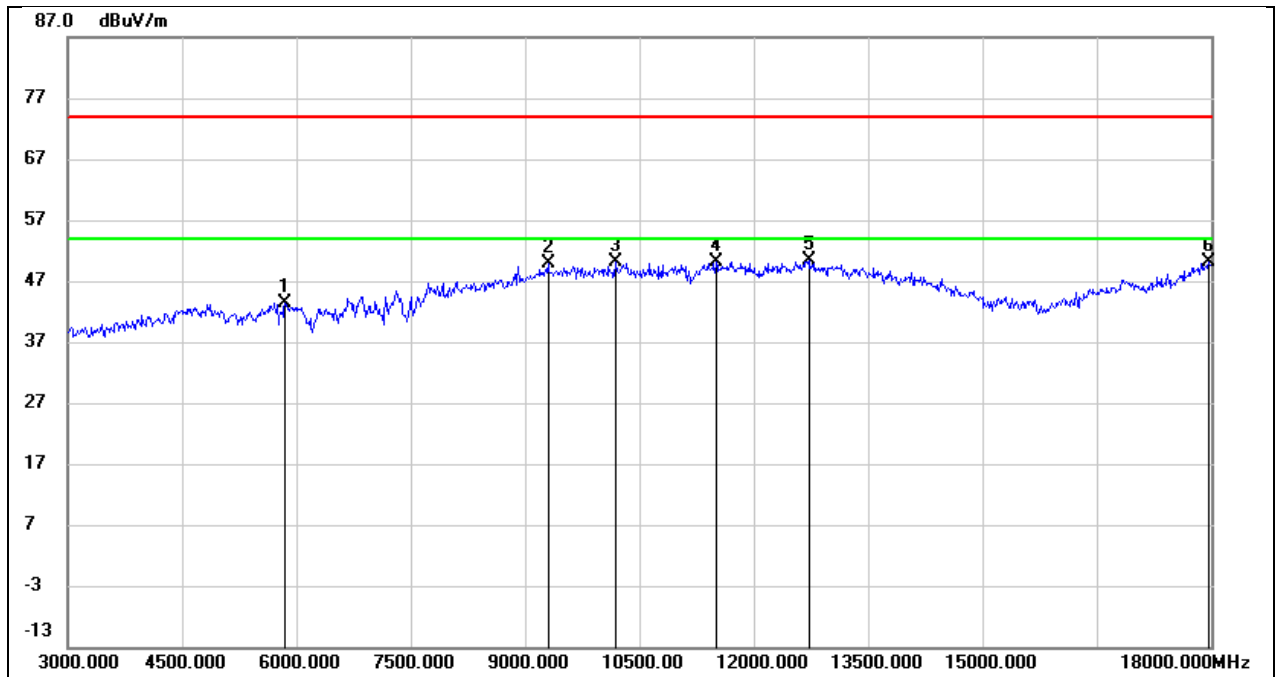


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5850.000	40.63	2.84	43.47	74.00	-30.53	peak
2	9300.000	38.39	11.52	49.91	74.00	-24.09	peak
3	10185.000	36.86	13.27	50.13	74.00	-23.87	peak
4	11505.000	32.15	17.99	50.14	74.00	-23.86	peak
5	12720.000	31.13	19.29	50.42	74.00	-23.58	peak
6	17970.000	20.84	29.33	50.17	74.00	-23.83	peak

Test Mode:	802.11g	Frequency(MHz):	2437
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

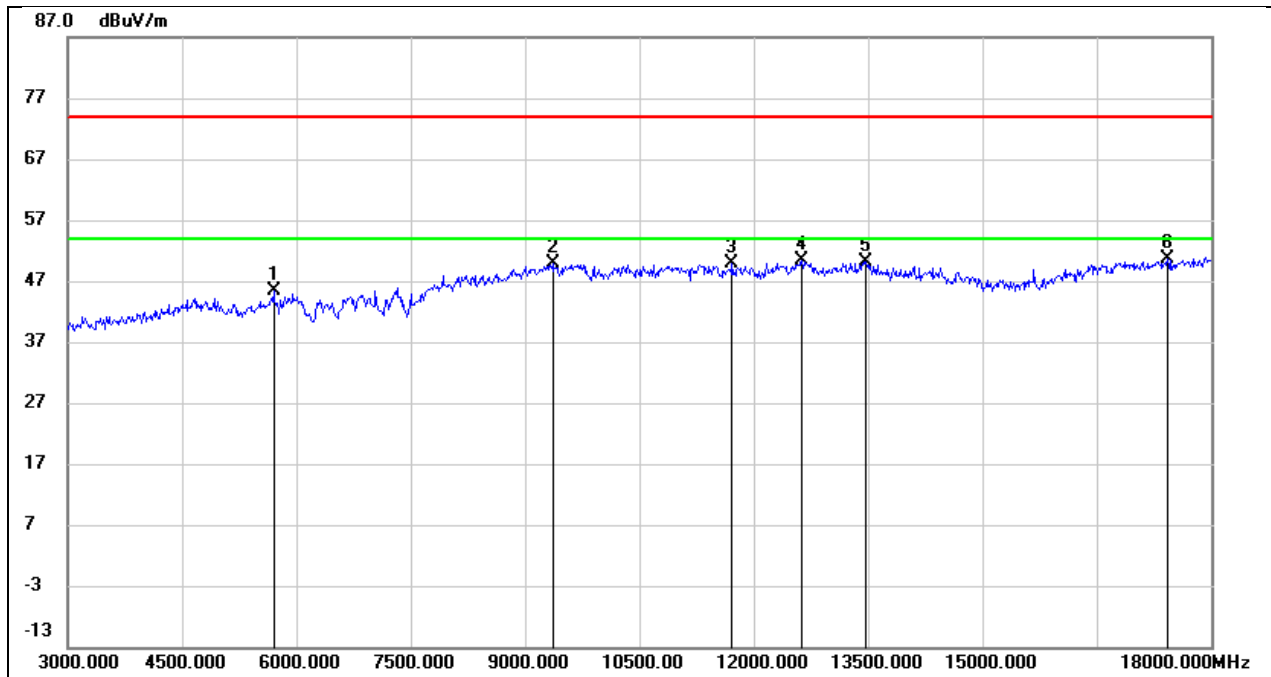


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5700.000	41.80	3.65	45.45	74.00	-28.55	peak
2	9360.000	37.90	11.89	49.79	74.00	-24.21	peak
3	11715.000	32.78	17.03	49.81	74.00	-24.19	peak
4	12630.000	32.39	18.07	50.46	74.00	-23.54	peak
5	13470.000	29.49	20.65	50.14	74.00	-23.86	peak
6	17430.000	25.32	25.40	50.72	74.00	-23.28	peak

Test Mode:	802.11g	Frequency(MHz):	2462
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

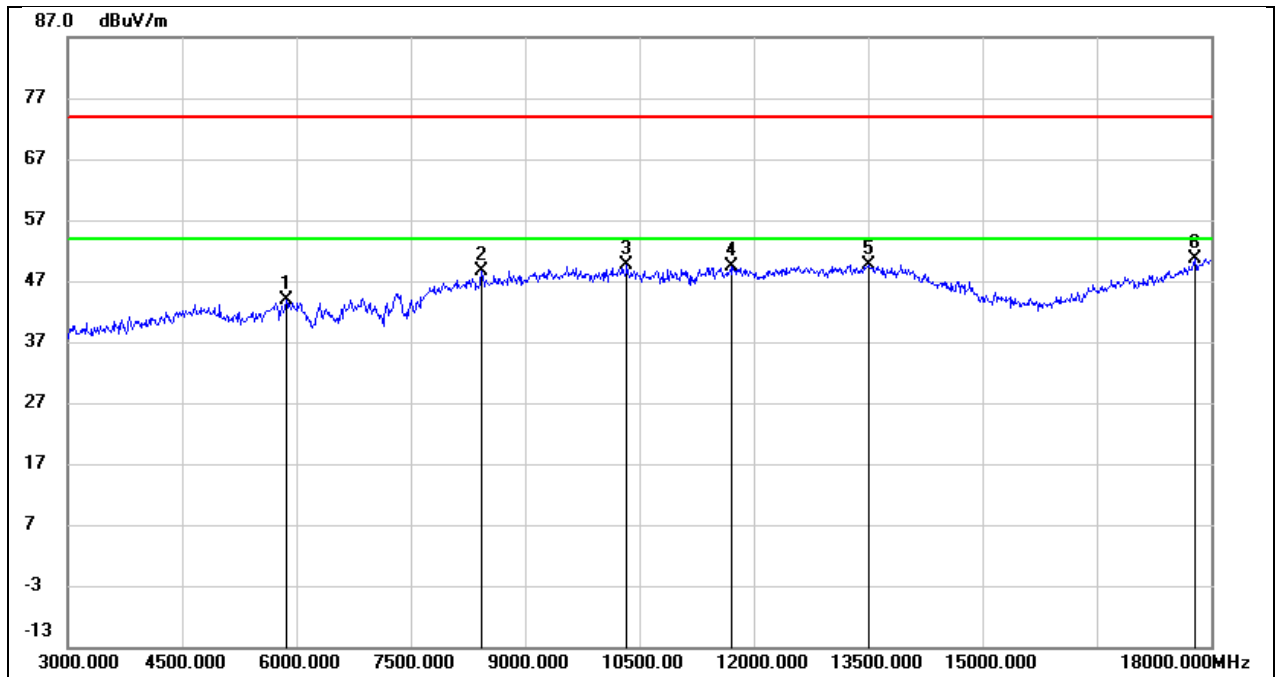


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5865.000	40.92	2.86	43.78	74.00	-30.22	peak
2	8430.000	39.64	8.93	48.57	74.00	-25.43	peak
3	10335.000	36.30	13.41	49.71	74.00	-24.29	peak
4	11700.000	31.11	18.32	49.43	74.00	-24.57	peak
5	13500.000	27.29	22.44	49.73	74.00	-24.27	peak
6	17790.000	23.10	27.52	50.62	74.00	-23.38	peak

Test Mode:	802.11g	Frequency(MHz):	2462
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

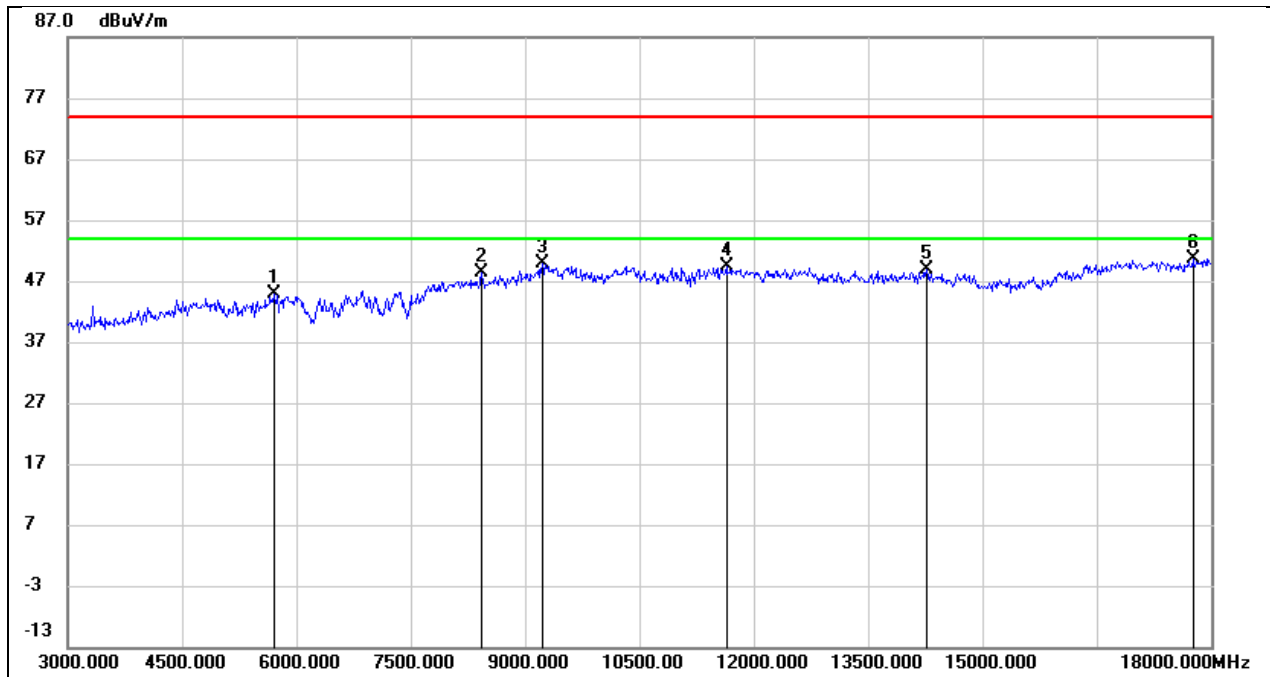


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5700.000	41.23	3.65	44.88	74.00	-29.12	peak
2	8430.000	38.81	9.51	48.32	74.00	-25.68	peak
3	9225.000	38.36	11.41	49.77	74.00	-24.23	peak
4	11640.000	32.59	16.84	49.43	74.00	-24.57	peak
5	14265.000	26.83	22.10	48.93	74.00	-25.07	peak
6	17760.000	24.58	26.16	50.74	74.00	-23.26	peak

Test Mode:	802.11n HT20	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

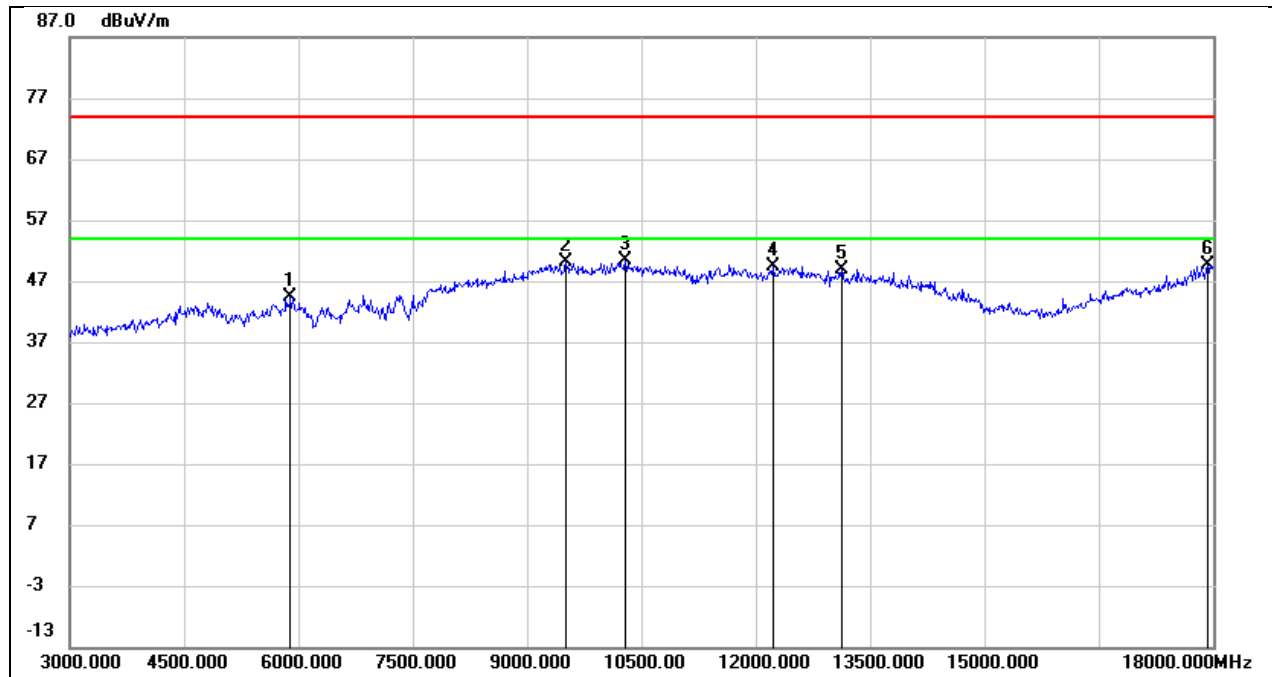


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5895.000	41.55	2.92	44.47	74.00	-29.53	peak
2	9510.000	37.59	12.45	50.04	74.00	-23.96	peak
3	10290.000	36.90	13.37	50.27	74.00	-23.73	peak
4	12225.000	30.61	18.76	49.37	74.00	-24.63	peak
5	13125.000	28.06	20.80	48.86	74.00	-25.14	peak
6	17925.000	20.85	28.87	49.72	74.00	-24.28	peak

Test Mode:	802.11n HT20	Frequency(MHz):	2412
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

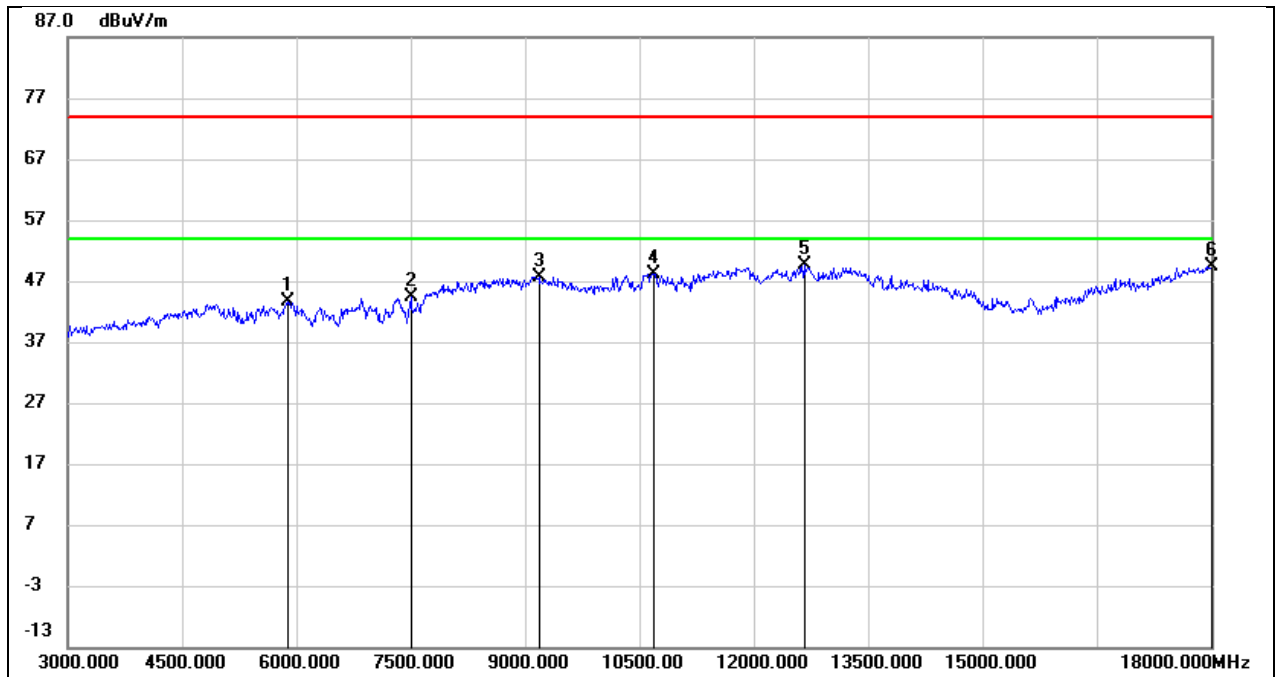


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5880.000	40.79	2.90	43.69	74.00	-30.31	peak
2	7500.000	36.89	7.39	44.28	74.00	-29.72	peak
3	9180.000	36.67	11.00	47.67	74.00	-26.33	peak
4	10680.000	33.87	14.38	48.25	74.00	-25.75	peak
5	12660.000	30.41	19.12	49.53	74.00	-24.47	peak
6	18000.000	19.80	29.64	49.44	74.00	-24.56	peak

Test Mode:	802.11n HT20	Frequency(MHz):	2437
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

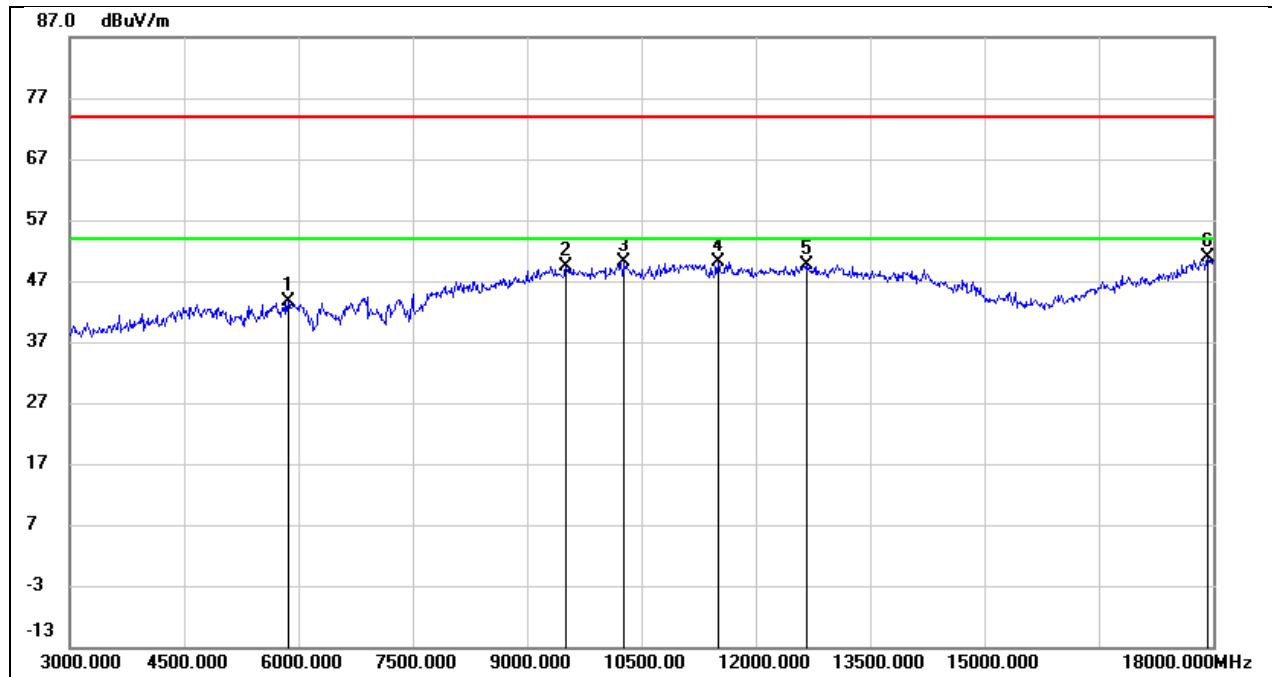


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5865.000	40.65	2.86	43.51	74.00	-30.49	peak
2	9510.000	36.93	12.45	49.38	74.00	-24.62	peak
3	10275.000	36.82	13.36	50.18	74.00	-23.82	peak
4	11505.000	32.25	17.99	50.24	74.00	-23.76	peak
5	12675.000	30.54	19.18	49.72	74.00	-24.28	peak
6	17925.000	21.91	28.87	50.78	74.00	-23.22	peak

Test Mode:	802.11n HT20	Frequency(MHz):	2437
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

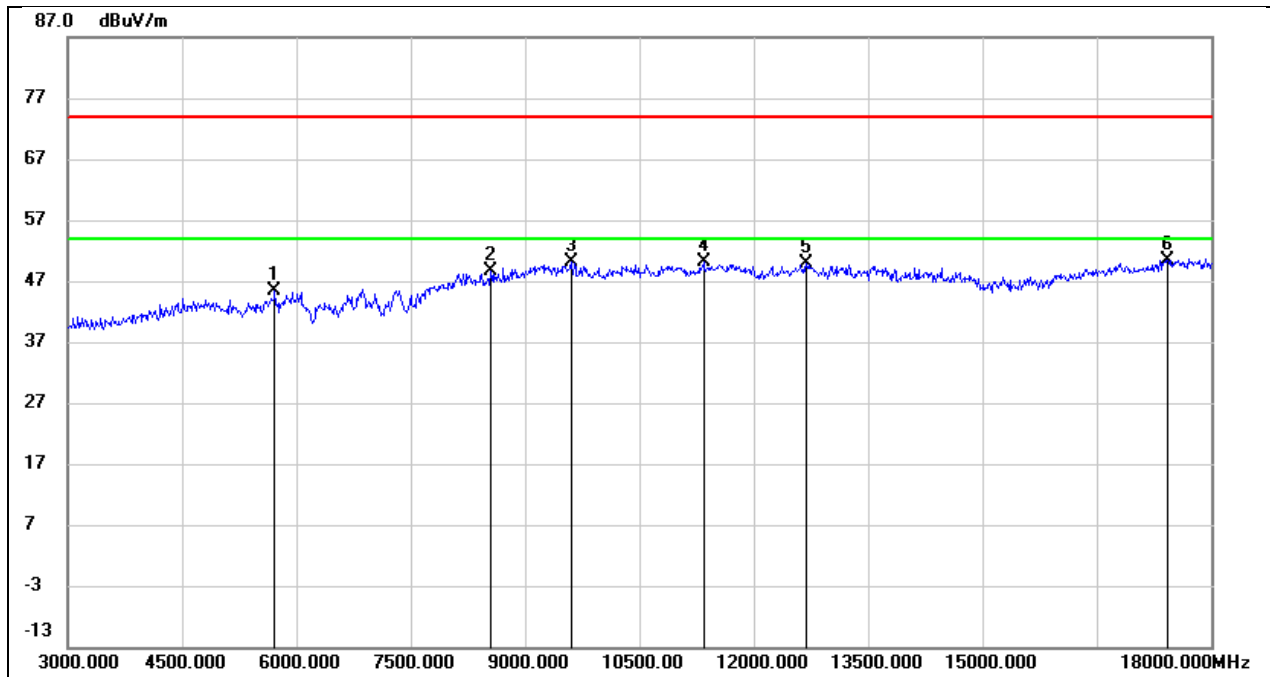


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5715.000	41.69	3.67	45.36	74.00	-28.64	peak
2	8550.000	38.83	9.75	48.58	74.00	-25.42	peak
3	9615.000	37.44	12.70	50.14	74.00	-23.86	peak
4	11340.000	33.97	16.18	50.15	74.00	-23.85	peak
5	12690.000	31.69	18.19	49.88	74.00	-24.12	peak
6	17430.000	25.08	25.40	50.48	74.00	-23.52	peak

Test Mode:	802.11n HT20	Frequency(MHz):	2462
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

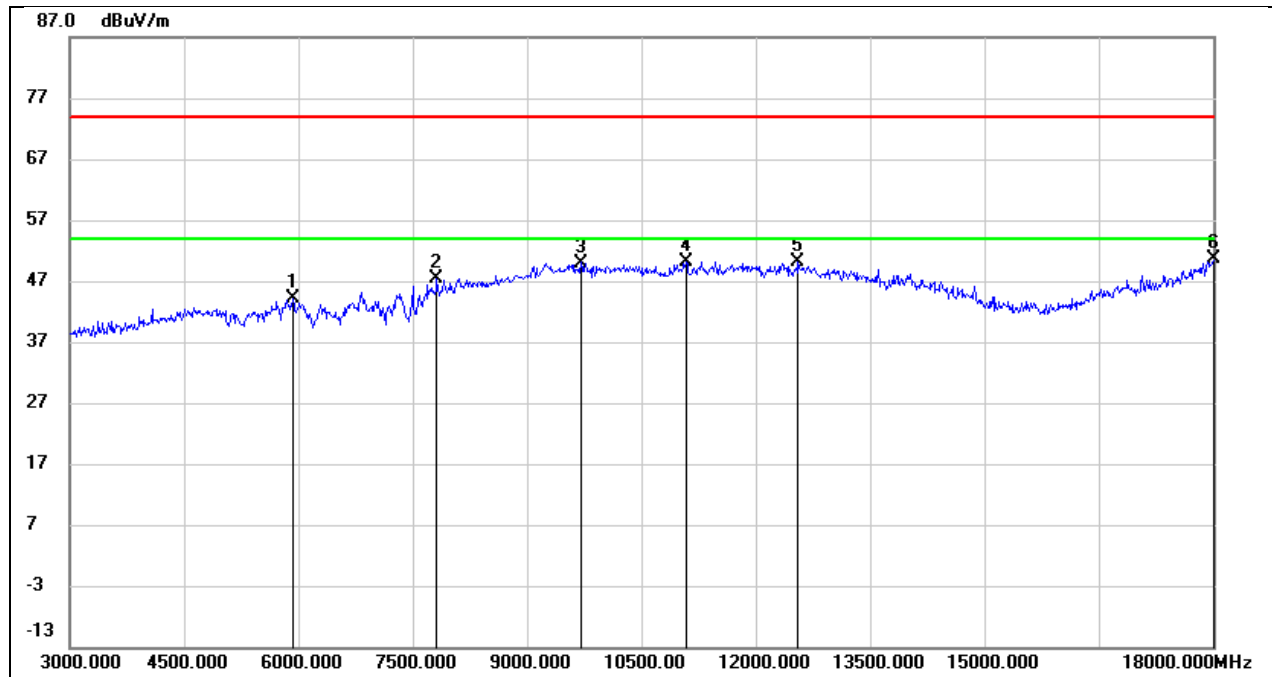


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5925.000	41.21	2.99	44.20	74.00	-29.80	peak
2	7815.000	39.61	7.73	47.34	74.00	-26.66	peak
3	9705.000	36.92	13.08	50.00	74.00	-24.00	peak
4	11085.000	33.77	16.46	50.23	74.00	-23.77	peak
5	12555.000	31.08	18.94	50.02	74.00	-23.98	peak
6	18000.000	20.95	29.64	50.59	74.00	-23.41	peak

Test Mode:	802.11n HT20	Frequency(MHz):	2462
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

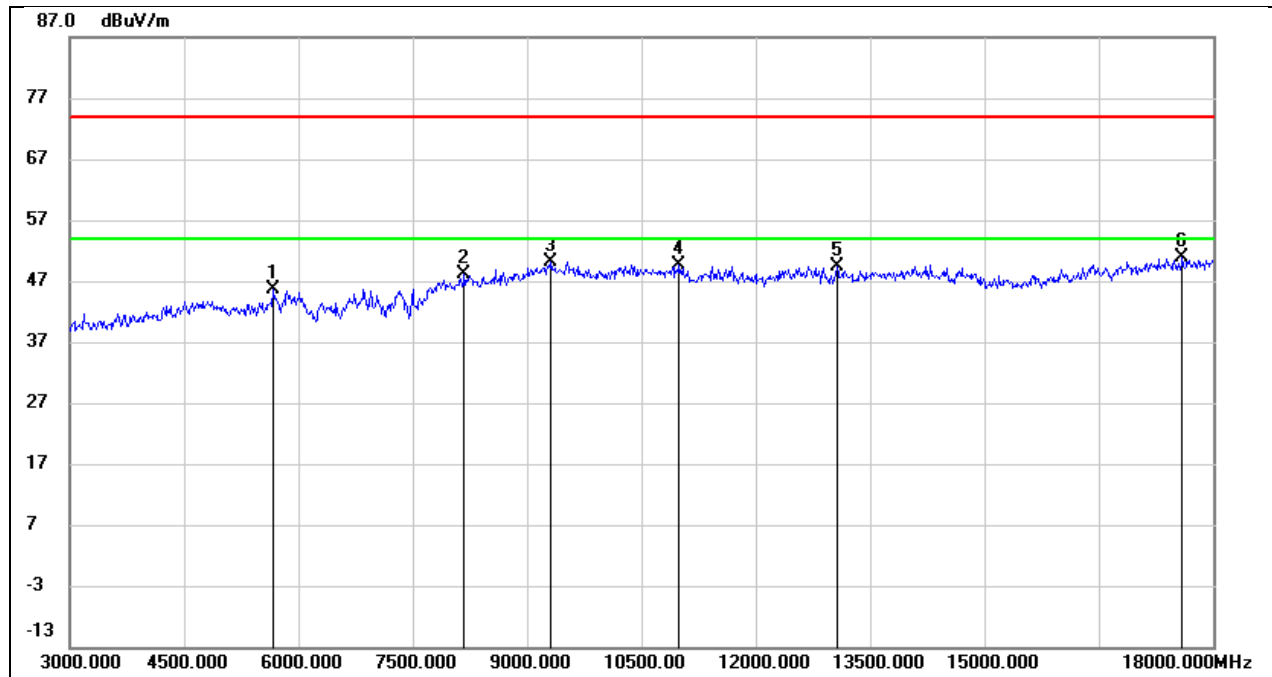


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5670.000	41.95	3.59	45.54	74.00	-28.46	peak
2	8175.000	39.02	9.00	48.02	74.00	-25.98	peak
3	9315.000	38.48	11.73	50.21	74.00	-23.79	peak
4	10995.000	34.52	15.13	49.65	74.00	-24.35	peak
5	13065.000	30.26	19.22	49.48	74.00	-24.52	peak
6	17595.000	25.22	25.69	50.91	74.00	-23.09	peak

Test Mode:	802.11n HT40	Frequency(MHz):	2422
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

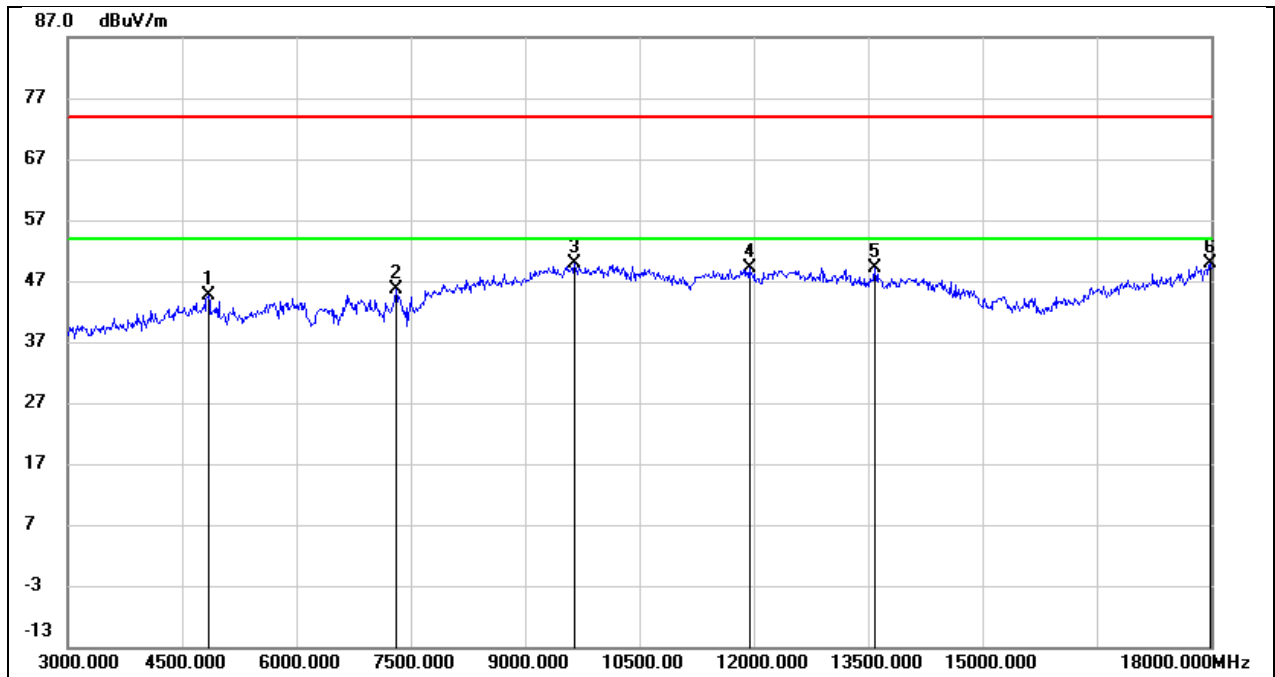


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4845.000	44.03	0.58	44.61	74.00	-29.39	peak
2	7305.000	38.60	7.03	45.63	74.00	-28.37	peak
3	9645.000	36.84	12.94	49.78	74.00	-24.22	peak
4	11940.000	30.49	18.65	49.14	74.00	-24.86	peak
5	13590.000	26.64	22.60	49.24	74.00	-24.76	peak
6	17985.000	20.39	29.49	49.88	74.00	-24.12	peak

Test Mode:	802.11n HT40	Frequency(MHz):	2422
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

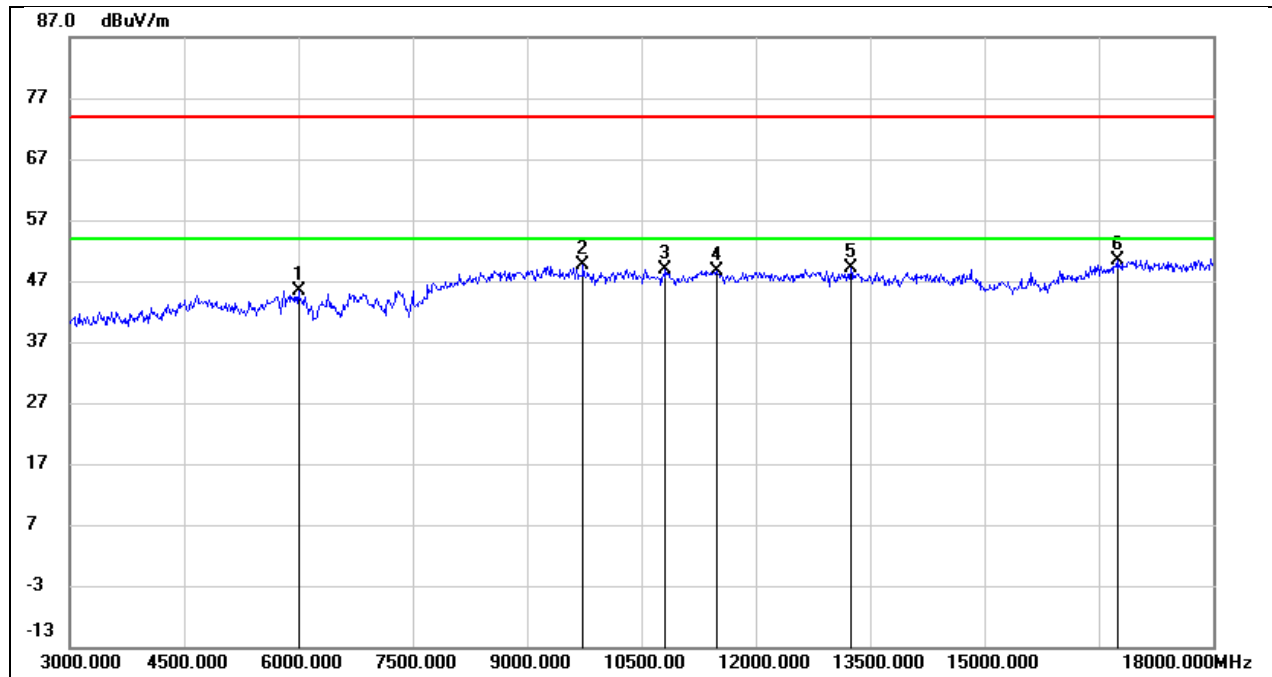


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6000.000	41.28	4.13	45.41	74.00	-28.59	peak
2	9735.000	36.72	12.82	49.54	74.00	-24.46	peak
3	10815.000	34.56	14.38	48.94	74.00	-25.06	peak
4	11490.000	32.20	16.45	48.65	74.00	-25.35	peak
5	13245.000	29.30	19.95	49.25	74.00	-24.75	peak
6	16740.000	25.70	24.77	50.47	74.00	-23.53	peak

Test Mode:	802.11n HT40	Frequency(MHz):	2437
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

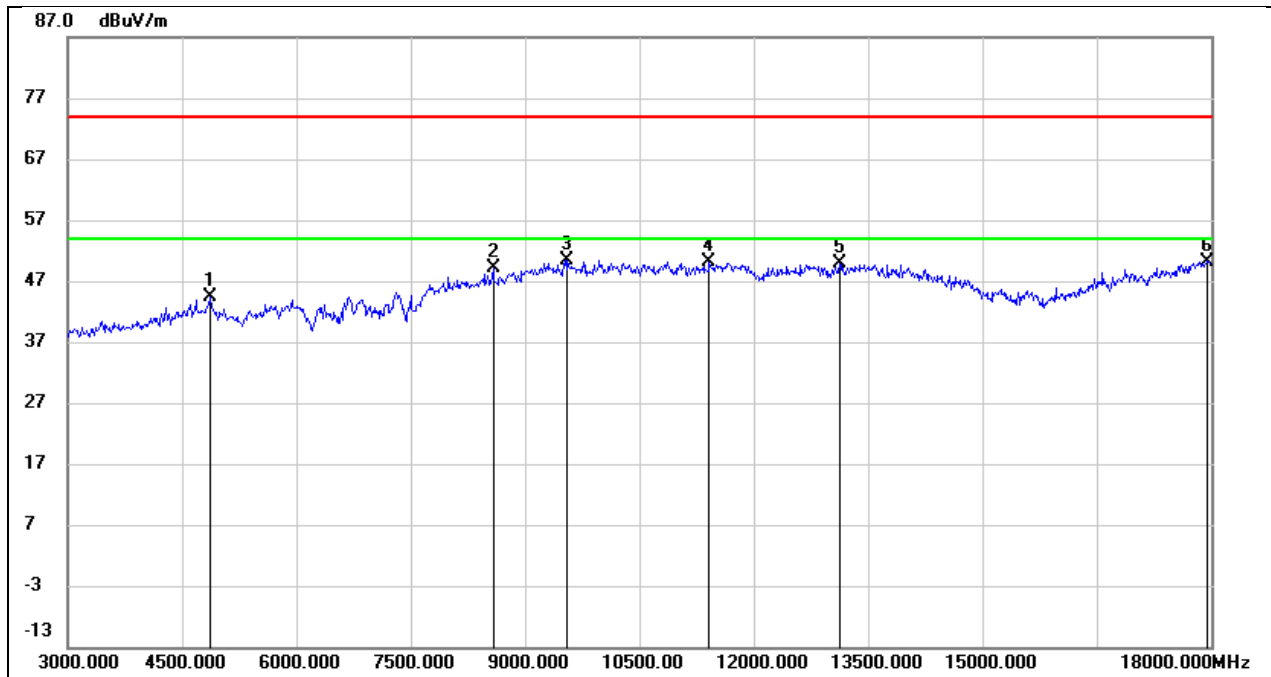


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4860.000	43.82	0.62	44.44	74.00	-29.56	peak
2	8580.000	39.81	9.26	49.07	74.00	-24.93	peak
3	9555.000	37.74	12.65	50.39	74.00	-23.61	peak
4	11415.000	32.51	17.66	50.17	74.00	-23.83	peak
5	13125.000	29.06	20.80	49.86	74.00	-24.14	peak
6	17955.000	21.07	29.18	50.25	74.00	-23.75	peak

Test Mode:	802.11n HT40	Frequency(MHz):	2437
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

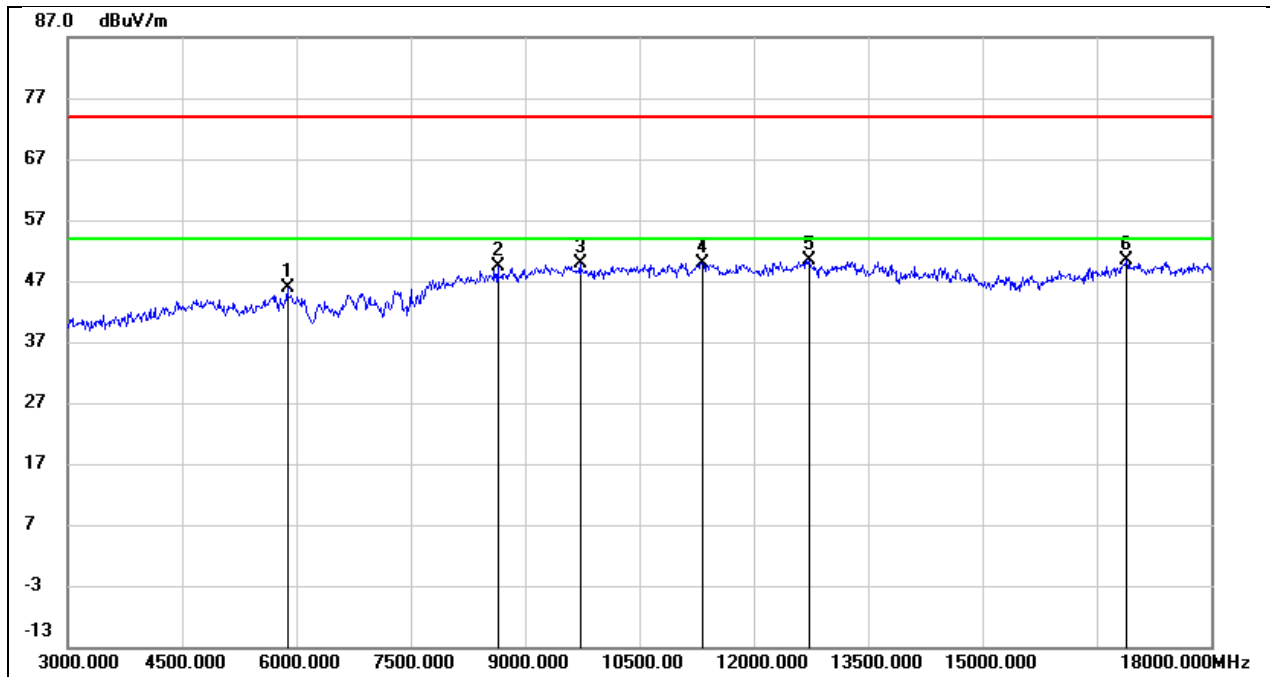


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5880.000	41.86	3.95	45.81	74.00	-28.19	peak
2	8640.000	39.37	9.90	49.27	74.00	-24.73	peak
3	9720.000	37.09	12.80	49.89	74.00	-24.11	peak
4	11325.000	33.81	16.18	49.99	74.00	-24.01	peak
5	12720.000	32.24	18.26	50.50	74.00	-23.50	peak
6	16890.000	25.31	25.05	50.36	74.00	-23.64	peak

Test Mode:	802.11n HT40	Frequency(MHz):	2452
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

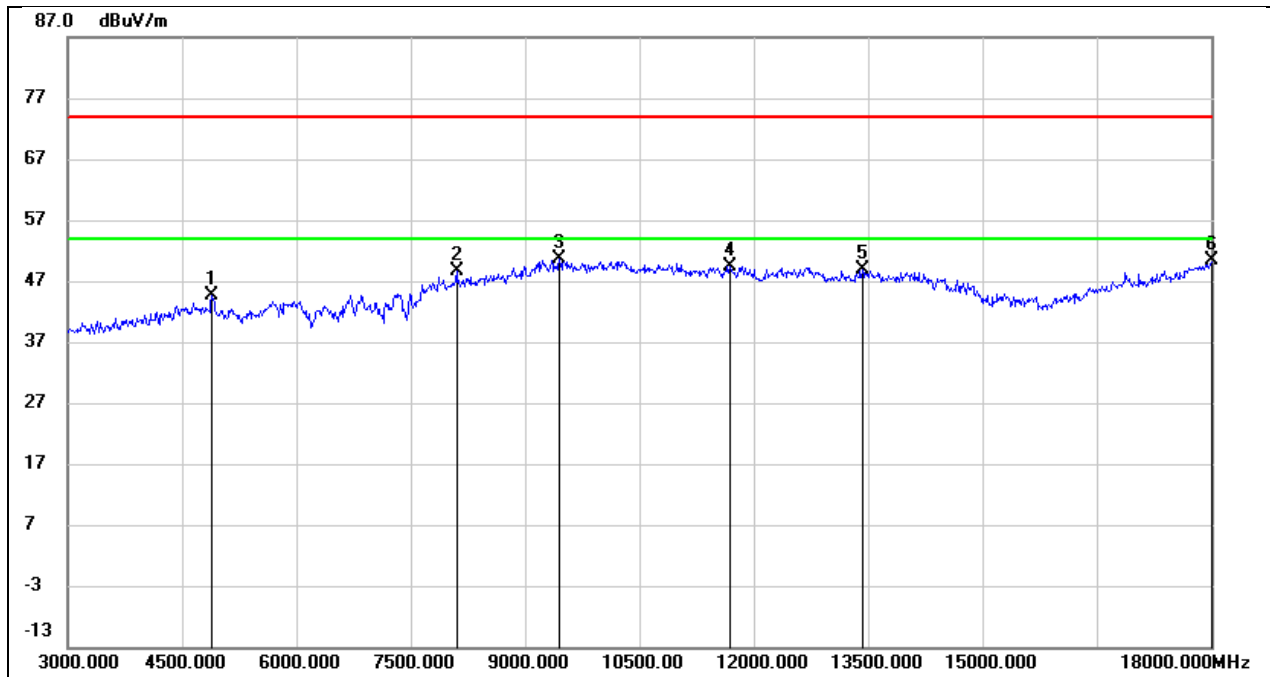


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4890.000	43.84	0.68	44.52	74.00	-29.48	peak
2	8100.000	40.28	8.29	48.57	74.00	-25.43	peak
3	9450.000	38.40	12.18	50.58	74.00	-23.42	peak
4	11685.000	30.97	18.31	49.28	74.00	-24.72	peak
5	13425.000	26.67	22.14	48.81	74.00	-25.19	peak
6	18000.000	20.80	29.64	50.44	74.00	-23.56	peak

Test Mode:	802.11n HT40	Frequency(MHz):	2452
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

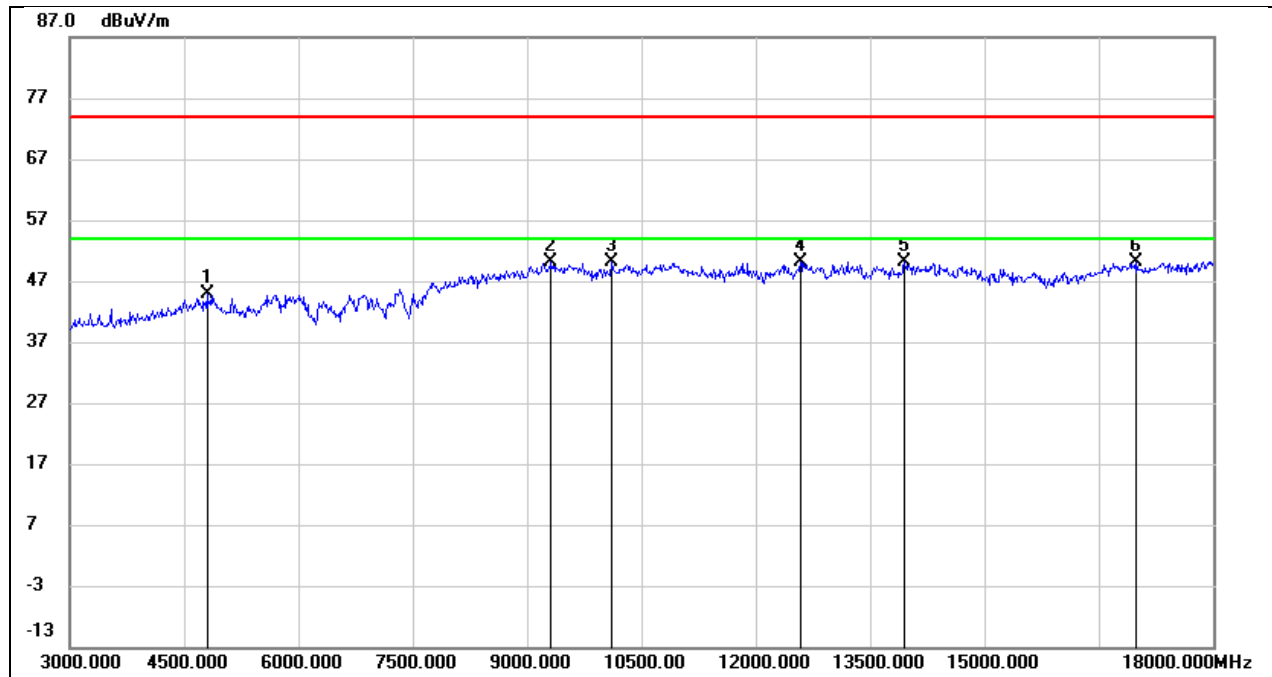


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4800.000	43.24	1.55	44.79	74.00	-29.21	peak
2	9315.000	38.37	11.73	50.10	74.00	-23.90	peak
3	10110.000	37.40	12.72	50.12	74.00	-23.88	peak
4	12585.000	32.07	18.01	50.08	74.00	-23.92	peak
5	13950.000	28.08	21.97	50.05	74.00	-23.95	peak
6	16995.000	24.93	25.18	50.11	74.00	-23.89	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

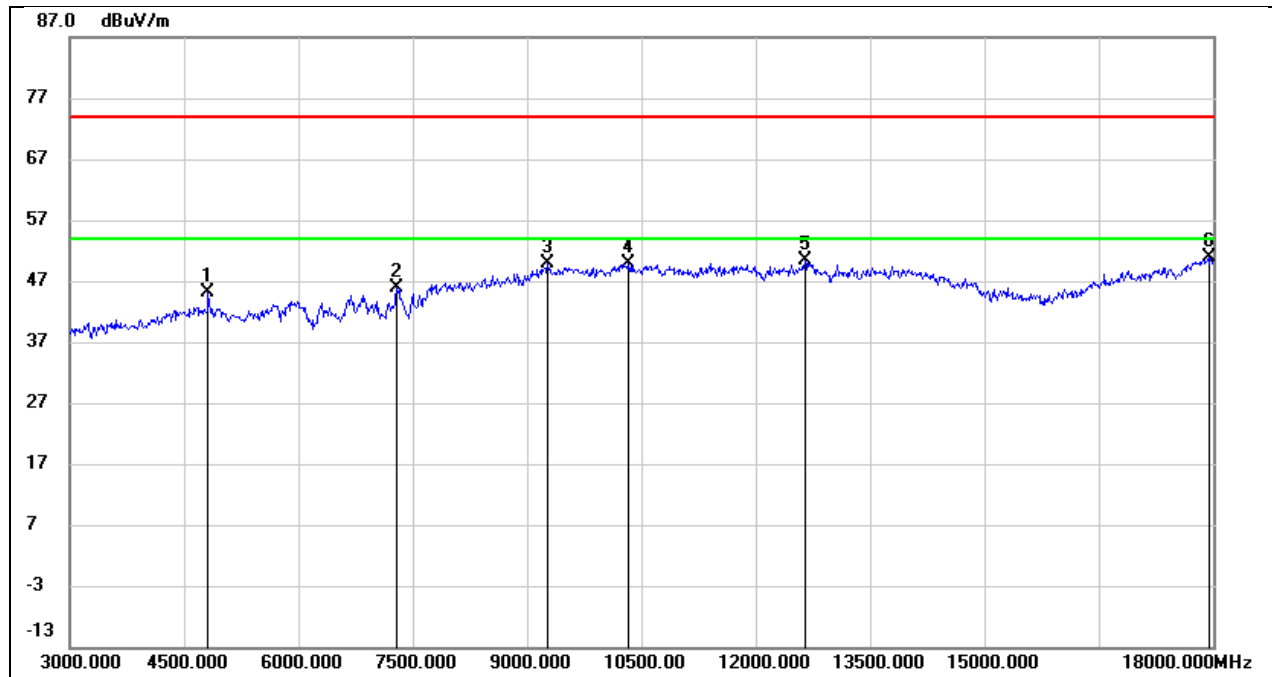


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4815.000	44.70	0.50	45.20	74.00	-28.80	peak
2	7290.000	38.90	7.02	45.92	74.00	-28.08	peak
3	9270.000	38.43	11.38	49.81	74.00	-24.19	peak
4	10335.000	36.57	13.41	49.98	74.00	-24.02	peak
5	12645.000	31.36	19.09	50.45	74.00	-23.55	peak
6	17940.000	21.90	29.03	50.93	74.00	-23.07	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	2412
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

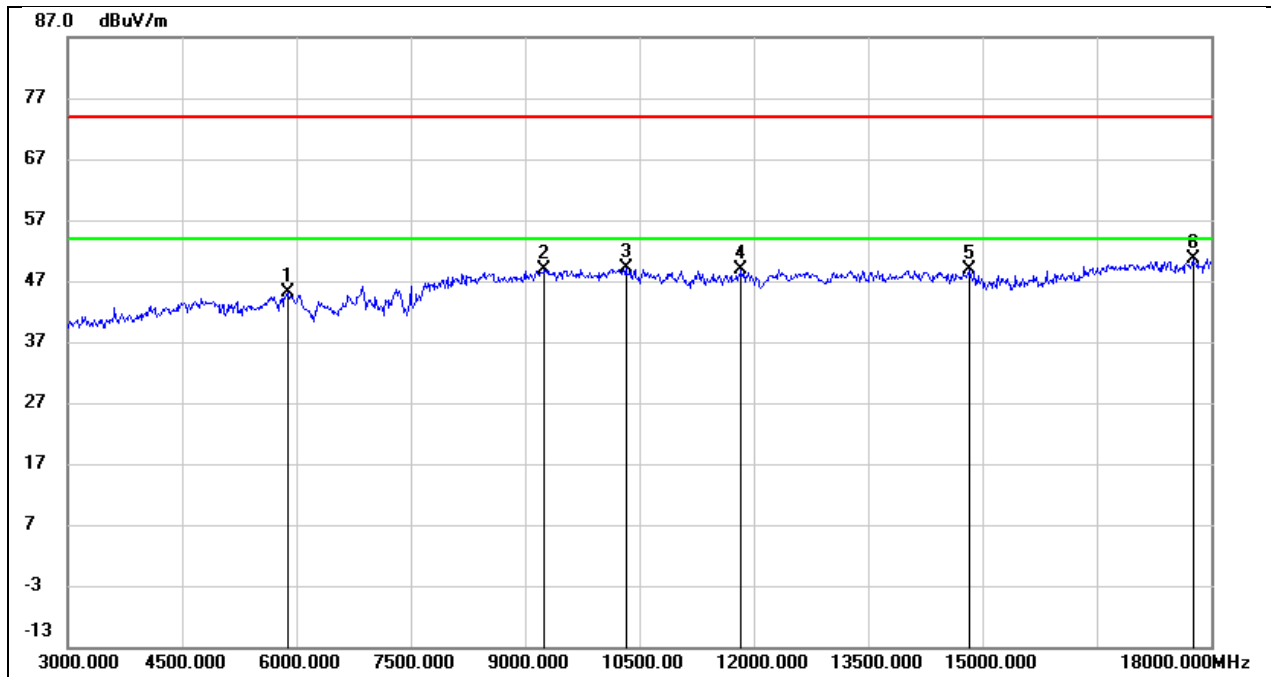


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5895.000	41.14	3.96	45.10	74.00	-28.90	peak
2	9255.000	37.28	11.51	48.79	74.00	-25.21	peak
3	10320.000	36.06	13.01	49.07	74.00	-24.93	peak
4	11835.000	31.57	17.31	48.88	74.00	-25.12	peak
5	14820.000	28.08	20.84	48.92	74.00	-25.08	peak
6	17760.000	24.36	26.16	50.52	74.00	-23.48	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	2437
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

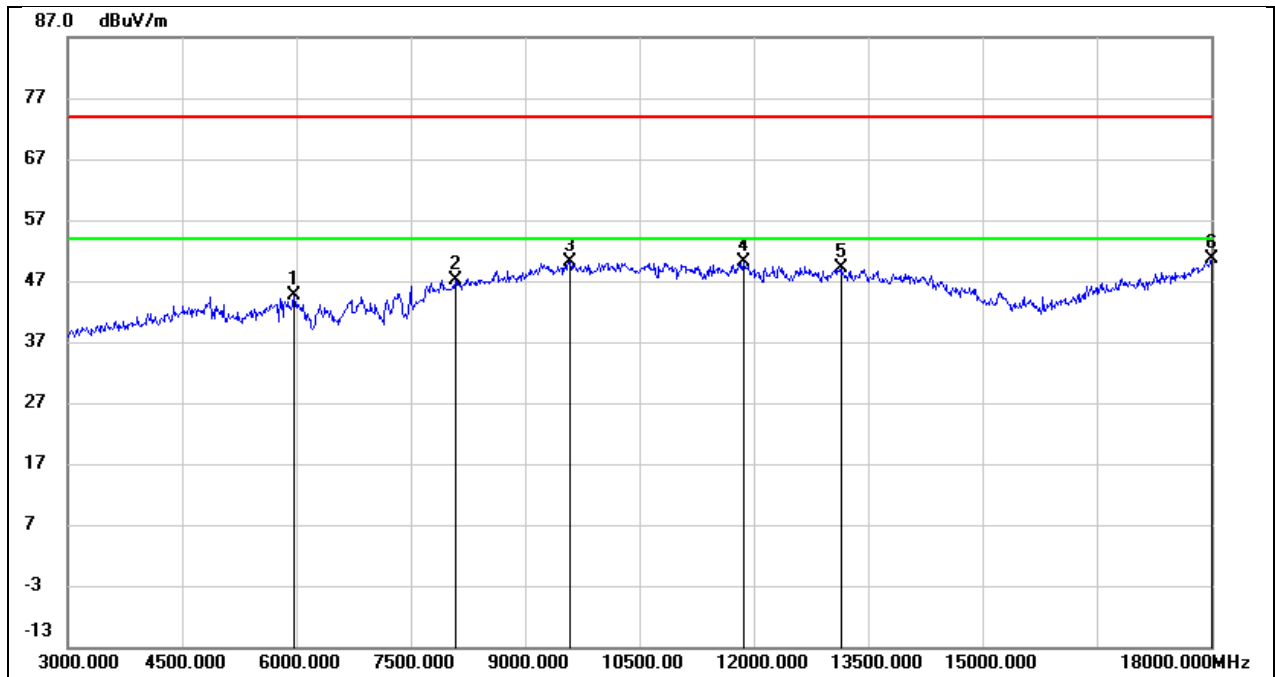


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5970.000	41.53	3.07	44.60	74.00	-29.40	peak
2	8085.000	38.82	8.25	47.07	74.00	-26.93	peak
3	9585.000	37.32	12.77	50.09	74.00	-23.91	peak
4	11865.000	31.58	18.57	50.15	74.00	-23.85	peak
5	13140.000	28.13	20.89	49.02	74.00	-24.98	peak
6	18000.000	20.90	29.64	50.54	74.00	-23.46	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	2437
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

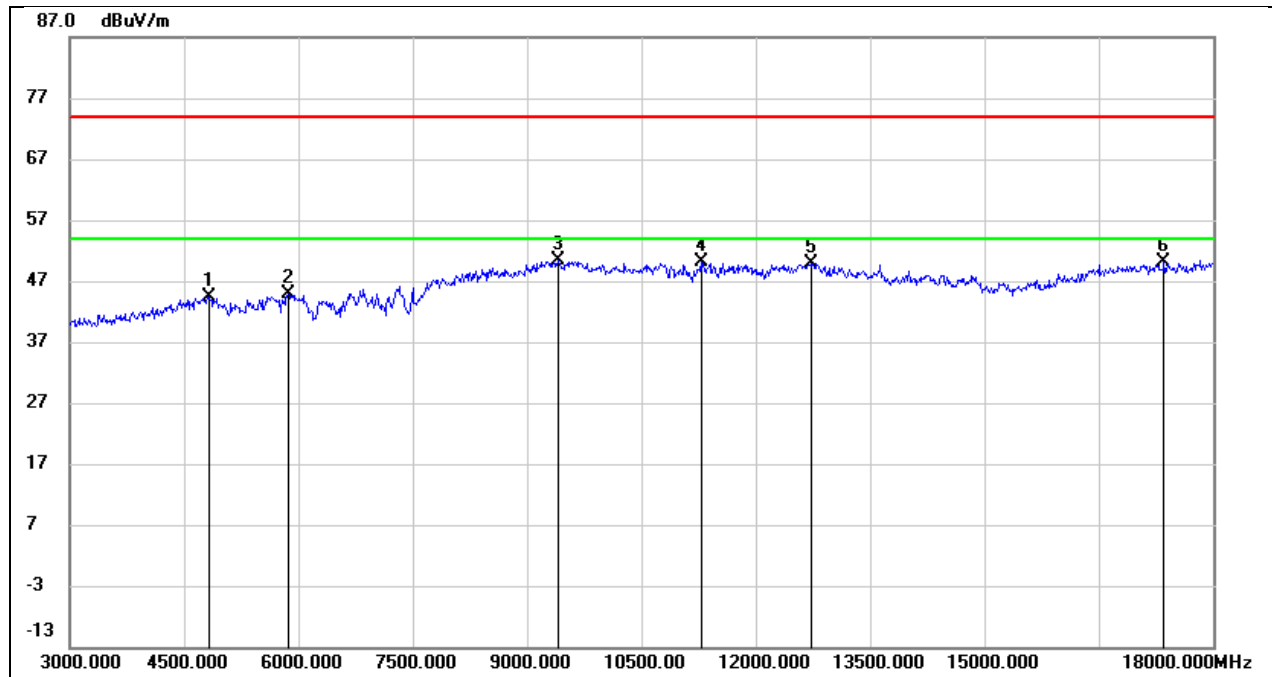


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4830.000	42.64	1.64	44.28	74.00	-29.72	peak
2	5865.000	40.97	3.92	44.89	74.00	-29.11	peak
3	9405.000	38.31	12.04	50.35	74.00	-23.65	peak
4	11280.000	34.04	16.13	50.17	74.00	-23.83	peak
5	12735.000	31.65	18.29	49.94	74.00	-24.06	peak
6	17355.000	24.64	25.37	50.01	74.00	-23.99	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	2462
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

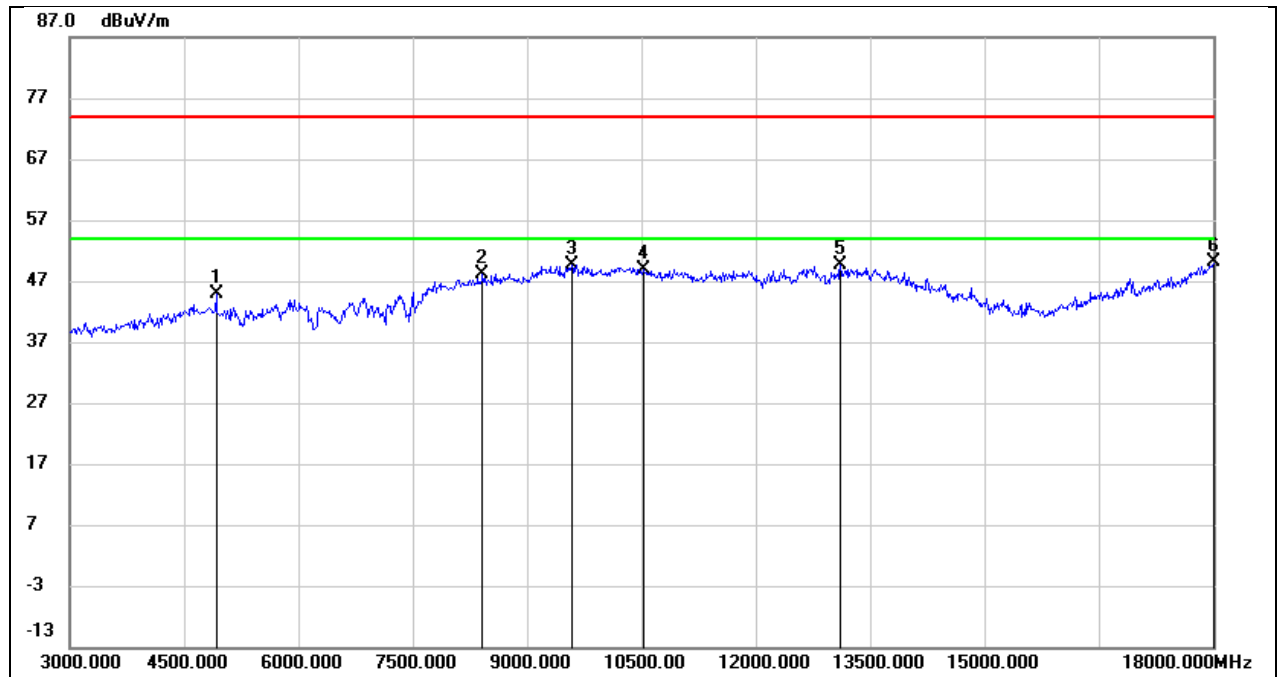


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4920.000	44.09	0.76	44.85	74.00	-29.15	peak
2	8415.000	39.30	8.91	48.21	74.00	-25.79	peak
3	9585.000	36.76	12.77	49.53	74.00	-24.47	peak
4	10530.000	35.15	13.82	48.97	74.00	-25.03	peak
5	13110.000	28.88	20.72	49.60	74.00	-24.40	peak
6	18000.000	20.56	29.64	50.20	74.00	-23.80	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	2462
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

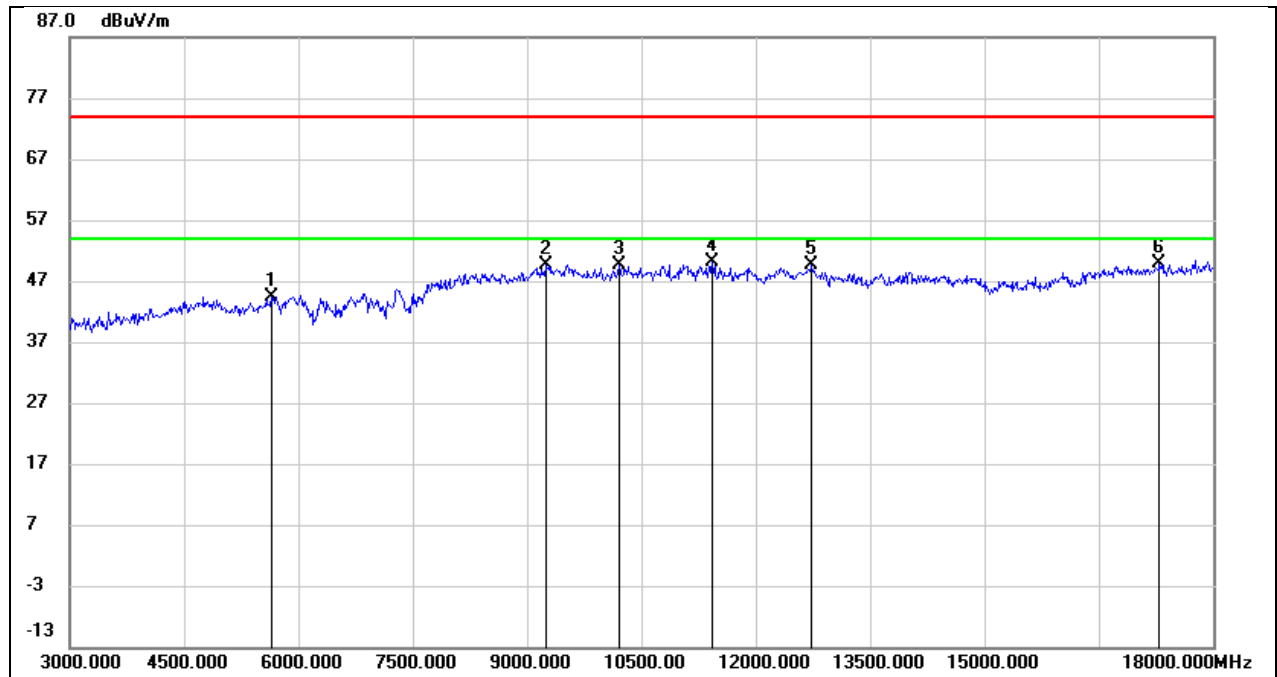


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5640.000	40.89	3.55	44.44	74.00	-29.56	peak
2	9240.000	38.05	11.46	49.51	74.00	-24.49	peak
3	10200.000	36.87	12.77	49.64	74.00	-24.36	peak
4	11430.000	33.88	16.31	50.19	74.00	-23.81	peak
5	12735.000	31.23	18.29	49.52	74.00	-24.48	peak
6	17295.000	24.46	25.36	49.82	74.00	-24.18	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	2422
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

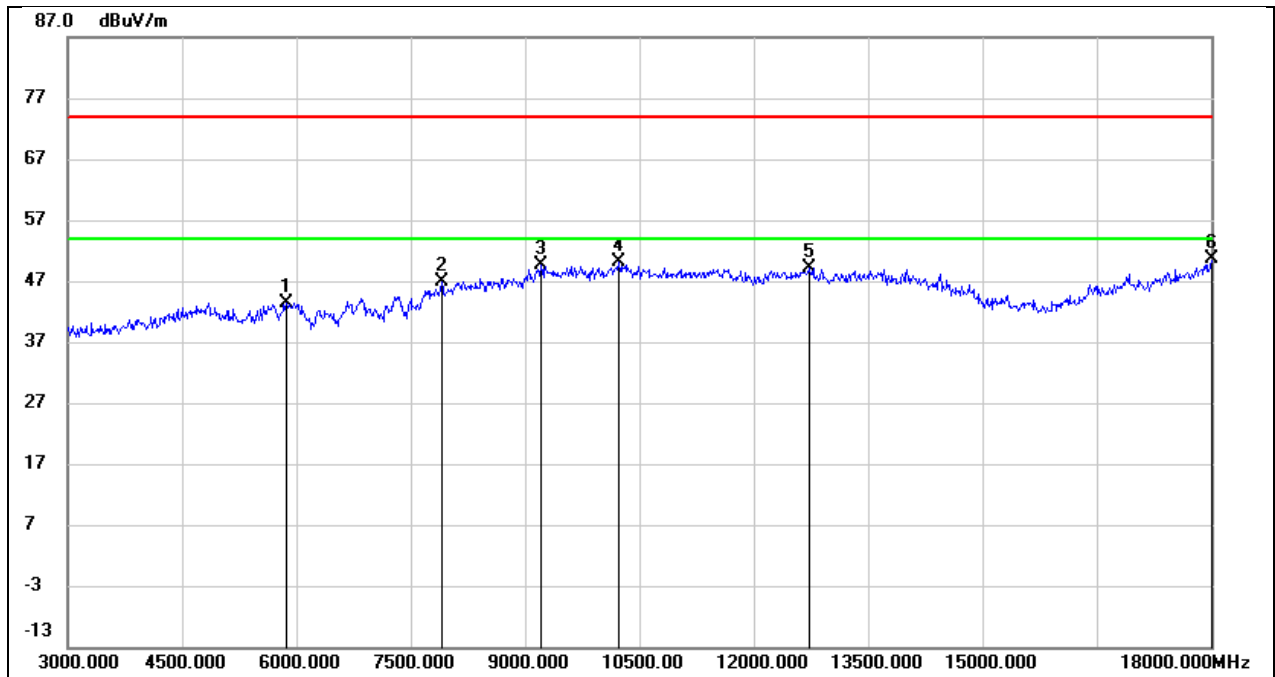


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5865.000	40.46	2.86	43.32	74.00	-30.68	peak
2	7905.000	38.93	7.88	46.81	74.00	-27.19	peak
3	9210.000	38.55	11.13	49.68	74.00	-24.32	peak
4	10230.000	36.79	13.31	50.10	74.00	-23.90	peak
5	12720.000	29.84	19.29	49.13	74.00	-24.87	peak
6	18000.000	21.06	29.64	50.70	74.00	-23.30	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	2422
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

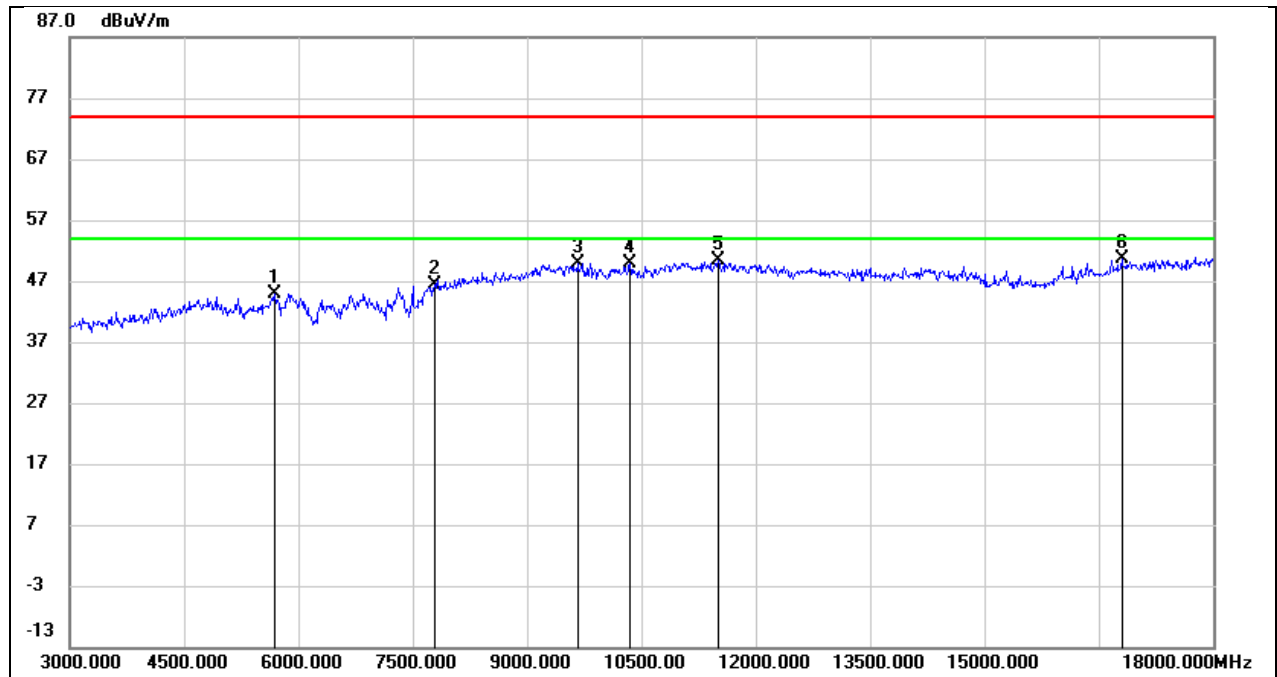


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5685.000	41.23	3.63	44.86	74.00	-29.14	peak
2	7785.000	38.09	8.18	46.27	74.00	-27.73	peak
3	9660.000	37.21	12.75	49.96	74.00	-24.04	peak
4	10350.000	36.79	13.08	49.87	74.00	-24.13	peak
5	11505.000	33.96	16.50	50.46	74.00	-23.54	peak
6	16800.000	25.79	24.93	50.72	74.00	-23.28	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	2437
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

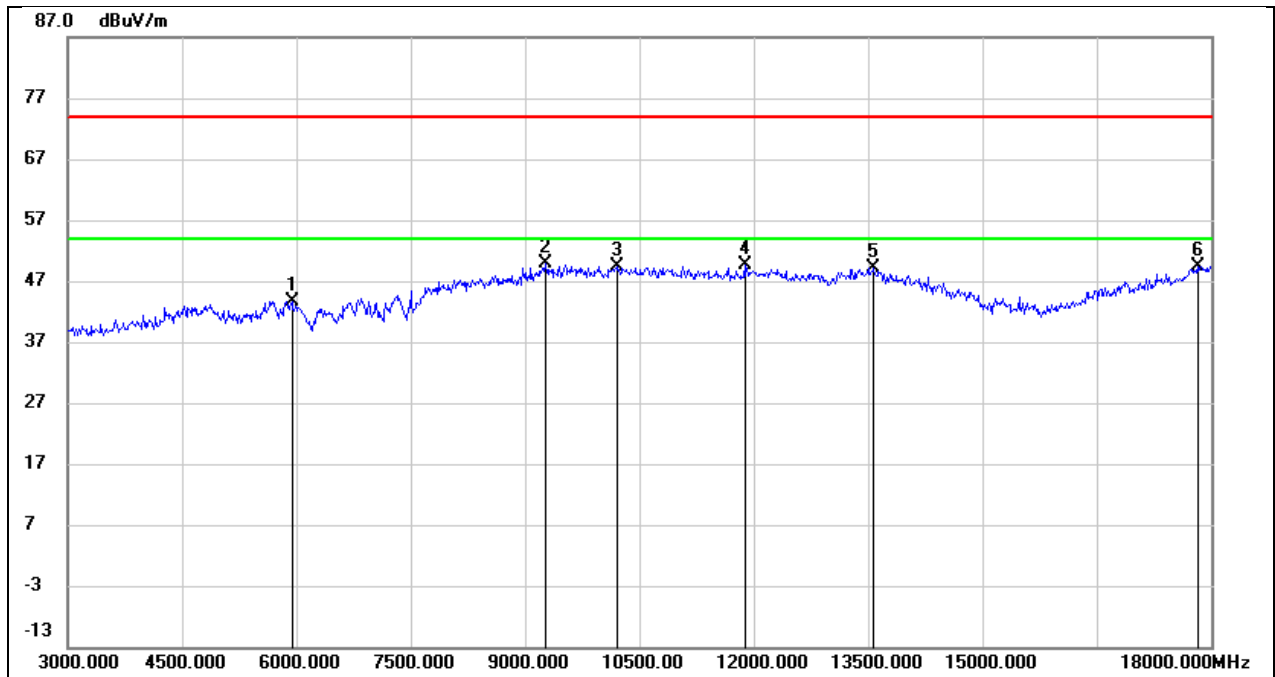


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5940.000	40.68	3.01	43.69	74.00	-30.31	peak
2	9270.000	38.40	11.38	49.78	74.00	-24.22	peak
3	10200.000	36.23	13.27	49.50	74.00	-24.50	peak
4	11880.000	31.07	18.59	49.66	74.00	-24.34	peak
5	13575.000	26.56	22.58	49.14	74.00	-24.86	peak
6	17820.000	21.55	27.80	49.35	74.00	-24.65	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	2437
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

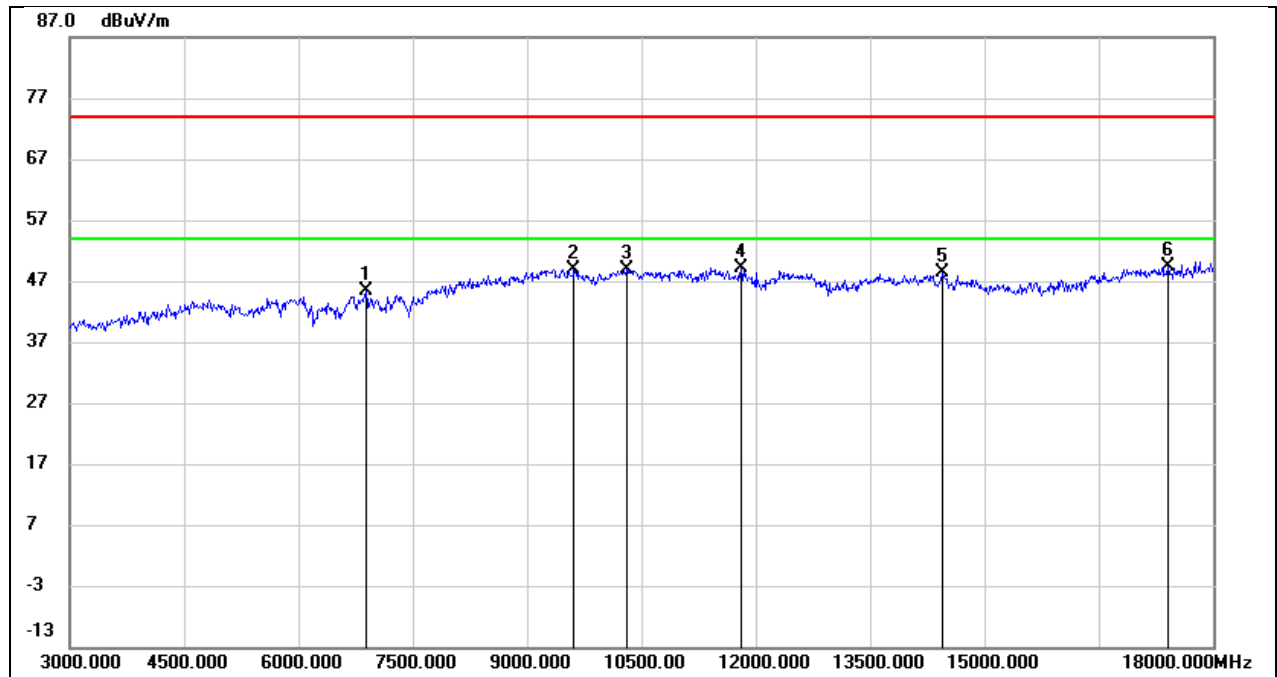


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6885.000	38.47	6.95	45.42	74.00	-28.58	peak
2	9615.000	36.15	12.70	48.85	74.00	-25.15	peak
3	10305.000	35.93	12.98	48.91	74.00	-25.09	peak
4	11805.000	31.98	17.24	49.22	74.00	-24.78	peak
5	14445.000	26.81	21.66	48.47	74.00	-25.53	peak
6	17415.000	23.96	25.40	49.36	74.00	-24.64	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	2452
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

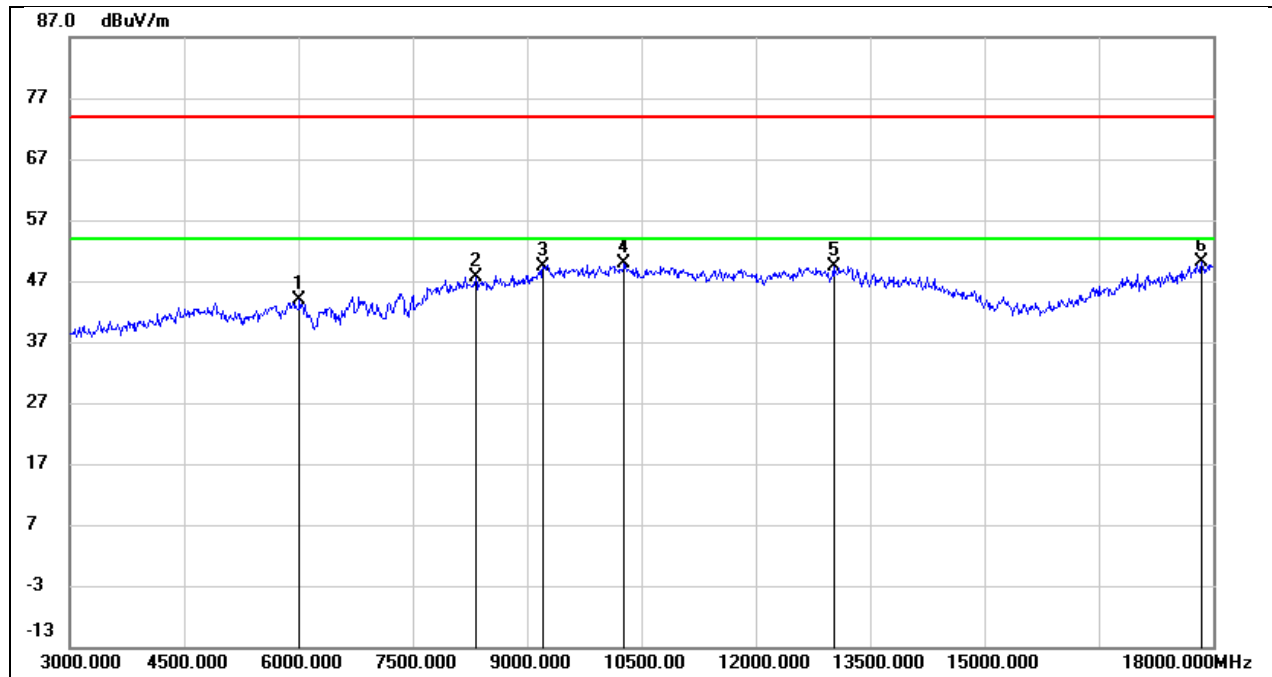

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6015.000	40.59	3.20	43.79	74.00	-30.21	peak
2	8325.000	38.87	8.76	47.63	74.00	-26.37	peak
3	9210.000	38.33	11.13	49.46	74.00	-24.54	peak
4	10275.000	36.54	13.36	49.90	74.00	-24.10	peak
5	13020.000	29.23	20.24	49.47	74.00	-24.53	peak
6	17850.000	22.13	28.11	50.24	74.00	-23.76	peak


Test Mode:	802.11ax HE40	Frequency(MHz):	2452
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

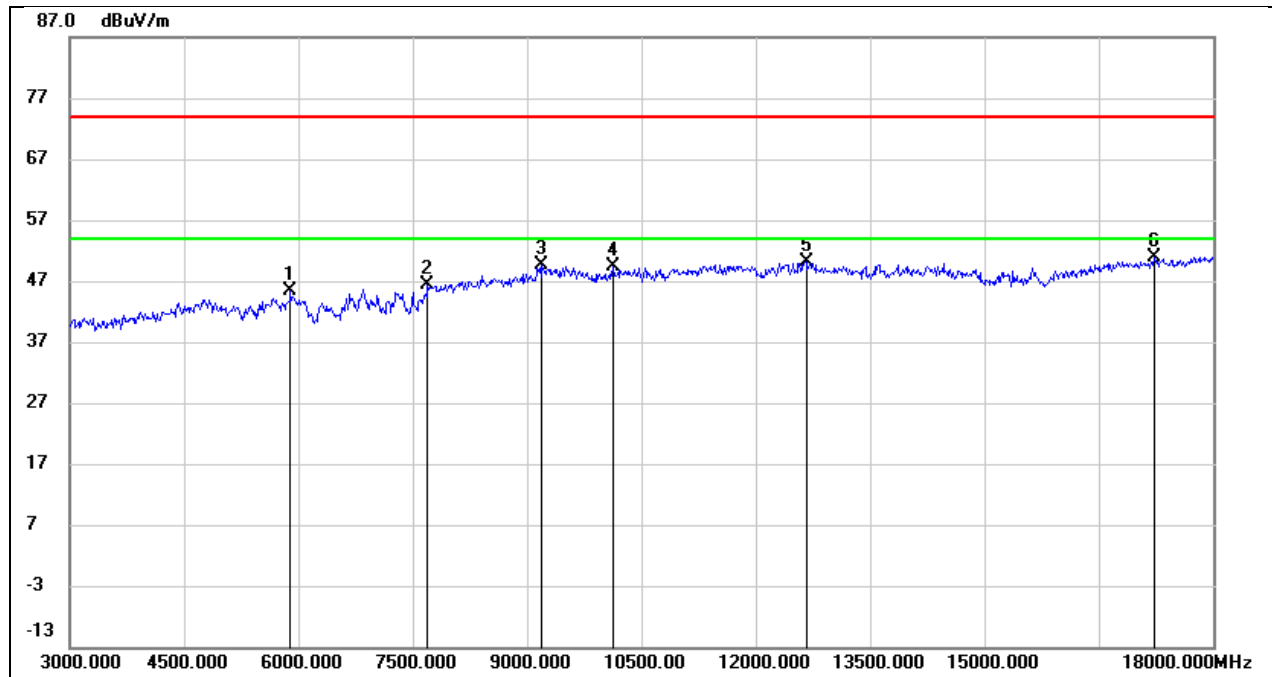

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5895.000	41.31	3.96	45.27	74.00	-28.73	peak
2	7695.000	38.20	8.11	46.31	74.00	-27.69	peak
3	9195.000	38.39	11.31	49.70	74.00	-24.30	peak
4	10125.000	36.60	12.72	49.32	74.00	-24.68	peak
5	12660.000	32.10	18.13	50.23	74.00	-23.77	peak
6	17235.000	25.58	25.33	50.91	74.00	-23.09	peak


8.4. SPURIOUS EMISSIONS(9 KHZ~30 MHZ)

Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	AC 120V_60HZ

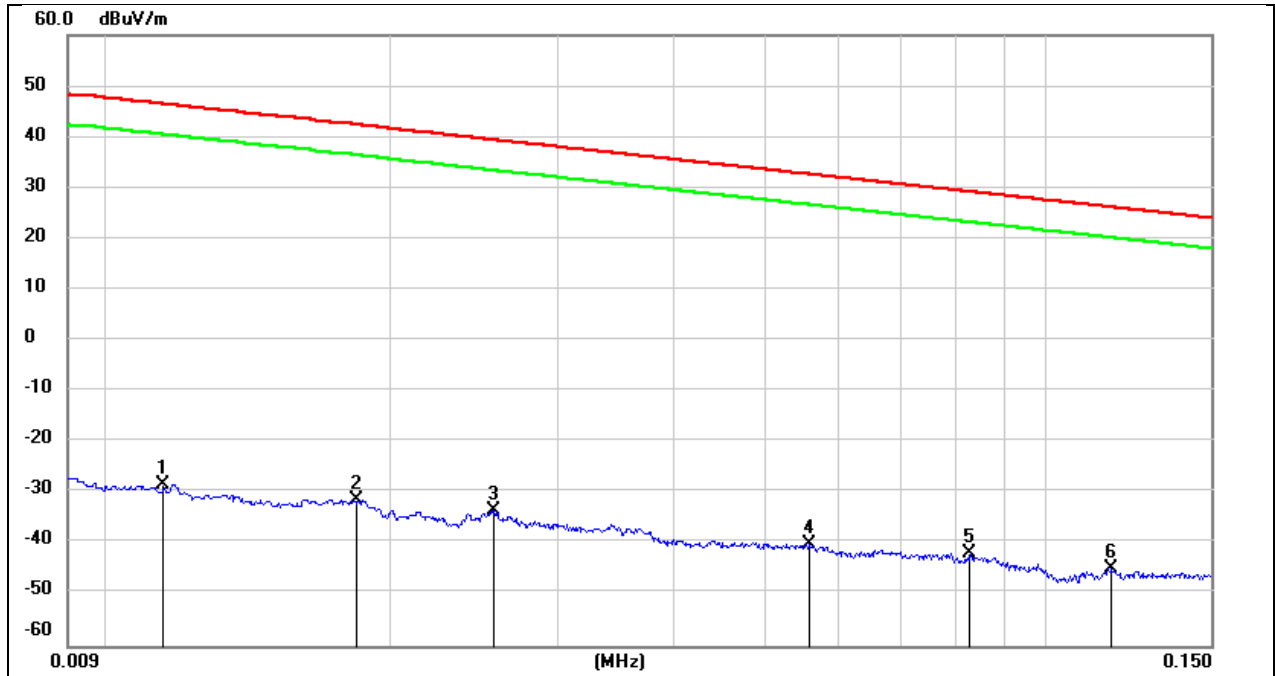


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.0114	72.95	-101.40	-28.45	46.46	-74.91	peak
2	0.0183	70.06	-101.36	-31.30	42.35	-73.65	peak
3	0.0257	67.96	-101.37	-33.41	39.40	-72.81	peak
4	0.0558	61.48	-101.50	-40.02	32.67	-72.69	peak
5	0.0830	59.68	-101.65	-41.97	29.22	-71.19	peak
6	0.1174	56.83	-101.74	-44.91	26.21	-71.12	peak

Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	AC 120V_60HZ

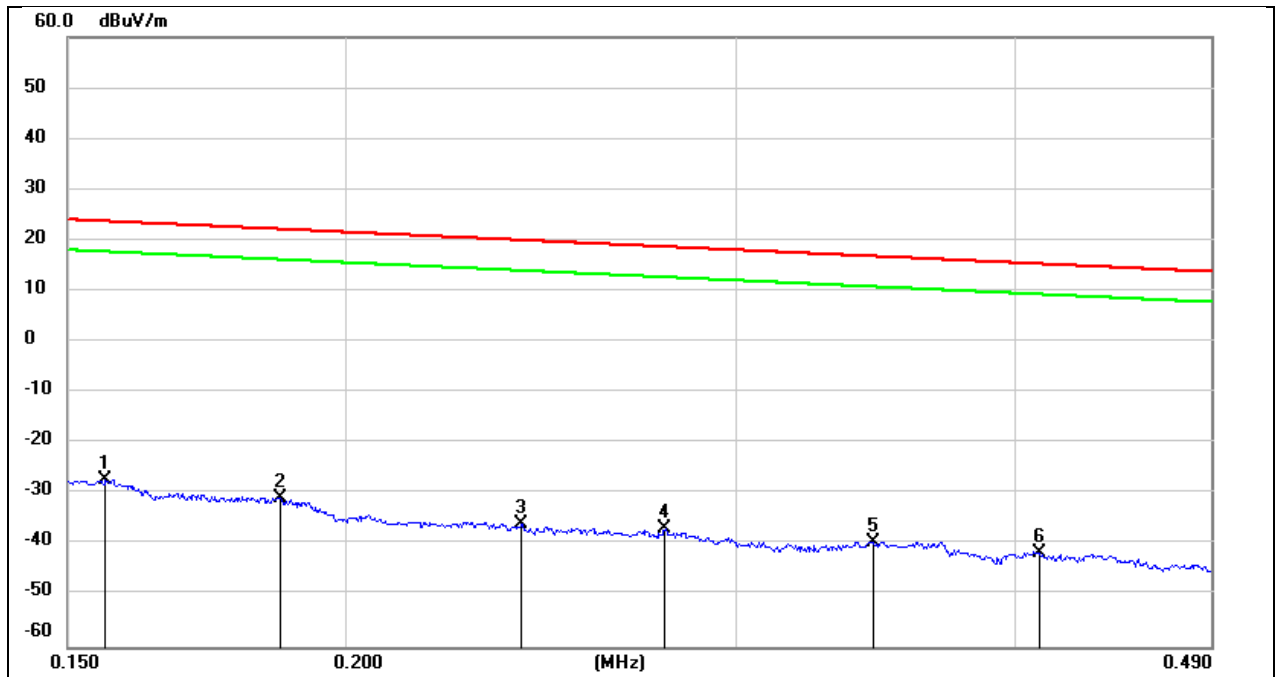

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.1559	74.65	-101.65	-27.00	23.74	-50.74	peak
2	0.1869	71.04	-101.70	-30.66	22.17	-52.83	peak
3	0.2401	66.01	-101.78	-35.77	19.99	-55.76	peak
4	0.2785	65.21	-101.83	-36.62	18.70	-55.32	peak
5	0.3452	62.49	-101.90	-39.41	16.84	-56.25	peak
6	0.4102	60.48	-101.97	-41.49	15.34	-56.83	peak


Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	AC 120V_60HZ

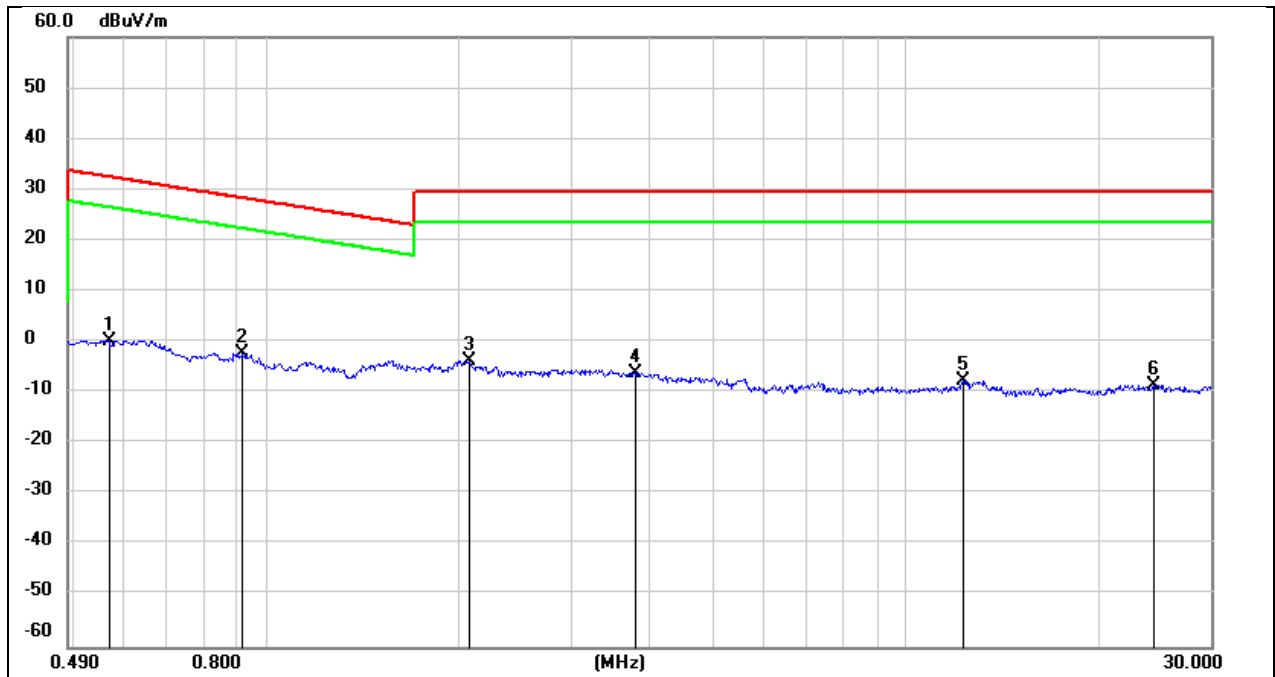

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.5682	62.37	-62.07	0.30	32.51	-32.21	peak
2	0.9193	60.04	-62.22	-2.18	28.33	-30.51	peak
3	2.0834	58.00	-61.80	-3.80	29.54	-33.34	peak
4	3.7715	55.29	-61.38	-6.09	29.54	-35.63	peak
5	12.3231	53.20	-60.90	-7.70	29.54	-37.24	peak
6	24.5106	52.08	-60.49	-8.41	29.54	-37.95	peak


8.5. SPURIOUS EMISSIONS(18 GHZ~26 GHZ)

Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	AC 120V_60HZ

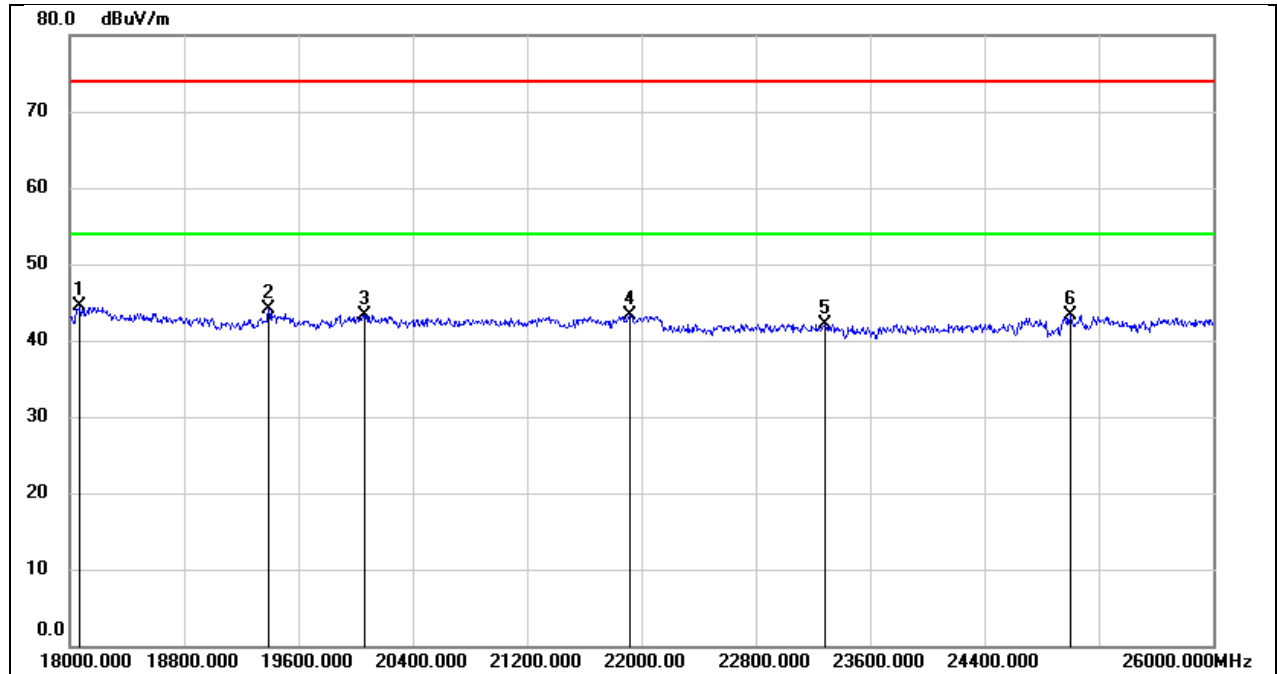

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18072.000	49.95	-5.43	44.52	74.00	-29.48	peak
2	19392.000	49.62	-5.57	44.05	74.00	-29.95	peak
3	20064.000	48.76	-5.49	43.27	74.00	-30.73	peak
4	21920.000	47.80	-4.43	43.37	74.00	-30.63	peak
5	23288.000	45.43	-3.33	42.10	74.00	-31.90	peak
6	25000.000	45.36	-2.10	43.26	74.00	-30.74	peak


Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Vertical	Test Voltage:	AC 120V_60HZ

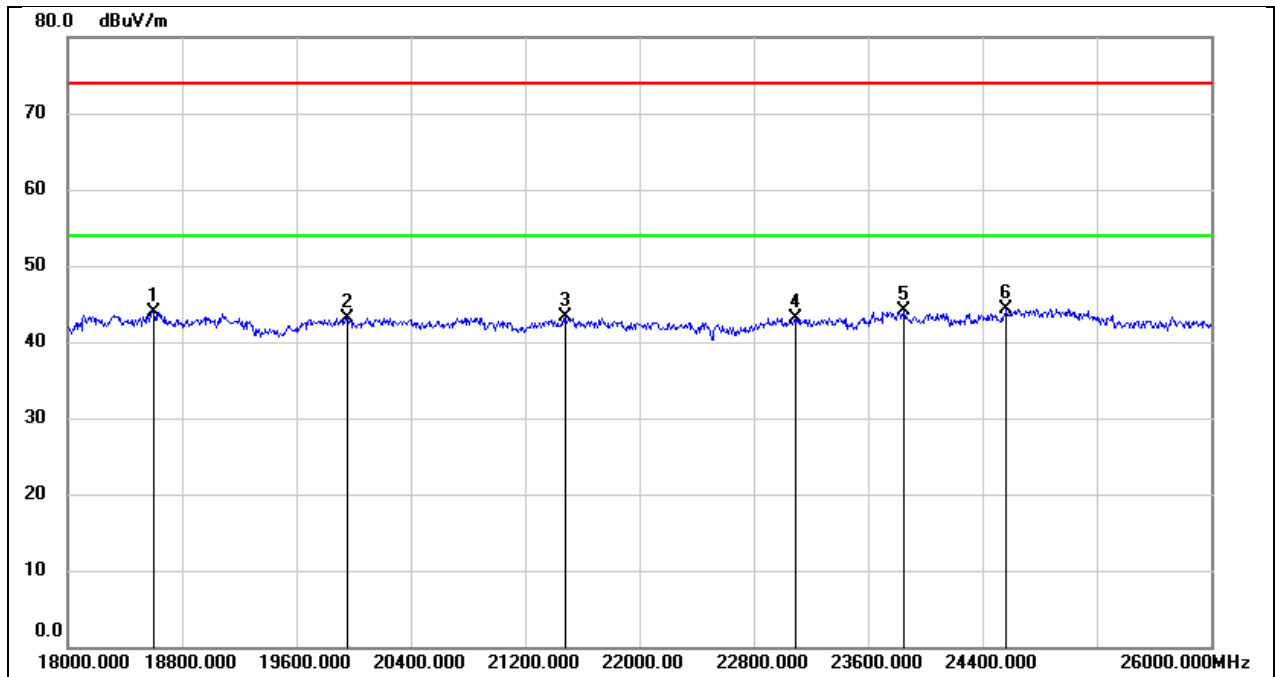

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18600.000	49.20	-5.32	43.88	74.00	-30.12	peak
2	19960.000	48.56	-5.42	43.14	74.00	-30.86	peak
3	21480.000	47.99	-4.70	43.29	74.00	-30.71	peak
4	23088.000	46.52	-3.41	43.11	74.00	-30.89	peak
5	23848.000	47.18	-3.03	44.15	74.00	-29.85	peak
6	24568.000	46.60	-2.33	44.27	74.00	-29.73	peak


8.6. SPURIOUS EMISSIONS(30 MHZ~1 GHZ)

Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

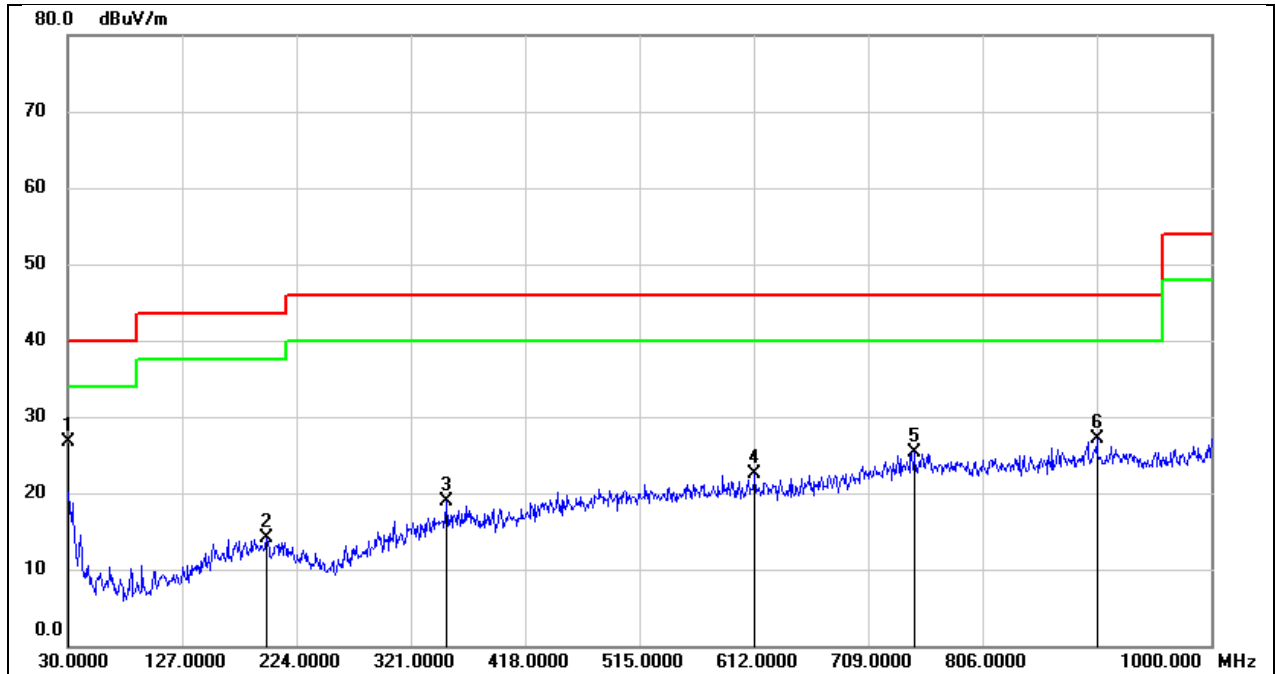

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	30.0000	40.81	-14.06	26.75	40.00	-13.25	QP
2	198.7800	25.28	-11.18	14.10	43.50	-29.40	QP
3	351.0700	27.44	-8.54	18.90	46.00	-27.10	QP
4	612.9699	27.33	-4.83	22.50	46.00	-23.50	QP
5	747.8000	26.51	-1.24	25.27	46.00	-20.73	QP
6	903.0000	26.92	0.15	27.07	46.00	-18.93	QP

Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

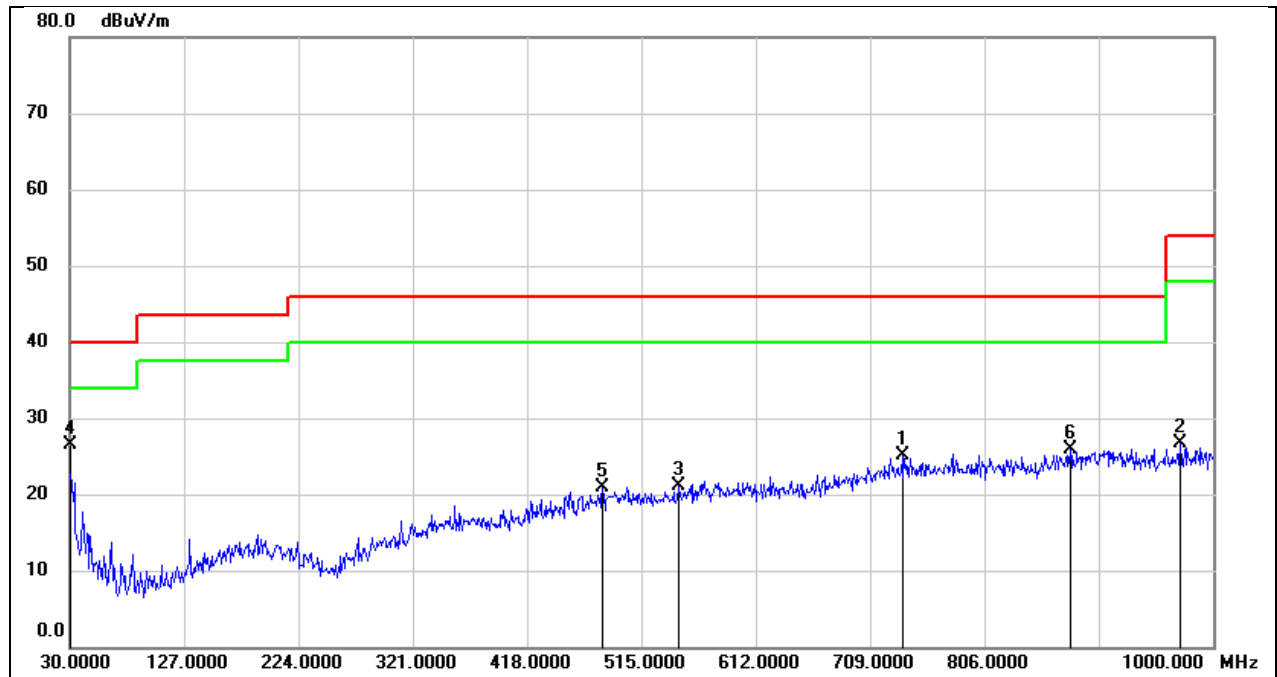

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	736.1599	26.73	-1.67	25.06	46.00	-20.94	QP
2	971.8700	26.90	-0.15	26.75	54.00	-27.25	QP
3	547.0100	26.93	-5.88	21.05	46.00	-24.95	QP
4	30.0000	40.63	-14.06	26.57	40.00	-13.43	QP
5	482.0200	27.44	-6.55	20.89	46.00	-25.11	QP
6	878.7500	26.24	-0.33	25.91	46.00	-20.09	QP

9. ANTENNA REQUIREMENT

REQUIREMENT

Please refer to FCC part 15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to FCC part 15.247(b)(4)

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DESCRIPTION

Pass

10. AC POWER LINE CONDUCTED EMISSION

LIMITS

Please refer to CFR 47 FCC §15.207 (a) and ISED RSS-Gen Clause 8.8


FREQUENCY (MHz)	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

TEST PROCEDURE

The EUT is put on a table of non-conducting material that is 80 cm high. The vertical conducting wall of shielding is located 40 cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI Measurement Receiver (R&S Test Receiver ESR3) is used to test the emissions from both sides of AC line. According to the requirements in Section 6.2 of ANSI C63.10-2013. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode. The bandwidth of EMI test receiver is set at 9 kHz.

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application.

TEST SETUP

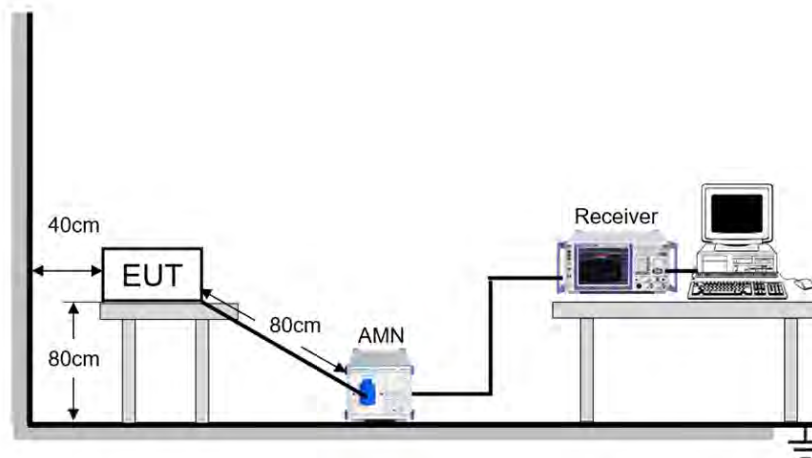

TEST ENVIRONMENT


Temperature	23.4℃	Relative Humidity	52%
Atmosphere Pressure	101kPa	Test Voltage	AC 120 V, 60 Hz

TEST DATE / ENGINEER

Test Date	December 25, 2024	Test By	Fanny Huang
-----------	-------------------	---------	-------------

TEST RESULTS

Test Mode:	802.11b	Frequency(MHz):	2412
Line:	Line		

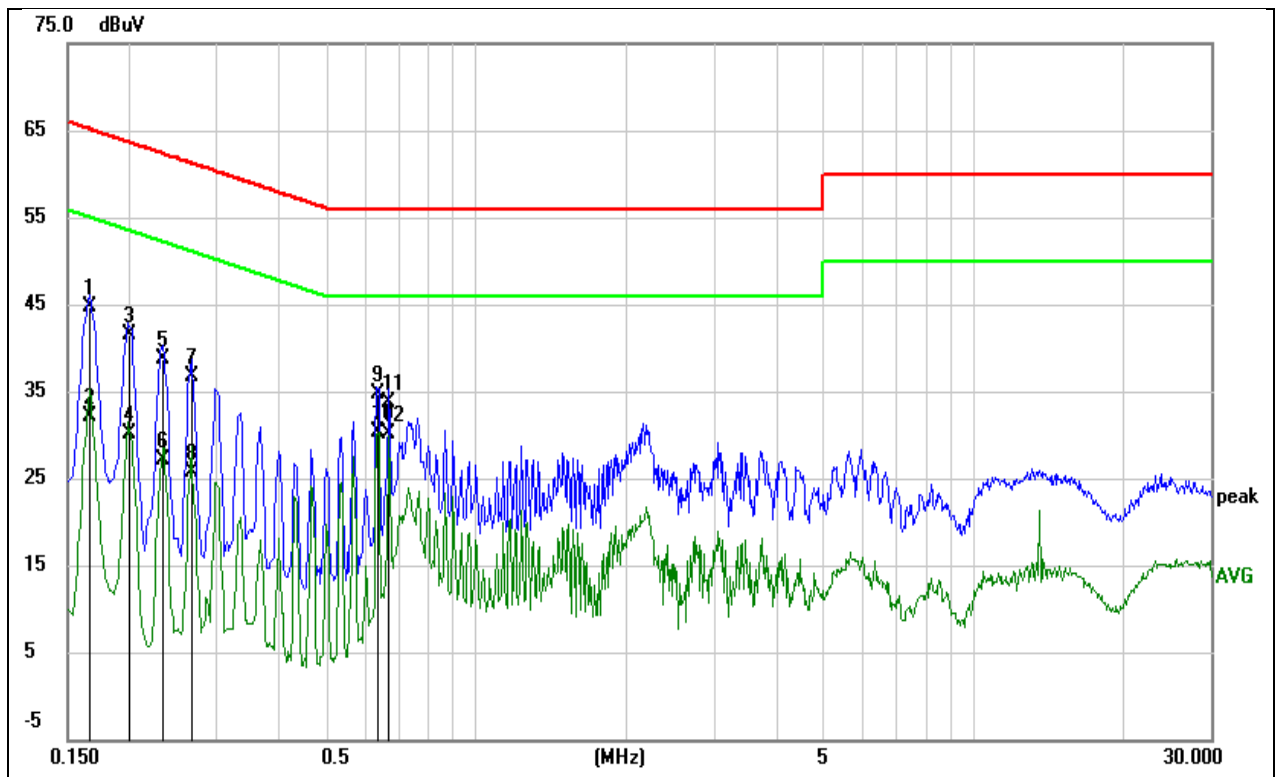


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1660	34.97	9.71	44.68	65.16	-20.48	QP
2	0.1660	22.44	9.71	32.15	55.16	-23.01	AVG
3	0.1996	31.88	9.64	41.52	63.63	-22.11	QP
4	0.1996	20.54	9.64	30.18	53.63	-23.45	AVG
5	0.2324	29.16	9.64	38.80	62.36	-23.56	QP
6	0.2324	17.56	9.64	27.20	52.36	-25.16	AVG
7	0.2657	27.04	9.64	36.68	61.25	-24.57	QP
8	0.2657	16.16	9.64	25.80	51.25	-25.45	AVG
9	0.6317	25.06	9.63	34.69	56.00	-21.31	QP
10	0.6317	20.69	9.63	30.32	46.00	-15.68	AVG
11	0.6648	24.16	9.63	33.79	56.00	-22.21	QP
12	0.6648	20.42	9.63	30.05	46.00	-15.95	AVG

Note:

1. Result = Reading + Correct Factor.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).
4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

Note: All the modes have been tested, only the worst data was recorded in the report.

Test Mode:	802.11b	Frequency(MHz):	2412
Line:	Neutral		

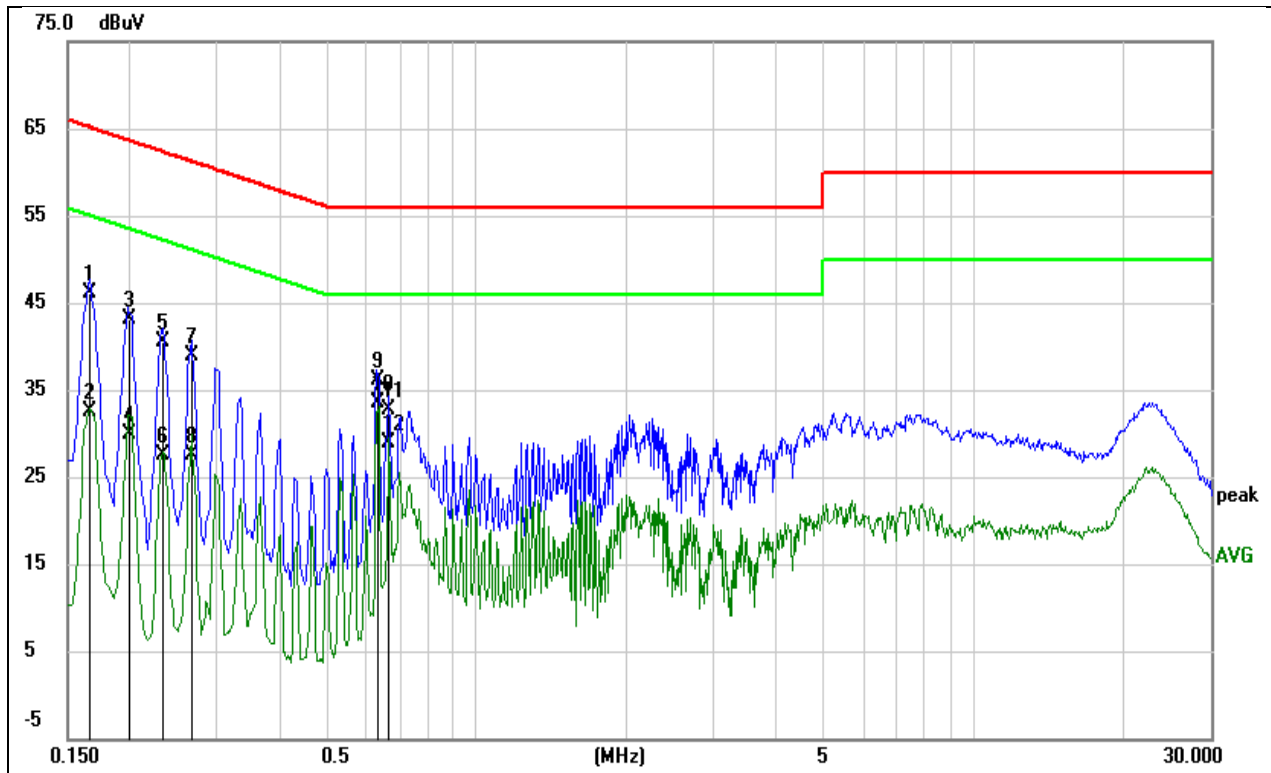

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1660	36.41	9.64	46.05	65.16	-19.11	QP
2	0.1660	22.82	9.64	32.46	55.16	-22.70	AVG
3	0.1996	33.40	9.64	43.04	63.63	-20.59	QP
4	0.1996	20.27	9.64	29.91	53.63	-23.72	AVG
5	0.2325	30.78	9.64	40.42	62.36	-21.94	QP
6	0.2325	17.92	9.64	27.56	52.36	-24.80	AVG
7	0.2663	29.25	9.64	38.89	61.23	-22.34	QP
8	0.2663	17.89	9.64	27.53	51.23	-23.70	AVG
9	0.6325	26.50	9.63	36.13	56.00	-19.87	QP
10	0.6325	23.80	9.63	33.43	46.00	-12.57	AVG
11	0.6660	23.03	9.63	32.66	56.00	-23.34	QP
12	0.6660	19.21	9.63	28.84	46.00	-17.16	AVG

Note:

1. Result = Reading + Correct Factor.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).
4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

Note: All the modes have been tested, only the worst data was recorded in the report.

11. TEST DATA

Appendix A:Duty Cycle

Test Mode	On Time (msec)	Period (msec)	Duty Cycle x (Linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/T Minimum VBW (kHz)	Final setting For VBW (kHz)
b	105	105	1.0000	100.00	0.00	0.01	0.01
g	105	105	1.0000	100.00	0.00	0.01	0.01
n20	105	105	1.0000	100.00	0.00	0.01	0.01
n40	105	105	1.0000	100.00	0.00	0.01	0.01
ax20	105	105	1.0000	100.00	0.00	0.01	0.01
ax40	105	105	1.0000	100.00	0.00	0.01	0.01


Note:


Duty Cycle Correction Factor= $10\log(1/x)$.


Where: x is Duty Cycle (Linear)

Where: T is On Time

If that calculated VBW is not available on the analyzer then the next higher value should be used.

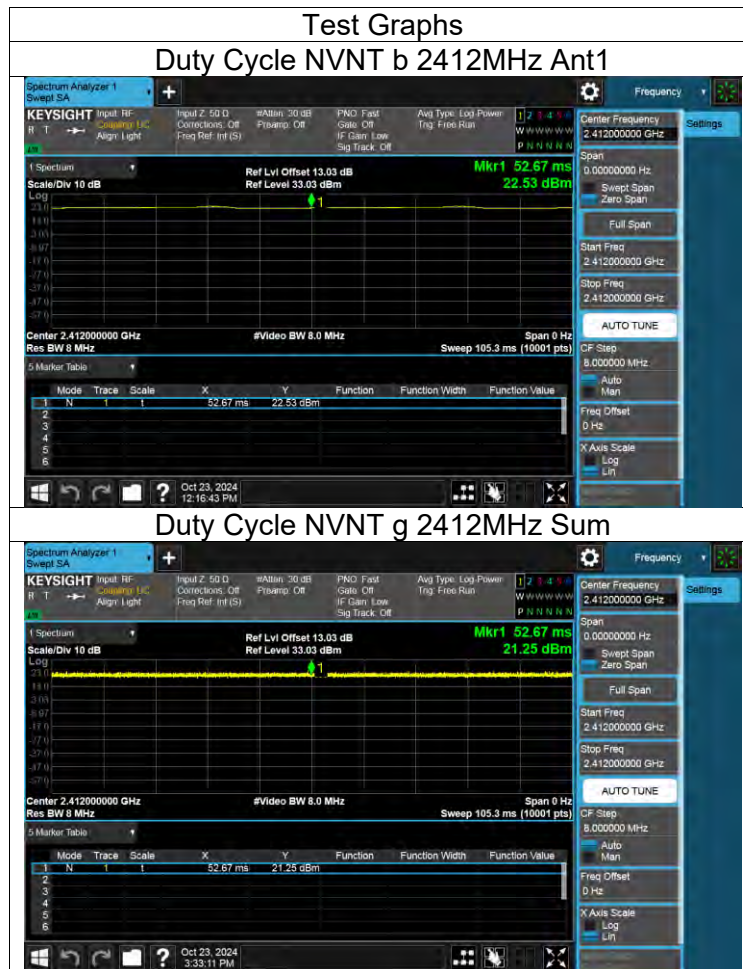

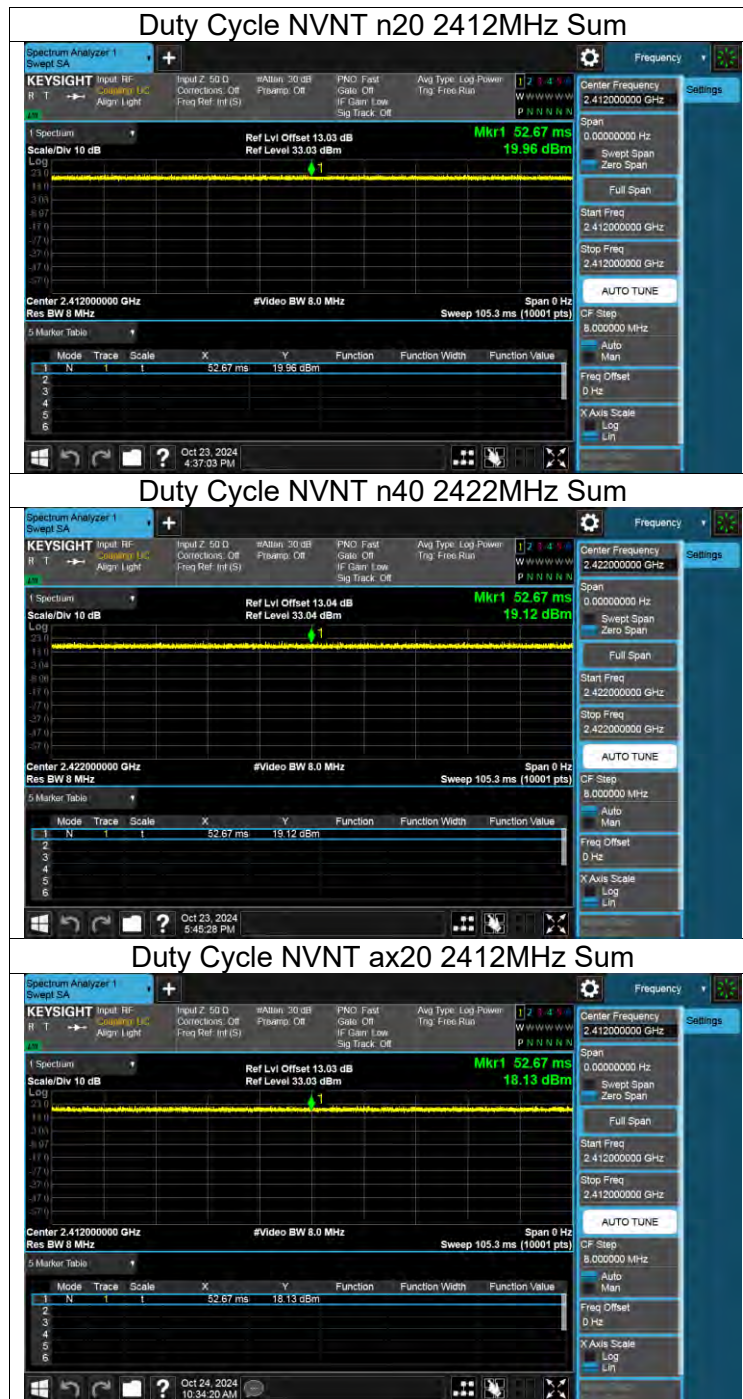

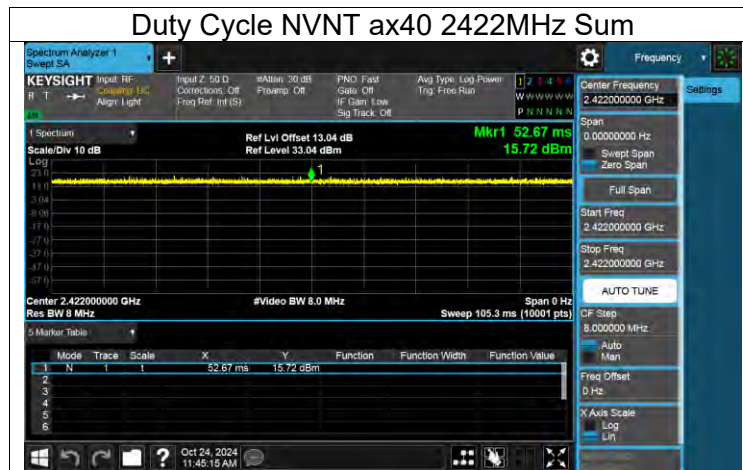

Appendix B:Maximum Conducted Output Power

Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)	Verdict
b	2412	Ant1	19.05	30	19.25	36	Pass
b	2437	Ant1	19.68	30	19.88	36	Pass
b	2462	Ant1	19.52	30	19.72	36	Pass
b	2412	Ant2	19.16	30	19.47	36	Pass
b	2437	Ant2	19.49	30	19.80	36	Pass
b	2462	Ant2	19.12	30	19.43	36	Pass
g	2412	Ant1	16.4	30	16.60	36	Pass
g	2412	Ant2	16.53	30	16.84	36	Pass
g	2412	Sum	19.48	30	19.79	36	Pass
g	2437	Ant1	16.68	30	16.88	36	Pass
g	2437	Ant2	16.26	30	16.57	36	Pass
g	2437	Sum	19.49	30	19.80	36	Pass
g	2462	Ant1	16.22	30	16.42	36	Pass
g	2462	Ant2	16.52	30	16.83	36	Pass
g	2462	Sum	19.38	30	19.69	36	Pass
n20	2412	Ant1	15.89	30	16.09	36	Pass
n20	2412	Ant2	15.76	30	16.07	36	Pass
n20	2412	Sum	18.84	30	19.15	36	Pass
n20	2437	Ant1	15.38	30	15.58	36	Pass
n20	2437	Ant2	15.56	30	15.87	36	Pass
n20	2437	Sum	18.48	30	18.79	36	Pass
n20	2462	Ant1	15.33	30	15.53	36	Pass
n20	2462	Ant2	15.31	30	15.62	36	Pass
n20	2462	Sum	18.33	30	18.64	36	Pass
n40	2422	Ant1	16.08	30	16.28	36	Pass
n40	2422	Ant2	16.24	30	16.55	36	Pass
n40	2422	Sum	19.17	30	19.48	36	Pass
n40	2437	Ant1	16.39	30	16.59	36	Pass
n40	2437	Ant2	16.71	30	17.02	36	Pass
n40	2437	Sum	19.56	30	19.87	36	Pass
n40	2452	Ant1	16.11	30	16.31	36	Pass
n40	2452	Ant2	16.34	30	16.65	36	Pass
n40	2452	Sum	19.24	30	19.55	36	Pass
ax20	2412	Ant1	15.17	30	15.37	36	Pass
ax20	2412	Ant2	14.33	30	14.64	36	Pass
ax20	2412	Sum	17.78	30	18.09	36	Pass
ax20	2437	Ant1	14.96	30	15.16	36	Pass
ax20	2437	Ant2	14.27	30	14.58	36	Pass
ax20	2437	Sum	17.64	30	17.95	36	Pass
ax20	2462	Ant1	14.73	30	14.93	36	Pass
ax20	2462	Ant2	13.98	30	14.29	36	Pass
ax20	2462	Sum	17.38	30	17.69	36	Pass
ax40	2422	Ant1	15.24	30	15.44	36	Pass
ax40	2422	Ant2	14.22	30	14.53	36	Pass
ax40	2422	Sum	17.77	30	18.08	36	Pass
ax40	2437	Ant1	14.86	30	15.06	36	Pass

ax40	2437	Ant2	13.97	30	14.28	36	Pass
ax40	2437	Sum	17.45	30	17.76	36	Pass
ax40	2452	Ant1	14.73	30	14.93	36	Pass
ax40	2452	Ant2	13.9	30	14.21	36	Pass
ax40	2452	Sum	17.35	30	17.66	36	Pass

Appendix C:-6dB Bandwidth

Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
b	2412	Ant1	7.58	≥ 0.5	Pass
b	2437	Ant1	8.03	≥ 0.5	Pass
b	2462	Ant1	8.06	≥ 0.5	Pass
b	2412	Ant2	8.56	≥ 0.5	Pass
b	2437	Ant2	7.52	≥ 0.5	Pass
b	2462	Ant2	7.55	≥ 0.5	Pass
g	2412	Ant1	16.43	≥ 0.5	Pass
g	2412	Ant2	16.49	≥ 0.5	Pass
g	2437	Ant1	16.58	≥ 0.5	Pass
g	2437	Ant2	16.55	≥ 0.5	Pass
g	2462	Ant1	16.59	≥ 0.5	Pass
g	2462	Ant2	16.51	≥ 0.5	Pass
n20	2412	Ant1	17.66	≥ 0.5	Pass
n20	2412	Ant2	17.7	≥ 0.5	Pass
n20	2437	Ant1	17.82	≥ 0.5	Pass
n20	2437	Ant2	17.79	≥ 0.5	Pass
n20	2462	Ant1	17.8	≥ 0.5	Pass
n20	2462	Ant2	17.72	≥ 0.5	Pass
n40	2422	Ant1	36.34	≥ 0.5	Pass
n40	2422	Ant2	35.29	≥ 0.5	Pass
n40	2437	Ant1	36.42	≥ 0.5	Pass
n40	2437	Ant2	36.44	≥ 0.5	Pass
n40	2452	Ant1	36.39	≥ 0.5	Pass
n40	2452	Ant2	36.36	≥ 0.5	Pass
ax20	2412	Ant1	18.93	≥ 0.5	Pass
ax20	2412	Ant2	18.76	≥ 0.5	Pass
ax20	2437	Ant1	19.12	≥ 0.5	Pass
ax20	2437	Ant2	19.2	≥ 0.5	Pass
ax20	2462	Ant1	19.16	≥ 0.5	Pass
ax20	2462	Ant2	19.1	≥ 0.5	Pass
ax40	2422	Ant1	37.41	≥ 0.5	Pass
ax40	2422	Ant2	35.88	≥ 0.5	Pass
ax40	2437	Ant1	38.08	≥ 0.5	Pass
ax40	2437	Ant2	38.03	≥ 0.5	Pass
ax40	2452	Ant1	38.05	≥ 0.5	Pass
ax40	2452	Ant2	38.09	≥ 0.5	Pass

Test Graphs

-6dB Bandwidth NVNT b 2412MHz Ant1





-6dB Bandwidth NVNT b 2437MHz Ant1




-6dB Bandwidth NVNT b 2462MHz Ant1



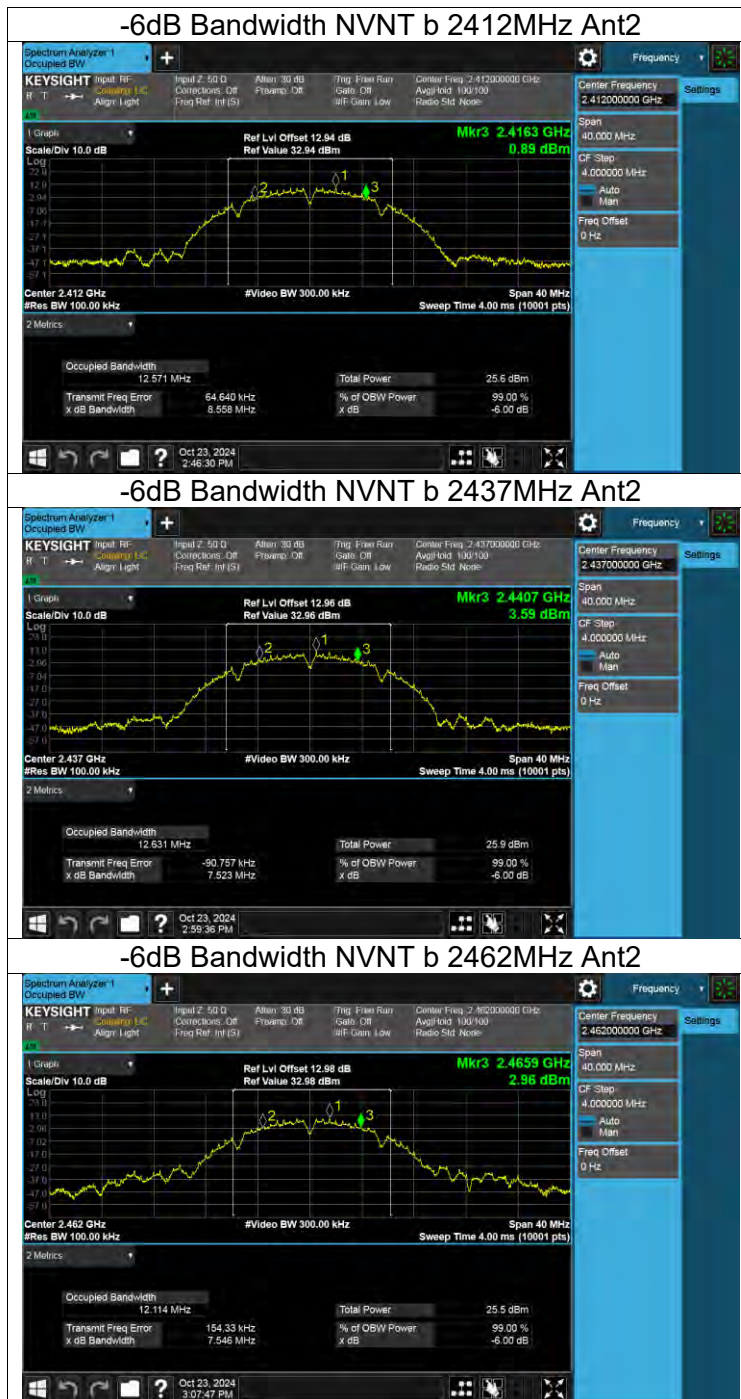

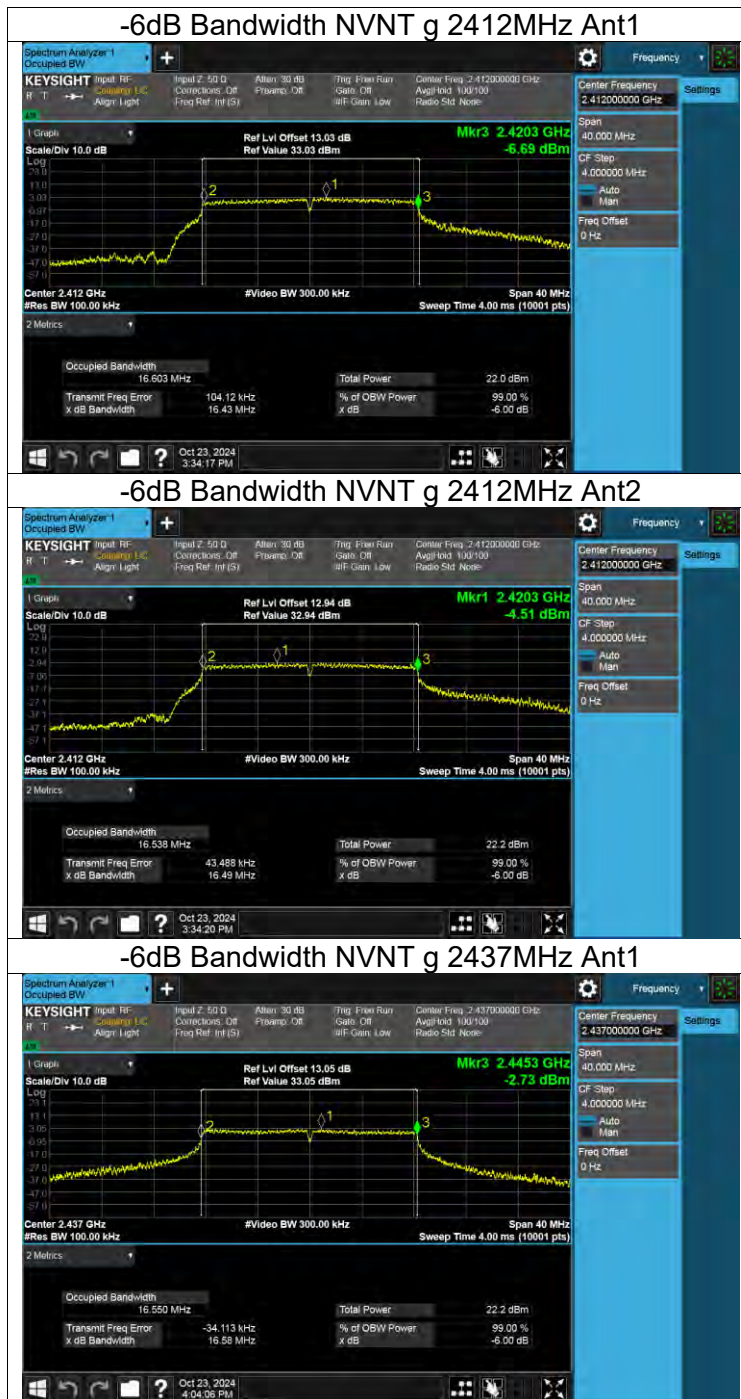

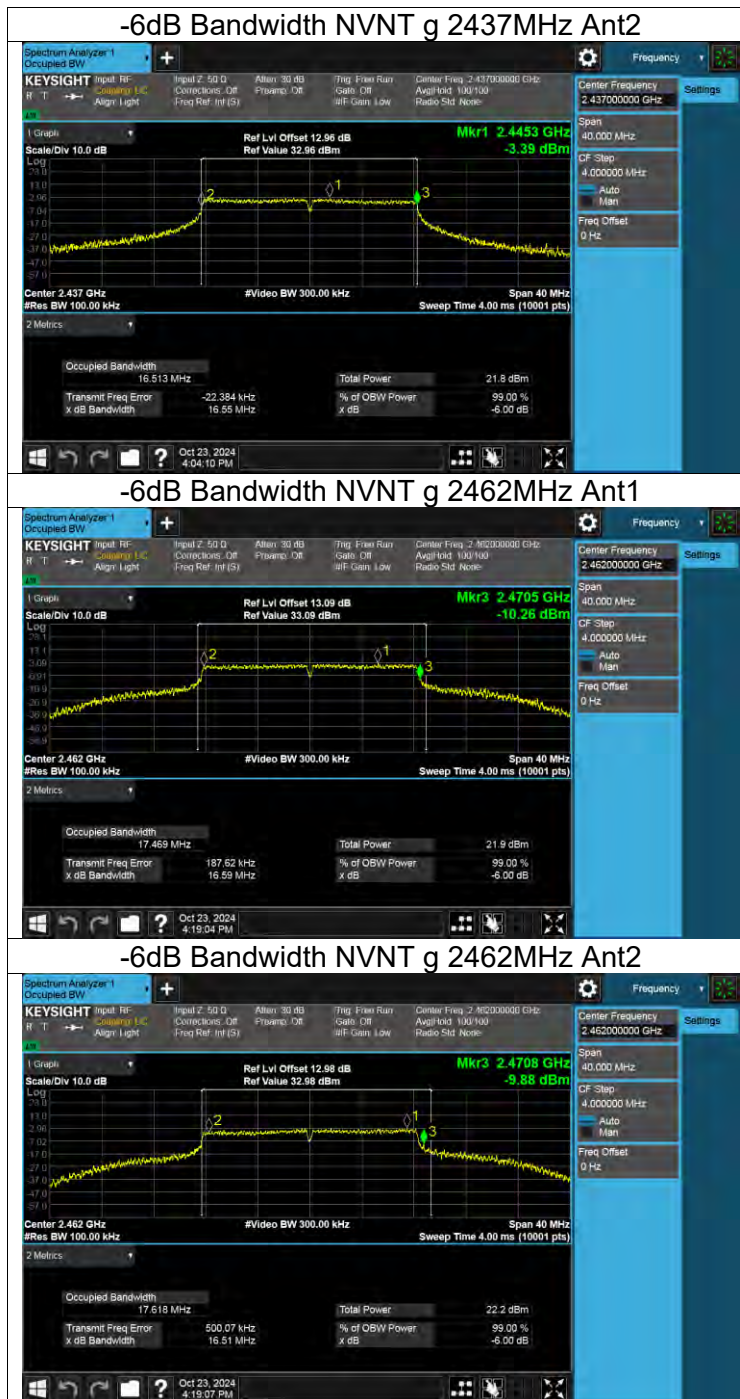

-6dB Bandwidth NVNT n20 2412MHz Ant1




-6dB Bandwidth NVNT n20 2412MHz Ant2



-6dB Bandwidth NVNT n20 2437MHz Ant1



-6dB Bandwidth NVNT n20 2437MHz Ant2

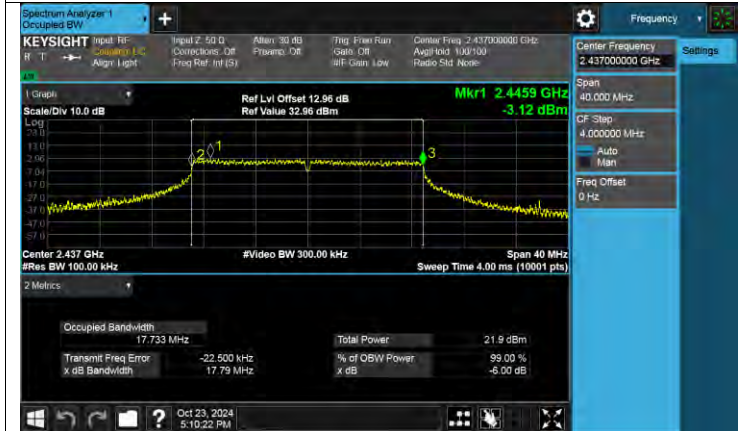

-6dB Bandwidth NVNT n20 2462MHz Ant1



-6dB Bandwidth NVNT n20 2462MHz Ant2



-6dB Bandwidth NVNT n40 2422MHz Ant1




-6dB Bandwidth NVNT n40 2422MHz Ant2



-6dB Bandwidth NVNT n40 2437MHz Ant1



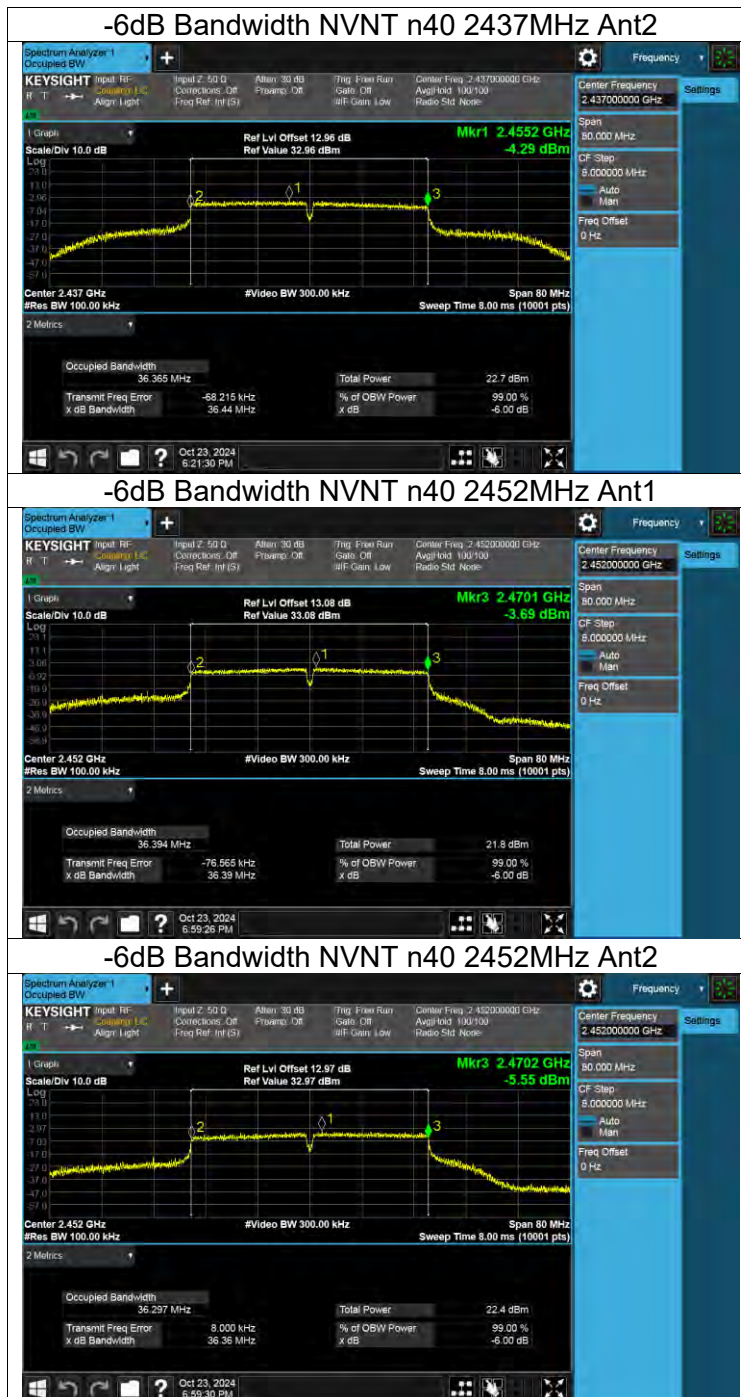

-6dB Bandwidth NVNT ax20 2412MHz Ant1



-6dB Bandwidth NVNT ax20 2412MHz Ant2



-6dB Bandwidth NVNT ax20 2437MHz Ant1



-6dB Bandwidth NVNT ax20 2437MHz Ant2



-6dB Bandwidth NVNT ax20 2462MHz Ant1



-6dB Bandwidth NVNT ax20 2462MHz Ant2



-6dB Bandwidth NVNT ax40 2422MHz Ant1



-6dB Bandwidth NVNT ax40 2422MHz Ant2



-6dB Bandwidth NVNT ax40 2437MHz Ant1



-6dB Bandwidth NVNT ax40 2437MHz Ant2



-6dB Bandwidth NVNT ax40 2452MHz Ant1



-6dB Bandwidth NVNT ax40 2452MHz Ant2



Appendix D:Occupied Channel Bandwidth

Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
b	2412	Ant1	12.454
b	2437	Ant1	12.744
b	2462	Ant1	12.095
b	2412	Ant2	12.62
b	2437	Ant2	12.678
b	2462	Ant2	12.115
g	2412	Ant1	16.749
g	2412	Ant2	16.753
g	2437	Ant1	16.716
g	2437	Ant2	16.695
g	2462	Ant1	17.927
g	2462	Ant2	18.068
n20	2412	Ant1	17.859
n20	2412	Ant2	17.92
n20	2437	Ant1	17.917
n20	2437	Ant2	17.882
n20	2462	Ant1	18.614
n20	2462	Ant2	18.927
n40	2422	Ant1	36.131
n40	2422	Ant2	35.928
n40	2437	Ant1	36.502
n40	2437	Ant2	36.569
n40	2452	Ant1	36.852
n40	2452	Ant2	36.486
ax20	2412	Ant1	18.862
ax20	2412	Ant2	18.915
ax20	2437	Ant1	19.106
ax20	2437	Ant2	19.079
ax20	2462	Ant1	19.107
ax20	2462	Ant2	19.101
ax40	2422	Ant1	37.585
ax40	2422	Ant2	37.395
ax40	2437	Ant1	37.743
ax40	2437	Ant2	37.776
ax40	2452	Ant1	37.768
ax40	2452	Ant2	37.772



OBW NVNT b 2412MHz Ant2



OBW NVNT b 2437MHz Ant2



OBW NVNT b 2462MHz Ant2



OBW NVNT g 2412MHz Ant1




OBW NVNT g 2412MHz Ant2



OBW NVNT g 2437MHz Ant1



OBW NVNT g 2437MHz Ant2

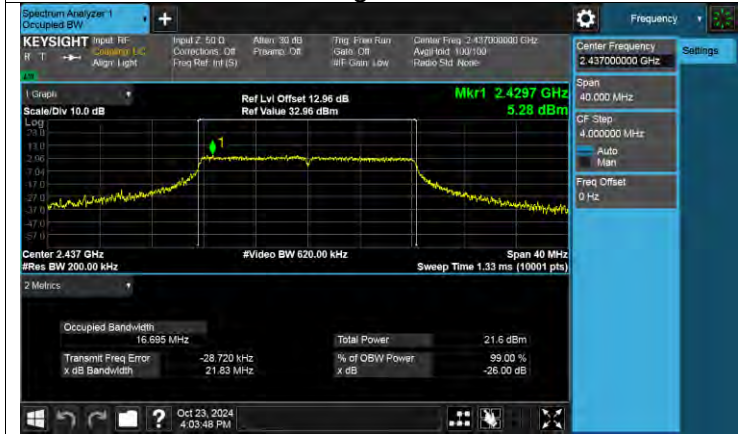

OBW NVNT g 2462MHz Ant1



OBW NVNT g 2462MHz Ant2



OBW NVNT n20 2412MHz Ant1



OBW NVNT n20 2412MHz Ant2



OBW NVNT n20 2437MHz Ant1



OBW NVNT n20 2437MHz Ant2



OBW NVNT n20 2462MHz Ant1



OBW NVNT n20 2462MHz Ant2



OBW NVNT n40 2422MHz Ant1



OBW NVNT n40 2422MHz Ant2



OBW NVNT n40 2437MHz Ant1



OBW NVNT n40 2437MHz Ant2




OBW NVNT n40 2452MHz Ant1



OBW NVNT n40 2452MHz Ant2



OBW NVNT ax20 2412MHz Ant1

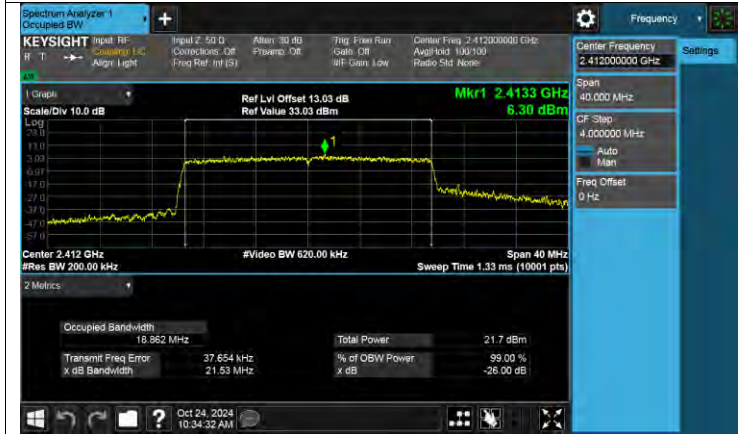

OBW NVNT ax20 2412MHz Ant2



OBW NVNT ax20 2437MHz Ant1




OBW NVNT ax20 2437MHz Ant2



OBW NVNT ax20 2462MHz Ant1



OBW NVNT ax20 2462MHz Ant2

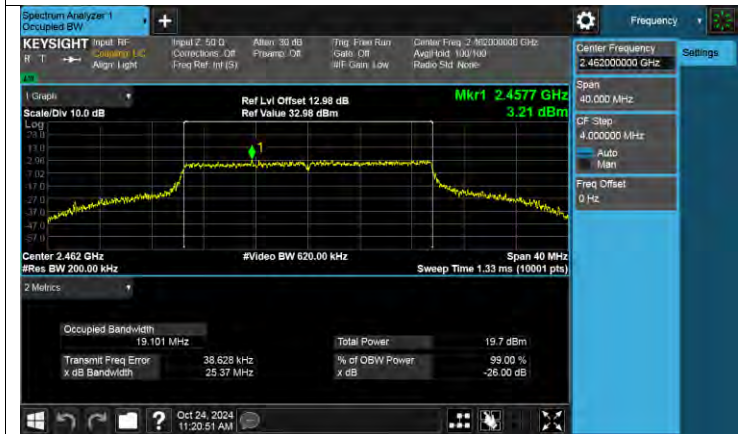

OBW NVNT ax40 2422MHz Ant1




OBW NVNT ax40 2422MHz Ant2



OBW NVNT ax40 2437MHz Ant1



OBW NVNT ax40 2437MHz Ant2

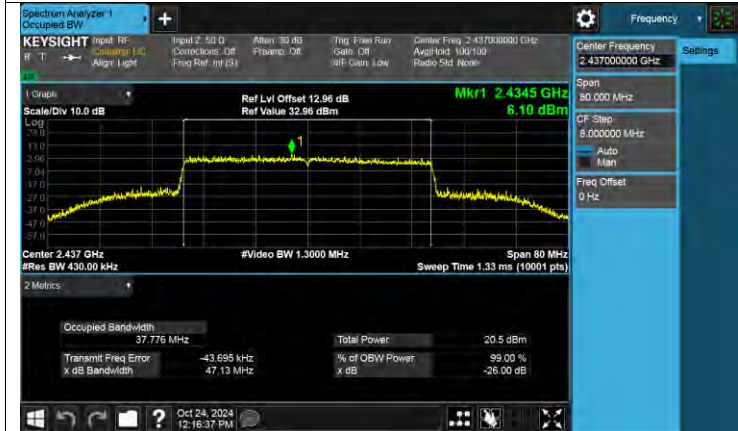

OBW NVNT ax40 2452MHz Ant1



OBW NVNT ax40 2452MHz Ant2



Appendix E:Maximum Power Spectral Density Level

Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm/3kHz)	Duty Factor (dB)	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
b	2412	Ant1	-12.01	0	-12.01	8	Pass
b	2437	Ant1	-11.5	0	-11.5	8	Pass
b	2462	Ant1	-11.55	0	-11.55	8	Pass
b	2412	Ant2	-12.05	0	-12.05	8	Pass
b	2437	Ant2	-11.46	0	-11.46	8	Pass
b	2462	Ant2	-11.86	0	-11.86	8	Pass
g	2412	Ant1	-17.34	0	-17.34	8	Pass
g	2412	Ant2	-17.55	0	-17.55	8	Pass
g	2412	Sum	-14.43	0	-14.43	8	Pass
g	2437	Ant1	-17.18	0	-17.18	8	Pass
g	2437	Ant2	-17.7	0	-17.7	8	Pass
g	2437	Sum	-14.42	0	-14.42	8	Pass
g	2462	Ant1	-18.05	0	-18.05	8	Pass
g	2462	Ant2	-17.52	0	-17.52	8	Pass
g	2462	Sum	-14.77	0	-14.77	8	Pass
n20	2412	Ant1	-18.02	0	-18.02	8	Pass
n20	2412	Ant2	-18.03	0	-18.03	8	Pass
n20	2412	Sum	-15.01	0	-15.01	8	Pass
n20	2437	Ant1	-19.21	0	-19.21	8	Pass
n20	2437	Ant2	-18.58	0	-18.58	8	Pass
n20	2437	Sum	-15.87	0	-15.87	8	Pass
n20	2462	Ant1	-19.02	0	-19.02	8	Pass
n20	2462	Ant2	-18.96	0	-18.96	8	Pass
n20	2462	Sum	-15.98	0	-15.98	8	Pass
n40	2422	Ant1	-20.45	0	-20.45	8	Pass
n40	2422	Ant2	-20.23	0	-20.23	8	Pass
n40	2422	Sum	-17.33	0	-17.33	8	Pass
n40	2437	Ant1	-21.06	0	-21.06	8	Pass
n40	2437	Ant2	-20.8	0	-20.8	8	Pass
n40	2437	Sum	-17.92	0	-17.92	8	Pass
n40	2452	Ant1	-20.23	0	-20.23	8	Pass
n40	2452	Ant2	-21.1	0	-21.1	8	Pass
n40	2452	Sum	-17.63	0	-17.63	8	Pass
ax20	2412	Ant1	-20.26	0	-20.26	8	Pass
ax20	2412	Ant2	-20.56	0	-20.56	8	Pass
ax20	2412	Sum	-17.4	0	-17.4	8	Pass
ax20	2437	Ant1	-20.46	0	-20.46	8	Pass
ax20	2437	Ant2	-21.41	0	-21.41	8	Pass
ax20	2437	Sum	-17.9	0	-17.9	8	Pass
ax20	2462	Ant1	-21.22	0	-21.22	8	Pass
ax20	2462	Ant2	-21.06	0	-21.06	8	Pass
ax20	2462	Sum	-18.13	0	-18.13	8	Pass
ax40	2422	Ant1	-22.58	0	-22.58	8	Pass
ax40	2422	Ant2	-23.26	0	-23.26	8	Pass
ax40	2422	Sum	-19.9	0	-19.9	8	Pass
ax40	2437	Ant1	-23.37	0	-23.37	8	Pass

ax40	2437	Ant2	-24.47	0	-24.47	8	Pass
ax40	2437	Sum	-20.87	0	-20.87	8	Pass
ax40	2452	Ant1	-23.68	0	-23.68	8	Pass
ax40	2452	Ant2	-24.82	0	-24.82	8	Pass
ax40	2452	Sum	-21.2	0	-21.2	8	Pass

Test Graphs

PSD NVNT b 2412MHz Ant1



PSD NVNT b 2437MHz Ant1



PSD NVNT b 2462MHz Ant1



PSD NVNT b 2412MHz Ant2




PSD NVNT b 2437MHz Ant2




PSD NVNT b 2462MHz Ant2




PSD NVNT g 2412MHz Ant1

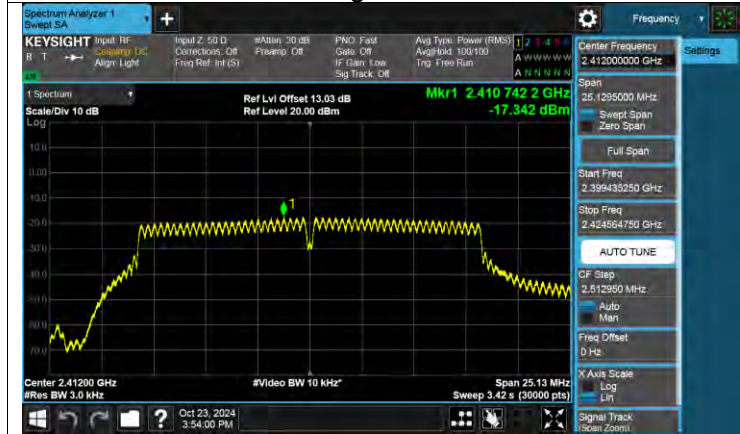


PSD NVNT g 2412MHz Ant2

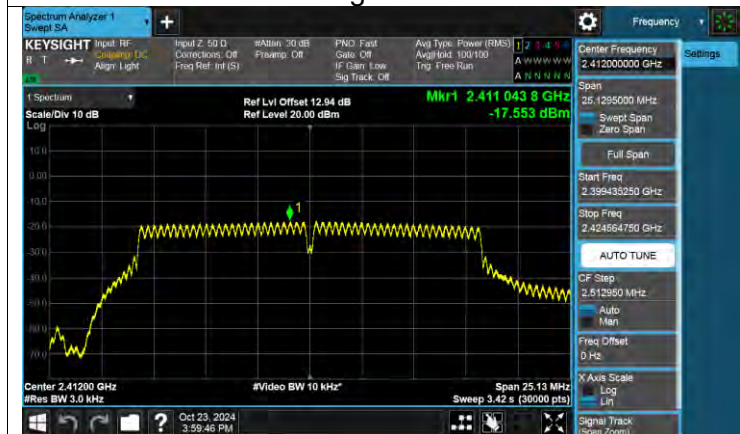


PSD NVNT g 2437MHz Ant1

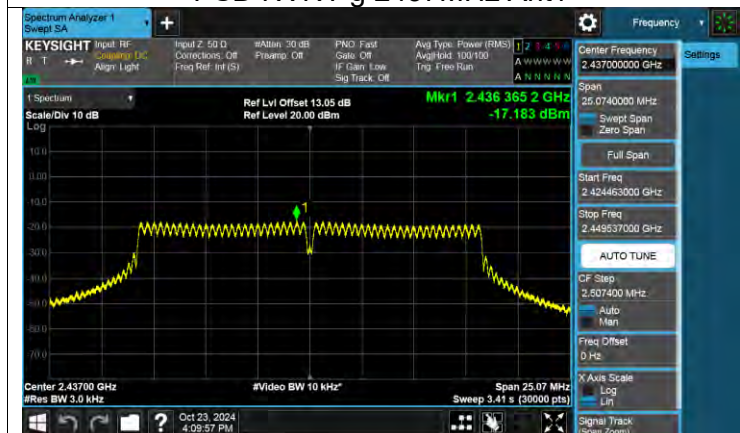


PSD NVNT g 2437MHz Ant2

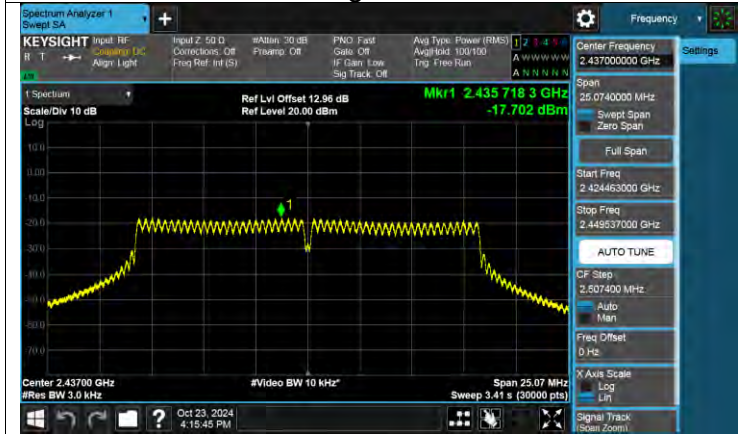



PSD NVNT g 2462MHz Ant1

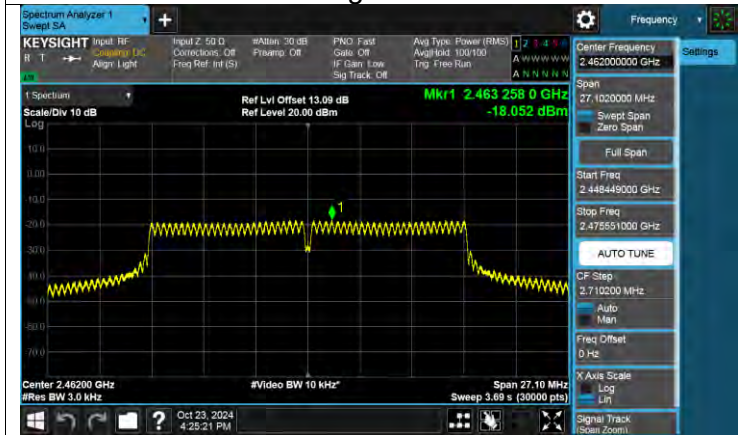


PSD NVNT g 2462MHz Ant2

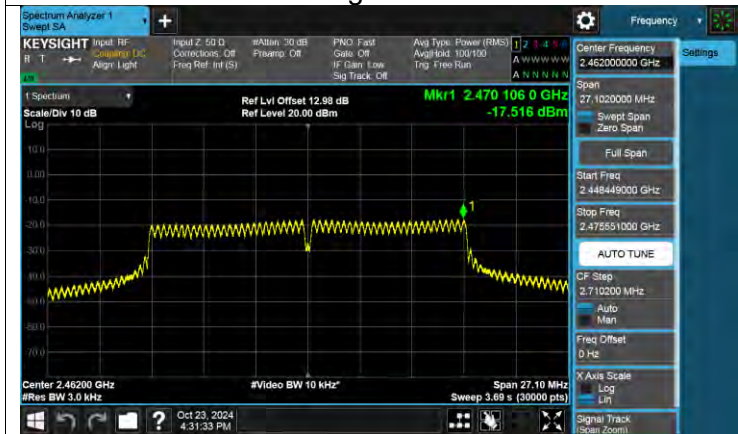

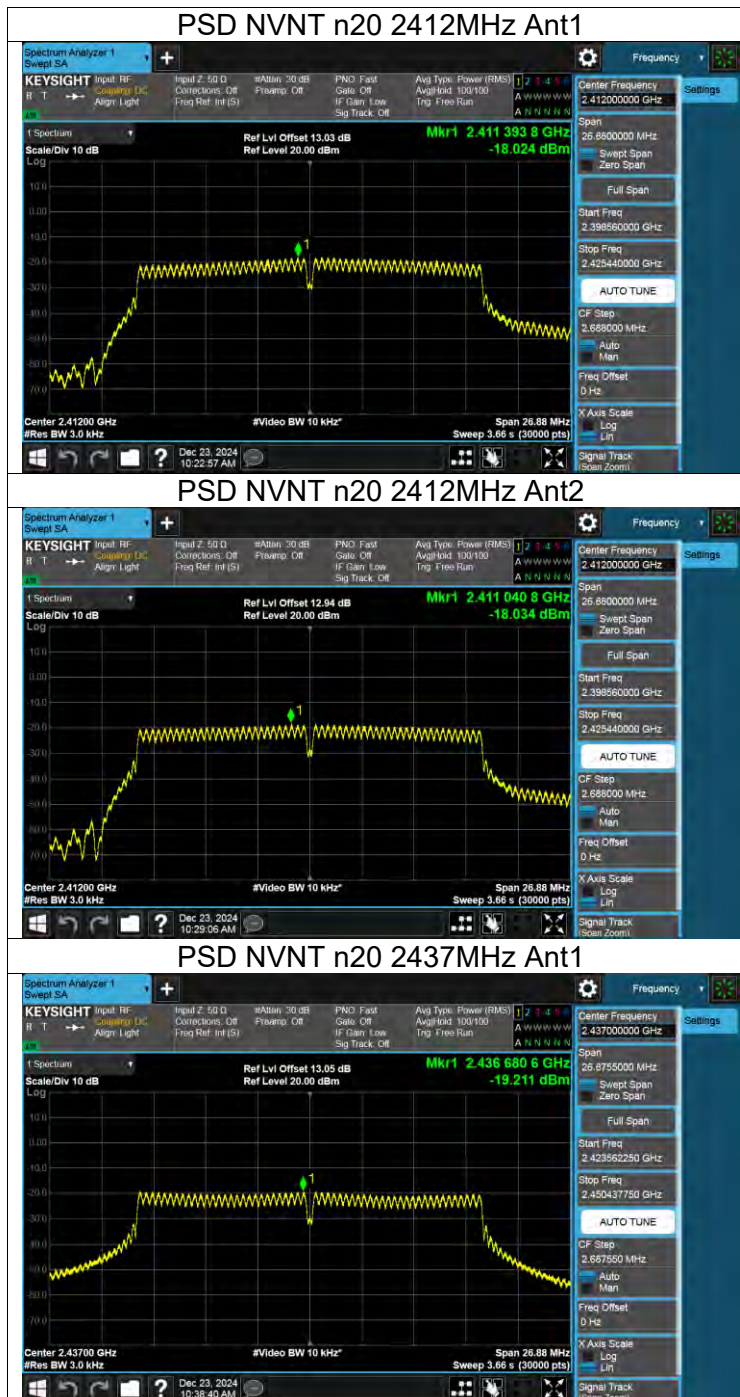

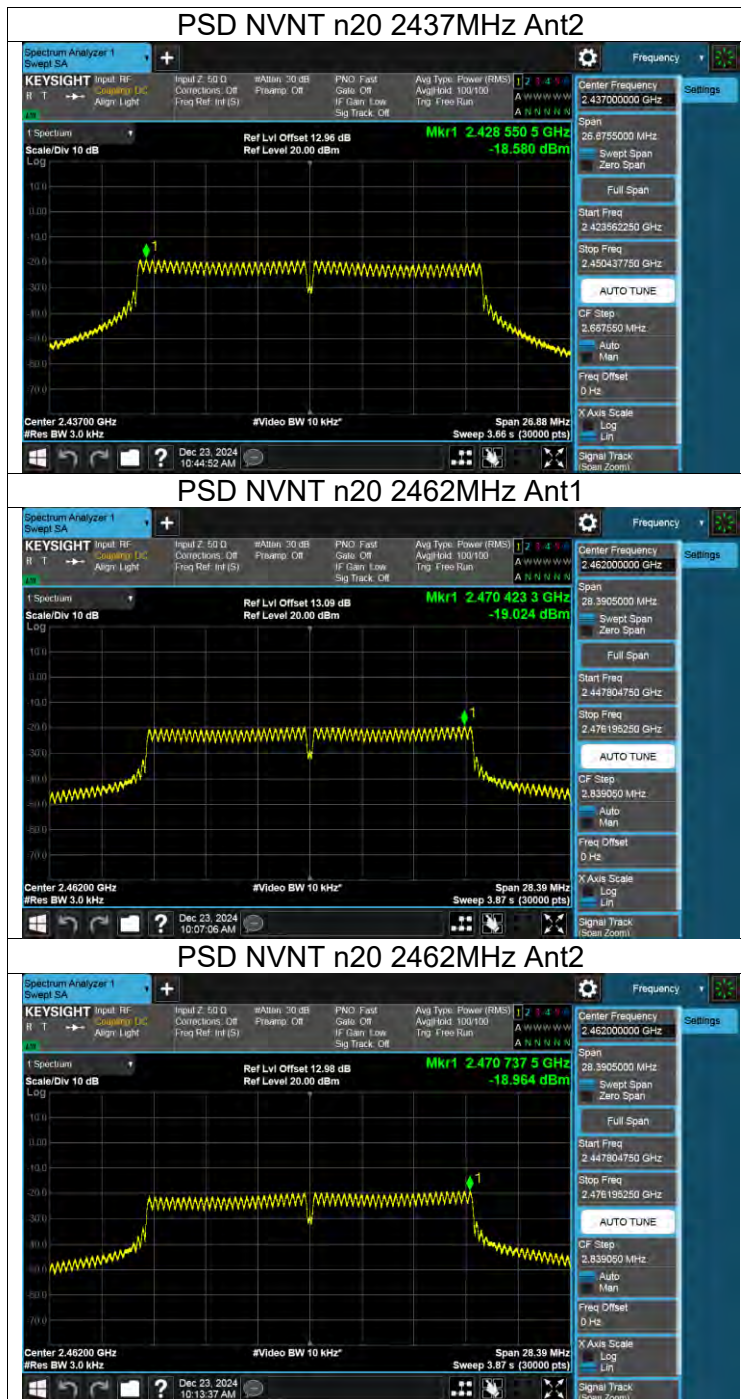

PSD NVNT n40 2422MHz Ant1

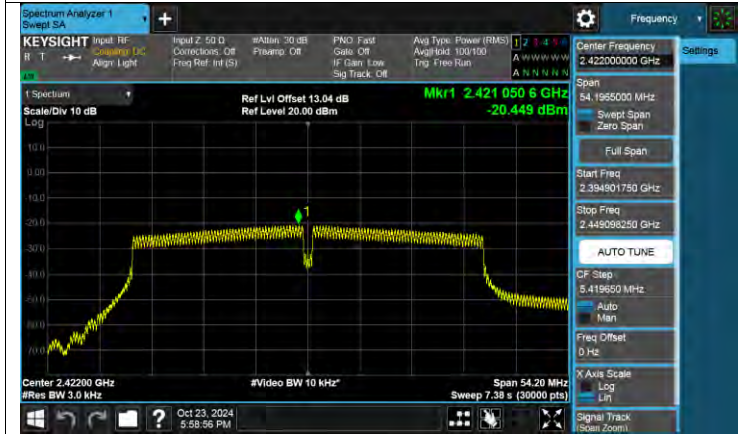

PSD NVNT n40 2422MHz Ant2



PSD NVNT n40 2437MHz Ant1

