

FCC PART 15C TEST REPORT FOR CERTIFICATION

On Behalf of

Acer Incorporated

Notebook Computer

N24G4

FCC ID: HLZN24G4

Brand : acer; Gateway

Prepared for : Acer Incorporated

8F., No.88, Sec. 1, Xintai 5th Rd., Xizhi Dist., New Taipei City
221 Taiwan

Prepared By : Audix Technology (Shenzhen) Co., Ltd.

No. 6, Kefeng Road, Science & Technology Park,
Nanshan District , Shenzhen, Guangdong, China

Tel: (0755) 26639496

Report Number : ACS-F25044

Date of Test : Feb.17~Mar.10, 2025

Date of Report : Mar.18, 2025

TABLE OF CONTENTS

<u>Description</u>	<u>Page</u>
1. SUMMARY OF STANDARDS AND RESULTS	5
1.1. Description of Standards and Results	5
2. GENERAL INFORMATION.....	6
2.1. Description of Equipment Under Test	6
2.2. Feature of Equipment Under Test	7
2.3. Tested Supporting System Details	8
2.4. Block Diagram of connection between EUT and simulators.....	9
2.5. Test Equipments.....	10
2.6. Test information.....	10
2.7. Test Facility	11
2.8. Measurement Uncertainty (95% confidence levels, k=2).....	11
3. POWER LINE CONDUCTED EMISSION TEST	12
3.1. Block Diagram of Test Setup	12
3.2. Power Line Conducted Emission Test Limits.....	12
3.3. Configuration of EUT on Test	12
3.4. Operating Condition of EUT.....	13
3.5. Test Procedure	13
3.6. Power Line Conducted Emission Test Results	13
4. RADIATED EMISSION MEASUREMENT	16
4.1. Block Diagram of Test Setup	16
4.2. Radiated Emission Limits Standard:.....	17
4.3. EUT Configuration on Test	17
4.4. Operating Condition of EUT.....	17
4.5. Test Procedure	18
4.6. Radiated Emission Test Results	18
5. CONDUCTED SPURIOUS EMISSIONS	40
5.1. Block Diagram of Test Setup	40
5.2. Limit.....	40
5.3. Test Procedure	40
5.4. Test result.....	40
6. 6DB & 99% BANDWIDTH TEST	44
6.1. Block Diagram of Test Setup	44
6.2. Limit.....	44
6.3. Test Procedure	44
6.4. Test Results	45
7. MAXIMUM PEAK OUTPUT POWER TEST.....	49
7.1. Limit.....	49
7.2. Test Procedure	49
7.3. Test Results	49
8. BAND EDGE COMPLIANCE TEST	51
8.1. Limit.....	51
8.2. Test Produce	51
8.3. Test Results	51
9. POWER SPECTRAL DENSITY TEST.....	56
9.1. Block Diagram of Test Setup	56
9.2. Limit.....	56
9.3. Test Procedure	56

9.4. Test Results	57
10. ANTENNA REQUIREMENT.....	59
10.1. STANDARD APPLICABLE.....	59
10.2. ANTENNA CONNECTED CONSTRUCTION.....	59
11. DEVIATION TO TEST SPECIFICATIONS	60

Appendix A. Photograph of Test

Appendix B. Photo of the EUT

TEST REPORT

Applicant : Acer Incorporated
Manufacturer : Acer Incorporated
Product : Notebook Computer
FCC ID : HLZN24G4
 (A) Model No. : N24G4
 (B) Brand : acer; Gateway
 (C) Test Voltage : AC 120V/60Hz

Tested for comply with:

FCC CFR47 Part 15 Subpart C

Test procedure used: ANSI C63.10:2020+Cor1:2023;
KDB 558074 D01v05r02

The device described above is tested by Audix Technology (Shenzhen) Co., Ltd. to confirm comply with all the FCC Part 15 Subpart C requirements. The test results are contained in this test report and Audix Technology (Shenzhen) Co., Ltd. is assumed full responsibility for the accuracy and completeness of these tests. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC requirements. This report contains data that are not covered by the NVLAP accreditation.

This Report is made under FCC Part 2.1074. No modifications were required during testing to bring this product into compliance.

This report applies to single evaluation of one sample of above mentioned product and shall not be reproduced in part without written approval of Audix Technology (Shenzhen) Co., Ltd.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U. S. Government.

Date of Test : Feb.17~Mar.10, 2025 Date of Report: Mar.18, 2025

Prepared by : Jasmine Ning Reviewed by : Thomas Chen
Jasmine Ning / Assistant Thomas Chen / Assistant Manager



1. SUMMARY OF STANDARDS AND RESULTS

1.1. Description of Standards and Results

The EUT has been tested according to the applicable standards as referenced below.

EMISSION		
Description of Test Item	Standard	Results
Power Line Conducted Emission Test	FCC Part 15: 15.207 ANSI C63.10:2020+COR1:2023	PASS
Radiated Emission Test	FCC Part 15: 15.209 FCC Part 15: 15.205 FCC Part 15: 15.247(d) ANSI C63.10:2020+COR1:2023	PASS
Conducted Spurious Emissions	FCC Part 15: 15.247(d) ANSI C63.10:2020+COR1:2023	PASS
Carrier Frequency Separation Test	FCC Part 15: 15.247(a)(1) ANSI C63.10:2020+COR1:2023	PASS
6dB Bandwidth Test	FCC Part 15: 15.247(a)(2) ANSI C63.10:2020+COR1:2023	PASS
Maximum Peak Output Power Test	FCC Part 15: 15.247(b)(1) ANSI C63.10:2020+COR1:2023	PASS
Band Edge Compliance Test	FCC Part 15: 15.247(d) ANSI C63.10:2020+COR1:2023	PASS
Power Spectral Density Test	FCC Part 15: 15.247(e) ANSI C63.10:2020+COR1:2023	PASS
Antenna requirement	FCC Part 15: 15.203	PASS

Note: Measurement uncertainty affection to the result is not considered, the EUT is technically compliant with standard requirements.

2. GENERAL INFORMATION

2.1. Description of Equipment Under Test

Applicant	Acer Incorporated
Applicant Address	8F., No.88, Sec. 1, Xintai 5th Rd., Xizhi Dist., New Taipei City 221 Taiwan
Manufacturer	Acer Incorporated
Manufacturer Address	8F., No.88, Sec. 1, Xintai 5th Rd., Xizhi Dist., New Taipei City 221 Taiwan
Product	Notebook Computer
Model No.	N24G4
Brand	acer; Gateway
FCC ID	HLZN24G4
Sample Type	Prototype production
Date of Receipt	Feb.13, 2025
Date of Test	Feb.17~Mar.10, 2025
Remark: This report only for BLE.	


2.2.Feature of Equipment Under Test

Product Feature & Specification		
Product	Notebook Computer	
Model No.	N24G4	
Power Source	<input checked="" type="checkbox"/> Commercial Power	AC 100-240V,50/60Hz ,1.5A
	<input checked="" type="checkbox"/> External Power Source	DC 19V, 2.7A
	<input type="checkbox"/> Lithium battery	DC V, mAh
	<input type="checkbox"/> UM battery	DC V
Bluetooth		
Radio	BDR +EDR; BLE	
Frequency Range	2402-2480MHz	
Type of Modulation	GFSK, $\pi/4$ DQPSK, 8DPSK	
Data Rate	1Mbps, 2Mbps, 3Mbps	
Quantity of Channels	79/40	
Channel Separation	1MHz	
Antenna System		
Type of Antenna	PIFA Antenna	
Antenna Peak Gain	Bluetooth Peak Gain: 2.43dBi.	
Remark: This report is for BLE radio specification only. EUT also supports other radio specification as below listed: BDR+EDR (Test report No. ACS-F25043) BLE (Test report No. ACS-F25044) WiFi 2.4GHz (Test report No. ACS-F25045) WiFi 5GHz (Test report No. ACS-F25046) SAR (Test report No. ACS-SF25004) DFS (Test report No. ACS-F25047)		

2.3. Tested Supporting System Details

No.	Description	ACS No.	Manufacturer	Model	Serial Number
1.	Monitor	---	ASUS	PB287	---
		HDMI Cable: Shielded, Detachable, 1.8m Power Cord: Unshielded, Detachable, 1.8m			
2.	HDD#1	ACS-EMC-HDD42	WD	WD Elements	WXA1A7396898
		Data Cable: Shielded, Detachable, 0.4m			
3.	HDD#2	ACS-EMC-HDD43	WD	WD Elements	WX31E63TU717
		Data Cable: Shielded, Detachable, 0.4m			
4.	HDD#3	ACS-EMC-HDD34	WD	WD Elements	WCAV4302542
		Data Cable: Shielded, Detachable, 0.4m			
5.	Headphone	ACS-EMC-EP01	OVANN	0V-T880V	---
		Data Cable: Shielded, Detachable, 4.0m			
6.	Notebook	N/A	ACER	ZOW	N/A
		Power Cord(3C): Unshielded, Detachable, 1.8m Power Adapter: Manufacturer: Lite-On, M/N: PA-1900-32 Data Cable: Shielded, Undetectable, 4.0m(Bond one ferrite core)			

2.4. Block Diagram of connection between EUT and simulators for power line conducted emission and radiated emission test:

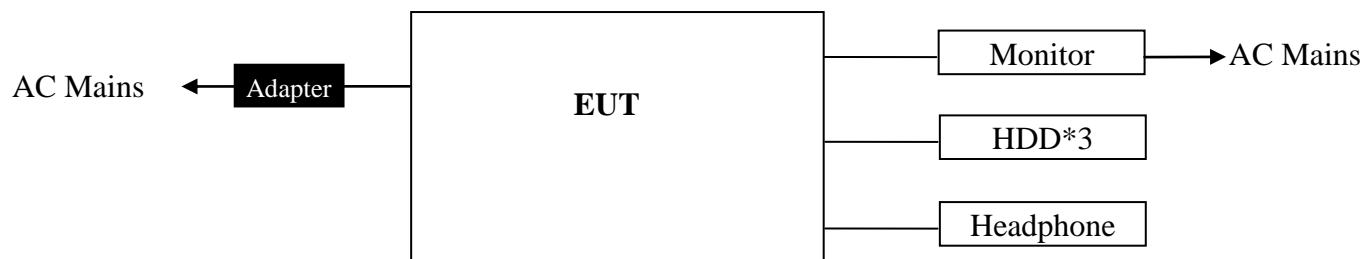

for the other test items:



(EUT: Notebook Computer)

2.5. Test Equipments

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	1# Shielding Room(SE)	AUDIX	N/A	N/A	Nov.09,22	3 Year
2.	3m Chamber(NSA)	AUDIX	N/A	N/A	Aug.11,22	3 Year
3.	3m Chamber(SE)	AUDIX	N/A	N/A	Sep.16,22	3 Year
4.	EMI Test Receiver	Rohde & Schwarz	ESCI	100842	Mar.16,24	1 Year
5.	Signal Analyzer	Rohde & Schwarz	FSV40	101608	Nov.07,24	1 Year
6.	L.I.S.N.#1	Rohde & Schwarz	ENV216	102160	Jun.19,24	1 Year
7.	RF Cable	Eastsheep	RG223	190424	Sep.13,24	1 Year
8.	Tri-log-Broadband Antenna	SCHWARZBECK	VULB 9168	01313	Sep.26,24	1 Year
9.	NSA Cable	HUBER+SUHNER	CFD400NL-LW	No.3+190411	Sep.13,24	1 Year
10.	Coaxial Switch	Anritsu	MP59B	6201397223	Mar.17,24	1 Year
11.	RF Cable	TIMES MICROWAVE	SFT205-NMSM-10.00M	689241	Aug.13,24	1 Year
12.	EMI Test Receiver	Rohde & Schwarz	ESR3	101931	Mar.17,24	1 Year
13.	Amplifier	EMCI	EMC0518A45SE	980965	Aug.13,24	1 Year
14.	Amplifier	KEYSIGHT	83017A	39500711	Mar.16,24	1 Year
15.	PXA Signal Analyzer	Agilent	N9030A	MY51380221	Mar.16,24	1 Year
16.	RF Cable	HUBER+SUHNER	SUCOFLEX-106	190423	Mar.16,24	1 Year
17.	Attenuator(10dB)	eastsheep	2W-SMA-JK-6G-10dB	No. 4	Sep.15,24	1 Year
18.	Signal Analyzer	Rohde & Schwarz	FSV30	104050	Mar.17,24	1 Year
19.	Horn Antenna	ETC	MCTD 1209	DRH15F03006	Sep.08,24	1 Year

Note: N/A means Not applicable.

2.6. Test information

A special software (RtlBluetoothMP.dll Version :5.2.2.37 RTLBTAPP Version :1.0.0.4) was used to control EUT work in Continuous TX mode (GFSK modulation), and select test channel.

Tested mode, channel, and data rate information			
Mode	data rate (Mbps)	Channel	Frequency (MHz)
Tx Mode GFSK modulation	1,2	Low :CH 0	2402
	1,2	Middle: CH19	2440
	1,2	High: CH39	2480

Note: use the data rate which has the maximum power for the test.

2.7. Test Facility

Site Description
Name of Firm

: Audix Technology (Shenzhen) Co., Ltd.
No. 6, Kefeng Road, Science & Technology Park,
Nanshan District , Shenzhen, Guangdong, China

EMC Lab.

: Certificated by ISED, Canada
Company Number: 5183A
CAB identifier: CN0034
Valid Date: Mar.31, 2025

: Accredited by NVLAP, USA
NVLAP Code: 200372-0
Valid Date: Mar.31, 2025


: Certificated by FCC, USA
Designation No: CN5022
Valid Date: Mar.31, 2025

2.8. Measurement Uncertainty (95% confidence levels, k=2)

Test Item	Uncertainty
Uncertainty for Conduction emission test in No. 1 Conduction	2.6dB (150kHz to 30MHz)
Uncertainty for Radiation Emission test in 3m chamber	±3.8dB(30~200MHz, Polarization: H)
	±3.8dB(30~200MHz, Polarization: V)
	±4.0dB(200M~1GHz, Polarization: H)
	±4.0dB(200M~1GHz, Polarization: V)
Uncertainty for Radiation Emission test in 3m chamber(1GHz-25GHz)	±4.0dB(1~6GHz, Distance: 3m)
	±4.0dB(6~25GHz, Distance: 3m)
Uncertainty for S _v SWR in 3m chamber	±2.8dB(1~6GHz, Distance: 3m)
	±2.8dB(6~25GHz, Distance: 3m)
Uncertainty for Radiated Spurious Emission test in RF chamber	±3.7dB(30MHz~1000MHz)
	±3.3dB(1~26.5GHz)
Uncertainty for Conduction Spurious emission test	±2.0dB
Uncertainty for Output power test	±0.8dB
Uncertainty for Bandwidth test	±83kHz
Uncertainty for DC power test	±1%
Uncertainty for test site temperature and humidity	±0.6°C
	±3%

3. POWER LINE CONDUCTED EMISSION TEST

3.1. Block Diagram of Test Setup

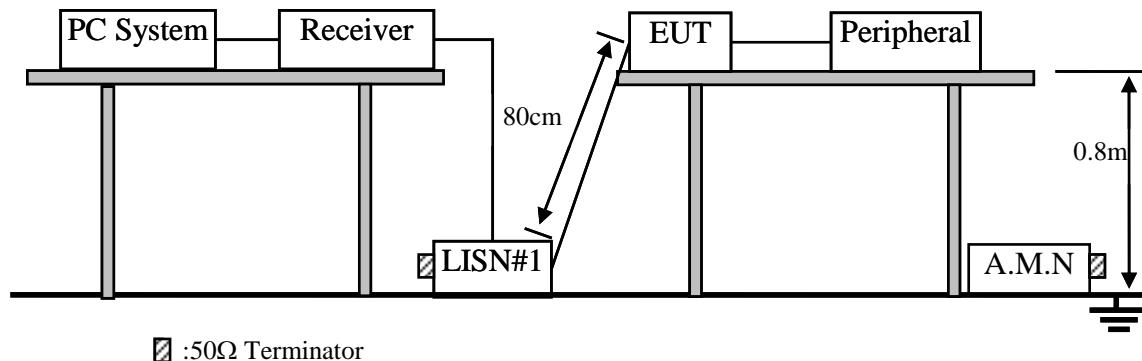

3.2. Power Line Conducted Emission Test Limits

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level dB(µV)	Average Level dB(µV)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Notes: 1. * Decreasing linearly with logarithm of frequency.
2. The lower limits shall apply at the transition frequencies.
3. Emission Level (dBµV) = Factor (L.I.S.N.) (dB) + Cable Loss (dB)+Reading (Receiver) (dBµV)

3.3. Configuration of EUT on Test

The following equipment are installed on Power Line Conducted Emission Test to meet the commission requirement and operating regulations in a manner which tends to maximize its emission characteristics in a normal application.

3.3.1. Notebook Computer (EUT)

Model No. : N24G4
Serial No. : N/A

3.3.2. Support Equipment: As Tested Supporting System Details, in Section 2.3.

3.4.Operating Condition of EUT

- 3.4.1. Setup the EUT as shown as Section 3.1.
- 3.4.2. Turn on the power of EUT.
- 3.4.3. PC run test software to control EUT work in Tx mode.

3.5.Test Procedure

The EUT was placed on a non-metallic table, 80cm above the ground plane. The EUT Power Via Adapter unit connected to the power mains through a line impedance stabilization network (L.I.S.N. #1). This provides a 50 ohm coupling impedance for the EUT (Please refer the block diagram of the test setup and photographs). The AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.10 on Conducted Emission Test.

The bandwidth of test receiver (R & S ESCI) is set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.

3.6.Power Line Conducted Emission Test Results


PASS. (All emissions not reported below are too low against the prescribed limits.)

1Mbps:

Data: 3

File: E:\1#CE\2025 Report Data\A\Acer\A1Z2502038-RF.EM6 (8)

Date: 2025-03-08

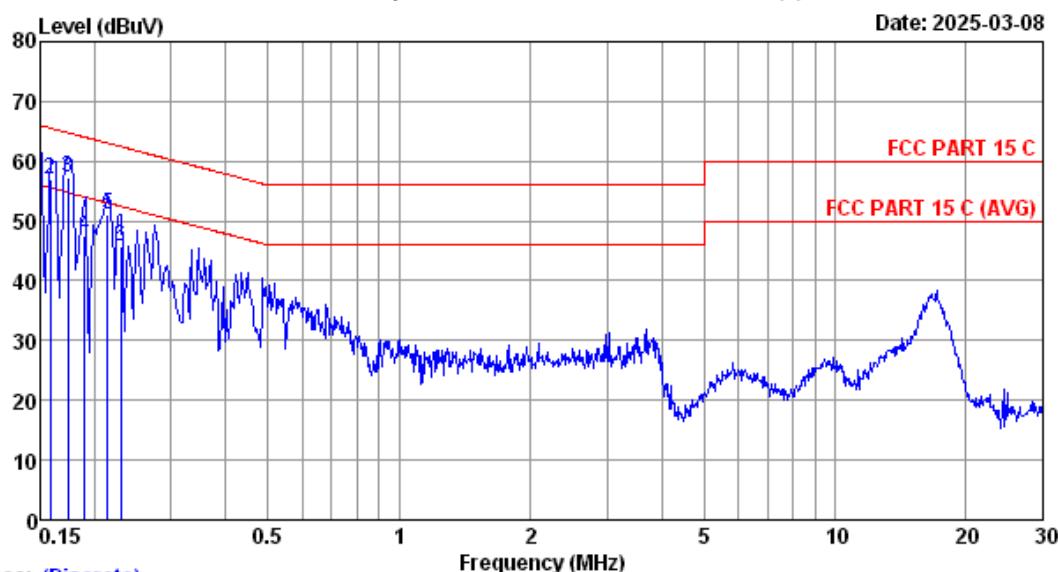

Trace: (Discrete)

Site no : 1# CE Data No : 3

Dis./Lisn : 2024 ENV216-N

Limit : FCC PART 15 C

Env./Ins. : 20.7°C/53%

Engineer : Hongjie

Power Rating : AC 120V/60Hz

Test Mode : BLE1M TX Mode

No	Freq (MHz)	LISN	Cable	Emission				Margin (dB)	Remark
		Factor (dB)	Loss (dB)	Reading (dBuV)	Level (dBuV)	Limits (dBuV)	Margin (dB)		
1	0.150	9.76	0.01	51.00	60.77	66.00	5.23	QP	
2	0.158	9.76	0.01	47.20	56.97	65.57	8.60	QP	
3	0.174	9.77	0.01	47.40	57.18	64.77	7.59	QP	
4	0.190	9.78	0.01	37.60	47.39	64.04	16.65	QP	
5	0.214	9.78	0.01	41.30	51.09	63.05	11.96	QP	
6	0.230	9.78	0.01	36.00	45.79	62.45	16.66	QP	


Remarks: 1. Emission Level=LISN Factor+Cable Loss+Reading.

2. If the average limit is met when using a quasi-peak detector.
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.

Data: 4

File: E:\1#CE\2025 Report Data\A\Acer\A1Z2502038-RF.EM6 (8)

Date: 2025-03-08

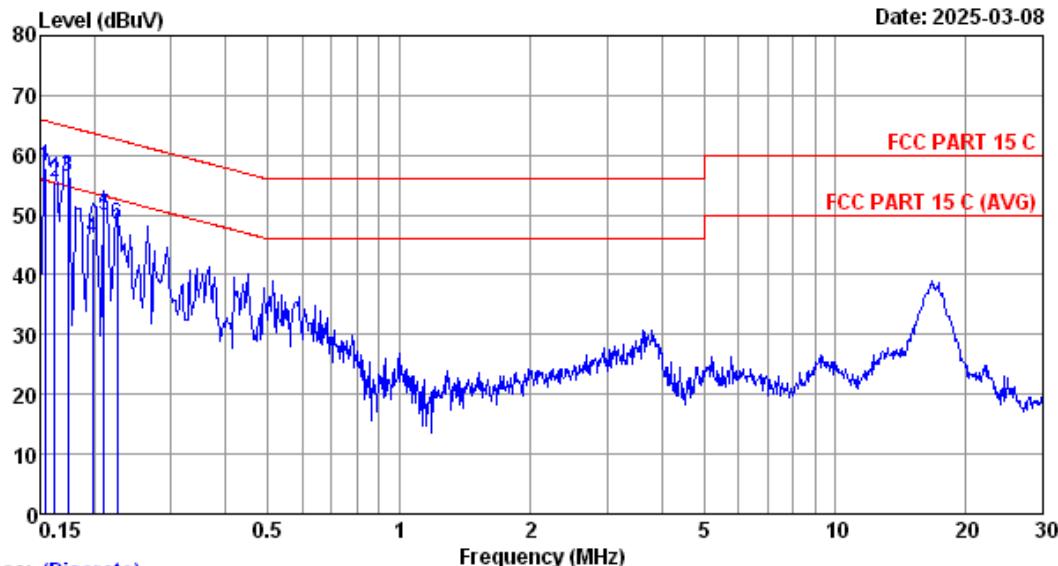

Trace: (Discrete)

Site no : 1# CE Data No : 4
 Dis./Lisn : 2024 ENV216-L
 Limit : FCC PART 15 C
 Env./Ins. : 20.7°C/53% Engineer : Hongjie
 Power Rating : AC 120V/60Hz
 Test Mode : BLE1M TX Mode


No	Freq (MHz)	LISN	Cable	Emission				Remark
		Factor (dB)	Loss (dB)	Reading (dBuV)	Level (dBuV)	Limits (dBuV)	Margin (dB)	
1	0.154	9.77	0.01	48.20	57.98	65.78	7.80	QP
2	0.162	9.77	0.01	45.70	55.48	65.36	9.88	QP
3	0.174	9.77	0.01	46.60	56.38	64.77	8.39	QP
4	0.198	9.76	0.01	36.40	46.17	63.69	17.52	QP
5	0.210	9.76	0.01	40.00	49.77	63.21	13.44	QP
6	0.225	9.76	0.01	38.60	48.37	62.63	14.26	QP

Remarks: 1. Emission Level=LISN Factor+Cable Loss+Reading.
 2. If the average limit is met when using a quasi-peak detector.
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.


4. RADIATED EMISSION MEASUREMENT

4.1. Block Diagram of Test Setup

For frequency range 30MHz-1000MHz

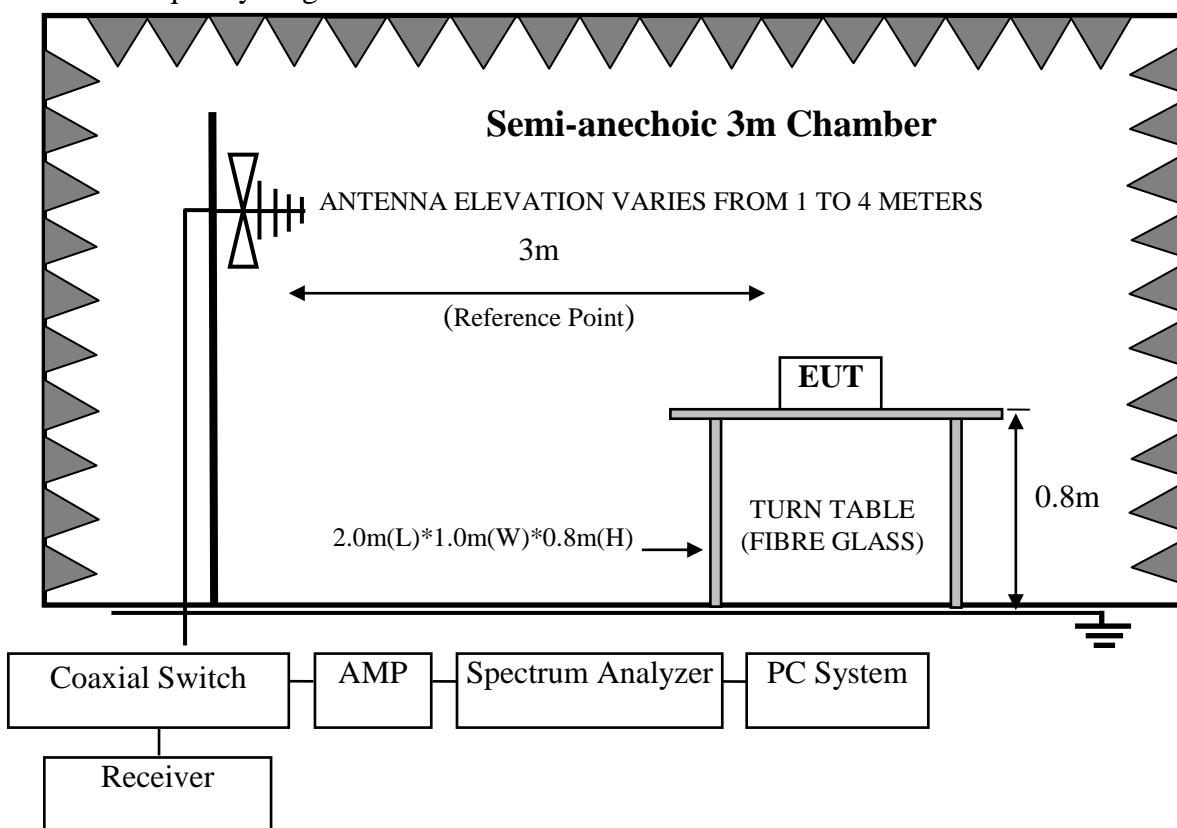

For frequency range 1GHz-25GHz

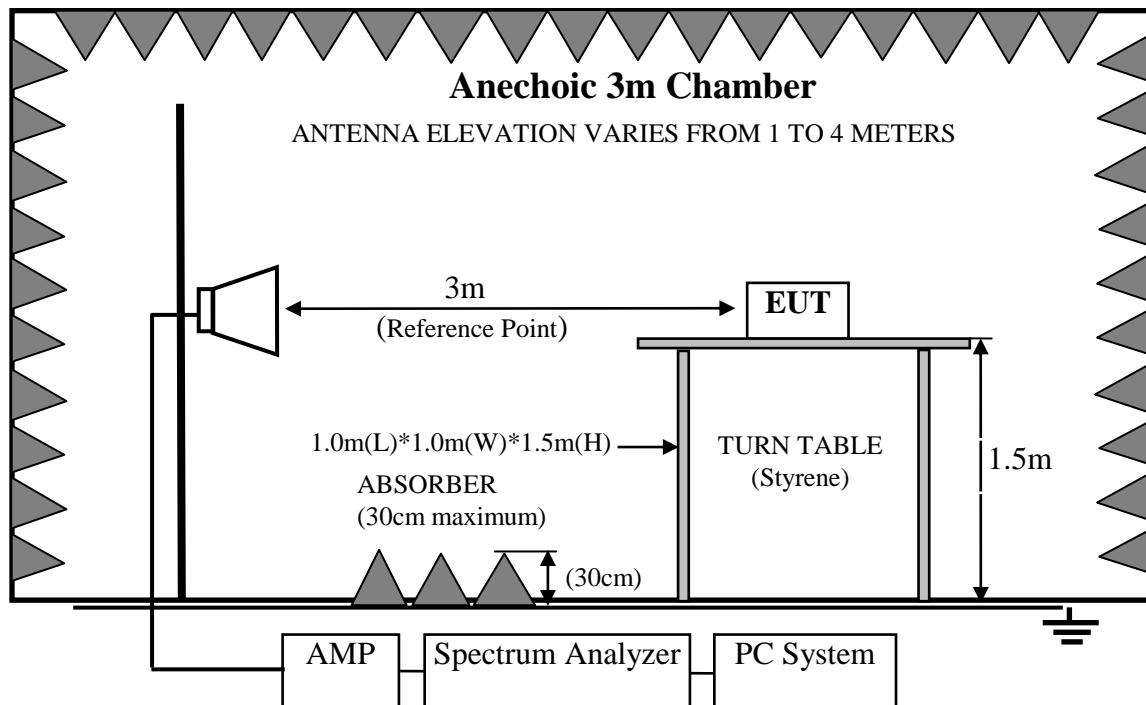

4.2. Radiated Emission Limits Standard:

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		µV/m	dB(µV)/m
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000MHz	3	74.0 dB(µV)/m (Peak) 54.0 dB(µV)/m (Average)	

Remark : (1) Emission Level (dB μ V/m) = Reading (Receiver) (dB μ V) + Antenna Factor (dB/m) + Cable Loss (dB)

Emission Level (dB μ V/m) = Reading (Spectrum) (dB μ V) + Antenna Factor (dB/m) – Amp Factor (dB) + Cable Loss (dB)(above 1000MHz)

(2) The smaller limits shall apply at the cross point between two frequency bands.

(3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

(4) The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

4.3. EUT Configuration on Test

The following equipment are installed on Radiated Emission Test to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

4.3.1. Notebook Computer (EUT)

Model Number : N24G4
Serial Number : N/A

4.4. Operating Condition of EUT

4.4.1. Setup the EUT and simulator as shown as Section 4.1.

4.4.2. Turn on the power of all equipments.

4.4.3. Let EUT work in BLE Tx mode.

4.5. Test Procedure

Frequency below 30MHz:

The EUT setup on the turn table which has 0.8 m height to the ground. The turn table rotated 360 degrees and antenna fixed to 1 m to find the maximum emission level. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10 regulation.

EUT and its simulators are placed on a turn table, which is 0.8 meter high above ground for frequency 30MHz~1000MHz, 1.5 meter high above ground for frequency above 1GHz and put the absorbing with 2.4m(L)*2.4m(W)*0.3m(H) on the ground . The turn table can rotate 360 degrees to determine the position of the maximum emission level. Power on the EUT and let it working in test mode, then test it.EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna for frequency 30MHz~1000MHz, and the Horm antenna is used as receiving antenna for frequency above 1GHz. Both horizontal and vertical polarization of the antenna is set on Test. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.10 on radiated emission Test.

This test was performed with EUT in X, Y, Z position, and the worse case was found reported in report.

The bandwidth of the EMI test receiver is set at 120kHz for frequency range from 30MHz to 1000 MHz.

The bandwidth of the Spectrum's RBW is set at 1MHz and VBW is set at 3MHz for peak emissions measurement above 1GHz.

This device is pulse Modulated, a duty cycle factor was used to calculated average level based measured peak level.


The frequency range from 30MHz to 10th harmonic (25GHz) are checked. and no any emissions were found from 18GHz to 25 GHz, So the radiated emissions from 18GHz to 25GHz were not record.

4.6. Radiated Emission Test Results

PASS.


All the emissions from 30MHz to 25GHz were comply with the 15.209 Limit.

Note: The duty cycle factor for calculate average level is 1Mbps -3.705dB for BLE, and average limit is 20dB below peak limit, so if peak measured level comply with average limit, the average level was deemed to comply with average limit.

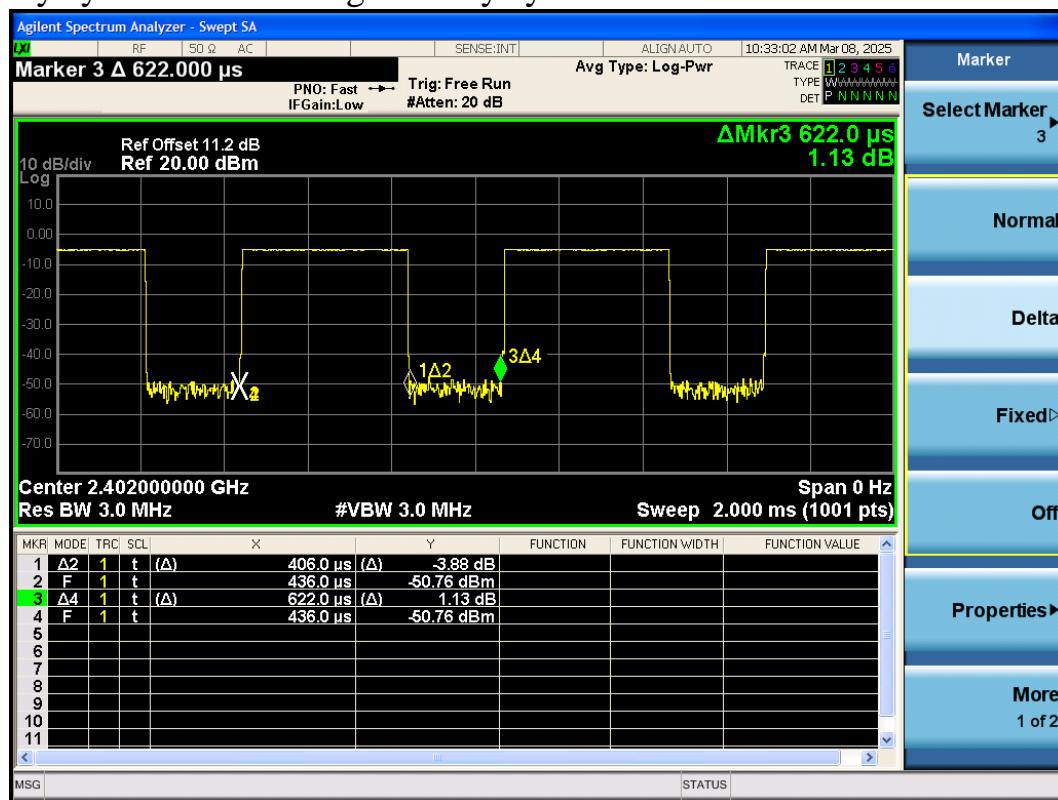1Mbps:Duty cycle factor = $20\log(1/\text{duty cycle}) = -3.705\text{dB}$ 

Frequency: 30MHz~1GHz

1Mbps:

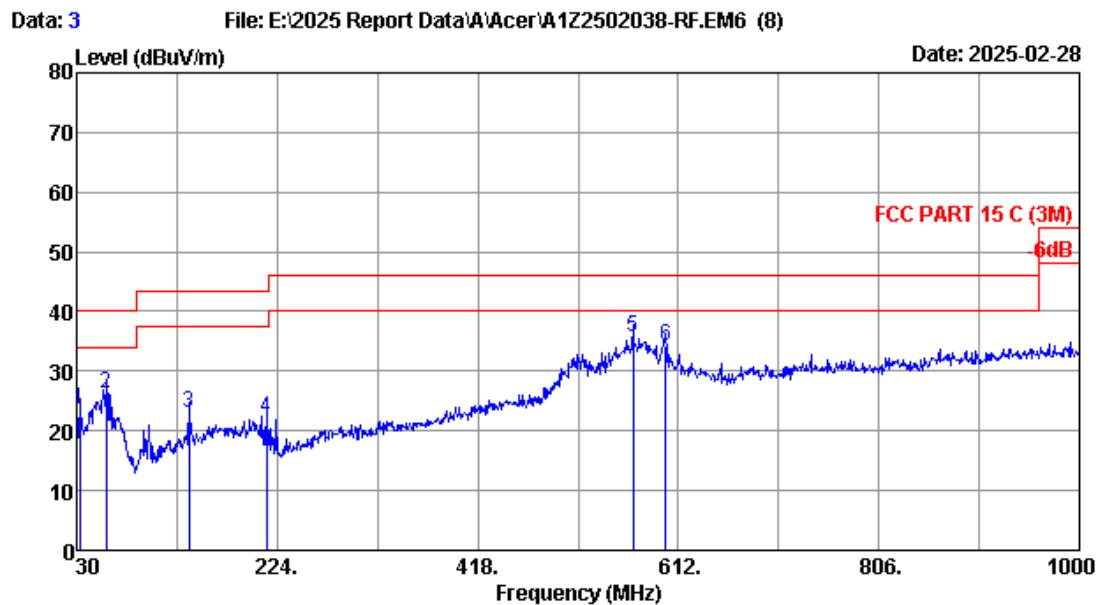


Site no. : 3m Chamber Data no. : 3
 Dis. / Ant. : 3m 2024 VULB 9168-01313 Ant. pol. : VERTICAL
 Limit : FCC PART 15 C (3M)
 Env. / Ins. : 23.5°C/51% Engineer : Abel
 EUT :
 Power rating :
 Test Mode : BLE1M TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Emission					Remark
				Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark	
1	32.910	18.60	0.69	4.20	23.49	40.00	16.51	QP	
2	58.130	19.49	0.87	5.77	26.13	40.00	13.87	QP	
3	138.640	18.56	1.30	3.04	22.90	43.50	20.60	QP	
4	213.330	15.60	1.67	4.78	22.05	43.50	21.45	QP	
5	568.350	24.73	3.52	7.57	35.82	46.00	10.18	QP	
6	599.390	25.68	3.64	4.96	34.28	46.00	11.72	QP	

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Data: 4 File: E:\2025 Report Data\A\Acer\A1Z2502038-RF.EM6 (8)


Date: 2025-02-28

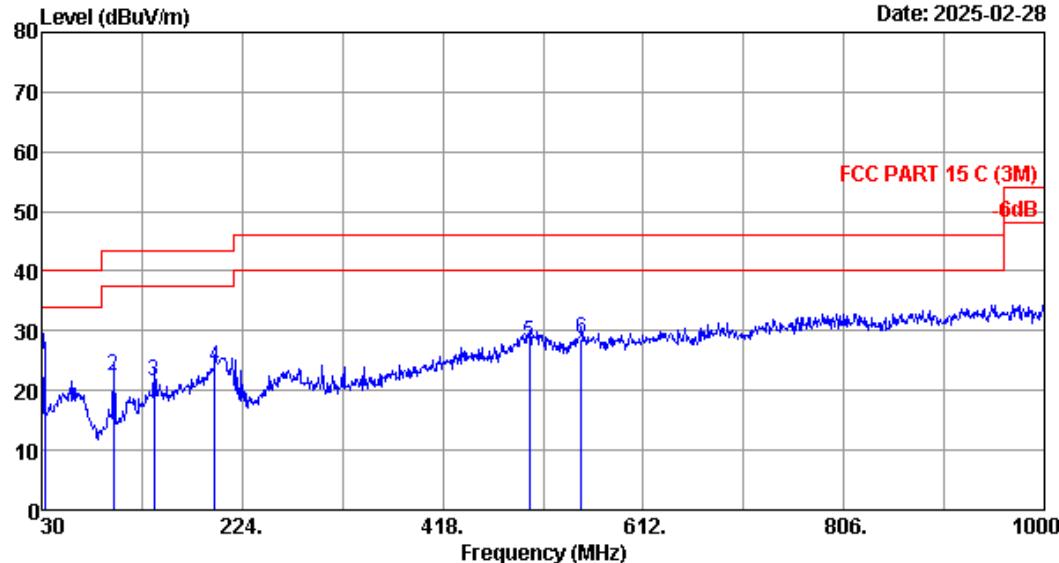

Site no. : 3m Chamber Data no. : 4
 Dis. / Ant. : 3m 2024 VULB 9168-01313 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 C (3M)
 Env. / Ins. : 23.5°C/51% Engineer : Abel
 EUT :
 Power rating :
 Test Mode : BLE1M TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Emission			
				Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)
1	32.910	18.60	0.69	6.61	25.90	40.00	14.10
2	99.840	14.98	1.11	6.28	22.37	43.50	21.13
3	138.640	18.56	1.30	1.65	21.51	43.50	21.99
4	197.810	16.02	1.60	6.32	23.94	43.50	19.56
5	501.420	23.60	3.27	1.32	28.19	46.00	17.81
6	551.860	24.67	3.46	0.44	28.57	46.00	17.43

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

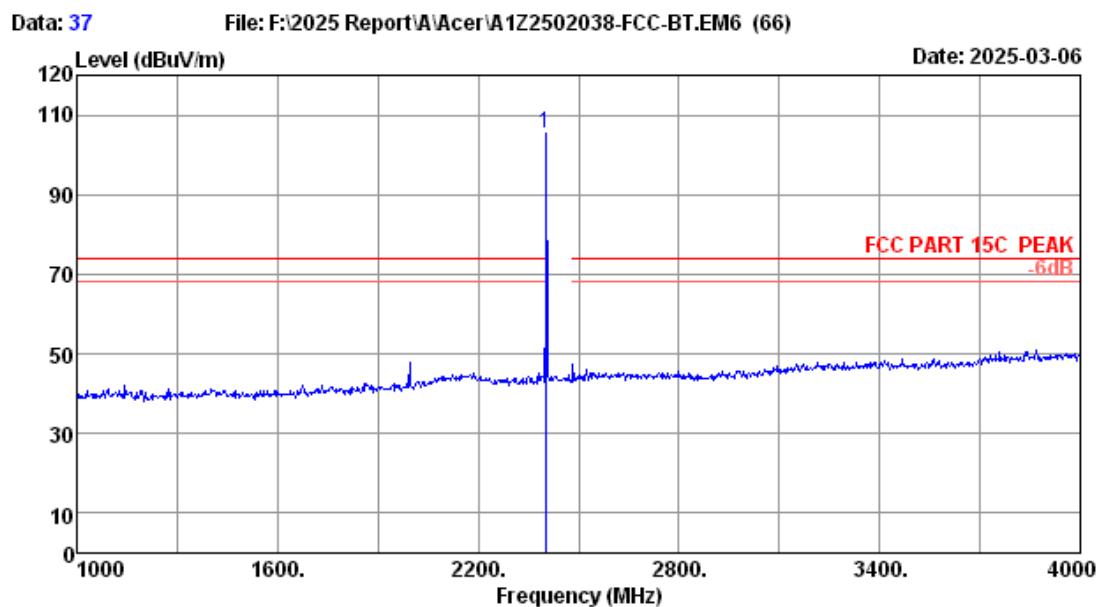Frequency: 1GHz~18GHz**1Mbps:**


Site no. : 3m Chamber Data no. : 37
Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK Engineer : Epoch
Env. / Ins. : 23.2°C/52.6%
Test Mode : BLE1M 2402MHz TX Mode AINT1

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Margin (dBuV/m)	Margin (dB)	Remark
1	2402.00	27.70	5.22	31.70	104.11	105.33	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
-Amp factor(Peak)
2. The emission levels that are 20dB below the official
limit are not reported

Data: 38 File: F:\2025 Report\A\Acer\A1Z2502038-FCC-BT.EM6 (66)


Date: 2025-02-18

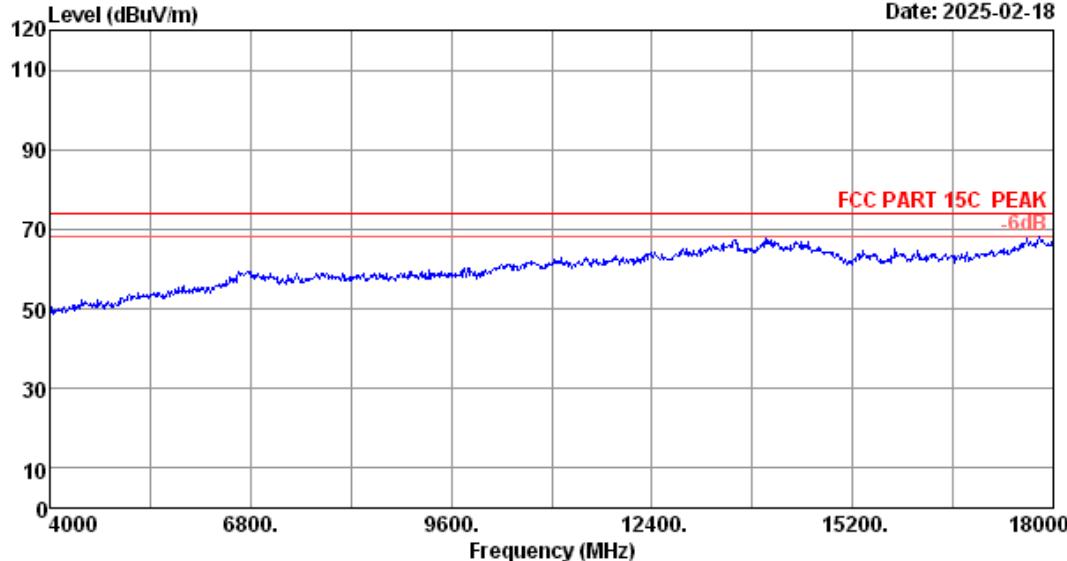

Site no. : 3m Chamber Data no. : 38
Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK Engineer : Epoch
Env. / Ins. : 23.2°C/52.6%
Test Mode : BLE1M 2402MHz TX Mode A1T1

Data: 39 File: F:\2025 Report\A\Acer\A1Z2502038-FCC-BT.EM6 (66)

Date: 2025-02-18

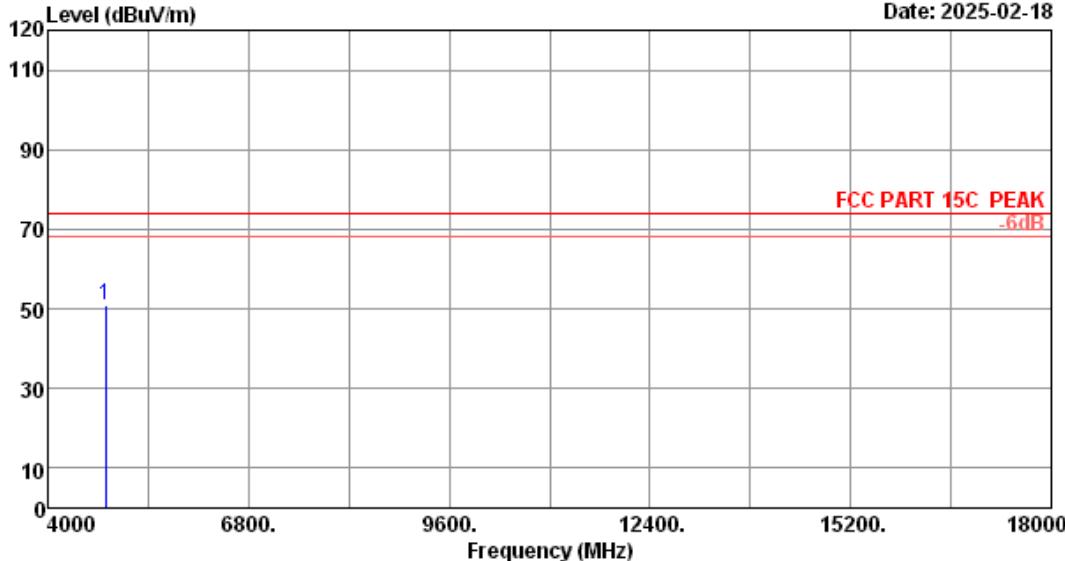


Site no. : 3m Chamber Data no. : 39
Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK Engineer : Epoch
Env. / Ins. : 23.2°C/52.6%
Test Mode : BLE1M 2402MHz TX Mode A1T1

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dB)	Emission Level (dBuV)	Emission Limits (dBuV/m)	Margin (dB)	Remark
1	4804.00	31.30	7.14	30.42	42.90	50.92	74.00	23.08	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
-Amp factor(Peak)
2. The emission levels that are 20dB below the official
limit are not reported

Data: 40 File: F:\2025 Report\A\Acer\A1Z2502038-FCC-BT.EM6 (66)

Date: 2025-03-06

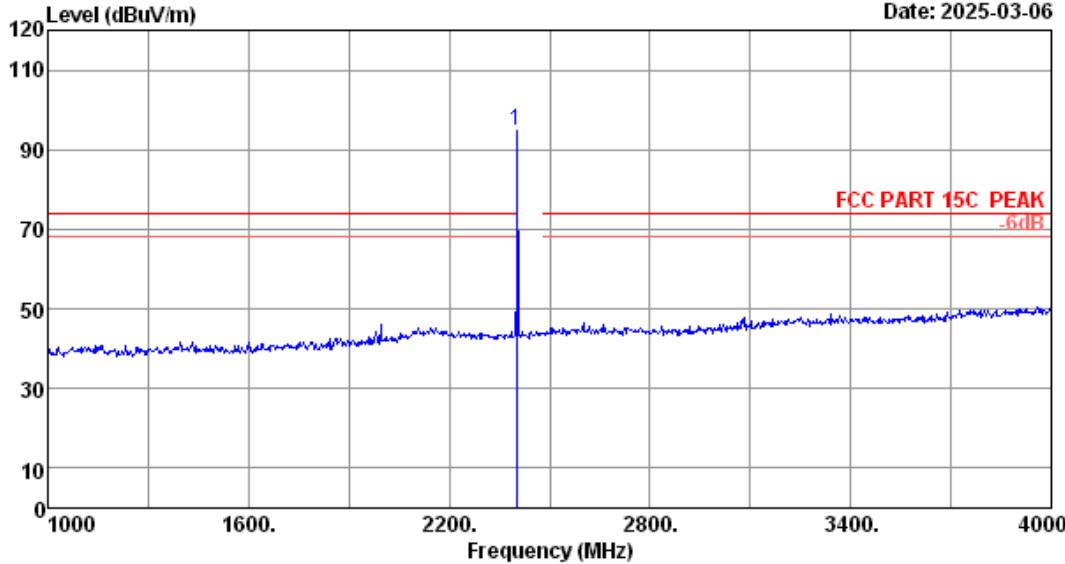


Site no. : 3m Chamber Data no. : 40
Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK Engineer : Epoch
Env. / Ins. : 23.2°C/52.6%
Test Mode : BLE1M 2402MHz TX Mode A1T1

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dB)	Emission Level (dBuV)	Margin Limits (dBuV/m)	Margin Limits (dB)	Remark
1	2402.00	27.70	5.22	31.70	93.47	94.69	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
-Amp factor(Peak)
2. The emission levels that are 20dB below the official
limit are not reported

Data: 41 File: F:\2025 Report\A\Acer\A1Z2502038-FCC-BT.EM6 (66)


Date: 2025-03-06

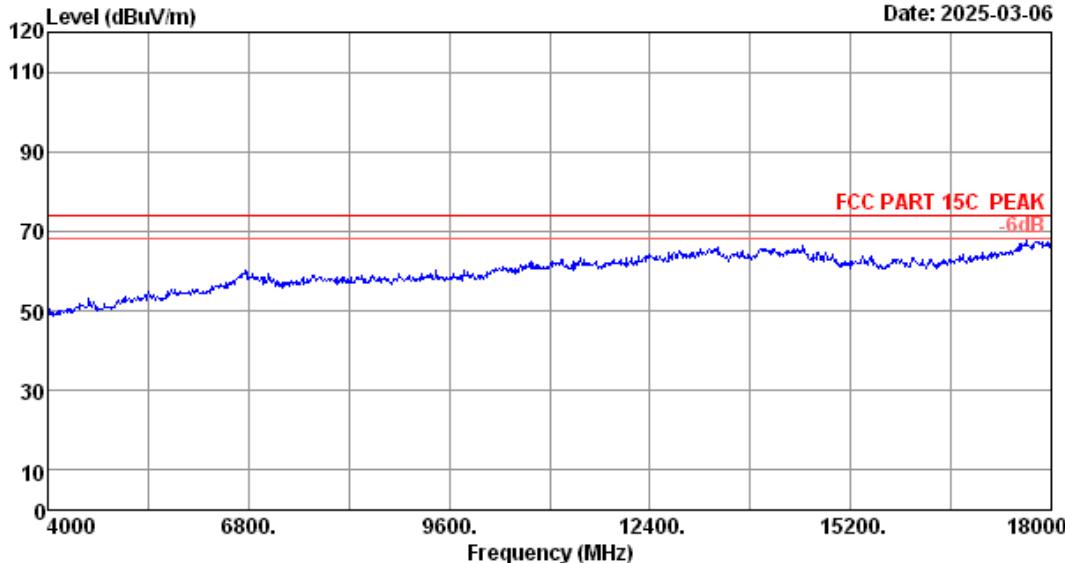

Site no. : 3m Chamber Data no. : 41
Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK Engineer : Epoch
Env. / Ins. : 23.2°C/52.6%
Test Mode : BLE1M 2402MHz TX Mode A1T1

Data: 42 File: F:\2025 Report\A\Acer\A1Z2502038-FCC-BT.EM6 (66)

Date: 2025-02-18

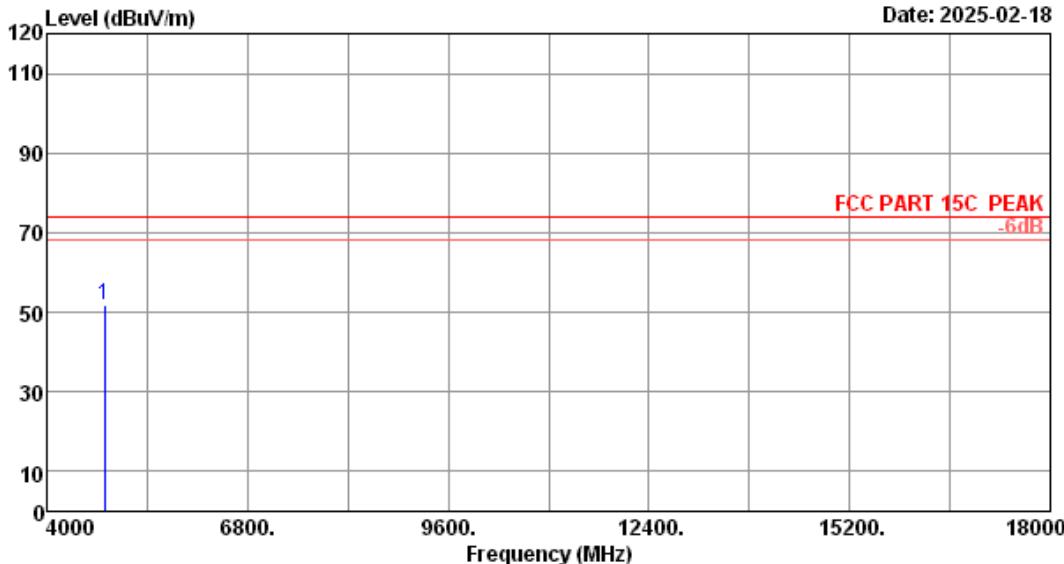


Site no. : 3m Chamber Data no. : 42
Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK Engineer : Epoch
Env. / Ins. : 23.2°C/52.6%
Test Mode : BLE1M 2402MHz TX Mode AINT1

No.	Freq. (MHz)	Ant.	Cable	AMP	Emission			Margin	Remark
		Factor (dB/m)	Loss (dB)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	(dB)	
1	4804.00	31.30	7.14	30.42	43.97	51.99	74.00	22.01	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
-Amp factor(Peak)
2. The emission levels that are 20dB below the official
limit are not reported

Data: 43 File: F:\2025 Report\A\Acer\A1Z2502038-FCC-BT.EM6 (66)

Date: 2025-03-05

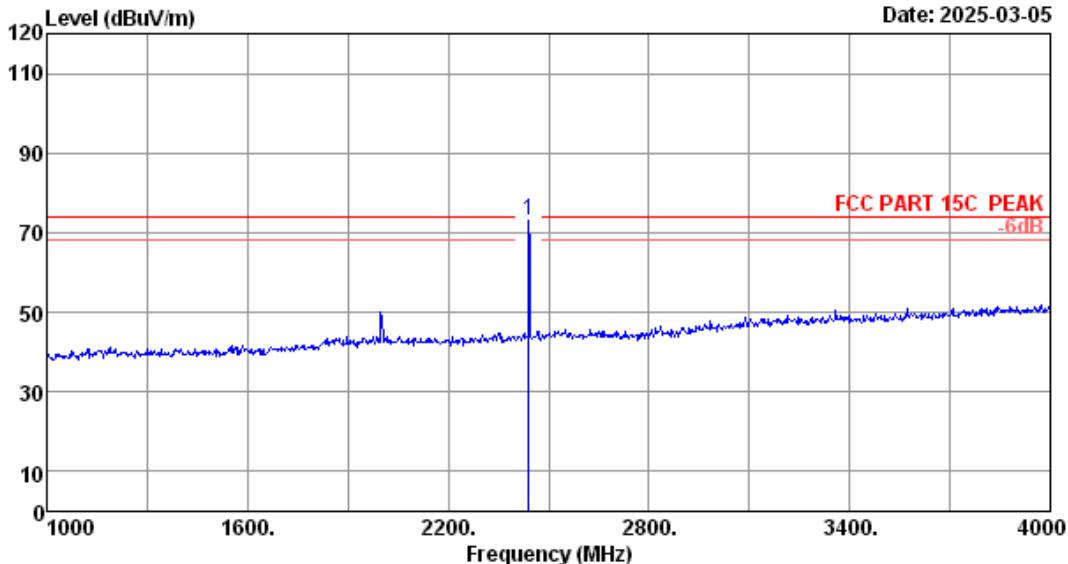


Site no. : 3m Chamber Data no. : 43
Dis. / Ant. : 3m 2025-3115-4877 Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK Engineer : Epoch
Env. / Ins. : 23.2°C/52.6%
Test Mode : BLE1M 2440MHz TX Mode AINT1

No.	Freq. (MHz)	Ant.	Cable	AMP	Emission			Margin	
		Factor (dB/m)	Loss (dB)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Limits (dBuV/m)	Remark
1	2440.00	27.90	5.26	31.68	71.79	73.27	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
-Amp factor(Peak)
2. The emission levels that are 20dB below the official
limit are not reported

Data: 44 File: F:\2025 Report\A\Acer\A1Z2502038-FCC-BT.EM6 (66)


Date: 2025-03-06

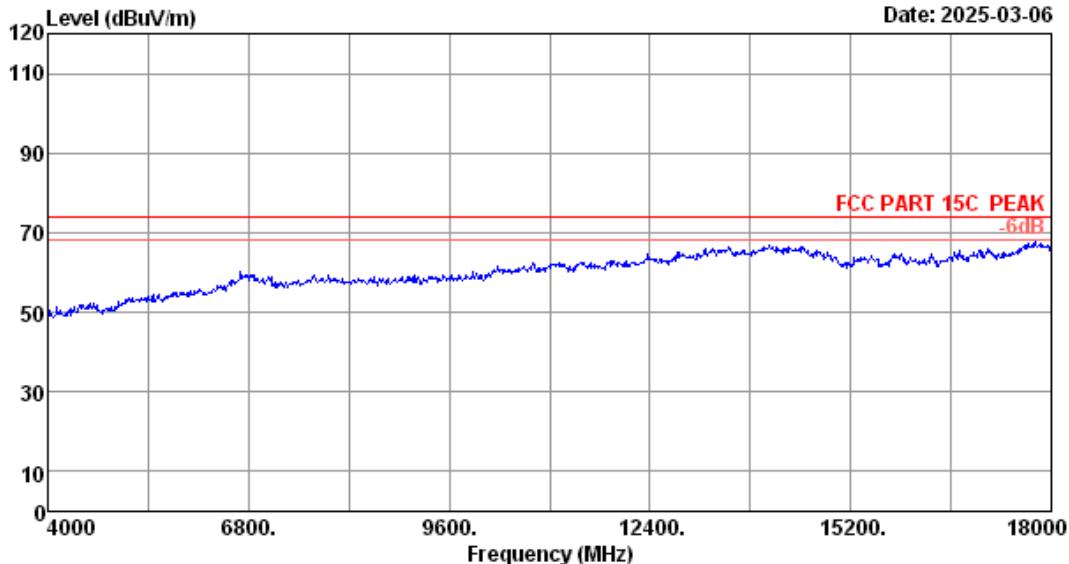

Site no.	:	3m Chamber	Data no.	:	44
Dis. / Ant.	:	3m 2024 MCTD1209-3006	Ant. pol.	:	HORIZONTAL
Limit	:	FCC PART 15C PEAK	Engineer	:	Epoch
Env. / Ins.	:	23.2°C/52.6%			
Test Mode	:	BLE1M 2440MHz TX Mode A1T1			

Data: 45 File: F:\2025 Report\A\Acer\A1Z2502038-FCC-BT.EM6 (66)

Date: 2025-02-18

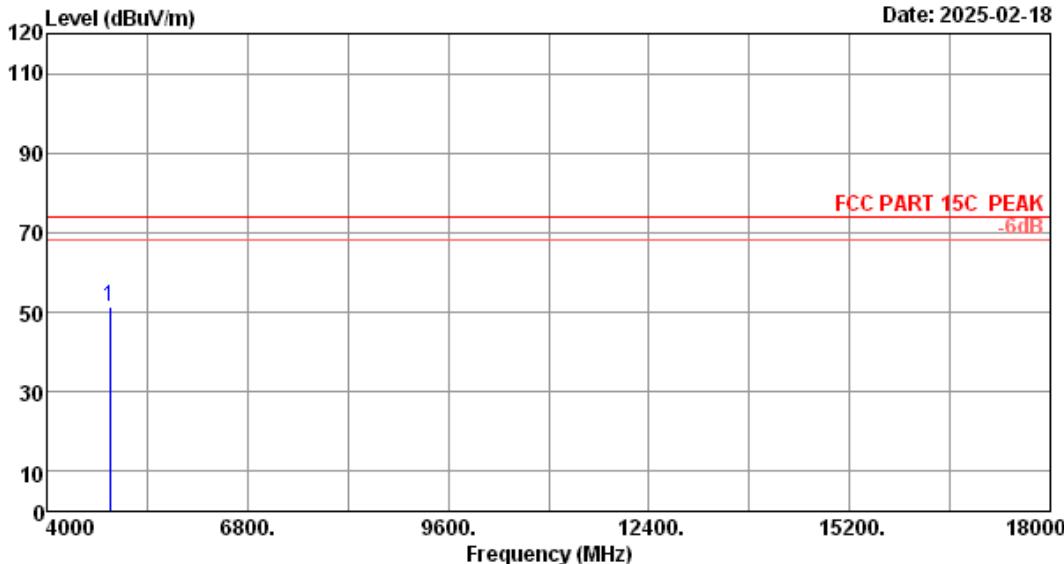


Site no. : 3m Chamber Data no. : 45
Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK Engineer : Epoch
Env. / Ins. : 23.2°C/52.6%
Test Mode : BLE1M 2440MHz TX Mode AINT1

No.	Freq. (MHz)	Ant.	Cable	AMP	Emission			Margin	Remark
		Factor (dB/m)	Loss (dB)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	(dB)	
1	4880.00	31.36	7.18	30.41	43.43	51.56	74.00	22.44	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
-Amp factor(Peak)
2. The emission levels that are 20dB below the official
limit are not reported

Data: 46 File: F:\2025 Report\A\Acer\A1Z2502038-FCC-BT.EM6 (66)

Date: 2025-03-05

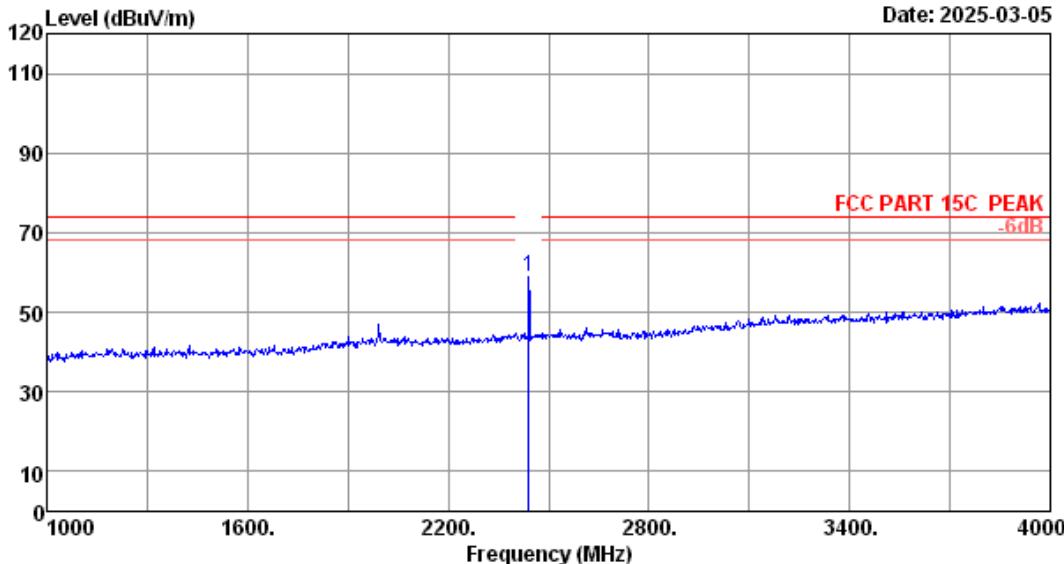

Site no. : 3m Chamber
Dis. / Ant. : 3m 2025-3115-4877
Limit : FCC PART 15C PEAK
Env. / Ins. : 23.2°C/52.6%
Test Mode : BLE1M 2440MHz TX Mode AINT1


Data no. : 46
Ant. pol. : VERTICAL
Engineer : Epoch

No.	Freq. (MHz)	Ant.	Cable	AMP	Emission			Margin	Remark
		Factor (dB/m)	Loss (dB)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	(dB)	
1	2440.00	27.90	5.26	31.68	57.53	59.01	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
-Amp factor(Peak)
2. The emission levels that are 20dB below the official
limit are not reported

Data: 47 File: F:\2025 Report\A\Acer\A1Z2502038-FCC-BT.EM6 (66)


Date: 2025-03-06

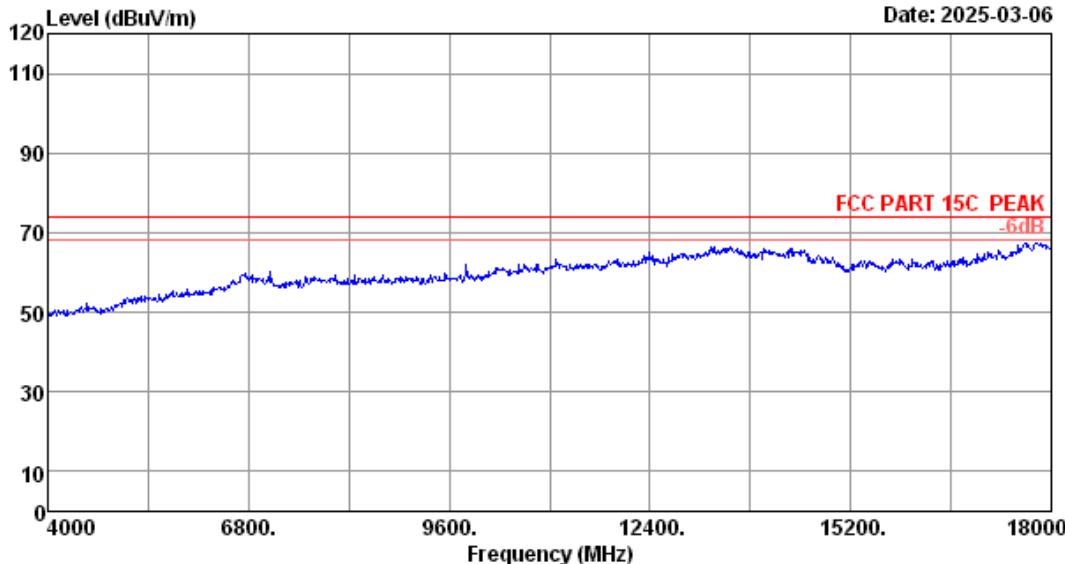

Site no. : 3m Chamber Data no. : 47
Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK Engineer : Epoch
Env. / Ins. : 23.2°C/52.6%
Test Mode : BLE1M 2440MHz TX Mode AINT1

Data: 48 File: F:\2025 Report\A\Acer\A1Z2502038-FCC-BT.EM6 (66)

Date: 2025-02-18

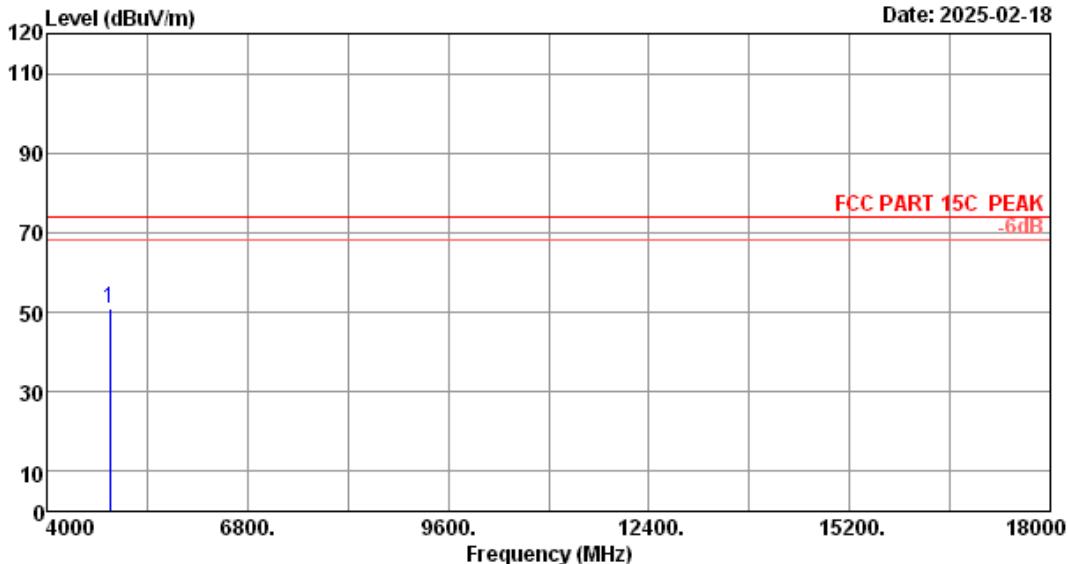


Site no. : 3m Chamber Data no. : 48
Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK Engineer : Epoch
Env. / Ins. : 23.2°C/52.6%
Test Mode : BLE1M 2440MHz TX Mode AINT1

No.	Freq. (MHz)	Ant.	Cable	AMP	Emission			Margin	Remark
		Factor (dB/m)	Loss (dB)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	(dB)	
1	4880.00	31.36	7.18	30.41	42.85	50.98	74.00	23.02	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
-Amp factor(Peak)
2. The emission levels that are 20dB below the official
limit are not reported

Data: 49 File: F:\2025 Report\A\Acer\A1Z2502038-FCC-BT.EM6 (66)

Date: 2025-03-05

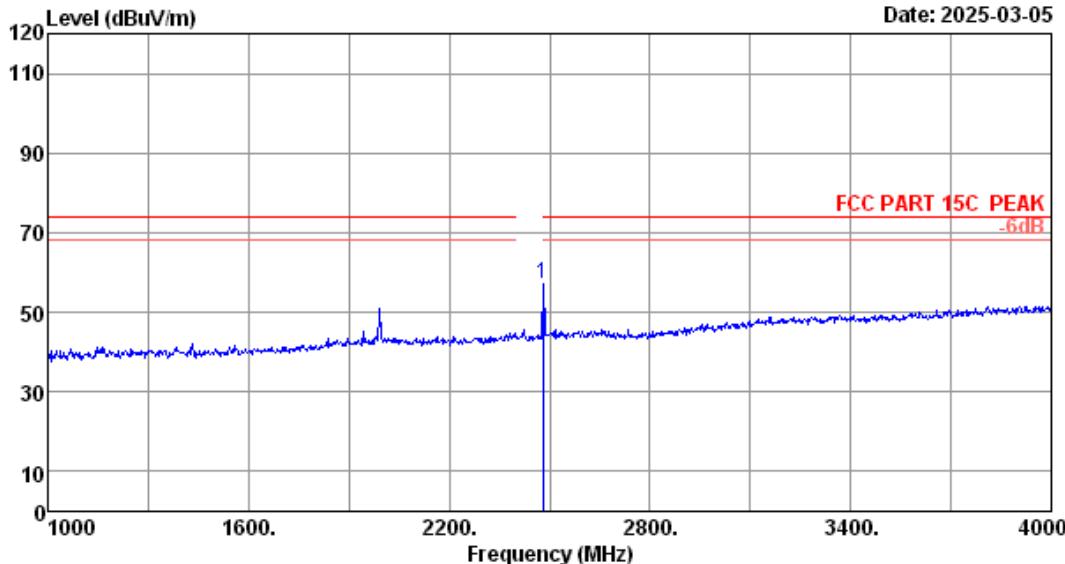


Site no. : 3m Chamber
Dis. / Ant. : 3m 2025-3115-4877
Limit : FCC PART 15C PEAK
Env. / Ins. : 23.2°C/52.6%
Test Mode : BLE1M 2480MHz TX Mode AINT1

Data no. : 49
Ant. pol. : VERTICAL
Engineer : Epoch

No.	Freq. (MHz)	Ant.	Cable	AMP	Emission			Margin	Remark
		Factor (dB/m)	Loss (dB)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	(dB)	
1	2480.00	28.08	5.30	31.66	55.34	57.06	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
-Amp factor(Peak)
2. The emission levels that are 20dB below the official
limit are not reported

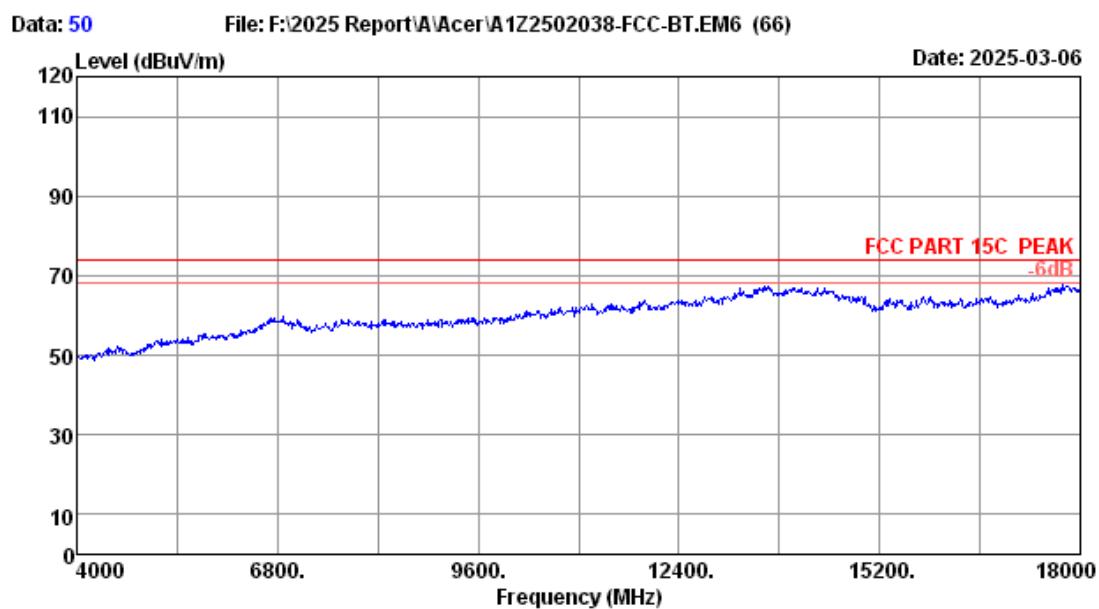

Site no. : 3m Chamber Data no. : 50
Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK Engineer : Epoch
Env. / Ins. : 23.2°C/52.6%
Test Mode : BLE1M 2480MHz TX Mode A1T1

Data: 51 File: F:\2025 Report\A\Acer\A1Z2502038-FCC-BT.EM6 (66)

Date: 2025-02-18

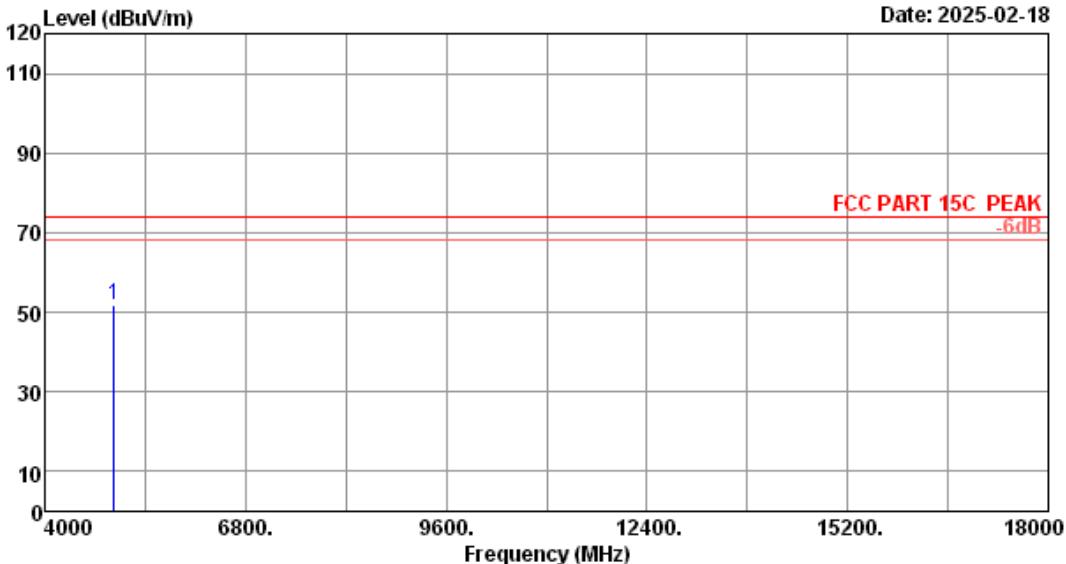


Site no. : 3m Chamber Data no. : 51
Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK Engineer : Epoch
Env. / Ins. : 23.2°C/52.6%
Test Mode : BLE1M 2480MHz TX Mode AINT1

No.	Freq. (MHz)	Ant.	Cable	AMP	Emission			Margin	Remark
		Factor (dB/m)	Loss (dB)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	(dB)	
1	4960.00	31.96	7.22	30.40	42.84	51.62	74.00	22.38	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
-Amp factor(Peak)
2. The emission levels that are 20dB below the official
limit are not reported

Data: 52 File: F:\2025 Report\A\Acer\A1Z2502038-FCC-BT.EM6 (66)

Date: 2025-03-05

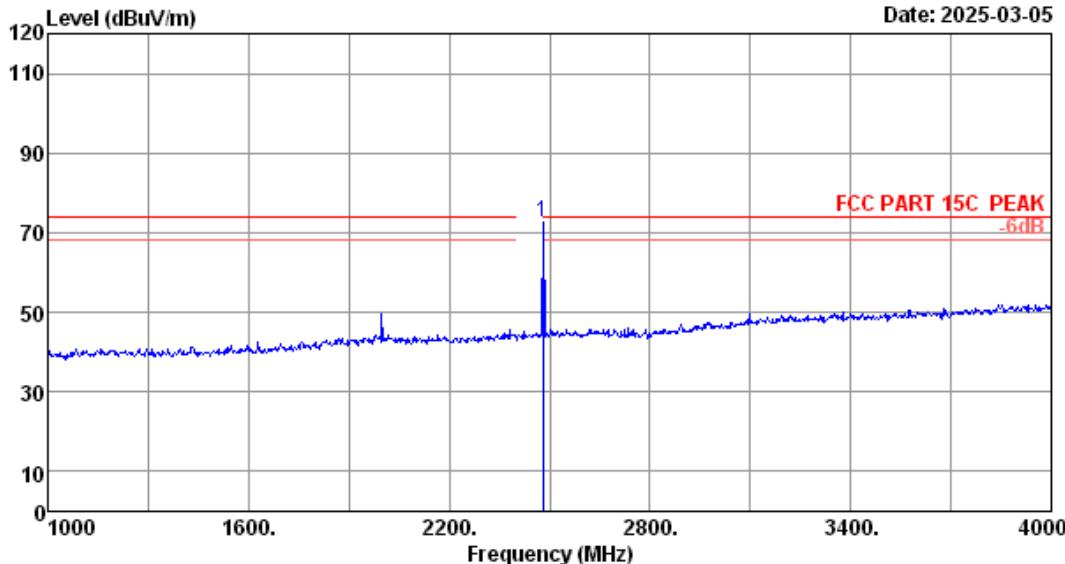

Site no. : 3m Chamber
Dis. / Ant. : 3m 2025-3115-4877
Limit : FCC PART 15C PEAK
Env. / Ins. : 23.2°C/52.6%
Test Mode : BLE1M 2480MHz TX Mode AINT1


Data no. : 52
Ant. pol. : HORIZONTAL
Engineer : Epoch

No.	Freq. (MHz)	Ant.	Cable	AMP	Emission			Margin	
		Factor (dB/m)	Loss (dB)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Limits (dBuV/m)	Remark
1	2480.00	28.08	5.30	31.66	71.07	72.79	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
-Amp factor(Peak)
2. The emission levels that are 20dB below the official
limit are not reported

Data: 53 File: F:\2025 Report\A\Acer\A1Z2502038-FCC-BT.EM6 (66)


Date: 2025-02-18

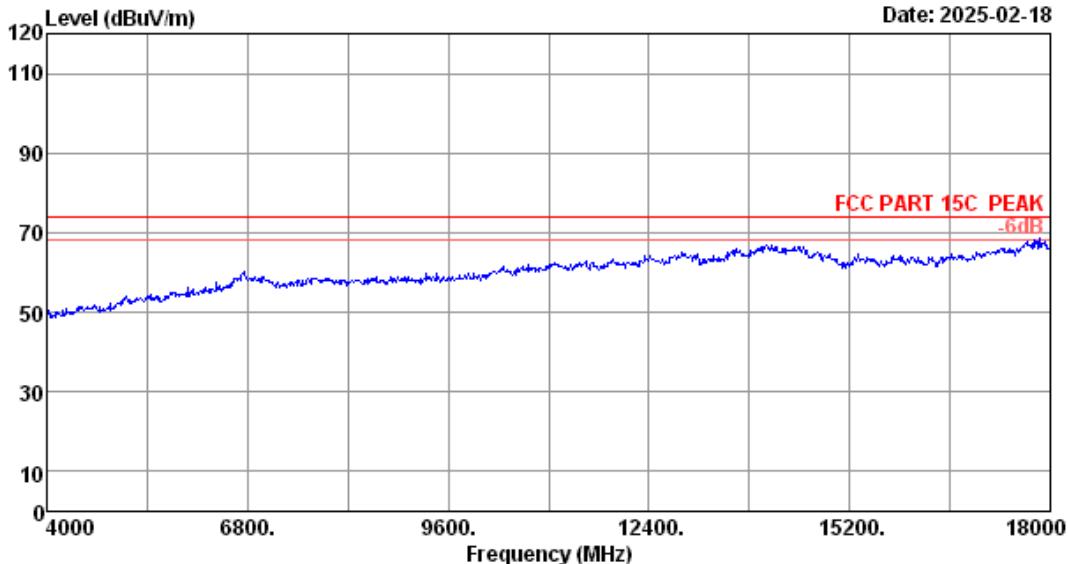

Site no. : 3m Chamber Data no. : 53
Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK Engineer : Epoch
Env. / Ins. : 23.2°C/52.6%
Test Mode : BLE1M 2480MHz TX Mode AINT1

Data: 54 File: F:\2025 Report\A\Acer\A1Z2502038-FCC-BT.EM6 (66)

Date: 2025-02-18

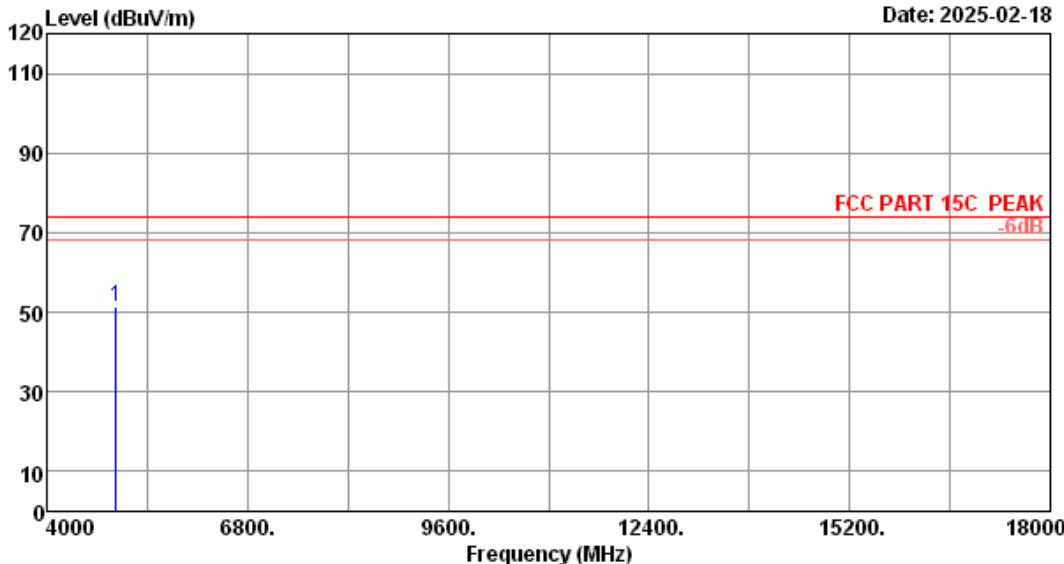

Site no. : 3m Chamber Data no. : 54
Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK Engineer : Epoch
Env. / Ins. : 23.2°C/52.6%
Test Mode : BLE1M 2480MHz TX Mode AINT1

No.	Freq. (MHz)	Ant.	Cable	AMP	Emission			Margin	Remark
		Factor (dB/m)	Loss (dB)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	(dB)	
1	4960.00	31.96	7.22	30.40	42.49	51.27	74.00	22.73	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
-Amp factor(Peak)
2. The emission levels that are 20dB below the official
limit are not reported

5. CONDUCTED SPURIOUS EMISSIONS

5.1. Block Diagram of Test Setup

Please reference to section 2.4.

5.2. Limit

In any 100kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30dB instead of 20dB.

5.3. Test Procedure

Use the test method described in ANSI C63.10:

The transmitter output was connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz, The video bandwidth is set to 300 kHz and measure all the emissions With peak detector.

5.4. Test result

PASS (The testing data was attached in the next pages.)

EUT: Notebook Computer		
M/N: N24G4		
Test date: 2025-03-06	Pressure: 102.3±1.0 kpa	Humidity: 53.5±3.0%
Tested by: Epoch	Test site: RF site	Temperature: 25.4±0.6 °C


1Mbps:

GFSK


2402MHz




2402MHz(10GHz – 26GHz)

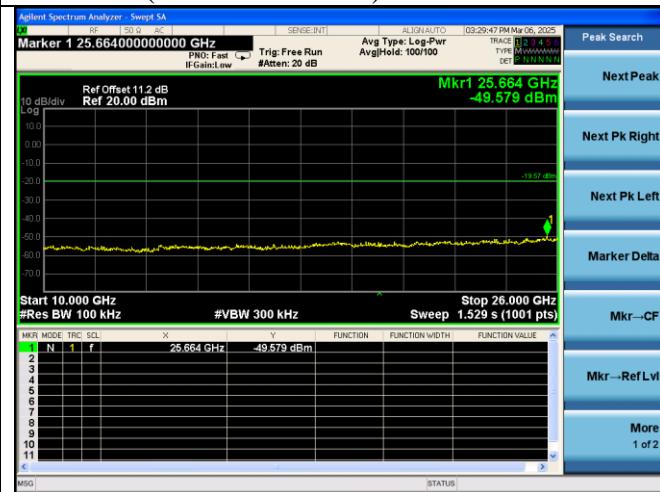


2402MHz(30MHz – 1GHz)

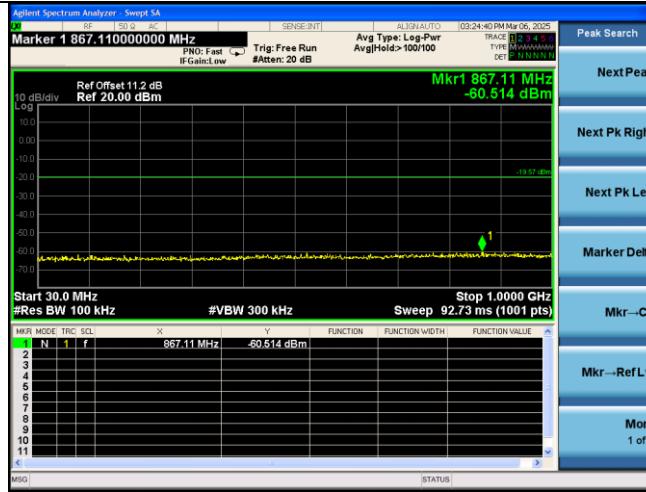


2402MHz(2.3GHz – 2.4GHz)

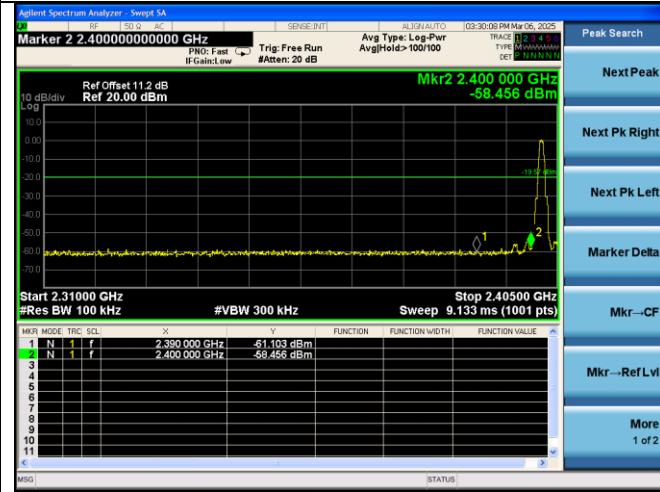


2402MHz(1GHz – 10GHz)

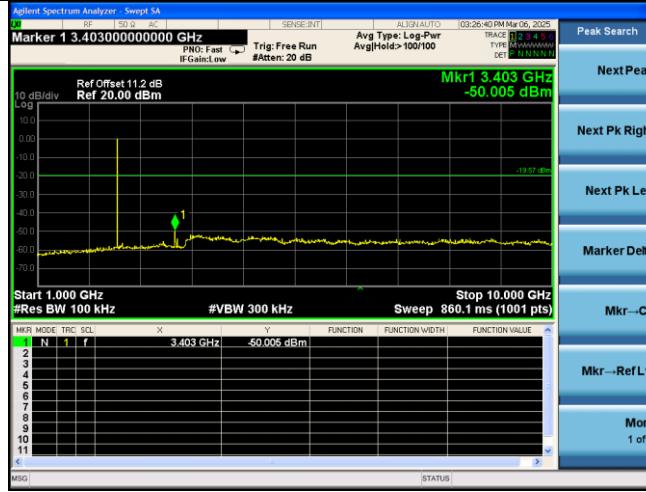


2440MHz

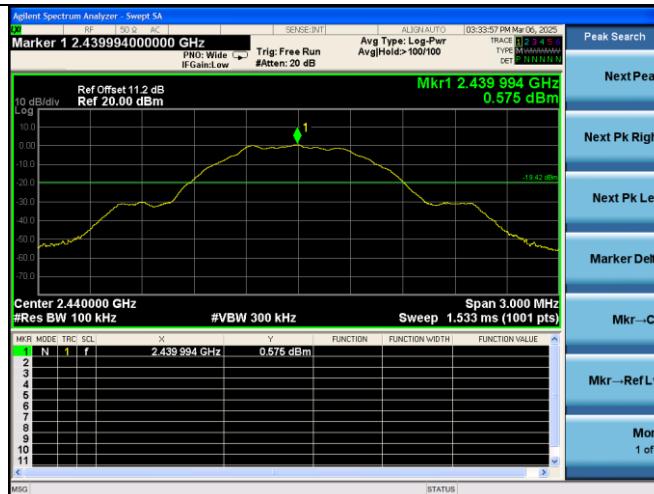


2440MHz(1GHz – 10GHz)

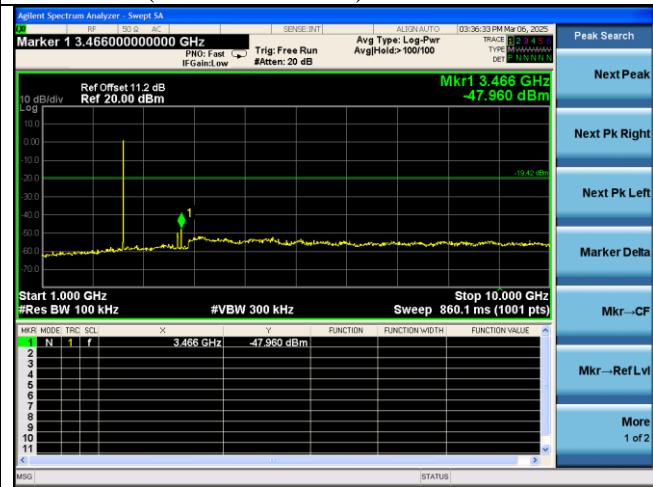

2440MHz(30MHz – 1GHz)

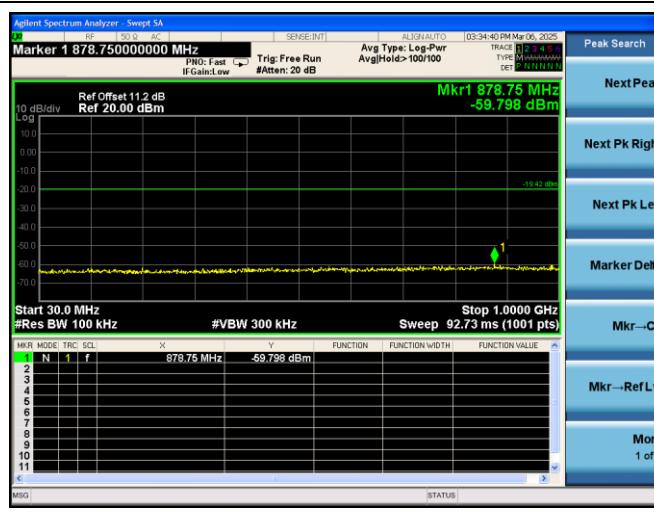


2440MHz(10GHz – 26GHz)

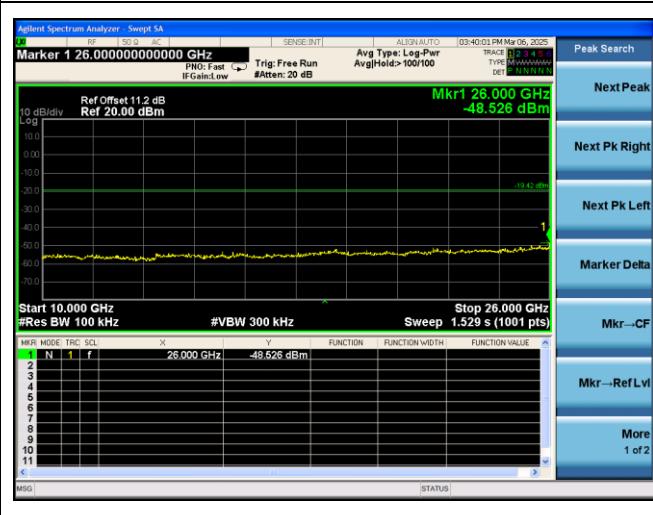


2480MHz




2480MHz(10GHz – 26GHz)

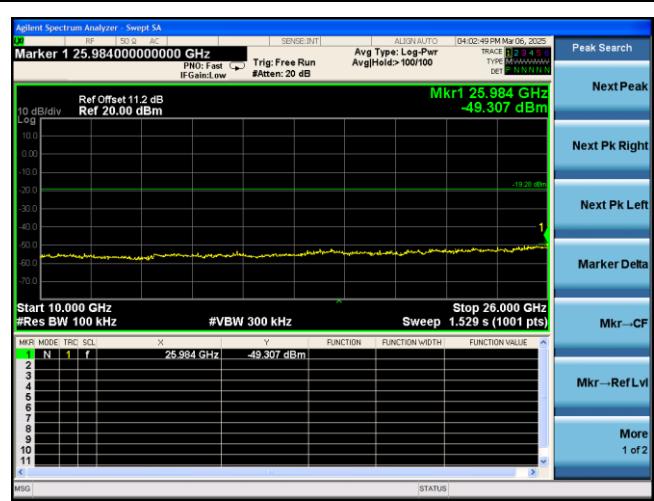


2480MHz(30MHz – 1GHz)

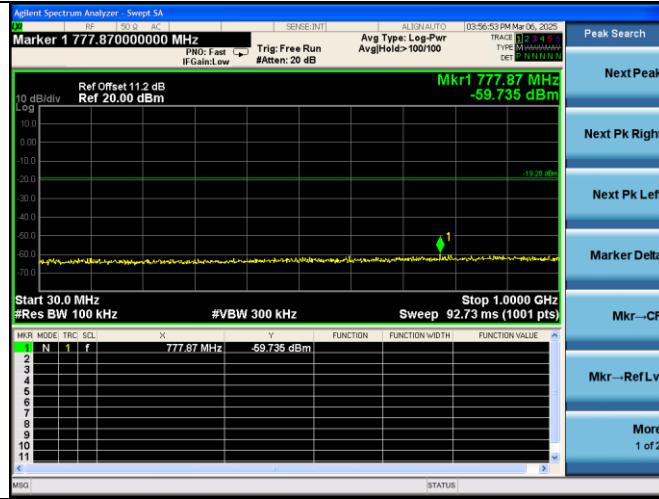

2480MHz(2.4GHz – 2.5GHz)

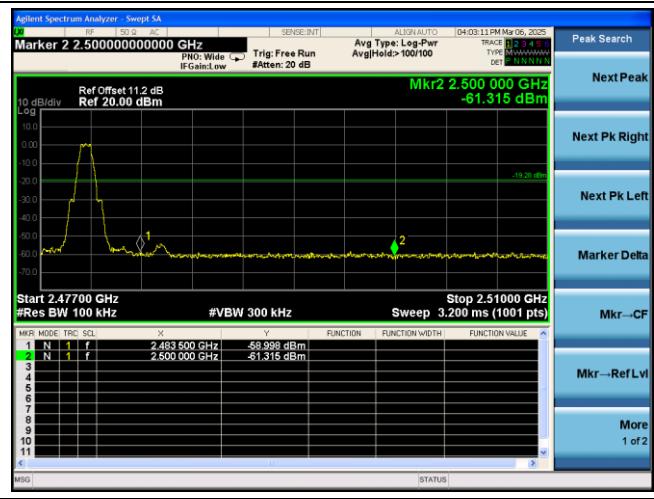

2480MHz(1GHz – 10GHz)

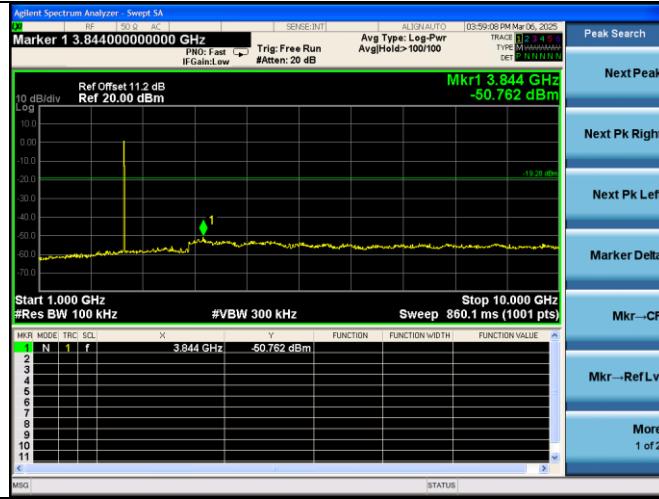

6. 6DB & 99% BANDWIDTH TEST

6.1. Block Diagram of Test Setup

Please reference to section 2.4.

6.2. Limit

For direct sequence systems, the minimum 6dB bandwidth shall be at least 500kHz.

6.3. Test Procedure

Use the test method described in ANSI C63.10 clause 11.8.2:

The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described in 11.8.1 (i.e., $RBW = 100 \text{ kHz}$, $VBW \geq 3 \times RBW$, and peak detector with maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be $\geq 6 \text{ dB}$.

Use the test method described in ANSI C63.10 clause 6.9.2:

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. The following procedure shall be used for measuring 99% power bandwidth:

- a) The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW.
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be approximately three times the RBW, unless otherwise specified by the applicable requirement.
- c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (OBW/RBW)]$ below the reference level. Specific guidance is given in 4.1.5.2.
- d) Step a) through step c) might require iteration to adjust within the specified range.
- e) Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
- f) Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth.

g) If the instrument does not have a 99% power bandwidth function, then the trace data points are recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% power bandwidth is the difference between these two frequencies.



h) The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

6.4. Test Results

EUT: Notebook Computer		
M/N: N24G4		
Test date: 2025-03-06	Pressure: 103.3 ± 1.0 kpa	Humidity: $52.5 \pm 3.0\%$
Tested by: Epoch	Test site: RF site	Temperature: 24.4 ± 0.6 °C

1Mbps:

Test Mode	Frequency (MHz)	-6dB Bandwidth (KHz)	Limit (KHz)
GFSK	2402	727.4	≥ 500
	2440	718.0	≥ 500
	2480	717.3	≥ 500
Conclusion : PASS			


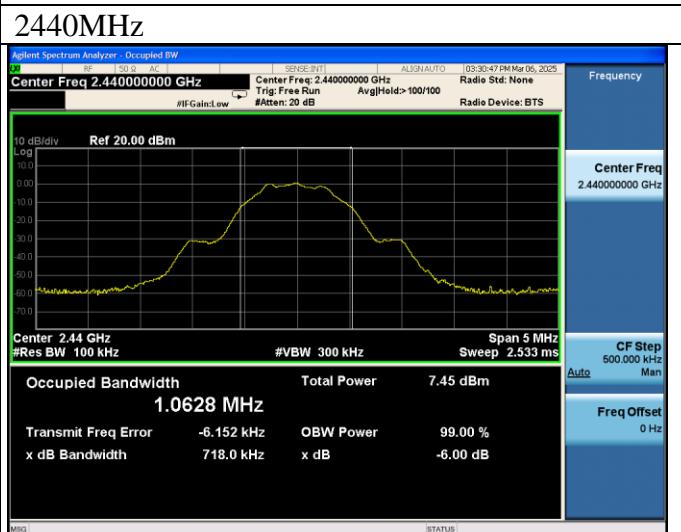
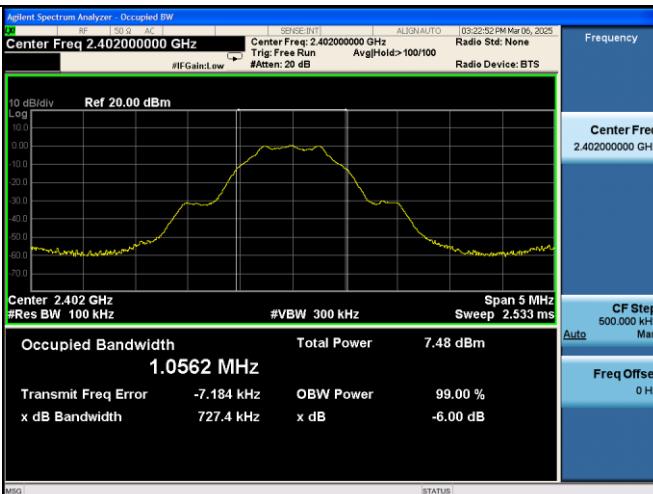
1Mbps:**GFSK****2402MHz****2480MHz**

EUT: Notebook Computer		
M/N: N24G4		
Test date: 2025-03-06	Pressure: 103.3±1.0 kpa	Humidity: 52.5±3.0%
Tested by: Epoch	Test site: RF site	Temperature: 24.4±0.6°C

1Mbps:

Test Mode	CH	99% Bandwidth (KHz)	Limit (MHz)
GFSK	2402	1051.8	N/A
	2440	1049.6	
	2480	1054.6	

Conclusion: Pass

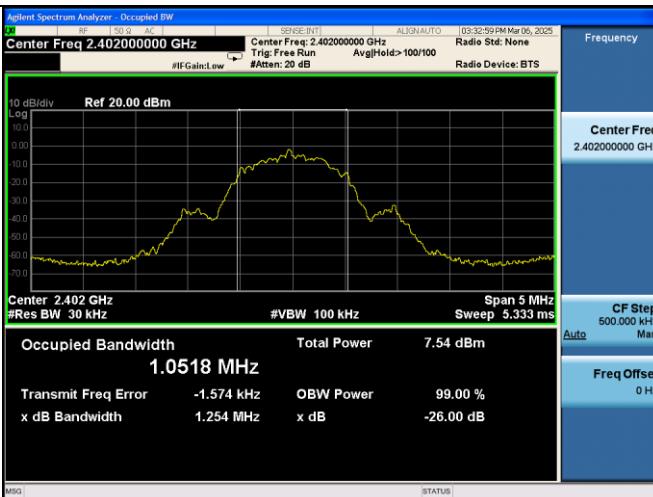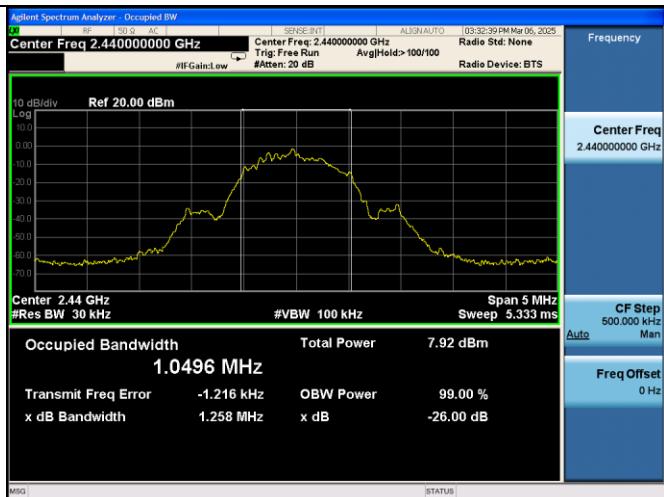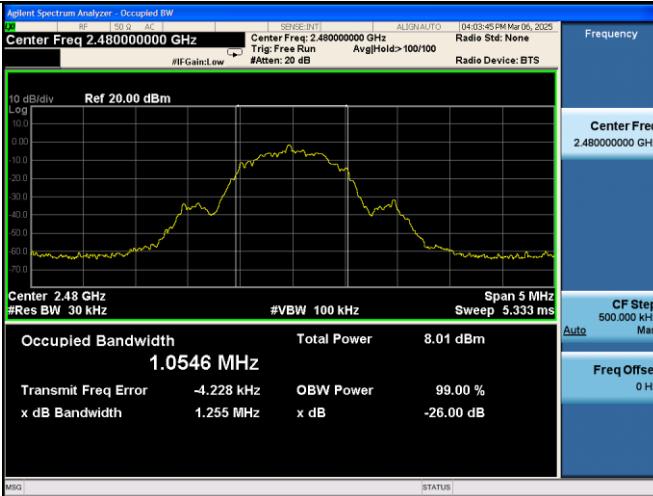1Mbps:**GFSK****2402MHz****2440MHz****2480MHz**

7. MAXIMUM PEAK OUTPUT POWER TEST

7.1. Limit

For systems using digital modulation in the 2400—2483.5MHz, The Peak out put Power shall not exceed 1W(30dBm).

7.2. Test Procedure

Use the test method desrcied in ANSI C63.10 clause 11.9.1.3:

Connected the EUT's antenna port to Power Sensor, and use power meter to test peak output power.

7.3. Test Results

EUT: Notebook Computer		
M/N: N24G4		
Date: 2025-02-17	Pressure: 101.3 ± 1.0 kpa	Humidity: $52.4 \pm 3.0\%$
Tested by: Epoch	Test Site: RF site	Temperature: 23.1 ± 0.6 °C

1Mbps:

Test Mode	Frequency (MHz)	Power Setting	Peak Output Power (dBm)	Limit (dBm)
GFSK	2402	21	2.249	30
	2440		2.281	
	2480		2.315	

1Mbps:

GESK


2402MHz



2440MHz



2480MHz

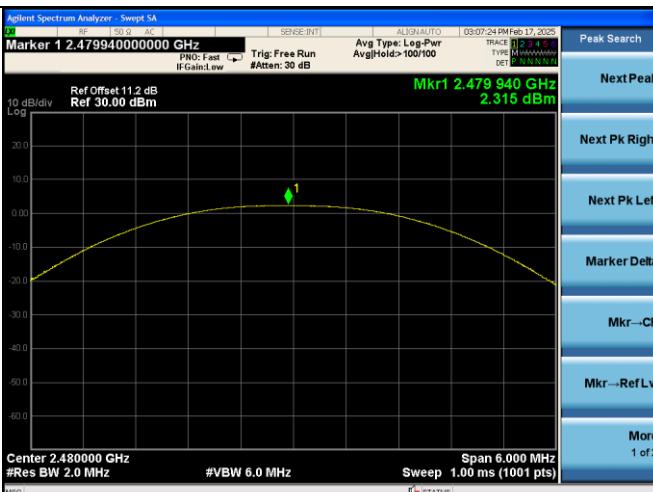

—

1

8. BAND EDGE COMPLIANCE TEST

8.1. Limit

All the lower and upper band-edges emissions appearing within 2310MHz to 2390MHz and 2483.5MHz to 2500MHz restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions outside operation frequency band 2400MHz to 2483.5MHz shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

8.2. Test Produce

Use the test method described in ANSI C63.10 clause 6.10:

For upper band emissions that are up to two bandwidths(2MHz) away (2483.5MHz to 2485.5MHz) from the band-edge use below produce:

1. Choose a spectrum analyzer span that encompasses both the peak of the fundamental emission and the band-edge emission under investigation. Set the analyzer RBW to 100KHz and with a video bandwidth 300KHz. Record the peak levels of the fundamental emission and the relEpoch band-edge emission, Observe the stored trace and measure the amplitude delta between the peak of the fundamental and the peak of the band-edge emission. This is not a field strength measurement, it is only a relative measurement to determine the amount by which the emission drops at the band edge relative to the highest fundamental emission level.
2. Subtract the delta measured in step (1) from the maximum field strengths measured in clause 4 .The resultant field strengths are then used to determine band-edge compliance as required by Section 15.205

For emissions above two bandwidths away from the band-edge use below produce:

1. The EUT is placed on a turntable, which is 0.8m above the ground plane and worked at highest radiated power.
2. The turntable was rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upperband-edges of the emission:
 - (a) PEAK: RBW=1MHz ;VBW=3MHz, PK detector, Sweep=AUTO
 - (b) This is pulse Modulation device a duty cycle factor was used to calculate average level based measured peak level.


8.3. Test Results

Pass (The testing data was attached in the next pages.)

Note: If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit.

1Mbps:

Data: 63 File: F:\2025 Report\A\Acer\A1Z2502038-FCC-BT.EM6 (66)

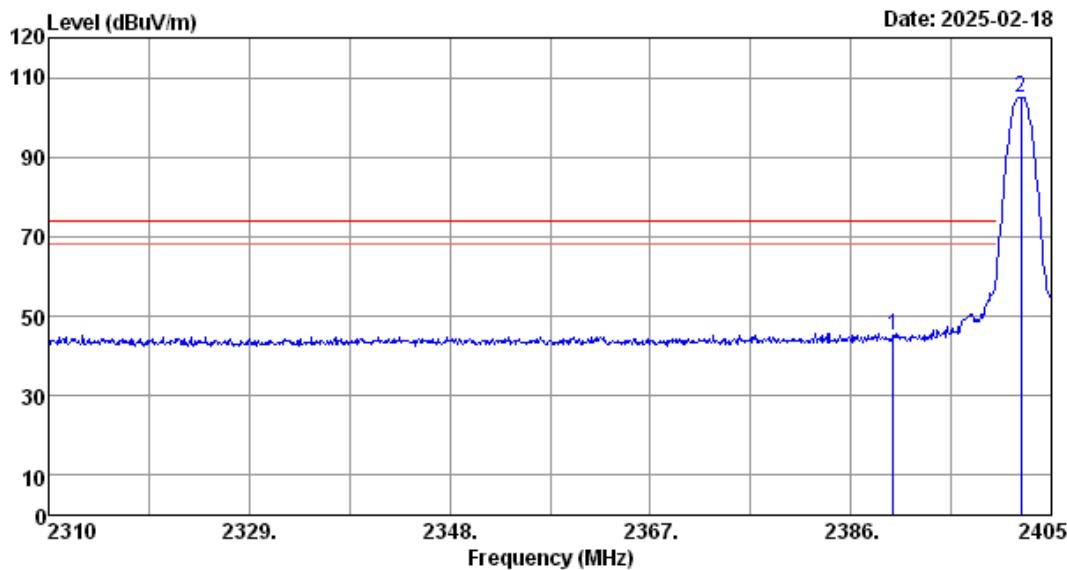

Site no. : 3m Chamber

Data no. : 63

Dis. / Ant. : 3m 2024 MCTD1209-3006

Ant. pol. : HORIZONTAL

Limit : FCC PART 15C PEAK

Engineer : Epoch

Env. / Ins. : 23.2°C/52.6%


Test Mode : BLE 1M 2402MHz TX Mode AINT1

No.	Freq.	Ant. Factor	Cable Loss	AMP Factor	Reading	Emission Level	Limits	Limits	Margin	Remark
	(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2390.00	27.64	5.20	31.70	44.14	45.28	74.00	28.72	Peak	
2	2402.15	27.70	5.22	31.70	103.81	105.03	-----	-----	Peak	

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
-Amp factor(Peak)
2. The emission levels that are 20dB below the official
limit are not reported

Data: 64 File: F:\2025 Report\A\Acer\A1Z2502038-FCC-BT.EM6 (66)

Date: 2025-02-18

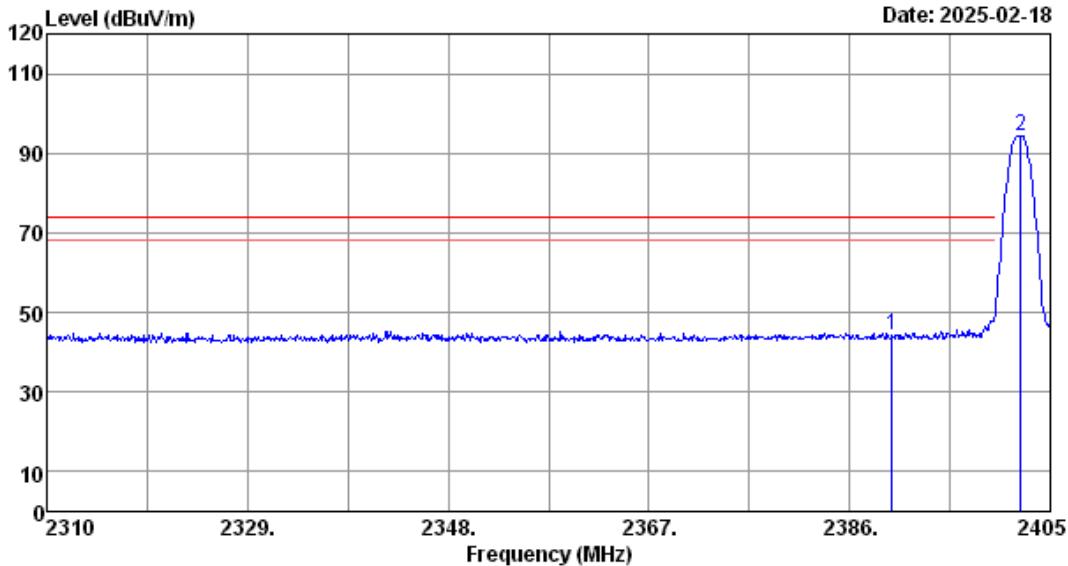


Site no. : 3m Chamber Data no. : 64
Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK Engineer : Epoch
Env. / Ins. : 23.2°C/52.6%
Test Mode : BLE1M 2402MHz TX Mode ANT1

No.	Freq. (MHz)	Ant.	Cable	AMP	Emission			Margin	
		Factor (dB/m)	Loss (dB)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Limits (dBuV/m)	Remark
1	2390.00	27.64	5.20	31.70	43.18	44.32	74.00	29.68	Peak
2	2402.25	27.70	5.22	31.70	93.22	94.44	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
-Amp factor(Peak)
2. The emission levels that are 20dB below the official
limit are not reported

Data: 65 File: F:\2025 Report\A\Acer\A1Z2502038-FCC-BT.EM6 (66)

Date: 2025-02-18

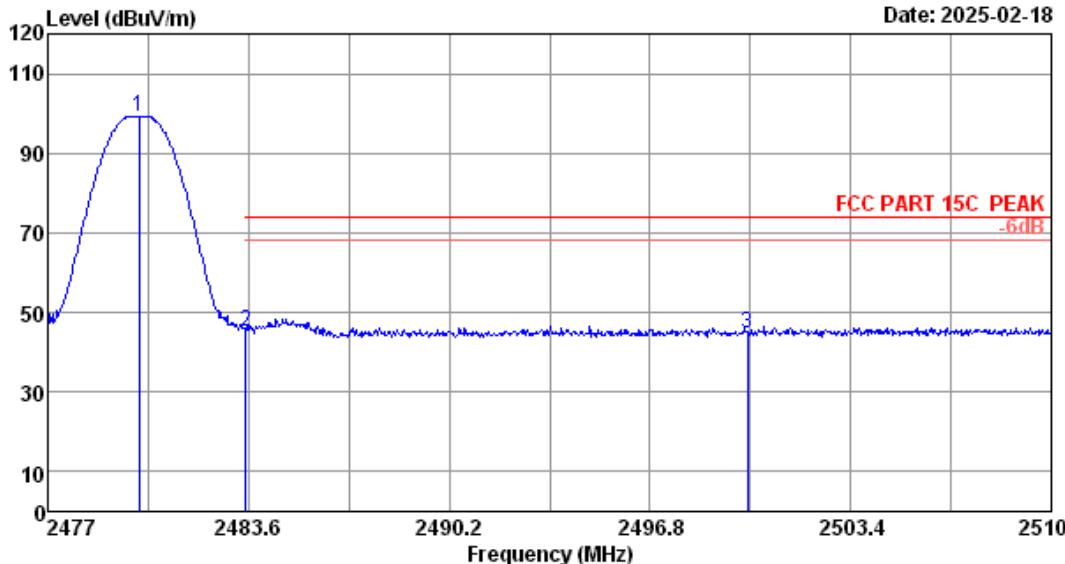


Site no. : 3m Chamber Data no. : 65
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : BLE1M 2480MHz TX Mode ANT1

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Emission			Margin		Remark
					Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Limits (dBuV/m)		
1	2480.00	27.82	5.30	31.66	97.87	99.33	-----	-----	Peak	
2	2483.50	27.83	5.30	31.66	43.87	45.34	74.00	28.66	Peak	
3	2500.00	27.90	5.32	31.65	43.25	44.82	74.00	29.18	Peak	

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

Data: 66 File: F:\2025 Report\A\Acer\A1Z2502038-FCC-BT.EM6 (66)

Date: 2025-03-10

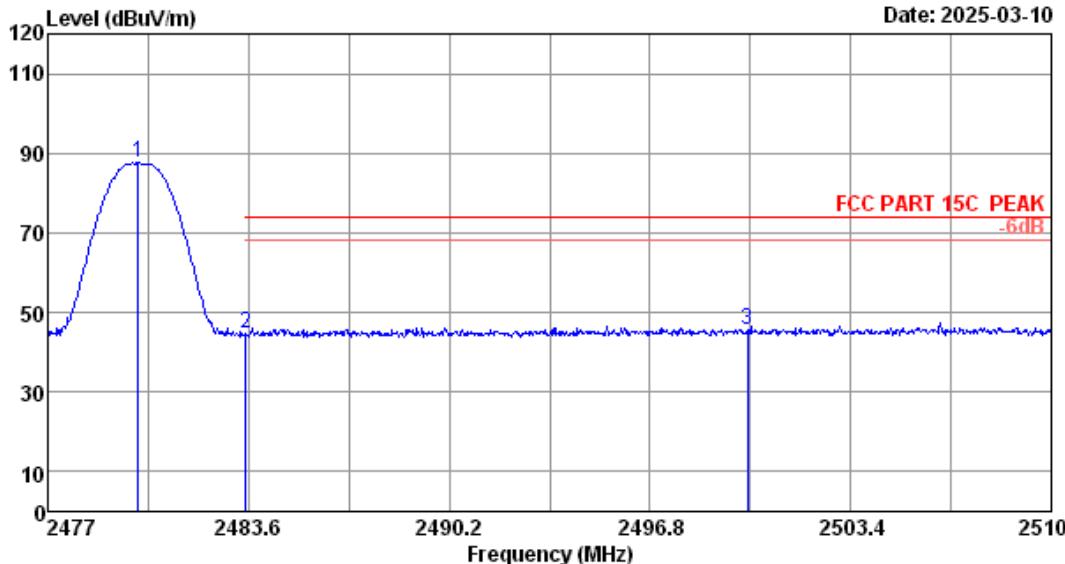

Site no. : 3m Chamber Data no. : 66
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : BLE1M 2480MHz TX Mode ANT1

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Emission			Margin (dB)	Remark
					Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)		
1	2479.97	27.82	5.30	31.66	86.06	87.52	-----	-----	Peak
2	2483.50	27.83	5.30	31.66	43.08	44.55	74.00	29.45	Peak
3	2500.00	27.90	5.32	31.65	43.98	45.55	74.00	28.45	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

9. POWER SPECTRAL DENSITY TEST

9.1. Block Diagram of Test Setup

Please reference to section 2.4.

9.2. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.

9.3. Test Procedure

Use the test method described in ANSI C63.10 clause 11.10.2:


- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 times the DTS bandwidth.
- c) Set the RBW to $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d) Set the VBW $\geq [3 \times \text{RBW}]$.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.
- j) If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat.


9.4. Test Results

EUT: Notebook Computer		
M/N: N24G4		
Date: 2025-03-06	Pressure: 101.3±1.0 kpa	Humidity: 52.4±3.0%
Tested by: Epoch	Test Site: RF site	Temperature: 23.1±0.6°C

1Mbps:

Test Mode	Frequency (MHz)	Power Spectral Density (dBm/3KHz)	Limit (dBm/MHz)
GFSK	2402	-13.655	8
	2440	-14.540	8
	2480	-13.657	8
Conclusion : PASS			

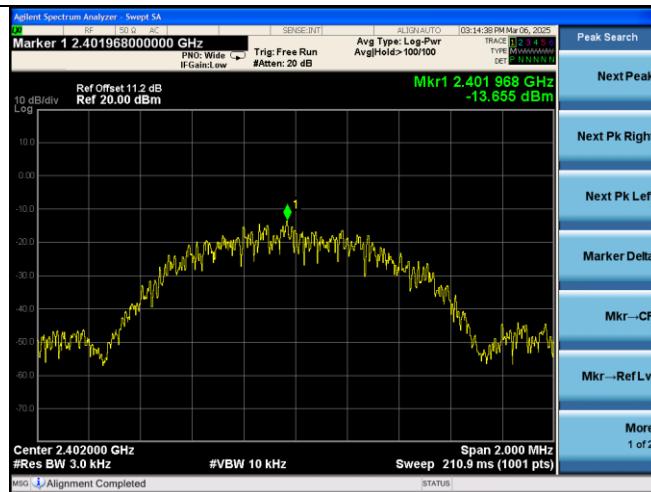1Mbps:
GFSK
2402MHz

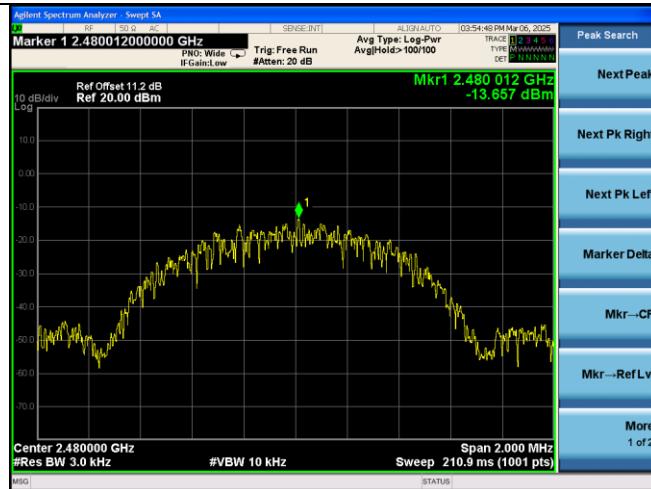2440MHz

2480MHz


10. ANTENNA REQUIREMENT

10.1. STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

10.2. ANTENNA CONNECTED CONSTRUCTION

The antennas used for this product are PIFA Antenna that no antenna other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is 2.43dBi.

11. DEVIATION TO TEST SPECIFICATIONS

[NONE]

..... **THE END**