


FCC RF Test Report

APPLICANT : Acer Incorporated
EQUIPMENT : Smart HandHeld _ Android
BRAND NAME : Acer
MODEL NAME : S100
FCC ID : HLZSHS100CE
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : Digital Spread Spectrum (DSS)

The product was received on Sep. 22, 2009 and completely tested on Apr. 21, 2010. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.4-2003 and shown the compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:



Roy Wu / Manager



SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.



TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Feature of Equipment Under Test	5
1.4 Testing Site	6
1.5 Applied Standards	6
1.6 Ancillary Equipment List	6
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	7
2.1 RF Output Power	7
2.2 Test Mode	8
2.3 Connection Diagram of Test System	9
2.4 RF Utility	9
3 TEST RESULT	10
3.1 Number of Channel Measurement	10
3.2 20dB Bandwidth Measurement	12
3.3 Hopping Channel Separation Measurement	19
3.4 Dwell Time Measurement	22
3.5 Peak Output Power Measurement	24
3.6 Band Edges Measurement	27
3.7 Spurious Emission Measurement	30
3.8 AC Conducted Emission Measurement	34
3.9 Radiated Emission Measurement	38
3.10 Antenna Requirements	47
4 LIST OF MEASURING EQUIPMENT	48
5 UNCERTAINTY OF EVALUATION	49
6 CERTIFICATION OF TAF ACCREDITATION	51
APPENDIX A. PHOTOGRAPHS OF EUT	
APPENDIX B. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR982009-10A	Rev. 01	Initial issue of report	Apr. 26, 2010

SUMMARY OF TEST RESULT

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(1)	A8.4(2)	Number of Channels	$\geq 15\text{Chs}$	Pass	
3.2	15.247(a)(1)	A8.1(a)	20dB Bandwidth	NA	Pass	-
3.3	15.247(a)(1)	A8.1(b)	Channel Separation	$\geq 2/3$ of 20dB BW	Pass	-
3.4	15.247(a)(1)	A8.1(d)	Dwell Time of Each Channel	$\leq 0.4\text{sec}$ in 31.6sec period	Pass	-
3.5	15.247(b)(1)	A8.1(b)	Peak Output Power	$\leq 1\text{W}$	Pass	-
3.6	15.247(d)	A8.5	Frequency Band Edges	$\leq 20\text{dBc}$	Pass	-
3.7	15.247(d)	A8.5	Spurious Emission	$< 20\text{ dBc}$	Pass	-
3.8	15.207	Gen 7.2.2	AC Conducted Emission	15.207(a)	Pass	Under limit 15.5 dB at 0.51 MHz
3.9	15.247(d)	A8.5	Transmitter Radiated Emission	15.209(a) & 15.247(d)	Pass	Under limit 4.84 dB at 2483.50 MHz
3.10	15.203 & 15.247(b)	A8.4	Antenna Requirement	N/A	Pass	-

1 General Description

1.1 Applicant

Acer Incorporated

8F., No. 88, Sec. 1, Hsin Tai Wu Rd., Hsichih, Taipei Hsien 221, Taiwan, R.O.C.

1.2 Manufacturer

Compal Communication (Nanjing)

Nanjing Jingning Export Processing Zone (South Area), No. 68-2, Suyuan Street

1.3 Feature of Equipment Under Test

Product Feature & Specification	
Equipment	Smart HandHeld _ Android
Brand Name	Acer
Model Name	S100
FCC ID	HLZSHS100CE
Tx/Rx Frequency Range	2400 MHz ~ 2483.5 MHz
Number of Channels	79
Carrier Frequency of Each Channel	2402+n*1 MHz; n=0~78
Channel Spacing	1 MHz
Maximum Output Power to Antenna	Bluetooth (1Mbps) : 2.59 dBm (1.82 mW) Bluetooth EDR (2Mbps) : 3.69 dBm (2.34 mW) Bluetooth EDR (3Mbps) : 3.93 dBm (2.47 mW)
Antenna Type	PIFA Antenna with gain 0.15 dBi
HW Version	V1.0
SW Version	Modem : A1-02.01.03 OS : Acer_Liquid_2.000.16_EMEA_GEN1
Type of Modulation	Bluetooth (1Mbps) : GFSK Bluetooth EDR (2Mbps) : π /4-DQPSK Bluetooth EDR (3Mbps) : 8-DPSK
EUT Stage	Identical Prototype

Remark:

1. For other wireless features of this EUT, test report will be issued separately.
2. This test report recorded only product characteristics and test results of Digital Spread Spectrum (DSS).
3. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Testing Site

Test Site	SPORTON INTERNATIONAL INC.		
Test Site Location	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL: +886-3-3273456 / FAX: +886-3-3284978		
Test Site No.	Sporton Site No.		FCC/IC Registration No.
	CO05-HY	03CH06-HY ; 03CH07-HY	TW1022/4086B-1

1.5 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC Public Notice DA 00-705
- ♦ ANSI C63.4-2003
- ♦ IC RSS-210 Issue 7

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B (DoC), recorded in a separate test report.

1.6 Ancillary Equipment List

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2.	GPS Station	T&E	GS-50	N/A	N/A	Unshielded, 1.8 m
3.	WLAN AP	D-Link	DIR-628	KA2DIR628A2	N/A	Unshielded, 1.8 m
4.	Bluetooth Earphone	Nokia	BH-102	PYAHS-107W	N/A	N/A
5.	Notebook	DELL	Vostro 1510	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
6.	Bluetooth Base Station	R&S	CBT32	N/A	N/A	Unshielded, 1.8 m

2 Test Configuration of Equipment Under Test

2.1 RF Output Power

Preliminary tests were performed in different data rate and recorded the RF output power in the following table:

Channel	Frequency	Bluetooth RF Output Power		
		Data Rate / Modulation		
		GFSK	$\pi/4$ -DQPSK	8-DPSK
		1Mbps	2Mbps	3Mbps
Ch00	2402MHz	2.59 dBm	3.69 dBm	3.93 dBm
Ch39	2441MHz	1.78 dBm	3.04 dBm	3.43 dBm
Ch78	2480MHz	1.11 dBm	2.57 dBm	2.90 dBm

Remark:

1. The data rate was set in 3Mbps for all the test items due to the highest RF output power.
2. The EUT is programmed to transmit signals continuously for all testing.

2.2 Test Mode

The EUT has been associated with peripherals pursuant to ANSI C63.4-2003 and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction (150 kHz to 30 MHz), radiation (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).


Pre-scanned tests were conducted to determine the final configuration from all possible combinations.

The following tables are showing the test modes as the worst cases and recorded in this report.


Test Cases			
Test Item	Data Rate / Modulation		
	Bluetooth 1Mbps GFSK	Bluetooth EDR 2Mbps π /4-DQPSK	Bluetooth EDR 3Mbps 8-DPSK
Conducted TCs	Mode 1: CH00_2402 MHz Mode 2: CH39_2441 MHz Mode 3: CH78_2480 MHz	Mode 4: CH00_2402 MHz Mode 5: CH39_2441 MHz Mode 6: CH78_2480 MHz	Mode 7: CH00_2402 MHz Mode 8: CH39_2441 MHz Mode 9: CH78_2480 MHz
Radiated TCs	N/A	N/A	Mode 1: CH00_2402 MHz + Adapter 1 + Earphone 1 Mode 2: CH39_2441 MHz + Adapter 1 + Earphone 1 Mode 3: CH78_2480 MHz + Adapter 1 + Earphone 1
AC Conducted Emission	Mode 1 : GSM850 Idle + Bluetooth Link + WLAN Link + GPS Rx + Earphone 1 + MPEG4 + Adapter 2 Mode 2 : WCDMA Band V Idle + Bluetooth Link + WLAN Link + GPS Rx + Earphone 2 + Camera + Adapter 1		
Remark:			
1. For radiated TCs, the data rate was set in 3Mbps due to the highest RF output power; only the data of these modes was reported.			
2. For conducted emission, the worst case is mode 2; only the test data of this mode was reported.			

2.3 Connection Diagram of Test System

<Conducted Emission>

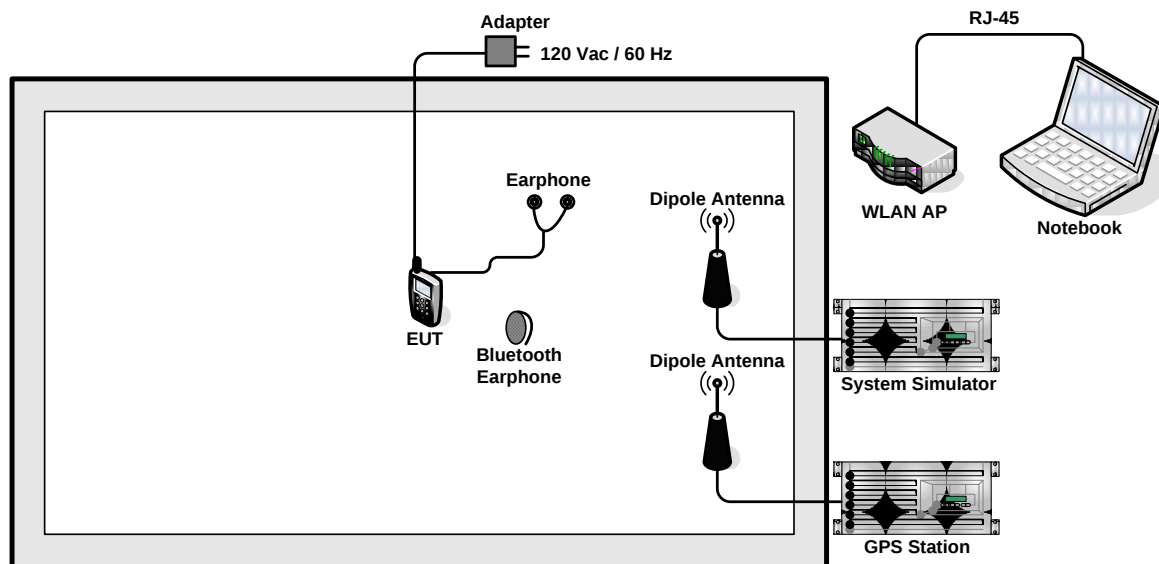

<Radiated Emission>

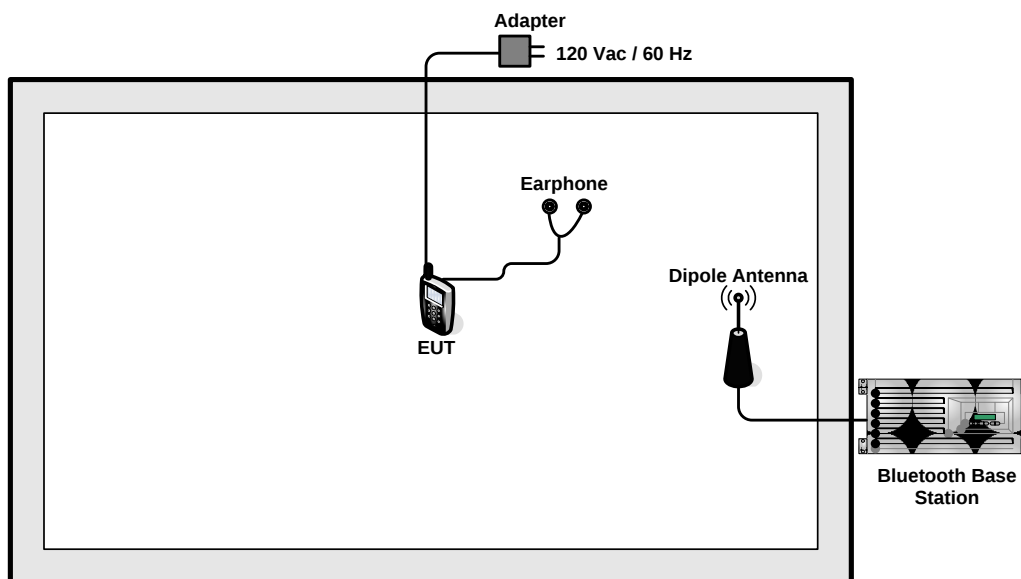

2.4 RF Utility

For Bluetooth function, the RF utility, "BT RF Test" was installed in EUT which was programmed in order to make the EUT into the engineering modes to contact with Bluetooth base station for transmitting and receiving signals continuously.

3 Test Result

3.1 Number of Channel Measurement

3.1.1 Limits of Number of Hopping Frequency

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.


3.1.2 Measuring Instruments

See list of measuring instruments of this test report.

3.1.3 Test Procedure

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. The modulation types of EUT are irrelevant to number of hopping channels deviation.
4. The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:
Span = the frequency band of operation; $RBW \geq 1\%$ of the span; $VBW \geq RBW$; Sweep = auto;
Detector function = peak; Trace = max hold.
5. The number of hopping frequency used is defined as the device has the numbers of total channel.


3.1.4 Test Setup

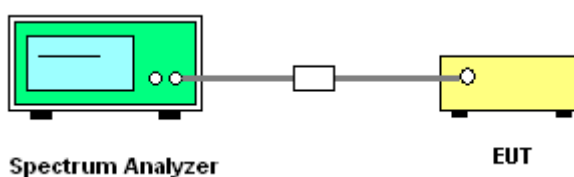

3.1.5 Test Result of Number of Hopping Frequency

Test Mode :	Mode 7~9	Temperature :	27.4℃
Test Engineer :	Eric Huang	Relative Humidity :	49%
Number of Hopping Channels (Channel)		Limits (Channel)	Pass/Fail
79		> 15	Pass

Number of Hopping Channel Plot on Channel 00 - 78

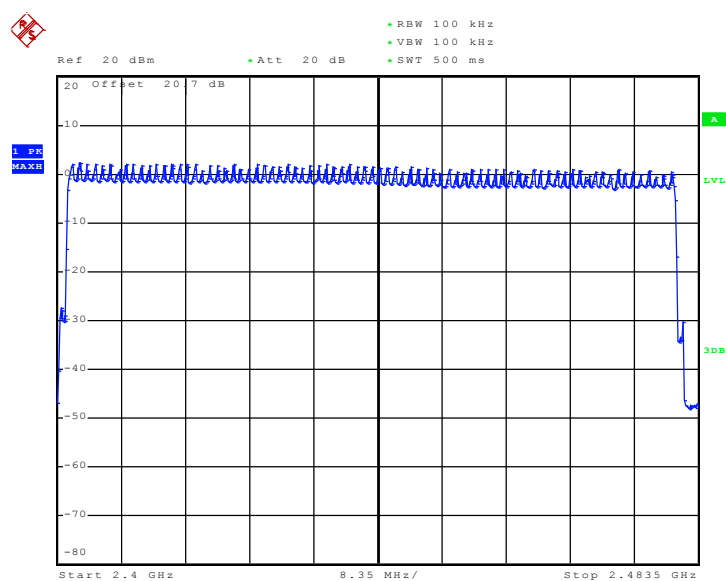

Date: 31.AUG.2009 15:33:32

3.2 20dB Bandwidth Measurement

3.2.1 Limit of 20dB Bandwidth

N/A


3.2.2 Measuring Instruments

See list of measuring instruments of this test report.

3.2.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. The EUT should be transmitting at its maximum data rate as the worst cases.
4. Use the following spectrum analyzer settings:
Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel;
RBW $\geq$ 1% of the 20 dB bandwidth; VBW $\geq$ RBW; Sweep = auto; Detector function = peak;
Trace = max hold.
5. The marker-delta reading at this point is the 20 dB bandwidth of the emission.

3.2.4 Test Setup

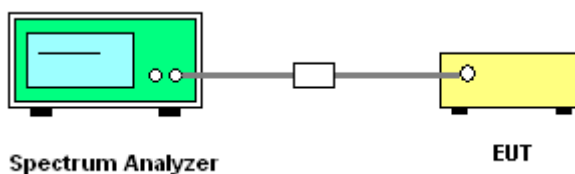


3.2.5 Test Result of 20dB Bandwidth

Test Mode :	Mode 1, 2, 3	Temperature :	27.4°C
Test Engineer :	Eric Huang	Relative Humidity :	49%

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	0.939
39	2441	1.005
78	2480	1.005


20 dB Bandwidth Plot on Channel 00

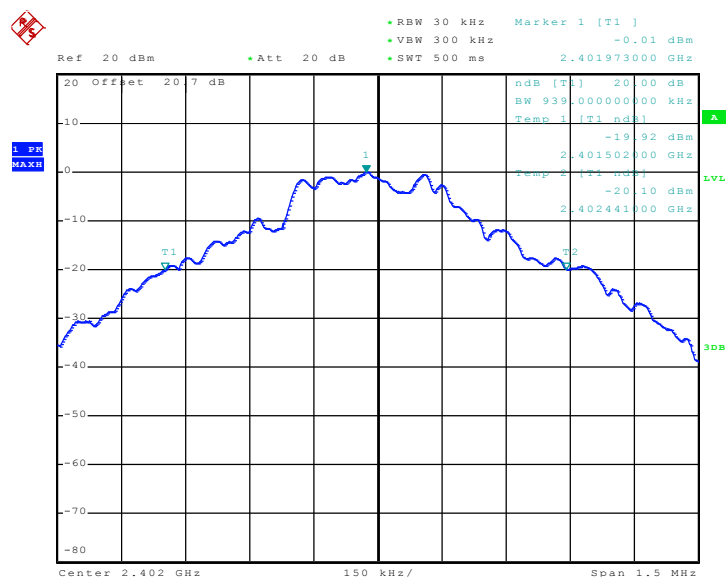

Date: 31.AUG.2009 15:39:56




20 dB Bandwidth Plot on Channel 39

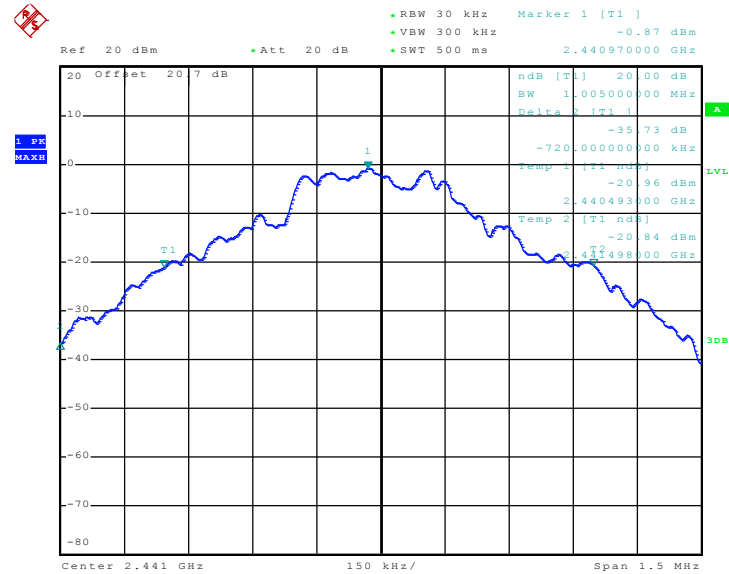

Date: 31.AUG.2009 15:16:53


20 dB Bandwidth Plot on Channel 78

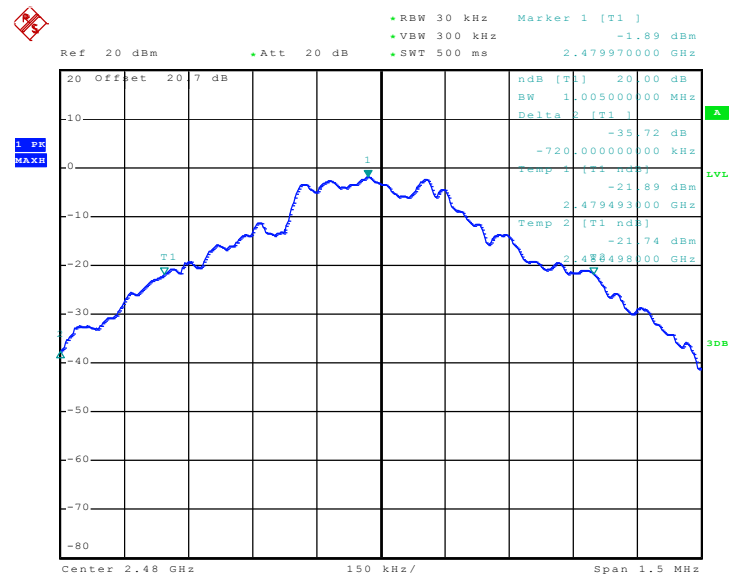

Date: 31.AUG.2009 15:17:08

Test Mode :	Mode 4, 5, 6	Temperature :	27.4°C
Test Engineer :	Eric Huang	Relative Humidity :	49%


Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	1.300
39	2441	1.300
78	2480	1.304

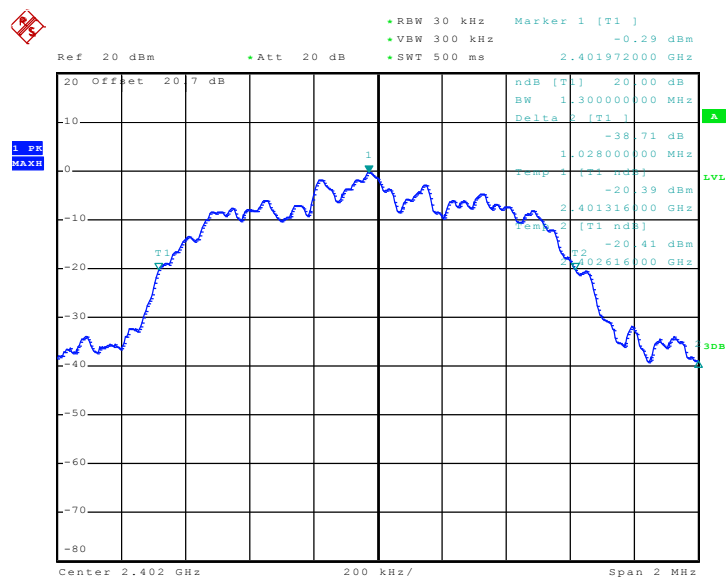20 dB Bandwidth Plot on Channel 00


Date: 31.AUG.2009 15:17:39




20 dB Bandwidth Plot on Channel 39

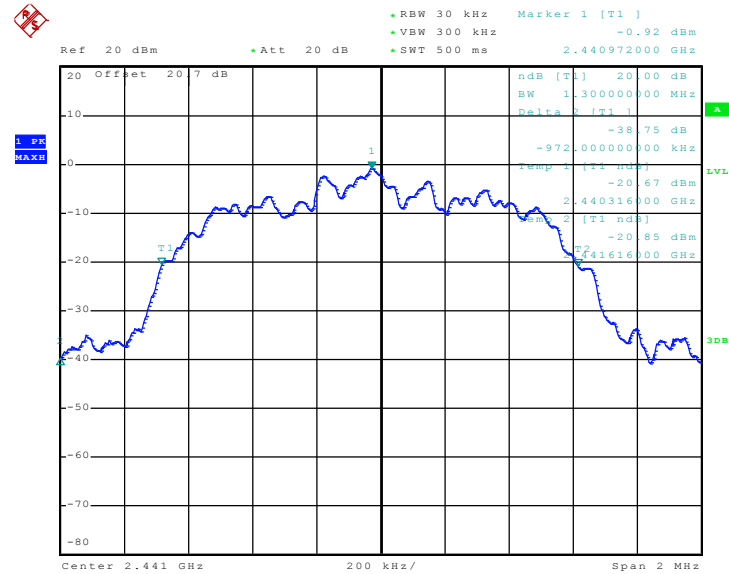

Date: 31.AUG.2009 15:18:08


20 dB Bandwidth Plot on Channel 78

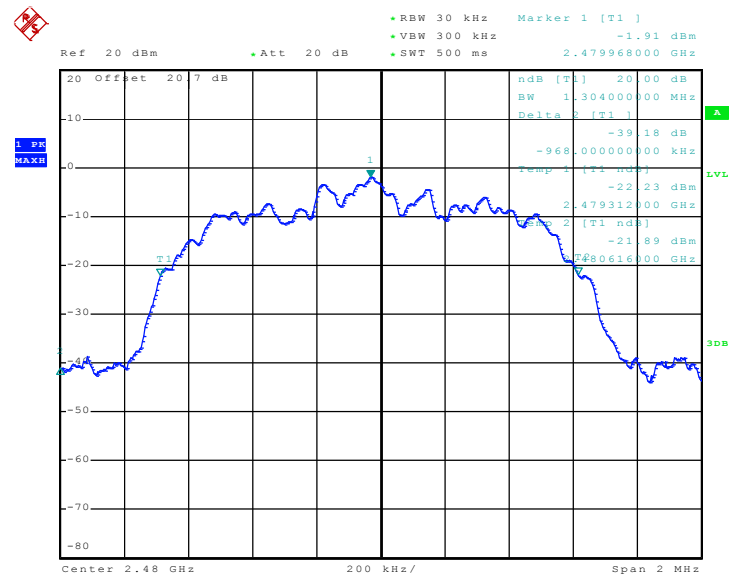

Date: 31.AUG.2009 15:18:25

Test Mode :	Mode 7, 8, 9	Temperature :	27.4°C
Test Engineer :	Eric Huang	Relative Humidity :	49%


Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	1.324
39	2441	1.324
78	2480	1.324

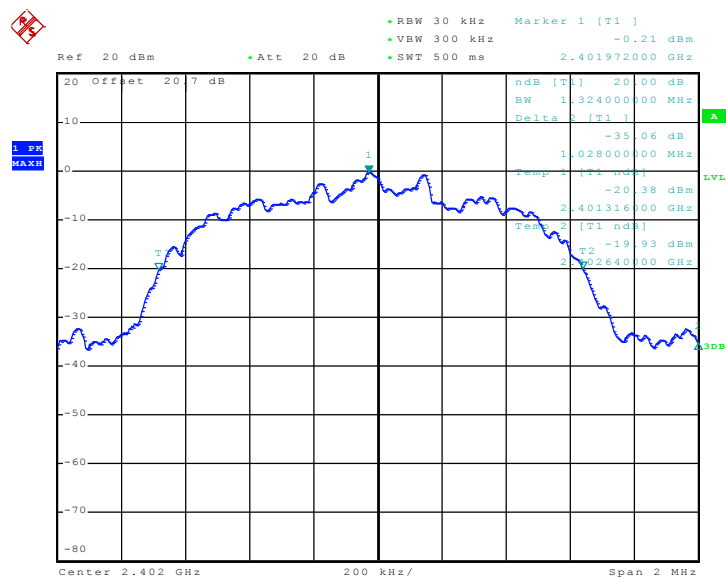20 dB Bandwidth Plot on Channel 00


Date: 31.AUG.2009 15:19:12




20 dB Bandwidth Plot on Channel 39

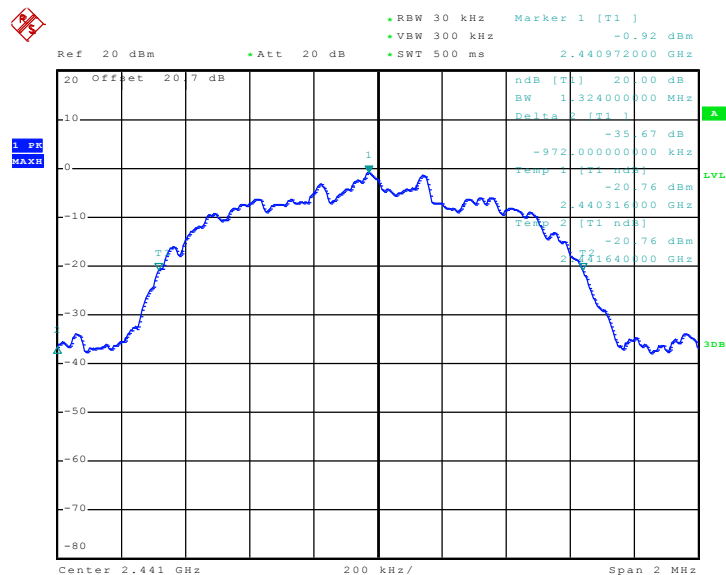

Date: 31.AUG.2009 15:19:35

20 dB Bandwidth Plot on Channel 78

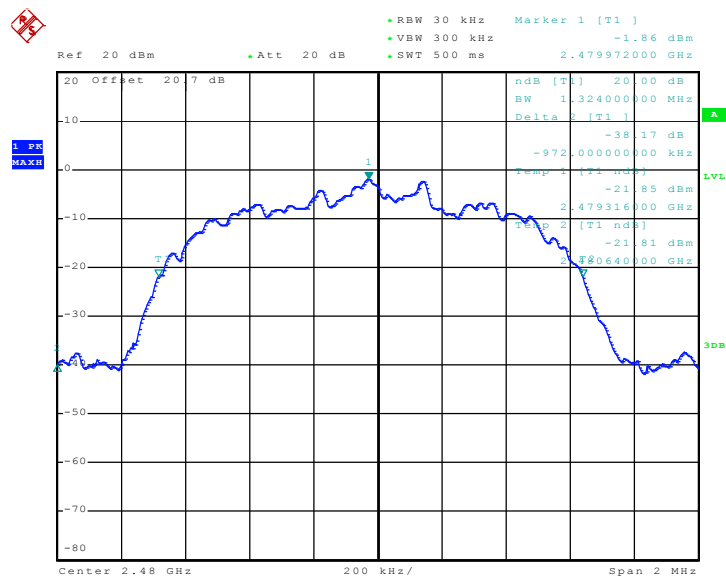

Date: 31.AUG.2009 15:19:59

3.3 Hopping Channel Separation Measurement

3.3.1 Limit of Hopping Channel Separation

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.


3.3.2 Measuring Instruments

See list of measuring instruments of this test report.

3.3.3 Test Procedures

1. Please refer FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. The EUT should be transmitting at its maximum data rate as the worst cases.
4. Use the following spectrum analyzer settings:
Span = wide enough to capture the peaks of two adjacent channels; $RBW \geq 1\%$ of the span;
 $VBW \geq RBW$; Sweep = auto; Detector function = peak; Trace = max hold.
5. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

3.3.4 Test Setup

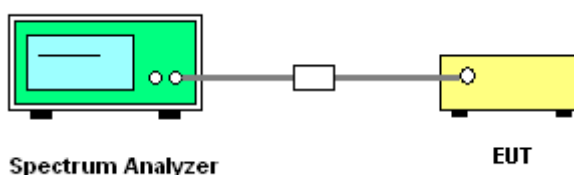


3.3.5 Test Result of Hopping Channel Separation

Test Mode :	Mode 7, 8, 9	Temperature :	27.4°C
Test Engineer :	Eric Huang	Relative Humidity :	49%

Channel	Frequency (MHz)	Frequency Separation (MHz)	(2/3 of 20dB BW) Limits (MHz)	Pass/Fail
00	2402	1.000	0.883	Pass
39	2441	1.000	0.883	Pass
78	2480	1.000	0.883	Pass


Channel Separation Plot on Channel 00 - 01

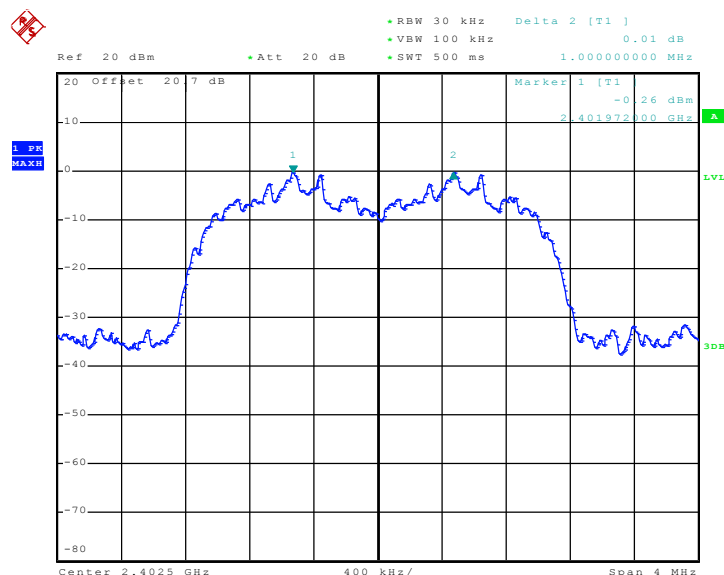

Date: 31.AUG.2009 15:24:35




Channel Separation Plot on Channel 39 - 40

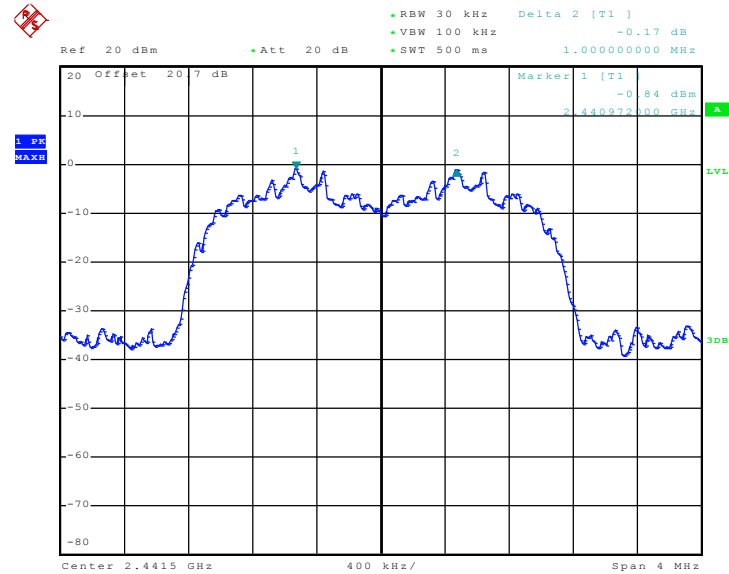

Date: 31.AUG.2009 15:25:12

Channel Separation Plot on Channel 77 - 78

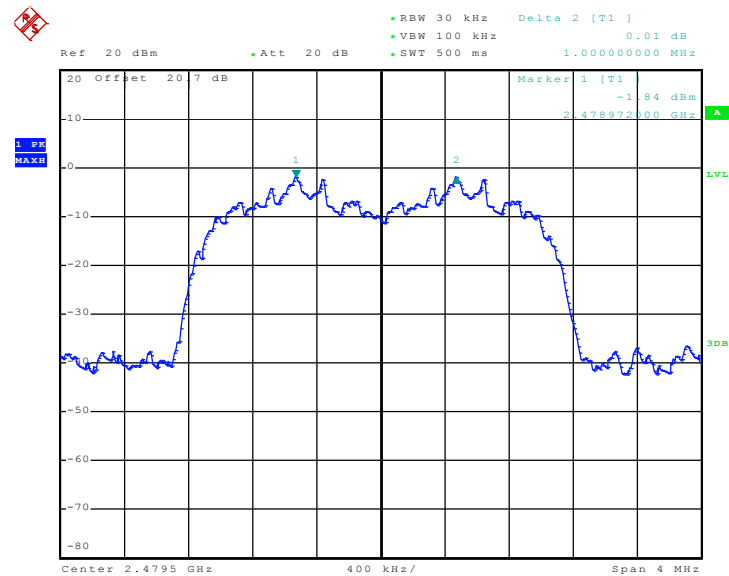

Date: 31.AUG.2009 15:25:46

3.4 Dwell Time Measurement

3.4.1 Limit of Dwell Time

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.


3.4.2 Measuring Instruments

See list of measuring instruments of this test report.

3.4.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. The EUT should be transmitting at its maximum data rate as the worst cases.
4. The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:
Span = zero span, centered on a hopping channel; RBW = 1 MHz; VBW $\geq$ RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold.
5. Use the marker-delta function to calculate the dwell time.

3.4.4 Test Setup

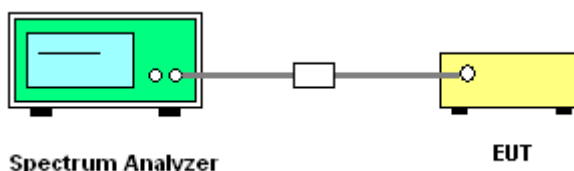


3.4.5 Test Result of Dwell Time

Test Mode :	Mode 8	Temperature :	27.4°C
Test Engineer :	Eric Huang	Relative Humidity :	49%


Package Mode	Average Hopping Channel	Package Transfer Time (usec)	Dwell Time (sec)	Limits (sec)	Pass/Fail
3DH5	3.60	3088.00	0.35	0.4	Pass

Remark:

1. Dwell Time=79(channels) x 0.4(s) x average hopping channel x package transfer time
2. 79 channels come from the Hopping Channel number.
3. Average Hopping Channel = hops/sweep time
4. t: Package Transfer Time(us)

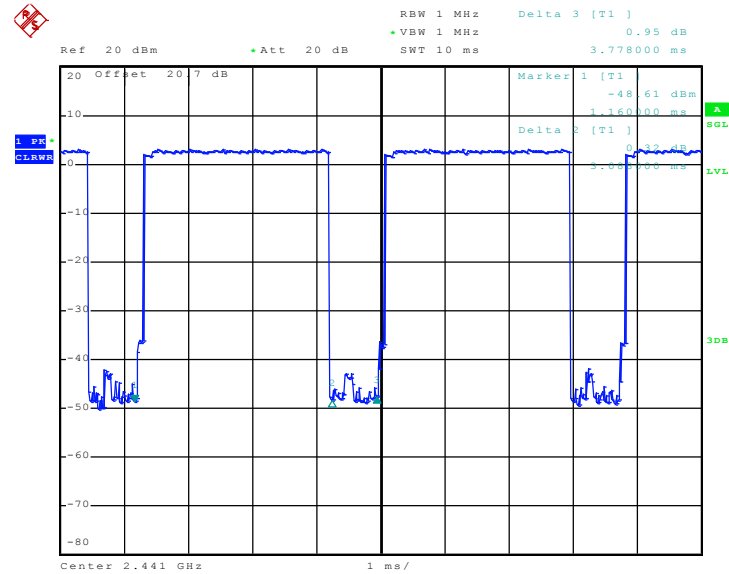3DH5 Dwell Time (One Pulse) Plot on Channel 39


Date: 28.AUG.2009 09:58:54

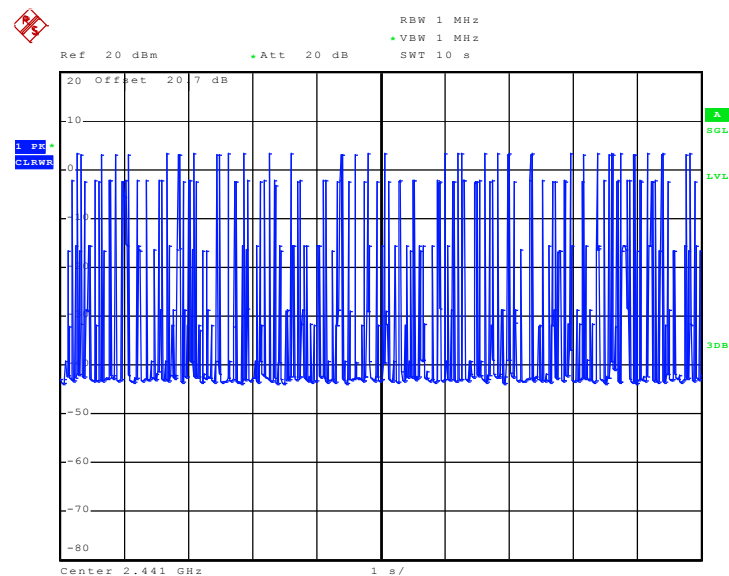3DH5 Dwell Time (Count Pulses) Plot on Channel 39


Date: 31.AUG.2009 15:34:15

3.5 Peak Output Power Measurement

3.5.1 Limit of Peak Output Power

Frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels: 1W (30 dBm).


3.5.2 Measuring Instruments

See list of measuring instruments of this test report.

3.5.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.

3.5.4 Test Setup

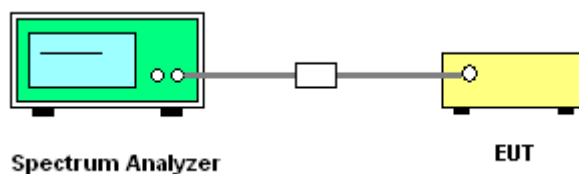


3.5.5 Test Result of Peak Output Power

Test Mode :	Mode 7, 8, 9	Temperature :	27.4°C
Test Engineer :	Eric Huang	Relative Humidity :	49%

Channel	Frequency (MHz)	RF Power (dBm)		
		8-DPSK	Max. Limits (dBm)	Pass/Fail
		3 Mbps		
00	2402	3.93	30	Pass
39	2441	3.43	30	Pass
78	2480	2.90	30	Pass




Peak Output Power Plot on Channel 00

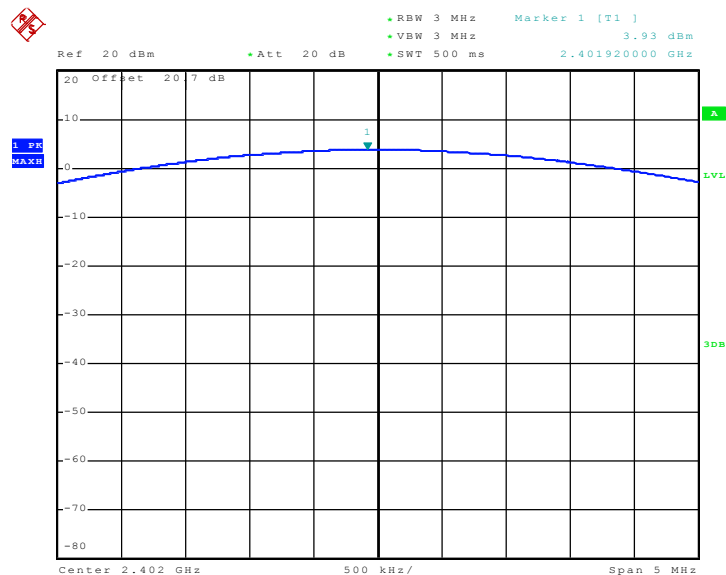

Date: 28.AUG.2009 15:13:03


Peak Output Power Plot on Channel 39

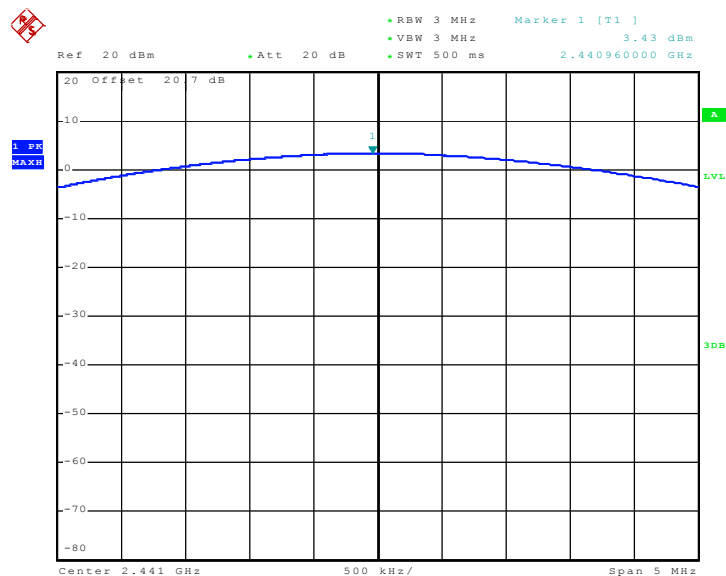

Date: 28.AUG.2009 15:15:29



Peak Output Power Plot on Channel 78

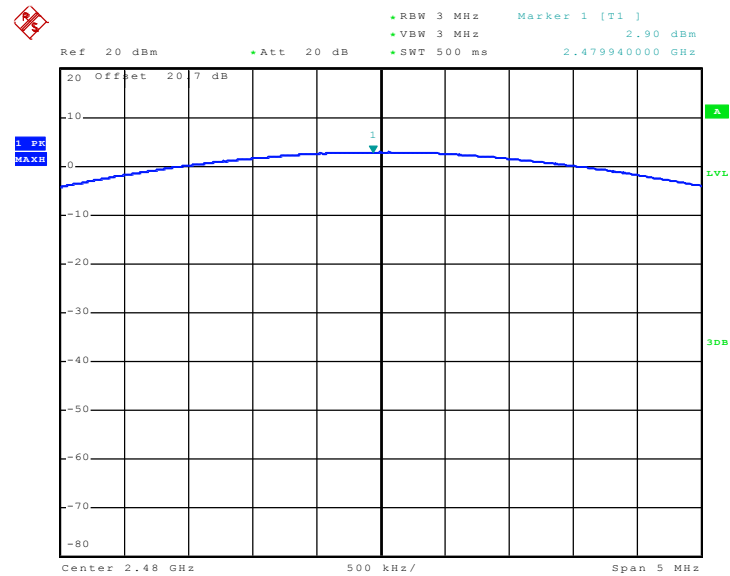

Date: 28.AUG.2009 15:24:58

3.6 Band Edges Measurement

3.6.1 Limit of Band Edges

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.


3.6.2 Measuring Instruments

See list of measuring instruments of this test report.

3.6.3 Test Procedures

1. The testing follows the guidelines in ANSI C63.4-2003 and FCC Public Notice DA 00-705 Measurement Guidelines.
2. RF antenna conducted test: Set RBW = 1MHz, Video bandwidth (VBW) $\geq$ RBW. Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 1MHz RBW. Note: If the device complies with the use of power option 2 the attenuation under this paragraph shall be 30 dB instead of 20 dB.
3. Radiated emission test: Applies to band edge emissions that fall in the restricted bands listed in FCC Section 15.205. The maximum permitted average field strength is listed in FCC Section 15.209. A pre-amp is necessary for this measurement. For measurements above 1 GHz, set RBW = 1MHz, VBW = 1MHz, Sweep: Auto for Peak; set RBW = 1MHz, VBW = 10 Hz, Sweep: Auto for Average. If the emission is pulsed, modify the unit for continuous operation; use the settings shown above, then correct the reading by subtracting the peak-average correction factor, derived from the appropriate duty cycle calculation. See FCC Section 15.35(b) and (c).
4. In case the emission is fail due to the used RBW / VBW is too wide, marker-delta method of FCC Public Notice DA 00-705 will be followed.

3.6.4 Test Setup

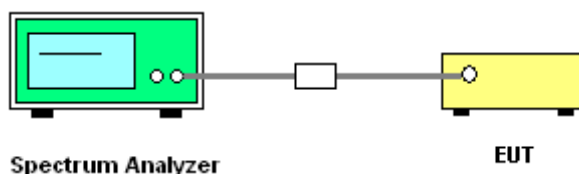

3.6.5 Test Result of Radiated Band Edges

Test Mode :	Mode 1	Temperature :	25~26°C
Test Channel :	00	Relative Humidity :	39~40%
		Test Engineer :	Cona Huang

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2390	45.76	-28.24	74	44.37	31.86	3.92	34.39	200	182	Peak
2390	32.32	-21.68	54	30.93	31.86	3.92	34.39	200	182	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2356	44.27	-29.73	74	43.01	31.81	3.86	34.41	100	57	Peak
2356	32.1	-21.9	54	30.84	31.81	3.86	34.41	100	57	Average

Test Mode :	Mode 3	Temperature :	25~26°C
Test Channel :	78	Relative Humidity :	39~40%
		Test Engineer :	Kay Wu


ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.5	61.57	-12.43	74	59.91	31.98	4.05	34.37	200	182	Peak
2483.5	49.16	-4.84	54	47.5	31.98	4.05	34.37	200	182	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.5	55.16	-18.84	74	53.5	31.98	4.05	34.37	100	57	Peak
2483.5	45.46	-8.54	54	43.8	31.98	4.05	34.37	100	57	Average

3.6.6 Test Result of Conducted Band Edges


Test Mode :	Mode 7 and 9	Temperature :	27.4°C
Test Channel :	00 and 78	Relative Humidity :	49%
		Test Engineer :	Eric Huang

Low Band Edge Plot on Channel 00

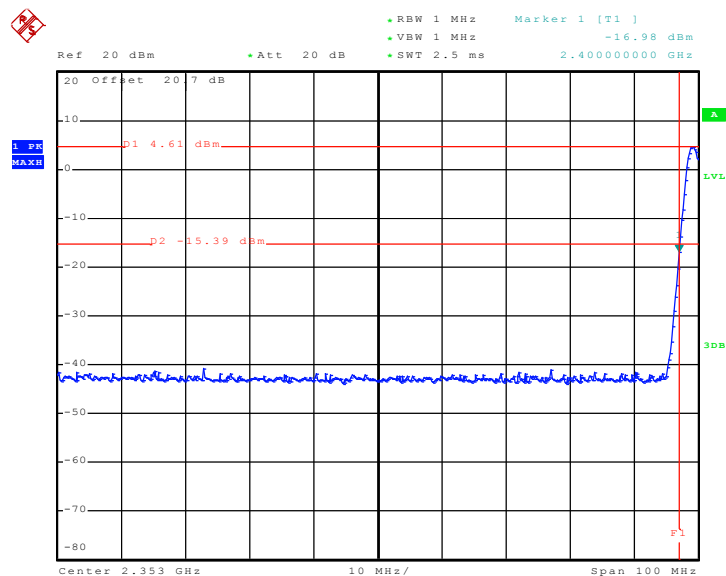

Date: 12.OCT.2009 15:10:27

High Band Edge Plot on Channel 78

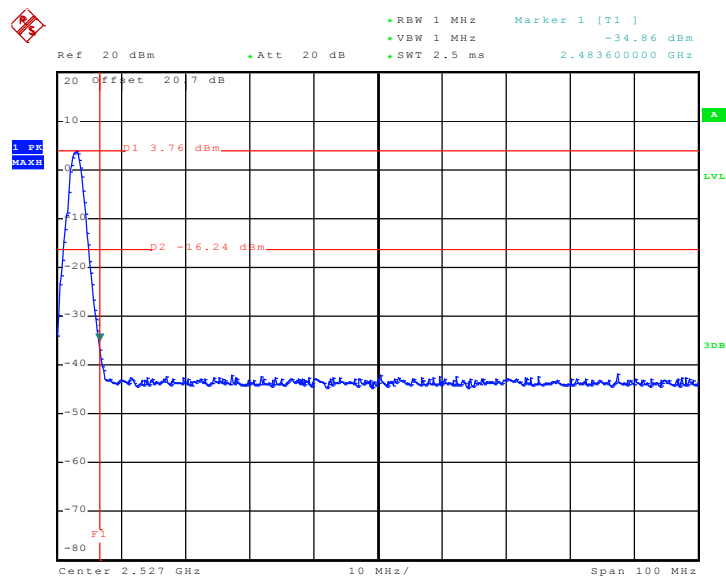

Date: 12.OCT.2009 15:12:27

3.7 Spurious Emission Measurement

3.7.1 Limit of Spurious Emission Measurement

All harmonics/spurs must be at least 20 dB down from the highest emission level within the authorized band.


3.7.2 Measuring Instruments

See list of measuring instruments of this test report.

3.7.3 Test Procedure

1. The transmitter output was connected to the spectrum analyzer via a low lose cable.
2. Set RBW = 100 kHz, Video bandwidth (VBW) $\geq$ RBW, scan up through 10th harmonic. All harmonics / spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW.


3.7.4 Test Setup

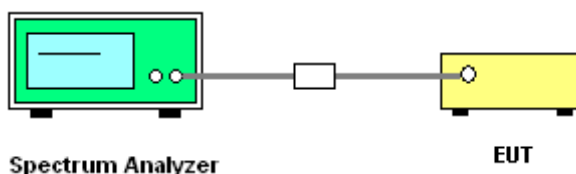

3.7.5 Test Result


Test Mode :	Mode 7	Temperature :	27.4°C
Test Channel :	00	Relative Humidity :	49%
		Test Engineer :	Eric Huang

Conducted Spurious Emission Plot between 9 kHz ~ 3 GHz

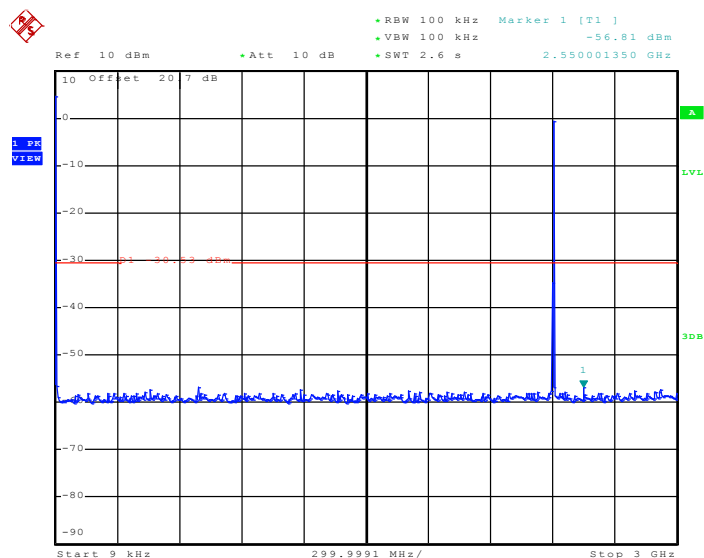

Date: 26.SEP.2009 03:00:26

Conducted Spurious Emission Plot between 1 GHz ~ 25 GHz

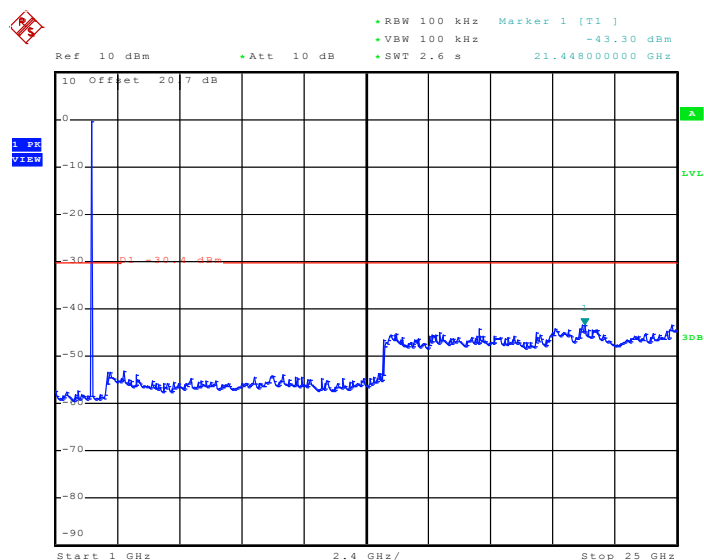


Date: 26.SEP.2009 03:00:47




Test Mode :	Mode 8	Temperature :	27.4°C
Test Channel :	39	Relative Humidity :	49%
		Test Engineer :	Eric Huang

Conducted Spurious Emission Plot between 9 kHz ~ 3 GHz

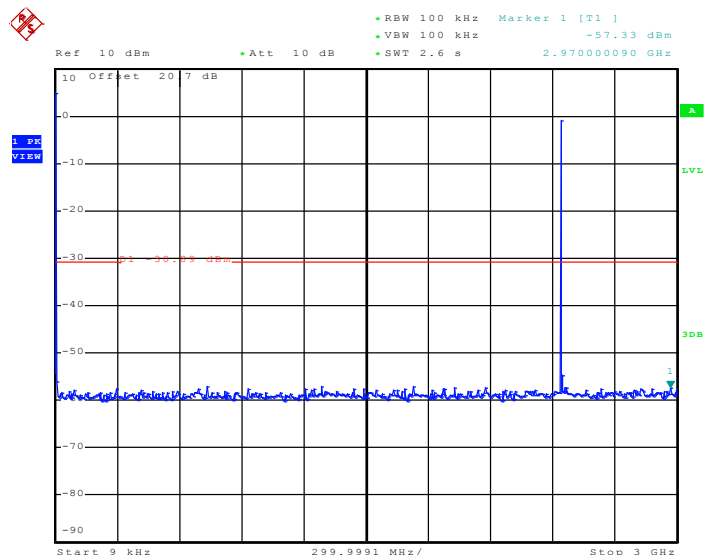

Date: 26.SEP.2009 03:01:06

Conducted Spurious Emission Plot between 1 GHz ~ 25 GHz

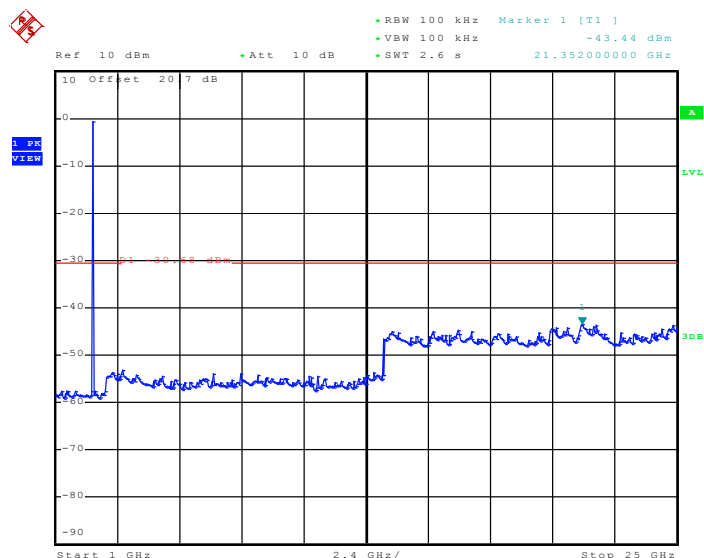


Date: 26.SEP.2009 03:01:35




Test Mode :	Mode 9	Temperature :	27.4°C
Test Channel :	78	Relative Humidity :	49%
		Test Engineer :	Eric Huang

Conducted Spurious Emission Plot between 9 kHz ~ 3 GHz

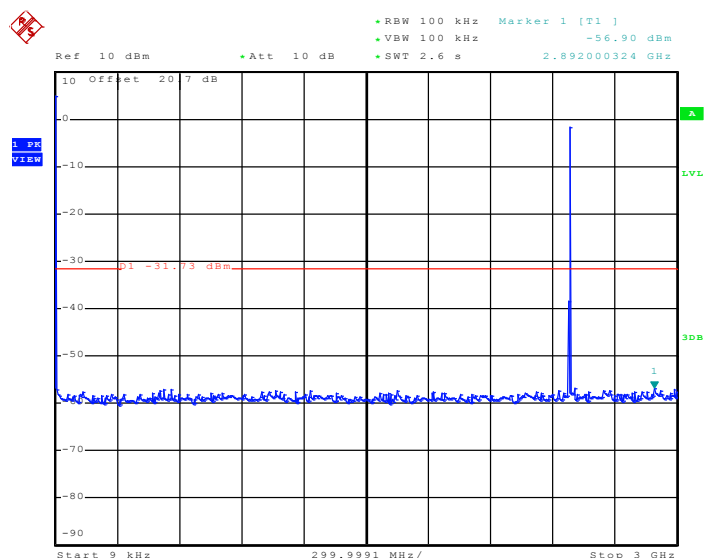

Date: 26.SEP.2009 03:01:58

Conducted Spurious Emission Plot between 1 GHz ~ 25 GHz

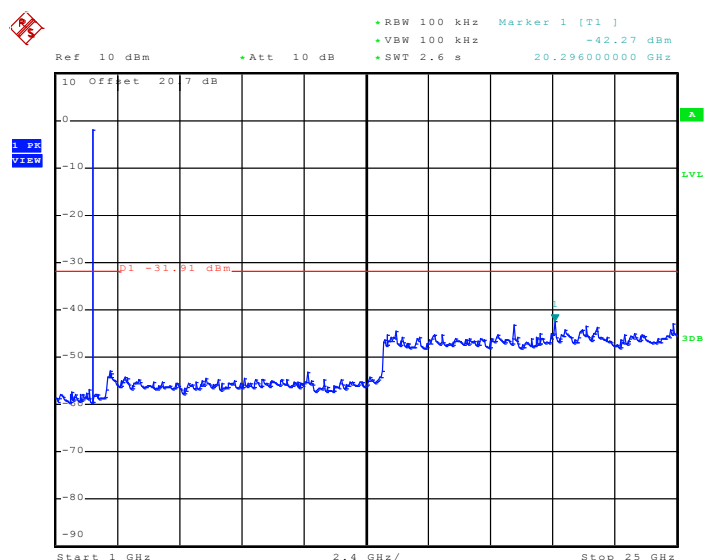

Date: 26.SEP.2009 03:02:34

3.8 AC Conducted Emission Measurement

3.8.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.8.2 Measuring Instruments

See list of measuring instruments of this test report.

3.8.3 Test Procedures


1. Please follow the guidelines in ANSI C63.4-2003.
2. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN).
4. All the support units are connecting to the other LISN.
5. The LISN provides 50 ohm coupling impedance for the measuring instrument.
6. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
7. Both sides of AC line were checked for maximum conducted interference.
8. The frequency range from 150 kHz to 30 MHz was searched.
9. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.8.4 Test Setup

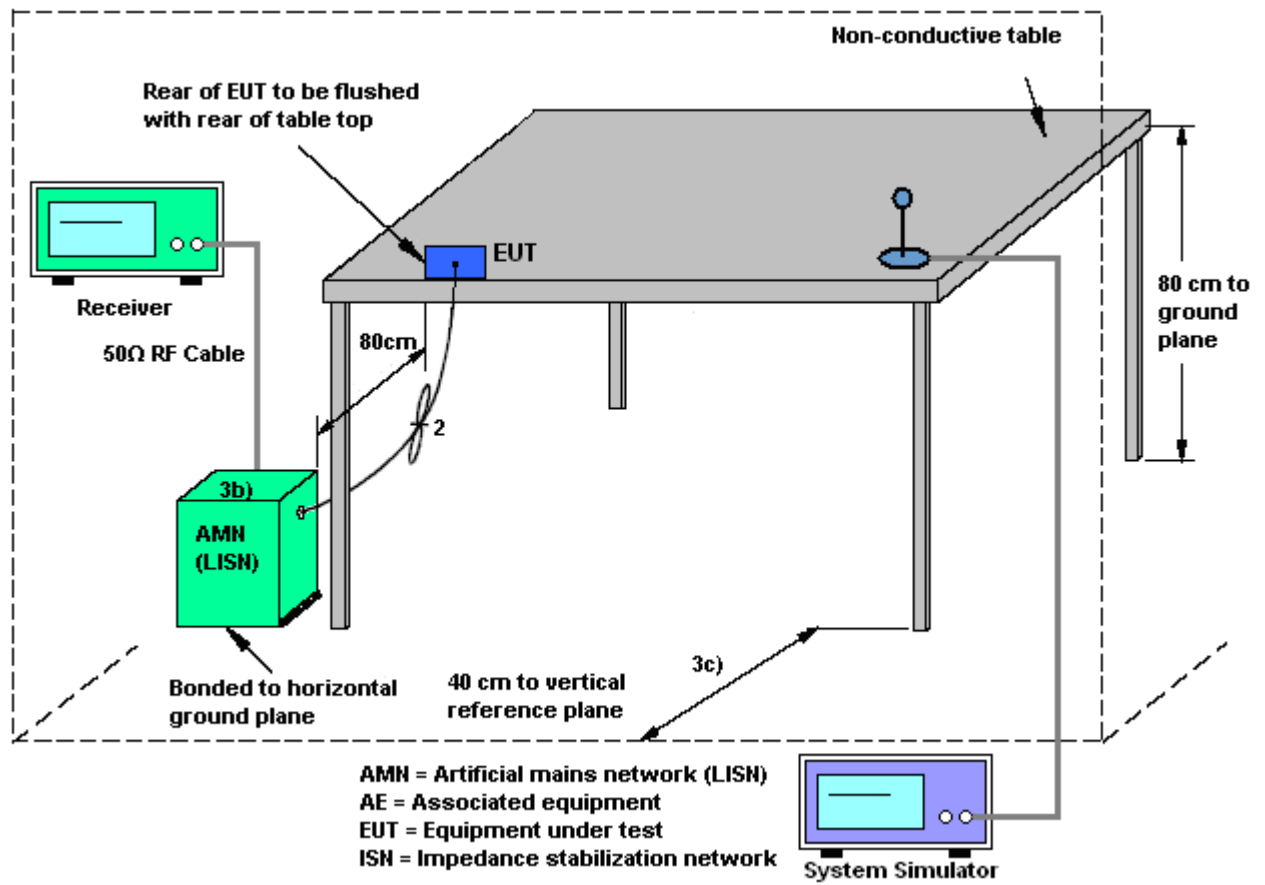

3.8.5 Test Result of AC Conducted Emission

Test Mode :	Mode 2	Temperature :	23~24°C
Test Engineer :	Cona Huang	Relative Humidity :	48~51%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	WCDMA Band V Idle + Bluetooth Link + WLAN Link + GPS Rx + Earphone 2 + Camera + Adapter 1		
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

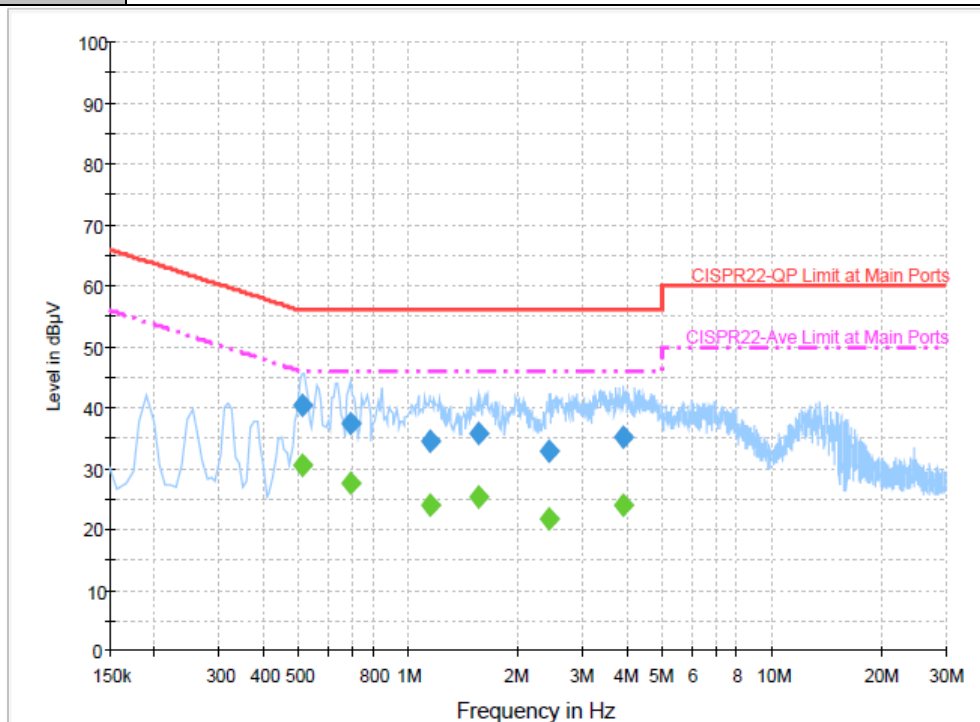


Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.510000	40.5	Off	L1	19.4	15.5	56.0
0.694000	37.5	Off	L1	19.5	18.5	56.0
1.142000	34.6	Off	L1	19.5	21.4	56.0
1.550000	35.7	Off	L1	19.5	20.3	56.0
2.422000	32.9	Off	L1	19.5	23.1	56.0
3.870000	35.1	Off	L1	19.5	20.9	56.0

Final Result 2

Frequency (MHz)	Average (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.510000	30.4	Off	L1	19.4	15.6	46.0
0.694000	27.7	Off	L1	19.5	18.3	46.0
1.142000	24.0	Off	L1	19.5	22.0	46.0
1.550000	25.3	Off	L1	19.5	20.7	46.0
2.422000	21.5	Off	L1	19.5	24.5	46.0
3.870000	24.1	Off	L1	19.5	22.0	46.0

Test Mode :	Mode 2	Temperature :	23~24℃
Test Engineer :	Cona Huang	Relative Humidity :	48~51%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	WCDMA Band V Idle + Bluetooth Link + WLAN Link + GPS Rx + Earphone 2 + Camera + Adapter 1		
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

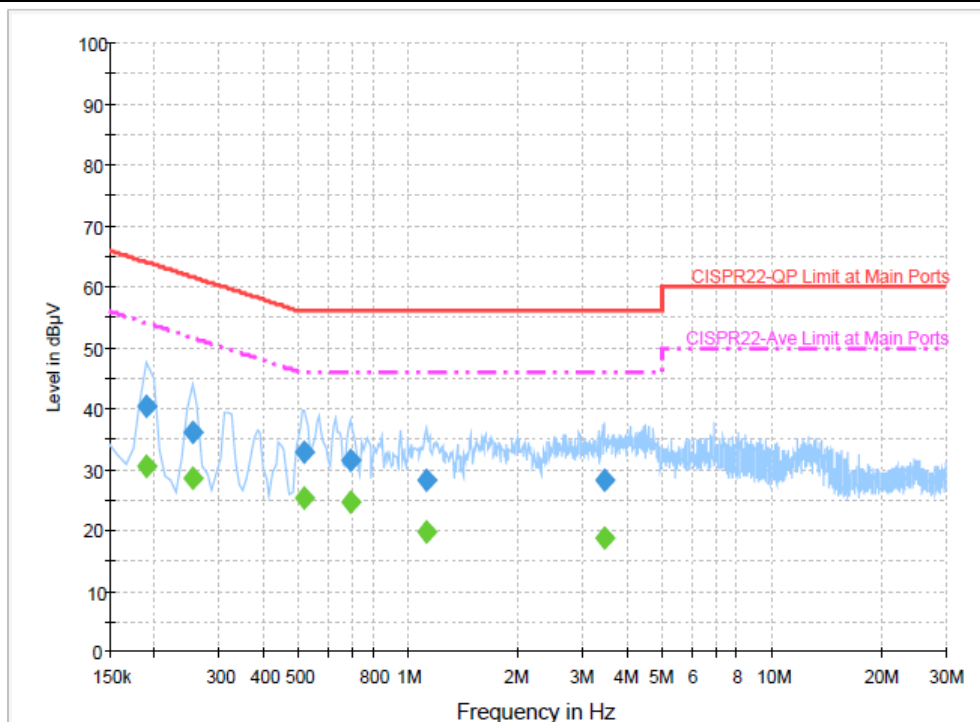
Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.190000	40.3	Off	N	19.5	23.7	64.0
0.254000	36.2	Off	N	19.4	25.4	61.6
0.518000	32.8	Off	N	19.5	23.2	56.0
0.694000	31.5	Off	N	19.5	24.5	56.0
1.118000	28.3	Off	N	19.5	27.7	56.0
3.462000	28.3	Off	N	19.5	27.7	56.0

Final Result 2

Frequency (MHz)	Average (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.190000	30.6	Off	N	19.5	23.4	54.0
0.254000	28.4	Off	N	19.4	23.2	51.6
0.518000	25.2	Off	N	19.5	20.8	46.0
0.694000	24.5	Off	N	19.5	21.5	46.0
1.118000	19.6	Off	N	19.5	26.4	46.0
3.462000	18.8	Off	N	19.5	27.2	46.0

3.9 Radiated Emission Measurement

3.9.1 Limit of Radiated Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.9.2 Measuring Instruments


See list of measuring instruments of this test report.

3.9.3 Test Procedures


1. The testing follows the guidelines in FCC Public Notice DA 00-705 Measurement Guidelines.
2. Use the following spectrum analyzer settings:
Span = wide enough to fully capture the emission being measured; RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold.
3. Follow the guidelines in ANSI C63.4-2003 with respect to maximizing the emission by rotating the EUT, measuring the emission for three EUT orthogonal planes, and adjusting the measurement antenna height and polarization. A pre-amp and a high pass filter are used for this test in order to get the good signal level.

3.9.4 Test Setup

For radiated emissions below 30MHz

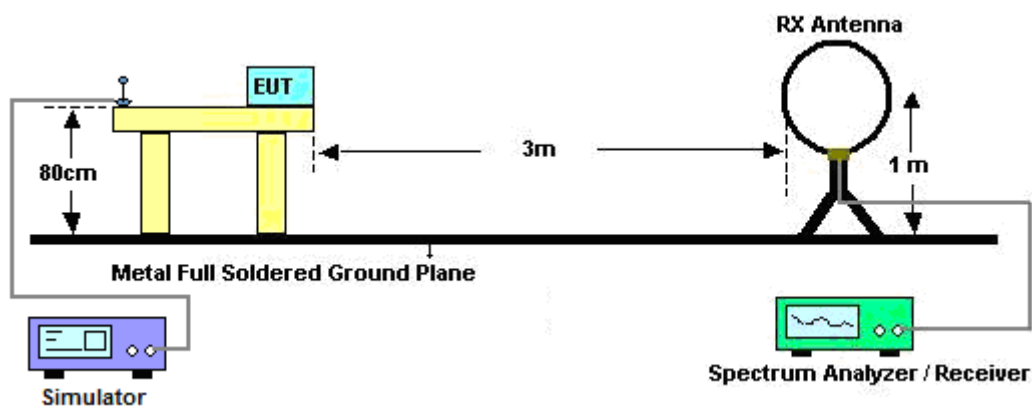

For radiated emissions above 30MHz

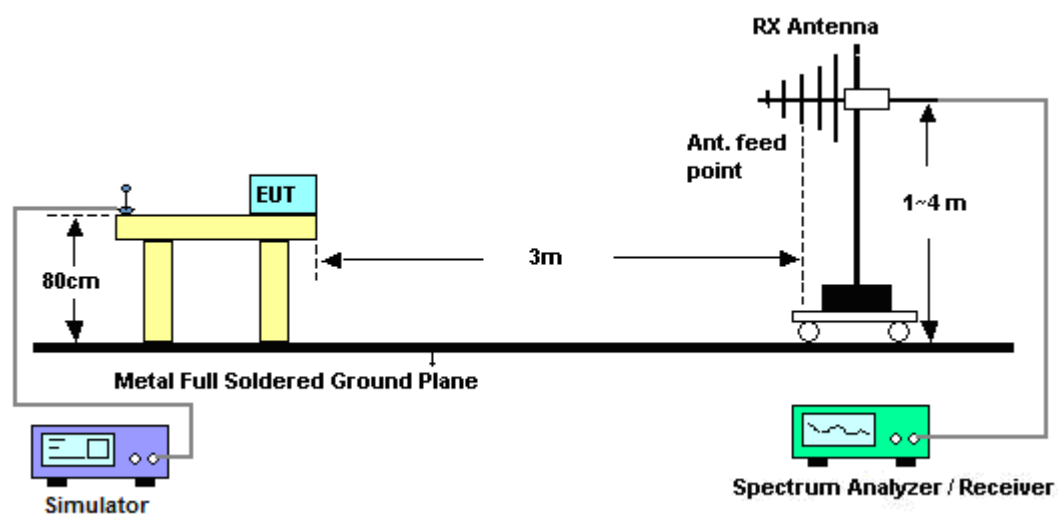

3.9.5 Test Results of Radiated Emissions (9 kHz ~ 30 MHz)

Test Engineer :	Kay Wu	Temperature :	25~26°C	
		Relative Humidity :	39~40%	

Frequency (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:


The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

3.9.6 Test Result of Radiated Emission (30 MHz ~ 10th Harmonic)

Test Mode :	Mode 1	Temperature :	25~26°C
Test Channel :	00	Relative Humidity :	39~40%
Test Engineer :	Cona Huang	Polarization :	Horizontal
Remark :	#9 and #10 are Fundamental Signals which can be ignored.		

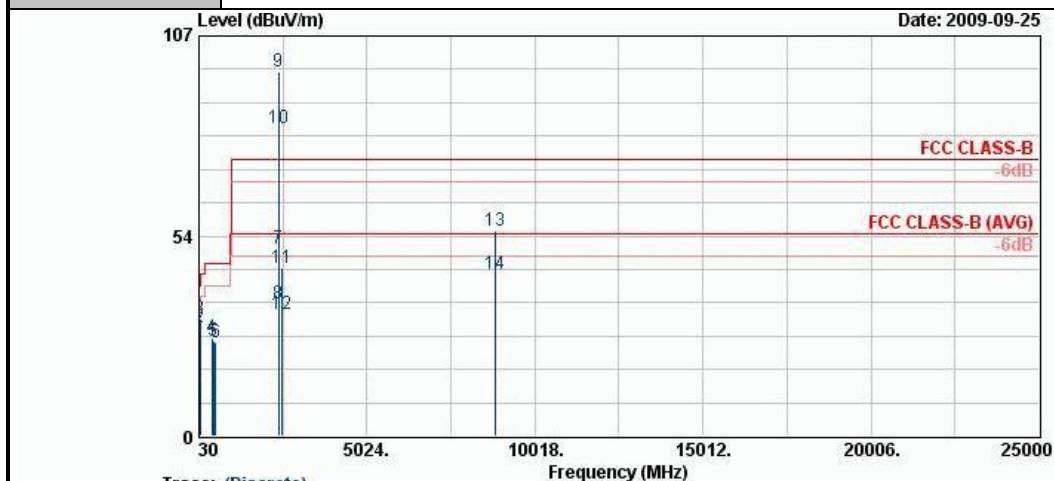


Trace: (Discrete)
 Site: D3CH07-HY
 Condition: FCC CLASS-B 3m SHF-EHF HORN HORIZONTAL
 Project: FR 982009-02
 Mode: Mode 1

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	Remark
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Pos	
			dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	30.00	28.48	-11.52	40.00	39.64	19.90	0.64	31.70	---	Peak
2	48.90	29.10	-10.90	40.00	50.01	10.00	0.79	31.70	---	Peak
3	73.74	31.34	-8.66	40.00	54.98	7.09	0.97	31.70	100	54 Peak
4	416.90	26.09	-19.91	46.00	37.91	16.71	2.65	31.18	---	Peak
5	466.60	25.38	-20.62	46.00	36.09	17.59	2.84	31.13	---	Peak
6	514.90	25.15	-20.85	46.00	34.85	18.41	2.98	31.09	---	Peak
7	2389.99	50.22	-23.78	74.00	47.02	32.11	5.47	34.38	150	24 Peak
8	2389.99	35.28	-18.72	54.00	32.07	32.13	5.46	34.38	150	24 Average
9 X	2402.00	97.62			94.39	32.16	5.44	34.38	150	24 Peak
10 @	2402.00	82.47			79.26	32.13	5.46	34.38	150	24 Average
11	2500.00	44.78	-29.22	74.00	41.51	32.30	5.37	34.40	150	24 Peak
12	2500.00	32.46	-21.54	54.00	29.19	32.30	5.37	34.40	150	24 Average
13	8841.00	55.01	-18.99	74.00	43.89	36.20	10.29	35.37	100	41 Peak
14	8841.00	43.53	-10.47	54.00	32.41	36.20	10.29	35.37	100	41 Average



Test Mode :	Mode 1	Temperature :	25~26°C
Test Channel :	00	Relative Humidity :	39~40%
Test Engineer :	Conar Huang	Polarization :	Vertical
Remark :	#9 and #10 are Fundamental Signals which can be ignored.		

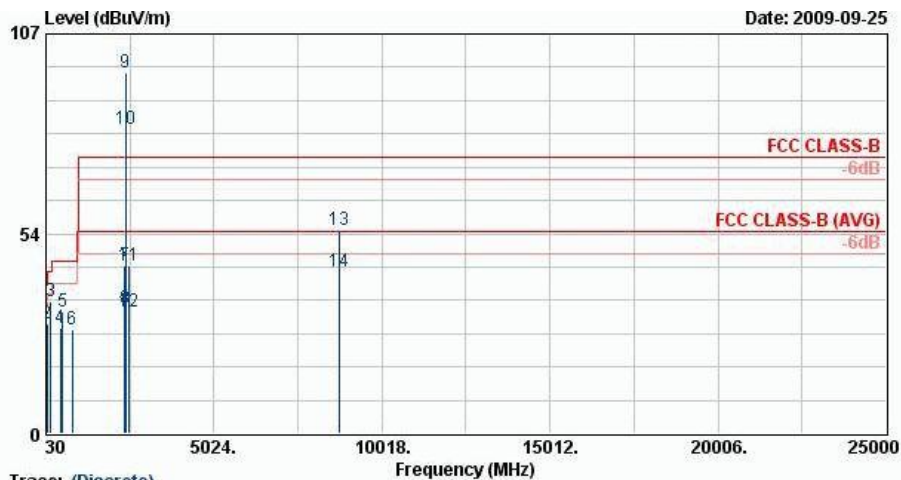


Trace: (Discrete)

Site : D3CH07-HY
Condition : FCC CLASS-B 3m SHF-EHF HORN VERTICAL
Project : FR 982009-02
Mode : Mode 1

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	Remark
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Pos	Pos	
			dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	30.54	32.07	-7.93	40.00	43.77	19.36	0.65	31.70	100	123 Peak
2	68.61	29.59	-10.41	40.00	53.62	6.71	0.96	31.70	---	---
3	172.02	35.39	-8.11	43.50	55.49	9.97	1.56	31.63	---	---
4	466.60	28.22	-17.78	46.00	38.92	17.59	2.84	31.13	---	---
5	514.90	32.56	-13.44	46.00	42.25	18.41	2.98	31.09	---	---
6	811.00	27.76	-18.24	46.00	32.45	22.14	3.87	30.70	---	---
7	2374.41	44.86	-29.14	74.00	41.65	32.13	5.46	34.38	100	185 Peak
8	2374.41	33.57	-20.43	54.00	30.37	32.11	5.47	34.38	100	185 Average
9 X	2402.00	96.74			93.52	32.16	5.44	34.38	100	185 Peak
10 @	2402.00	81.66			78.45	32.13	5.46	34.38	100	185 Average
11	2500.00	44.75	-29.25	74.00	41.48	32.30	5.37	34.40	100	185 Peak
12	2500.00	32.48	-21.52	54.00	29.21	32.30	5.37	34.40	100	185 Average
13	8757.00	54.64	-19.36	74.00	43.58	36.15	10.26	35.35	100	287 Peak
14	8757.00	43.25	-10.75	54.00	32.19	36.15	10.26	35.35	100	287 Average




Test Mode :	Mode 2	Temperature :	25~26°C
Test Channel :	39	Relative Humidity :	39~40%
Test Engineer :	Kay Wu	Polarization :	Horizontal
Remark :	#9 and #10 are Fundamental Signals which can be ignored.		

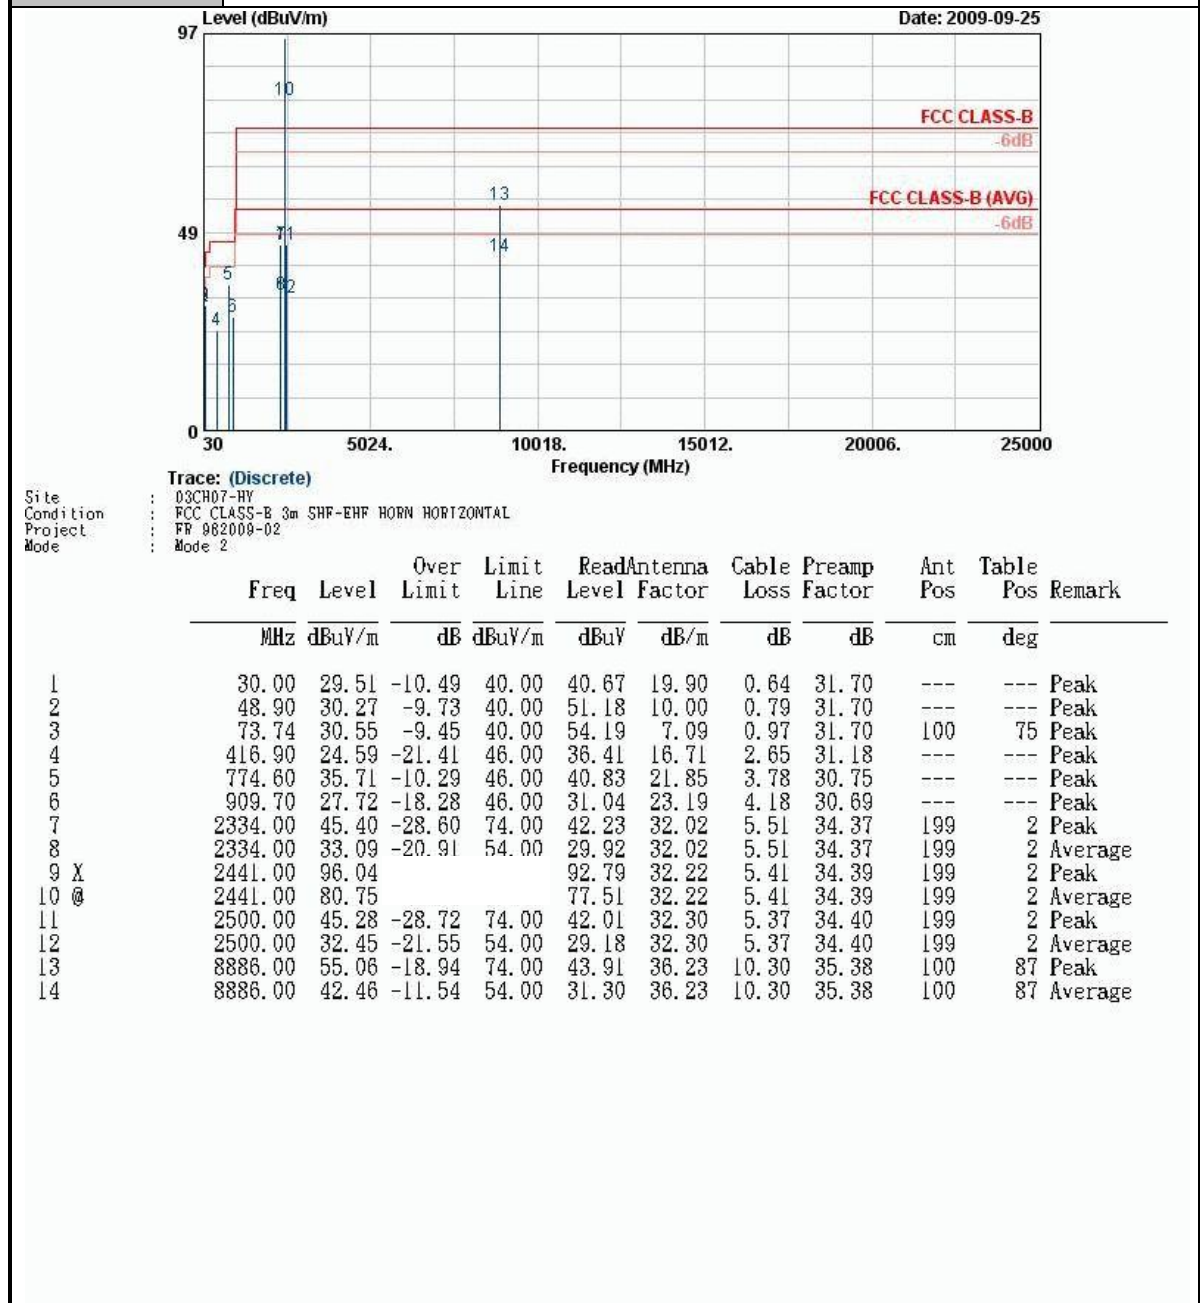




Test Mode :	Mode 2	Temperature :	25~26°C
Test Channel :	39	Relative Humidity :	39~40%
Test Engineer :	Kay Wu	Polarization :	Vertical
Remark :	#9 and #10 are Fundamental Signals which can be ignored.		

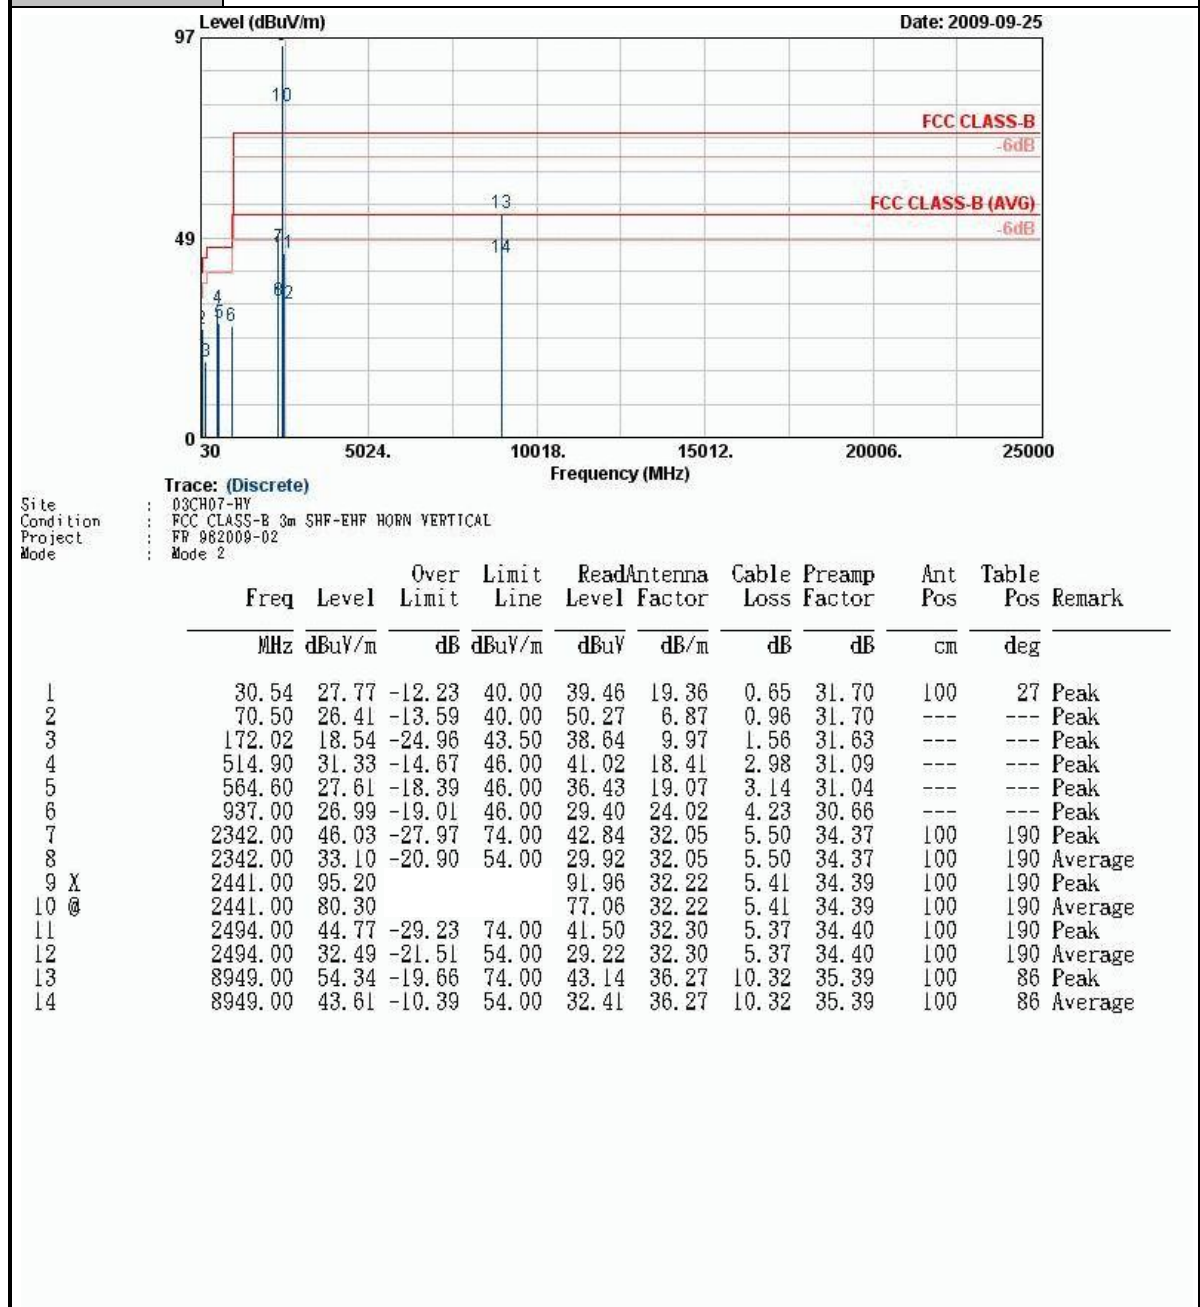



Test Mode :	Mode 3	Temperature :	25~26°C
Test Channel :	78	Relative Humidity :	39~40%
Test Engineer :	Kay Wu	Polarization :	Horizontal
Remark :	#9 and #10 are Fundamental Signals which can be ignored.		

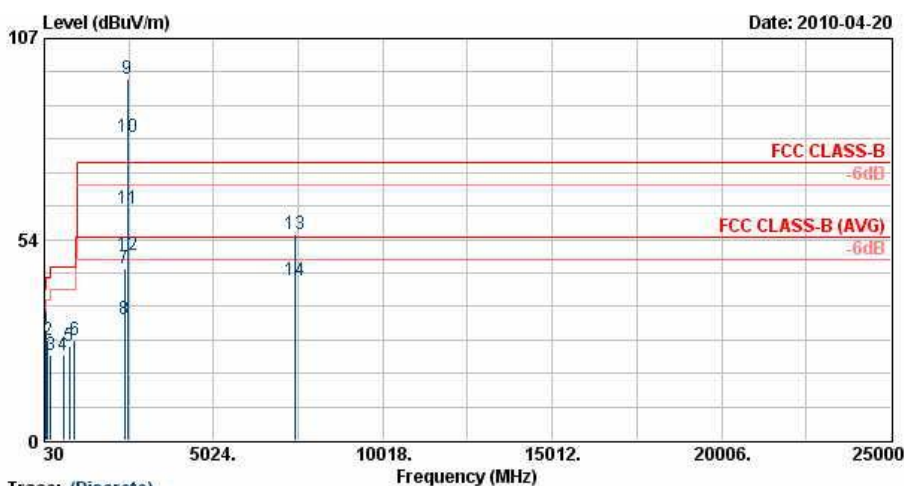


Trace: (Discrete)

Site : 03CH06-HV
Condition : FCC CLASS-B 3m SHF-EHF HORN HORIZONTAL
Project : FR 982009-10
Mode : Mode 1

	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Remark
			dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	74.28	29.41	-10.59	40.00	52.94	6.94	1.33	31.81	100	117	Peak
2	135.84	26.52	-16.98	43.50	45.03	11.32	1.89	31.71	---	---	Peak
3	211.44	22.56	-20.94	43.50	43.65	8.64	2.46	32.19	---	---	Peak
4	590.50	22.56	-23.44	46.00	31.75	18.60	4.38	32.17	---	---	Peak
5	766.90	24.90	-21.10	46.00	32.20	19.80	5.00	32.10	---	---	Peak
6	931.40	26.55	-19.45	46.00	31.69	20.86	5.52	31.52	---	---	Peak
7	2390.00	45.76	-28.24	74.00	44.38	31.86	3.92	34.39	200	182	Peak
8	2390.00	32.32	-21.68	54.00	30.94	31.86	3.92	34.39	200	182	Average
9 @	2480.00	96.31			94.65	31.98	4.05	34.37	200	182	Peak
10 @	2480.00	80.61			78.95	31.98	4.05	34.37	200	182	Average
11	2483.50	61.57	-12.43	74.00	59.91	31.98	4.05	34.37	200	182	Peak
12 !	2483.50	49.16	-4.84	54.00	47.50	31.98	4.05	34.37	200	182	Average
13	7407.00	54.85	-19.15	74.00	45.98	35.62	7.24	33.98	100	281	Peak
14	7407.00	42.62	-11.38	54.00	33.75	35.62	7.24	33.98	100	281	Average

Test Mode :	Mode 3	Temperature :	25~26°C
Test Channel :	78	Relative Humidity :	39~40%
Test Engineer :	Kay Wu	Polarization :	Vertical
Remark :	#9 and #10 are Fundamental Signals which can be ignored.		

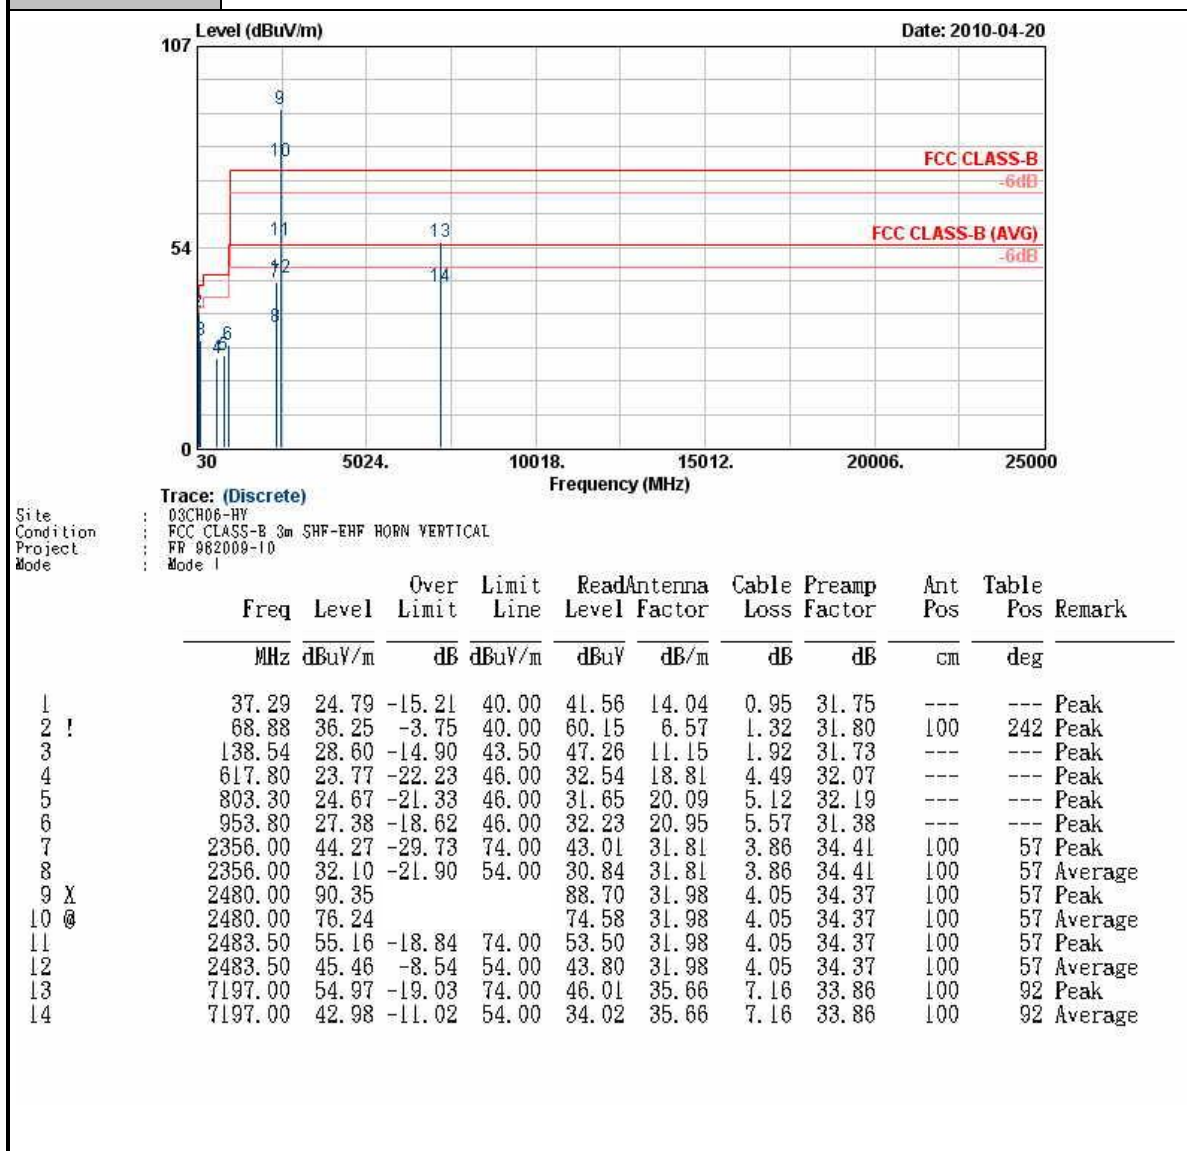

3.10 Antenna Requirements

3.10.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

3.10.2 Antenna Connected Construction

The antennas type used in this product is PIFA Antenna without connector and it is considered to meet antenna requirement.

3.10.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Due Date	Remark
Spectrum Analyzer	R&S	FSP40	100055	9kHz~40GHz	Jun. 23, 2009	Jun. 22, 2010	Conducted (TH02-HY)
Power Meter	Anritsu	ML2495A	0932001	N/A	Sep. 17, 2009	Sep. 16, 2010	Conducted (TH02-HY)
Power Sensor	Anritsu	MA2411B	0846202	N/A	Sep. 10, 2009	Sep. 09, 2010	Conducted (TH02-HY)
EMI Test Receive	R&S	ESCS 30	100356	9KHz ~ 2.75GHz	Aug. 05, 2009	Aug. 04, 2010	Conduction (CO05-HY)
Two-LISN	R&S	ENV216	11-100081	9kHz~30MHz	Nov. 26, 2008	Nov. 25, 2009	Conduction (CO05-HY)
Two-LISN	R&S	ENV216	11-100080	9kHz~30MHz	Nov. 26, 2008	Nov. 25, 2009	Conduction (CO05-HY)
AC Power Source	APC	APC-1000W	N/A	N/A	N/A	N/A	Conduction (CO05-HY)
System Simulator	R&S	CMU200	105934	N/A	Nov. 11, 2008	Nov. 10, 2010	Conduction (CO05-HY)
GPS Station	T&E	GS-50	N/A	N/A	N/A	N/A	Conduction (CO05-HY)
Bilog Antenna	SCHAFFNER	CBL6111C	2726	30MHz ~ 1GHz	Nov. 20, 2008	Nov. 19, 2009	Radiation (03CH07-HY)
Spectrum Analyzer	R&S	FSP	101067	9KHz ~ 30GHz	Dec. 02, 2008	Dec. 01, 2009	Radiation (03CH07-HY)
Double Ridge Horn Antenna	ESCO	3117	00075962	1GHz ~ 18GHz	Aug. 20, 2009	Aug. 19, 2010	Radiation (03CH07-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170251	15GHz- 40GHz	Oct. 16, 2008	Oct. 15, 2009	Radiation (03CH07-HY)
Pre Amplifier	Agilent	8449B	3008A02362	1GHz~ 26.5GHz	Dec. 17, 2008	Dec. 16, 2009	Radiation (03CH07-HY)
Pre Amplifier	COM-POWER	PA-103A	161241	10-1000MHz.32dB.GAIN	Mar. 27, 2009	Mar. 26, 2010	Radiation (03CH07-HY)
Loop Antenna	R&S	HFH2-Z2	860004/001	9 KHz~30 MHz	May 22, 2008	May 21, 2010	Radiation (03CH07-HY)
Bluetooth Base Station	R&S	CBT32	100519	N/A	May 12, 2009	May 11, 2011	Radiation (03CH07-HY)
Spectrum Analyzer	Agilent	E4408B	MY44211030	9KHz-26.5GHz	Oct. 23, 2009	Oct. 22, 2010	Radiation (03CH06-HY)
Spectrum Analyzer	R&S	FSP40	100057	9KHz-40GHz	Oct. 20, 2009	Oct. 19, 2010	Radiation (03CH06-HY)
EMI Test Receiver	R&S	ESVS10	834468/003	20MHz-1000MHz	Apr. 28, 2009	Apr. 27, 2010	Radiation (03CH06-HY)
Bilog Antenna	SCHAFFNER	CBL6112B	2885	30MHz -2GHz	Oct. 31, 2009	Oct. 30, 2010	Radiation (03CH06-HY)
Double Ridge Horn Antenna	EMCO	3117	00066583	1GHz~18GHz	Aug. 20, 2009	Aug. 19, 2010	Radiation (03CH06-HY)
Double Ridge Horn Antenna	Training Research	AH-0801	95119	8GHz~18GHz	Nov. 02, 2009	Nov. 01, 2010	Radiation (03CH06-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170251	15GHz- 40GHz	Oct. 14, 2009	Oct. 13, 2010	Radiation (03CH06-HY)
Pre Amplifier	Agilent	8449B	3008A01917	1GHz- 26.5GHz	Nov. 11, 2009	Nov. 10, 2010	Radiation (03CH06-HY)
Amplifier	Agilent	310N	186713	9KHz~1GHz	Apr. 15, 2010	Apr. 14, 2011	Radiation (03CH06-HY)

5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Contribution	Uncertainty of x_i		$u(x_i)$
	dB	Probability Distribution	
Receiver reading	0.10	Normal(k=2)	0.05
Cable loss	0.10	Normal(k=2)	0.05
AMN insertion loss	2.50	Rectangular	0.63
Receiver Spec	1.50	Rectangular	0.43
Site imperfection	1.39	Rectangular	0.80
Mismatch	+0.34/-0.35	U-shape	0.24
Combined standard uncertainty Uc(y)	1.13		
Measuring uncertainty for a level of confidence of 95% U=2Uc(y)	2.26		

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Contribution	Uncertainty of x_i		$u(x_i)$
	dB	Probability Distribution	
Receiver reading	0.41	Normal(k=2)	0.21
Antenna factor calibration	0.83	Normal(k=2)	0.42
Cable loss calibration	0.25	Normal(k=2)	0.13
Pre Amplifier Gain calibration	0.27	Normal(k=2)	0.14
RCV/SPA specification	2.50	Rectangular	0.72
Antenna Factor Interpolation for Frequency	1.00	Rectangular	0.29
Site imperfection	1.43	Rectangular	0.83
Mismatch	+0.39/-0.41	U-shaped	0.28
Combined standard uncertainty Uc(y)	1.27		
Measuring uncertainty for a level of confidence of 95% U=2Uc(y)	2.54		

Uncertainty of Radiated Emission Measurement (1 GHz ~ 40 GHz)

Contribution	Uncertainty of x_i		$u(x_i)$	C_i	$C_i * u(x_i)$
	dB	Probability Distribution			
Receiver reading	± 0.10	Normal(k=1)	0.10	1	0.10
Antenna factor calibration	± 1.70	Normal(k=2)	0.85	1	0.85
Cable loss calibration	± 0.50	Normal(k=2)	0.25	1	0.25
Receiver Correction	± 2.00	Rectangular	1.15	1	1.15
Antenna Factor Directional	± 1.50	Rectangular	0.87	1	0.87
Site imperfection	± 2.80	Triangular	1.14	1	1.14
Mismatch Receiver VSWR $\Gamma_1 = 0.197$ Antenna VSWR $\Gamma_2 = 0.194$ Uncertainty = $20 \log(1 - \Gamma_1 \Gamma_2)$	+0.34/-0.35	U-shaped	0.244	1	0.244
Combined standard uncertainty $U_c(y)$	2.36				
Measuring uncertainty for a level of confidence of 95% $U = 2U_c(y)$	4.72				

6 Certification of TAF Accreditation



The image shows a TAF Accreditation Certificate for Sporton International Inc. The certificate is framed in a purple border. At the top center is the TAF logo, which consists of the letters 'TAF' inside a stylized oval. To the right of the logo, the text 'Certificate No. : L1190-100316' is printed. Below the logo, the name of the accrediting body is written in Chinese and English: '財團法人全國認證基金會' and 'Taiwan Accreditation Foundation'. The main title 'Certificate of Accreditation' is centered in a large, bold font. Below this, the text 'This is to certify that' is followed by the name of the accredited entity, 'Sporton International Inc.', and its laboratory, 'EMC & Wireless Communications Laboratory'. The address of the laboratory is listed as 'No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.'. The certificate states that the entity is accredited in respect of laboratory. A list of accreditation details follows, including the criteria (ISO/IEC 17025:2005), the accreditation number (1190), the original accreditation date (December 15, 2003), the effective period (January 10, 2010 to January 09, 2013), the accredited scope (Testing Field, see described in the Appendix), and the specific accreditation program (Accreditation Program for Designated Testing Laboratory for Commodities Inspection, Accreditation Program for Telecommunication Equipment Testing Laboratory, Accreditation Program for BSMI Mutual Recognition Arrangement with Foreign Authorities). The certificate is signed by Jay-San Chen, President of the Taiwan Accreditation Foundation, with the date March 16, 2010. The bottom left corner indicates that the certificate is part of a 21-page set. A note at the bottom states that the Appendix forms an integral part of the certificate and is invalid without it.

Certificate No. : L1190-100316

財團法人全國認證基金會
Taiwan Accreditation Foundation

Certificate of Accreditation

This is to certify that

Sporton International Inc.
EMC & Wireless Communications Laboratory
No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien,
Taiwan, R.O.C.

is accredited in respect of laboratory

Accreditation Criteria	: ISO/IEC 17025:2005
Accreditation Number	: 1190
Originally Accredited	: December 15, 2003
Effective Period	: January 10, 2010 to January 09, 2013
Accredited Scope	: Testing Field, see described in the Appendix
Specific Accreditation Program	: Accreditation Program for Designated Testing Laboratory for Commodities Inspection Accreditation Program for Telecommunication Equipment Testing Laboratory Accreditation Program for BSMI Mutual Recognition Arrangement with Foreign Authorities

Jay-San Chen

Jay-San Chen
President, Taiwan Accreditation Foundation
Date : March 16, 2010

Pl. total 21 pages

The Appendix forms an integral part of this Certificate, which shall be invalid when use without the Appendix



Appendix A. Photographs of EUT

Please refer to Sporton report number EP982009-10A as below.